



**FCC CFR47 PART 15 SUBPART E
CERTIFICATION**

TEST REPORT

FOR

802.11 a/b/g MINI PCI MODULE

MODEL NUMBER: AR5BMB6

FCC ID: PPD-AR5BMB6

REPORT NUMBER: 05U3230-3

ISSUE DATE: FEBRUARY 25, 2005

Prepared for
ATHEROS COMMUNICATIONS, INC.
529 ALMANOR AVE.
SUNNYVALE, CA 94085
U.S.A.

Prepared by
COMPLIANCE ENGINEERING SERVICES, INC.
d.b.a.
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888



LAB CODE:200065-0

Revision History

<u>Rev.</u>	<u>Revisions</u>	<u>Revised By</u>
-------------	------------------	-------------------

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. MEASUREMENT UNCERTAINTY.....	5
5. EQUIPMENT UNDER TEST.....	6
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. SOFTWARE AND FIRMWARE	7
5.5. WORST-CASE CONFIGURATION AND MODE.....	7
5.6. DESCRIPTION OF TEST SETUP	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. LIMITS AND RESULTS	11
7.1. CHANNEL TESTS FOR THE 5150 TO 5350 MHz BAND	11
7.1.1. EMISSION BANDWIDTH	11
7.1.2. PEAK POWER	19
7.1.3. MAXIMUM PERMISSIBLE EXPOSURE.....	29
7.1.4. AVERAGE POWER.....	32
7.1.5. PEAK POWER SPECTRAL DENSITY	33
7.1.6. PEAK EXCURSION	42
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	51
7.2. RADIATED EMISSIONS.....	59
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	59
7.2.2. TRANSMITTER ABOVE 1 GHZ FOR 5150 TO 5350 MHz BAND	62
7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz.....	80
7.3. POWERLINE CONDUCTED EMISSIONS	84
8. SETUP PHOTOS.....	88

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: ATEROS COMMUNICATIONS, INC.
529 ALMANOR AVENUE
SUNNYVALE, CA 94085

EUT DESCRIPTION: 802.11 a/b/g MINI PCI MODULE

MODEL: AR5BMB6

SERIAL NUMBER: 0011F5-3C53C1, 0011F5-007890

DATE TESTED: JANUARY 26– FEBRUARY 22, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART E	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



YAN ZHENG
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

HITESH SOLANKI
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a MiniPCI 802.11a/b/g (with TURBO modes) transceiver module.

The radio module is manufactured by Atheros Communications, Inc..

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

5150 to 5250 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180 - 5240	802.11a	14.75	29.85
5200 - 5250	802.11a Turbo	16.49	44.57

5250 to 5350 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5260 - 5320	802.11a	17.67	58.48
5250 - 5290	802.11a Turbo	17.45	55.59

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a WNC W/N-S-1.13-300W- (2-2-1) & 300B-(2-2-1) Omnidirectional antenna, which has a maximum antenna gain of 3.6dBi (Including cable loss) at 2.4GHz band, and gain of 4.8dBi (Including cable loss) at 5.8GHz band . And the radio also utilizes a WNC WN-S-1.37-300W- (2-2-1)&300B-(2-2-1) Omnidirectional antenna, which has a maximum antenna gain of 5.6dBi (Including cable loss) at 5.2GHz band. All other lower gain antennas of the same type that may be used with this module are listed in a separate document.

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was Atheros AR 5002 Anwi Diagnostic Kernal.

The test utility software used during testing was ART, rev. 5.2 Build 55.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 5320 MHz.

The worst-case data rate for this channel is determined to be 6 Mb/s, based on previous experience with CB62 testing.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST			
Description	Manufacturer	Model	Serial Number
Laptop PC	IBM	Thinkpad R40	FX-28542
AC Adapter	IBM	08K8204	6LV3CD7EN
Laptop PC	Dell	PR04S	48Q-0211
AC Adapter	Dell	HP-0Q065B83	N/A


I/O CABLES

I/O CABLE LIST					
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length
1	DC	1	DC	Unshielded	1.8 m
2	AC	1	IEC	Unshielded	1.5 m
3	Antenna	2	UFL	Unshielded	.7 m

TEST SETUP

The EUT is installed in a host laptop computer via a cardbus-to-miniPCI adapter / extension board during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

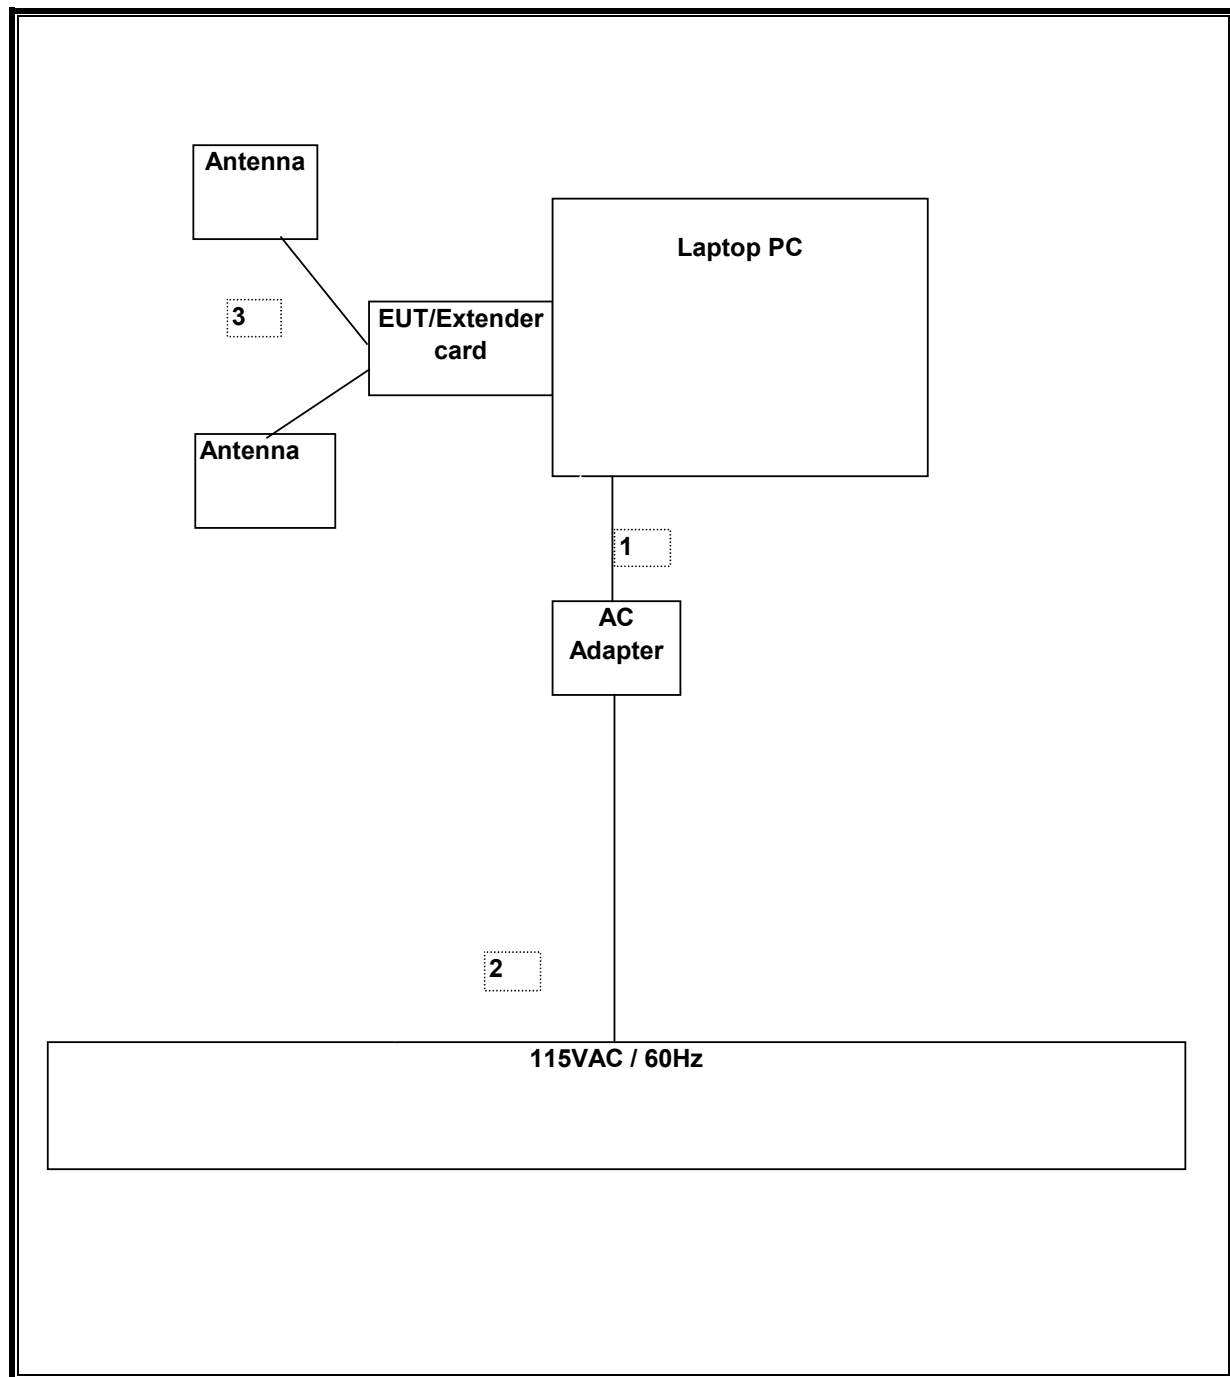

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Power Meter	R & S	NRVS	DE 12101	10/21/05
Power Sensor,18GHz,300 mW	R&S	NVR-Z51	DE 13014	10/20/05
Signal Generator 2 -40 GHz	R & S	SMP04	DE 34210	5/2/05
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	9/12/05
Amplifier 1-26GHz	MITEQ	NSP2600-SP	924342	8/17/05
30MHz---- 2Ghz	Sunol Sciences	JB1 Antenna	A121003	9/22/05
EMI Test Receiver	R & S	ESHS 20	827129/006	10/22/05
Site A Line Stabilizer/Conditioner	Triplite	LC-1800a	A005181	CNR
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	10/21/05
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/05
Quasi-Peak Adaptor	HP	85650A	2811A01155	5/24/05
SA Display Section 2	HP	85662A	2816A16696	5/24/05
SA RF Section, 1.5 GHz	HP	85680B	2814A04227	2/22/05
Site A Preamplifier, 1300MHz	HP	8447D	2944A06833	8/17/05
Spectrum Analyzer 3Hz ~ 26.5GHz	Agilent	A E4440A	647173	6/16/05

7. LIMITS AND RESULTS

7.1. CHANNEL TESTS FOR THE 5150 TO 5350 MHz BAND

7.1.1. EMISSION BANDWIDTH

LIMIT

§15.403 (i) Emission bandwidth. For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 1% to 3% of the 26 dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.

RESULTS


No non-compliance noted:


802.11a Mode


Channel	Frequency (MHz)	B (MHz)	10 Log B (dB)
Low	5180	25.80	14.12
Middle	5240	27.03	14.32
Middle	5260	28.37	14.53
High	5320	26.95	14.30


802.11a Turbo Mode


Channel	Frequency (MHz)	B (MHz)	10 Log B (dB)
Low	5200	48.30	16.84
Middle	5250	48.88	16.89
High	5290	48.96	16.90

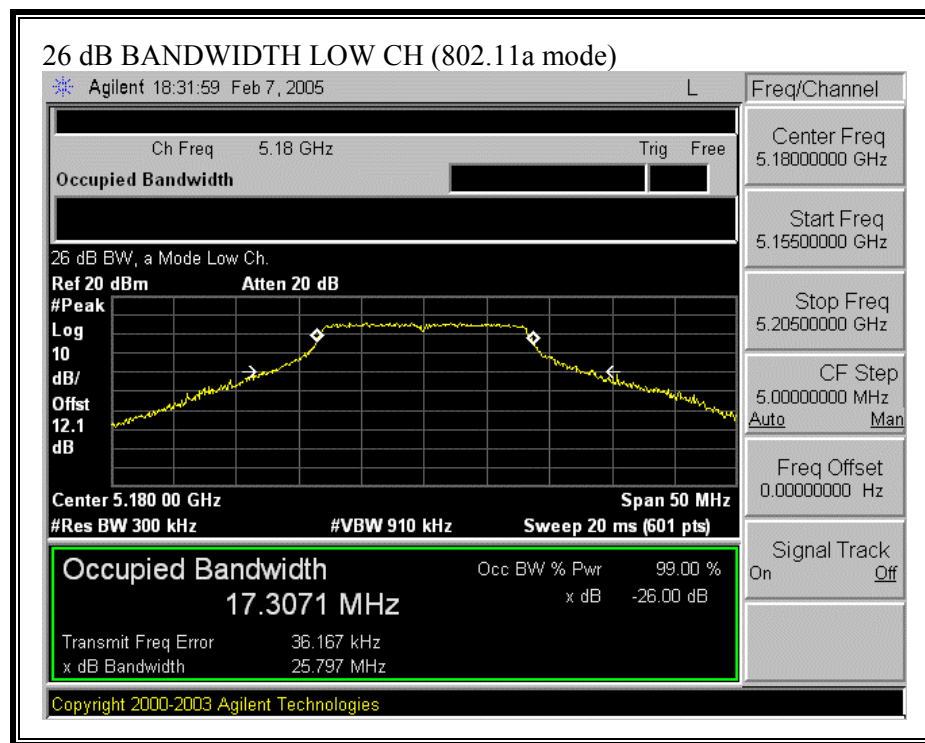


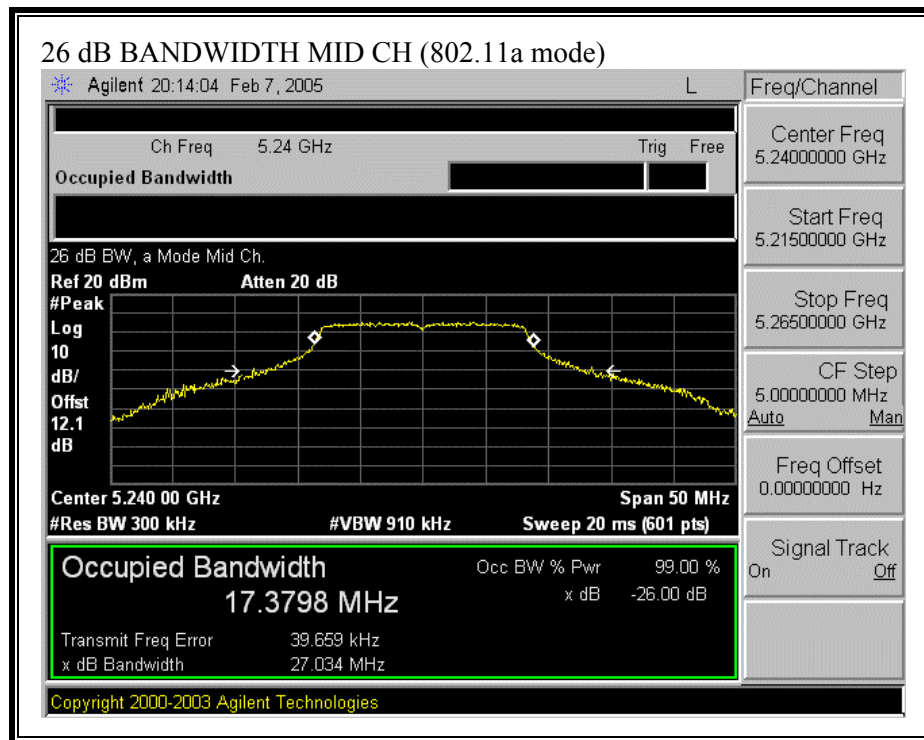


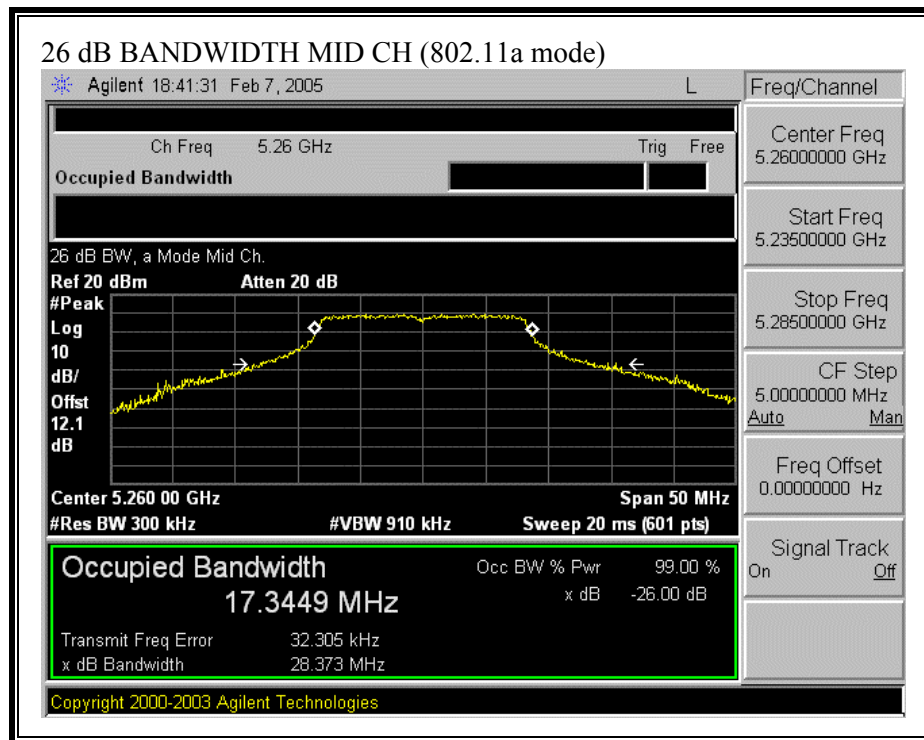

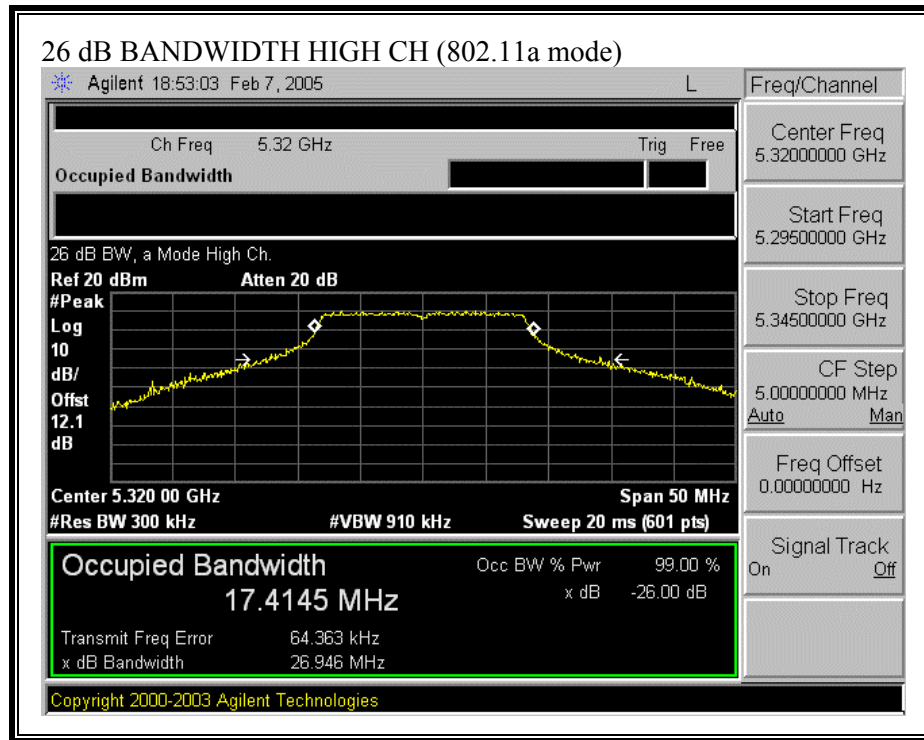

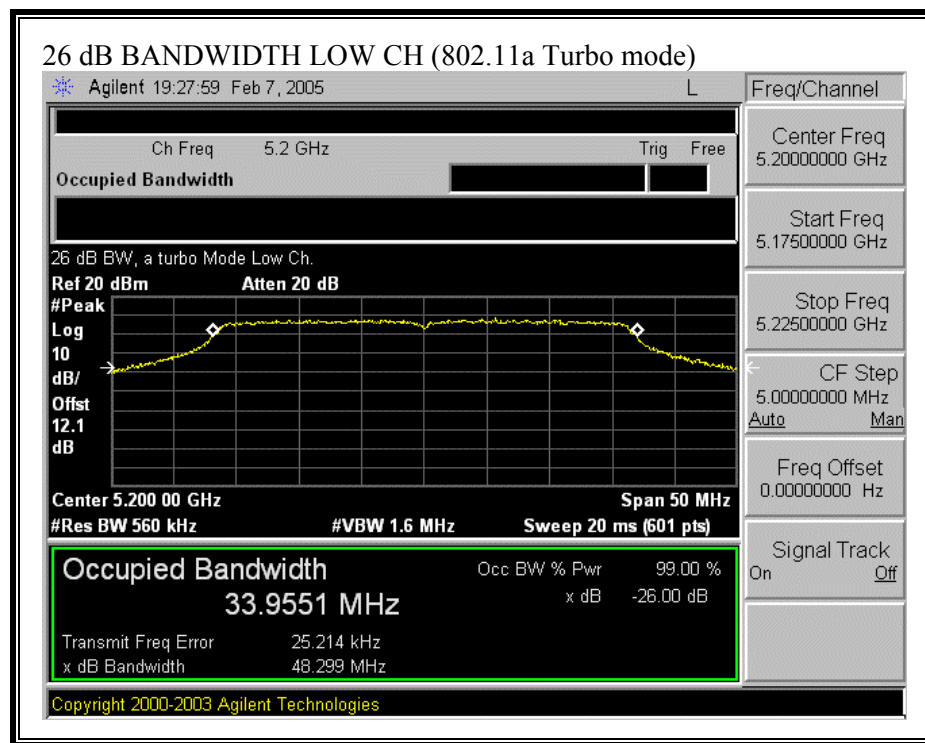

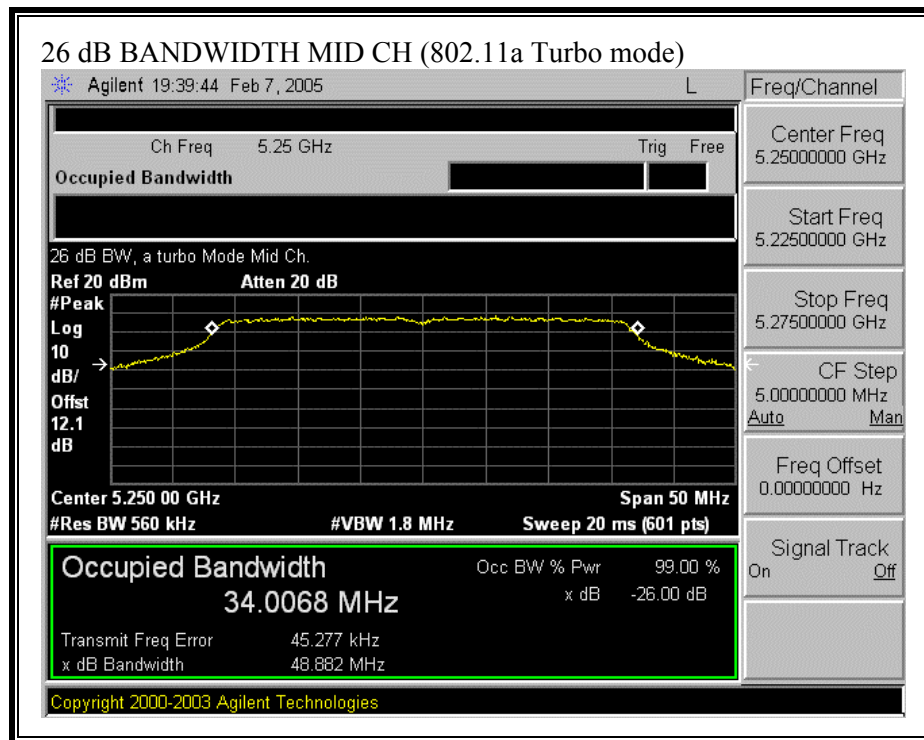

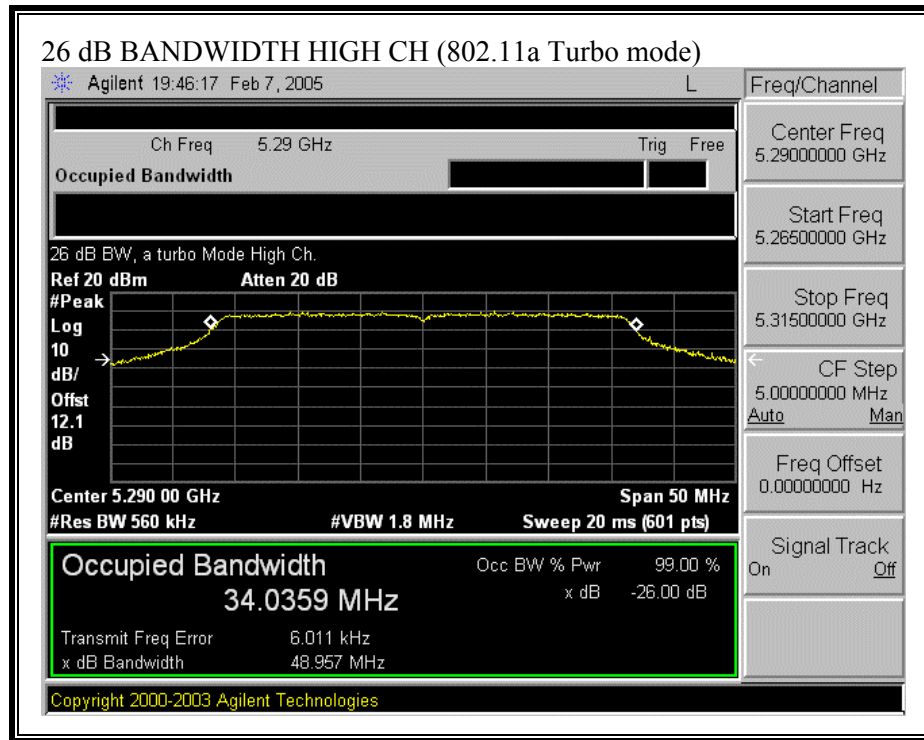

7.1.2. PEAK POWER

LIMIT

§15.407 (a) (1) For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407 (a) (1) For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

LIMITS AND RESULTS

No non-compliance noted:

Limit in 5150 to 5250 MHz Band

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	4 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5180	17	25.797	18.12	5.56	17.00
Low	5240	17	27.03	18.32	5.56	17.00

Limit in 5250 to 5350 MHz Band

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Mid	5260	24	28.373	25.53	5.56	24.00
High	5320	24	26.946	25.30	5.56	24.00

Results

Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dB)
Low	5180	14.59	17.00	-2.41
Mid	5240	14.75	17.00	-2.25
Mid	5260	17.64	24.00	-6.36
High	5320	17.67	24.00	-6.33

LIMITS AND RESULTS FOR TURBO MODE

Limit in 5150 to 5250 MHz Band

Turbo Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	4 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5200	17	48.3	20.84	5.56	17.00
Mid	5250	17	48.88	20.89	5.56	17.00


Limit in 5250 to 5350 MHz Band


Turbo Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
High	5290	24	48.96	27.90	5.56	24.00


Results


Turbo Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dB)
Low	5200	15.79	17.00	-1.21
Mid	5250	16.49	17.00	-0.51
High	5290	17.45	24.00	-6.55

PEAK POWER (NORMAL MODE)

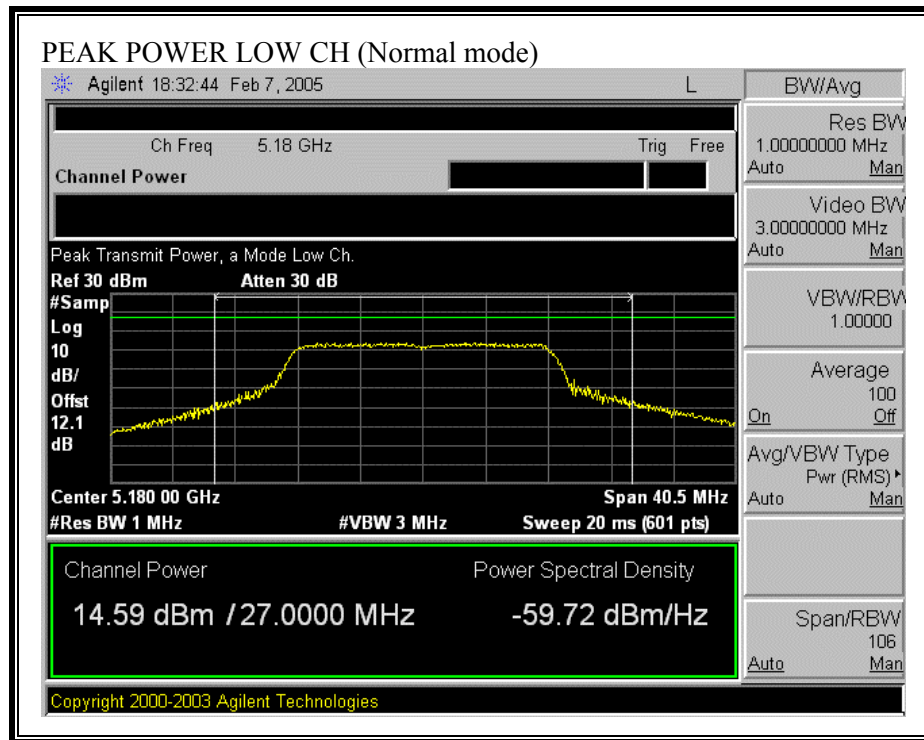


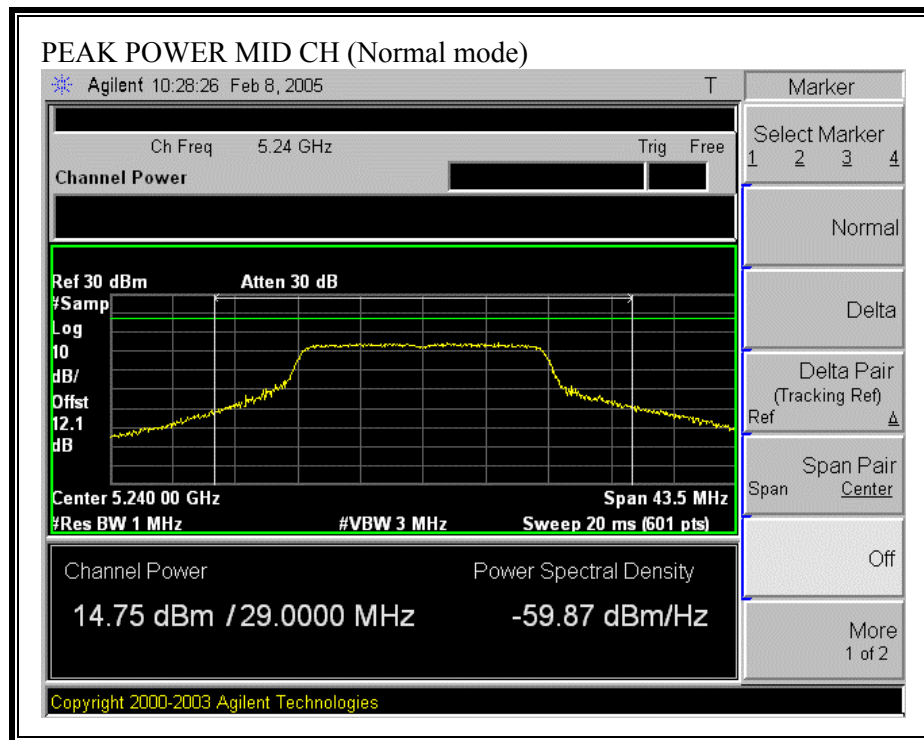


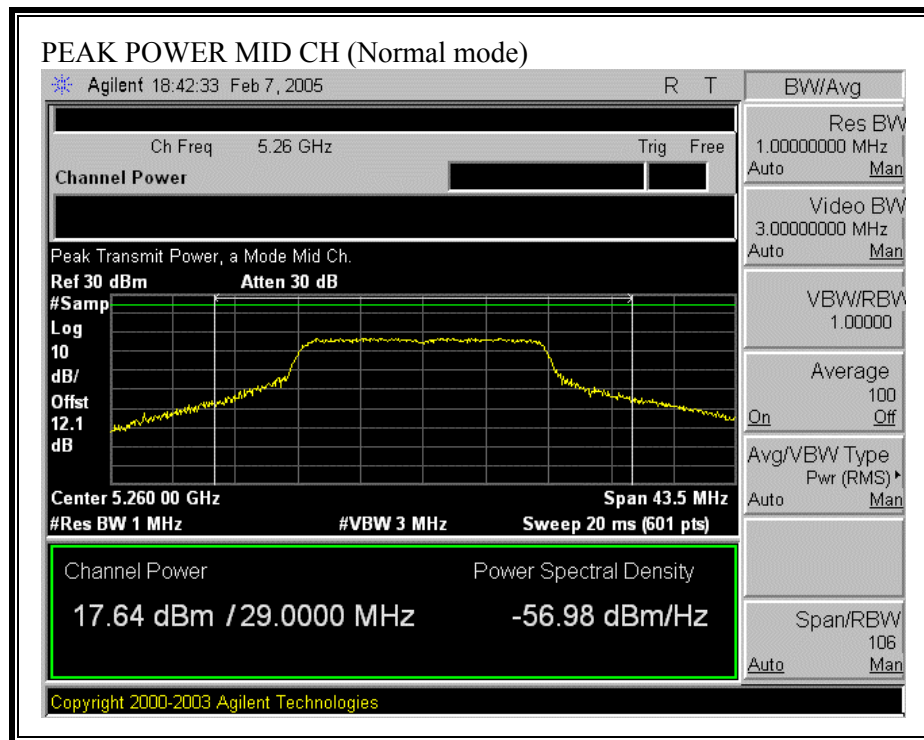


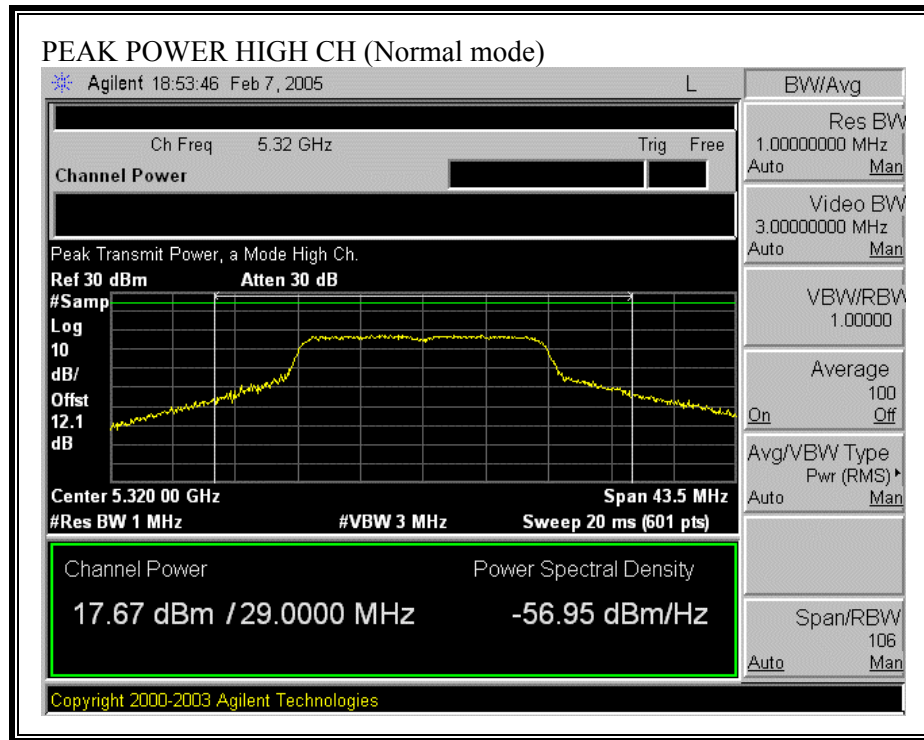

PEAK POWER (TURBO MODE)

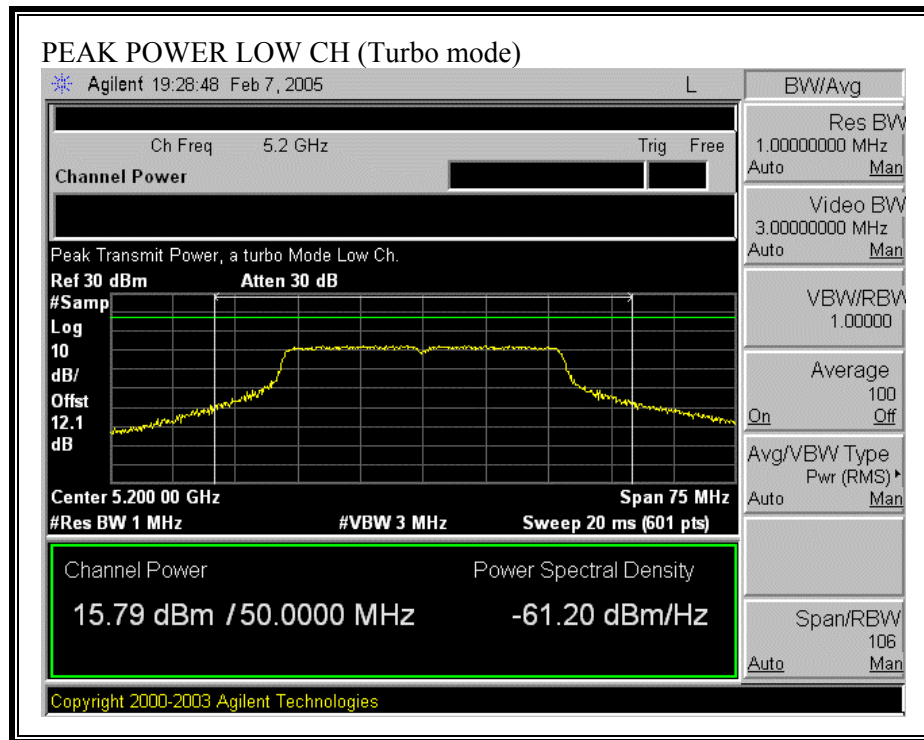

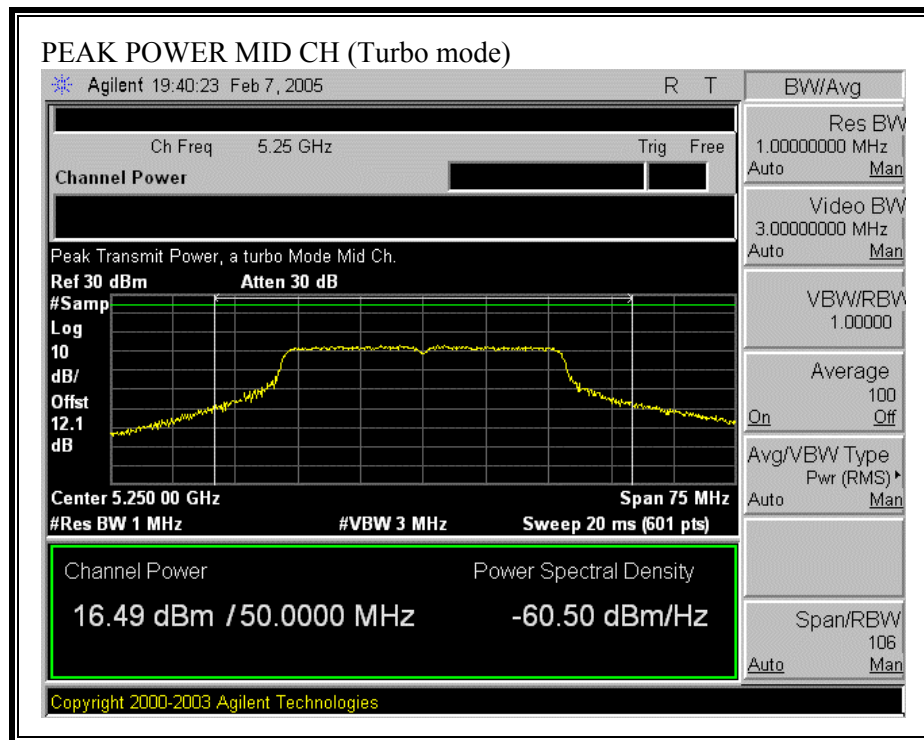

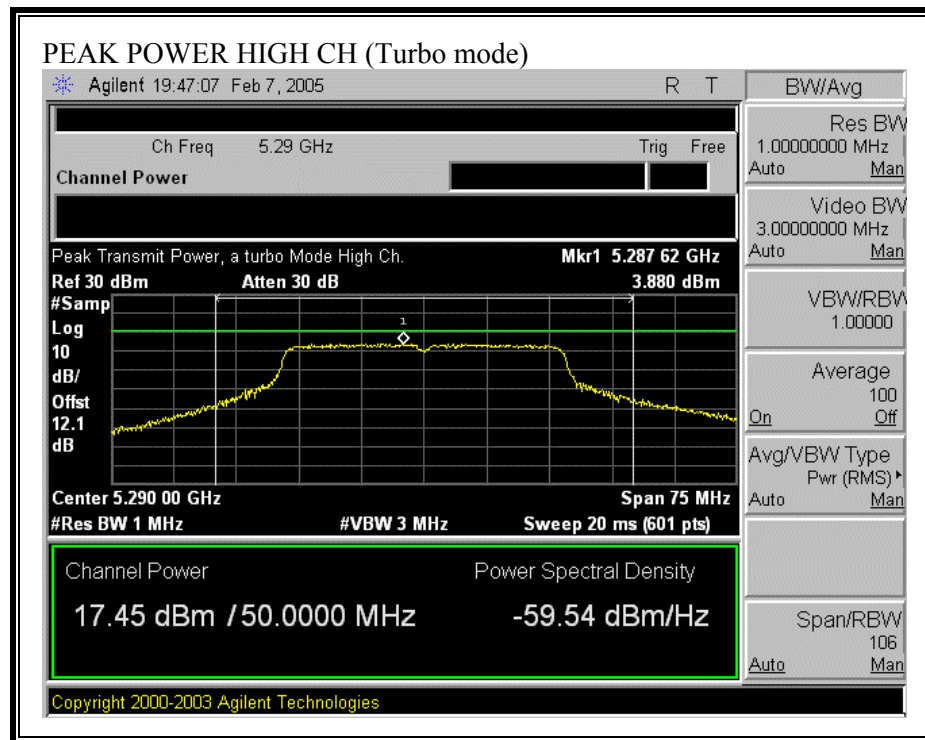

7.1.3. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Equation (1) and the measured peak power is used to calculate the MPE distance.

LIMITS

From §1.1310 Table 1 (B), $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted:

Mode	Power Density Limit (mW/cm²)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11a	1.0	17.67	5.56	4.09
802.11a Turbo	1.0	17.45	5.56	3.99

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.1.4. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 12.12 dB (including 10 dB pad and 2.12 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11a Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	5180	14.6
Middle	5240	14.5
Middle	5260	17.1
High	5320	17.2

802.11a Turbo Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	5200	15.9
Middle	5250	16.0
High	5290	17.1

7.1.5. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.407 (a) (1) For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407 (a) (1) For the band 5.25-5.35 GHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain = 5.56 dBi, therefore there is no reduction due to antenna gain.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.

RESULTS

No non-compliance noted:


802.11a Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5180	3.78	4.00	-0.22
Mid	5240	3.99	4.00	-0.01
Mid	5260	6.71	11.00	-4.30
High	5320	7.33	11.00	-3.67


802.11a Turbo Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5200	2.26	4.00	-1.74
Mid	5250	3.02	4.00	-0.99
High	5290	3.88	11.00	-7.12

PEAK POWER SPECTRAL DENSITY (802.11a MODE)

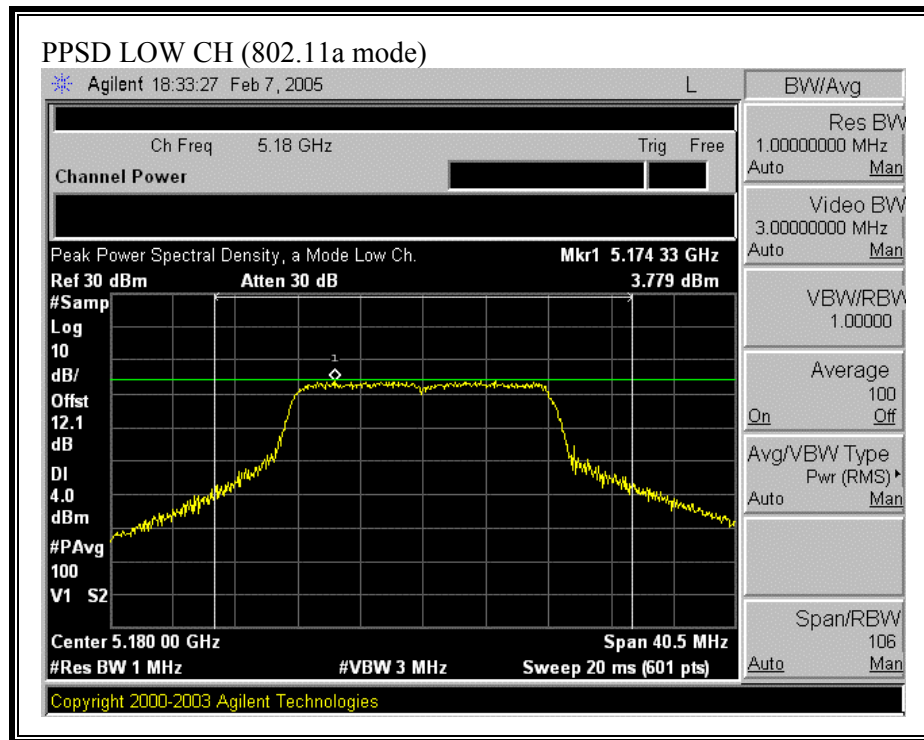


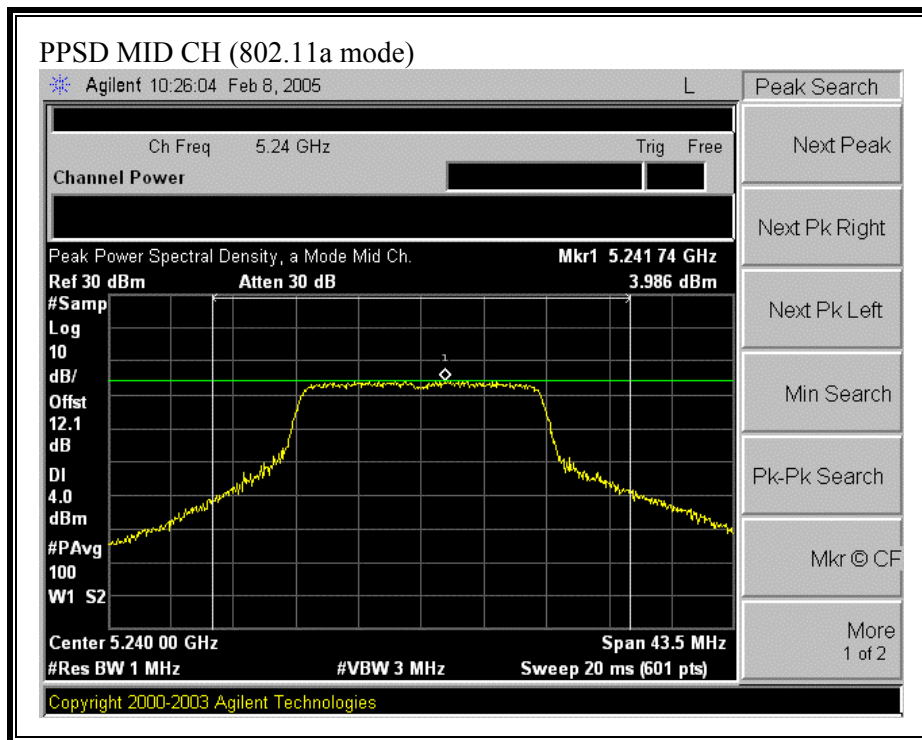


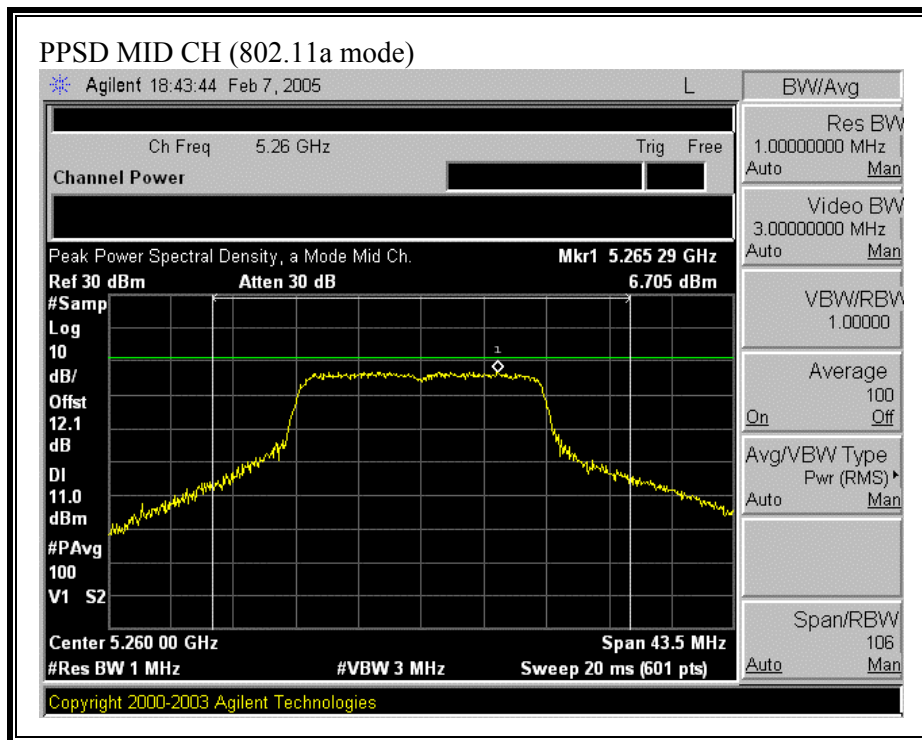


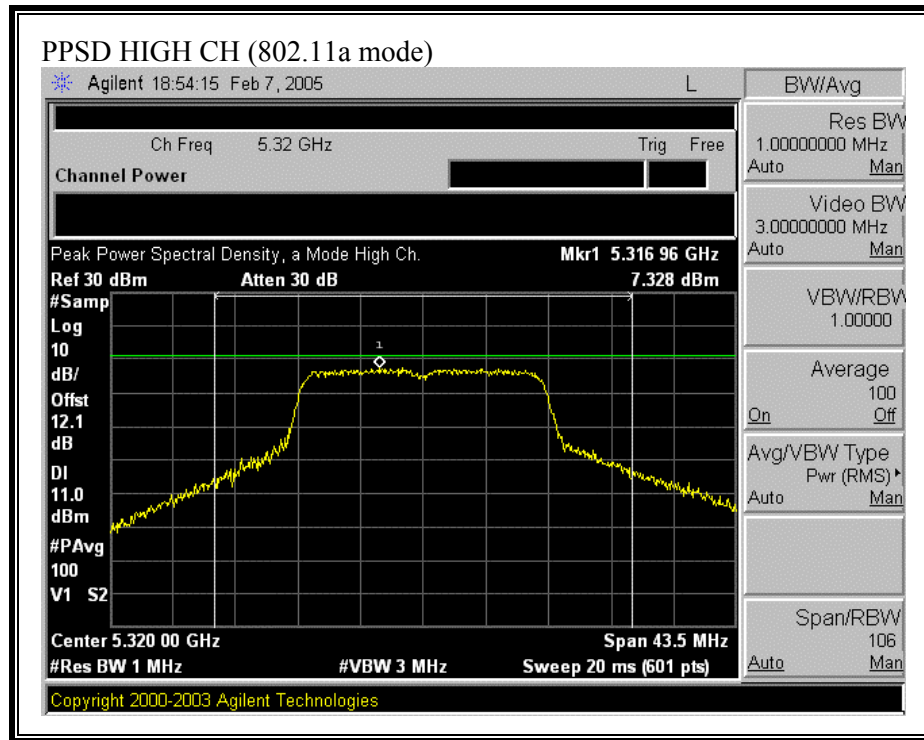

PEAK POWER SPECTRAL DENSITY (802.11a TURBO MODE)

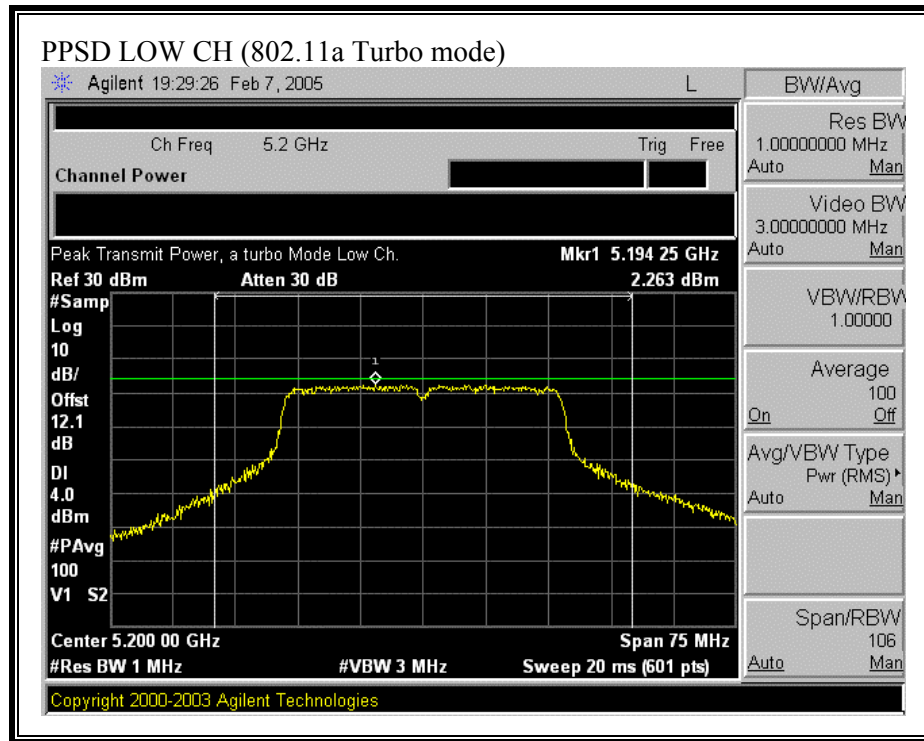

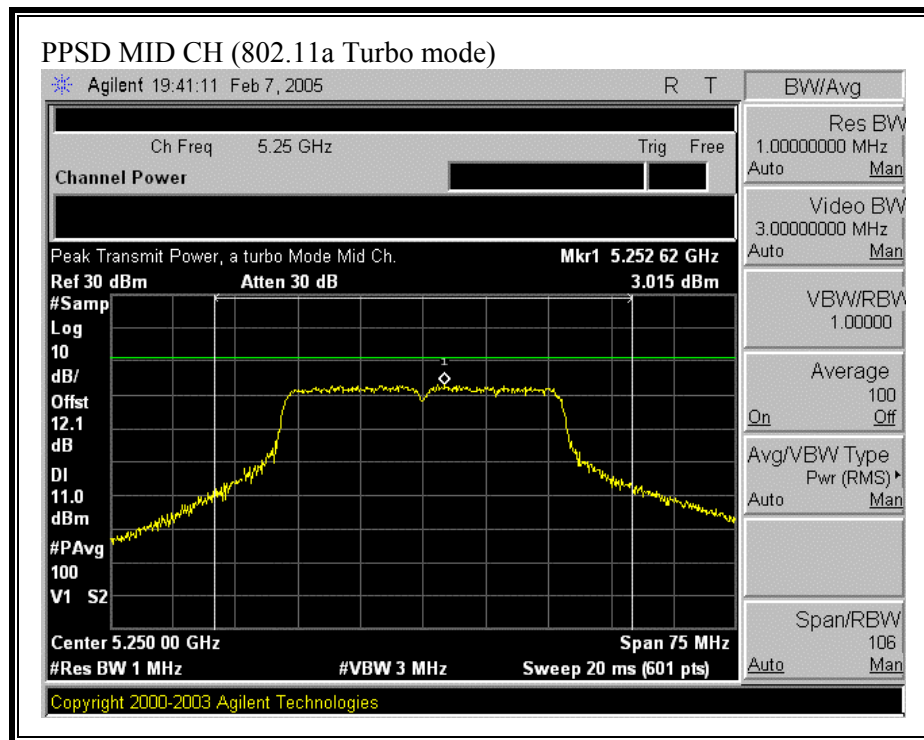

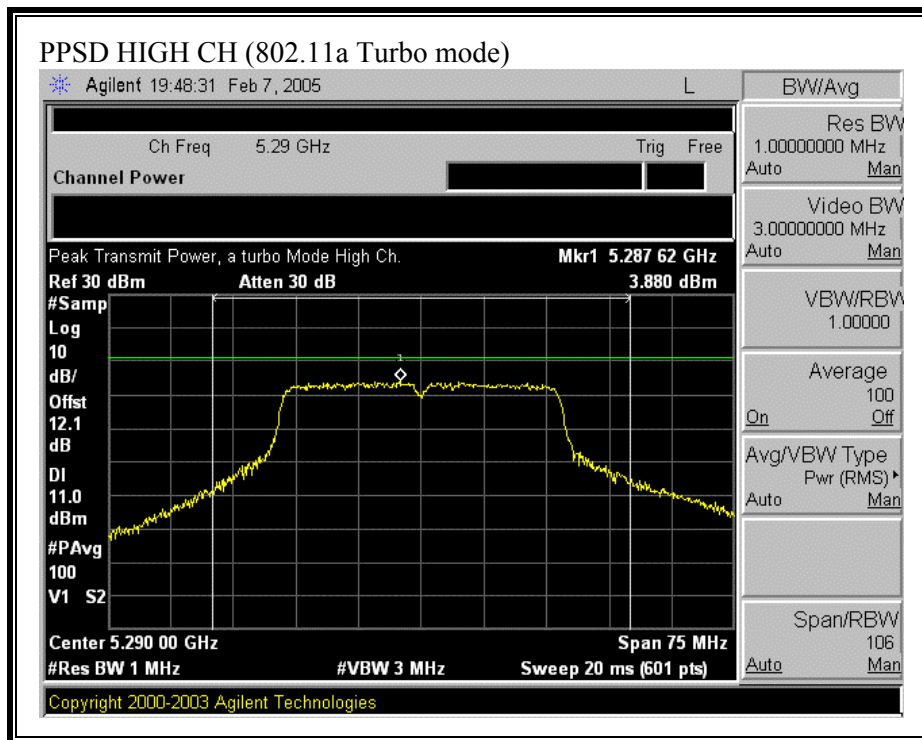

7.1.6. PEAK EXCURSION

LIMIT

§15.407 (a) (6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.

RESULTS

No non-compliance noted:


802.11a Mode


Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5180	9.46	13	-3.54
Middle	5240	9.54	13	-3.46
Middle	5260	9.99	13	-3.01
High	5320	10.03	13	-2.97


802.11a Turbo Mode


Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5200	9.49	13	-3.51
Middle	5250	10.49	13	-2.51
High	5290	9.24	13	-3.76

PEAK EXCURSION (802.11a MODE)

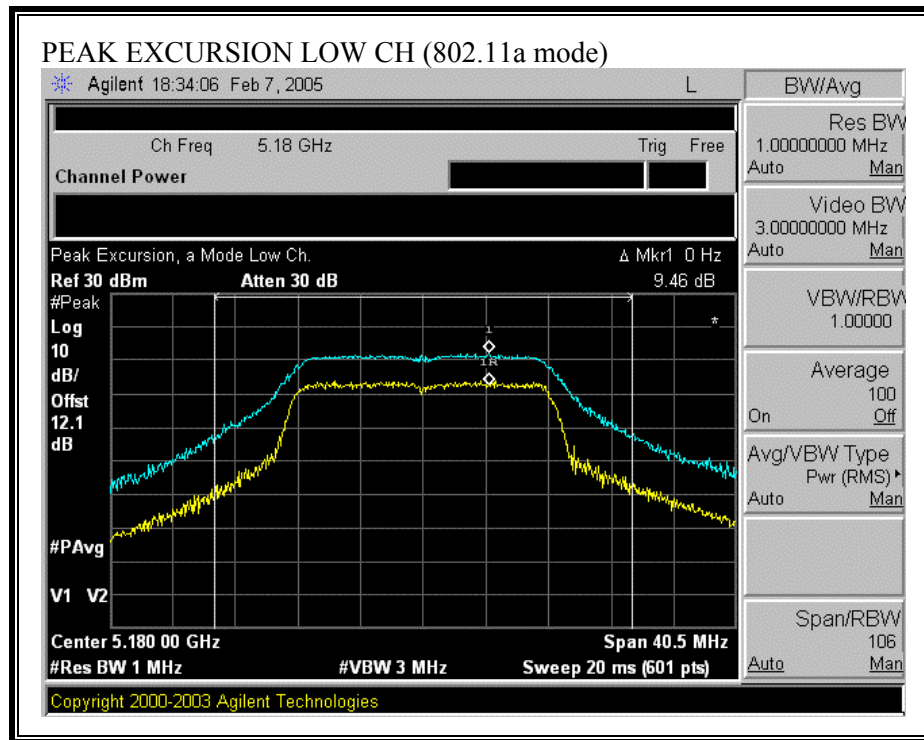


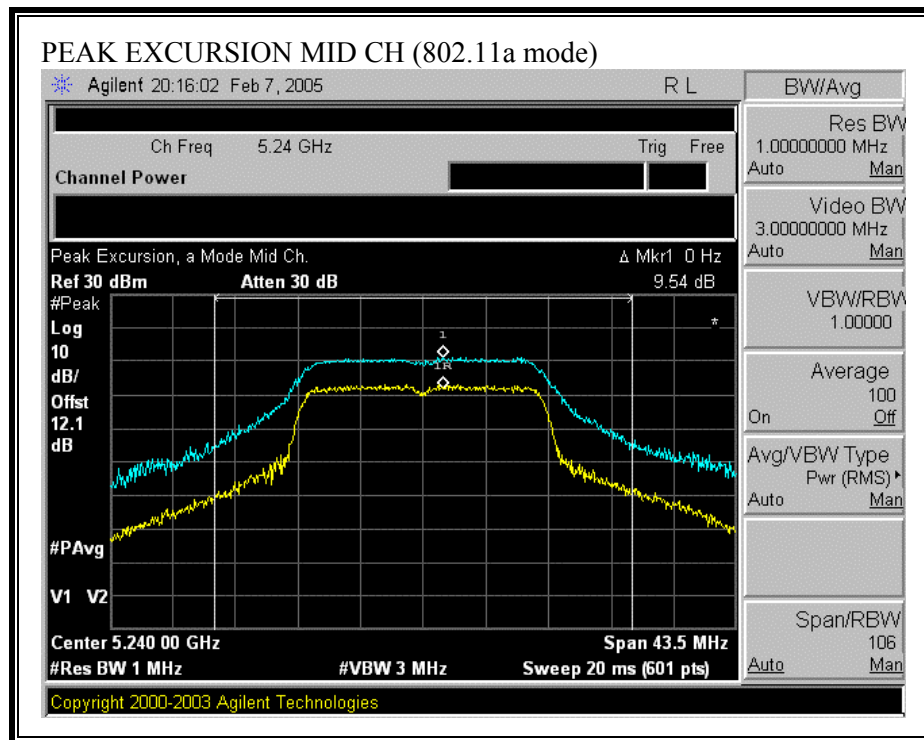


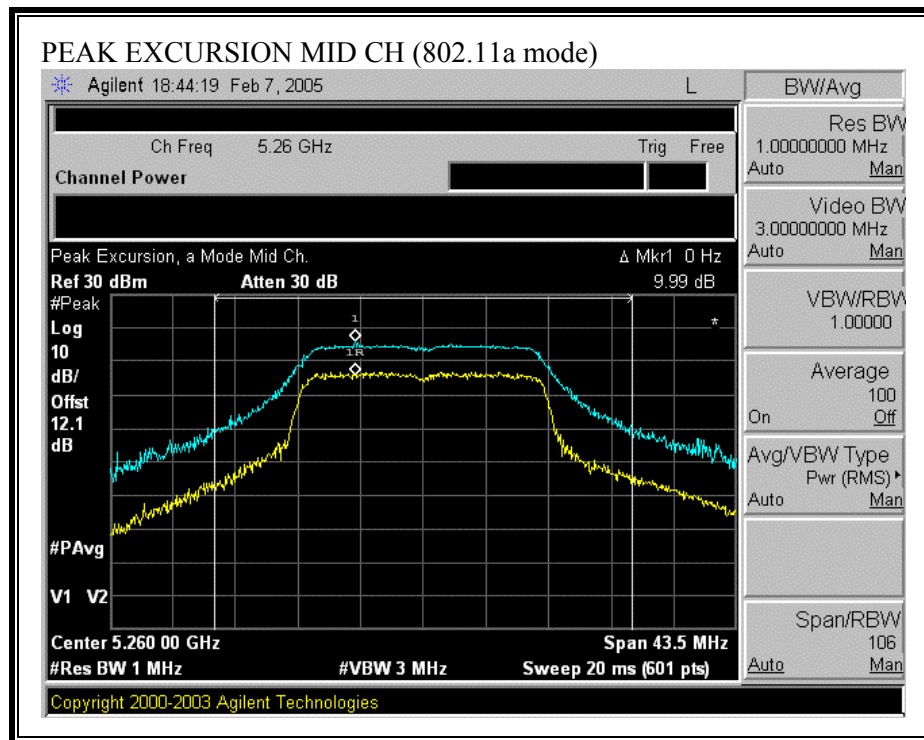


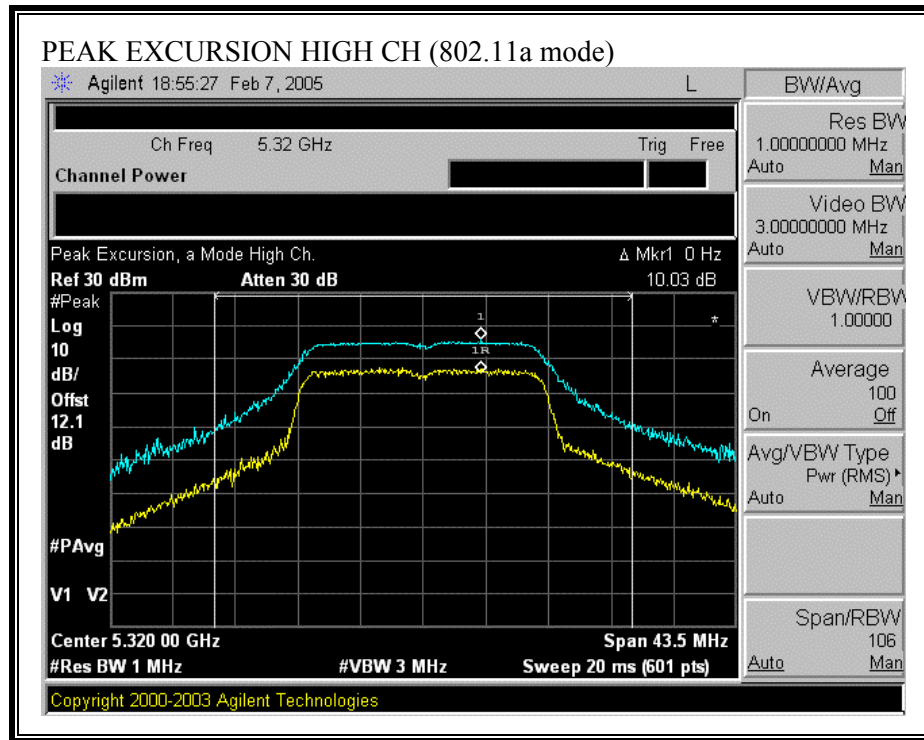

PEAK EXCURSION (802.11a TURBO MODE)

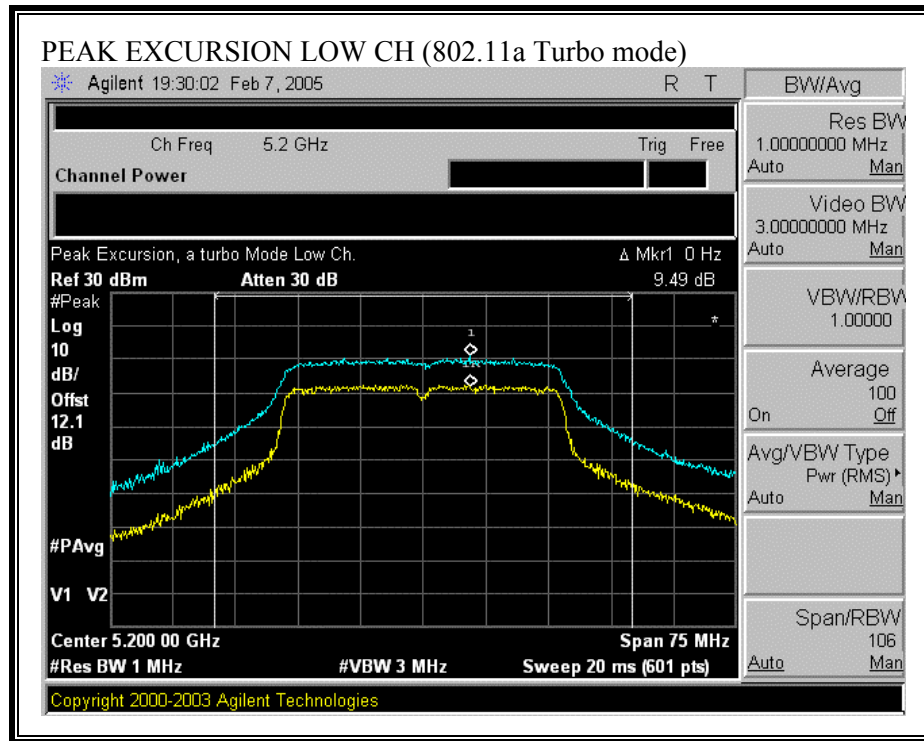

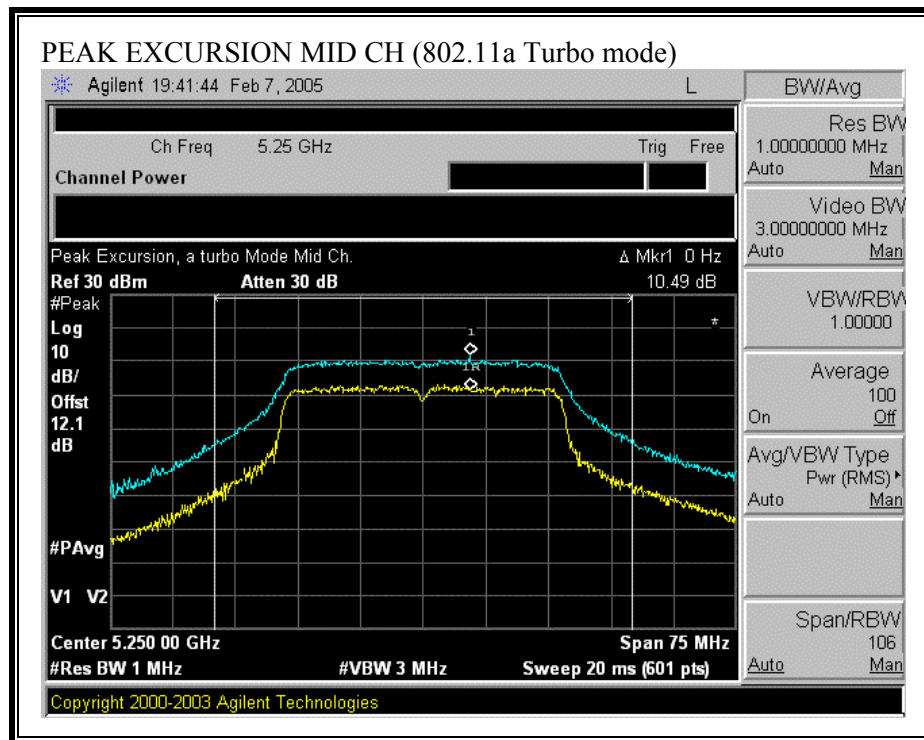

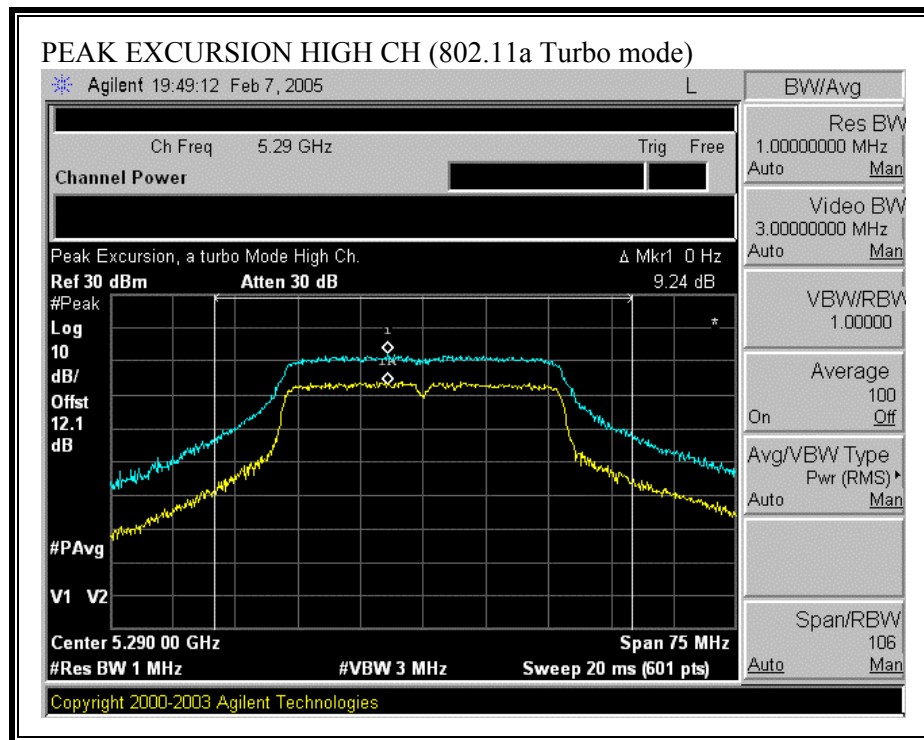

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.407 (b) (1 & 2) For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm / MHz.

TEST PROCEDURE

Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.


Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.


RESULTS


No non-compliance noted:

SPURIOUS EMISSIONS (802.11a MODE)

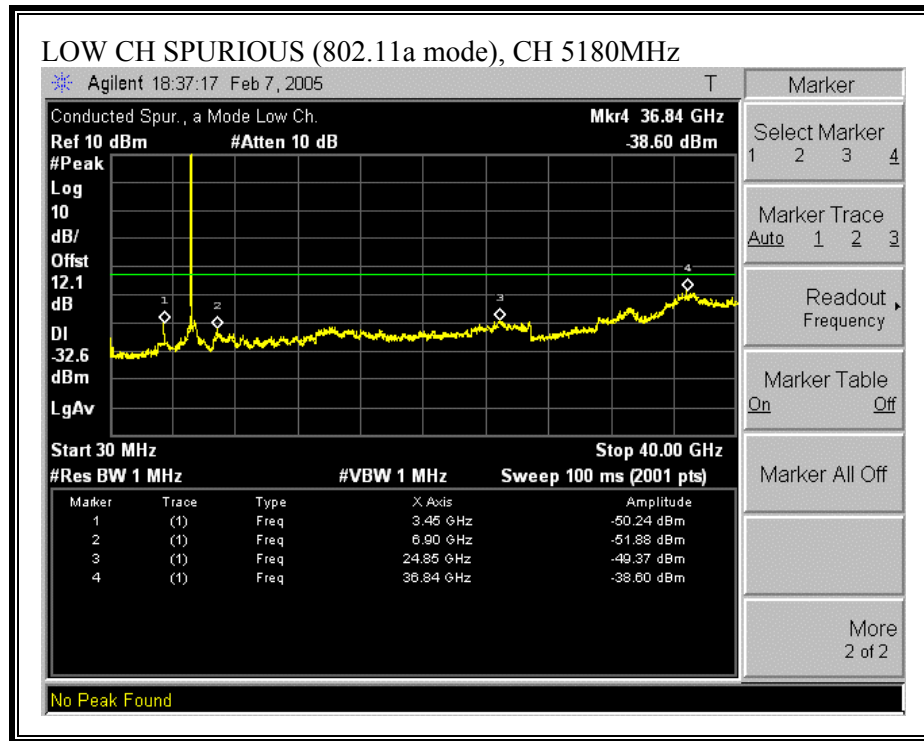


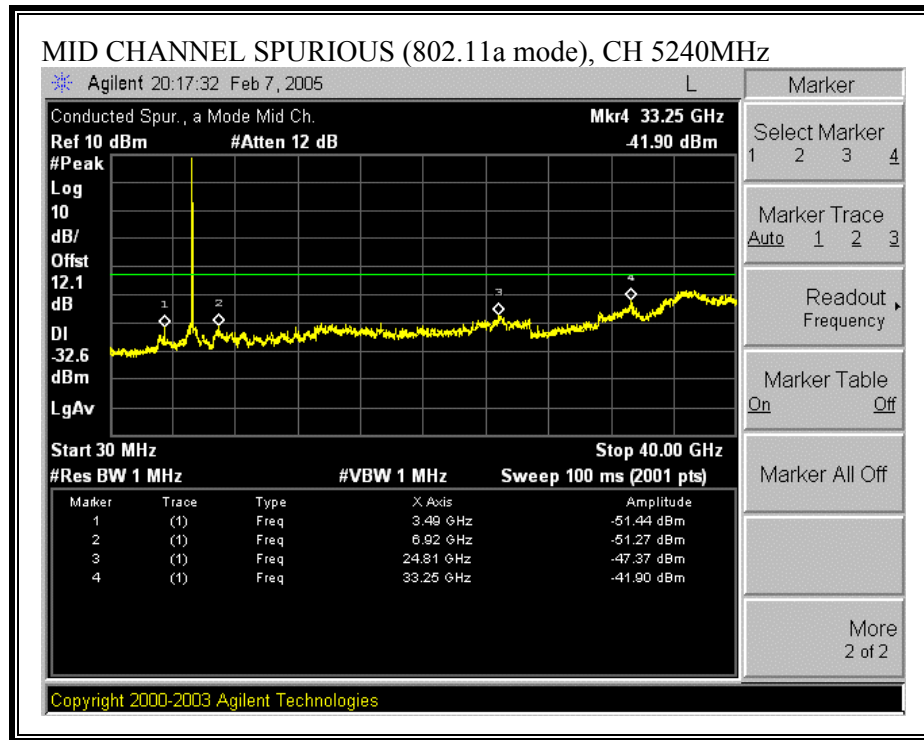


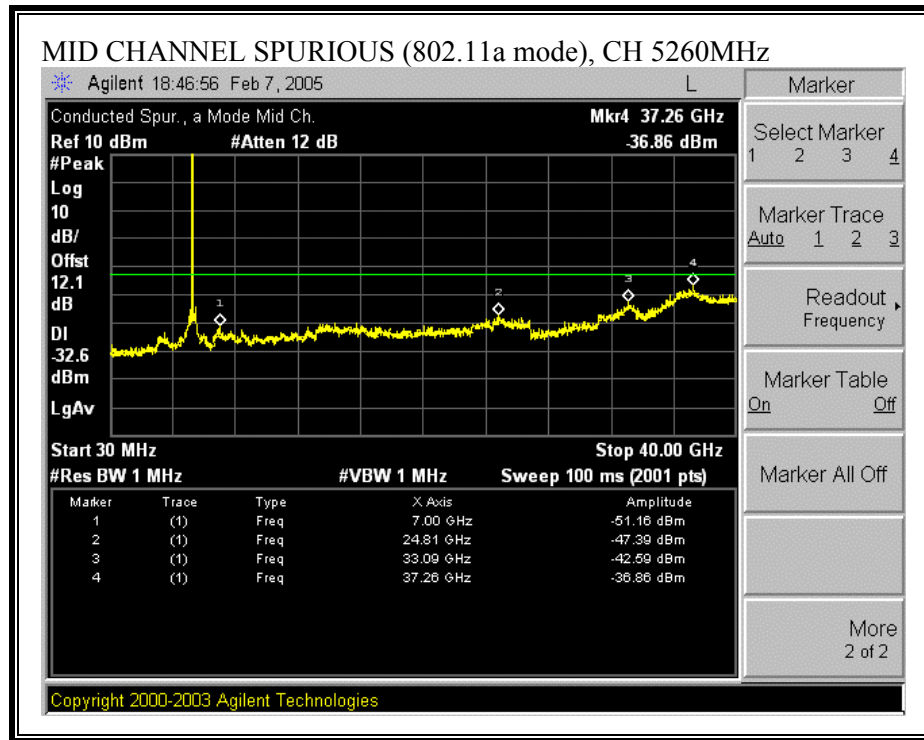


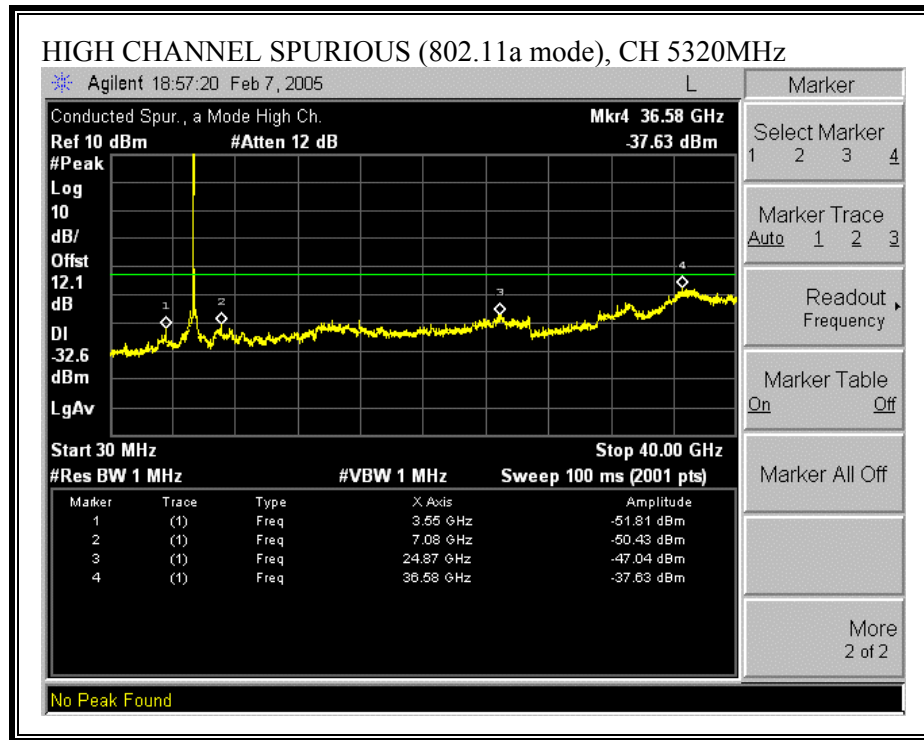

SPURIOUS EMISSIONS (802.11a TURBO MODE)

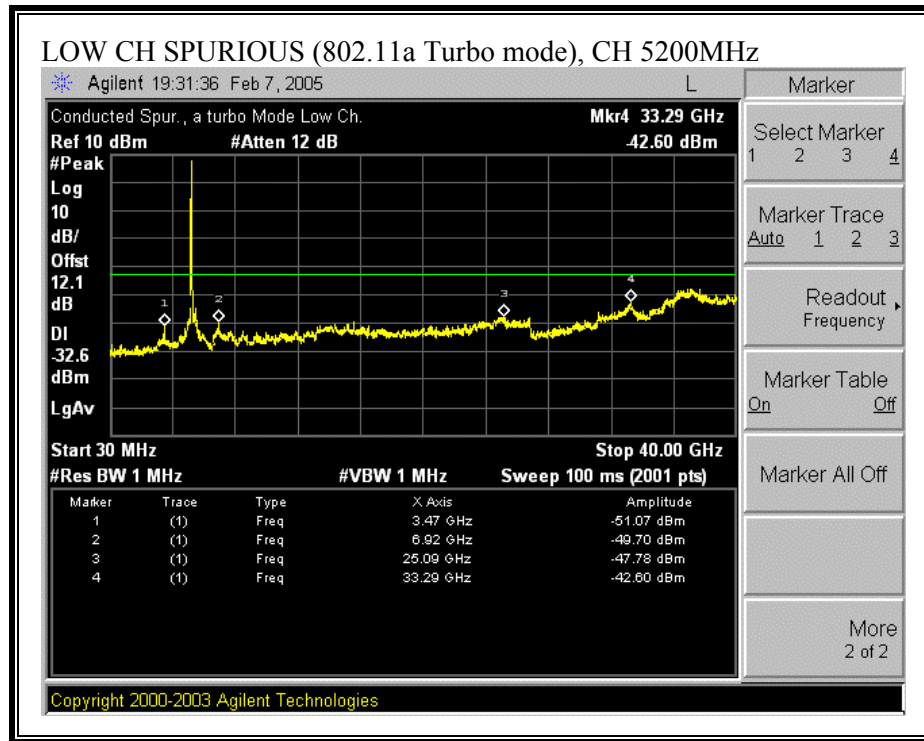

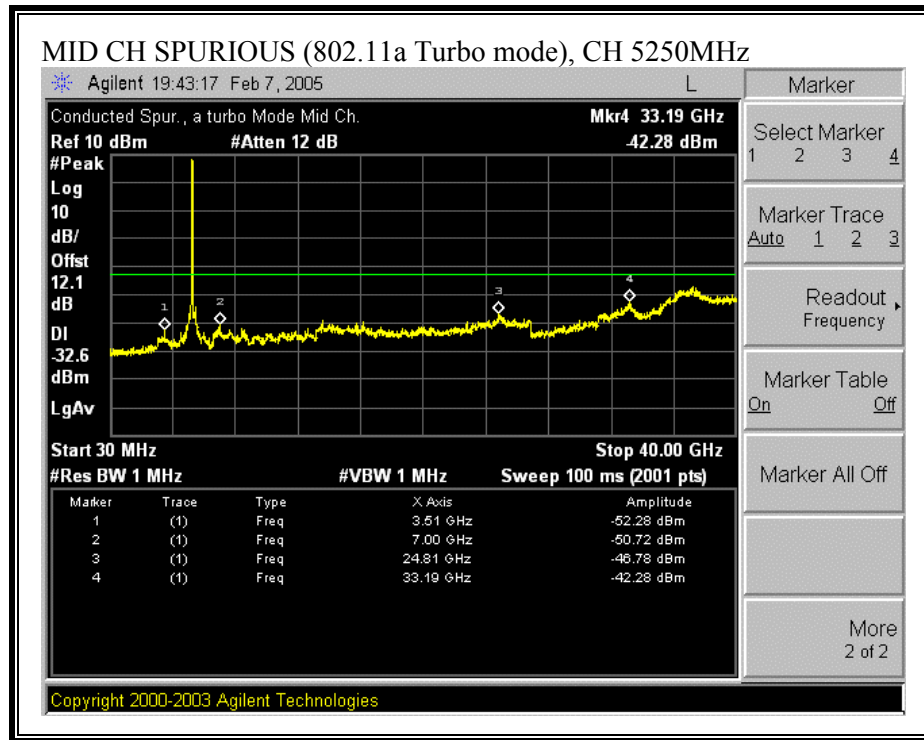

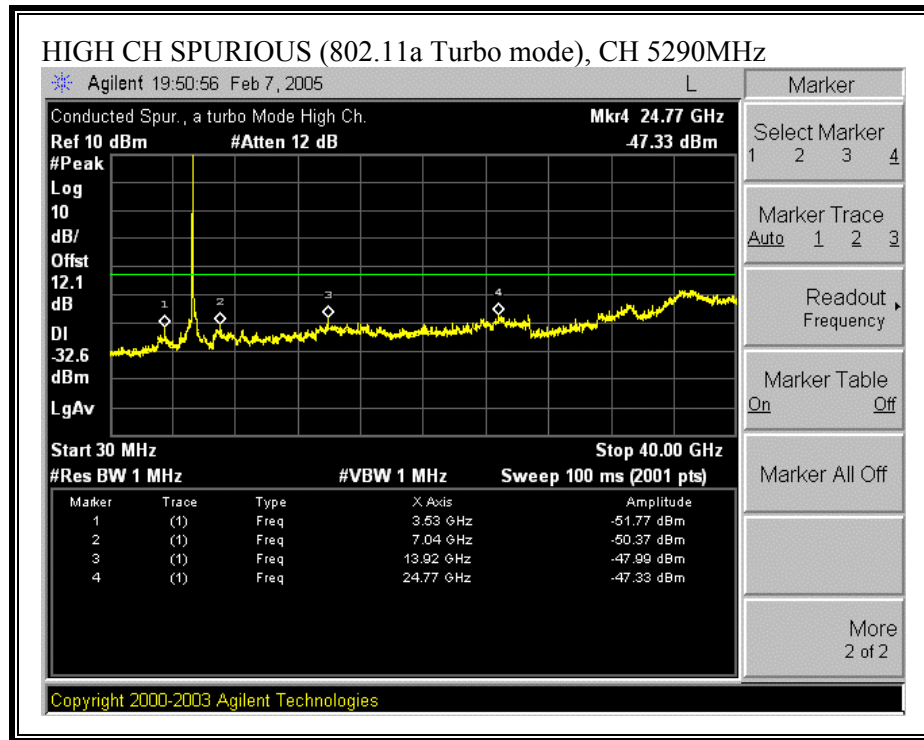

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER ABOVE 1 GHZ FOR 5150 TO 5350 MHz BAND


RESTRICTED BANDEDGE (802.11a MODE, LOW CHANNEL, HORIZONTAL)

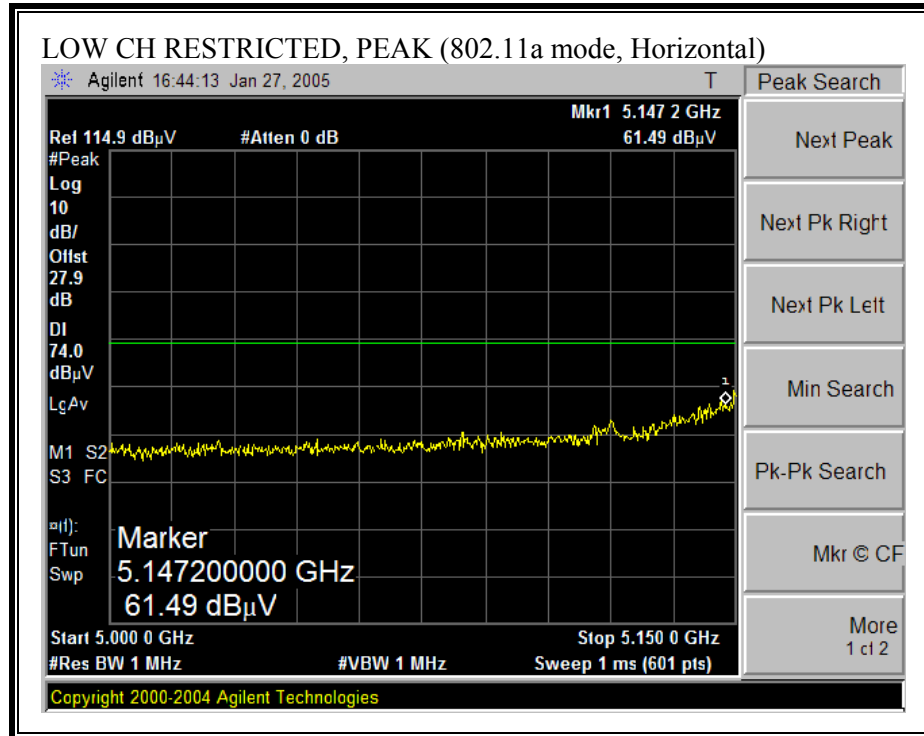

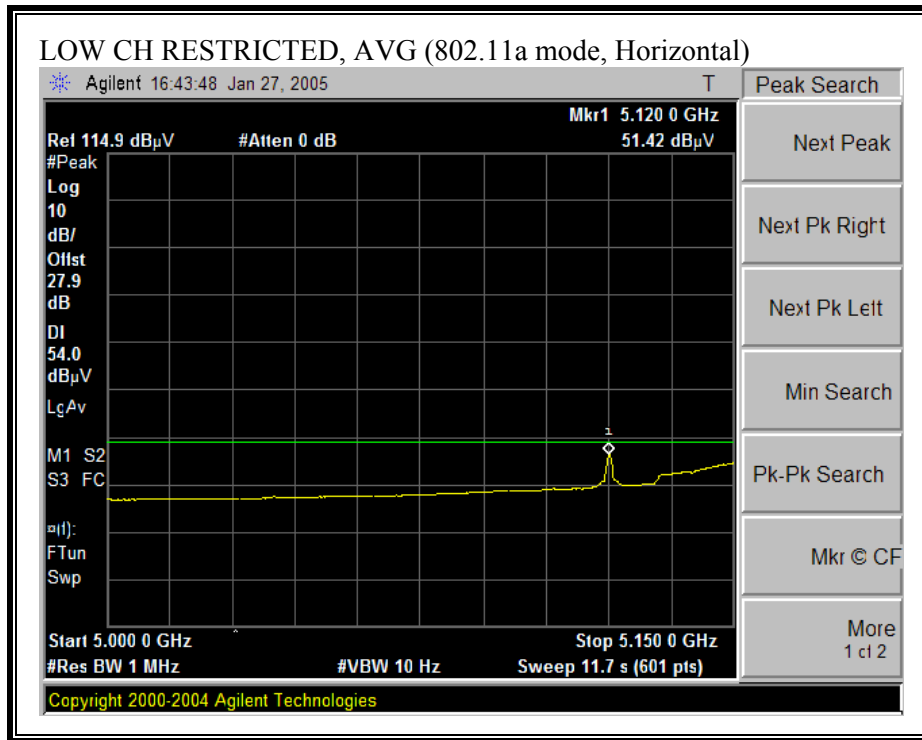



RESTRICTED BANDEDGE (802.11a MODE, LOW CHANNEL, VERTICAL)

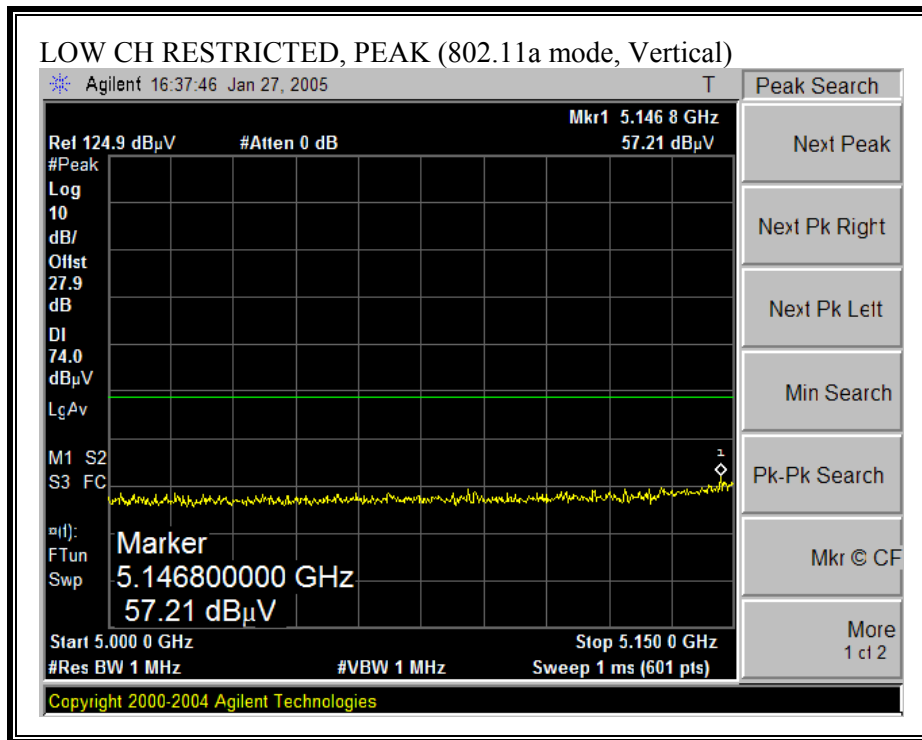

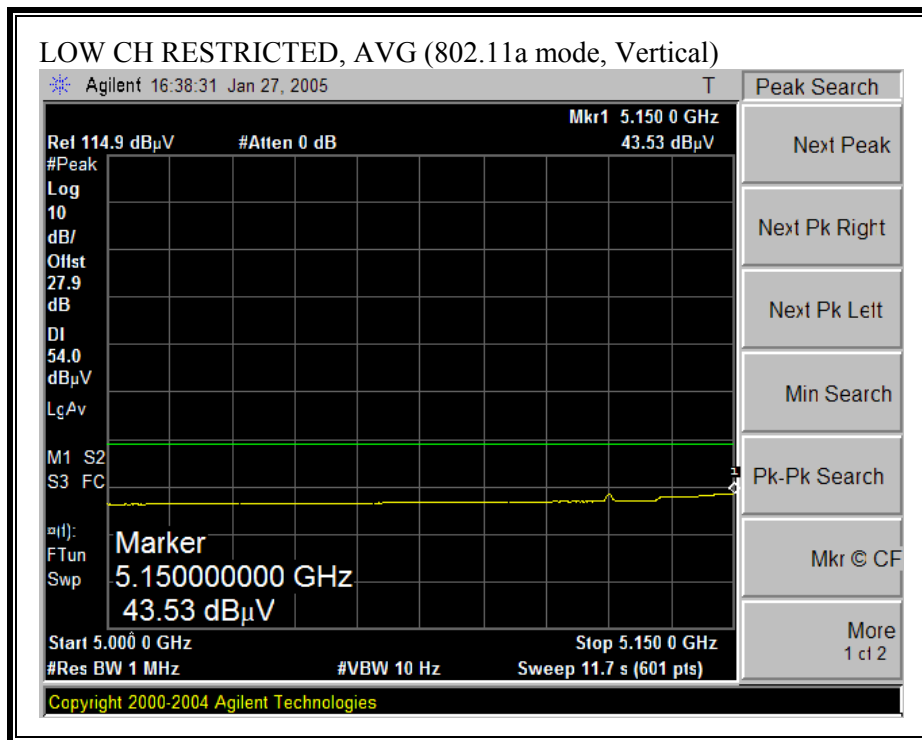



RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL, HORIZONTAL)

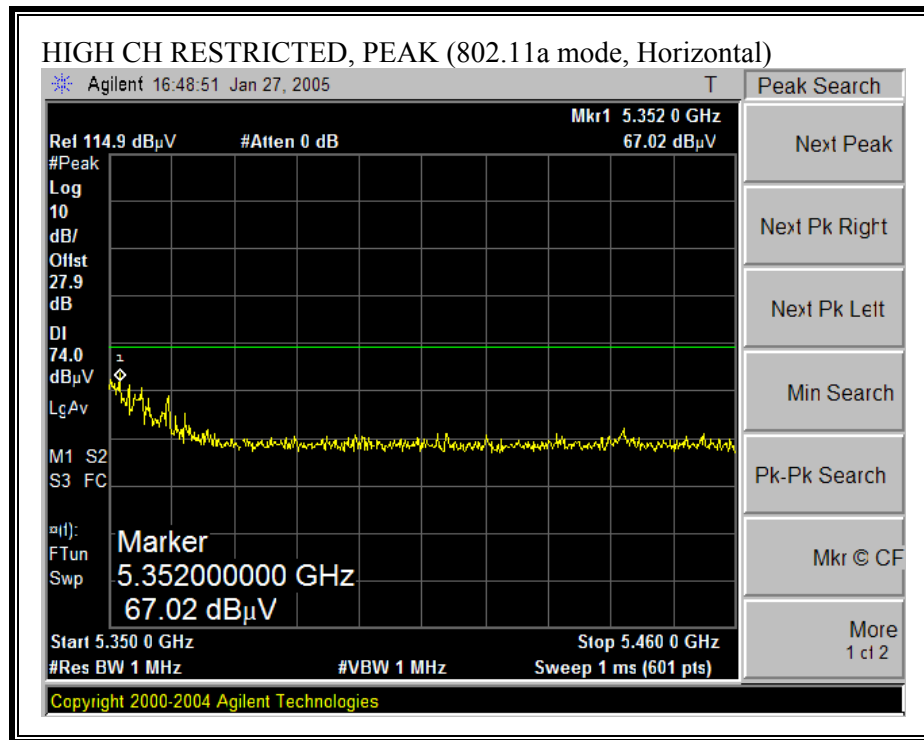

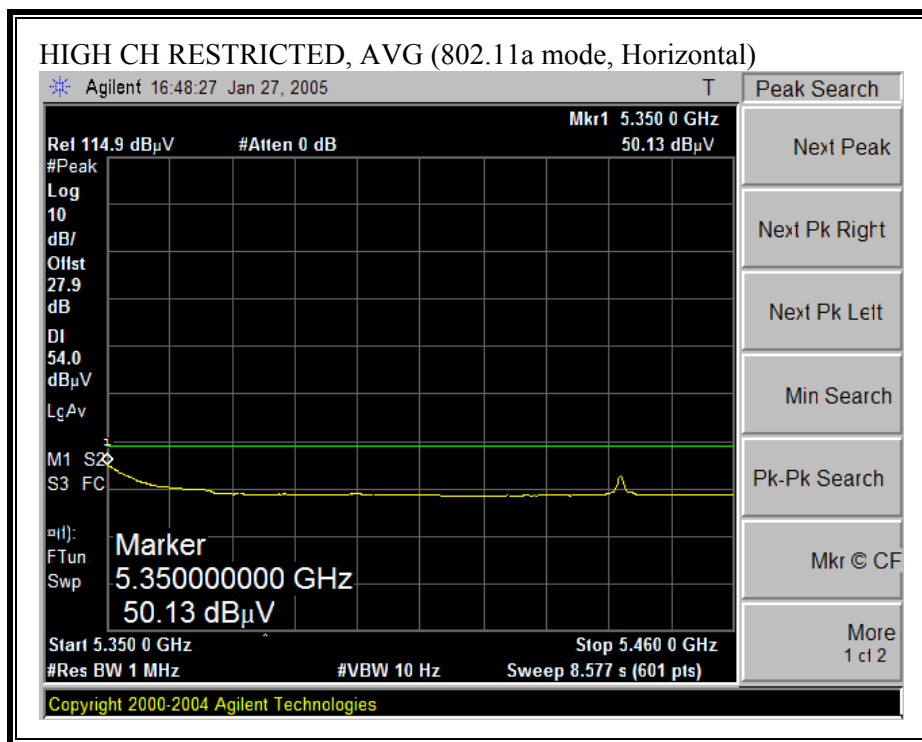



RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL, VERTICAL)

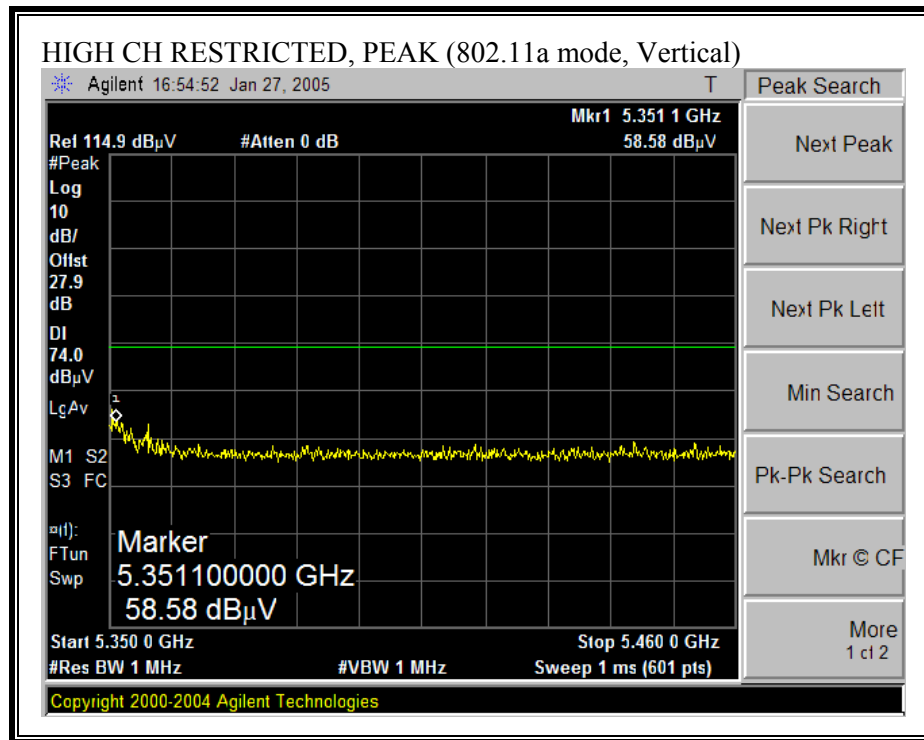

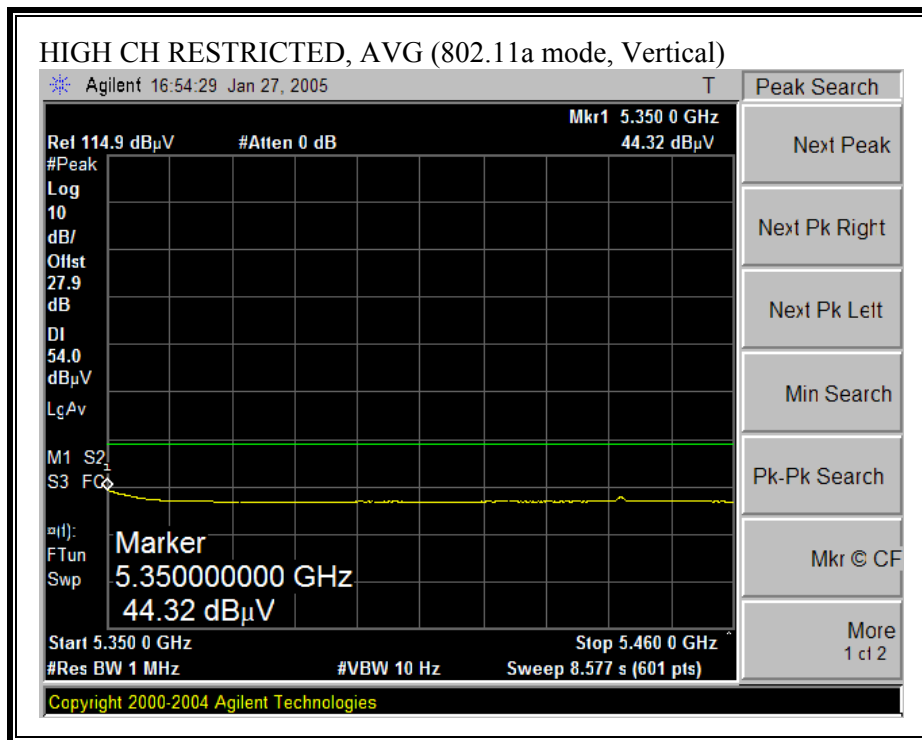



RESTRICTED BANDEDGE (802.11a TURBO MODE, LOW CHANNEL, HORIZONTAL)

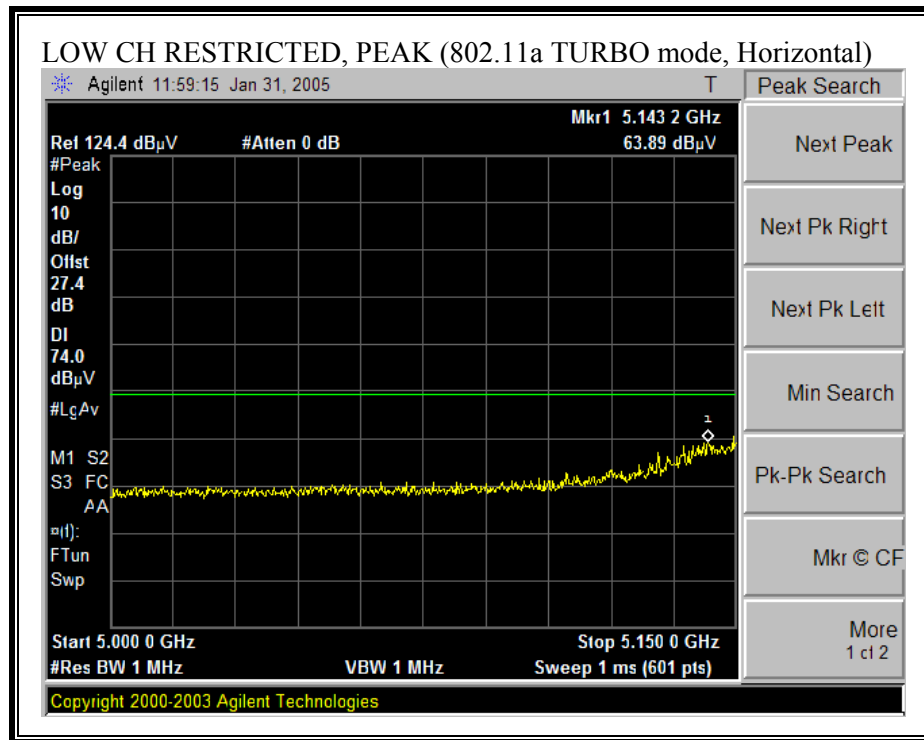

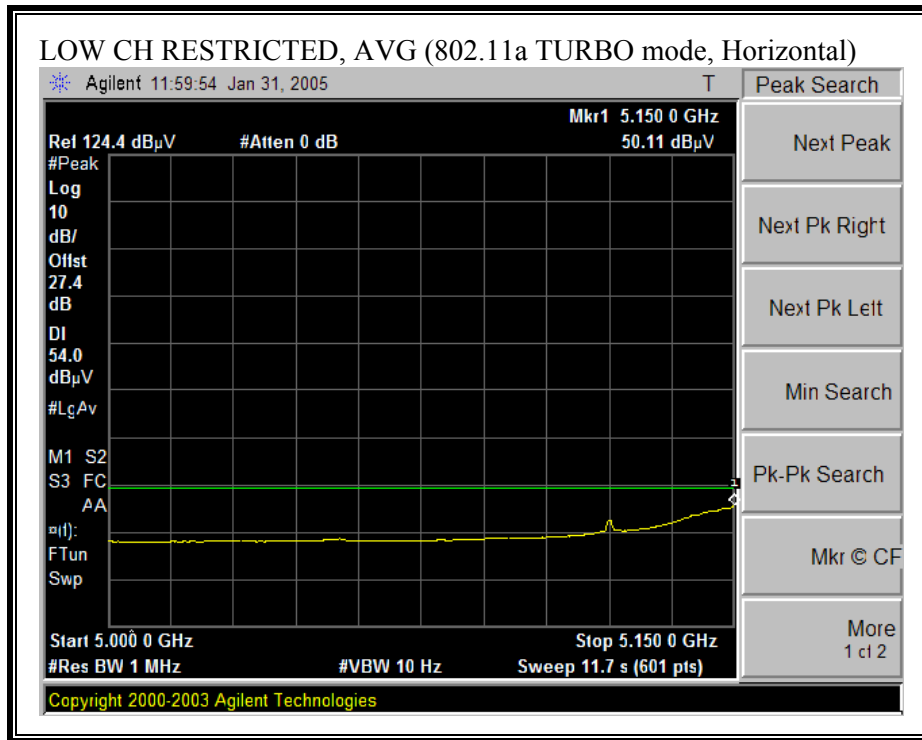



RESTRICTED BANDEDGE (802.11a TURBO MODE, LOW CHANNEL, VERTICAL)

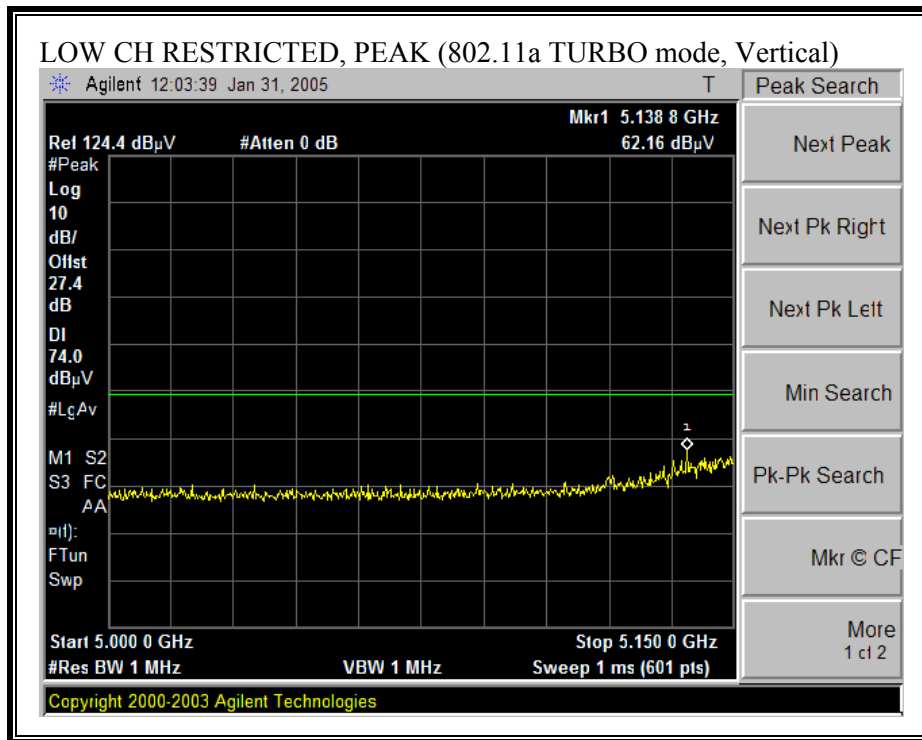

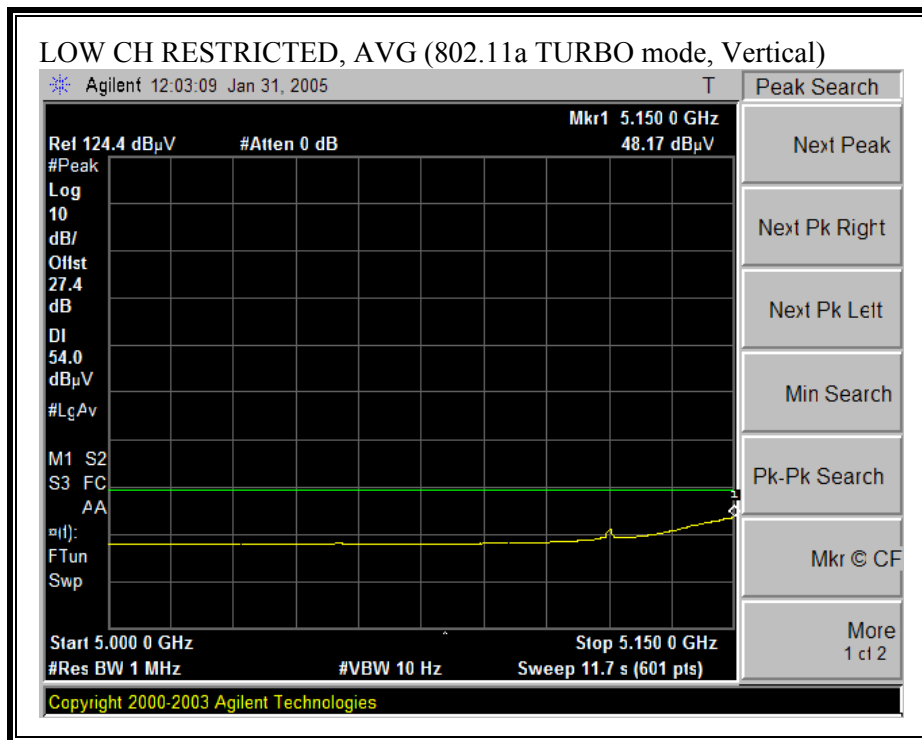



RESTRICTED BANDEDGE (802.11a TURBO MODE, HIGH CHANNEL, HORIZONTAL)

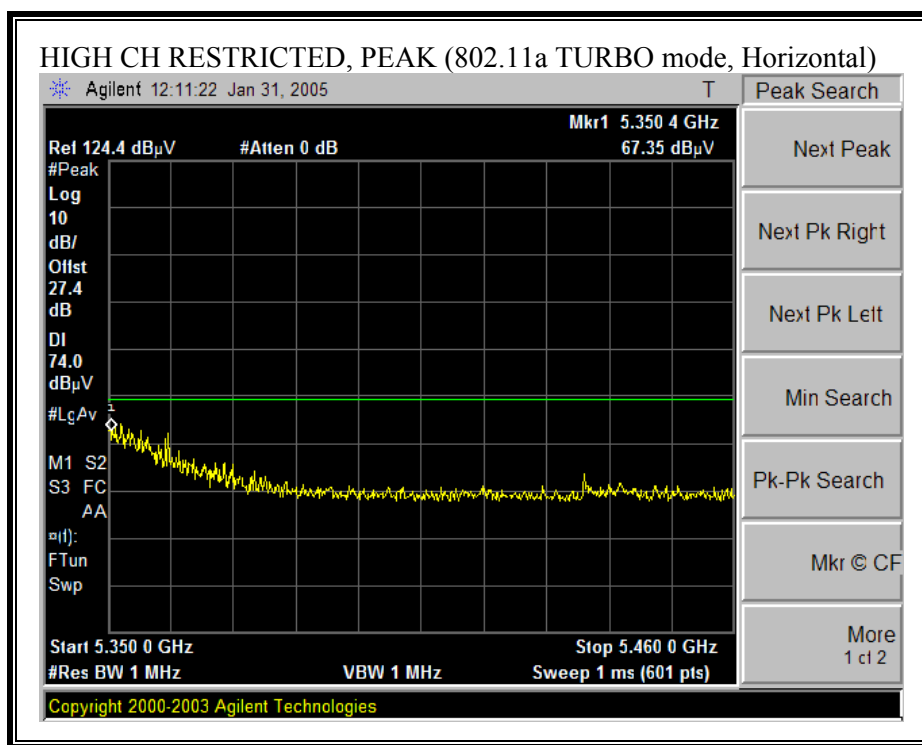

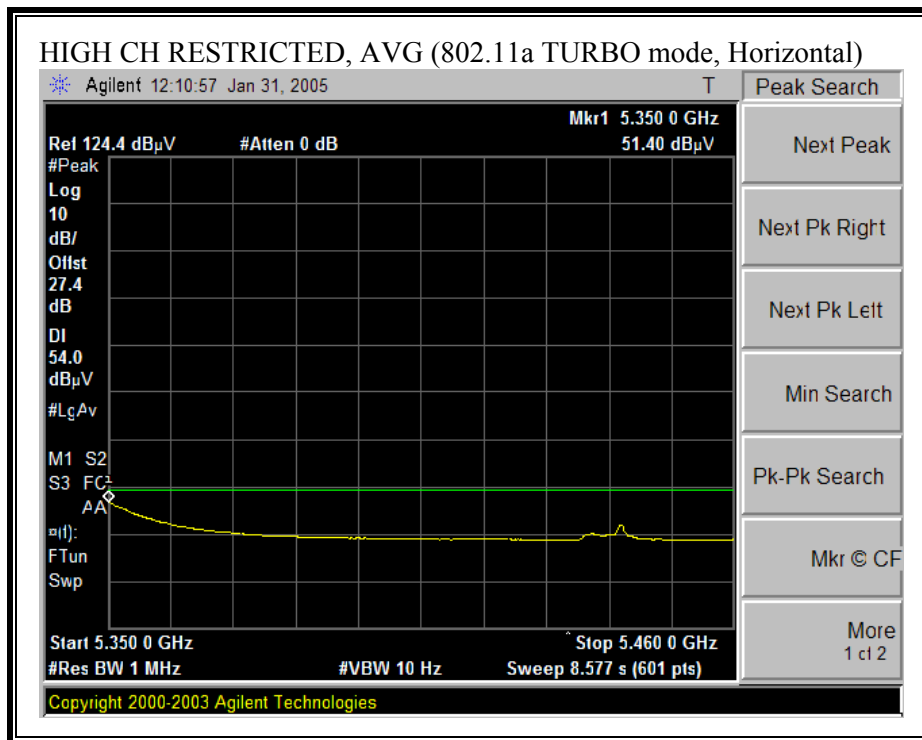

RESTRICTED BANDEDGE (802.11a TURBO MODE, HIGH CHANNEL, VERTICAL)

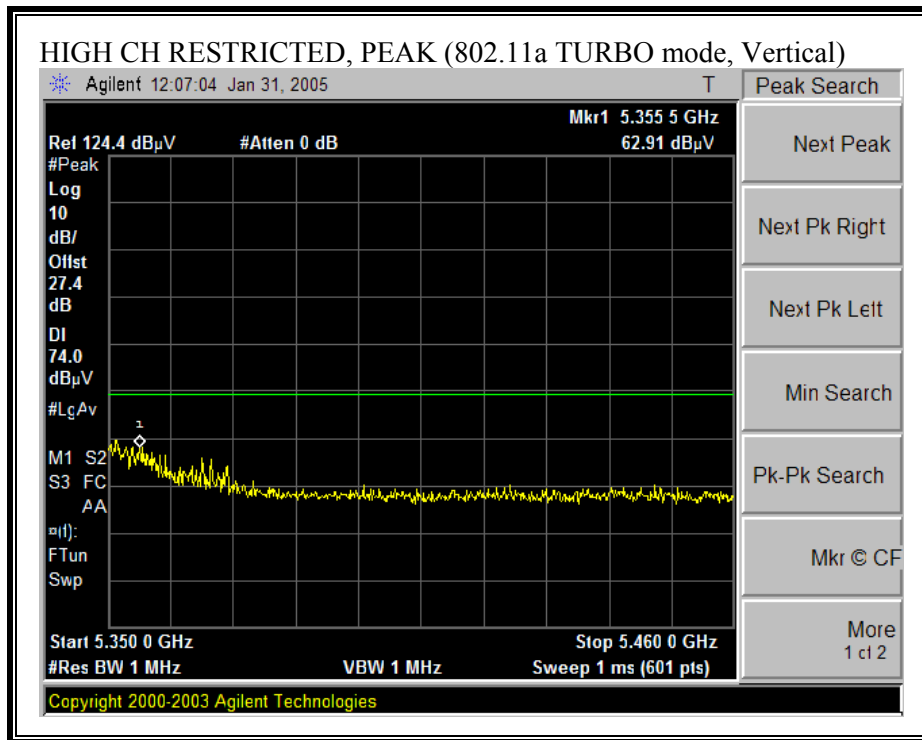

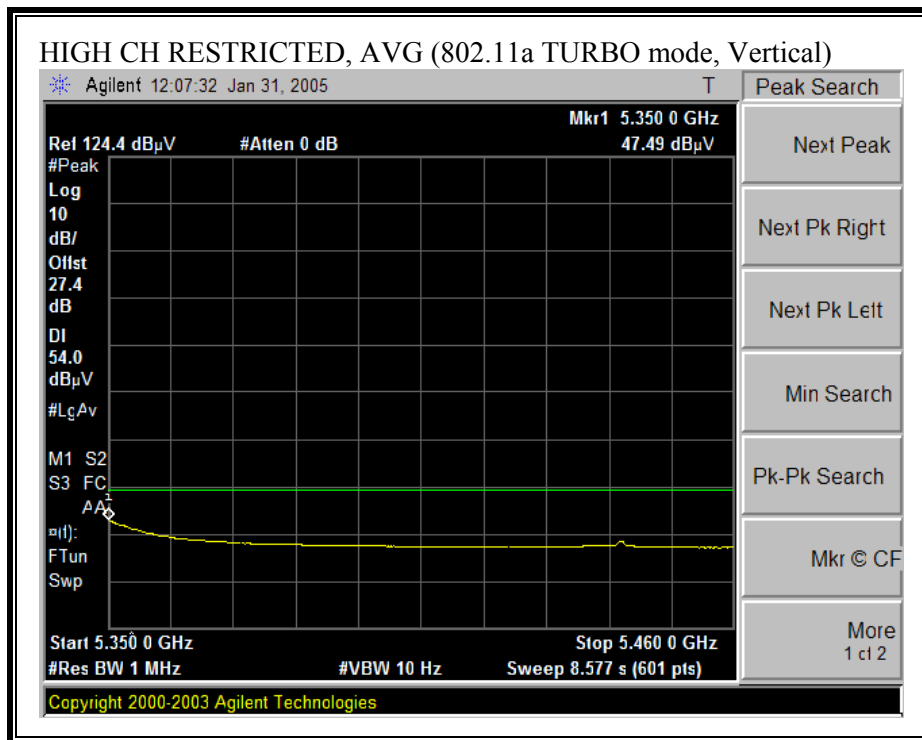

HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)

01/27/05 High Frequency Measurement

Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: HITESH H. SOLANKI
Project #: 05U3230-1
Company: ATHEROS COMMUNICATION, INC.
EUT Descrip.: MiniPCI 802.11 a/b/g TRANSCEIVER - 802.11 a/g TURBO MODES
EUT M/N: AR5BMB6
Test Target: FCC CLASS B
Mode Oper: TRANSMIT ONLY; (ON SPECIFIED CHANNELS) 11a MODE (5.2 GHz)

Test Equipment:

EMCO Horn 1-18GHz T60; S/N: 2238 @3m	Pre-amplifier 1-26GHz T87 Miteq 924342	Pre-amplifier 26-40GHz	Horn > 18GHz
Hi Frequency Cables 2 foot cable 3 foot cable 4 foot cable 12 foot cable 4_Hitesh 12_Hitesh	HPF HPF_4.0 GHz	Reject Filter R_001	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
LOW CHANNEL (5180 MHz)															
10.364	3.0	44.1	33.1	38.2	7.9	-37.8	0.0	0.9	53.3	42.3	74	54	-20.7	-11.7	V
15.540	3.0	44.4	33.5	39.4	10.9	-40.8	0.0	1.1	54.9	44.0	74	54	-19.1	-10.0	V
20.720	3.0	41.4	30.4	36.4	12.0	-40.6	0.0	0.2	49.3	38.3	74	54	-24.7	-15.7	V
5240 MHz															
10.480	3.0	44.2	35.2	38.1	8.0	-37.9	0.0	0.9	53.3	44.3	74	54	-20.7	-9.7	V
15.720	3.0	43.7	32.9	39.0	11.1	-40.9	0.0	1.1	54.0	43.2	74	54	-20.0	-10.8	V
MIDDLE CHANNEL (5260 MHz)															
10.520	3.0	45.2	34.0	38.1	8.0	-37.9	0.0	0.9	54.2	43.0	74	54	-19.8	-11.0	V
15.780	3.0	44.3	31.2	38.9	11.1	-40.9	0.0	1.1	54.6	41.5	74	54	-19.4	-12.5	V
HIGH CHANNEL (5320 MHz)															
10.640	3.0	40.9	30.9	38.1	8.0	-38.0	0.0	0.9	49.8	39.8	74	54	-24.2	-14.2	V
15.960	3.0	39.6	29.4	38.6	11.3	-41.0	0.0	1.2	49.7	39.5	74	54	-24.3	-14.5	V
LOW CHANNEL (5180 MHz)															
10.360	3.0	39.2	28.7	38.2	7.9	-37.8	0.0	0.9	48.4	37.9	74	54	-25.6	-16.1	H
15.540	3.0	38.2	27.0	39.4	10.9	-40.8	0.0	1.1	48.7	37.5	74	54	-25.3	-16.5	H
20.720	3.0	40.8	29.9	36.4	12.0	-40.6	0.0	0.2	48.7	37.8	74	54	-25.3	-16.2	H
5240 MHz															
10.480	3.0	39.8	29.6	38.1	8.0	-37.9	0.0	0.9	48.9	38.7	74	54	-25.1	-15.3	H
15.720	3.0	37.0	27.4	39.0	11.1	-40.9	0.0	1.1	47.3	37.7	74	54	-26.7	-16.3	H
MIDDLE CHANNEL (5260 MHz)															
10.520	3.0	43.5	29.9	38.1	8.0	-37.9	0.0	0.9	52.5	38.9	74	54	-21.5	-15.1	H
15.780	3.0	38.3	27.0	38.9	11.1	-40.9	0.0	1.1	48.6	37.3	74	54	-25.4	-16.7	H
HIGH CHANNEL (5320 MHz)															
10.640	3.0	38.5	27.0	38.1	8.0	-38.0	0.0	0.9	47.4	35.9	74	54	-26.6	-18.1	H
15.960	3.0	35.6	24.9	38.6	11.3	-41.0	0.0	1.2	45.7	35.0	74	54	-28.3	-19.0	H

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

[illegible]

7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 18 File#: 05u3230 B.EMI Date: 02-17-2005 Time: 12:53:27

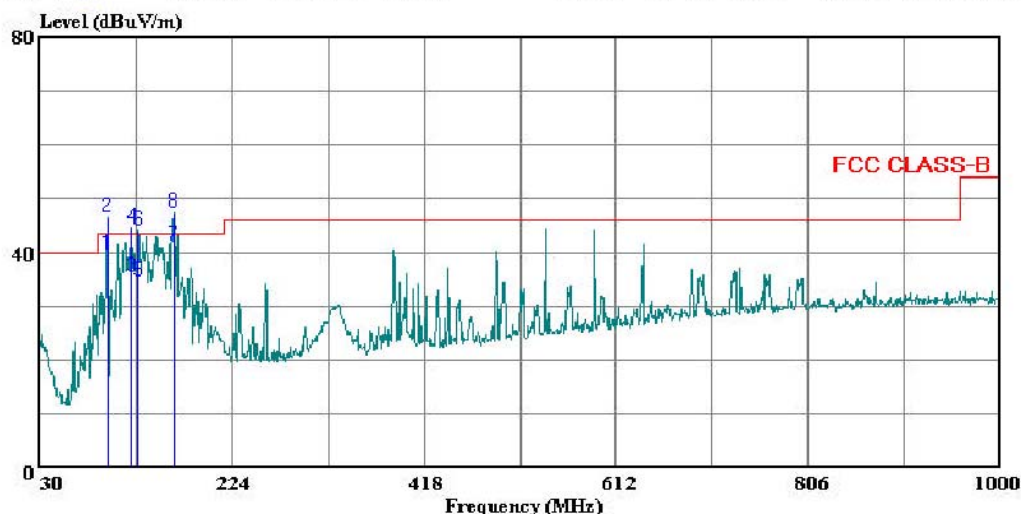

(Auxiliary ATC)

Trace: 15

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : David Garcia
Project #: : 05U3230-1
Company: : Atheros
EUT: : 802.11a/b/g/turbo mini PCI card
Model No: : AR5BMB6
Configuration: : EUT/Extender card/Laptop
Target of Test: : FCC Part 15.247
Mode of Operation: Tx, Frame Mode

Page: 1

HORIZONTAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	97.900	56.60	-16.97	39.63	43.50	-3.87	Q-P
2 *	97.900	63.50	-16.97	46.53	43.50	3.03	Peak
3	122.150	48.00	-12.63	35.37	43.50	-8.13	Q-P
4 *	122.150	57.20	-12.63	44.57	43.50	1.07	Peak
5	128.940	47.20	-12.64	34.56	43.50	-8.94	Q-P
6 *	128.940	56.70	-12.64	44.06	43.50	0.56	Peak
7	164.830	55.40	-14.11	41.29	43.50	-2.21	Q-P
8 *	164.830	61.40	-14.11	47.29	43.50	3.79	Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 23 File#: 05u3230 B.EMI Date: 02-17-2005 Time: 13:18:31

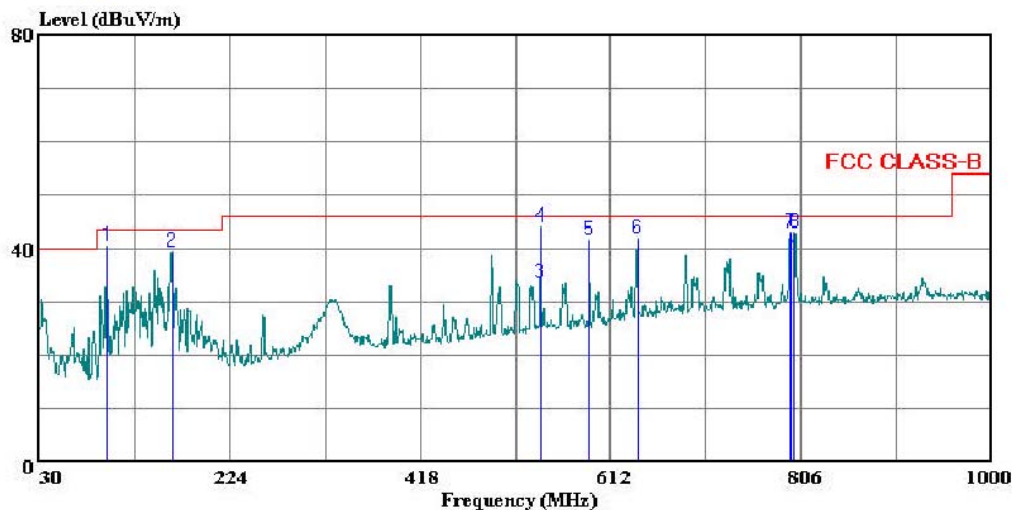

(Audix.ATC)

Trace: 19

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : David Garcia
Project #: : 05U3230-1
Company: : Atheros
EUT: : 802.11a/b/g/turbo mini PCI card
Model No: : AR5BMB6
Configuration: : EUT/Extender card/Laptop
Target of Test: : FCC Part 15.247
Mode of Operation: Tx, Frame Mode

VERTICAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	98.870	57.20	-16.71	40.49	43.50	-3.01	Peak
2	164.830	53.50	-14.11	39.39	43.50	-4.11	Peak
3	540.220	40.00	-6.57	33.43	46.00	-12.57	QP
4	540.220	50.74	-6.61	44.13	46.00	-1.87	Peak
5	589.690	47.10	-5.65	41.45	46.00	-4.55	Peak
6	639.160	46.40	-4.56	41.84	46.00	-4.16	Peak
7	795.330	44.70	-1.87	42.83	46.00	-3.17	Peak
8	799.210	44.70	-1.80	42.90	46.00	-3.10	Peak

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.22	53.56	--	41.57	0.00	63.01	53.01	-9.45	-11.44	L1
0.70	40.92	--	40.25	0.00	56.00	46.00	-15.08	-5.75	L1
22.78	40.56	--	34.69	0.00	60.00	50.00	-19.44	-15.31	L1
0.22	52.97	--	41.03	0.00	62.97	52.97	-10.00	-11.94	L2
0.70	40.48	--	39.68	0.00	56.00	46.00	-15.52	-6.32	L2
20.70	34.04	--	28.94	0.00	60.00	50.00	-25.96	-21.06	L2
6 Worst Data									

LINE 1 RESULTS

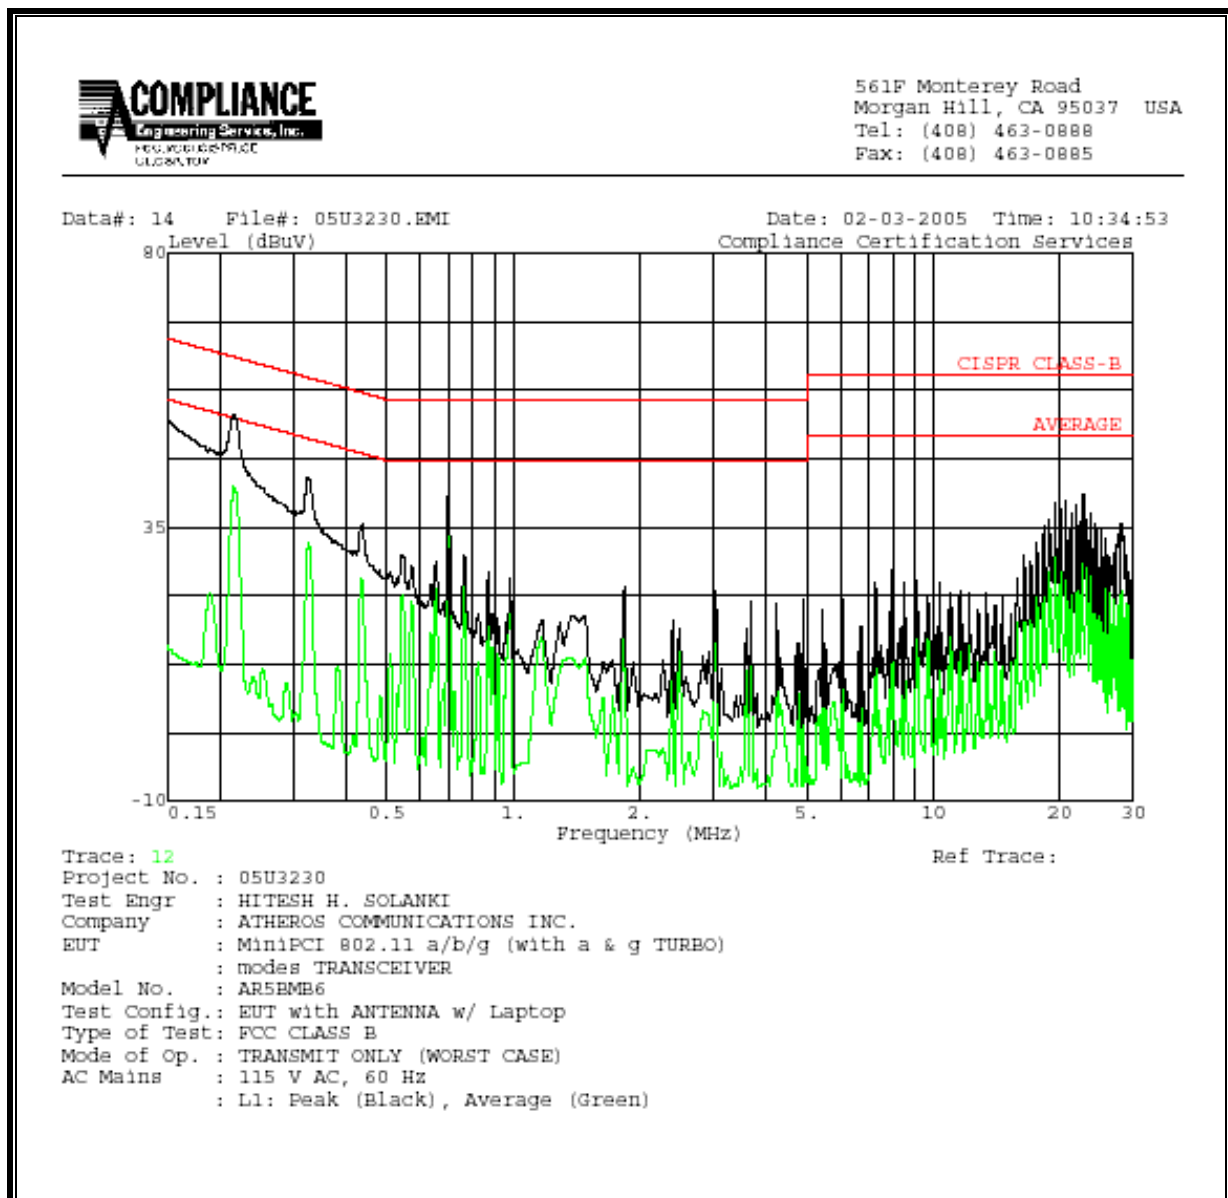

LINE 2 RESULTS

