

FCC TEST REPORT

REPORT NO.: RF110309E06A R2

MODEL NO.: ARS263-SB

FCC ID: PPD-ARS263SB

IC ID: 4104A-ARS263SB

RECEIVED: Mar. 09, 2011

TESTED: Mar. 22 to Apr. 07, 2011

ISSUED: June 24, 2011

APPLICANT: Qualcomm Atheros, Inc.

ADDRESS: 1700 Technology Drive, San Jose, CA
95110

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS: No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 88 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF ANTENNA	10
3.3 DESCRIPTION OF TEST MODES	11
3.3.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	12
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	15
3.5 DESCRIPTION OF SUPPORT UNITS.....	16
3.6 CONFIGURATION OF SYSTEM UNDER TEST	17
4. TEST TYPES AND RESULTS	18
4.1 CONDUCTED EMISSION MEASUREMENT	18
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	18
4.1.2 TEST INSTRUMENTS.....	18
4.1.3 TEST PROCEDURES	19
4.1.4 DEVIATION FROM TEST STANDARD	19
4.1.5 TEST SETUP	20
4.1.6 EUT OPERATING CONDITIONS	20
4.1.7 TEST RESULTS	21
4.2 RADIATED EMISSION MEASUREMENT	23
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	23
4.2.2 TEST INSTRUMENTS.....	25
4.2.3 TEST PROCEDURES	27
4.2.4 DEVIATION FROM TEST STANDARD	27
4.2.5 TEST SETUP	28
4.2.6 EUT OPERATING CONDITIONS	28
4.2.7 TEST RESULTS (FOR TRANSMITTER PART)	29
4.2.8 TEST RESULTS (FOR RECEIVER PART)	51
4.3 6DB BANDWIDTH MEASUREMENT	55
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	55
4.3.2 TEST INSTRUMENTS.....	55
4.3.3 TEST PROCEDURE.....	55
4.3.4 DEVIATION FROM TEST STANDARD	55
4.3.5 TEST SETUP	55
4.3.6 EUT OPERATING CONDITIONS	55
4.3.7 TEST RESULTS	56



A D T

4.4	99% BANDWIDTH MEASUREMENT	62
4.4.1	TEST INSTRUMENTS.....	62
4.4.2	TEST PROCEDURE.....	62
4.4.3	TEST SETUP	62
4.4.4	EUT OPERATING CONDITIONS	62
4.4.5	TEST RESULTS	63
4.5	MAXIMUM PEAK OUTPUT POWER.....	69
4.5.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	69
4.5.2	INSTRUMENTS.....	69
4.5.3	TEST PROCEDURES	69
4.5.4	DEVIATION FROM TEST STANDARD	69
4.5.5	TEST SETUP	69
4.5.6	EUT OPERATING CONDITIONS	69
4.5.7	TEST RESULTS	70
4.6	AVERAGE OUTPUT POWER.....	71
4.6.1	FOR REFERENCE.....	71
4.6.2	TEST INSTRUMENTS.....	71
4.6.3	TEST PROCEDURES	71
4.6.4	TEST SETUP	71
4.6.5	EUT OPERATING CONDITIONS	71
4.6.6	TEST RESULTS	72
4.7	POWER SPECTRAL DENSITY MEASUREMENT.....	73
4.7.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	73
4.7.2	TEST INSTRUMENTS.....	73
4.7.3	TEST PROCEDURE.....	73
4.7.4	DEVIATION FROM TEST STANDARD	73
4.7.5	TEST SETUP	73
4.7.6	EUT OPERATING CONDITION	73
4.7.7	TEST RESULTS	74
4.8	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	80
4.8.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	80
4.8.2	TEST INSTRUMENTS.....	80
4.8.3	TEST PROCEDURE.....	80
4.8.4	DEVIATION FROM TEST STANDARD	80
4.8.5	EUT OPERATING CONDITION	80
4.8.6	TEST RESULTS	80
5.	INFORMATION ON THE TESTING LABORATORIES	87
6.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	88

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF110309E06A	Original release	Apr. 25, 2011
RF110309E06A R1	1. Removed antenna (model : 81.ED415.001) 2. Added IC ID on page 1	May 24, 2011
RF110309E06A R2	1. Changed the applicant. 2. Revised antenna description.	June 24, 2011



A D T

1. CERTIFICATION

PRODUCT: 1x1 802.11b/g/n +BT SDIO-WLAN/USB-BT Card

BRAND NAME: Atheros

MODEL NO.: ARS263-SB

TEST SAMPLE: R&D SAMPLE

APPLICANT: Qualcomm Atheros, Inc.

TESTED: Mar. 22 to Apr. 07, 2011

STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003
ANSI C63.10-2009
Canada RSS-210 Issue 8 (2010-12)
Canada RSS-Gen Issue 3 (2010-12)

The above equipment (Model: ARS263-SB) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and was in compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng, **DATE:** June 24, 2011
(Midoli Peng, Specialist)

APPROVED BY : May Chen, **DATE:** June 24, 2011
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C ; RSS-210; RSS-Gen					
Standard Section			Test Type and Limit	Result	REMARK
RSS-210	RSS-Gen	FCC Part 15			
-	7.2.4	15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -33.34dB at 3.375MHz
A8.2(a)	4.6	15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
A8.4(4)	4.8	15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
A8.5	4.9	15.247(d)	Transmitter Radiated Emissions FCC Limit: Table 15.209 RSS-Gen Limit: Table 5, 6	PASS	Meet the requirement of limit Minimum passing margin is -0.7dB at 2386.13MHz
-	6.1	-	Receiver Radiated Emissions RSS-Gen Limit: Table 2	PASS	Meet the requirement of limit Minimum passing margin is -1.8dB at 299.77MHz
A8.2(b)	-	15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
A8.5	-	15.247(d)	Conducted Out-Band Emission Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit
	7.1.4	15.203	Antenna Requirement	PASS	Antenna connector is IPEX not a standard connector.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.76 dB
Radiated emissions (1GHz -18GHz)	2.19 dB
Radiated emissions (18GHz -40GHz)	2.55 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	1x1 802.11b/g/n +BT SDIO-WLAN/USB-BT Card
MODEL NO.	ARS263-SB
FCC ID	PPD-ARS263SB
IC ID	4104A-ARS263SB
POWER SUPPLY	DC 3.3V from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11 / 5.5 / 2 / 1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n (20MHz, 800ns GI): 65 / 58.5 / 52 / 39 / 26 / 19.5 / 13 / 6.5Mbps 802.11n (20MHz, 400ns GI): 72.2 / 65 / 57.8 / 43.3 / 28.9 / 21.7 / 14.4 / 7.2Mbps
OPERATING FREQUENCY	2.412 ~ 2.462GHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	802.11b: 83.2mW 802.11g: 177.8mW 802.11n (20MHz): 162.2mW
ANTENNA TYPE	See item 3.2
ANTENNA CONNECTOR	See item 3.2
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. There are Bluetooth technology and WLAN technology used for the EUT. <the Bluetooth test data please refer "RF110309E06A-1 R2">
2. There are two versions of EUT, The only difference is version 032C has SFLASH installed. And there is no SFLASH in version 032A. The worst-case scenario has been investigated with the same power level and found no difference. The test data reflects the worst-case scenarios.
3. Conducted emission and Radiated emission of the simultaneous operation (WiFi & Bluetooth) have been evaluated and no non-compliance found.

4. The EUT is 1 * 1 spatial SISO without beam forming function.
5. The EUT complies with 802.11n standards and backwards compatible with 802.11b, 802.11g products.
6. The EUT was pre-tested under the following modes:

Test Mode	Data rate
Mode A	400ns GI
Mode B	800ns GI

From the above modes, the worst case was found in **Mode B**. Therefore only the test data of the mode was recorded in this report.

7. For radiated : The EUT's antenna was pre-tested under the following modes:

Test Mode	Description
Mode A	X-Y axis
Mode B	Y-Z axis
Mode C	X-Z axis

From the above modes, the worst case was found in **Mode A**. Therefore only the test data of the mode was recorded in this report.

8. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



A D T

3.2 DESCRIPTION OF ANTENNA

There is one set of antenna provided to this EUT, please refer to the following table:

No.	Brand	Model	Antenna Type	Connector	Antenna Gain (dBi) <included cable loss>	Cable Loss(dB)	Cable Length(mm)
1&2	WNC	81-EBJ15.005(Main)	PIFA	IPEX	3.00	1.15	300
	WNC	81-EBJ15.005(AUX)	PIFA	IPEX	3.62	1.15	300

Note: 1. Above antenna gains of antenna is Total (H+V).

2. Both Bluetooth and WLAN are tested with 3.62dBi (Aux) antenna.

3.3 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

Eleven channels are provided for 802.11b, 802.11g, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

3.3.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
-	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The receiving mode had show equal or better than Tx mode during the pre-scan and hence the Tx mode data is re-used for Receiving-mode worst-case data.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATIO N TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
Receiver	1 to 11	1, 6, 11	-	-	-

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
For 2.4 GHz 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

※ **TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (System)	TESTED BY
RE ³ 1G	19deg. C, 66%RH, 1022 hPa	120Vac, 60Hz	Rex Huang
RE<1G	22deg. C, 62%RH, 1022 hPa	120Vac, 60Hz	Rex Huang
PLC	23deg. C, 69%RH, 1022 hPa	120Vac, 60Hz	Andy Ho
APCM	20deg. C, 60%RH, 1022 hPa	120Vac, 60Hz	Rex Huang



A D T

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

ANSI C63.10-2009

Canada RSS-210 Issue 8 (2010-12)

Canada RSS-Gen Issue 3 (2010-12)

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID
1	Notebook Computer	Lenovo	T61	L3Z9538	FCC DoC
2	ExpressCard Adapter	Atheros	NA	NA	NA
3	Extension SDIO Card	Atheros	NA	NA	NA

No.	Signal cable description
1	NA
2	NA
3	NA


Note: The power cords of the above support units were unshielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

For conducted test:

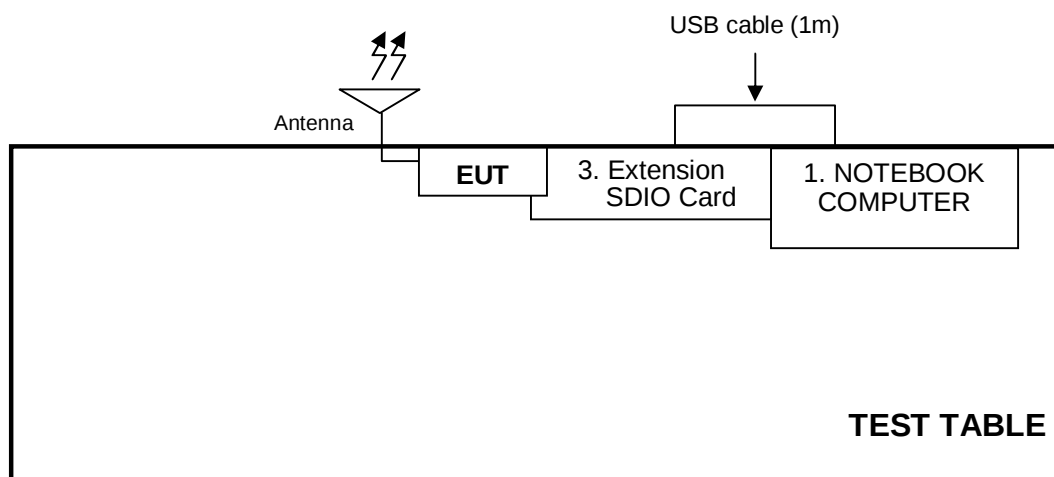

For other test items:

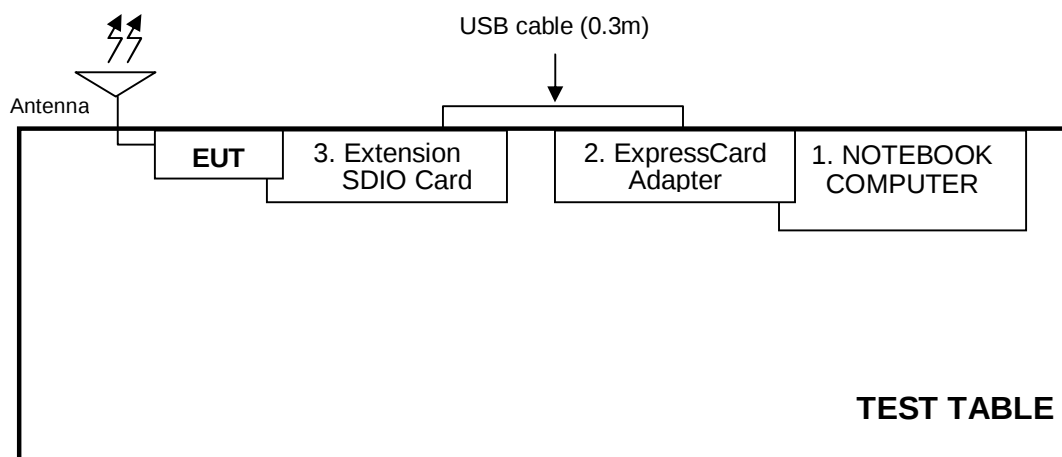

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
0.15-0.5 0.5-5 5-30	Quasi-peak	Average
	66 to 56	56 to 46
	56	46
	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 09, 2011	Mar. 08, 2012
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-522	Sep. 08, 2010	Sep. 07, 2011
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 03, 2010	Nov. 02, 2011
RF Cable (JYEBAO)	5DFB	COCCAB-002	Aug. 30, 2010	Aug. 29, 2011
50 ohms Terminator	50	3	Nov. 03, 2010	Nov. 02, 2011
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

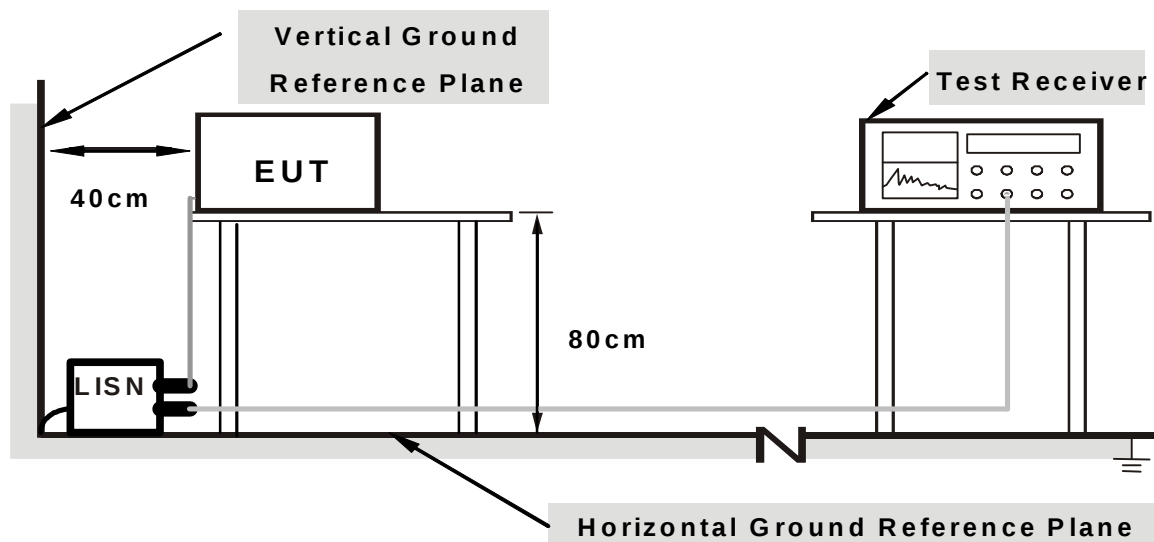

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


1. Connect the EUT with the support unit 1 (Notebook Computer) which is placed on a testing table.
2. The communication partner run test program “ART R0.2B25” to enable EUT under transmission/receiving condition continuously at specific channel frequency.

4.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.11	20.08	-	20.19	-	65.58	55.58	-45.39	-
2	0.391	0.13	19.85	-	19.98	-	58.03	48.03	-38.05	-
3	1.539	0.15	22.09	-	22.24	-	56.00	46.00	-33.76	-
4	3.371	0.19	21.58	-	21.77	-	56.00	46.00	-34.23	-
5	4.891	0.24	18.63	-	18.87	-	56.00	46.00	-37.13	-
6	16.621	0.60	11.29	-	11.89	-	60.00	50.00	-48.11	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

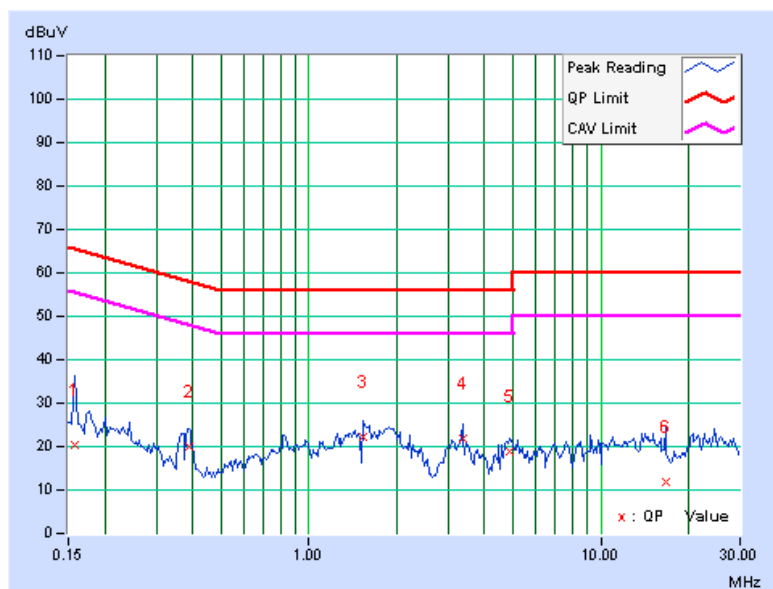

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.12	25.86	-	25.98	-	66.00	56.00	-40.02	-
2	0.244	0.14	20.72	-	20.86	-	61.97	51.97	-41.11	-
3	0.943	0.16	18.30	-	18.46	-	56.00	46.00	-37.54	-
4	2.234	0.20	19.24	-	19.44	-	56.00	46.00	-36.56	-
5	3.375	0.25	22.41	-	22.66	-	56.00	46.00	-33.34	-
6	21.301	1.52	18.80	-	20.32	-	60.00	50.00	-39.68	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

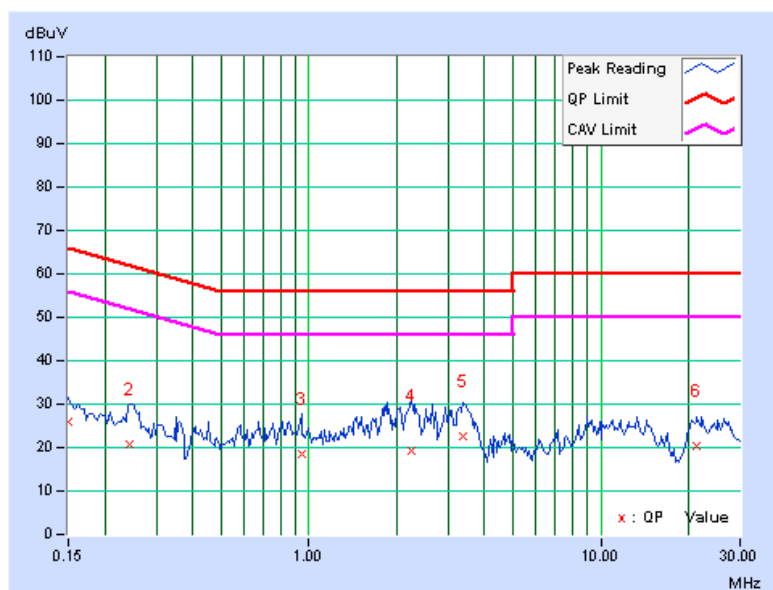

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

For transmitter part:

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209(RSS-Gen table 5, 6) as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB.
4. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.



A D T

For receiver part:

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in RSS-Gen table 2 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB.

4.2.2 TEST INSTRUMENTS

Below 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 23, 2010	Aug. 22, 2011
Agilent Pre-Selector	N9039A	MY46520310	Aug. 23, 2010	Aug. 22, 2011
Agilent Signal Generator	N5181A	MY49060347	July 30, 2010	July 29, 2011
LIG NEX1 Test Receiver	ER-265	L09068005	Oct. 25, 2010	Oct. 24, 2011
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 16, 2010	Nov. 15, 2011
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 28, 2011	Feb. 27, 2012
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	NA	NA
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 28, 2010	Apr. 27, 2011
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 22, 2010	Nov. 21, 2011
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 08, 2010	Oct. 07, 2011
RF CABLE	NA	RF104-205 RF104-207 RF104-202	Dec. 28, 2010	Dec. 27, 2011
RF Cable	NA	CHHCAB_001	NA	NA
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.



A D T

Above 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 14, 2010	July 13, 2011
Agilent Pre-Selector	N9039A	MY46520311	July 14, 2010	July 13, 2011
Agilent Signal Generator	N5181A	MY49060517	July 14, 2010	July 13, 2011
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 16, 2010	Nov. 15, 2011
Agilent Pre-Amplifier	8449B	3008A02578	July 05, 2010	July 04, 2011
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	NA	NA
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 29, 2010	Apr. 28, 2011
AISI Horn_Antenna	AIH.8018	0000320091110	Nov. 12, 2010	Nov. 11, 2011
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 08, 2010	Oct. 07, 2011
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 27, 2010	Dec. 26, 2011
RF Cable	NA	CHGCAB_001	NA	NA
Software	ADT_Radiated_ V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in 966 Chamber No. G.
 4. The FCC Site Registration No. is 966073.
 5. The VCCI Site Registration No. is G-137.
 6. The CANADA Site Registration No. is IC 7450H-2.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection(PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

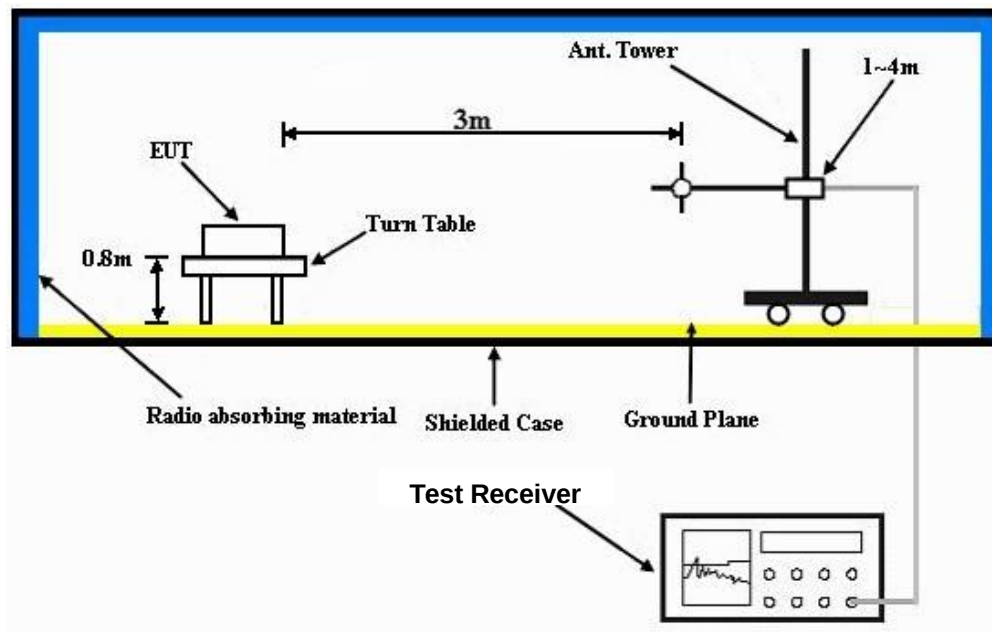

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS (FOR TRANSMITTER PART)

BELOW 1GHz WORST-CASE DATA : 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	19deg. C, 66%RH 1022 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	87.43	37.6 QP	40.0	-2.4	2.00 H	320	28.04	9.58
2	187.27	36.8 QP	43.5	-6.7	2.00 H	98	24.68	12.13
3	236.53	39.6 QP	46.0	-6.4	1.25 H	268	27.19	12.44
4	261.40	38.8 QP	46.0	-7.2	1.25 H	268	25.44	13.36
5	299.77	44.2 QP	46.0	-1.8	1.25 H	189	29.28	14.92
6	398.29	43.1 QP	46.0	-2.9	1.00 H	211	25.29	17.81
7	497.89	39.0 QP	46.0	-7.0	2.00 H	241	19.06	19.92
8	796.55	41.4 QP	46.0	-4.6	1.25 H	221	16.64	24.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	87.43	29.2 QP	40.0	-10.8	1.00 V	360	19.59	9.58
2	187.27	29.1 QP	43.5	-14.4	2.00 V	199	16.98	12.13
3	237.24	31.1 QP	46.0	-14.9	2.00 V	210	18.66	12.46
4	262.11	31.8 QP	46.0	-14.2	1.75 V	206	18.43	13.39
5	298.82	35.7 QP	46.0	-10.3	1.00 V	279	20.85	14.88
6	399.72	37.0 QP	46.0	-9.0	2.00 V	265	19.19	17.85
7	497.89	34.6 QP	46.0	-11.4	2.00 V	275	14.72	19.92
8	799.39	33.0 QP	46.0	-13.0	1.25 V	253	8.14	24.86

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

ABOVE 1GHz WORST-CASE DATA

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH 1022 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.13	60.8 PK	74.0	-13.2	1.08 H	141	29.16	31.64
2	2386.13	53.3 AV	54.0	-0.7	1.08 H	141	21.66	31.64
3	*2412.00	108.9 PK			1.08 H	141	77.17	31.73
4	*2412.00	106.8 AV			1.08 H	141	75.07	31.73
5	4824.00	50.9 PK	74.0	-23.1	1.00 H	112	11.93	38.97
6	4824.00	47.3 AV	54.0	-6.7	1.00 H	112	8.33	38.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.27	59.8 PK	74.0	-14.2	1.23 V	37	28.16	31.64
2	2386.27	50.6 AV	54.0	-3.4	1.23 V	37	18.96	31.64
3	*2412.00	106.0 PK			1.23 V	37	74.27	31.73
4	*2412.00	103.9 AV			1.23 V	37	72.17	31.73
5	4824.00	51.1 PK	74.0	-22.9	1.25 V	38	12.13	38.97
6	4824.00	45.6 AV	54.0	-8.4	1.25 V	38	6.63	38.97

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH 1022 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.0 PK			1.05 H	142	78.19	31.81
2	*2437.00	108.1 AV			1.05 H	142	76.29	31.81
3	4874.00	50.9 PK	74.0	-23.1	1.01 H	295	11.76	39.14
4	4874.00	45.7 AV	54.0	-8.3	1.01 H	295	6.56	39.14
5	7311.00	52.8 PK	74.0	-21.2	1.12 H	49	6.17	46.63
6	7311.00	40.3 AV	54.0	-13.7	1.12 H	49	-6.33	46.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.0 PK			1.22 V	43	74.19	31.81
2	*2437.00	104.2 AV			1.22 V	43	72.39	31.81
3	4874.00	50.8 PK	74.0	-23.2	1.02 V	83	11.66	39.14
4	4874.00	44.9 AV	54.0	-9.1	1.02 V	83	5.76	39.14
5	7311.00	53.0 PK	74.0	-21.0	1.00 V	246	6.37	46.63
6	7311.00	40.5 AV	54.0	-13.5	1.00 V	246	-6.13	46.63

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH 1022 hPa	TESTED BY	Rex Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.2 PK			1.06 H	143	78.31	31.89
2	*2462.00	108.2 AV			1.06 H	143	76.31	31.89
3	2483.50	59.6 PK	74.0	-14.4	1.06 H	143	27.63	31.97
4	2483.50	51.0 AV	54.0	-3.0	1.06 H	143	19.03	31.97
5	4924.00	51.5 PK	74.0	-22.5	1.00 H	293	12.19	39.31
6	4924.00	45.2 AV	54.0	-8.8	1.00 H	293	5.89	39.31
7	7386.00	52.5 PK	74.0	-21.5	1.13 H	64	5.90	46.60
8	7386.00	40.2 AV	54.0	-13.8	1.13 H	64	-6.40	46.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.4 PK			1.22 V	42	74.51	31.89
2	*2462.00	104.4 AV			1.22 V	42	72.51	31.89
3	2483.50	58.0 PK	74.0	-16.0	1.22 V	42	26.03	31.97
4	2483.50	47.3 AV	54.0	-6.7	1.22 V	42	15.33	31.97
5	4924.00	51.2 PK	74.0	-22.8	1.13 V	210	11.89	39.31
6	4924.00	44.3 AV	54.0	-9.7	1.13 V	210	4.99	39.31
7	7386.00	53.3 PK	74.0	-20.7	1.60 V	186	6.70	46.60
8	7386.00	40.7 AV	54.0	-13.3	1.60 V	186	-5.90	46.60

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (802.11b MODE, CH1, HORIZONTAL)

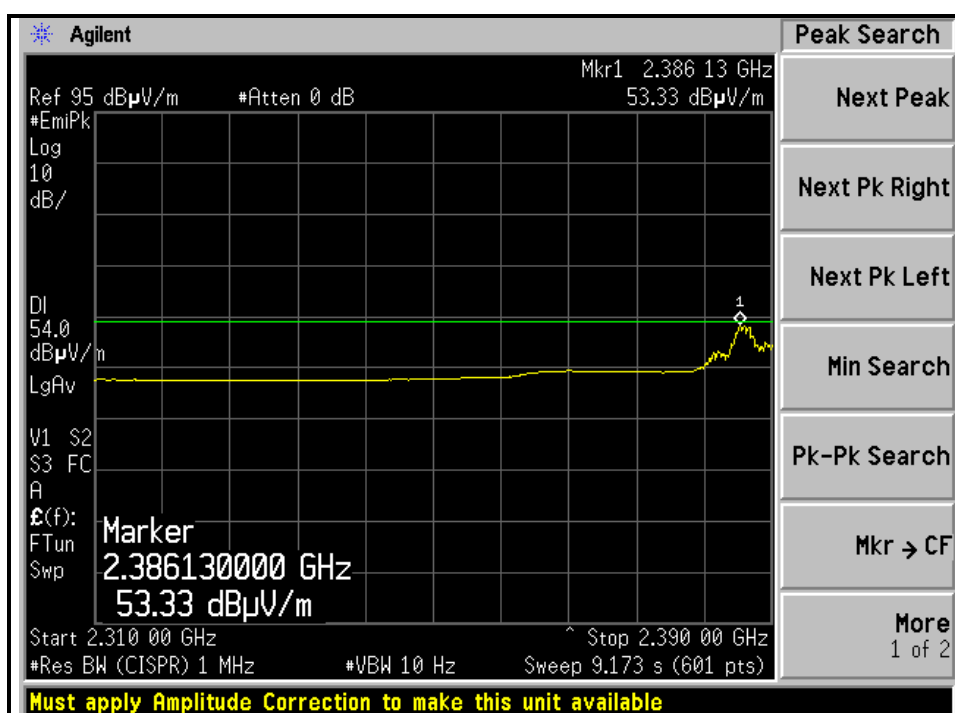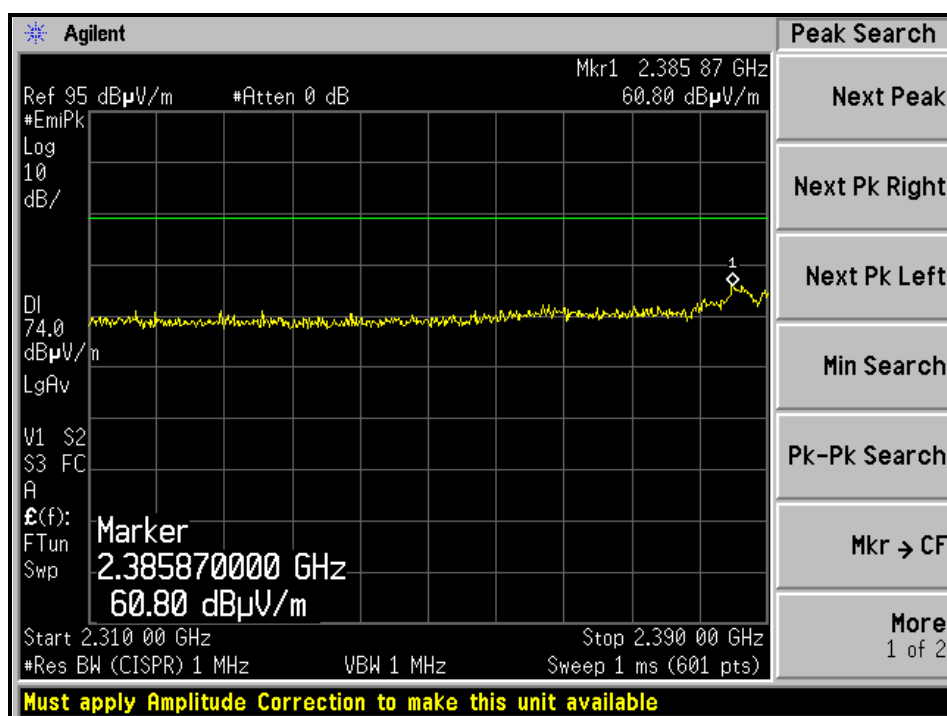



RESTRICTED BANDEDGE (802.11b MODE,CH1, VERTICAL)

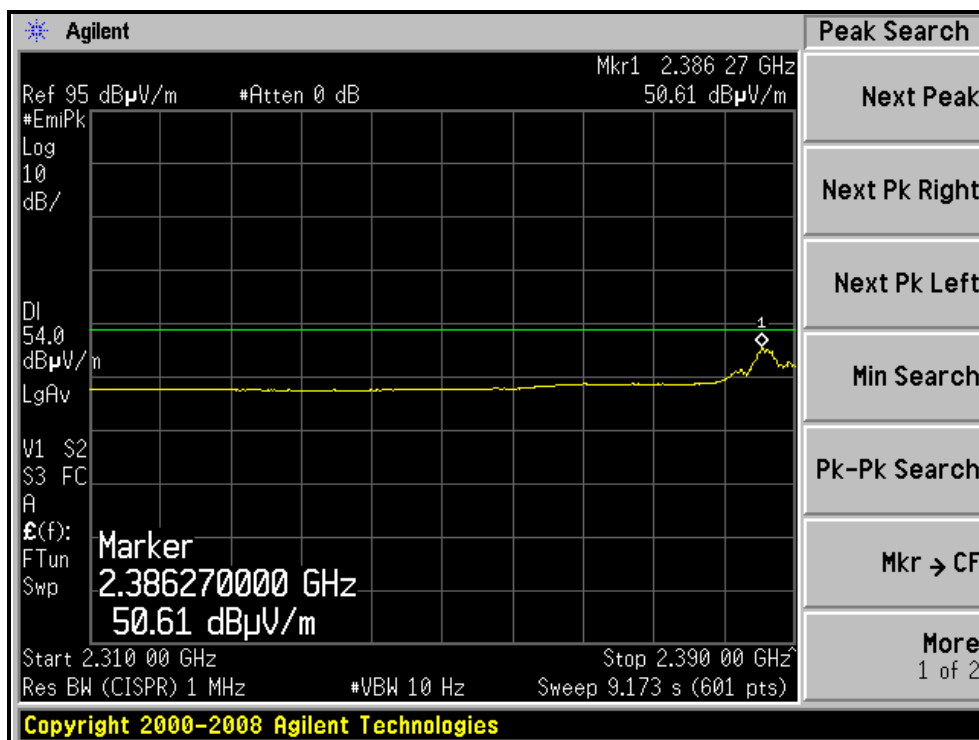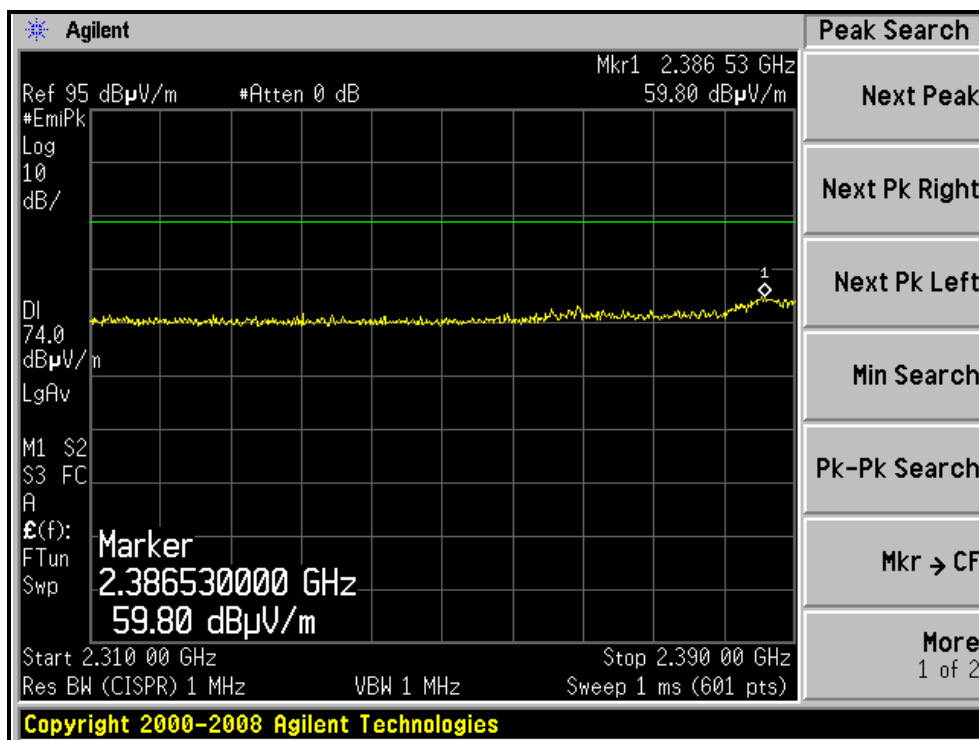

RESTRICTED BANDEDGE (802.11b MODE,CH11, HORIZONTAL)

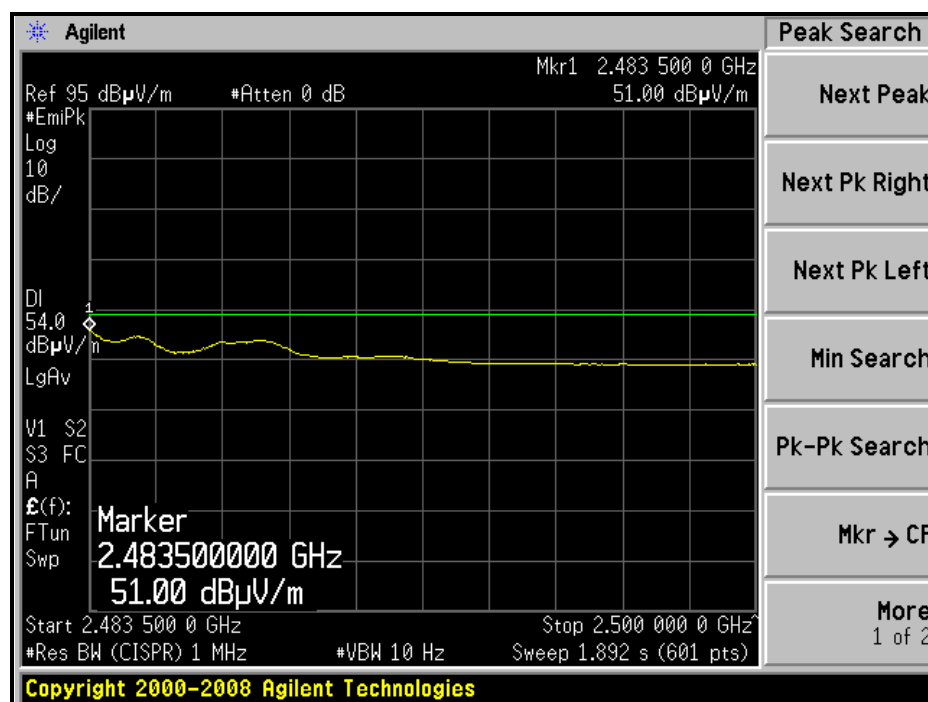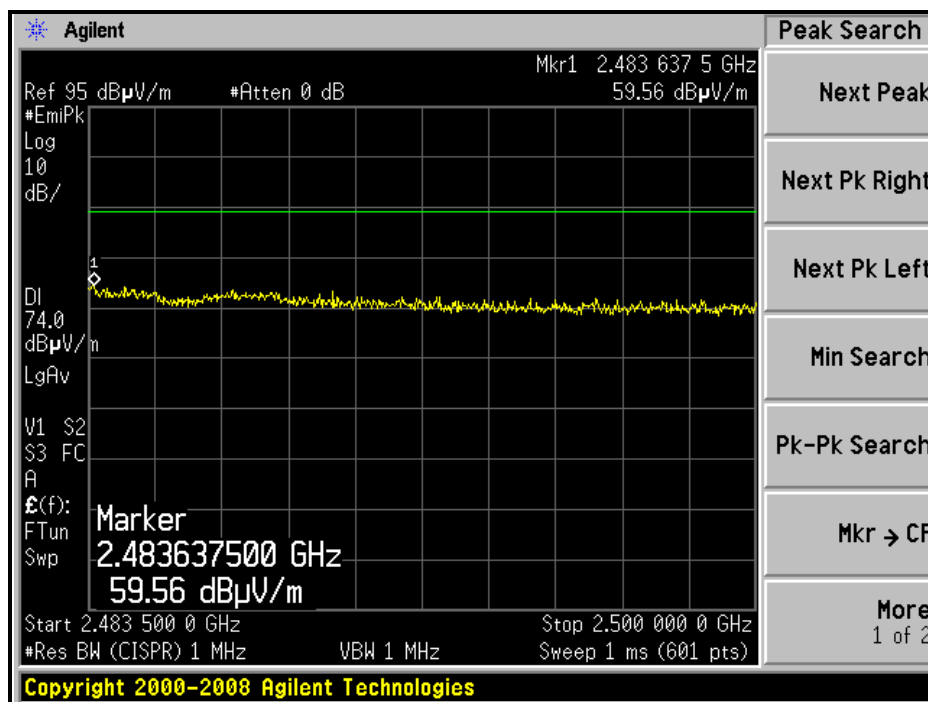

RESTRICTED BANDEDGE (802.11b MODE, CH11, VERTICAL)

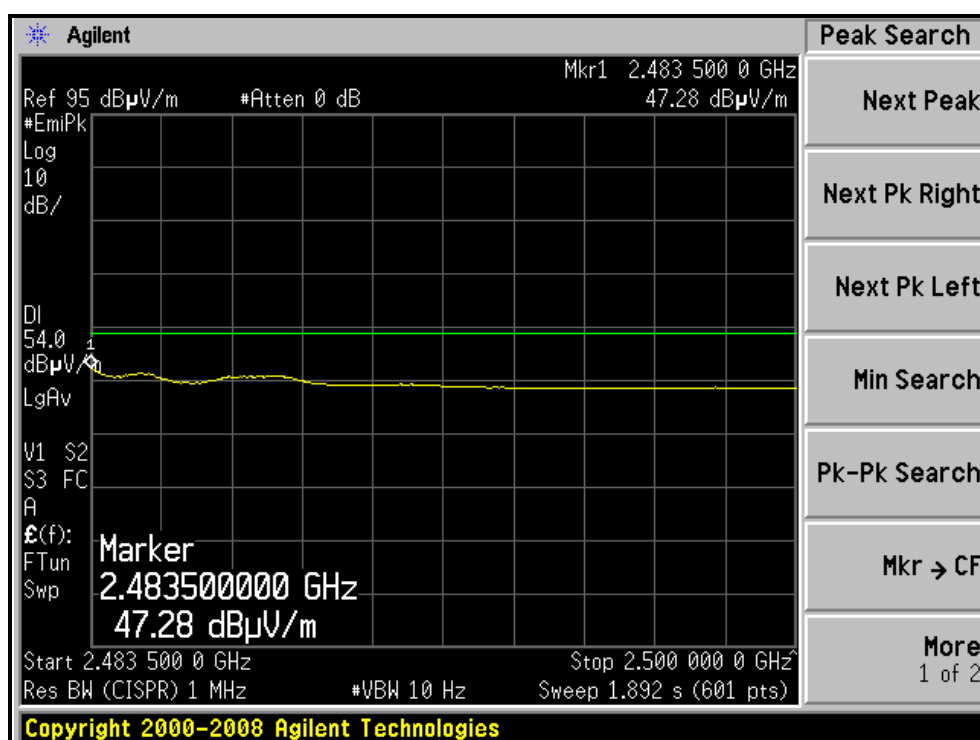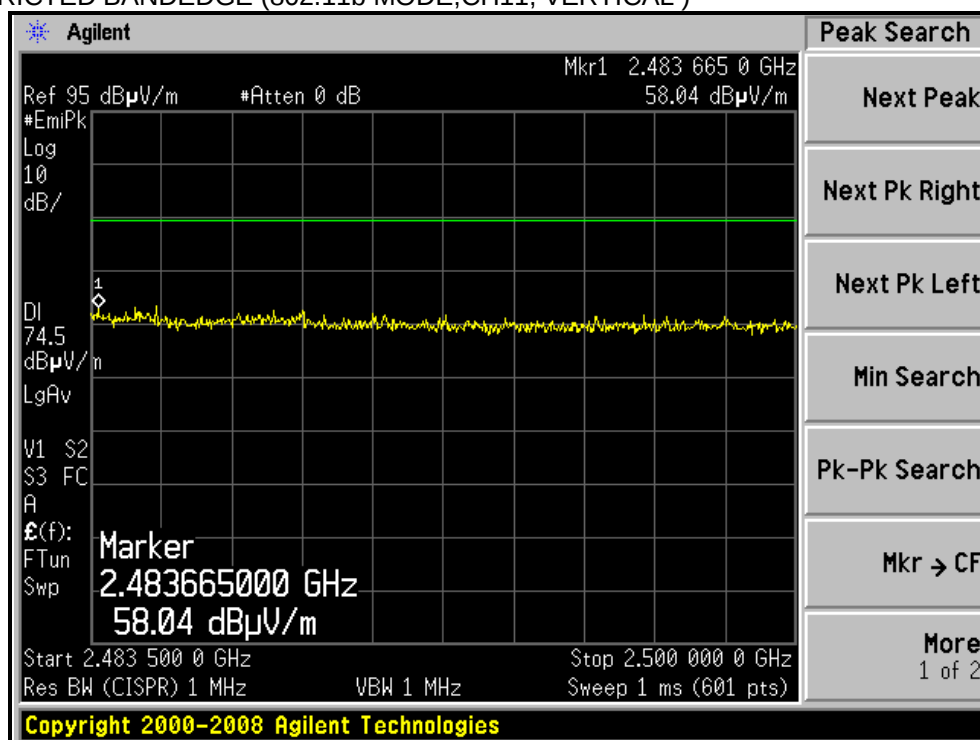



A D T

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH 1022 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.7 PK	74.0	-3.3	1.08 H	140	39.04	31.66
2	2390.00	52.7 AV	54.0	-1.3	1.08 H	140	21.04	31.66
3	*2412.00	105.4 PK			1.08 H	140	73.67	31.73
4	*2412.00	94.4 AV			1.08 H	140	62.67	31.73
5	4824.00	50.4 PK	74.0	-23.6	1.17 H	86	11.43	38.97
6	4824.00	37.6 AV	54.0	-16.4	1.17 H	86	-1.37	38.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.0 PK	74.0	-7.0	1.25 V	37	35.34	31.66
2	2390.00	51.1 AV	54.0	-2.9	1.25 V	37	19.44	31.66
3	*2412.00	102.9 PK			1.25 V	37	71.17	31.73
4	*2412.00	92.3 AV			1.25 V	37	60.57	31.73
5	4824.00	50.3 PK	74.0	-23.7	1.10 V	78	11.33	38.97
6	4824.00	36.6 AV	54.0	-17.4	1.10 V	78	-2.37	38.97

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH 1022 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.1 PK			1.07 H	140	79.29	31.81
2	*2437.00	110.0 AV			1.07 H	140	78.19	31.81
3	4874.00	51.9 PK	74.0	-22.1	1.00 H	292	12.76	39.14
4	4874.00	39.7 AV	54.0	-14.3	1.00 H	292	0.56	39.14
5	7311.00	52.7 PK	74.0	-21.3	1.14 H	52	6.07	46.63
6	7311.00	40.5 AV	54.0	-13.5	1.14 H	52	-6.13	46.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.6 PK			1.24 V	39	76.79	31.81
2	*2437.00	98.9 AV			1.24 V	39	67.09	31.81
3	4874.00	51.1 PK	74.0	-22.9	1.02 V	88	11.96	39.14
4	4874.00	37.1 AV	54.0	-16.9	1.02 V	88	-2.04	39.14
5	7311.00	53.1 PK	74.0	-20.9	1.00 V	242	6.47	46.63
6	7311.00	40.6 AV	54.0	-13.4	1.00 V	242	-6.03	46.63



REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH 1022 hPa	TESTED BY	Rex Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.0 PK			1.06 H	145	74.11	31.89
2	*2462.00	96.2 AV			1.06 H	145	64.31	31.89
3	2483.50	69.8 PK	74.0	-4.2	1.06 H	145	37.83	31.97
4	2483.50	51.7 AV	54.0	-2.3	1.06 H	145	19.73	31.97
5	4924.00	51.4 PK	74.0	-22.6	1.12 H	262	12.09	39.31
6	4924.00	38.2 AV	54.0	-15.8	1.12 H	262	-1.11	39.31
7	7386.00	52.7 PK	74.0	-21.3	1.11 H	67	6.10	46.60
8	7386.00	40.4 AV	54.0	-13.6	1.11 H	67	-6.20	46.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.9 PK			1.23 V	41	72.01	31.89
2	*2462.00	94.2 AV			1.23 V	41	62.31	31.89
3	2483.50	67.1 PK	74.0	-6.9	1.23 V	41	35.13	31.97
4	2483.50	49.6 AV	54.0	-4.4	1.23 V	41	17.63	31.97
5	4924.00	51.4 PK	74.0	-22.6	1.07 V	96	12.09	39.31
6	4924.00	37.2 AV	54.0	-16.8	1.07 V	96	-2.11	39.31
7	7386.00	52.8 PK	74.0	-21.2	1.00 V	237	6.20	46.60
8	7386.00	40.5 AV	54.0	-13.5	1.00 V	237	-6.10	46.60

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.



RESTRICTED BANDEDGE (802.11g MODE, CH1, HORIZONTAL)

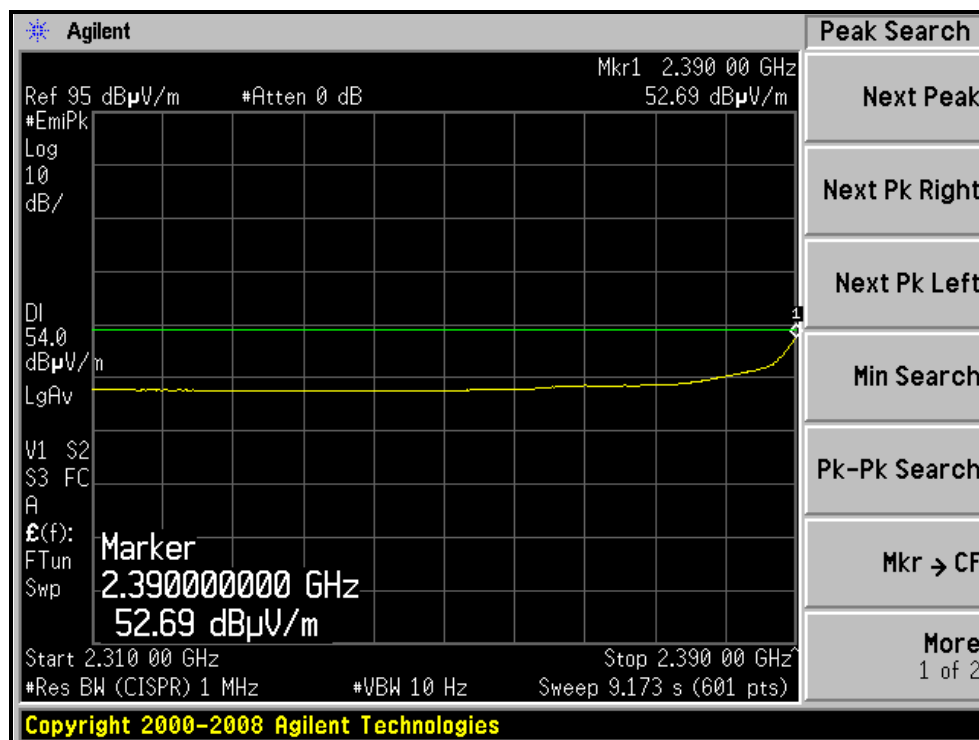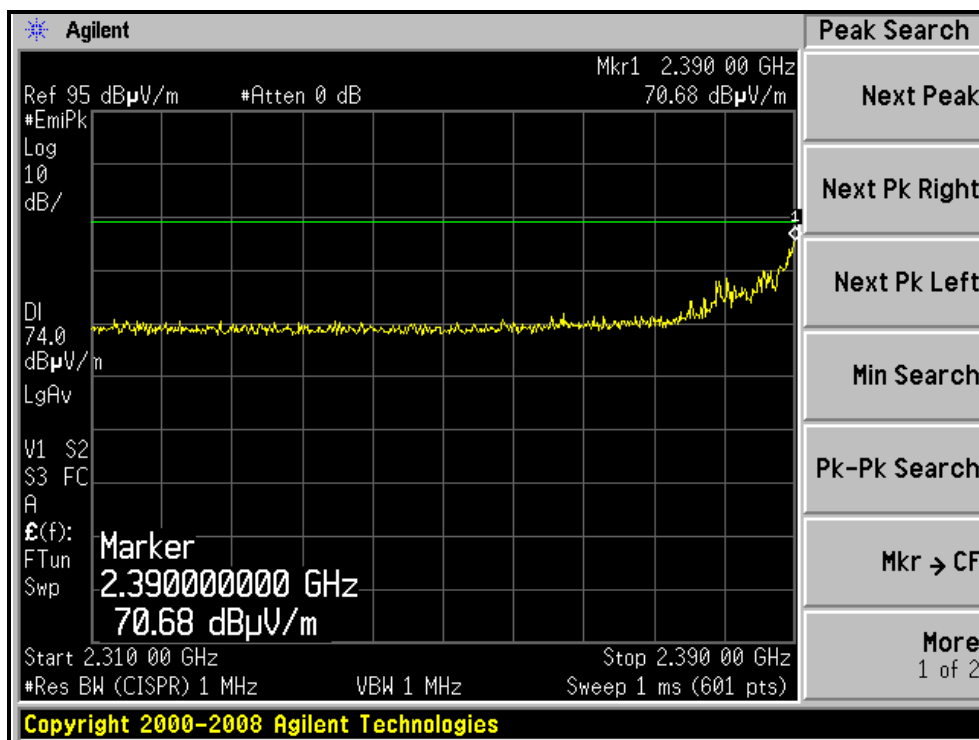



RESTRICTED BANDEDGE (802.11g MODE,CH1, VERTICAL)

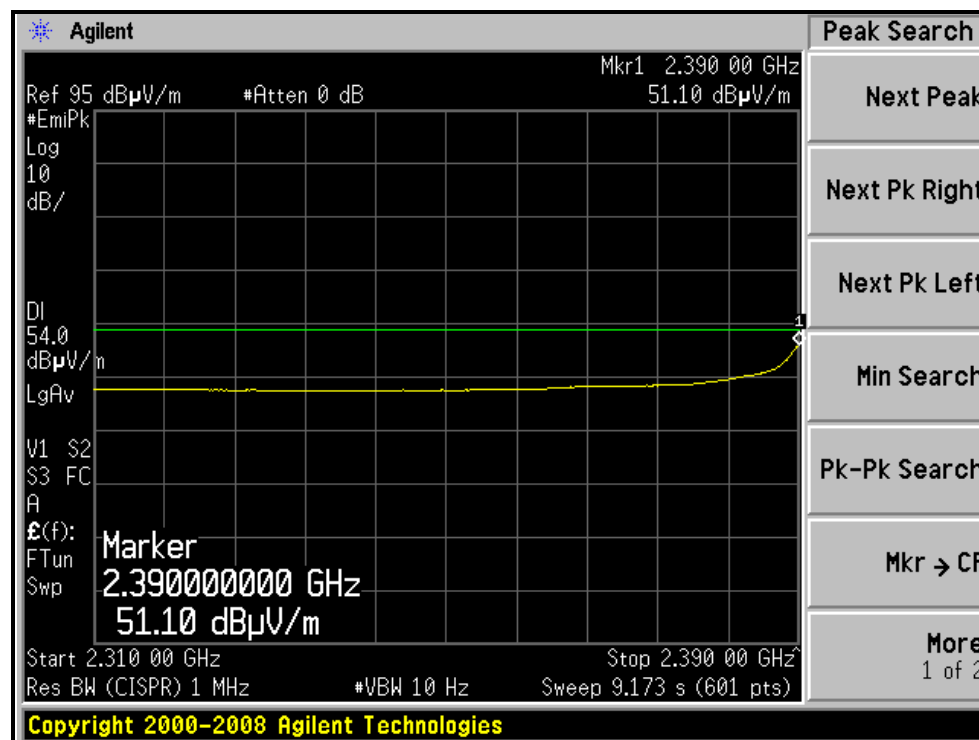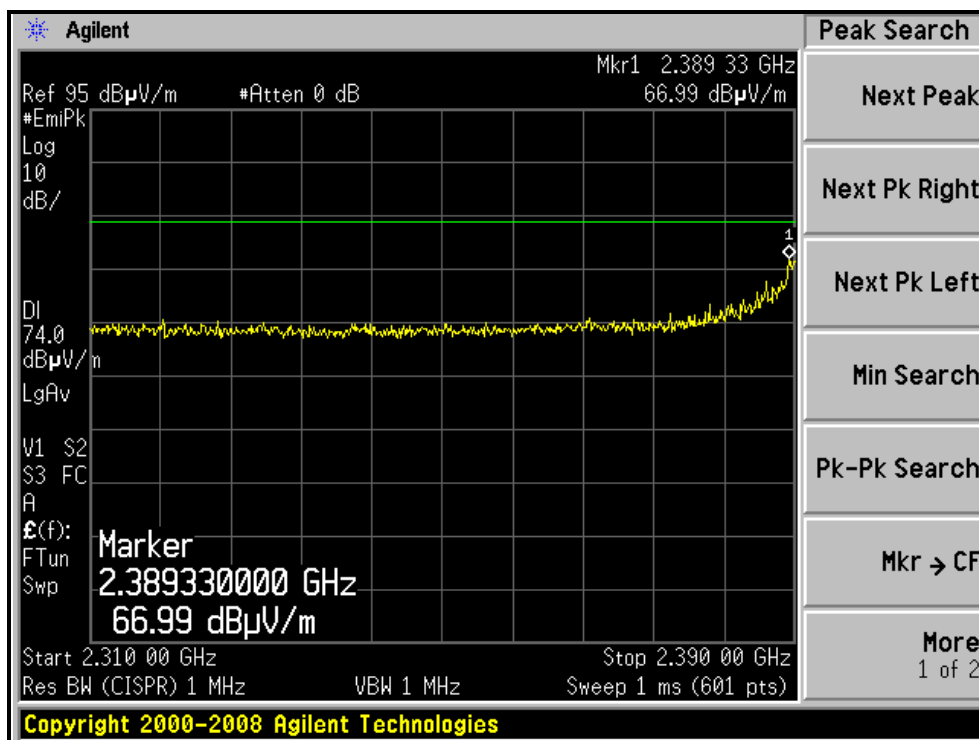

RESTRICTED BANDEDGE (802.11g MODE,CH11, HORIZONTAL)

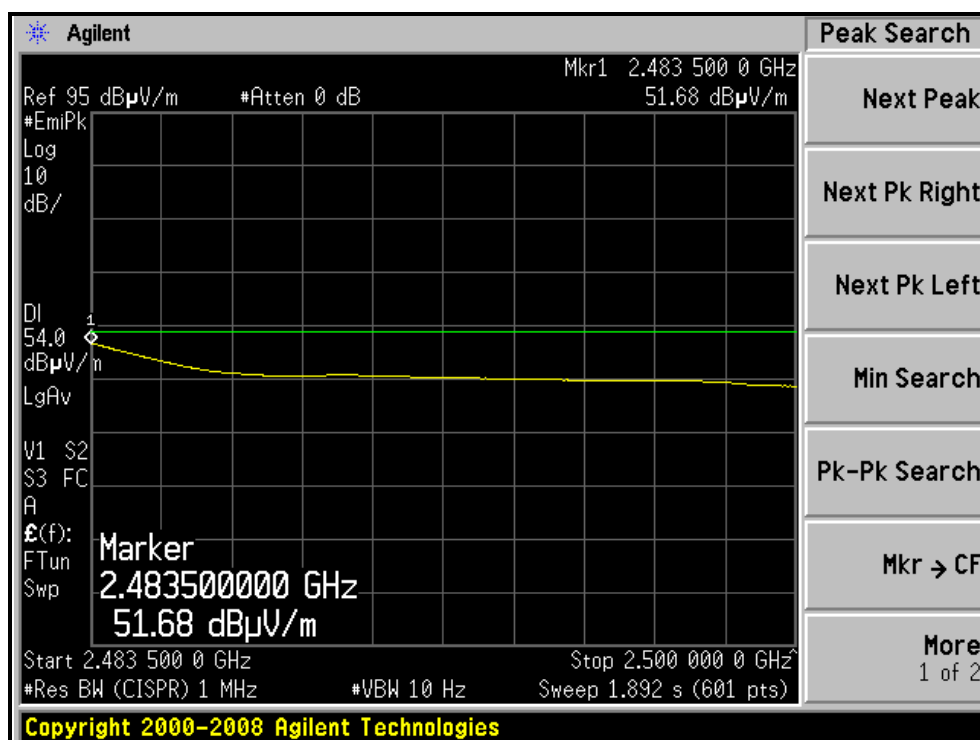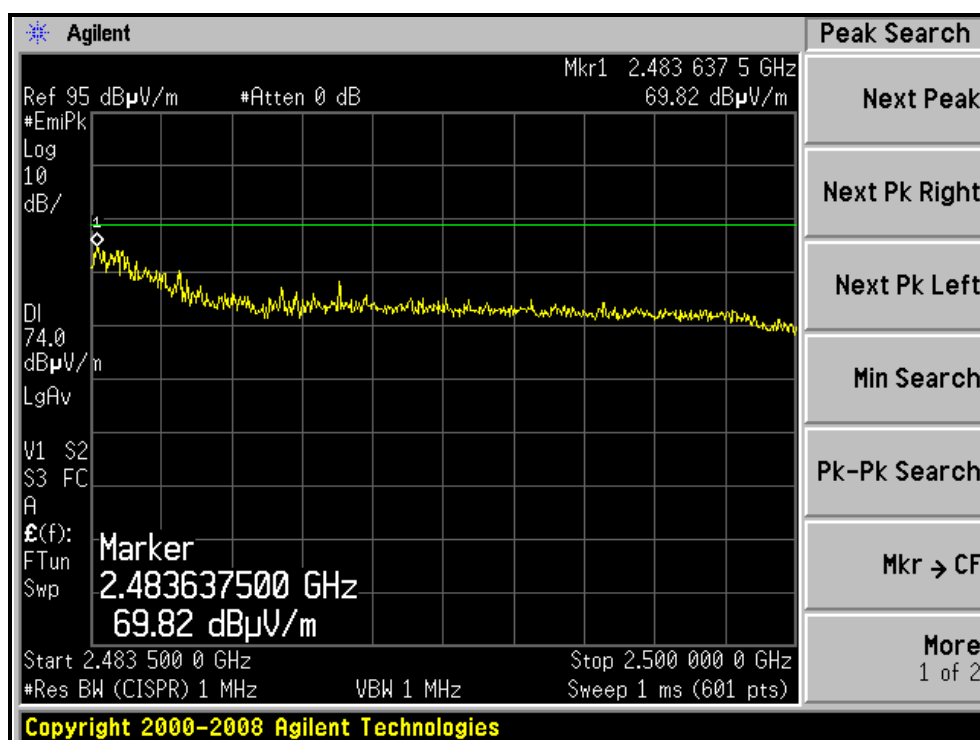

RESTRICTED BANDEDGE (802.11g MODE,CH11, VERTICAL)

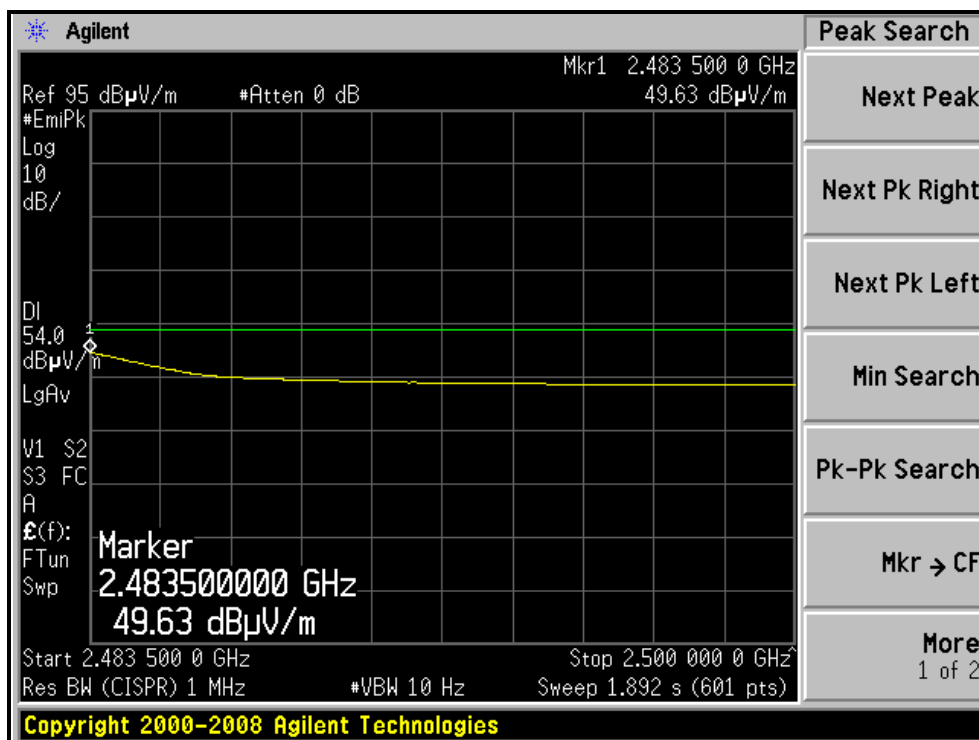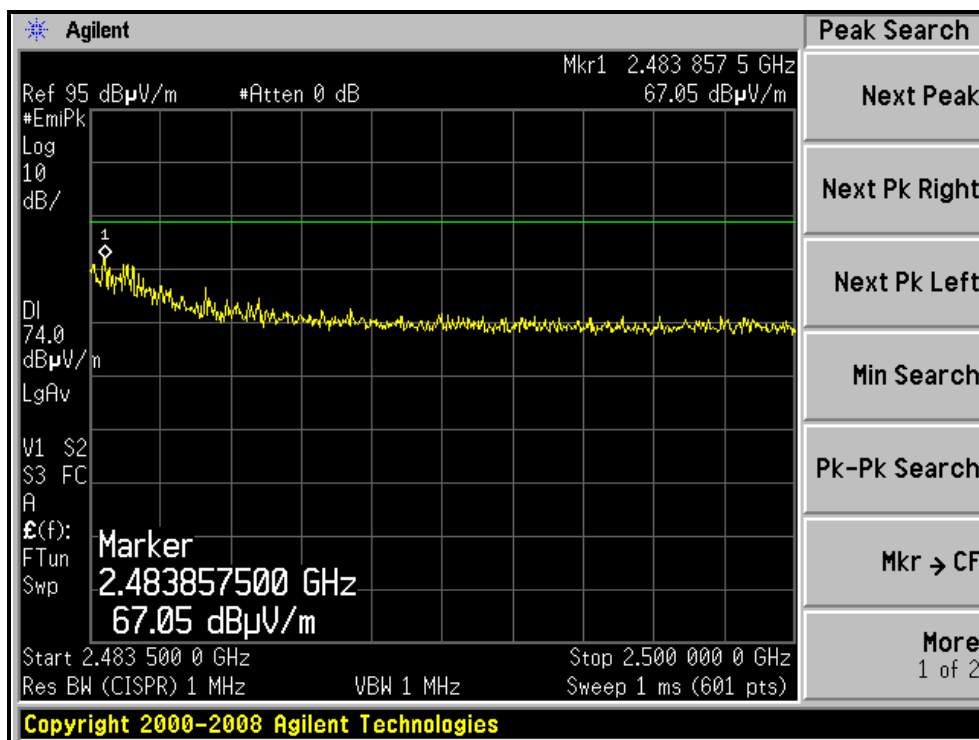

802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH 1022 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.7 PK	74.0	-2.3	1.08 H	141	40.04	31.66
2	2390.00	53.0 AV	54.0	-1.0	1.08 H	141	21.34	31.66
3	*2412.00	104.0 PK			1.08 H	141	72.27	31.73
4	*2412.00	93.2 AV			1.08 H	141	61.47	31.73
5	4824.00	50.2 PK	74.0	-23.8	1.14 H	93	11.23	38.97
6	4824.00	36.8 AV	54.0	-17.2	1.14 H	93	-2.17	38.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	1.24 V	35	36.14	31.66
2	2390.00	50.7 AV	54.0	-3.3	1.24 V	35	19.04	31.66
3	*2412.00	101.3 PK			1.24 V	35	69.57	31.73
4	*2412.00	91.1 AV			1.24 V	35	59.37	31.73
5	4824.00	50.1 PK	74.0	-23.9	1.00 V	62	11.13	38.97
6	4824.00	36.4 AV	54.0	-17.6	1.00 V	62	-2.57	38.97

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH 1022 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.4 PK			1.06 H	140	79.59	31.81
2	*2437.00	101.0 AV			1.06 H	140	69.19	31.81
3	4874.00	51.4 PK	74.0	-22.6	1.00 H	296	12.26	39.14
4	4874.00	39.2 AV	54.0	-14.8	1.00 H	296	0.06	39.14
5	7311.00	52.4 PK	74.0	-21.6	1.10 H	37	5.77	46.63
6	7311.00	40.3 AV	54.0	-13.7	1.10 H	37	-6.33	46.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.4 PK			1.23 V	37	76.59	31.81
2	*2437.00	98.6 AV			1.23 V	37	66.79	31.81
3	4874.00	51.2 PK	74.0	-22.8	1.05 V	94	12.06	39.14
4	4874.00	37.8 AV	54.0	-16.2	1.05 V	94	-1.34	39.14
5	7311.00	52.9 PK	74.0	-21.1	1.00 V	225	6.27	46.63
6	7311.00	40.7 AV	54.0	-13.3	1.00 V	225	-5.93	46.63

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH 1022 hPa	TESTED BY	Rex Huang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.9 PK			1.05 H	142	74.01	31.89
2	*2462.00	95.5 AV			1.05 H	142	63.61	31.89
3	2483.50	73.0 PK	74.0	-1.0	1.05 H	142	41.03	31.97
4	2483.50	52.9 AV	54.0	-1.1	1.05 H	142	20.93	31.97
5	4924.00	50.4 PK	74.0	-23.6	1.16 H	253	11.09	39.31
6	4924.00	37.9 AV	54.0	-16.1	1.16 H	253	-1.41	39.31
7	7386.00	52.6 PK	74.0	-21.4	1.12 H	54	6.00	46.60
8	7386.00	40.4 AV	54.0	-13.6	1.12 H	54	-6.20	46.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.7 PK			1.20 V	40	70.81	31.89
2	*2462.00	93.0 AV			1.20 V	40	61.11	31.89
3	2483.50	67.2 PK	74.0	-6.8	1.20 V	40	35.23	31.97
4	2483.50	49.6 AV	54.0	-4.4	1.20 V	40	17.63	31.97
5	4924.00	51.0 PK	74.0	-23.0	1.07 V	105	11.69	39.31
6	4924.00	37.1 AV	54.0	-16.9	1.07 V	105	-2.21	39.31
7	7386.00	52.6 PK	74.0	-21.4	1.00 V	231	6.00	46.60
8	7386.00	40.5 AV	54.0	-13.5	1.00 V	231	-6.10	46.60

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH1, HORIZONTAL)

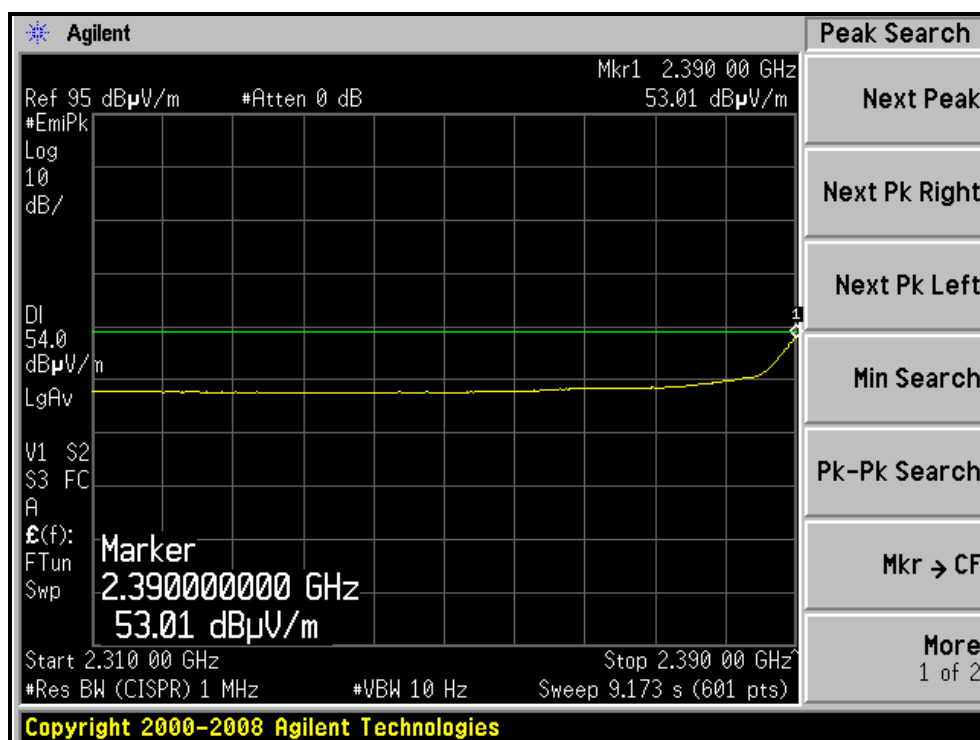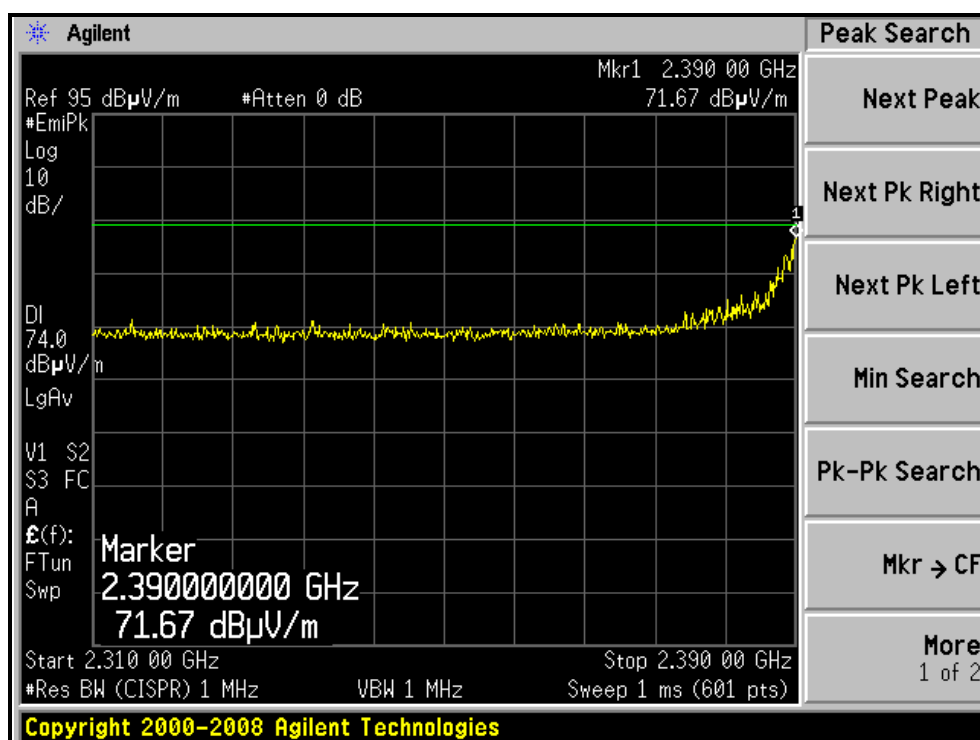



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH1, VERTICAL)

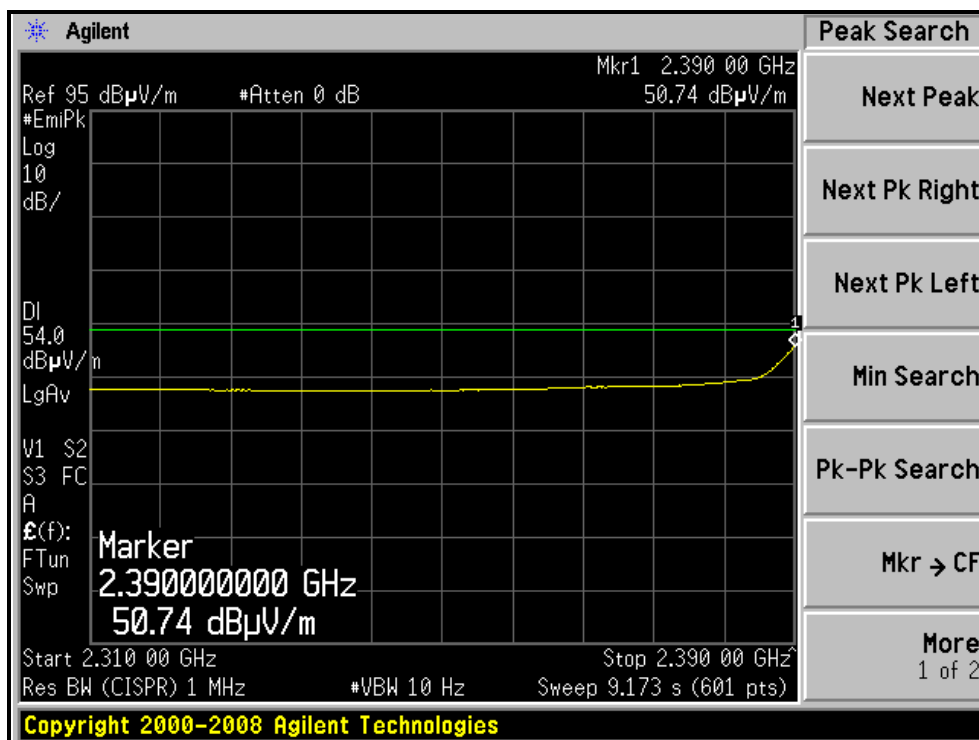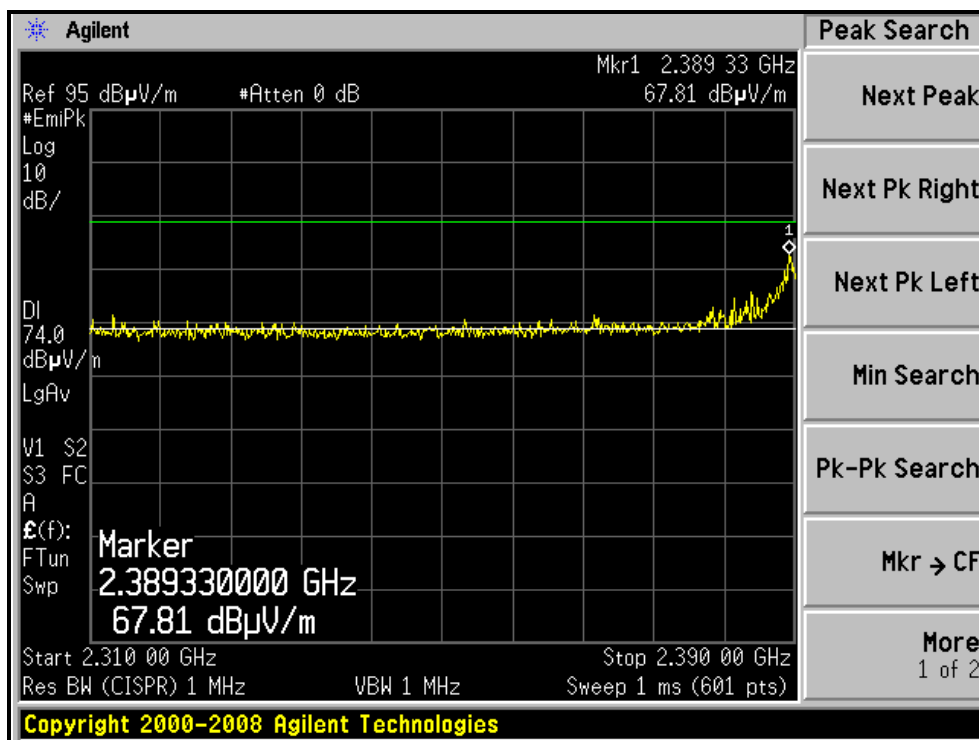

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH11, HORIZONTAL)

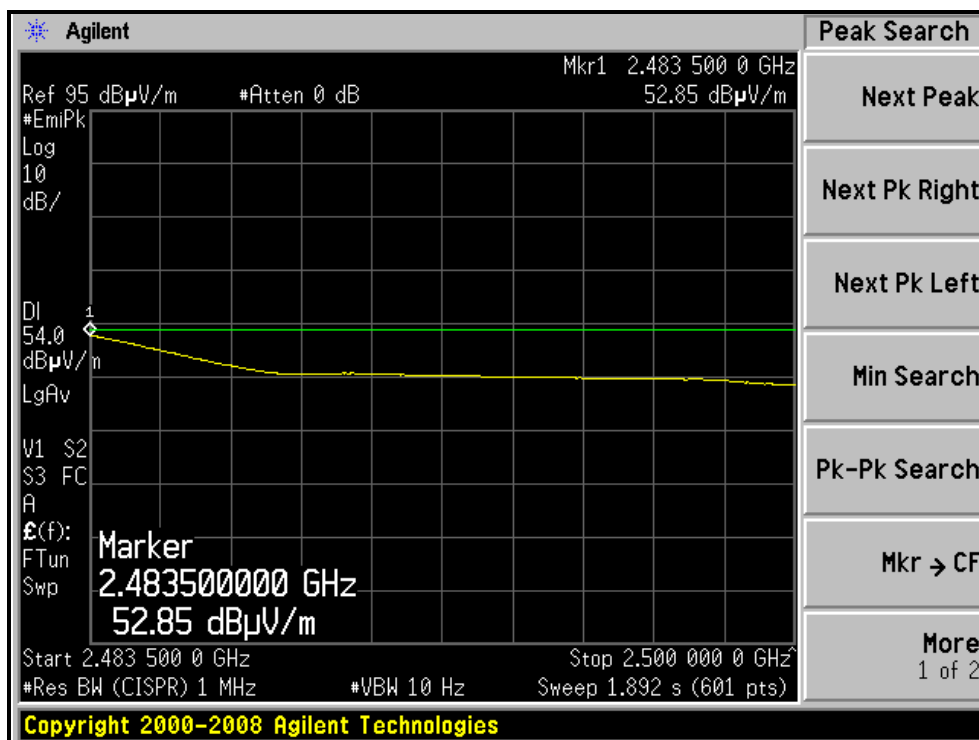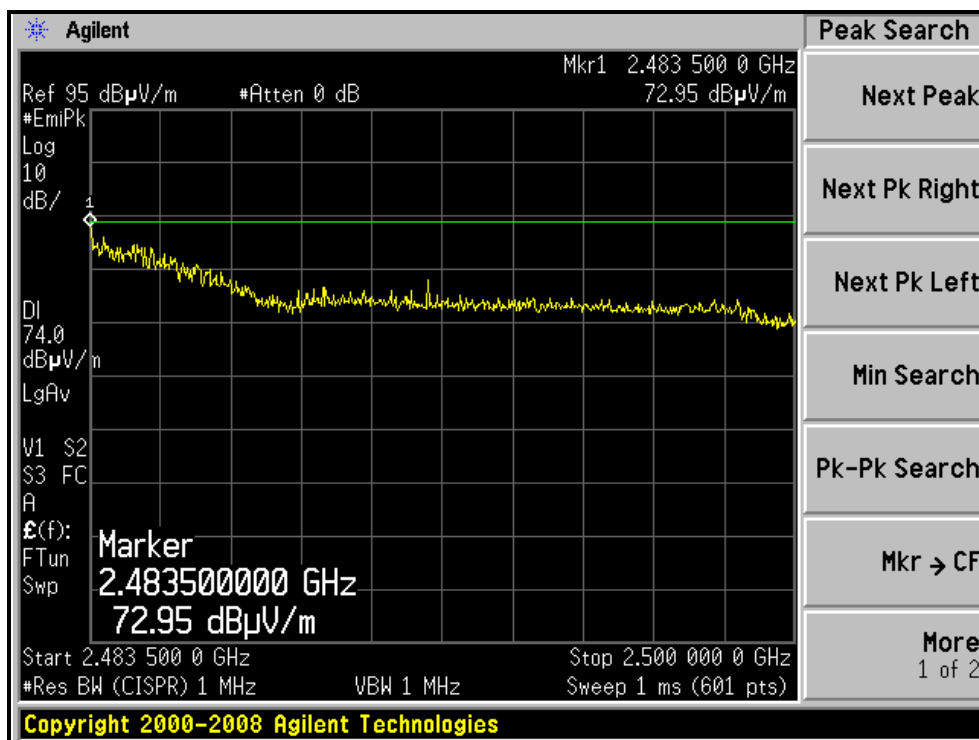

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH11, VERTICAL)

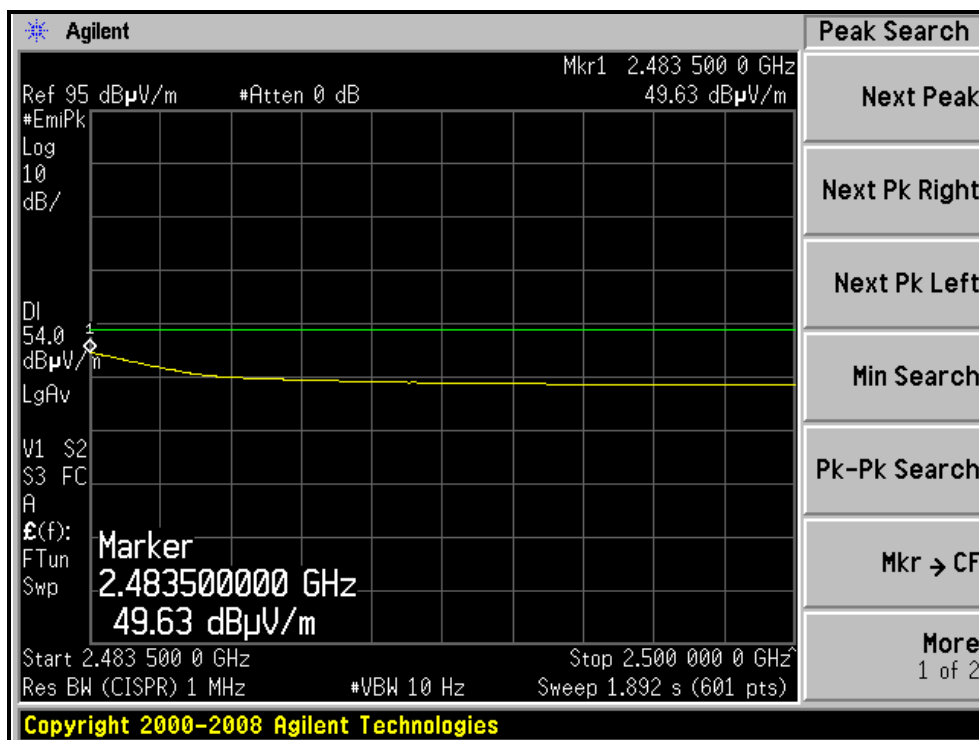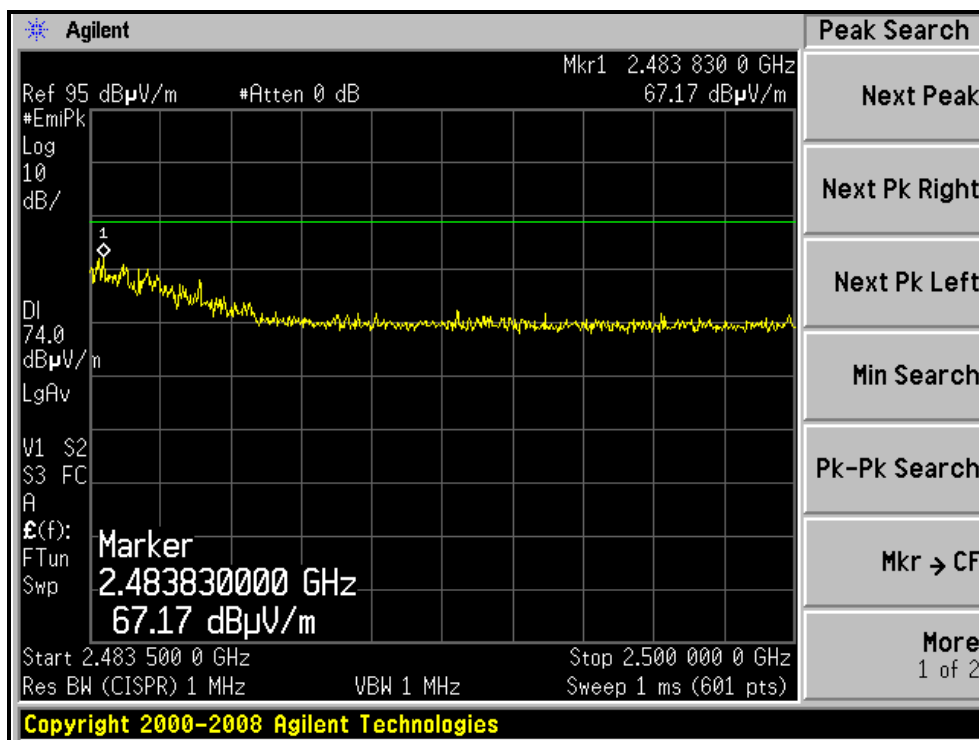

4.2.8 TEST RESULTS (FOR RECEIVER PART)

BELOW 1GHz WORST-CASE DATA :

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	19deg. C, 66%RH 1022 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	87.43	37.6 QP	40.0	-2.4	2.00 H	320	28.04	9.58
2	187.27	36.8 QP	43.5	-6.7	2.00 H	98	24.68	12.13
3	236.53	39.6 QP	46.0	-6.4	1.25 H	268	27.19	12.44
4	261.40	38.8 QP	46.0	-7.2	1.25 H	268	25.44	13.36
5	299.77	44.2 QP	46.0	-1.8	1.25 H	189	29.28	14.92
6	398.29	43.1 QP	46.0	-2.9	1.00 H	211	25.29	17.81
7	497.89	39.0 QP	46.0	-7.0	2.00 H	241	19.06	19.92
8	796.55	41.4 QP	46.0	-4.6	1.25 H	221	16.64	24.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	87.43	29.2 QP	40.0	-10.8	1.00 V	360	19.59	9.58
2	187.27	29.1 QP	43.5	-14.4	2.00 V	199	16.98	12.13
3	237.24	31.1 QP	46.0	-14.9	2.00 V	210	18.66	12.46
4	262.11	31.8 QP	46.0	-14.2	1.75 V	206	18.43	13.39
5	298.82	35.7 QP	46.0	-10.3	1.00 V	279	20.85	14.88
6	399.72	37.0 QP	46.0	-9.0	2.00 V	265	19.19	17.85
7	497.89	34.6 QP	46.0	-11.4	2.00 V	275	14.72	19.92
8	799.39	33.0 QP	46.0	-13.0	1.25 V	253	8.14	24.86

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

ABOVE 1GHz WORST-CASE DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 7.5GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH 1022 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1608.00	40.6 PK	74.0	-33.4	1.00 H	303	12.22	28.38
2	1608.00	29.8 AV	54.0	-24.2	1.00 H	303	1.42	28.38
3	3216.00	45.5 PK	74.0	-28.5	1.20 H	34	11.84	33.66
4	3216.00	35.6 AV	54.0	-18.4	1.20 H	34	1.94	33.66
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1608.00	41.1 PK	74.0	-32.9	1.07 V	54	12.72	28.38
2	1608.00	29.3 AV	54.0	-24.7	1.07 V	54	0.92	28.38
3	3216.00	44.6 PK	74.0	-29.4	1.19 V	301	10.94	33.66
4	3216.00	33.0 AV	54.0	-21.0	1.19 V	301	-0.66	33.66

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 7.5GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH 1022 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1624.70	40.6 PK	74.0	-33.4	1.00 H	301	12.14	28.46
2	1624.70	29.7 AV	54.0	-24.3	1.00 H	301	1.24	28.46
3	3249.40	45.3 PK	74.0	-28.7	1.24 H	40	11.55	33.75
4	3249.40	35.5 AV	54.0	-18.5	1.24 H	40	1.75	33.75
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1624.70	40.9 PK	74.0	-33.1	1.06 V	51	12.44	28.46
2	1624.70	29.1 AV	54.0	-24.9	1.06 V	51	0.64	28.46
3	3249.40	45.5 PK	74.0	-28.5	1.22 V	308	11.75	33.75
4	3249.40	33.7 AV	54.0	-20.3	1.22 V	308	-0.05	33.75

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 7.5GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	22deg. C, 62%RH 1022 hPa	TESTED BY	Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1641.30	40.6 PK	74.0	-33.4	1.00 H	300	12.05	28.55
2	1641.30	29.5 AV	54.0	-24.5	1.00 H	300	0.95	28.55
3	3282.60	45.0 PK	74.0	-29.0	1.21 H	43	11.15	33.85
4	3282.60	35.4 AV	54.0	-18.6	1.21 H	43	1.55	33.85
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1641.30	41.1 PK	74.0	-32.9	1.10 V	57	12.55	28.55
2	1641.30	29.4 AV	54.0	-24.6	1.10 V	57	0.85	28.55
3	3282.60	46.3 PK	74.0	-27.7	1.15 V	311	12.45	33.85
4	3282.60	34.4 AV	54.0	-19.6	1.15 V	311	0.55	33.85

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	9.31	0.5	PASS
6	2437	7.59	0.5	PASS
11	2462	9.14	0.5	PASS


CH1

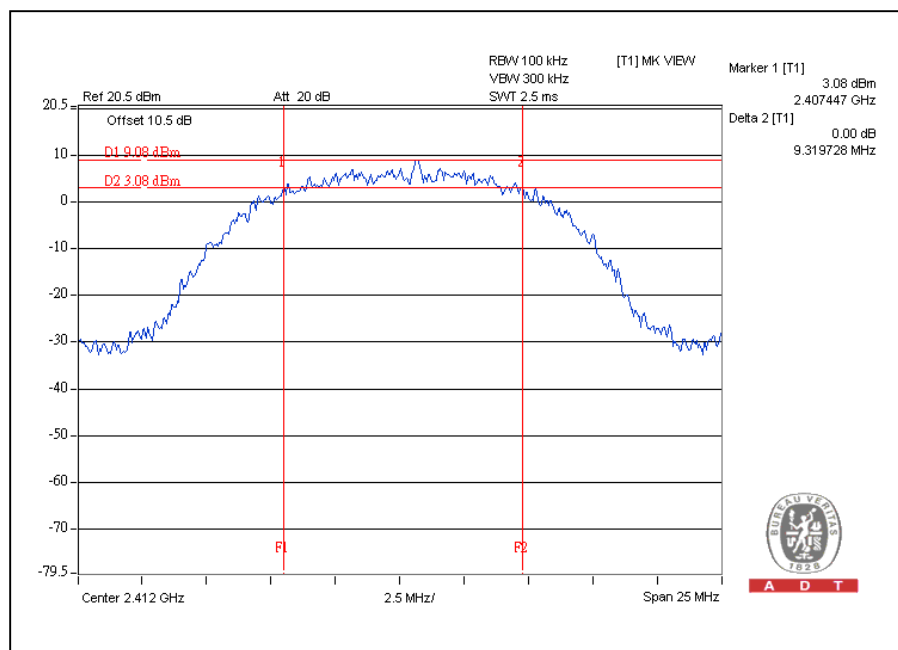




A D T

CH6

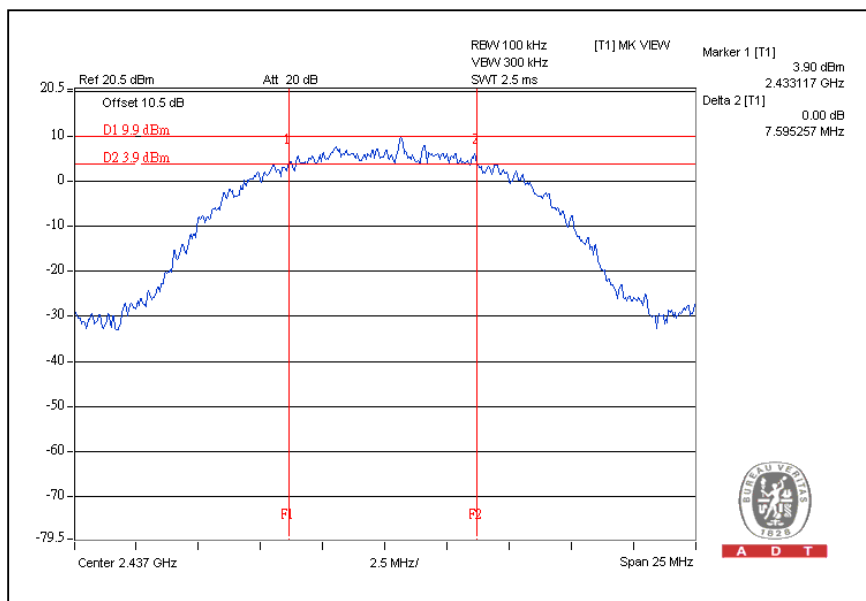


CH11

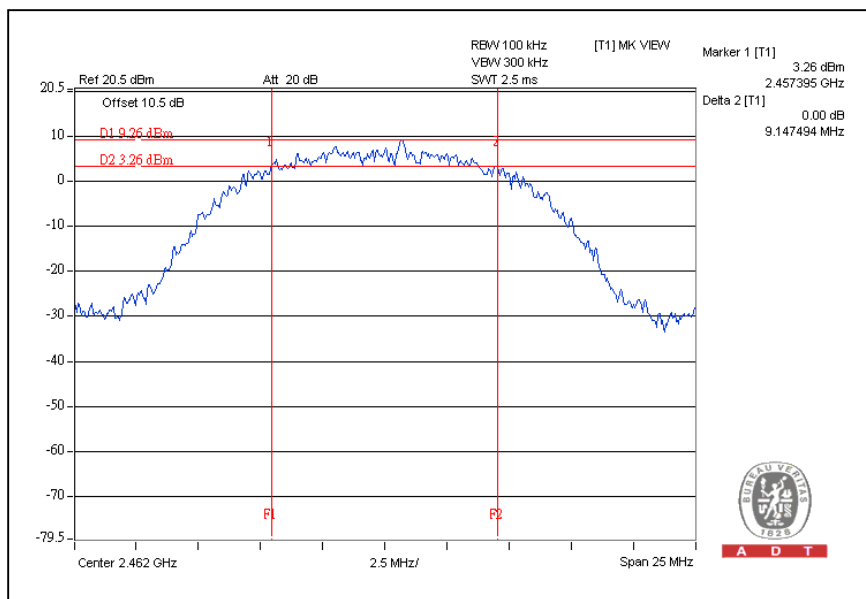


802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.12	0.5	PASS
6	2437	16.10	0.5	PASS
11	2462	16.31	0.5	PASS


CH1

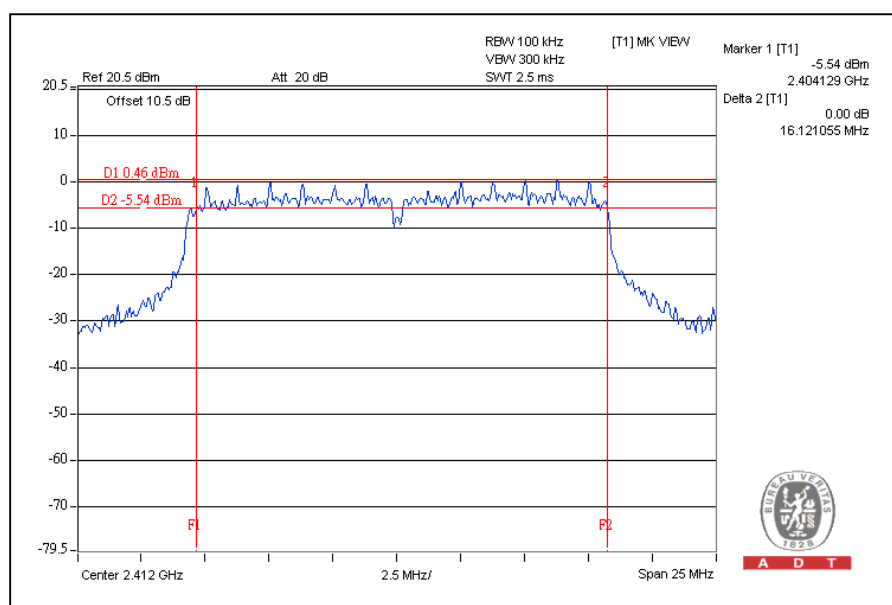

CH6

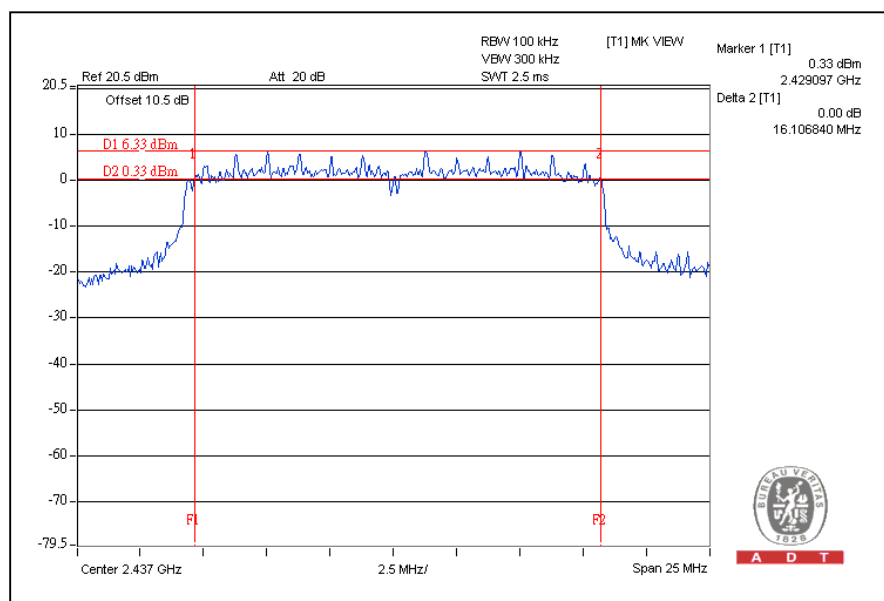


CH11

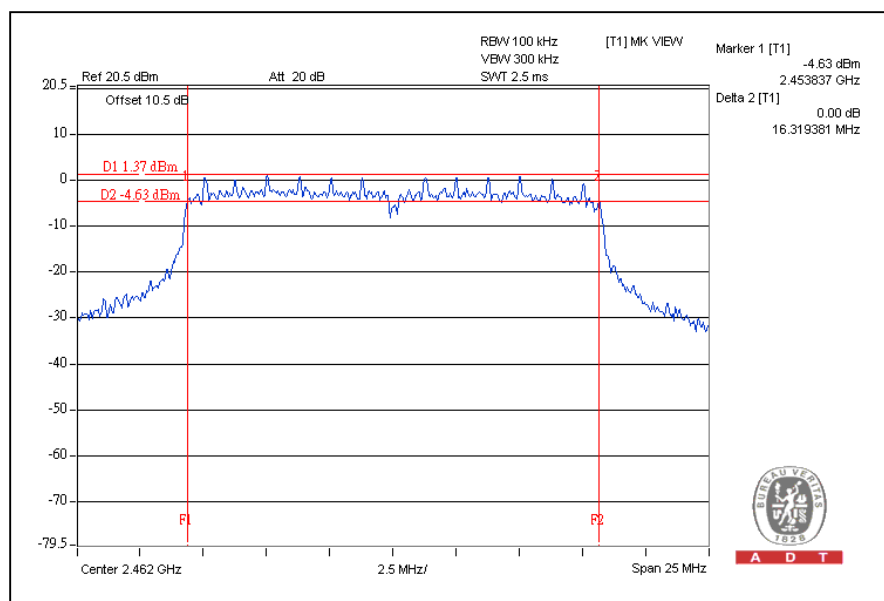

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.02	0.5	PASS
6	2437	16.38	0.5	PASS
11	2462	16.57	0.5	PASS


CH1

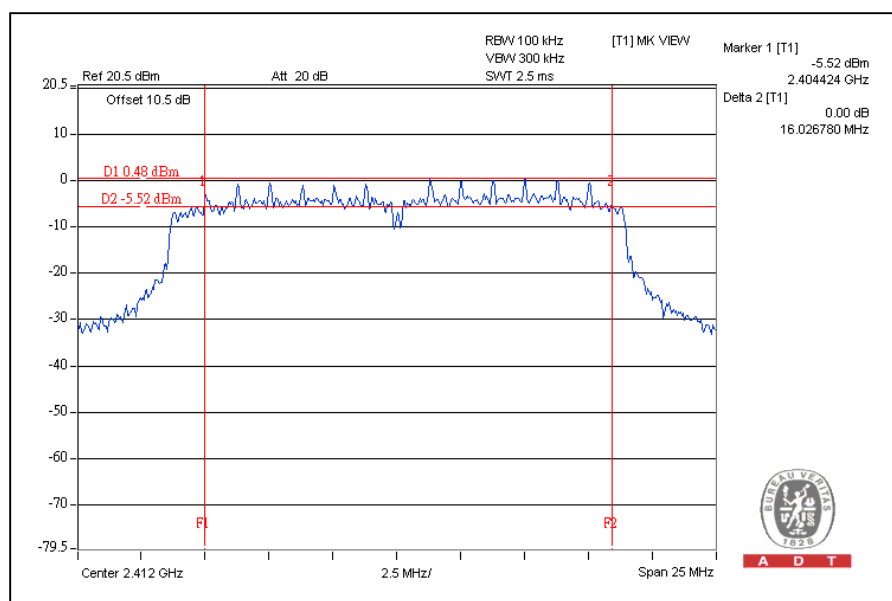




A D T

CH6

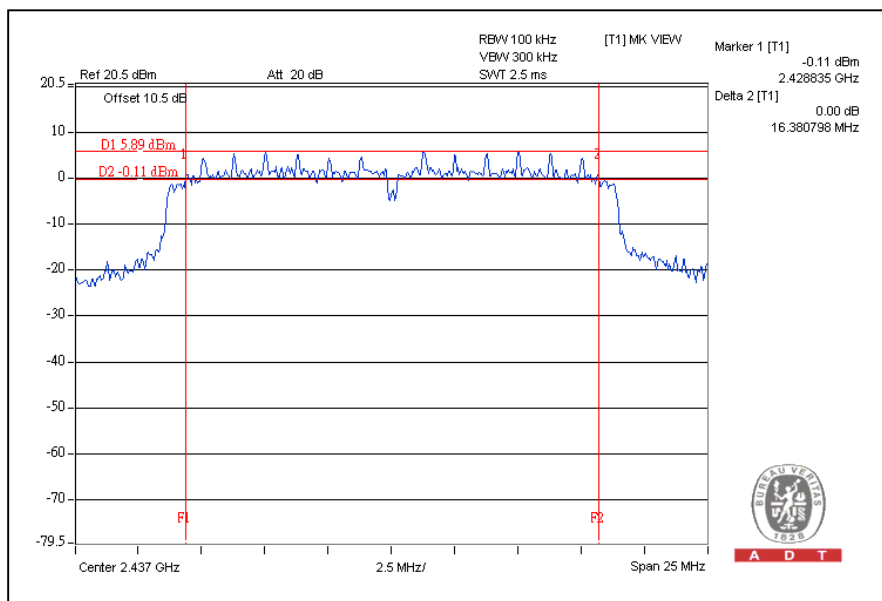

CH11

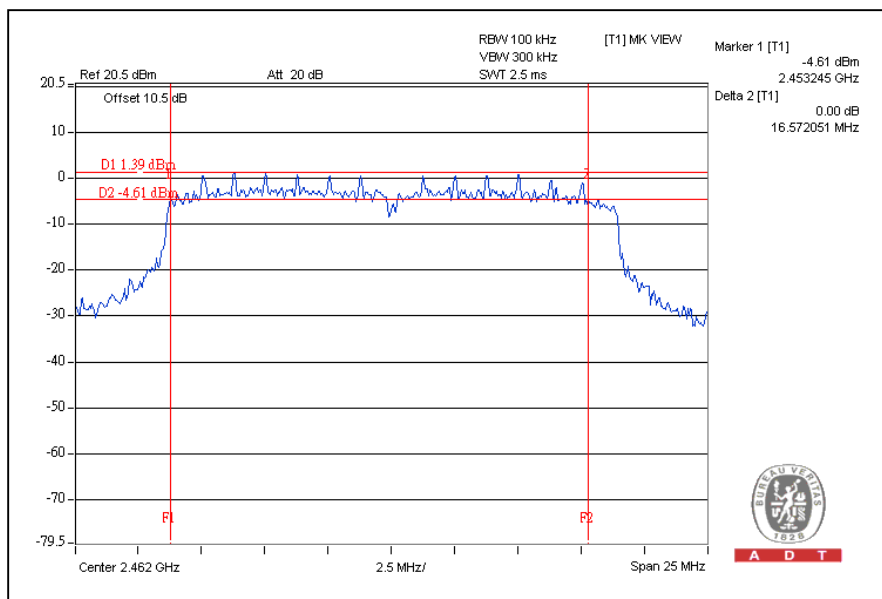

4.4 99% BANDWIDTH MEASUREMENT

4.4.1 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 300kHz RBW and 1MHz VBW.

4.4.3 TEST SETUP



4.4.4 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.5 TEST RESULTS


802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	99% BANDWIDTH (MHz)
1	2412	13.8
6	2437	13.8
11	2462	13.8


CH1

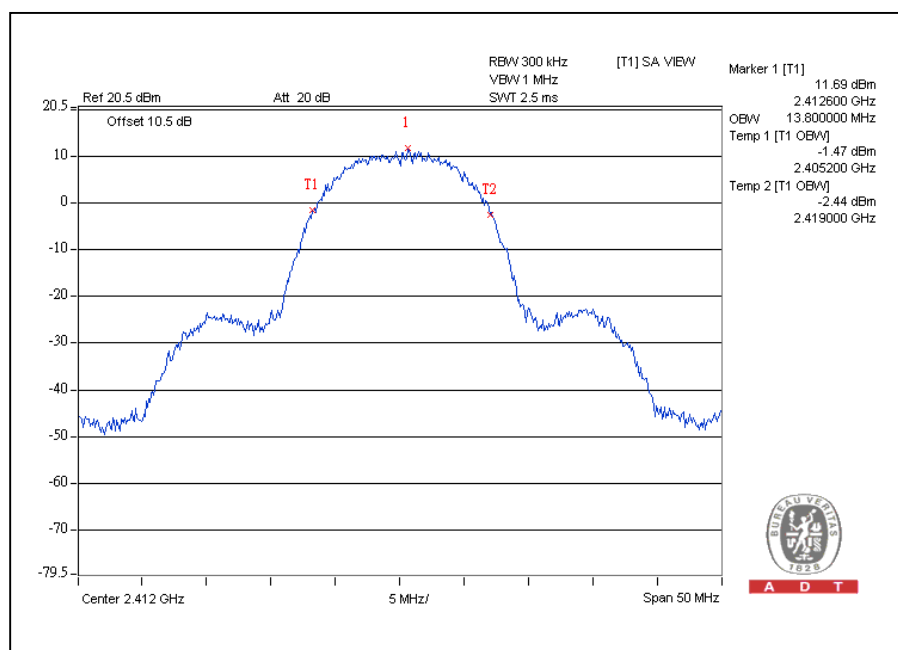

CH6

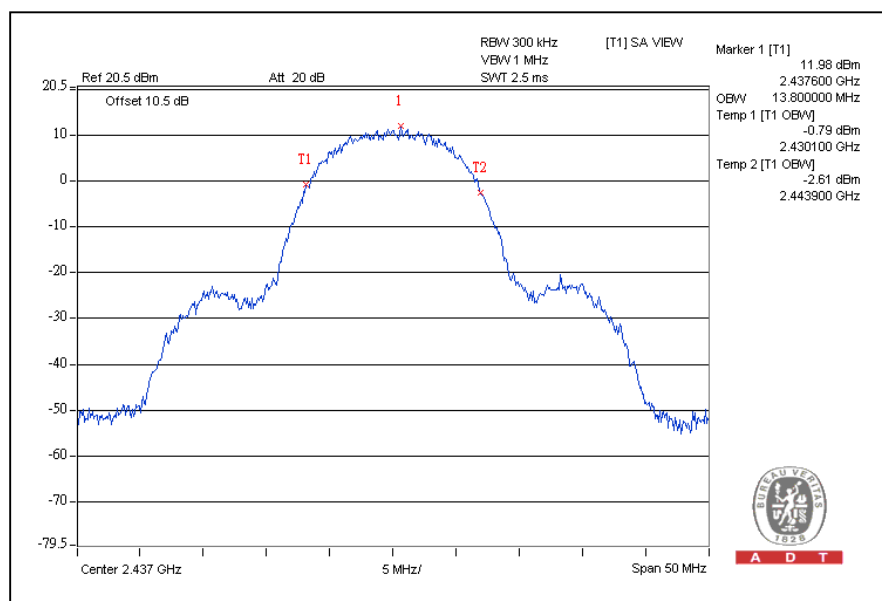


CH11

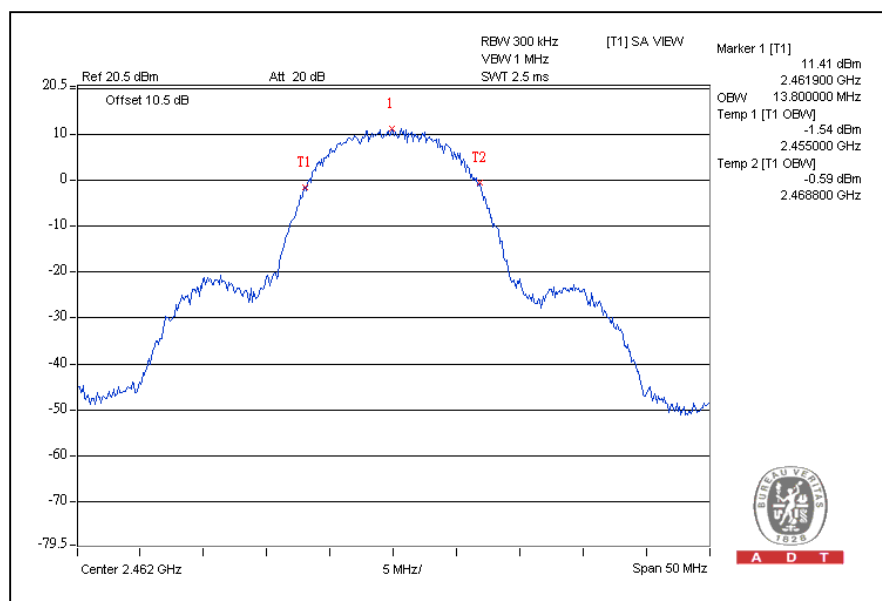


802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	99% BANDWIDTH (MHz)
1	2412	16.8
6	2437	17.5
11	2462	16.8


CH1

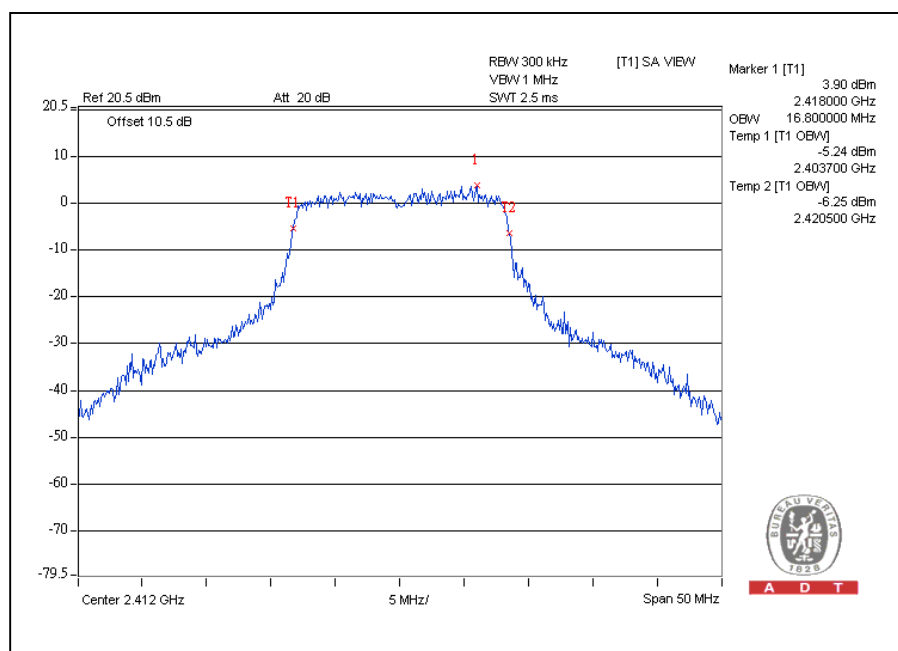

CH6

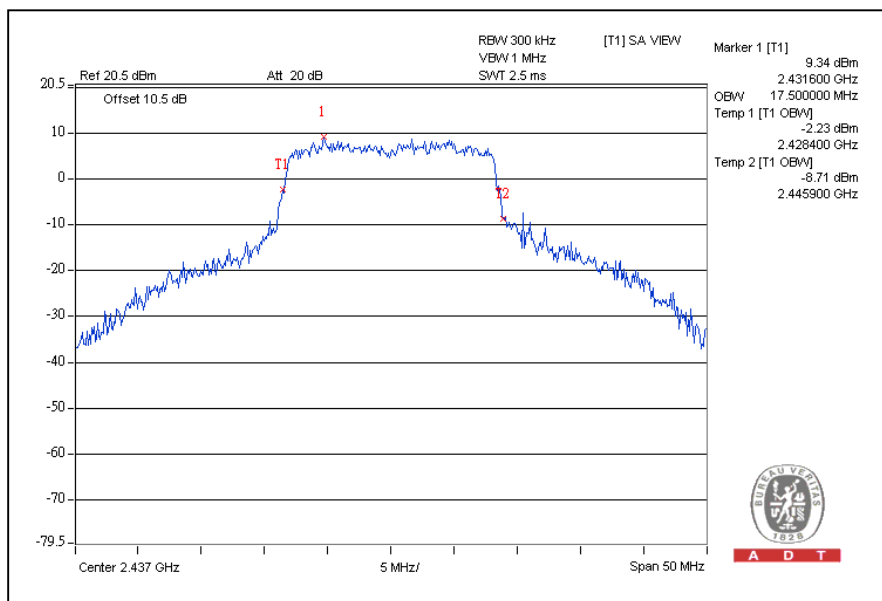


CH11

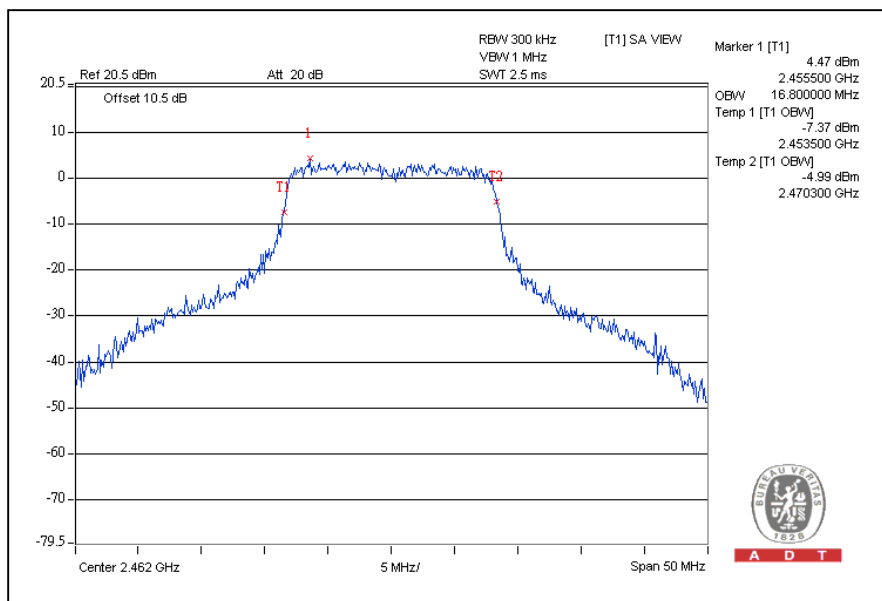


802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	99% BANDWIDTH (MHz)
1	2412	17.9
6	2437	18.2
11	2462	17.9


CH1

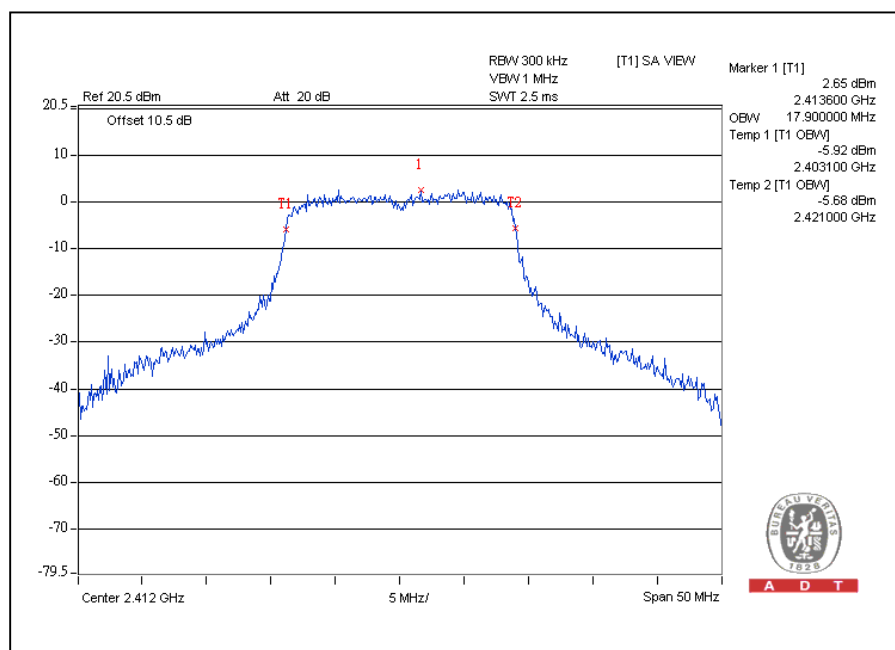

CH6

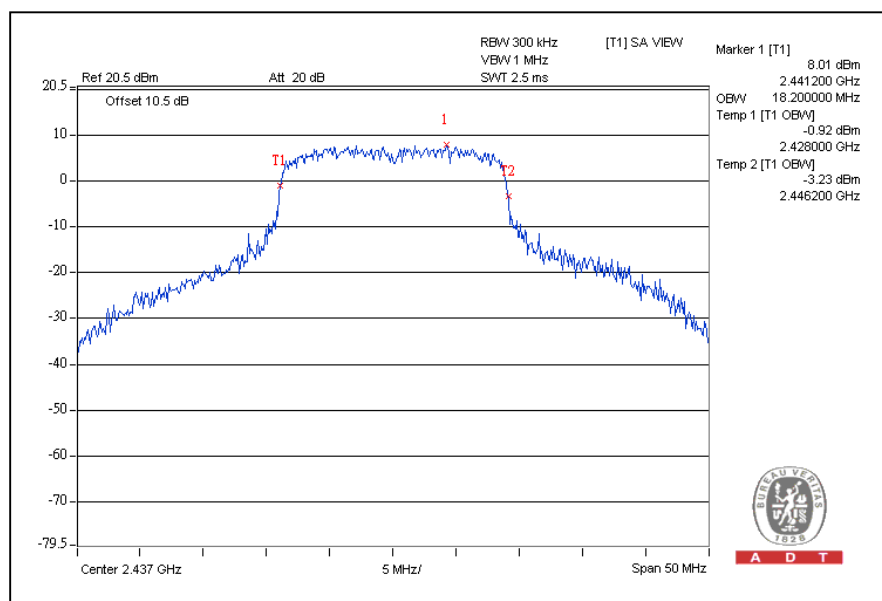

CH11

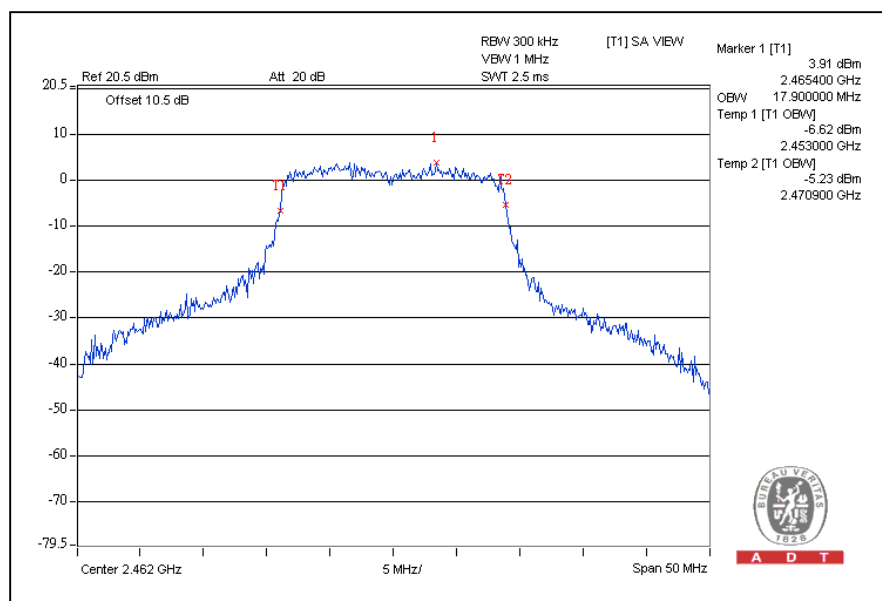



A D T

4.5 MAXIMUM PEAK OUTPUT POWER

4.5.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.5.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Peak Power Meter	ML2495A	0824006	May 04, 2010	May 03, 2011
Power Sensor	MA2411B	0738172	May 04, 2010	May 03, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

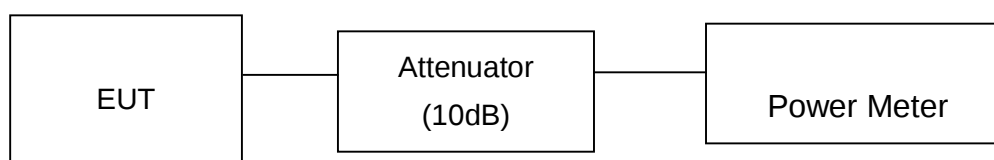

4.5.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.5.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	81.3	19.1	30	PASS
6	2437	83.2	19.2	30	PASS
11	2462	81.3	19.1	30	PASS

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	85.1	19.3	30	PASS
6	2437	177.8	22.5	30	PASS
11	2462	91.2	19.6	30	PASS

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	81.3	19.1	30	PASS
6	2437	162.2	22.1	30	PASS
11	2462	72.4	18.6	30	PASS

4.6 AVERAGE OUTPUT POWER

4.6.1 FOR REFERENCE.

4.6.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Peak Power Meter	ML2495A	0824006	May 04, 2010	May 03, 2011
Power Sensor	MA2411B	0738172	May 04, 2010	May 03, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator, the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the average power level.

4.6.4 TEST SETUP

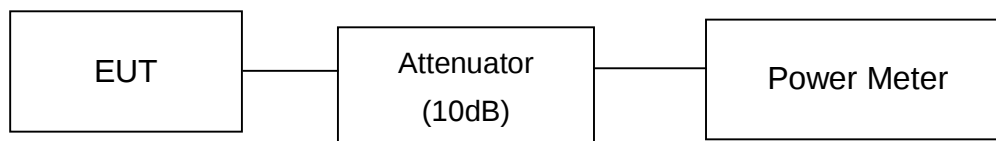

4.6.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

4.6.6 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER OUTPUT (dBm)
1	2412	17.2
6	2437	17.3
11	2462	17.2

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER OUTPUT (dBm)
1	2412	11.9
6	2437	17.1
11	2462	12.5

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER OUTPUT (dBm)
1	2412	10.8
6	2437	16.2
11	2462	11.4

4.7 POWER SPECTRAL DENSITY MEASUREMENT

4.7.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.7.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP



4.7.6 EUT OPERATING CONDITION


Same as Item 4.3.6

4.7.7 TEST RESULTS


802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-6.4	8	PASS
6	2437	-6.4	8	PASS
11	2462	-6.0	8	PASS


CH1

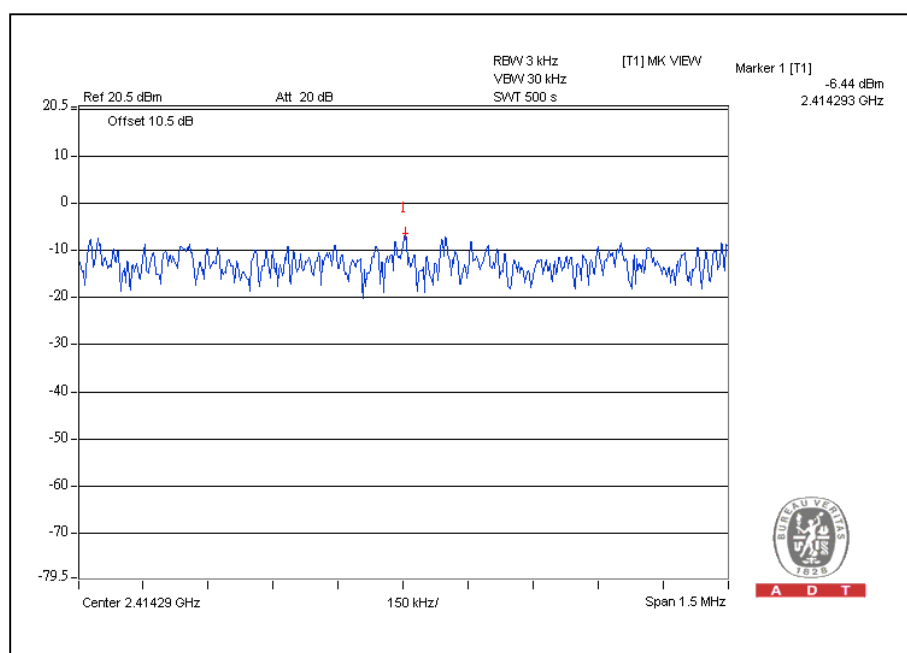

CH6

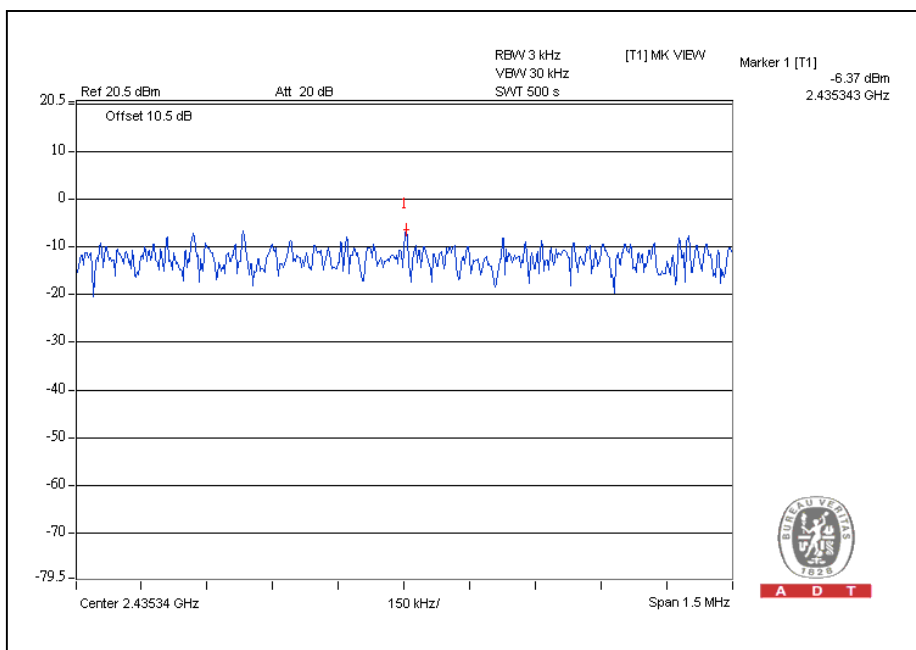


CH11

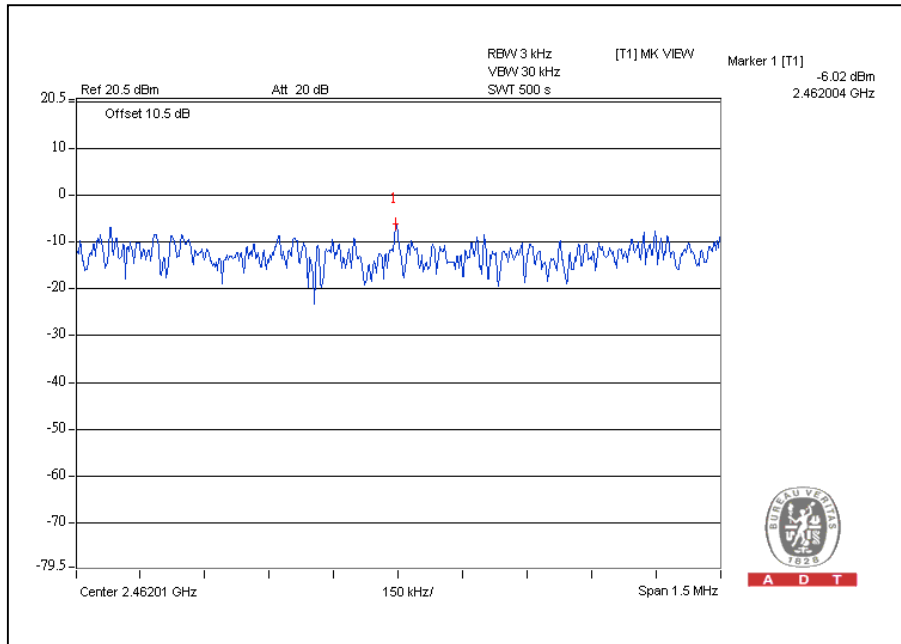


802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-13.9	8	PASS
6	2437	-4.7	8	PASS
11	2462	-8.6	8	PASS


CH1

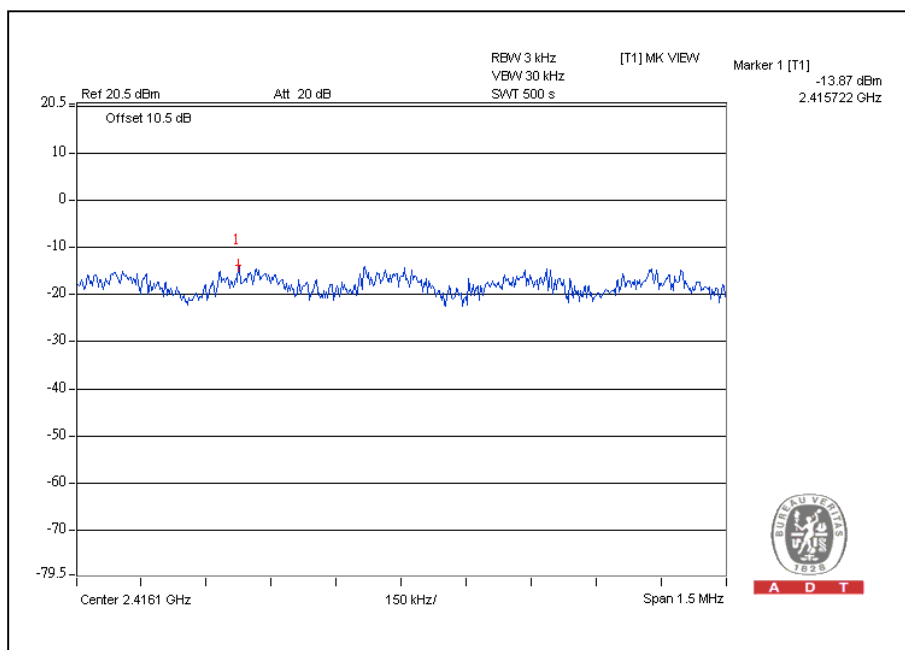

CH6

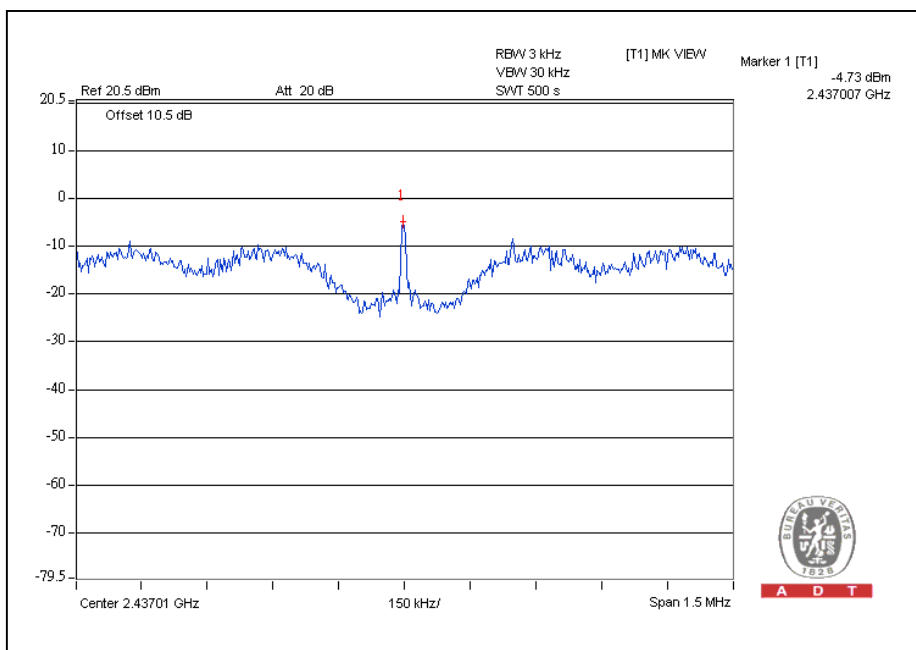


CH11

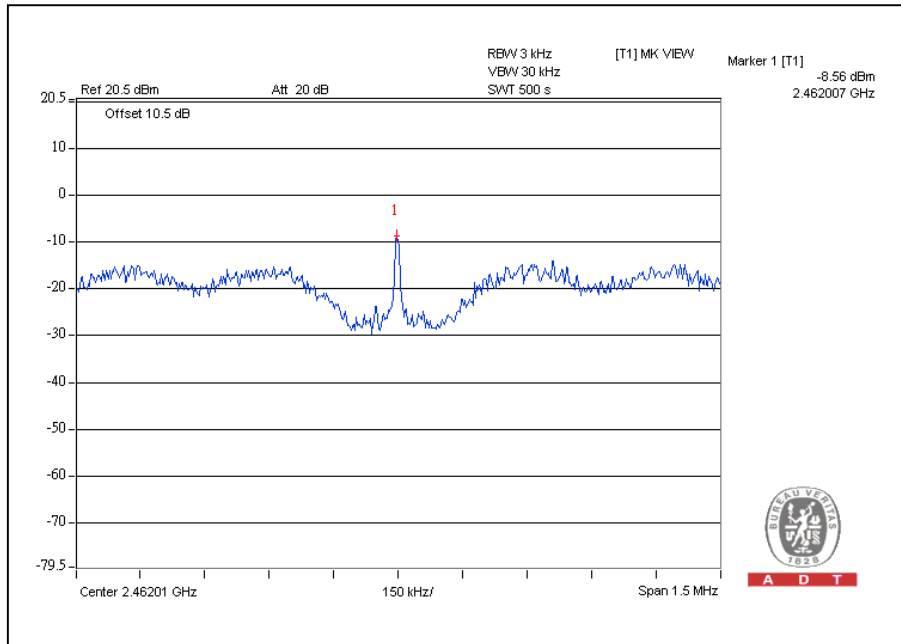


802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-14.2	8	PASS
6	2437	-9.7	8	PASS
11	2462	-8.9	8	PASS


CH1

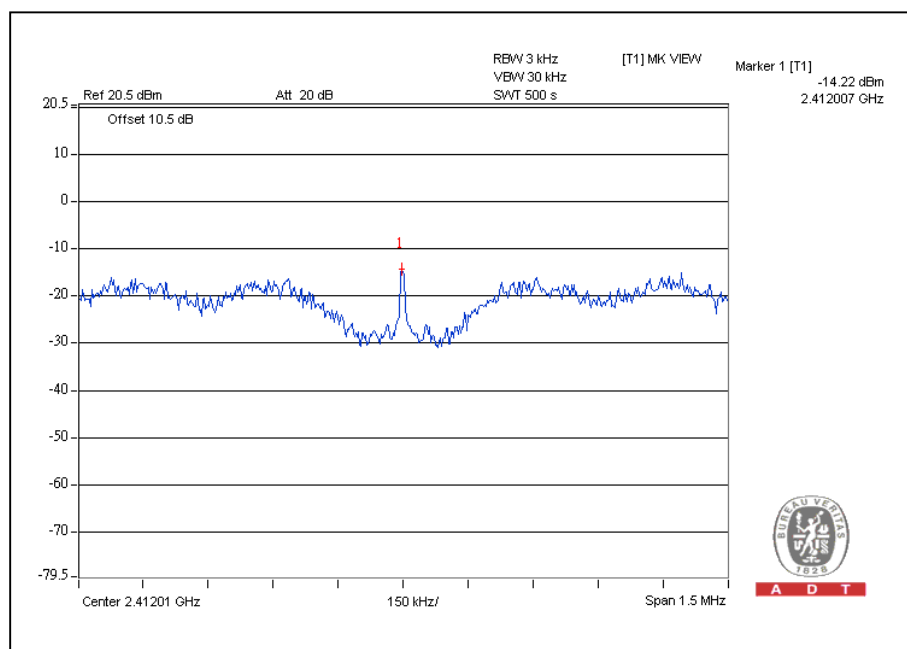

CH6

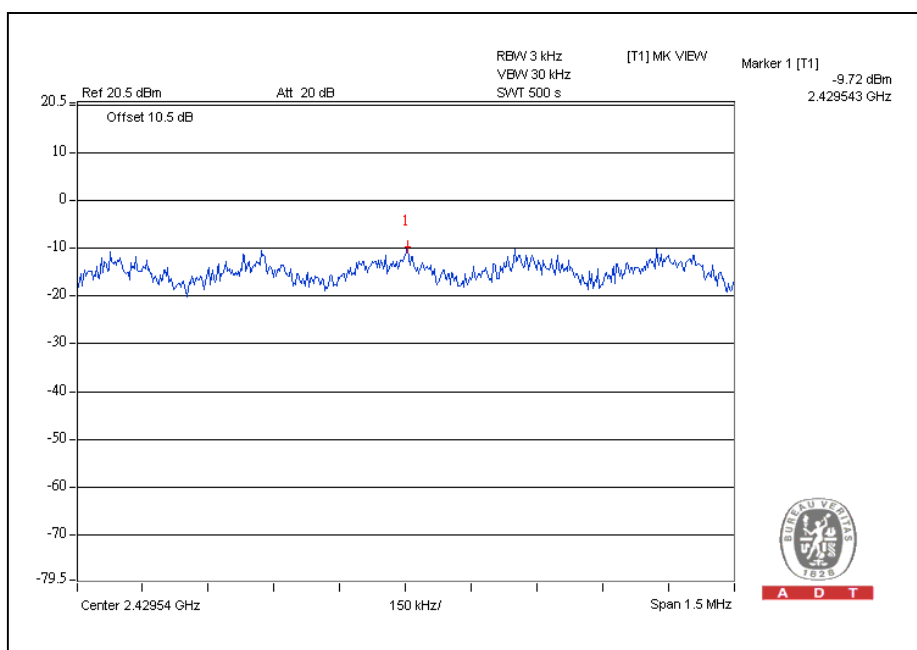

CH11

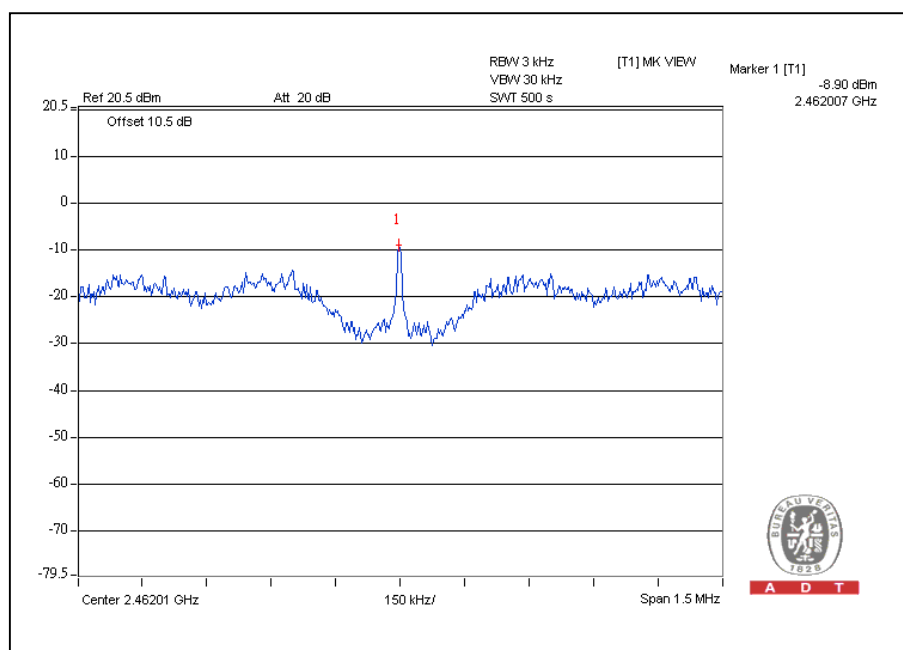

4.8 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.8.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 08, 2010	Dec. 07, 2011

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 100kHz and VBW of spectrum analyzer to 300kHz with suitable frequency span including 100MHz or 200MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (RBW = 100kHz, VBW = 300kHz) are attached on the following pages.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 EUT OPERATING CONDITION


Same as Item 4.3.6

4.8.6 TEST RESULTS


The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION:


CH1

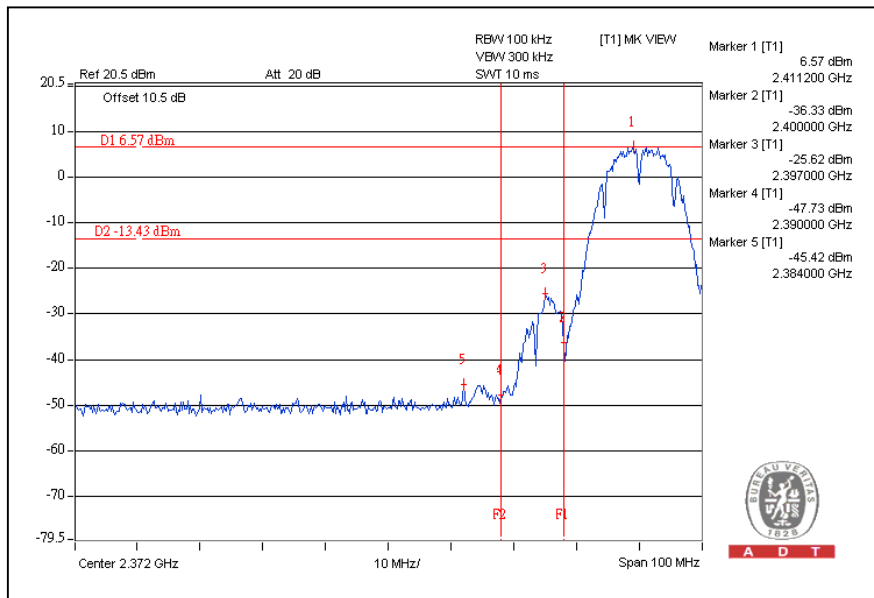


CH11

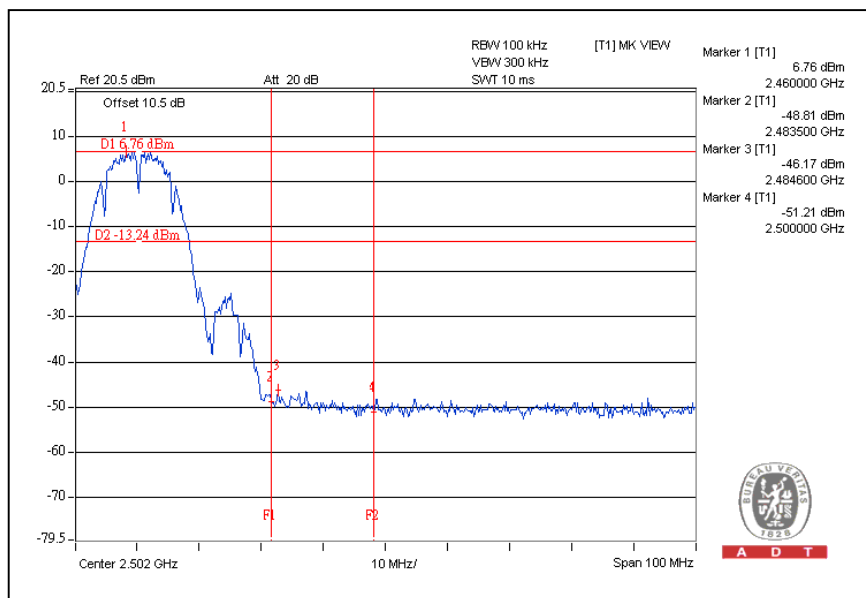

CH1

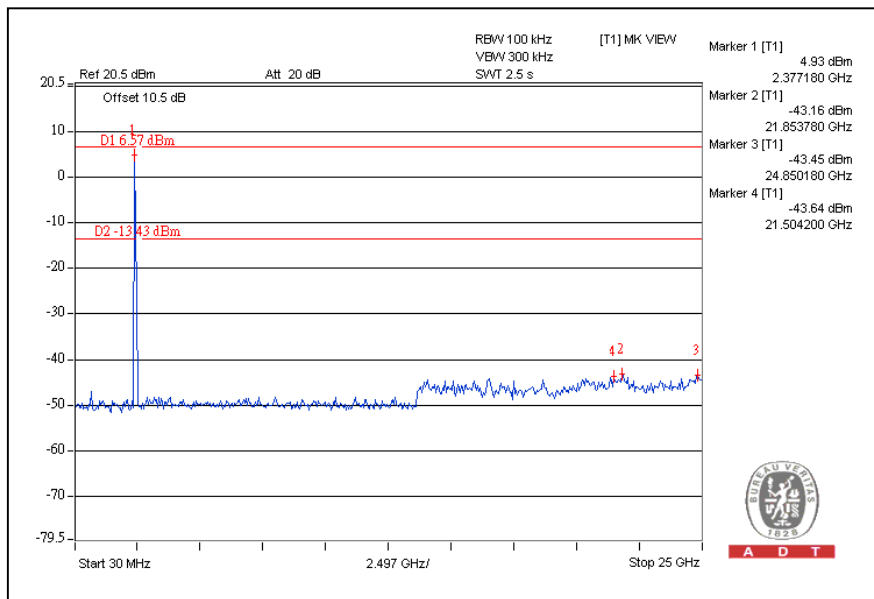


CH11

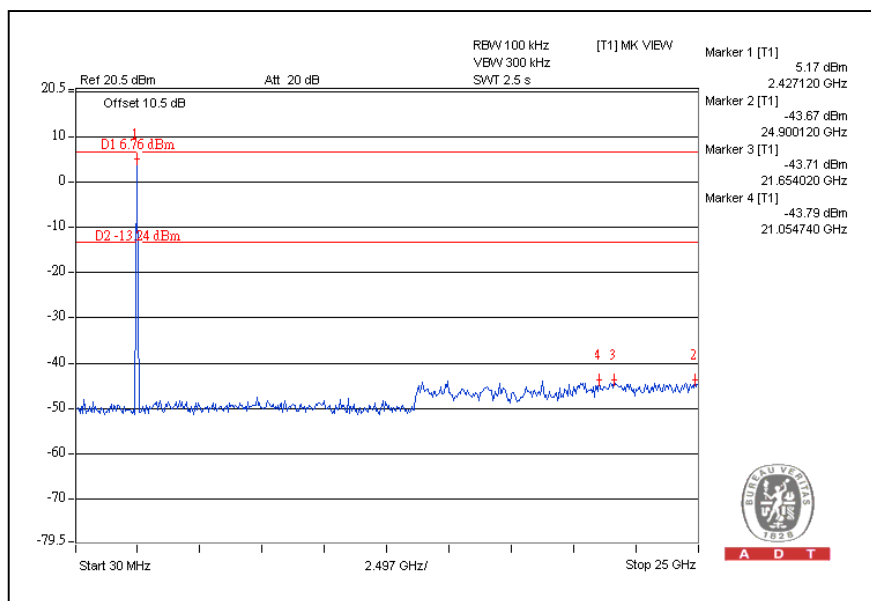


802.11g OFDM MODULATION:

CH1

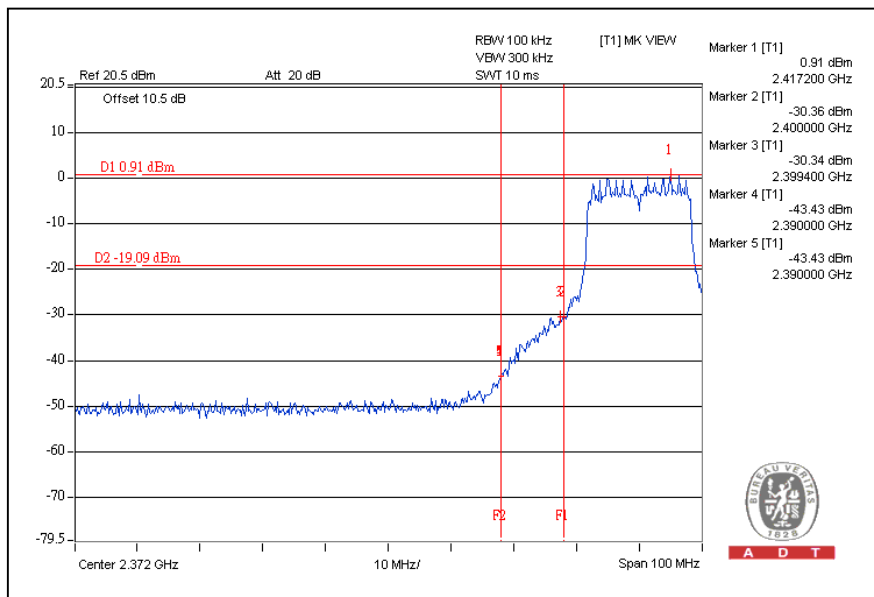


CH11

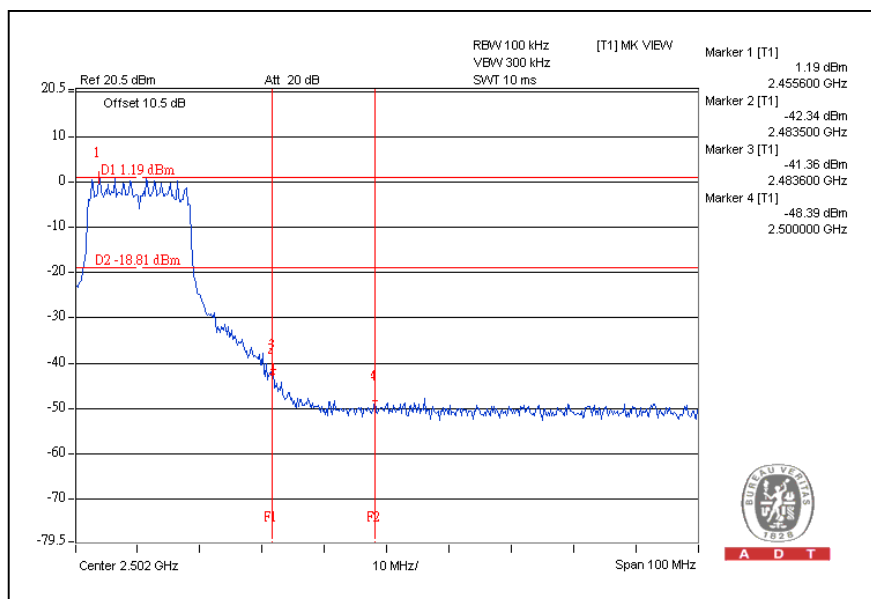




A D T

CH1

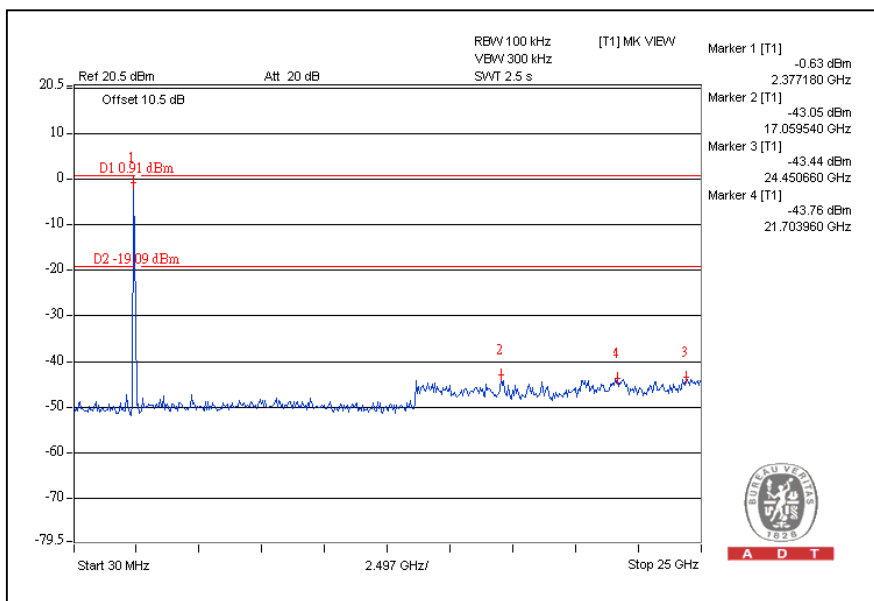


CH11

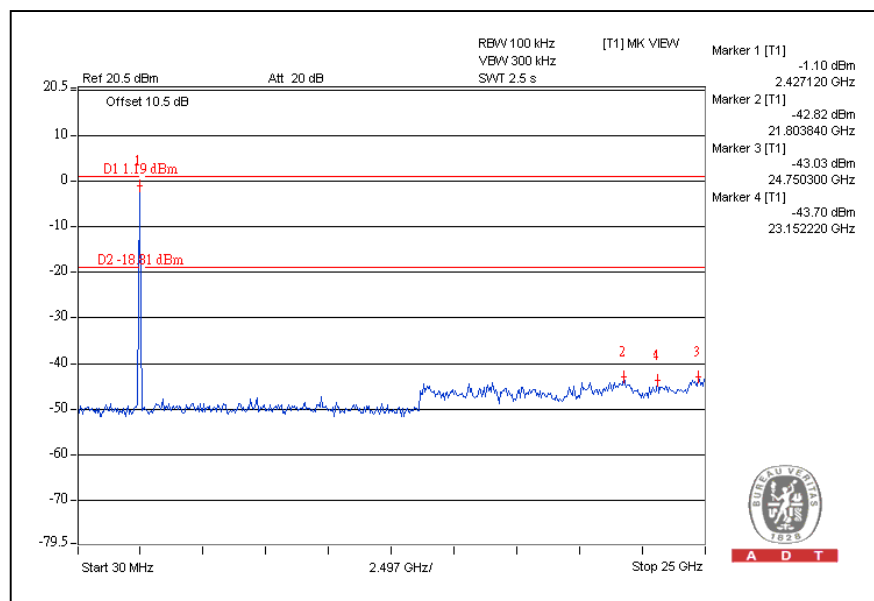


802.11n (20MHz) OFDM MODULATION:


CH1

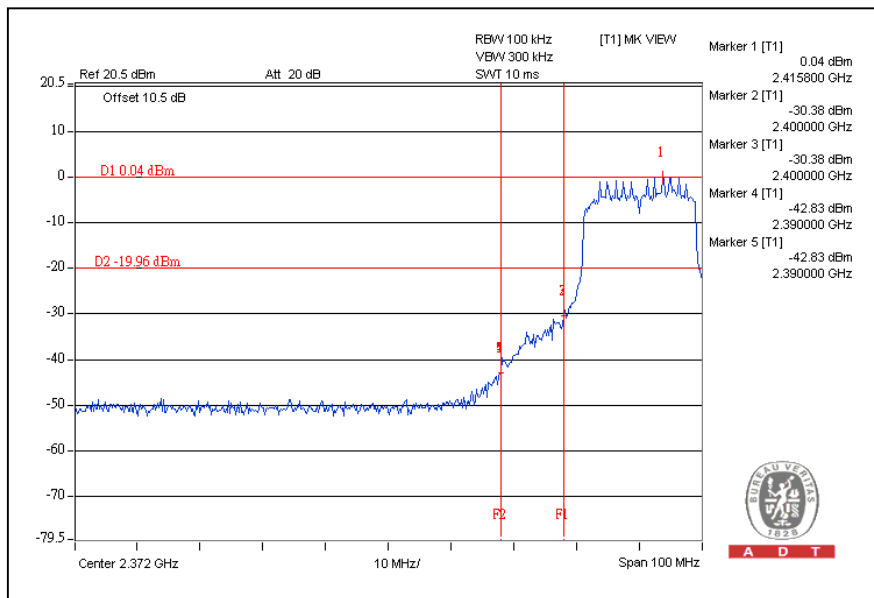


CH11

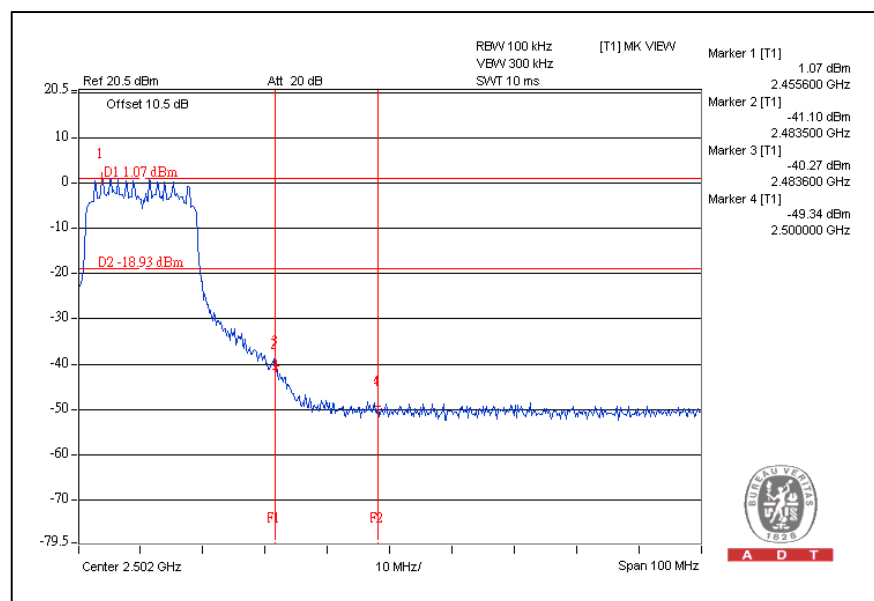

CH1

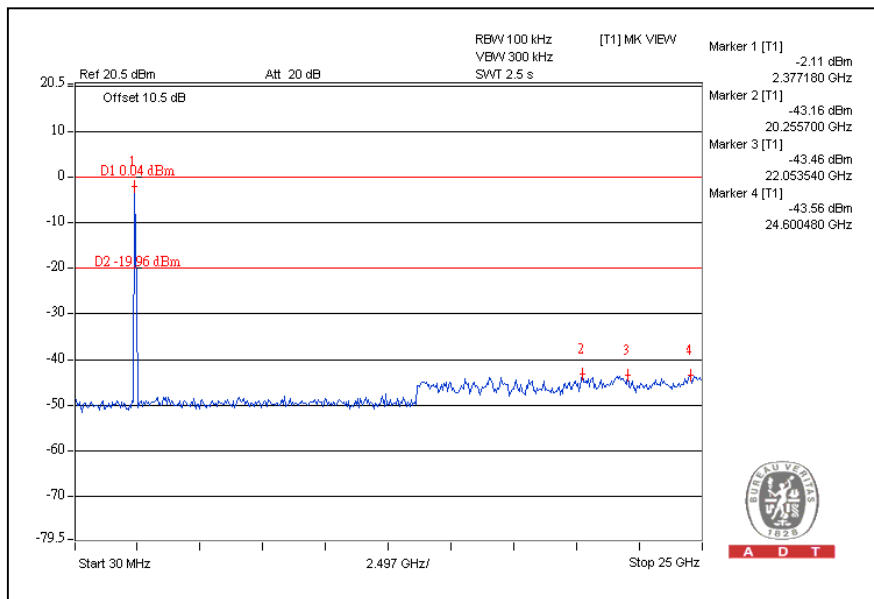

CH11

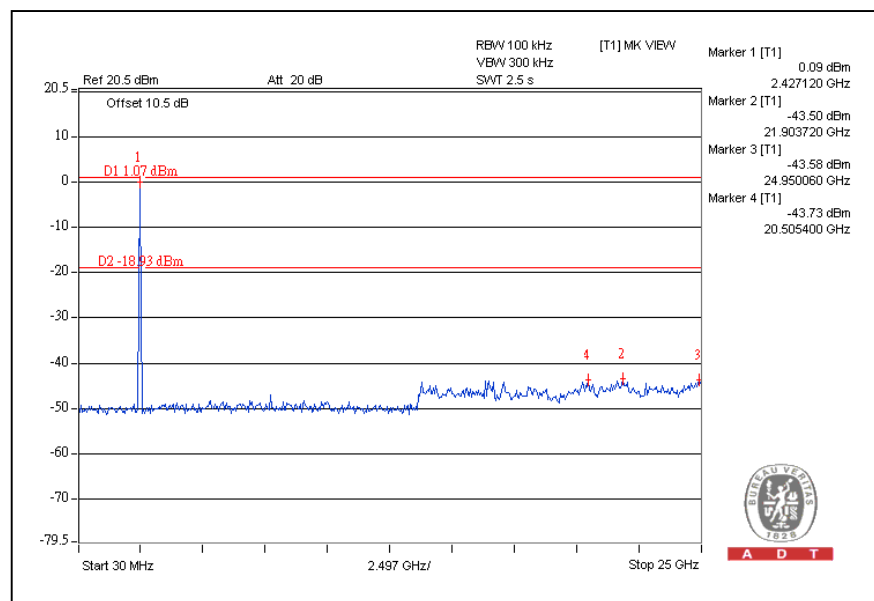

5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5.phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also



A D T

6.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---