



FCC EMI TEST REPORT

FCC ID : PY7-47198F
Equipment : GSM/WCDMA/LTE Phone with BT, DTS/UNII
a/b/g/n/ac, GPS, FM Receiver and NFC
Brand Name : SONY
Applicant : Sony Corporation
1-7-1 Konan Minato-ku Tokyo, 108-0076 Japan
Manufacturer : Sony Corporation
1-7-1 Konan Minato-ku Tokyo, 108-0076 Japan
Standard : FCC 47 CFR FCC Part 15 Subpart B Class B
Test Date(s) : Oct. 26, 2021 ~ Nov. 26, 2021

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

Alex Wang

Approved by: Alex Wang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

| | |
|---------------------------------------------------------------|-----------|
| History of this test report..... | 3 |
| Summary of Test Result..... | 4 |
| 1. General Description | 5 |
| 1.1. Product Feature of Equipment Under Test | 5 |
| 1.2. Modification of EUT | 5 |
| 1.3. Test Location | 6 |
| 1.4. Applicable Standards | 6 |
| 2. Test Configuration of Equipment Under Test | 7 |
| 2.1. Test Mode | 7 |
| 2.2. Connection Diagram of Test System | 8 |
| 2.3. Support Unit used in test configuration and system | 9 |
| 2.4. EUT Operation Test Setup | 10 |
| 3. Test Result | 11 |
| 3.1. Test of AC Conducted Emission Measurement | 11 |
| 3.2. Test of Radiated Emission Measurement | 13 |
| 4. List of Measuring Equipment..... | 15 |
| 5. Uncertainty of Evaluation | 16 |
| Appendix A. AC Conducted Emission Test Result | |
| Appendix B. Radiated Emission Test Result | |



History of this test report

| Report No. | Version | Description | Issued Date |
|------------|---------|-------------------------|---------------|
| FC101907 | 01 | Initial issue of report | Dec. 28, 2021 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items | Result (PASS/FAIL) | Remark |
|---------------|-----------------|-----------------------|--------------------|------------------------------------------|
| 3.1 | 15.107 | AC Conducted Emission | Pass | Under limit 7.39 dB at 0.159 MHz |
| 3.2 | 15.109 | Radiated Emission | Pass | Under limit 4.12 dB at 339.430 MHz |

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1. General Description

1.1. Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, NFC, FM Receiver, and GNSS.

| Product Specification subjective to this standard | |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Antenna Type | WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS/Glonass/Galileo/BDS: PIFA Antenna NFC: LOOP Antenna FM: External Antenna |

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

| EUT Information List | | | |
|----------------------|------------|------------|-----------------------------------------|
| HW Version | SW Version | S/N | Performed Test Item |
| A | 0.150 | HQ618X0490 | Conducted Emission Radiated Emission |

| Accessory List | |
|----------------|-------------------------|
| AC Adapter | Model Name : XQZ-UC1 |
| Earphone 1 | Model Name : MDR-EX15AP |
| Earphone 2 | Model Name : SBH82D |
| USB Cable 1 | Model Name : XQZ-UB1 |
| USB Cable 2 | Model Name : A8485011 |

Note:

- Above EUT list used are electrically identical per declared by manufacturer.
- For other wireless features of this EUT, test report will be issued separately.

1.2. Modification of EUT

No modifications are made to the EUT during all test items.

1.3. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

| | | | |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-------------------------------------------|
| Test Firm | Sporton International (Kunshan) Inc. | | |
| Test Site Location | No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958 | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. |
| | CO01-KS 03CH02-KS | CN1257 | 314309 |

1.4. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B Class B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

| Test Items | Function Type |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AC Conducted Emission | Mode 1: GSM850 (Middle Channel) Idle + Bluetooth Idle With Bluetooth Earphone 2 + WLAN (2.4GHz) Idle + Camera (Rear) + Earphone 1 + USB Cable 1(Charging from Adapter) |
| | Mode 2: WCDMA Band V (Lowest Channel) Idle + Bluetooth Idle With Bluetooth Earphone 2 + WLAN (5GHz) Idle + Camera (Front) + Earphone 1 + USB Cable 2(Charging from Adapter) |
| | Mode 3: GSM1900 Idle + Bluetooth Idle With Bluetooth Earphone 2 + WLAN (2.4GHz) Idle + MPEG 4 + Earphone 1 + USB Cable 2(Charging from Adapter) |
| | Mode 4: LTE Band 12 (Highest Channel) Idle + Bluetooth Idle With Bluetooth Earphone 2 + WLAN (5GHz) Idle + NFC On + Earphone 1 + USB Cable 2(Charging from Adapter) |
| | Mode 5: LTE Band 41 Idle + Bluetooth Idle With Bluetooth Earphone 2 + WLAN (2.4GHz) Idle + FM(98MHz)Rx + Earphone 1 + USB Cable 2(Data Link with Notebook) |
| | Mode 6: WCDMA Band V (Lowest Channel) Idle + Bluetooth Idle With Bluetooth Earphone 2 + WLAN (5GHz) Idle + GNSS Rx + Earphone 1 + USB Cable 2(Data Link with Notebook) |
| Radiated Emissions | Mode 1: GSM850 (Middle Channel) Idle + Bluetooth Idle With Bluetooth Earphone 2 + WLAN (2.4GHz) Idle + Camera (Rear) + Earphone 1 + USB Cable 1(Charging from Adapter) |
| | Mode 2: WCDMA Band V (Lowest Channel) Idle + Bluetooth Idle With Bluetooth Earphone 2 + WLAN (5GHz) Idle + Camera (Front) + Earphone 1 + USB Cable 2(Charging from Adapter) |
| | Mode 3: GSM1900 Idle + Bluetooth Idle With Bluetooth Earphone 2 + WLAN (2.4GHz) Idle + MPEG 4 + Earphone 1 + USB Cable 1(Charging from Adapter) |
| | Mode 4: LTE Band 12 (Highest Channel) Idle + Bluetooth Idle With Bluetooth Earphone 2 + WLAN (5GHz) Idle + NFC On + Earphone 1 + USB Cable 1(Charging from Adapter) |
| | Mode 5: LTE Band 41 Idle + Bluetooth Idle With Bluetooth Earphone 2 + WLAN (2.4GHz) Idle + FM(88MHz)Rx + Earphone 1 + USB Cable 1(Data Link with Notebook) |
| | Mode 6: GSM900 Idle + Bluetooth Idle With Bluetooth Earphone 2 + WLAN (5GHz) Idle + GNSS Rx + Earphone 1 + USB Cable 1(Data Link with Notebook) |
| Remark: <ol style="list-style-type: none"> For radiation emission after pre-scanned the L/M/H channel cellular band between 30MHz ~ 960MHz (GSM850/WCDMA Band V/LTE Band 12/FM); only the worst case for cellular band test data of this mode was reported. Data Link with Notebook means data application transferred mode between EUT and Notebook. For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report. | |

2.2. Connection Diagram of Test System

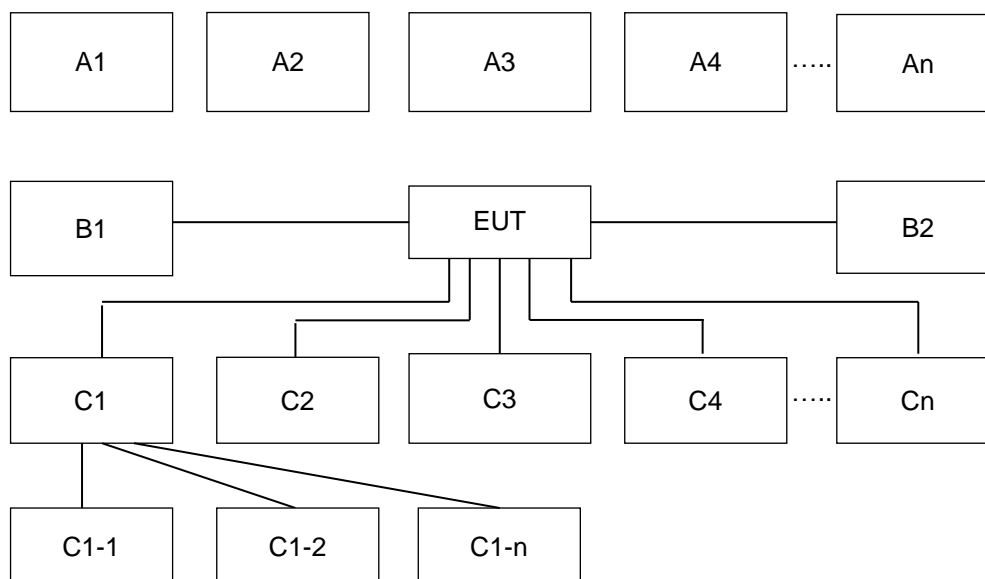

| Conduction Test Setup | | | | | | | | | |
|-----------------------|---------------------|--------------------------------|-----------|---|---|---|---|---|--|
| No. | Wireless Station | Connection Type | Test Mode | | | | | | |
| | | | 1 | 2 | 3 | 4 | 5 | 6 | |
| A1 | System Simulator | GSM/WCDMA/LTE/FM | X | X | X | X | X | X | |
| A2 | BT Earphone | Bluetooth | X | X | X | X | X | X | |
| A3 | GPS/Glonass Station | GNSS | - | - | - | - | - | X | |
| A4 | AP router | WiFi | X | X | X | X | - | - | |
| A5 | Notebook | WiFi | X | X | X | X | - | - | |
| No. | Power Source | Connection Type | 1 | 2 | 3 | 4 | 5 | 6 | |
| B1 | AC : 120V/60Hz | AC Power Cable | X | X | X | X | - | - | |
| No. | Setup Peripherals | Connection Type | 1 | 2 | 3 | 4 | 5 | 6 | |
| C1 | Notebook | USB link | - | - | - | - | X | X | |
| C1-1 | Hard Disk | USB Cable to C1 | - | - | - | - | X | X | |
| C1-2 | AP router | RJ 45 Cable to C1 | - | - | - | - | X | X | |
| C2 | SD Card | SD I/O interface without cable | X | X | X | X | X | X | |
| C3 | Earphone | Earphone jack | X | X | X | X | X | X | |

| Radiated Test Setup | | | | | | | | | |
|---------------------|---------------------|--------------------------------|-----------|---|---|---|---|---|--|
| No. | Wireless Station | Connection Type | Test Mode | | | | | | |
| | | | 1 | 2 | 3 | 4 | 5 | 6 | |
| A1 | System Simulator | GSM/WCDMA/LTE/FM | X | X | X | X | X | X | |
| A2 | BT Earphone | Bluetooth | X | X | X | X | X | X | |
| A3 | GPS/Glonass Station | GNSS | - | - | - | - | - | X | |
| A4 | AP router | WiFi | X | X | X | X | - | - | |
| A5 | Notebook | WiFi | X | X | X | X | - | - | |
| No. | Power Source | Connection Type | 1 | 2 | 3 | 4 | 5 | 6 | |
| B1 | AC : 120V/60Hz | AC Power Cable | X | X | X | X | - | - | |
| No. | Setup Peripherals | Connection Type | 1 | 2 | 3 | 4 | 5 | 6 | |
| C1 | Notebook | USB link | - | - | - | - | X | X | |
| C1-1 | Hard Disk | USB Cable to C1 | - | - | - | - | X | X | |
| C1-2 | AP router | RJ 45 Cable to C1 | - | - | - | - | X | X | |
| C2 | SD Card | SD I/O interface without cable | X | X | X | X | X | X | |
| C3 | Earphone | Earphone jack | X | X | X | X | X | X | |

2.3. Support Unit used in test configuration and system

| Item | Equipment | Brand Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|-------------------------|------------|------------|---------------|----------------|------------------------------------------------------------|
| 1. | LTE Base Station | Anritus | MT8821C | N/A | N/A | Unshielded,1.8m |
| 2. | System Simulator | R&S | CMU 200 | N/A | N/A | Unshielded, 1.8 m |
| 3. | Vector Signal Generator | R&S | SMBV100A | 258305 | N/A | N/A |
| 4. | WLAN AP | D-link | DIR-655 | KA21R655B1 | N/A | Unshielded,1.8m |
| 5. | WLAN AP | TP-Link | TL-WDR5600 | N/A | N/A | Unshielded,1.8m |
| 6. | Notebook | Lenovo | G480 | QDS-BRCM1050I | N/A | AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m |
| 7. | Notebook | Lenovo | S730-13IWL | N/A | N/A | AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m |
| 8. | SD Card | Kingston | 8GB | N/A | N/A | N/A |
| 9. | Hard Disk | Lenovo | F310 | DoC | Shielded, 1.2m | N/A |
| 10. | Hard disk | KINGSHARE | KSP6120G | Fcc DoC | Shielded, 1.2m | N/A |

2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the test. The EUT was synchronized with the BCCH, and had been continuous receiving mode by setting paging reorganization of the system simulator.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test:

1. Data application is transferred between Laptop and EUT via USB cable.
2. Execute "GNSS Test" to make the EUT receive continuous signals from GNSS station.
3. Execute "Video player" to play MPEG4 files.
4. Turn on camera to capture images.
5. Turn on NFC function
6. Turn on FM Receiver function

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1. Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B>

| Frequency of emission (MHz) | Conducted limit (dBuV) | |
|--------------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.


3.1.2. Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3. Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4. Test Setup

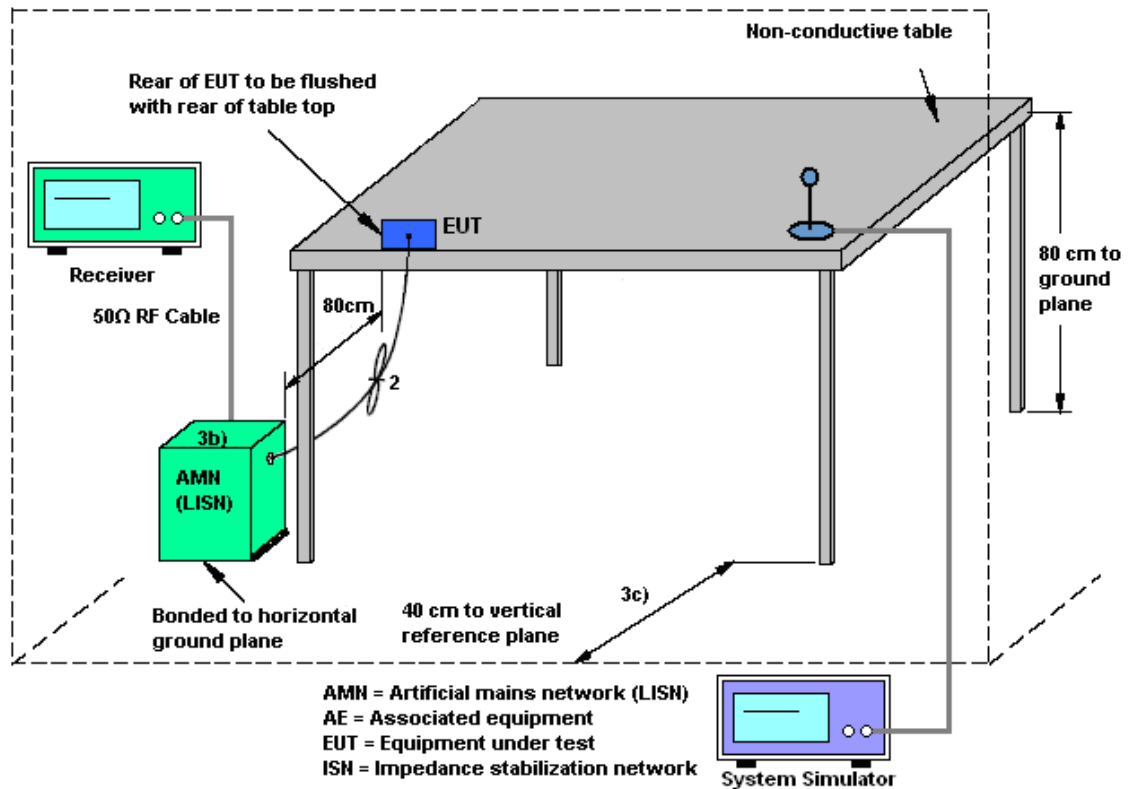

3.1.5. Test Result of AC Conducted Emission

Please refer to Appendix A.

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B>

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.2.2. Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120 kHz/VBW=300 kHz for frequency below 1 GHz; RBW=1 MHz VBW=3 MHz (Peak), RBW=1 MHz/VBW=10 Hz (Average) for frequency above 1 GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBμV/m) = 20 log Emission level (μV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

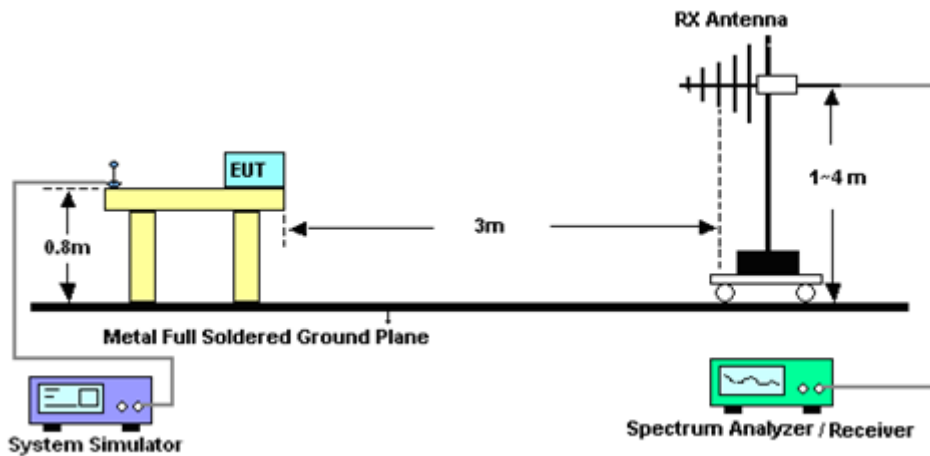

For radiated emissions above 1GHz

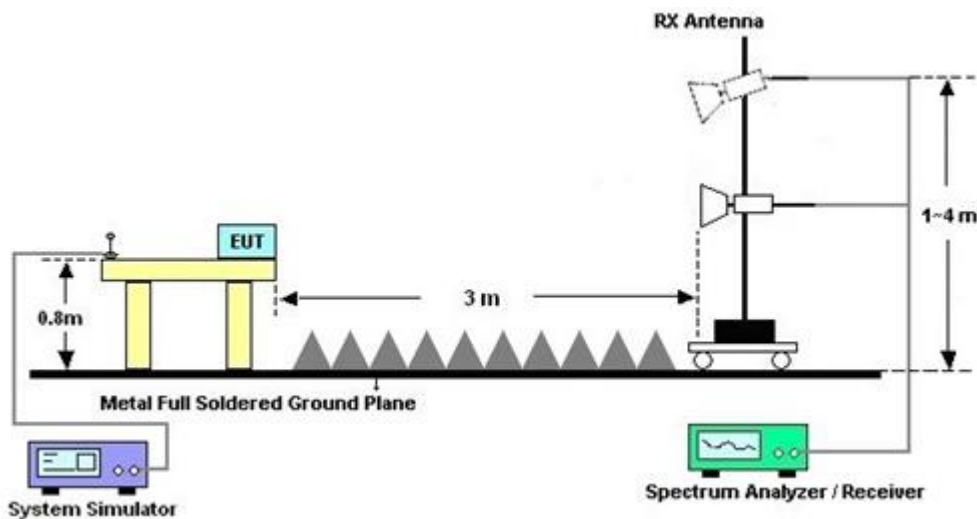

3.2.5. Test Result of Radiated Emission

Please refer to Appendix B.



4. List of Measuring Equipment

| Instrument | Brand Name | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|--------------------------------------|--------------|------------|--------------|----------------------------|------------------|---------------|---------------|-----------------------|
| EMI Receiver | R&S | ESCI7 | 100768 | 9kHz~7GHz; | Apr. 21, 2021 | Oct. 26, 2021 | Apr. 20, 2022 | Conduction (CO01-KS) |
| AC LISN (for auxiliary equipment) | MessTec | AN3016 | 060103 | 9kHz~30MHz | Oct. 14, 2021 | Oct. 26, 2021 | Oct. 13, 2022 | Conduction (CO01-KS) |
| AC LISN | R&S | ENV216 | 100334 | 9kHz~30MHz | Oct. 14, 2021 | Oct. 26, 2021 | Oct. 13, 2022 | Conduction (CO01-KS) |
| AC Power Source | Chroma | 61602 | ABP000000811 | AC 0V~300V, 45Hz~1000Hz | Oct. 14, 2021 | Oct. 26, 2021 | Oct. 13, 2022 | Conduction (CO01-KS) |
| EMI Test Receiver | R&S | ESR7 | 101403 | 9kHz~7GHz;Ma x 30dBm | Oct. 16, 2021 | Nov. 26, 2021 | Oct. 15, 2022 | Radiation (03CH02-KS) |
| EXA Spectrum Analyzer | Keysight | N9010A | MY55370528 | 10Hz~44G,MAX 30dB | Oct. 16, 2021 | Nov. 26, 2021 | Oct. 15, 2022 | Radiation (03CH02-KS) |
| Bilog Antenna | TeseQ | CBL6111D | 44483 | 30MHz~1GHz | Jan. 26, 2021 | Nov. 26, 2021 | Jan. 25, 2022 | Radiation (03CH02-KS) |
| Double Ridge Horn Antenna | ETS-Lindgren | 3117 | 75957 | 1GHz~18GHz | Oct. 30, 2021 | Nov. 26, 2021 | Oct. 29, 2022 | Radiation (03CH02-KS) |
| SHF-EHF Horn | Com-power | AH-840 | 101115 | 18GHz~40GHz | Nov. 05, 2021 | Nov. 26, 2021 | Nov. 04, 2022 | Radiation (03CH02-KS) |
| Amplifier | MITEQ | EM18G40GGA | 060728 | 18~40GHz | Jan. 06, 2021 | Nov. 26, 2021 | Jan. 05, 2022 | Radiation (03CH02-KS) |
| Amplifier | SONOMA | 310N | 187289 | 9KHz~1GHz | Jan. 06, 2021 | Nov. 26, 2021 | Jan. 05, 2022 | Radiation (03CH02-KS) |
| Amplifier | Keysight | 83017A | MY53270316 | 500MHz~26.5G Hz | Oct. 16, 2021 | Nov. 26, 2021 | Oct. 15, 2022 | Radiation (03CH02-KS) |
| AC Power Source | Chroma | 61601 | 616010002473 | N/A | NCR | Nov. 26, 2021 | NCR | Radiation (03CH02-KS) |
| Turn Table | MF | MF7802 | N/A | 0~360 degree | NCR | Nov. 26, 2021 | NCR | Radiation (03CH02-KS) |
| Antenna Mast | MF | MF7802 | N/A | 1 m~4 m | NCR | Nov. 26, 2021 | NCR | Radiation (03CH02-KS) |

NCR: No Calibration Required

5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

| | |
|-------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 2.9dB |
|-------------------------------------------------------------------------|-------|

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|-------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.9dB |
|-------------------------------------------------------------------------|-------|

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

| | |
|-------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.0dB |
|-------------------------------------------------------------------------|-------|


Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

| | |
|-------------------------------------------------------------------------|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.1dB |
|-------------------------------------------------------------------------|-------|



Appendix A. AC Conducted Emission Test Results

| | | | |
|-----------------|---------------------------------------------------------------------------------|---------------------|-------------|
| Mode : | Mode 1 | Temperature : | 25.3~26.2°C |
| Test Engineer : | Amos Zhang | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

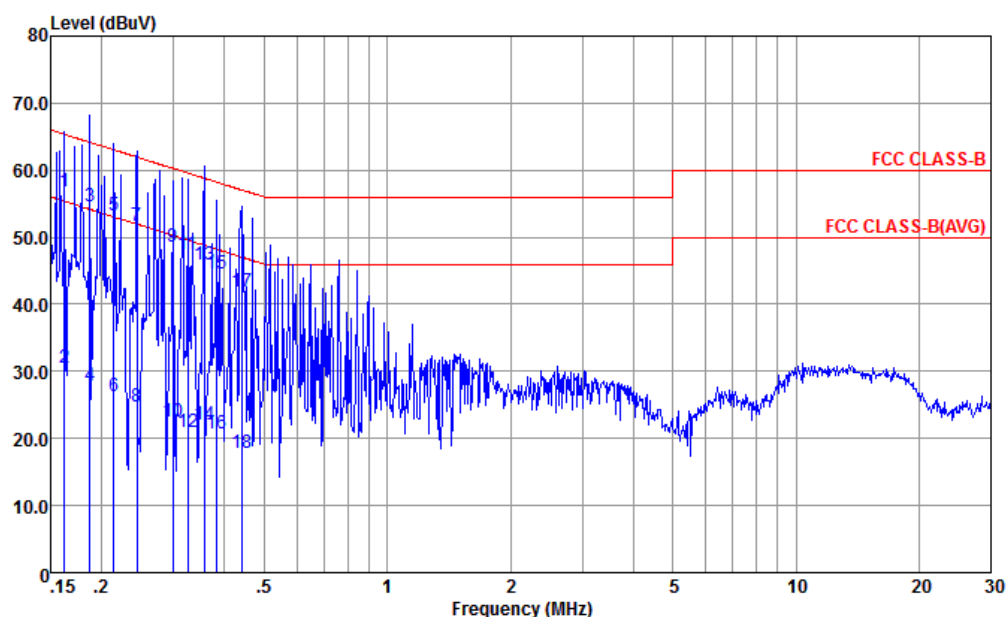


Site : CO01-KS
 Condition : FCC CLASS-B LISN-L-060105-CN02 LINE
 Project : (FC) 101907
 mode : Mode 1

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | | | | | | |
| 1 * | 0.162 | 56.82 | -8.52 | 65.34 | 46.30 | 0.07 | 10.45 | QP |
| 2 | 0.162 | 30.62 | -24.72 | 55.34 | 20.10 | 0.07 | 10.45 | Average |
| 3 | 0.187 | 54.67 | -9.48 | 64.15 | 44.20 | 0.08 | 10.39 | QP |
| 4 | 0.187 | 27.77 | -26.38 | 54.15 | 17.30 | 0.08 | 10.39 | Average |
| 5 | 0.214 | 53.25 | -9.80 | 63.05 | 42.81 | 0.09 | 10.35 | QP |
| 6 | 0.214 | 26.35 | -26.70 | 53.05 | 15.91 | 0.09 | 10.35 | Average |
| 7 | 0.244 | 51.73 | -10.22 | 61.95 | 41.29 | 0.10 | 10.34 | QP |
| 8 | 0.244 | 24.63 | -27.32 | 51.95 | 14.19 | 0.10 | 10.34 | Average |
| 9 | 0.299 | 48.61 | -11.67 | 60.28 | 38.19 | 0.11 | 10.31 | QP |
| 10 | 0.299 | 22.61 | -27.67 | 50.28 | 12.19 | 0.11 | 10.31 | Average |
| 11 | 0.325 | 47.51 | -12.06 | 59.57 | 37.10 | 0.11 | 10.30 | QP |
| 12 | 0.325 | 21.01 | -28.56 | 49.57 | 10.60 | 0.11 | 10.30 | Average |
| 13 | 0.356 | 45.90 | -12.93 | 58.83 | 35.51 | 0.11 | 10.28 | QP |
| 14 | 0.356 | 22.00 | -26.83 | 48.83 | 11.61 | 0.11 | 10.28 | Average |
| 15 | 0.383 | 44.49 | -13.72 | 58.21 | 34.10 | 0.12 | 10.27 | QP |
| 16 | 0.383 | 20.69 | -27.52 | 48.21 | 10.30 | 0.12 | 10.27 | Average |
| 17 | 0.440 | 41.88 | -15.19 | 57.07 | 31.51 | 0.12 | 10.25 | QP |
| 18 | 0.440 | 17.88 | -29.19 | 47.07 | 7.51 | 0.12 | 10.25 | Average |



| | | | |
|-----------------|---------------------------------------------------------------------------------|---------------------|-------------|
| Mode : | Mode 1 | Temperature : | 25.3~26.2°C |
| Test Engineer : | Amos Zhang | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

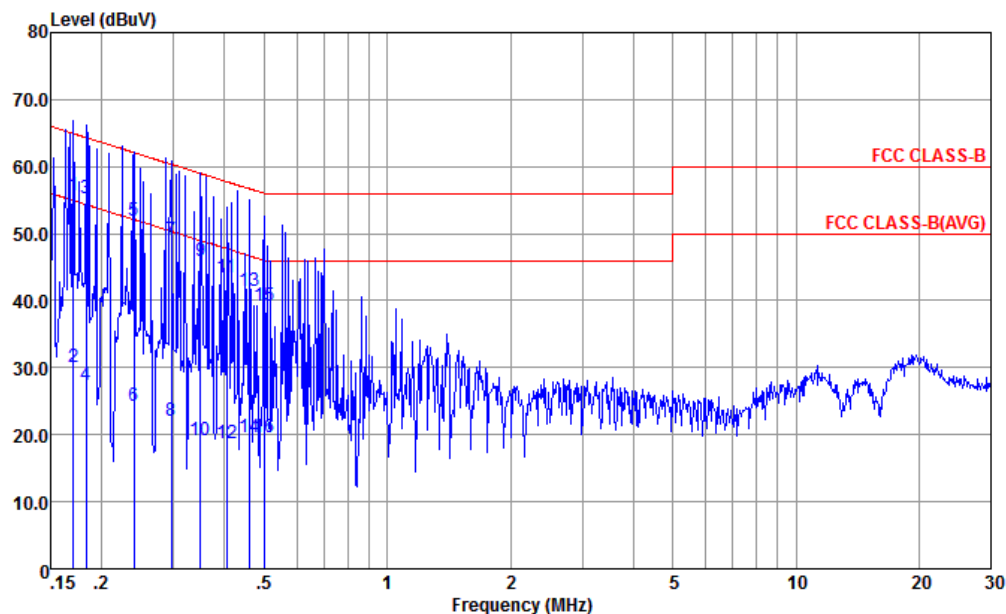


Site : CO01-KS
Condition : FCC CLASS-B LISN-N-060105-CN02 NEUTRAL
Project : (FC) 101907
mode : Mode 1

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.170 | 55.78 | -9.16 | 64.94 | 45.19 | 0.16 | 10.43 | QP |
| 2 | 0.170 | 30.18 | -24.76 | 54.94 | 19.59 | 0.16 | 10.43 | Average |
| 3 * | 0.183 | 55.36 | -8.97 | 64.33 | 44.80 | 0.16 | 10.40 | QP |
| 4 | 0.183 | 27.36 | -26.97 | 54.33 | 16.80 | 0.16 | 10.40 | Average |
| 5 | 0.240 | 52.02 | -10.06 | 62.08 | 41.50 | 0.18 | 10.34 | QP |
| 6 | 0.240 | 24.32 | -27.76 | 52.08 | 13.80 | 0.18 | 10.34 | Average |
| 7 | 0.296 | 49.00 | -11.37 | 60.37 | 38.50 | 0.19 | 10.31 | QP |
| 8 | 0.296 | 22.10 | -28.27 | 50.37 | 11.60 | 0.19 | 10.31 | Average |
| 9 | 0.348 | 45.99 | -13.01 | 59.00 | 35.49 | 0.21 | 10.29 | QP |
| 10 | 0.348 | 19.09 | -29.91 | 49.00 | 8.59 | 0.21 | 10.29 | Average |
| 11 | 0.404 | 43.38 | -14.39 | 57.77 | 32.90 | 0.22 | 10.26 | QP |
| 12 | 0.404 | 18.68 | -29.09 | 47.77 | 8.20 | 0.22 | 10.26 | Average |
| 13 | 0.461 | 41.37 | -15.30 | 56.67 | 30.90 | 0.22 | 10.25 | QP |
| 14 | 0.461 | 19.67 | -27.00 | 46.67 | 9.20 | 0.22 | 10.25 | Average |
| 15 | 0.502 | 39.27 | -16.73 | 56.00 | 28.80 | 0.23 | 10.24 | QP |
| 16 | 0.502 | 19.57 | -26.43 | 46.00 | 9.10 | 0.23 | 10.24 | Average |



| | | | |
|-----------------|---------------------------------------------------------------------------------|---------------------|------------|
| Mode : | Mode 2 | Temperature : | 25.3~26.2℃ |
| Test Engineer : | Amos Zhang | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

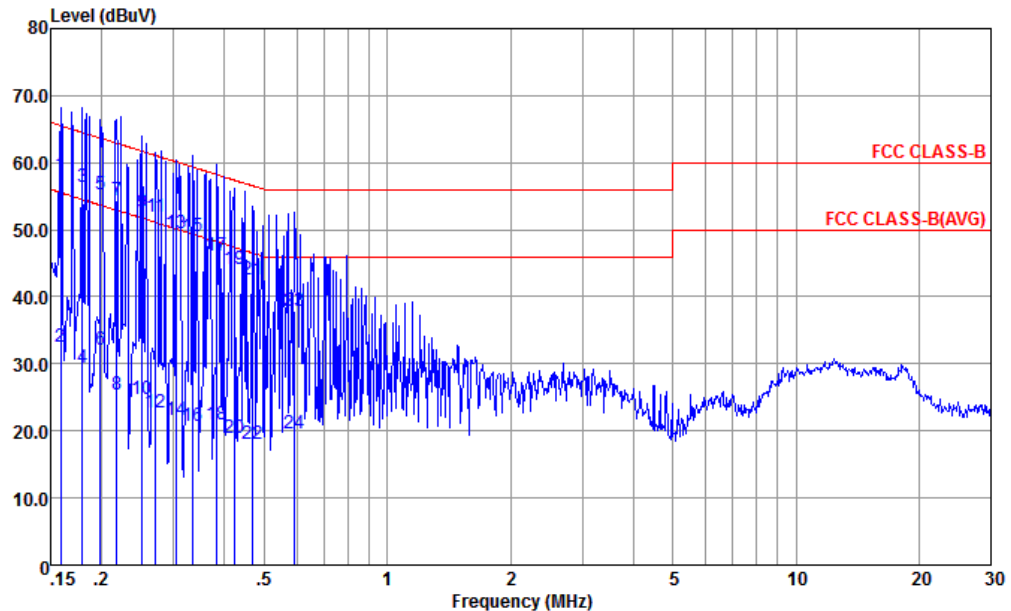


Site : CO01-KS
Condition : FCC CLASS-B LISN-L-060105-CN02 LINE
Project : (FC) 101907
mode : Mode 2

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 * | 0.159 | 58.13 | -7.39 | 65.52 | 47.60 | 0.07 | 10.46 | QP |
| 2 | 0.159 | 32.43 | -23.09 | 55.52 | 21.90 | 0.07 | 10.46 | Average |
| 3 | 0.180 | 56.39 | -8.11 | 64.50 | 45.90 | 0.08 | 10.41 | QP |
| 4 | 0.180 | 29.39 | -25.11 | 54.50 | 18.90 | 0.08 | 10.41 | Average |
| 5 | 0.199 | 55.25 | -8.42 | 63.67 | 44.79 | 0.09 | 10.37 | QP |
| 6 | 0.199 | 32.05 | -21.62 | 53.67 | 21.59 | 0.09 | 10.37 | Average |
| 7 | 0.217 | 54.34 | -8.58 | 62.92 | 43.90 | 0.09 | 10.35 | QP |
| 8 | 0.217 | 25.34 | -27.58 | 52.92 | 14.90 | 0.09 | 10.35 | Average |
| 9 | 0.251 | 52.63 | -9.10 | 61.73 | 42.20 | 0.10 | 10.33 | QP |
| 10 | 0.251 | 24.73 | -27.00 | 51.73 | 14.30 | 0.10 | 10.33 | Average |
| 11 | 0.272 | 52.02 | -9.05 | 61.07 | 41.60 | 0.10 | 10.32 | QP |
| 12 | 0.272 | 22.62 | -28.45 | 51.07 | 12.20 | 0.10 | 10.32 | Average |
| 13 | 0.305 | 49.51 | -10.59 | 60.10 | 39.09 | 0.11 | 10.31 | QP |
| 14 | 0.305 | 21.71 | -28.39 | 50.10 | 11.29 | 0.11 | 10.31 | Average |
| 15 | 0.334 | 49.00 | -10.35 | 59.35 | 38.60 | 0.11 | 10.29 | QP |
| 16 | 0.334 | 20.70 | -28.65 | 49.35 | 10.30 | 0.11 | 10.29 | Average |
| 17 | 0.383 | 46.19 | -12.02 | 58.21 | 35.80 | 0.12 | 10.27 | QP |
| 18 | 0.383 | 20.89 | -27.32 | 48.21 | 10.50 | 0.12 | 10.27 | Average |
| 19 | 0.421 | 44.18 | -13.24 | 57.42 | 33.80 | 0.12 | 10.26 | QP |
| 20 | 0.421 | 18.98 | -28.44 | 47.42 | 8.60 | 0.12 | 10.26 | Average |
| 21 | 0.466 | 42.57 | -14.01 | 56.58 | 32.20 | 0.13 | 10.24 | QP |
| 22 | 0.466 | 17.97 | -28.61 | 46.58 | 7.60 | 0.13 | 10.24 | Average |
| 23 | 0.592 | 37.98 | -18.02 | 56.00 | 27.60 | 0.14 | 10.24 | QP |
| 24 | 0.592 | 19.58 | -26.42 | 46.00 | 9.20 | 0.14 | 10.24 | Average |



| | | | |
|-----------------|---------------------------------------------------------------------------------|---------------------|-------------|
| Mode : | Mode 2 | Temperature : | 25.3~26.2°C |
| Test Engineer : | Amos Zhang | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

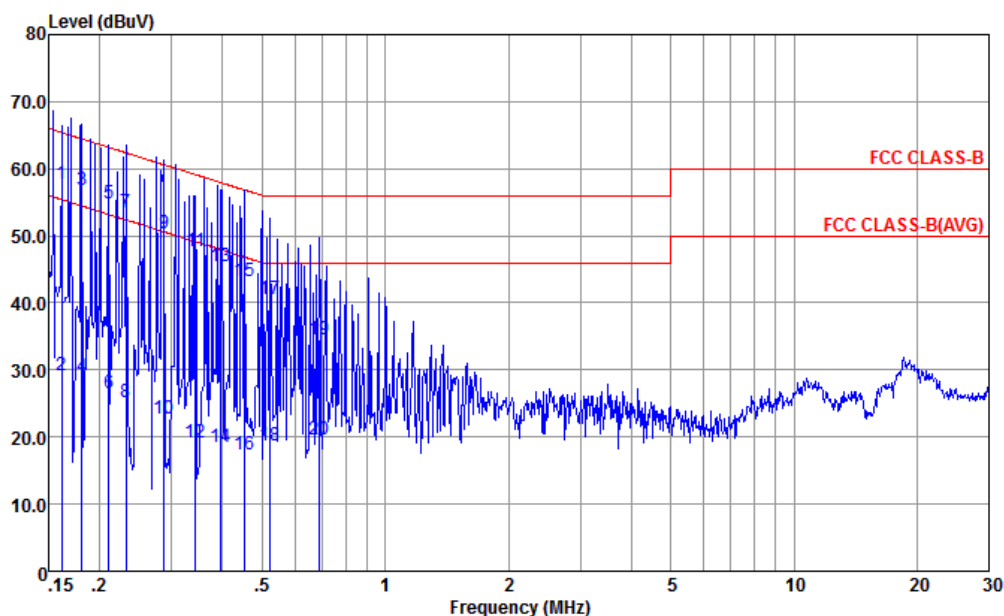


Site : CO01-KS
Condition : FCC CLASS-B LISN-N-060105-CN02 NEUTRAL
Project : (FC) 101907
mode : Mode 2

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 * | 0.162 | 57.70 | -7.68 | 65.38 | 47.10 | 0.15 | 10.45 | QP |
| 2 | 0.162 | 29.20 | -26.18 | 55.38 | 18.60 | 0.15 | 10.45 | Average |
| 3 | 0.181 | 56.77 | -7.69 | 64.46 | 46.21 | 0.16 | 10.40 | QP |
| 4 | 0.181 | 28.87 | -25.59 | 54.46 | 18.31 | 0.16 | 10.40 | Average |
| 5 | 0.211 | 54.73 | -8.45 | 63.18 | 44.20 | 0.17 | 10.36 | QP |
| 6 | 0.211 | 26.43 | -26.75 | 53.18 | 15.90 | 0.17 | 10.36 | Average |
| 7 | 0.232 | 53.42 | -8.97 | 62.39 | 42.90 | 0.18 | 10.34 | QP |
| 8 | 0.232 | 25.12 | -27.27 | 52.39 | 14.60 | 0.18 | 10.34 | Average |
| 9 | 0.288 | 50.41 | -10.18 | 60.59 | 39.91 | 0.19 | 10.31 | QP |
| 10 | 0.288 | 22.71 | -27.88 | 50.59 | 12.21 | 0.19 | 10.31 | Average |
| 11 | 0.343 | 47.69 | -11.44 | 59.13 | 37.20 | 0.20 | 10.29 | QP |
| 12 | 0.343 | 19.09 | -30.04 | 49.13 | 8.60 | 0.20 | 10.29 | Average |
| 13 | 0.396 | 45.38 | -12.57 | 57.95 | 34.90 | 0.21 | 10.27 | QP |
| 14 | 0.396 | 18.58 | -29.37 | 47.95 | 8.10 | 0.21 | 10.27 | Average |
| 15 | 0.452 | 43.27 | -13.58 | 56.85 | 32.80 | 0.22 | 10.25 | QP |
| 16 | 0.452 | 17.27 | -29.58 | 46.85 | 6.80 | 0.22 | 10.25 | Average |
| 17 | 0.521 | 40.67 | -15.33 | 56.00 | 30.20 | 0.23 | 10.24 | QP |
| 18 | 0.521 | 18.67 | -27.33 | 46.00 | 8.20 | 0.23 | 10.24 | Average |
| 19 | 0.686 | 34.59 | -21.41 | 56.00 | 24.10 | 0.25 | 10.24 | QP |
| 20 | 0.686 | 19.59 | -26.41 | 46.00 | 9.10 | 0.25 | 10.24 | Average |



| | | | |
|-----------------|---------------------------------------------------------------------------------|---------------------|-------------|
| Mode : | Mode 3 | Temperature : | 25.3~26.2°C |
| Test Engineer : | Amos Zhang | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

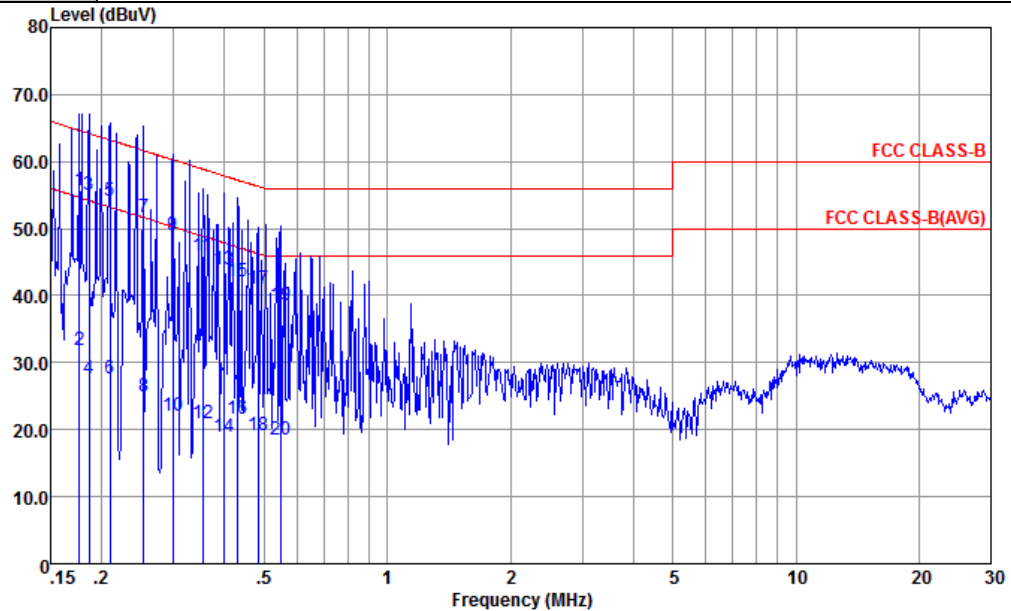


Site : CO01-KS
 Condition : FCC CLASS-B LISN-L-060105-CN02 LINE
 Project : (FC) 101907
 mode : Mode 3

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | MHz | dBuV | dB | dBuV | dBuV | dB | dB | |
| 1 * | 0.177 | 55.69 | -8.95 | 64.64 | 45.20 | 0.08 | 10.41 | QP |
| 2 | 0.177 | 31.79 | -22.85 | 54.64 | 21.30 | 0.08 | 10.41 | Average |
| 3 | 0.186 | 55.07 | -9.13 | 64.20 | 44.60 | 0.08 | 10.39 | QP |
| 4 | 0.186 | 27.67 | -26.53 | 54.20 | 17.20 | 0.08 | 10.39 | Average |
| 5 | 0.209 | 54.05 | -9.18 | 63.23 | 43.60 | 0.09 | 10.36 | QP |
| 6 | 0.209 | 27.65 | -26.58 | 53.23 | 17.20 | 0.09 | 10.36 | Average |
| 7 | 0.253 | 51.63 | -10.01 | 61.64 | 41.20 | 0.10 | 10.33 | QP |
| 8 | 0.253 | 24.93 | -26.71 | 51.64 | 14.50 | 0.10 | 10.33 | Average |
| 9 | 0.299 | 49.01 | -11.27 | 60.28 | 38.59 | 0.11 | 10.31 | QP |
| 10 | 0.299 | 22.01 | -28.27 | 50.28 | 11.59 | 0.11 | 10.31 | Average |
| 11 | 0.354 | 45.90 | -12.97 | 58.87 | 35.51 | 0.11 | 10.28 | QP |
| 12 | 0.354 | 20.90 | -27.97 | 48.87 | 10.51 | 0.11 | 10.28 | Average |
| 13 | 0.400 | 43.99 | -13.87 | 57.86 | 33.60 | 0.12 | 10.27 | QP |
| 14 | 0.400 | 18.99 | -28.87 | 47.86 | 8.60 | 0.12 | 10.27 | Average |
| 15 | 0.431 | 42.18 | -15.06 | 57.24 | 31.80 | 0.12 | 10.26 | QP |
| 16 | 0.431 | 21.58 | -25.66 | 47.24 | 11.20 | 0.12 | 10.26 | Average |
| 17 | 0.484 | 40.97 | -15.30 | 56.27 | 30.60 | 0.13 | 10.24 | QP |
| 18 | 0.484 | 19.17 | -27.10 | 46.27 | 8.80 | 0.13 | 10.24 | Average |
| 19 | 0.549 | 38.47 | -17.53 | 56.00 | 28.09 | 0.14 | 10.24 | QP |
| 20 | 0.549 | 18.47 | -27.53 | 46.00 | 8.09 | 0.14 | 10.24 | Average |



| | | | |
|-----------------|---------------------------------------------------------------------------------|---------------------|-------------|
| Mode : | Mode 3 | Temperature : | 25.3~26.2°C |
| Test Engineer : | Amos Zhang | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

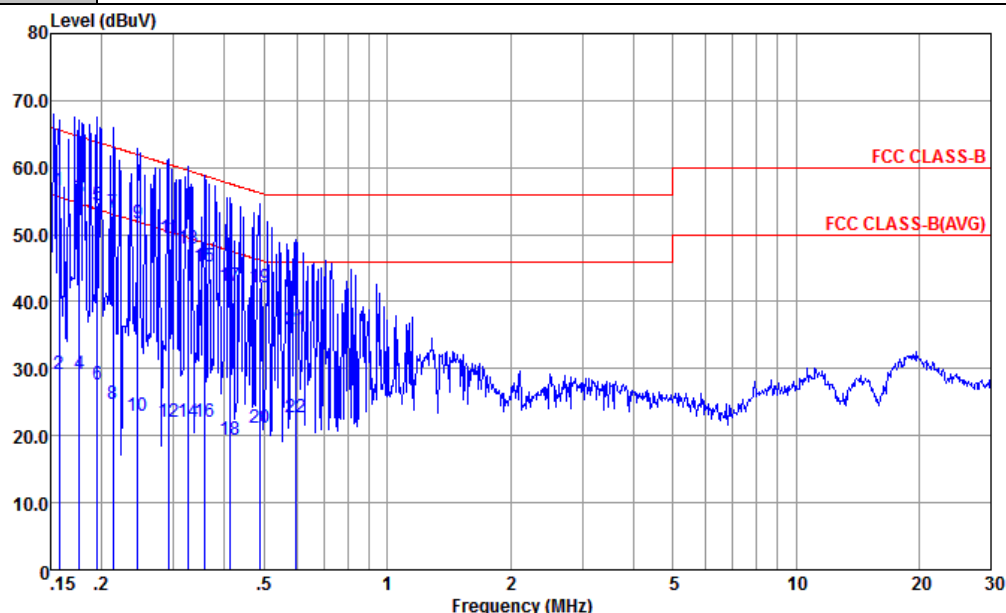


Site : CO01-KS
Condition : FCC CLASS-B LISN-N-060105-CN02 NEUTRAL
Project : (FC) 101907
mode : Mode 3

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 * | 0.157 | 56.51 | -9.09 | 65.60 | 45.90 | 0.15 | 10.46 | QP |
| 2 | 0.157 | 29.21 | -26.39 | 55.60 | 18.60 | 0.15 | 10.46 | Average |
| 3 | 0.177 | 55.47 | -9.17 | 64.64 | 44.90 | 0.16 | 10.41 | QP |
| 4 | 0.177 | 29.17 | -25.47 | 54.64 | 18.60 | 0.16 | 10.41 | Average |
| 5 | 0.195 | 54.44 | -9.36 | 63.80 | 43.90 | 0.17 | 10.37 | QP |
| 6 | 0.195 | 27.74 | -26.06 | 53.80 | 17.20 | 0.17 | 10.37 | Average |
| 7 | 0.213 | 53.33 | -9.77 | 63.10 | 42.80 | 0.17 | 10.36 | QP |
| 8 | 0.213 | 24.63 | -28.47 | 53.10 | 14.10 | 0.17 | 10.36 | Average |
| 9 | 0.246 | 51.62 | -10.29 | 61.91 | 41.10 | 0.18 | 10.34 | QP |
| 10 | 0.246 | 23.02 | -28.89 | 51.91 | 12.50 | 0.18 | 10.34 | Average |
| 11 | 0.292 | 49.40 | -11.06 | 60.46 | 38.90 | 0.19 | 10.31 | QP |
| 12 | 0.292 | 22.10 | -28.36 | 50.46 | 11.60 | 0.19 | 10.31 | Average |
| 13 | 0.327 | 48.00 | -11.53 | 59.53 | 37.51 | 0.20 | 10.29 | QP |
| 14 | 0.327 | 22.10 | -27.43 | 49.53 | 11.61 | 0.20 | 10.29 | Average |
| 15 | 0.358 | 45.29 | -13.49 | 58.78 | 34.80 | 0.21 | 10.28 | QP |
| 16 | 0.358 | 22.09 | -26.69 | 48.78 | 11.60 | 0.21 | 10.28 | Average |
| 17 | 0.413 | 42.38 | -15.21 | 57.59 | 31.90 | 0.22 | 10.26 | QP |
| 18 | 0.413 | 19.28 | -28.31 | 47.59 | 8.80 | 0.22 | 10.26 | Average |
| 19 | 0.489 | 42.03 | -14.16 | 56.19 | 31.56 | 0.23 | 10.24 | QP |
| 20 | 0.489 | 21.07 | -25.12 | 46.19 | 10.60 | 0.23 | 10.24 | Average |
| 21 | 0.598 | 35.98 | -20.02 | 56.00 | 25.50 | 0.24 | 10.24 | QP |
| 22 | 0.598 | 22.78 | -23.22 | 46.00 | 12.30 | 0.24 | 10.24 | Average |



| | | | |
|-----------------|---------------------------------------------------------------------------------|---------------------|-------------|
| Mode : | Mode 4 | Temperature : | 25.3~26.2°C |
| Test Engineer : | Amos Zhang | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

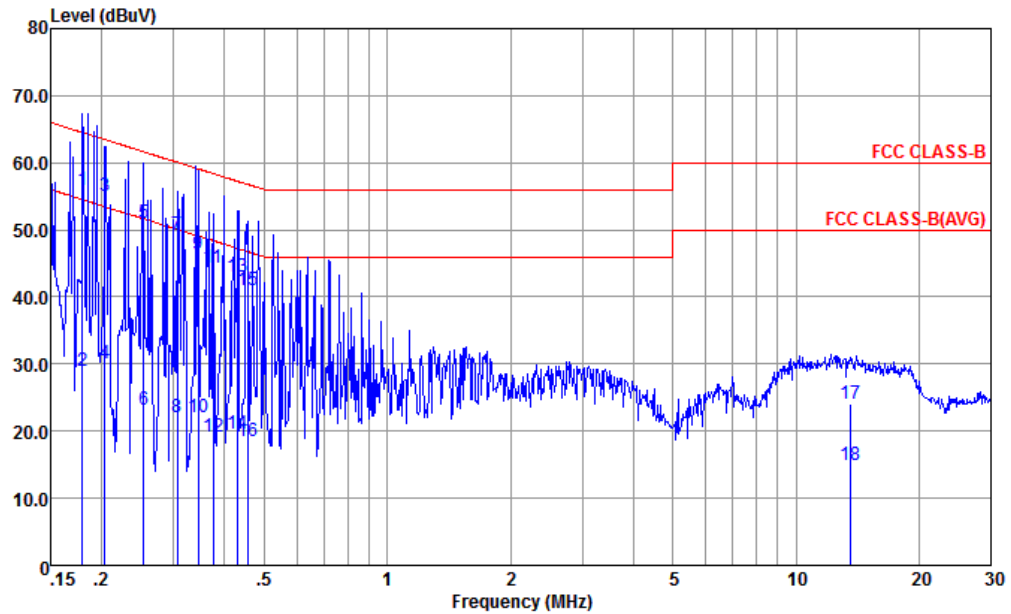


Site : CO01-KS
 Condition : FCC CLASS-B LISN-L-060105-CN02 LINE
 Project : (FC) 101907
 mode : Mode 4

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|-----|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.180 | 55.99 | -8.51 | 64.50 | 45.50 | 0.08 | 10.41 | QP |
| 2 | 0.180 | 28.99 | -25.51 | 54.50 | 18.50 | 0.08 | 10.41 | Average |
| 3 * | 0.204 | 54.95 | -8.50 | 63.45 | 44.50 | 0.09 | 10.36 | QP |
| 4 | 0.204 | 30.05 | -23.40 | 53.45 | 19.60 | 0.09 | 10.36 | Average |
| 5 | 0.253 | 50.93 | -10.71 | 61.64 | 40.50 | 0.10 | 10.33 | QP |
| 6 | 0.253 | 23.23 | -28.41 | 51.64 | 12.80 | 0.10 | 10.33 | Average |
| 7 | 0.307 | 49.31 | -10.75 | 60.06 | 38.90 | 0.11 | 10.30 | QP |
| 8 | 0.307 | 22.01 | -28.05 | 50.06 | 11.60 | 0.11 | 10.30 | Average |
| 9 | 0.345 | 46.30 | -12.79 | 59.09 | 35.90 | 0.11 | 10.29 | QP |
| 10 | 0.345 | 22.00 | -27.09 | 49.09 | 11.60 | 0.11 | 10.29 | Average |
| 11 | 0.375 | 44.29 | -14.10 | 58.39 | 33.89 | 0.12 | 10.28 | QP |
| 12 | 0.375 | 19.19 | -29.20 | 48.39 | 8.79 | 0.12 | 10.28 | Average |
| 13 | 0.431 | 42.98 | -14.26 | 57.24 | 32.60 | 0.12 | 10.26 | QP |
| 14 | 0.431 | 19.58 | -27.66 | 47.24 | 9.20 | 0.12 | 10.26 | Average |
| 15 | 0.456 | 40.97 | -15.79 | 56.76 | 30.59 | 0.13 | 10.25 | QP |
| 16 | 0.456 | 18.47 | -28.29 | 46.76 | 8.09 | 0.13 | 10.25 | Average |
| 17 | 13.560 | 23.98 | -36.02 | 60.00 | 12.20 | 1.40 | 10.38 | QP |
| 18 | 13.560 | 14.88 | -35.12 | 50.00 | 3.10 | 1.40 | 10.38 | Average |



| | | | |
|-----------------|---------------------------------------------------------------------------------|---------------------|-------------|
| Mode : | Mode 4 | Temperature : | 25.3~26.2°C |
| Test Engineer : | Amos Zhang | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

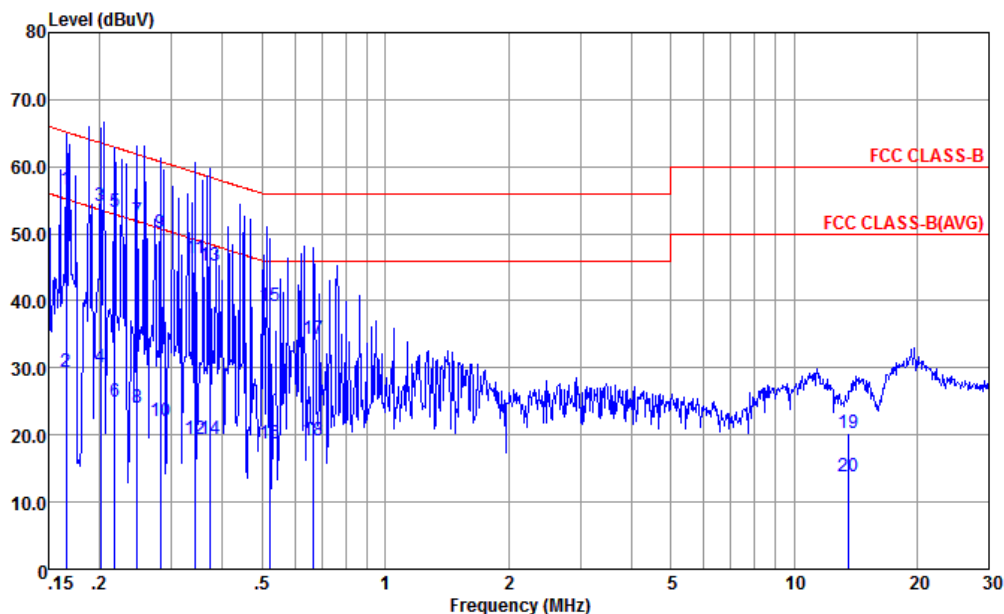


Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-060105-CN02 NEUTRAL
 Project : (FC) 101907
 mode : Mode 4

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|-----|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 * | 0.166 | 56.50 | -8.66 | 65.16 | 45.90 | 0.16 | 10.44 | QP |
| 2 | 0.166 | 29.40 | -25.76 | 55.16 | 18.80 | 0.16 | 10.44 | Average |
| 3 | 0.201 | 54.13 | -9.45 | 63.58 | 43.60 | 0.17 | 10.36 | QP |
| 4 | 0.201 | 30.13 | -23.45 | 53.58 | 19.60 | 0.17 | 10.36 | Average |
| 5 | 0.217 | 53.33 | -9.59 | 62.92 | 42.81 | 0.17 | 10.35 | QP |
| 6 | 0.217 | 25.03 | -27.89 | 52.92 | 14.51 | 0.17 | 10.35 | Average |
| 7 | 0.247 | 52.02 | -9.84 | 61.86 | 41.50 | 0.18 | 10.34 | QP |
| 8 | 0.247 | 24.12 | -27.74 | 51.86 | 13.60 | 0.18 | 10.34 | Average |
| 9 | 0.282 | 50.11 | -10.65 | 60.76 | 39.60 | 0.19 | 10.32 | QP |
| 10 | 0.282 | 22.11 | -28.65 | 50.76 | 11.60 | 0.19 | 10.32 | Average |
| 11 | 0.343 | 46.39 | -12.74 | 59.13 | 35.90 | 0.20 | 10.29 | QP |
| 12 | 0.343 | 19.29 | -29.84 | 49.13 | 8.80 | 0.20 | 10.29 | Average |
| 13 | 0.371 | 45.29 | -13.18 | 58.47 | 34.80 | 0.21 | 10.28 | QP |
| 14 | 0.371 | 19.29 | -29.18 | 48.47 | 8.80 | 0.21 | 10.28 | Average |
| 15 | 0.524 | 39.27 | -16.73 | 56.00 | 28.80 | 0.23 | 10.24 | QP |
| 16 | 0.524 | 18.67 | -27.33 | 46.00 | 8.20 | 0.23 | 10.24 | Average |
| 17 | 0.668 | 34.29 | -21.71 | 56.00 | 23.80 | 0.25 | 10.24 | QP |
| 18 | 0.668 | 19.09 | -26.91 | 46.00 | 8.60 | 0.25 | 10.24 | Average |
| 19 | 13.560 | 20.33 | -39.67 | 60.00 | 8.20 | 1.75 | 10.38 | QP |
| 20 | 13.560 | 13.73 | -36.27 | 50.00 | 1.60 | 1.75 | 10.38 | Average |



| | | | |
|-----------------|---------------------------------------------------------------------------------|---------------------|-------------|
| Mode : | Mode 5 | Temperature : | 25.3~26.2°C |
| Test Engineer : | Amos Zhang | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

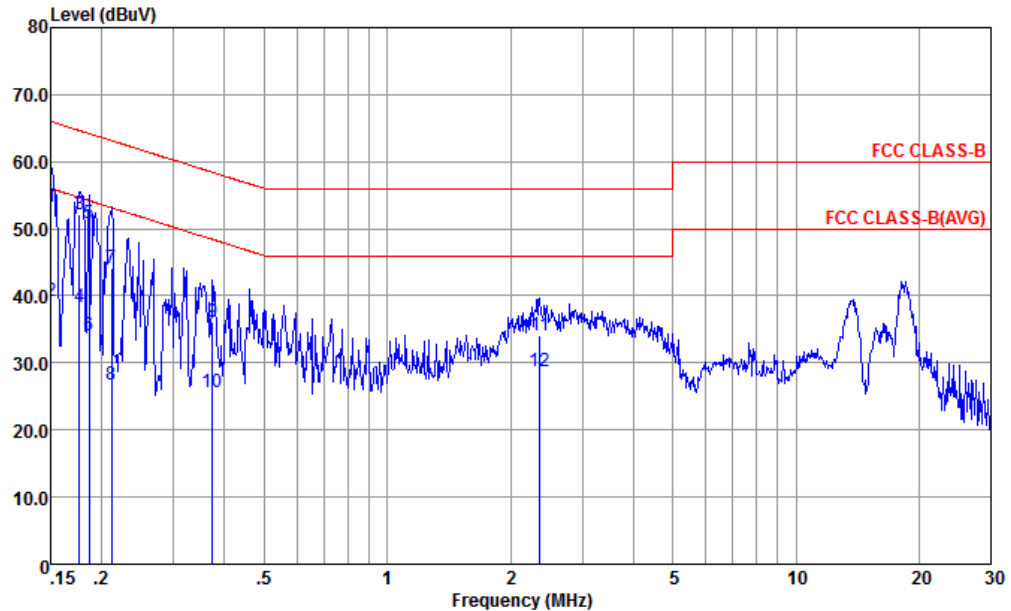


Site : CO01-KS
 Condition : FCC CLASS-B LISN-L-060105-CN02 LINE
 Project : (FC) 101907
 mode : Mode 5

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|-----|-------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 | 0.150 | 53.15 | -12.85 | 66.00 | 42.60 | 0.07 | 10.48 | QP |
| 2 | 0.150 | 39.15 | -16.85 | 56.00 | 28.60 | 0.07 | 10.48 | Average |
| 3 * | 0.177 | 52.09 | -12.55 | 64.64 | 41.60 | 0.08 | 10.41 | QP |
| 4 | 0.177 | 38.39 | -16.25 | 54.64 | 27.90 | 0.08 | 10.41 | Average |
| 5 | 0.186 | 50.77 | -13.43 | 64.20 | 40.30 | 0.08 | 10.39 | QP |
| 6 | 0.186 | 34.07 | -20.13 | 54.20 | 23.60 | 0.08 | 10.39 | Average |
| 7 | 0.212 | 44.05 | -19.09 | 63.14 | 33.60 | 0.09 | 10.36 | QP |
| 8 | 0.212 | 26.65 | -26.49 | 53.14 | 16.20 | 0.09 | 10.36 | Average |
| 9 | 0.373 | 35.99 | -22.44 | 58.43 | 25.59 | 0.12 | 10.28 | QP |
| 10 | 0.373 | 25.59 | -22.84 | 48.43 | 15.19 | 0.12 | 10.28 | Average |
| 11 | 2.358 | 34.17 | -21.83 | 56.00 | 23.50 | 0.44 | 10.23 | QP |
| 12 | 2.358 | 28.77 | -17.23 | 46.00 | 18.10 | 0.44 | 10.23 | Average |



| | | | |
|-----------------|---------------------------------------------------------------------------------|---------------------|-------------|
| Mode : | Mode 5 | Temperature : | 25.3~26.2°C |
| Test Engineer : | Amos Zhang | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

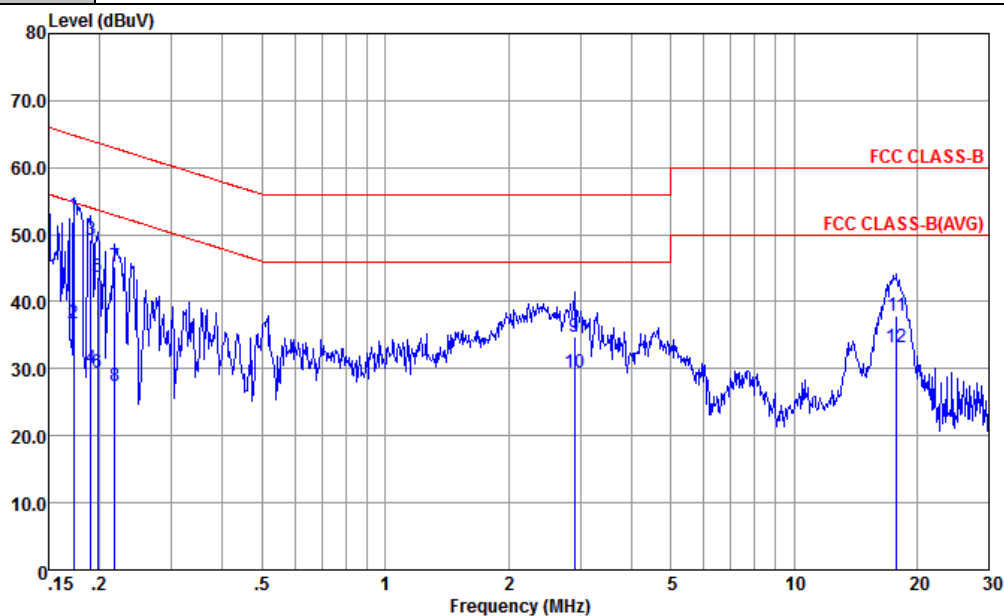


Site : CO01-KS
Condition : FCC CLASS-B LISN-N-060105-CN02 NEUTRAL
Project : (FC) 101907
mode : Mode 5

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|-----|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 * | 0.173 | 52.78 | -12.03 | 64.81 | 42.20 | 0.16 | 10.42 | QP |
| 2 | 0.173 | 36.78 | -18.03 | 54.81 | 26.20 | 0.16 | 10.42 | Average |
| 3 | 0.190 | 49.15 | -14.87 | 64.02 | 38.61 | 0.16 | 10.38 | QP |
| 4 | 0.190 | 30.15 | -23.87 | 54.02 | 19.61 | 0.16 | 10.38 | Average |
| 5 | 0.198 | 43.73 | -19.98 | 63.71 | 33.19 | 0.17 | 10.37 | QP |
| 6 | 0.198 | 29.33 | -24.38 | 53.71 | 18.79 | 0.17 | 10.37 | Average |
| 7 | 0.217 | 45.33 | -17.59 | 62.92 | 34.81 | 0.17 | 10.35 | QP |
| 8 | 0.217 | 27.33 | -25.59 | 52.92 | 16.81 | 0.17 | 10.35 | Average |
| 9 | 2.900 | 34.79 | -21.21 | 56.00 | 23.90 | 0.65 | 10.24 | QP |
| 10 | 2.900 | 29.39 | -16.61 | 46.00 | 18.50 | 0.65 | 10.24 | Average |
| 11 | 17.849 | 37.80 | -22.20 | 60.00 | 24.91 | 2.44 | 10.45 | QP |
| 12 | 17.849 | 33.10 | -16.90 | 50.00 | 20.21 | 2.44 | 10.45 | Average |



| | | | |
|-----------------|---------------------------------------------------------------------------------|---------------------|-------------|
| Mode : | Mode 6 | Temperature : | 25.3~26.2°C |
| Test Engineer : | Amos Zhang | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

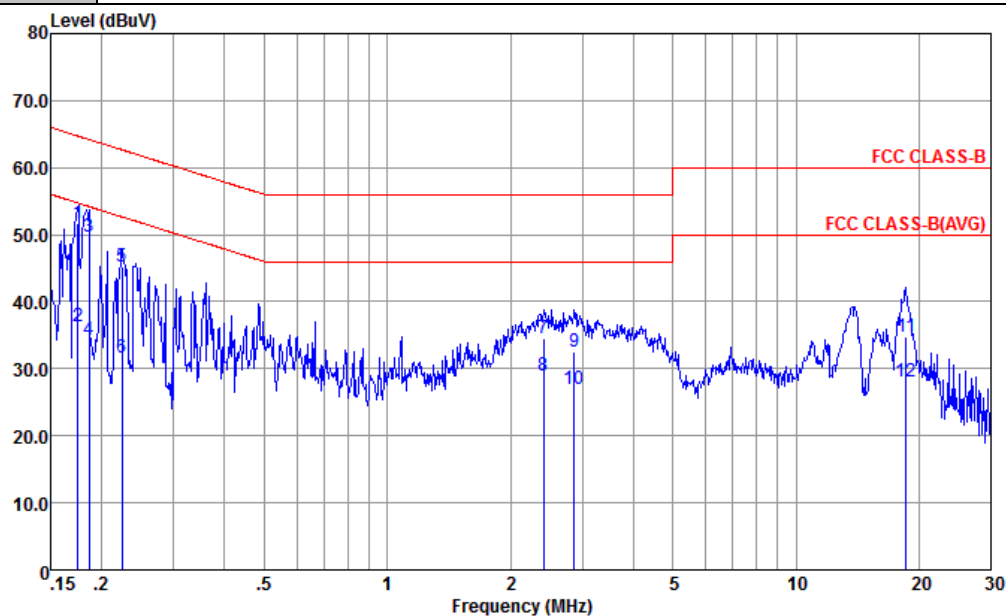


Site : CO01-KS
Condition : FCC CLASS-B LISN-L-060105-CN02 LINE
Project : (FC) 101907
mode : Mode 6

| | Freq | Level | Over | Limit | Read | LISN | Cable | Remark |
|-----|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 * | 0.175 | 51.60 | -13.12 | 64.72 | 41.10 | 0.08 | 10.42 | QP |
| 2 | 0.175 | 36.40 | -18.32 | 54.72 | 25.90 | 0.08 | 10.42 | Average |
| 3 | 0.186 | 49.67 | -14.53 | 64.20 | 39.20 | 0.08 | 10.39 | QP |
| 4 | 0.186 | 34.37 | -19.83 | 54.20 | 23.90 | 0.08 | 10.39 | Average |
| 5 | 0.224 | 45.24 | -17.42 | 62.66 | 34.80 | 0.09 | 10.35 | QP |
| 6 | 0.224 | 31.64 | -21.02 | 52.66 | 21.20 | 0.09 | 10.35 | Average |
| 7 | 2.409 | 34.58 | -21.42 | 56.00 | 23.90 | 0.45 | 10.23 | QP |
| 8 | 2.409 | 28.88 | -17.12 | 46.00 | 18.20 | 0.45 | 10.23 | Average |
| 9 | 2.869 | 32.64 | -23.36 | 56.00 | 21.90 | 0.50 | 10.24 | QP |
| 10 | 2.869 | 27.04 | -18.96 | 46.00 | 16.30 | 0.50 | 10.24 | Average |
| 11 | 18.622 | 34.67 | -25.33 | 60.00 | 22.20 | 2.00 | 10.47 | QP |
| 12 | 18.622 | 27.97 | -22.03 | 50.00 | 15.50 | 2.00 | 10.47 | Average |



| | | | |
|-----------------|---------------------------------------------------------------------------------|---------------------|-------------|
| Mode : | Mode 6 | Temperature : | 25.3~26.2°C |
| Test Engineer : | Amos Zhang | Relative Humidity : | 38~40% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Remark : | All emissions not reported here are more than 10 dB below the prescribed limit. | | |

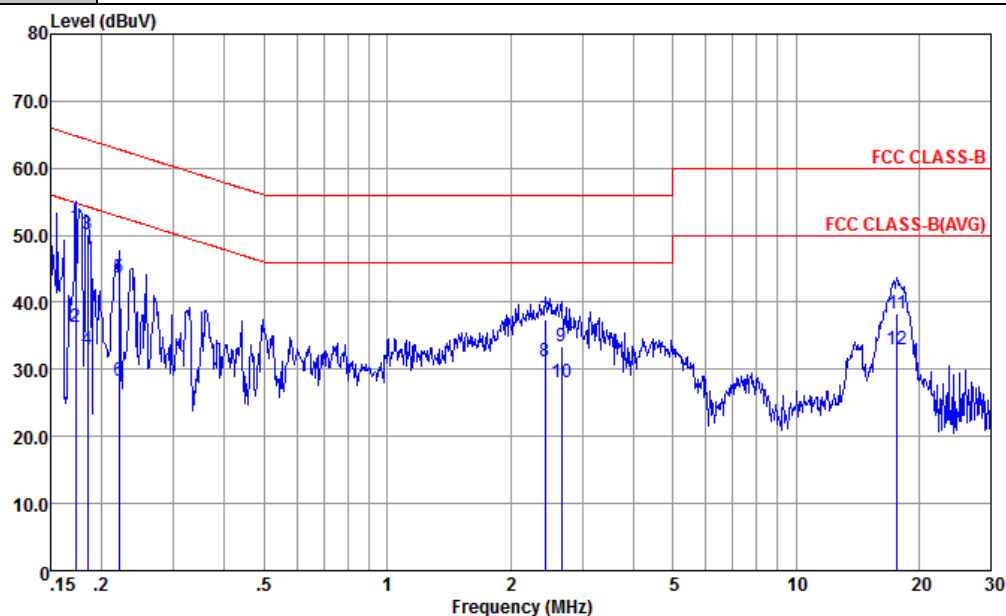

Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-060105-CN02 NEUTRAL
 Project : (FC) 101907
 mode : Mode 6

| | Freq | Level | Over | Limit | Read | LISN | Cable | |
|-----|--------|-------|--------|-------|-------|--------|-------|---------|
| | MHz | dBuV | Limit | Line | Level | Factor | Loss | Remark |
| | | | dB | dBuV | dBuV | dB | dB | |
| 1 * | 0.173 | 51.18 | -13.63 | 64.81 | 40.60 | 0.16 | 10.42 | QP |
| 2 | 0.173 | 36.38 | -18.43 | 54.81 | 25.80 | 0.16 | 10.42 | Average |
| 3 | 0.184 | 50.16 | -14.12 | 64.28 | 39.60 | 0.16 | 10.40 | QP |
| 4 | 0.184 | 33.06 | -21.22 | 54.28 | 22.50 | 0.16 | 10.40 | Average |
| 5 | 0.221 | 43.72 | -19.07 | 62.79 | 33.20 | 0.17 | 10.35 | QP |
| 6 | 0.221 | 28.32 | -24.47 | 52.79 | 17.80 | 0.17 | 10.35 | Average |
| 7 | 2.435 | 37.42 | -18.58 | 56.00 | 26.60 | 0.59 | 10.23 | QP |
| 8 | 2.435 | 31.12 | -14.88 | 46.00 | 20.30 | 0.59 | 10.23 | Average |
| 9 | 2.664 | 33.36 | -22.64 | 56.00 | 22.50 | 0.62 | 10.24 | QP |
| 10 | 2.664 | 28.16 | -17.84 | 46.00 | 17.30 | 0.62 | 10.24 | Average |
| 11 | 17.661 | 38.37 | -21.63 | 60.00 | 25.50 | 2.42 | 10.45 | QP |
| 12 | 17.661 | 33.07 | -16.93 | 50.00 | 20.20 | 2.42 | 10.45 | Average |


Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix B. Radiated Emission Test Result

| | | | |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------------|
| Mode : | Mode 1 | Temperature : | 21~22°C |
| Test Engineer : | Yoke Si | Relative Humidity : | 51~52% |
| Test Distance : | 3m | Polarization : | Horizontal |
| Remark : | #7 is system simulator signal which can be ignored. #8 is RF signals which come from Bluetooth/WLAN Access Point used to connect the EUT, and which can be ignored. | | |

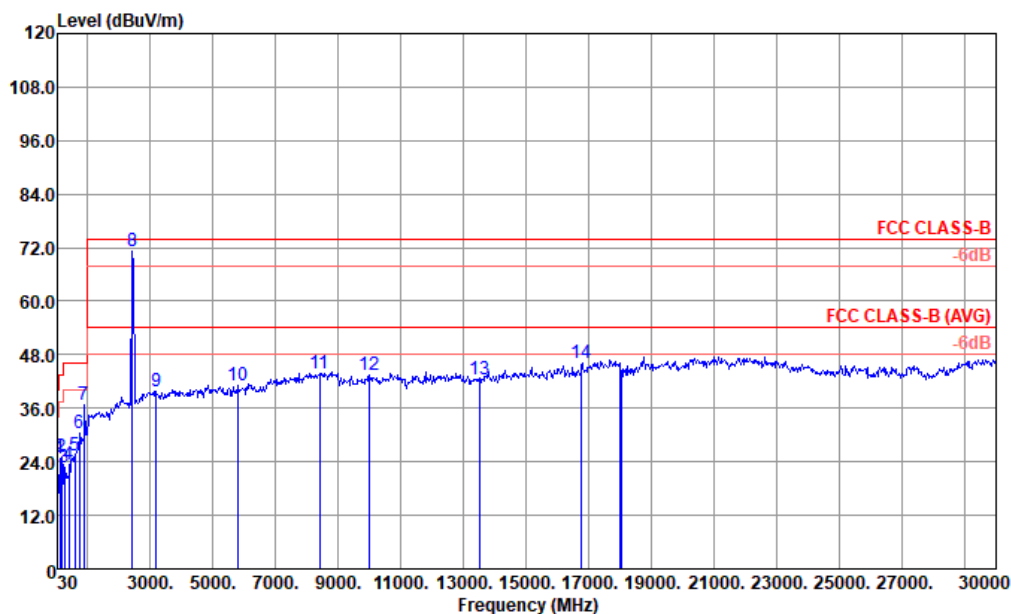


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 6111D SN44483 HORIZONTAL
 Project : (FC)101907
 Mode : 1

| | Freq | Level | Over | Limit | ReadAntenna | Cable | Preamp | A/Pos | T/Pos | Remark |
|----|-----------|--------|--------|--------|-------------|-------|--------|-------|-------|--------|
| | MHz | dBuV/m | Limit | Line | Level | Loss | Factor | cm | deg | |
| | | | dB | dBuV/m | dBuV | dB/m | dB | dB | | |
| 1 | 108.570 | 24.75 | -18.75 | 43.50 | 38.33 | 16.91 | 1.69 | 32.18 | --- | Peak |
| 2 | 159.010 | 25.09 | -18.41 | 43.50 | 38.59 | 16.56 | 2.04 | 32.10 | --- | Peak |
| 3 | 256.980 | 22.59 | -23.41 | 46.00 | 32.17 | 19.99 | 2.62 | 32.19 | --- | Peak |
| 4 | 397.630 | 23.51 | -22.49 | 46.00 | 30.71 | 21.83 | 3.26 | 32.29 | --- | Peak |
| 5 | 579.020 | 25.34 | -20.66 | 46.00 | 28.09 | 25.63 | 3.92 | 32.30 | --- | Peak |
| 6 | 724.520 | 30.34 | -15.66 | 46.00 | 30.76 | 27.44 | 4.39 | 32.25 | --- | Peak |
| 7 | 881.660 | 36.72 | | | 34.97 | 29.17 | 4.85 | 32.27 | --- | Peak |
| 8 | 2416.000 | 71.23 | | | 92.31 | 33.37 | 7.44 | 61.89 | --- | Peak |
| 9 | 3176.000 | 39.72 | -34.28 | 74.00 | 58.38 | 33.38 | 9.28 | 61.32 | --- | Peak |
| 10 | 5784.000 | 41.06 | -32.94 | 74.00 | 54.74 | 35.28 | 12.66 | 61.62 | --- | Peak |
| 11 | 8408.000 | 43.86 | -30.14 | 74.00 | 54.01 | 36.47 | 15.59 | 62.21 | --- | Peak |
| 12 | 9972.000 | 43.56 | -30.44 | 74.00 | 24.28 | 37.50 | 17.04 | 35.26 | --- | Peak |
| 13 | 13491.000 | 42.46 | -31.54 | 74.00 | 19.66 | 38.40 | 19.80 | 35.40 | --- | Peak |
| 14 | 16776.000 | 46.12 | -27.88 | 74.00 | 18.42 | 40.28 | 22.46 | 35.04 | --- | Peak |




| | | | |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------|
| Mode : | Mode 1 | Temperature : | 21~22°C |
| Test Engineer : | Yoke Si | Relative Humidity : | 51~52% |
| Test Distance : | 3m | Polarization : | Vertical |
| Remark : | #7 s system simulator signal which can be ignored. #8 is RF signals which come from Bluetooth/WLAN Access Point used to connect the EUT, and which can be ignored. | | |

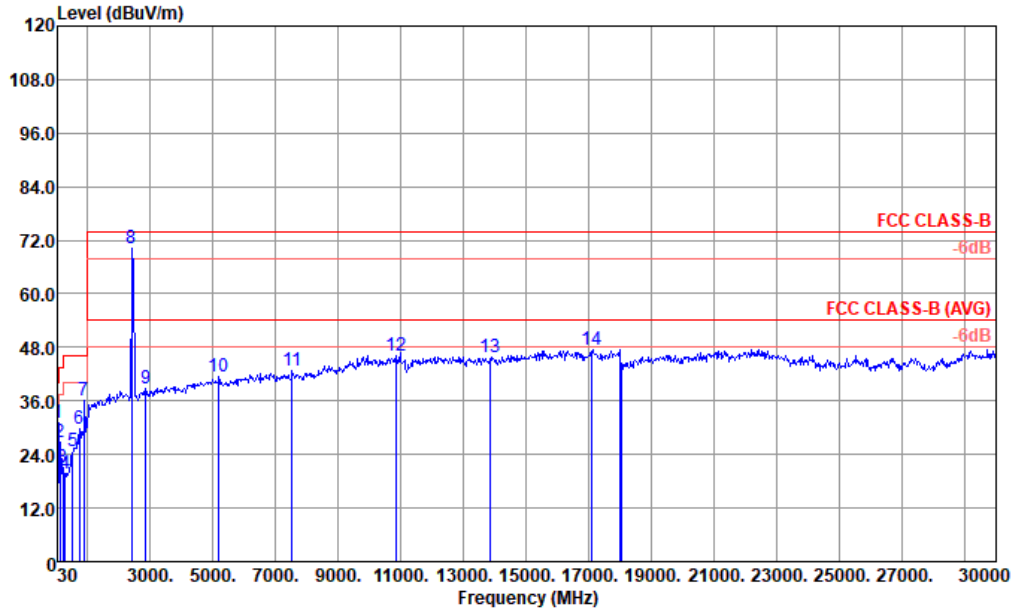

Site : 03CH02-KS
Condition : FCC CLASS-B 3m LF 6111D SN44483 VERTICAL
Project : (FC)101907
Mode : 1

| | Freq | Level | Over | Limit | ReadAntenna | Cable | Preamp | A/Pos | T/Pos | Remark |
|----|-----------|--------|--------|--------|-------------|-------|--------|-------|-------|--------|
| | MHz | dBuV/m | Limit | Line | Level | Loss | Factor | | | |
| | | | dB | dBuV/m | dBuV | dB | | cm | deg | |
| 1 | 44.550 | 30.94 | -9.06 | 40.00 | 44.99 | 17.35 | 0.78 | 32.18 | --- | Peak |
| 2 | 110.510 | 26.79 | -16.71 | 43.50 | 40.22 | 17.05 | 1.70 | 32.18 | --- | Peak |
| 3 | 198.780 | 21.02 | -22.48 | 43.50 | 35.74 | 15.07 | 2.31 | 32.10 | --- | Peak |
| 4 | 268.620 | 19.77 | -26.23 | 46.00 | 29.46 | 19.80 | 2.67 | 32.16 | --- | Peak |
| 5 | 515.000 | 24.83 | -21.17 | 46.00 | 29.09 | 24.41 | 3.70 | 32.37 | --- | Peak |
| 6 | 724.520 | 29.61 | -16.39 | 46.00 | 30.03 | 27.44 | 4.39 | 32.25 | --- | Peak |
| 7 | 881.660 | 36.01 | | | 34.26 | 29.17 | 4.85 | 32.27 | --- | Peak |
| 8 | 2408.000 | 70.28 | | | 91.36 | 33.37 | 7.44 | 61.89 | --- | Peak |
| 9 | 2856.000 | 38.86 | -35.14 | 74.00 | 59.04 | 32.60 | 8.80 | 61.58 | --- | Peak |
| 10 | 5160.000 | 41.57 | -32.43 | 74.00 | 56.31 | 34.95 | 12.00 | 61.69 | --- | Peak |
| 11 | 7520.000 | 42.82 | -31.18 | 74.00 | 53.57 | 36.52 | 14.58 | 61.85 | --- | Peak |
| 12 | 10827.000 | 46.03 | -27.97 | 74.00 | 25.34 | 38.11 | 17.74 | 35.16 | --- | Peak |
| 13 | 13869.000 | 45.76 | -28.24 | 74.00 | 22.35 | 38.55 | 20.04 | 35.18 | --- | Peak |
| 14 | 17100.000 | 47.33 | -26.67 | 74.00 | 19.14 | 40.42 | 22.80 | 35.03 | --- | Peak |

| | | | |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| Mode : | Mode 2 | Temperature : | 21~22°C |
| Test Engineer : | Yoke Si | Relative Humidity : | 51~52% |
| Test Distance : | 3m | Polarization : | Horizontal |
| Remark : | #7 is system simulator signal which can be ignored. #9 is RF signals which come from WLAN Access Point used to connect the EUT, and which can be ignored. | | |

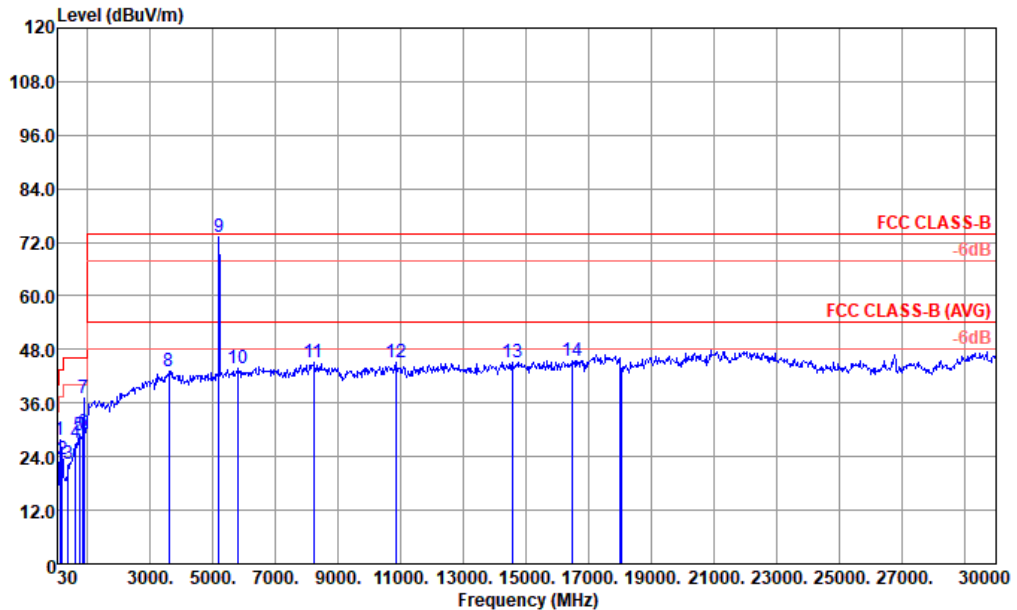


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 6111D SN44483 HORIZONTAL
 Project : (FC)101907
 Mode : 2

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Factor | Cable Loss | Preamp Factor | A/Pos | T/Pos | Remark |
|----|-----------|--------|---------------|---------------|----------------------|--------|---------------|------------------|-------|-------|--------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 116.330 | 27.73 | -15.77 | 43.50 | 40.78 | 17.38 | 1.74 | 32.17 | --- | --- | Peak |
| 2 | 183.260 | 23.40 | -20.10 | 43.50 | 38.29 | 15.01 | 2.20 | 32.10 | --- | --- | Peak |
| 3 | 377.260 | 22.29 | -23.71 | 46.00 | 30.23 | 21.14 | 3.17 | 32.25 | --- | --- | Peak |
| 4 | 607.150 | 27.16 | -18.84 | 46.00 | 29.54 | 25.90 | 4.01 | 32.29 | --- | --- | Peak |
| 5 | 742.950 | 28.63 | -17.37 | 46.00 | 28.48 | 27.99 | 4.45 | 32.29 | --- | --- | Peak |
| 6 | 857.410 | 29.51 | -16.49 | 46.00 | 27.83 | 29.27 | 4.78 | 32.37 | --- | --- | Peak |
| 7 | 870.990 | 37.05 | | | 35.33 | 29.22 | 4.82 | 32.32 | --- | --- | Peak |
| 8 | 3592.000 | 43.07 | -30.93 | 74.00 | 61.18 | 33.67 | 9.92 | 61.70 | --- | --- | Peak |
| 9 | 5184.000 | 73.36 | | | 88.53 | 35.36 | 11.16 | 61.69 | --- | --- | Peak |
| 10 | 5808.000 | 43.70 | -30.30 | 74.00 | 57.76 | 34.85 | 12.72 | 61.63 | --- | --- | Peak |
| 11 | 8216.000 | 44.96 | -29.04 | 74.00 | 56.20 | 35.29 | 15.47 | 62.00 | --- | --- | Peak |
| 12 | 10827.000 | 45.24 | -28.76 | 74.00 | 24.55 | 38.11 | 17.74 | 35.16 | --- | --- | Peak |
| 13 | 14571.000 | 45.05 | -28.95 | 74.00 | 20.72 | 38.94 | 20.58 | 35.19 | --- | --- | Peak |
| 14 | 16452.000 | 45.60 | -28.40 | 74.00 | 18.36 | 40.25 | 22.10 | 35.11 | --- | --- | Peak |




| | | | |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------|
| Mode : | Mode 2 | Temperature : | 21~22°C |
| Test Engineer : | Yoke Si | Relative Humidity : | 51~52% |
| Test Distance : | 3m | Polarization : | Vertical |
| Remark : | #7 is system simulator signal which can be ignored. #9 is RF signals which come from WLAN Access Point used to connect the EUT, and which can be ignored. | | |

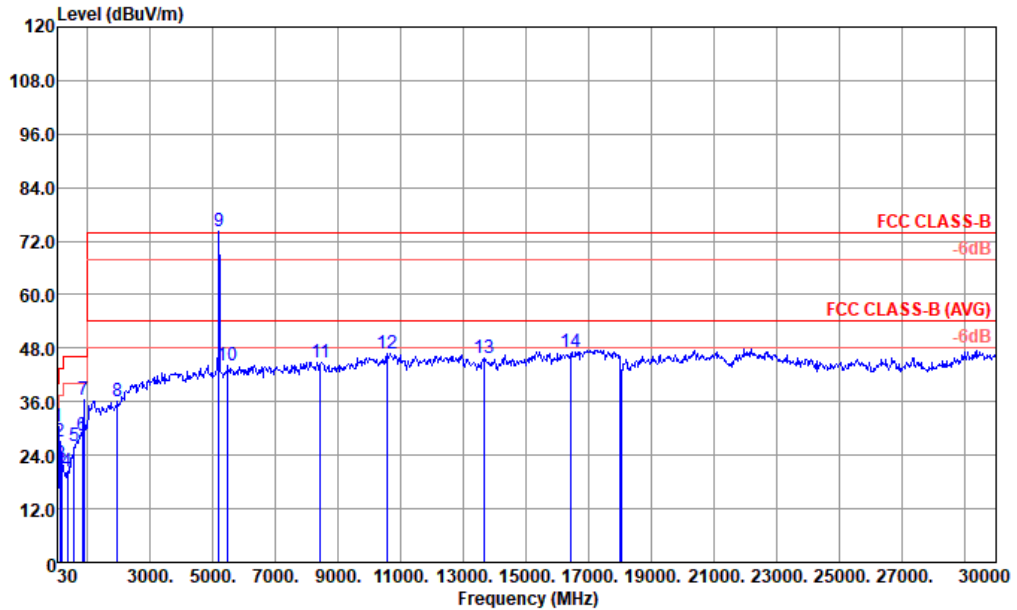

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Factor | Cable Loss | Preamp Factor | A/Pos | T/Pos | Remark |
|----|-----------|--------|---------------|---------------|----------------------|--------|---------------|------------------|-------|-------|--------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 44.550 | 30.55 | -9.45 | 40.00 | 44.60 | 17.35 | 0.78 | 32.18 | --- | --- | Peak |
| 2 | 118.270 | 27.06 | -16.44 | 43.50 | 39.97 | 17.49 | 1.76 | 32.16 | --- | --- | Peak |
| 3 | 172.590 | 22.16 | -21.34 | 43.50 | 36.59 | 15.54 | 2.13 | 32.10 | --- | --- | Peak |
| 4 | 343.310 | 20.42 | -25.58 | 46.00 | 29.30 | 20.29 | 3.02 | 32.19 | --- | --- | Peak |
| 5 | 570.290 | 25.93 | -20.07 | 46.00 | 28.78 | 25.56 | 3.89 | 32.30 | --- | --- | Peak |
| 6 | 819.580 | 28.54 | -17.46 | 46.00 | 27.57 | 28.63 | 4.68 | 32.34 | --- | --- | Peak |
| 7 | 870.990 | 36.43 | | | 34.71 | 29.22 | 4.82 | 32.32 | --- | --- | Peak |
| 8 | 1952.000 | 36.16 | -37.84 | 74.00 | 60.66 | 29.96 | 7.24 | 61.70 | --- | --- | Peak |
| 9 | 5176.000 | 74.33 | | | 89.50 | 35.36 | 11.16 | 61.69 | --- | --- | Peak |
| 10 | 5472.000 | 44.14 | -29.86 | 74.00 | 58.25 | 35.14 | 12.39 | 61.64 | --- | --- | Peak |
| 11 | 8432.000 | 44.93 | -29.07 | 74.00 | 56.49 | 35.07 | 15.60 | 62.23 | --- | --- | Peak |
| 12 | 10548.000 | 46.76 | -27.24 | 74.00 | 26.44 | 37.91 | 17.52 | 35.11 | --- | --- | Peak |
| 13 | 13635.000 | 45.87 | -28.13 | 74.00 | 22.85 | 38.45 | 19.89 | 35.32 | --- | --- | Peak |
| 14 | 16434.000 | 46.98 | -27.02 | 74.00 | 19.78 | 40.24 | 22.08 | 35.12 | --- | --- | Peak |



| | | | |
|------------------------|-----------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| Mode : | Mode 3 | Temperature : | 21~22°C |
| Test Engineer : | Yoke Si | Relative Humidity : | 51~52% |
| Test Distance : | 3m | Polarization : | Horizontal |
| Remark : | #8 is RF signals which come from Bluetooth/WLAN Access Point used to connect the EUT, and which can be ignored. | | |

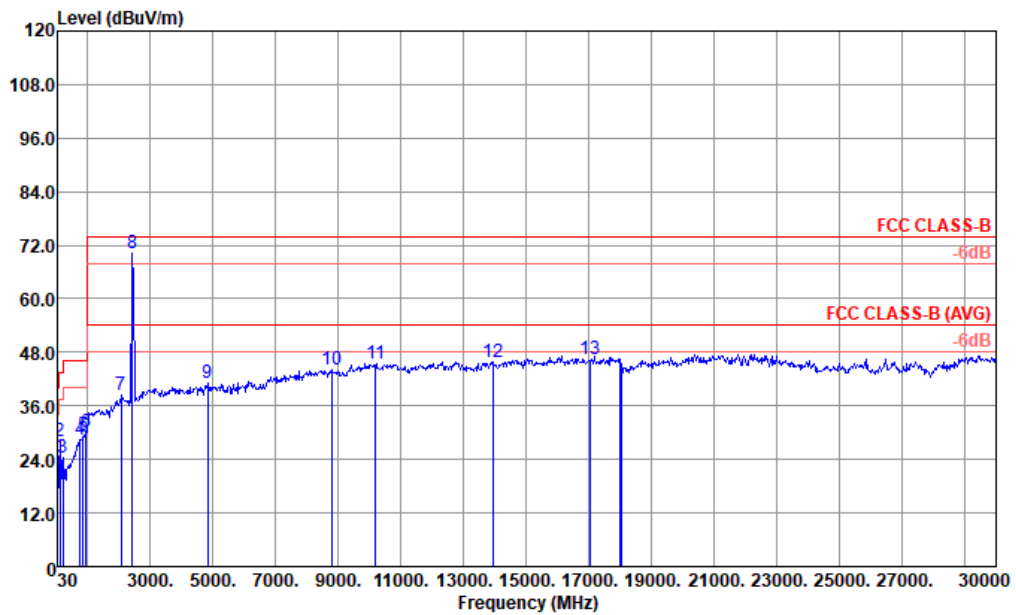


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 6111D SN44483 HORIZONTAL
 Project : (FC)101907
 Mode : 3

| | Freq | Level | Over | Limit | ReadAntenna | Cable | Preamp | A/Pos | T/Pos | Remark |
|----|-----------|--------|--------|--------|-------------|-------|--------|-------|-------|--------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg |
| 1 | 30.000 | 20.58 | -19.42 | 40.00 | 27.14 | 25.10 | 0.54 | 32.20 | --- | Peak |
| 2 | 107.600 | 27.94 | -15.56 | 43.50 | 41.62 | 16.82 | 1.69 | 32.19 | --- | Peak |
| 3 | 211.390 | 24.30 | -19.20 | 43.50 | 38.83 | 15.21 | 2.38 | 32.12 | --- | Peak |
| 4 | 757.500 | 28.51 | -17.49 | 46.00 | 28.12 | 28.20 | 4.49 | 32.30 | --- | Peak |
| 5 | 862.260 | 29.34 | -16.66 | 46.00 | 27.65 | 29.25 | 4.79 | 32.35 | --- | Peak |
| 6 | 937.920 | 29.96 | -16.04 | 46.00 | 26.61 | 30.55 | 5.00 | 32.20 | --- | Peak |
| 7 | 2064.000 | 38.35 | -35.65 | 74.00 | 61.90 | 30.47 | 7.43 | 61.45 | --- | Peak |
| 8 | 2416.000 | 70.23 | | | 91.31 | 33.37 | 7.44 | 61.89 | --- | Peak |
| 9 | 4840.000 | 40.97 | -33.03 | 74.00 | 56.51 | 34.83 | 11.60 | 61.97 | --- | Peak |
| 10 | 8792.000 | 43.96 | -30.04 | 74.00 | 53.15 | 37.25 | 15.89 | 62.33 | --- | Peak |
| 11 | 10188.000 | 45.62 | -28.38 | 74.00 | 25.98 | 37.64 | 17.22 | 35.22 | --- | Peak |
| 12 | 13959.000 | 45.72 | -28.28 | 74.00 | 22.17 | 38.58 | 20.09 | 35.12 | --- | Peak |
| 13 | 17055.000 | 46.56 | -27.44 | 74.00 | 18.46 | 40.36 | 22.76 | 35.02 | --- | Peak |



| | | | |
|-----------------|-----------------------------------------------------------------------------------------------------------------|---------------------|----------|
| Mode : | Mode 3 | Temperature : | 21~22°C |
| Test Engineer : | Yoke Si | Relative Humidity : | 51~52% |
| Test Distance : | 3m | Polarization : | Vertical |
| Remark : | #8 is RF signals which come from Bluetooth/WLAN Access Point used to connect the EUT, and which can be ignored. | | |

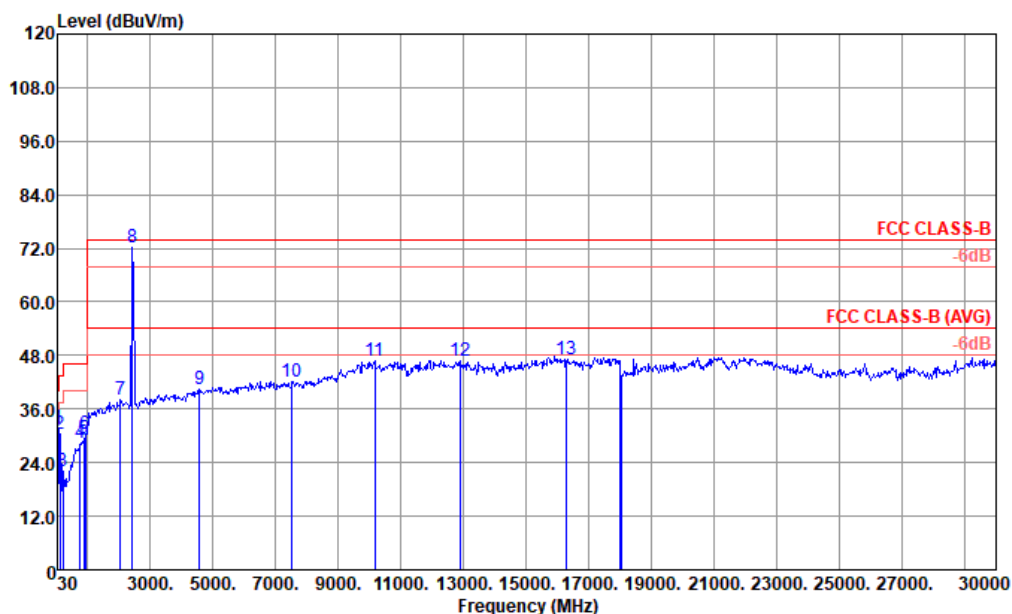


Site : 03CH02-KS
Condition : FCC CLASS-B 3m LF 6111D SN44483 VERTICAL
Project : (FC)101907
Mode : 3

| | Freq | Level | Over | Limit | ReadAntenna | Cable | Preamp | A/Pos | T/Pos | Remark |
|----|-----------|--------|--------|--------|-------------|--------|--------|--------|-------|--------|
| | MHz | dBuV/m | Limit | Line | Level | Factor | Loss | Factor | cm | deg |
| | | | dB | dBuV/m | dBuV | dB/m | dB | dB | | |
| 1 | 44.550 | 31.81 | -8.19 | 40.00 | 45.86 | 17.35 | 0.78 | 32.18 | --- | Peak |
| 2 | 105.660 | 30.52 | -12.98 | 43.50 | 44.40 | 16.64 | 1.67 | 32.19 | --- | Peak |
| 3 | 213.330 | 22.13 | -21.37 | 43.50 | 36.64 | 15.23 | 2.39 | 32.13 | --- | Peak |
| 4 | 764.290 | 28.25 | -17.75 | 46.00 | 27.84 | 28.20 | 4.51 | 32.30 | --- | Peak |
| 5 | 865.170 | 29.39 | -16.61 | 46.00 | 27.69 | 29.24 | 4.80 | 32.34 | --- | Peak |
| 6 | 919.490 | 30.38 | -15.62 | 46.00 | 27.78 | 29.85 | 4.95 | 32.20 | --- | Peak |
| 7 | 2040.000 | 38.04 | -35.96 | 74.00 | 61.79 | 30.28 | 7.37 | 61.40 | --- | Peak |
| 8 | 2416.000 | 72.26 | | | 93.34 | 33.37 | 7.44 | 61.89 | --- | Peak |
| 9 | 4560.000 | 40.50 | -33.50 | 74.00 | 56.77 | 34.89 | 11.24 | 62.40 | --- | Peak |
| 10 | 7512.000 | 42.23 | -31.77 | 74.00 | 53.01 | 36.51 | 14.56 | 61.85 | --- | Peak |
| 11 | 10161.000 | 46.64 | -27.36 | 74.00 | 27.04 | 37.62 | 17.21 | 35.23 | --- | Peak |
| 12 | 12879.000 | 46.81 | -27.19 | 74.00 | 24.24 | 38.73 | 19.41 | 35.57 | --- | Peak |
| 13 | 16281.000 | 47.20 | -26.80 | 74.00 | 20.24 | 40.23 | 21.91 | 35.18 | --- | Peak |




| | | | |
|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------------|
| Mode : | Mode 4 | Temperature : | 21~22°C |
| Test Engineer : | Yoke Si | Relative Humidity : | 51~52% |
| Test Distance : | 3m | Polarization : | Horizontal |
| Remark : | #5 is system simulator signal which can be ignored. #9 is RF signals which come from WLAN Access Point used to connect the EUT, and which can be ignored. | | |

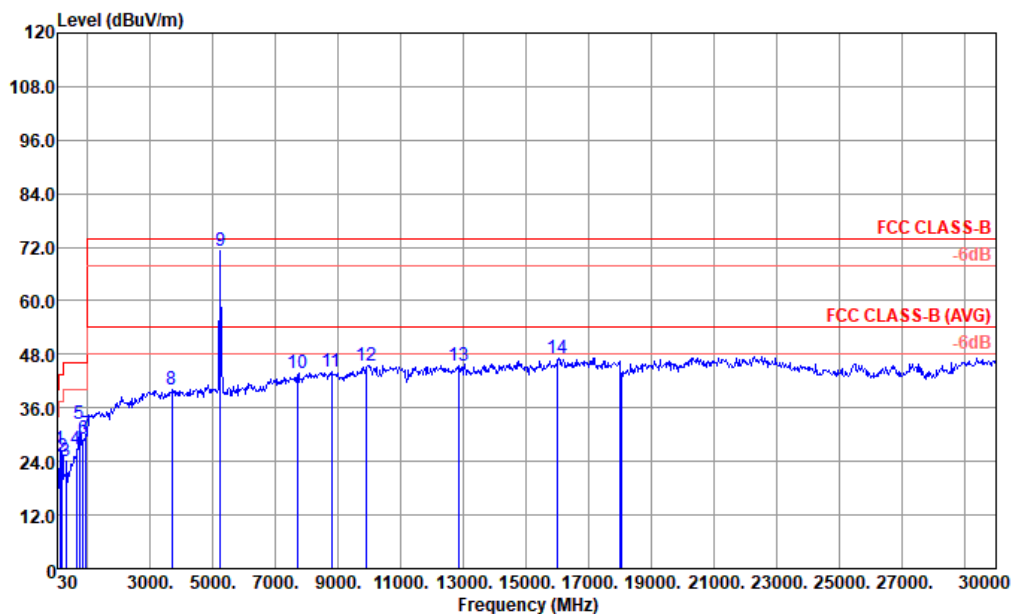

Site : 03CH02-KS
Condition : FCC CLASS-B 3m LF 6111D SN44483 HORIZONTAL
Project : (FC)101907
Mode : 4

| | Freq | Level | Over | Limit | ReadAntenna | Cable | Preamp | A/Pos | T/Pos | Remark |
|----|-----------|--------|--------|--------|-------------|--------|--------|--------|-------|--------|
| | MHz | dBuV/m | Limit | Line | Level | Factor | Loss | Factor | cm | deg |
| | | | dB | dBuV/m | dBuV | dB/m | dB | dB | | |
| 1 | 116.330 | 26.90 | -16.60 | 43.50 | 39.95 | 17.38 | 1.74 | 32.17 | --- | Peak |
| 2 | 183.260 | 25.00 | -18.50 | 43.50 | 39.89 | 15.01 | 2.20 | 32.10 | --- | Peak |
| 3 | 312.270 | 24.15 | -21.85 | 46.00 | 33.87 | 19.52 | 2.88 | 32.12 | --- | Peak |
| 4 | 646.920 | 26.62 | -19.38 | 46.00 | 28.23 | 26.46 | 4.14 | 32.21 | --- | Peak |
| 5 | 741.010 | 32.26 | | | 32.16 | 27.94 | 4.44 | 32.28 | --- | Peak |
| 6 | 843.830 | 29.03 | -16.97 | 46.00 | 27.51 | 29.17 | 4.74 | 32.39 | --- | Peak |
| 7 | 945.680 | 29.92 | -16.08 | 46.00 | 26.25 | 30.85 | 5.02 | 32.20 | --- | Peak |
| 8 | 3688.000 | 40.15 | -33.85 | 74.00 | 56.13 | 34.86 | 10.62 | 61.46 | --- | Peak |
| 9 | 5224.000 | 71.15 | | | 97.84 | 34.99 | 0.00 | 61.68 | --- | Peak |
| 10 | 7720.000 | 43.71 | -30.29 | 74.00 | 53.36 | 36.63 | 15.54 | 61.82 | --- | Peak |
| 11 | 8792.000 | 43.96 | -30.04 | 74.00 | 52.23 | 37.25 | 16.81 | 62.33 | --- | Peak |
| 12 | 9909.000 | 45.62 | -28.38 | 74.00 | 26.38 | 37.50 | 16.91 | 35.17 | --- | Peak |
| 13 | 12843.000 | 45.59 | -28.41 | 74.00 | 23.03 | 38.75 | 19.38 | 35.57 | --- | Peak |
| 14 | 16011.000 | 47.03 | -26.97 | 74.00 | 20.51 | 40.20 | 21.61 | 35.29 | --- | Peak |

| | | | |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| Mode : | Mode 4 | Temperature : | 21~22°C |
| Test Engineer : | Yoke Si | Relative Humidity : | 51~52% |
| Test Distance : | 3m | Polarization : | Vertical |
| Remark : | #5 is system simulator signal which can be ignored. #9 is RF signals which come from WLAN Access Point used to connect the EUT, and which can be ignored. | | |

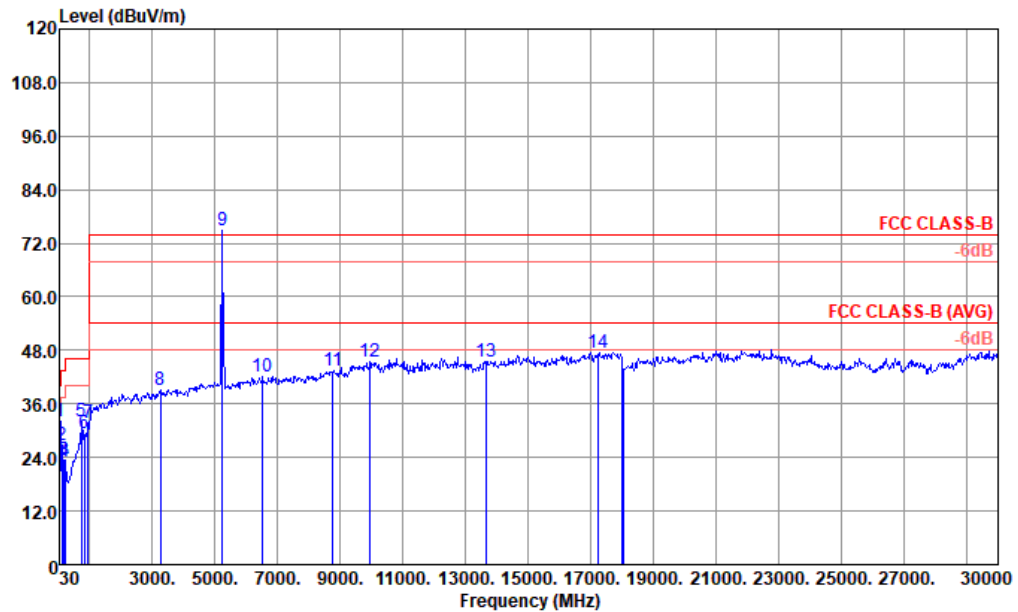


Site : 03CH02-KS
Condition : FCC CLASS-B 3m LF 6111D SN44483 VERTICAL
Project : (FC)101907
Mode : 4

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Factor | Cable Loss | Preamp Factor | A/Pos | T/Pos | Remark |
|----|-----------|--------|---------------|---------------|----------------------|--------|---------------|------------------|-------|-------|--------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 44.550 | 32.15 | -7.85 | 40.00 | 46.20 | 17.35 | 0.78 | 32.18 | --- | --- | Peak |
| 2 | 107.600 | 26.80 | -16.70 | 43.50 | 40.48 | 16.82 | 1.69 | 32.19 | --- | --- | Peak |
| 3 | 176.470 | 23.42 | -20.08 | 43.50 | 38.05 | 15.32 | 2.15 | 32.10 | --- | --- | Peak |
| 4 | 214.300 | 23.07 | -20.43 | 43.50 | 37.57 | 15.24 | 2.39 | 32.13 | --- | --- | Peak |
| 5 | 741.980 | 32.03 | | | 31.90 | 27.96 | 4.45 | 32.28 | --- | --- | Peak |
| 6 | 839.950 | 29.45 | -16.55 | 46.00 | 28.02 | 29.08 | 4.73 | 32.38 | --- | --- | Peak |
| 7 | 953.440 | 31.63 | -14.37 | 46.00 | 27.81 | 30.97 | 5.04 | 32.19 | --- | --- | Peak |
| 8 | 3248.000 | 39.01 | -34.99 | 74.00 | 57.28 | 33.13 | 10.01 | 61.41 | --- | --- | Peak |
| 9 | 5224.000 | 74.71 | | | 101.40 | 34.99 | 0.00 | 61.68 | --- | --- | Peak |
| 10 | 6512.000 | 41.98 | -32.02 | 74.00 | 53.99 | 35.36 | 14.29 | 61.66 | --- | --- | Peak |
| 11 | 8768.000 | 43.33 | -30.67 | 74.00 | 51.68 | 37.20 | 16.78 | 62.33 | --- | --- | Peak |
| 12 | 9945.000 | 45.58 | -28.42 | 74.00 | 26.33 | 37.50 | 16.97 | 35.22 | --- | --- | Peak |
| 13 | 13671.000 | 45.61 | -28.39 | 74.00 | 22.52 | 38.47 | 19.91 | 35.29 | --- | --- | Peak |
| 14 | 17235.000 | 47.54 | -26.46 | 74.00 | 19.13 | 40.58 | 22.92 | 35.09 | --- | --- | Peak |



| | | | |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------------|
| Mode : | Mode 5 | Temperature : | 21~22°C |
| Test Engineer : | Yoke Si | Relative Humidity : | 51~52% |
| Test Distance : | 3m | Polarization : | Horizontal |
| Remark : | #2 is FM signal which can be ignored. #9 is RF signals which come from Bluetooth/WLAN Access Point used to connect the EUT, and which can be ignored. | | |

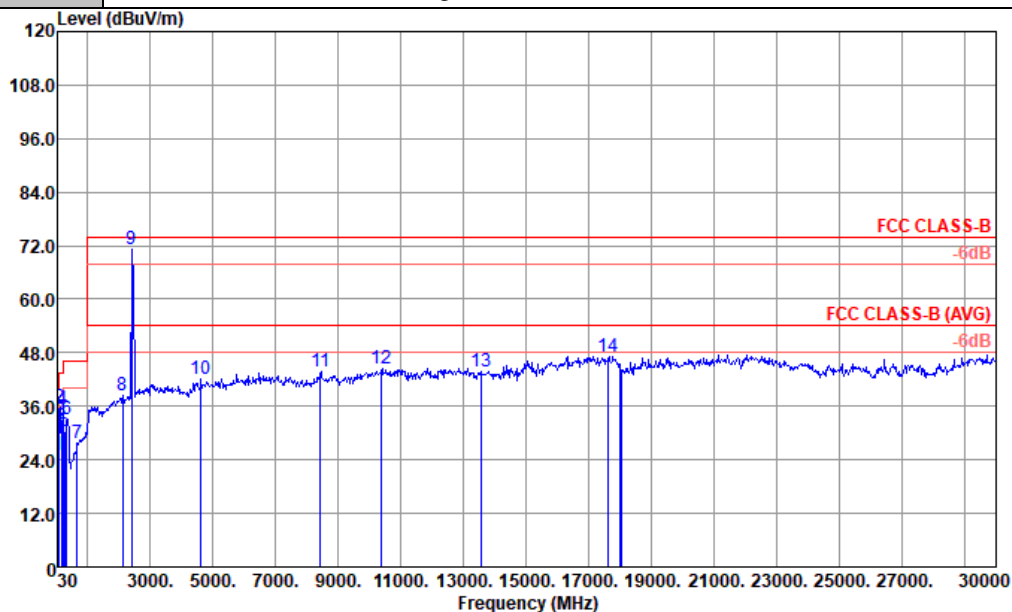


Site : 03CH02-KS
Condition : FCC CLASS-B 3m LF 6111D SN44483 HORIZONTAL
Project : (FC)101907
Mode : 5

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Cable Factor | Preamp Loss | A/Pos | T/Pos | Remark |
|----|-----------|--------|------------|------------|-------------------|--------------|-------------|-------|-------|--------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg |
| 1 | 71.710 | 25.01 | -14.99 | 40.00 | 43.31 | 12.70 | 1.20 | 32.20 | --- | Peak |
| 2 | 88.200 | 35.65 | | | 51.86 | 14.56 | 1.45 | 32.22 | --- | Peak |
| 3 | 167.740 | 32.89 | -10.61 | 43.50 | 47.03 | 15.86 | 2.10 | 32.10 | --- | Peak |
| 4 | 216.240 | 35.34 | -10.66 | 46.00 | 49.81 | 15.26 | 2.40 | 32.13 | --- | Peak |
| 5 | 263.770 | 30.55 | -15.45 | 46.00 | 39.94 | 20.13 | 2.65 | 32.17 | --- | Peak |
| 6 | 335.550 | 33.15 | -12.85 | 46.00 | 42.27 | 20.06 | 2.99 | 32.17 | --- | Peak |
| 7 | 649.830 | 27.88 | -18.12 | 46.00 | 29.43 | 26.50 | 4.15 | 32.20 | --- | Peak |
| 8 | 2112.000 | 38.34 | -35.66 | 74.00 | 60.76 | 31.60 | 7.49 | 61.51 | --- | Peak |
| 9 | 2408.000 | 71.17 | | | 93.44 | 32.18 | 7.44 | 61.89 | --- | Peak |
| 10 | 4608.000 | 42.01 | -31.99 | 74.00 | 58.52 | 34.50 | 11.31 | 62.32 | --- | Peak |
| 11 | 8432.000 | 43.62 | -30.38 | 74.00 | 54.18 | 36.07 | 15.60 | 62.23 | --- | Peak |
| 12 | 10386.000 | 44.59 | -29.41 | 74.00 | 51.58 | 37.61 | 17.39 | 61.99 | --- | Peak |
| 13 | 13572.000 | 43.91 | -30.09 | 74.00 | 46.82 | 38.88 | 19.86 | 61.65 | --- | Peak |
| 14 | 17631.000 | 47.12 | -26.88 | 74.00 | 43.28 | 41.65 | 23.27 | 61.08 | --- | Peak |



| | | | |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------|
| Mode : | Mode 5 | Temperature : | 21~22°C |
| Test Engineer : | Yoke Si | Relative Humidity : | 51~52% |
| Test Distance : | 3m | Polarization : | Vertical |
| Remark : | #2 is FM signal which can be ignored. #8 is RF signals which come from Bluetooth/WLAN Access Point used to connect the EUT, and which can be ignored. | | |

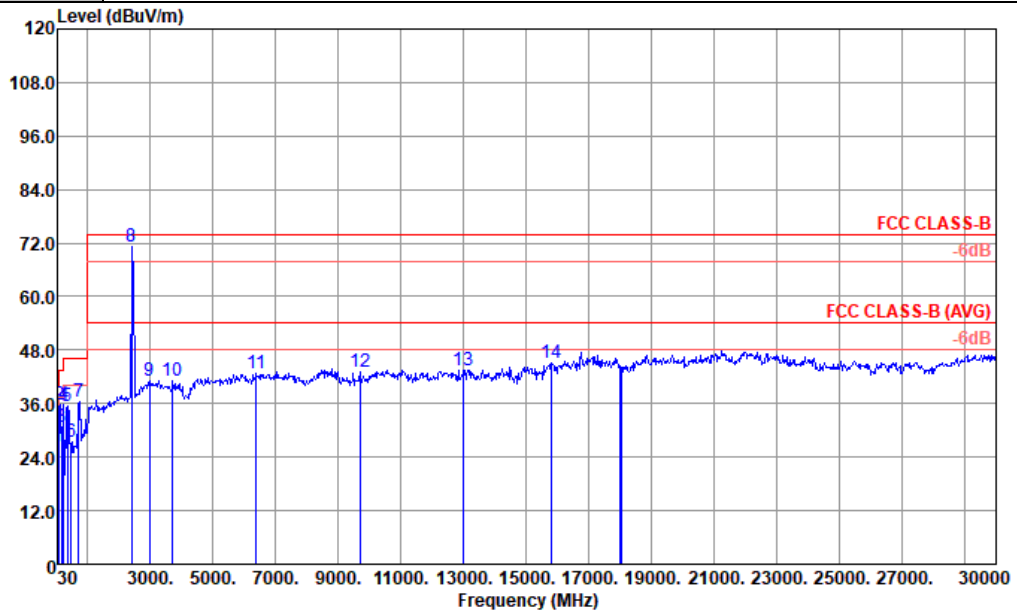


Site : 03CH02-KS
Condition : FCC CLASS-B 3m LF 6111D SN44483 VERTICAL
Project : (FC)101907
Mode : 5

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level Factor | Cable Loss | Preamp Factor | A/Pos | T/Pos | Remark | |
|----|-----------|--------|---------------|---------------|-----------------------------|---------------|------------------|-------|-------|--------|------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 71.710 | 26.39 | -13.61 | 40.00 | 44.69 | 12.70 | 1.20 | 32.20 | --- | --- | Peak |
| 2 | 88.200 | 35.85 | | | 52.06 | 14.56 | 1.45 | 32.22 | --- | --- | Peak |
| 3 | 167.740 | 30.89 | -12.61 | 43.50 | 45.03 | 15.86 | 2.10 | 32.10 | --- | --- | Peak |
| 4 | 239.520 | 35.63 | -10.37 | 46.00 | 47.79 | 17.50 | 2.52 | 32.18 | --- | --- | Peak |
| 5 | 349.130 | 35.44 | -10.56 | 46.00 | 44.12 | 20.47 | 3.05 | 32.20 | --- | --- | Peak |
| 6 | 480.080 | 27.45 | -18.55 | 46.00 | 32.56 | 23.64 | 3.57 | 32.32 | --- | --- | Peak |
| 7 | 719.670 | 36.43 | -9.57 | 46.00 | 37.00 | 27.29 | 4.38 | 32.24 | --- | --- | Peak |
| 8 | 2408.000 | 71.22 | | | 93.49 | 32.18 | 7.44 | 61.89 | --- | --- | Peak |
| 9 | 2968.000 | 41.07 | -32.93 | 74.00 | 60.83 | 32.82 | 8.99 | 61.57 | --- | --- | Peak |
| 10 | 3720.000 | 40.99 | -33.01 | 74.00 | 59.11 | 33.17 | 10.08 | 61.37 | --- | --- | Peak |
| 11 | 6376.000 | 42.86 | -31.14 | 74.00 | 55.36 | 35.72 | 13.43 | 61.65 | --- | --- | Peak |
| 12 | 9684.000 | 43.23 | -30.77 | 74.00 | 51.73 | 36.93 | 16.59 | 62.02 | --- | --- | Peak |
| 13 | 12987.000 | 43.60 | -30.40 | 74.00 | 46.37 | 39.30 | 19.49 | 61.56 | --- | --- | Peak |
| 14 | 15804.000 | 45.01 | -28.99 | 74.00 | 45.25 | 40.66 | 21.47 | 62.37 | --- | --- | Peak |



| | | | |
|-----------------|-------------------------------------------------------------------------------------------------------|---------------------|------------|
| Mode : | Mode 6 | Temperature : | 21~22°C |
| Test Engineer : | Yoke Si | Relative Humidity : | 51~52% |
| Test Distance : | 3m | Polarization : | Horizontal |
| Remark : | #9 is RF signals which come from WLAN Access Point used to connect the EUT, and which can be ignored. | | |

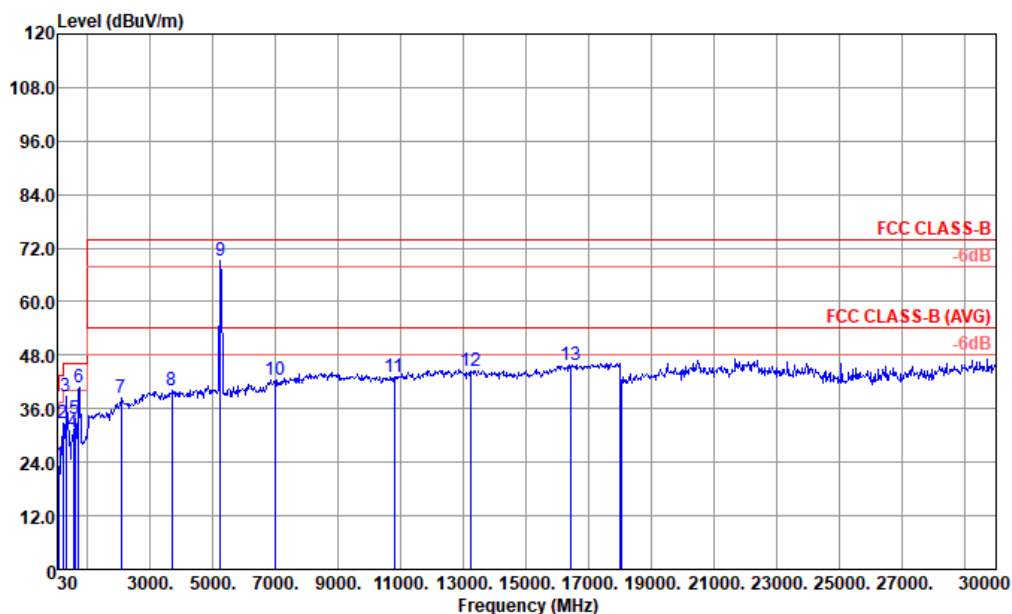


Site : 03CH02-KS
Condition : FCC CLASS-B 3m LF 6111D SN44483 HORIZONTAL
Project : (FC)101907
Mode : 1

| | Freq | Level | Over | Limit | ReadAntenna | Cable | Preamp | A/Pos | T/Pos | Remark |
|----|-----------|--------|--------|--------|-------------|-------|--------|-------|-------|--------|
| | MHz | dBuV/m | Limit | Line | Level | Loss | Factor | cm | deg | |
| | | | dB | dBuV/m | dBuV | dB/m | dB | dB | | |
| 1 | 88.200 | 23.56 | -19.94 | 43.50 | 39.88 | 14.56 | 1.34 | 32.22 | --- | Peak |
| 2 | 216.240 | 32.73 | -13.27 | 46.00 | 47.51 | 15.26 | 2.09 | 32.13 | --- | Peak |
| 3 | 307.420 | 38.82 | -7.18 | 46.00 | 48.87 | 19.48 | 2.58 | 32.11 | --- | Peak |
| 4 | 531.490 | 30.69 | -15.31 | 46.00 | 34.98 | 24.88 | 3.17 | 32.34 | --- | Peak |
| 5 | 599.390 | 33.91 | -12.09 | 46.00 | 36.79 | 25.79 | 3.63 | 32.30 | --- | Peak |
| 6 | 719.670 | 40.85 | -5.15 | 46.00 | 41.80 | 27.29 | 4.00 | 32.24 | 100 | Peak |
| 7 | 2064.000 | 38.35 | -35.65 | 74.00 | 62.50 | 30.47 | 6.83 | 61.45 | --- | Peak |
| 8 | 3688.000 | 40.15 | -33.85 | 74.00 | 57.47 | 34.86 | 9.28 | 61.46 | --- | Peak |
| 9 | 5224.000 | 69.15 | | | 84.63 | 34.99 | 11.21 | 61.68 | --- | Peak |
| 10 | 7000.000 | 42.40 | -31.60 | 74.00 | 54.99 | 36.20 | 13.11 | 61.90 | --- | Peak |
| 11 | 10782.000 | 43.18 | -30.82 | 74.00 | 50.58 | 38.07 | 16.46 | 61.93 | --- | Peak |
| 12 | 13221.000 | 44.52 | -29.48 | 74.00 | 49.23 | 38.55 | 18.35 | 61.61 | --- | Peak |
| 13 | 16425.000 | 45.88 | -28.12 | 74.00 | 47.10 | 40.24 | 20.63 | 62.09 | --- | Peak |



| | | | |
|------------------------|-------------------------------------------------------------------------------------------------------|----------------------------|----------|
| Mode : | Mode 6 | Temperature : | 21~22°C |
| Test Engineer : | Yoke Si | Relative Humidity : | 51~52% |
| Test Distance : | 3m | Polarization : | Vertical |
| Remark : | #9 is RF signals which come from WLAN Access Point used to connect the EUT, and which can be ignored. | | |

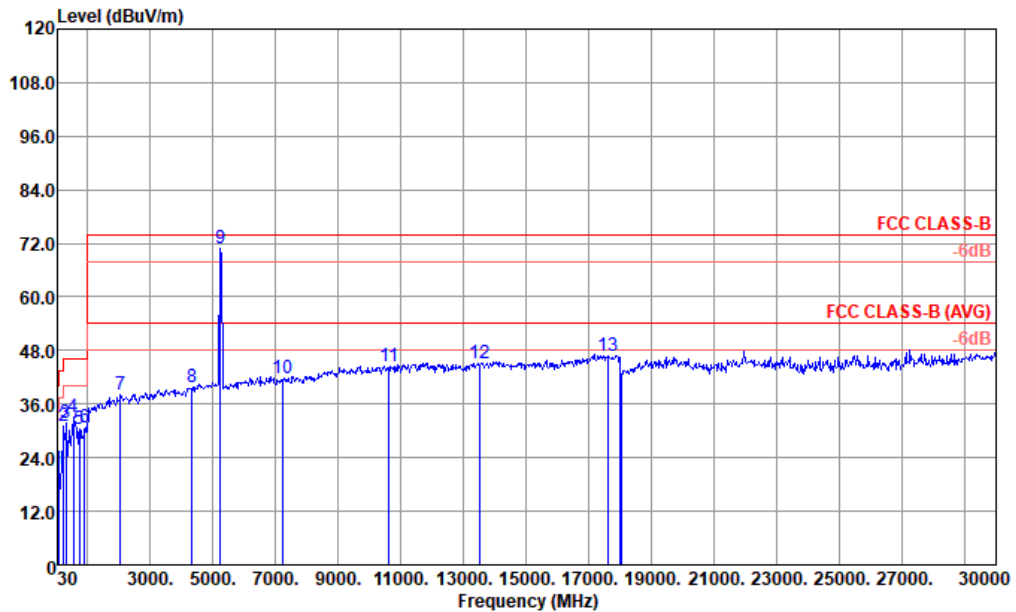

Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 6111D SN44483 VERTICAL
 Project : (FC)101907
 Mode : 1

| | Freq | Level | Over | Limit | ReadAntenna | Cable | Preamp | A/Pos | T/Pos | Remark |
|----|-----------|--------|--------|--------|-------------|-------|--------|-------|-------|--------|
| | MHz | dBuV/m | Limit | Line | Level | Loss | Factor | cm | deg | |
| | | | dB | dBuV/m | dBuV | dB/m | dB | | | |
| 1 | 62.010 | 21.48 | -18.52 | 40.00 | 40.46 | 12.02 | 1.10 | 32.10 | --- | Peak |
| 2 | 236.610 | 31.04 | -14.96 | 46.00 | 43.95 | 17.17 | 2.09 | 32.17 | --- | Peak |
| 3 | 310.330 | 31.79 | -14.21 | 46.00 | 41.82 | 19.50 | 2.59 | 32.12 | --- | Peak |
| 4 | 531.490 | 33.08 | -12.92 | 46.00 | 37.37 | 24.88 | 3.17 | 32.34 | --- | Peak |
| 5 | 743.920 | 30.31 | -15.69 | 46.00 | 30.53 | 28.02 | 4.05 | 32.29 | --- | Peak |
| 6 | 898.150 | 30.63 | -15.37 | 46.00 | 29.25 | 29.11 | 4.48 | 32.21 | --- | Peak |
| 7 | 2040.000 | 38.04 | -35.96 | 74.00 | 62.38 | 30.28 | 6.78 | 61.40 | --- | Peak |
| 8 | 4320.000 | 39.84 | -34.16 | 74.00 | 57.17 | 34.90 | 10.11 | 62.34 | --- | Peak |
| 9 | 5232.000 | 70.77 | | | 86.20 | 35.01 | 11.24 | 61.68 | --- | Peak |
| 10 | 7224.000 | 41.92 | -32.08 | 74.00 | 53.96 | 36.33 | 13.51 | 61.88 | --- | Peak |
| 11 | 10629.000 | 44.57 | -29.43 | 74.00 | 52.20 | 37.96 | 16.36 | 61.95 | --- | Peak |
| 12 | 13536.000 | 45.12 | -28.88 | 74.00 | 49.75 | 38.41 | 18.62 | 61.66 | --- | Peak |
| 13 | 17595.000 | 46.79 | -27.21 | 74.00 | 45.67 | 41.01 | 21.22 | 61.11 | --- | Peak |

—THE END—