

Report No.: SEWM2212000311RG01

Rev.: Page: 1 of 27

## **TEST REPORT**

**Application No.:** SEWM2212000311RG

Applicant: Sony Corporation

**Address of Applicant:** 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

Manufacturer: Sony Corporation

Address of Manufacturer: 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, NFC and GNSS **EUT Description:** 

Trade Mark: Sony

FCC ID: PY7-83032A Standards: 47 CFR Part 2

47 CFR Part 22 47 CFR Part 24 47 CFR Part 27

**Date of Receipt:** 2022/11/30

2022/12/20 to 2023/01/10 (for original report SEWM2212000310RG01) Date of Test:

2022/12/20 to 2023/01/13 (for new report SEWM2212000311RG01)

Date of Issue: 2023/02/24

Test Result: PASS \*

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Panta Sun Wireless Laboratory Manager



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国。苏州。中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 2 of 27

## 1 Version

Revision Record						
Version Chapter Date Modifier Remark						
01		2023/02/24		Original		

Prepared By	weller lin		
	(Weller Liu) / Test Engineer		
Checked By	well wei'		
	(Well Wei) / Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAD Doccheck@sss.com

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Ploti Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 3 of 27

### **Contents**

1	Version	on	2
2	Test S	Summary	4
	2.1	UMTS Band 4 /LTE Band 4	4
3	Gene	ral Information	6
	3.1	Details of Client	6
	3.2	Test Location	6
	3.3	Test Facility	6
	3.4	General Description of EUT	7
	3.5	Test Mode	8
	3.6	Test Environment	8
	3.7	Description of Support Units	8
	3.8	Technical Specification	9
	3.9	Test Frequencies	10
4	Descr	iption of Tests	12
	4.1	Conducted Output Power	12
	4.2	Effective (Isotropic) Radiated Power of Transmitter	13
	4.3	Occupied Bandwidth	14
	4.4	Band Edge at Antenna Terminals	
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	16
	4.6	Peak-Average Ratio	17
	4.7	Field Strength of Spurious Radiation	18
	4.8	Frequency Stability / Temperature Variation	19
	4.9	Test Setups	20
	4	1.9.1 Test Setup 1	20
	4	1.9.2 Test Setup 2	20
	4	4.9.3 Test Setup 3	21
	4.10	Test Conditions	
5	Main	Test Instruments	
6		urement Uncertainty	
7		ndixes	



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed worled a vailable on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.sapx">http://www.sgs.com/en/Terms-and-Conditions.sapx</a> and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.sapx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.sapx</a> tkention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of illent's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content on ppearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the sesults shown in this test report refer only to the sample(s) setzed and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 4 of 27

## 2 Test Summary

### 2.1 UMTS Band 4 /LTE Band 4

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix B.2&B.3	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Section 2 of Appendix B.2&B.3	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.2&B.3	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.2&B.3	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.2&B.3	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.2&B.3	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.2&B.3	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(2) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.2&B.3	Pass
Remark: This is a	n additional band test.			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic formard documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the contents or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 5 of 27

#### Remark:

This test report (Report No.: SEWM2212000311RG01 issue on 2023/02/24) is based on the original test report (Report No.: SEWM2212000310RG01 issue on 2023/02/23).

#### Reference detail section:

UMTS Band 4 / LTE Band 4 testing are added, other band in this report refer to the previous report with report number SEWM2212000310RG01 issue on 2023/02/23.





Report No.: SEWM2212000311RG01

Rev.: 01 Page: 6 of 27

### 3 General Information

#### 3.1 Details of Client

Applicant:	Sony Corporation
Address of Applicant:	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Manufacturer:	Sony Corporation
Address of Manufacturer:	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

#### 3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Weller Liu, Tizzy Song

## 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

#### • Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

#### • FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic forms documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 7 of 27

## 3.4 General Description of EUT

EUT Description:	GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, NFC and GNSS							
Trade Mark:	Sony	Sony						
Hardware Version:	Α							
Software Version:	0.122							
CNI	RF Conducted	HQ62B						
SN:	RSE	HQ62B						
Antenna Type:	PIFA Antenna							
	GSM850:	-1.3dl	Bi(Ant0)	GSM1900:	1.8dBi(Ant1)			
Antenna Gain:	WCDMA Band IV: 1.7dBi(Ant1)		i(Ant1)	LTE Band 4:	1.7dBi(Ant1)			
	LTE Band 12: -2.3dBi(A		Bi(Ant0)					
DE Cables	0.8dB(Below 1GH	lz)	1.0dB(1.0~2.	4GHz)	1.2dB(2.4~3.4GHz)			
RF Cable:	1.5dB(Above 3.40	SHz)						

#### Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic formard documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the contents or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 8 of 27

### 3.5 Test Mode

Test Mode	Test Modes Description			
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation			
GSM/TM2	GSM system, EGPRS, 8PSK modulation			
UMTS/TM1	UMTS system, WCDMA, QPSK modulation			
UMTS/TM2	UMTS system, WCDMA, 16QAM modulation			
LTE/TM1	LTE system, QPSK modulation			
LTE/TM2	LTE system, 16QAM modulation			
LTE/TM3	LTE system, 64QAM modulation			
Remark: The test mode(s) are selected according to relevant radio technology specifications.				

### 3.6 Test Environment

<b>Environment Parameter</b>		101.0 kPa Selected Values During Tests			
Relative Humidity		44-46 % RH Ambient			
Value		Temperature(°C)	Voltage(V)		
NTNV		22~23	3.89		
LTLV		-30	3.40		
LTHV		-30	4.48		
HTLV		50	3.40		
HTHV		50	4.48		
Remark:					
NV: Normal Voltage LV: Low		Extreme Test Voltage	HV: High Extreme Test Voltage		
NT: Normal Temperature LT: Low		Extreme Test Temperature	HT: High Extreme Test Temperature		

## 3.7 Description of Support Units

The EUT has been tested as an independent unit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Ferms-and-Conditions.aspx.aaf">https://www.sgs.com/en/Ferms-and-Conditions.aspx.aaf</a>, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx.adtention">https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx.adtention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 9 of 27

## 3.8 Technical Specification

3.8 Technical Specification							
Characteristics	Description						
Radio System Type	☐ GSM ☐ UMTS		⊠L	.TE			
	Band		TX			RX	
	GSM850		824 to 849 MHz			869 to 89	94 MHz
Cupported Fraguesia Banga	GSM1900		1850 to	1910 MHz		1930 to	1990 MHz
Supported Frequency Range	UMTS Band IV	1	1710 to	1755 MHz		2110 to 2	2155 MHz
	LTE Band 4		1710 to	1755 MHz		2110 to 2	2155 MHz
	LTE Band 12		699 to 7	716 MHz		729 to 74	46 MHz
	GSM system:		⊠0.2 M	Hz			
	UMTS system:		⊠5 MH	Z			
Supported Channel Bandwidth	LTE Band 4		⊠1.4 M ⊠15 MH	Hz ⊠3 MHz Hz ⊠20 MHz		]5 MHz	⊠10 MHz
	LTE Band 12		⊠1.4 M	Hz ⊠3 MHz	$\boxtimes$	]5 MHz	⊠10 MHz
		Note1: WCDMA supports HSUPA, HSDPA, DC-HSDPA,HSPA+, but only the worst case was tested and the data displayed in this report.					, but only
Characteristics	Description						
	GSM:	GM	ISK	8PSK			
	GSM850	246	KGXW	246KG7W			
	GSM1900	245	KGXW	246KG7W			
	UMTS:	QP	SK				
	Band IV	4M	15F9W				
Designation of Emissions	E-UTRA:	QP	SK	16QAM	640	QAM	
(Remark: the necessary		1M	09G7D	1M09W7D	1M0	09W7D	
bandwidth of which is the worst value from the		2M	69G7D	2M69W7D	2M6	69W7D	
measured occupied	LTE Band 4	4M	48G7D	4M47W7D	4M4	49W7D	
bandwidths for each type of channel bandwidth	LIL Dand 4	8M	94G7D	8M93W7D	8M9	94W7D	
configuration.)		13	//5G7D	13M5W7D	13N	//5W7D	
		18	MOG7D	17M9W7D	17N	Л9W7D	
			10G7D	1M09W7D	1M0	09W7D	
	LTE Dec 140	2M	70G7D	2M69W7D	2M6	69W7D	
	LTE Band 12	4M	48G7D	4M47W7D	4M <sup>2</sup>	48W7D	
		8M	94G7D	8M91W7D	8M9	93W7D	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document one one exore exercises and their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CAD Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 sgs.china@sgs.com

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 10 of 27

## 3.9 Test Frequencies

Test Mode	Test Mode TX / RX		RF Channel			
rest wode	IA/NA	Low (L)	Middle (M)	High (H)		
	TX	Channel 128	Channel 190	Channel 251		
GSM850		824.2MHz	836.6 MHz	848.8 MHz		
		Channel 128	Channel 190	Channel 251		
	RX	869.2 MHz	881.6 MHz	893.8 MHz		

Tost Mode	Test Mode TX / RX		RF Channel			
1 est Mode			Middle (M)	High (H)		
GSM1900	TX	Channel 512	Channel 661	Channel 810		
		1850.2MHz	1880.0 MHz	1909.8 MHz		
		Channel 512	Channel 661	Channel 810		
	RX	1930.2 MHz	1960.0 MHz	1989.8 MHz		

Test Mode	TX / RX	RF Channel			
rest wode		Low (L)	Middle (M)	High (H)	
		Channel 1312	Channel 1413	Channel 1513	
WCDMA Band IV	TX	1712.4MHz	1732.6 MHz	1752.6 MHz	
		Channel 1537	Channel 1638	Channel 1738	
	RX	2112.4 MHz	2132.6 MHz	2152.6 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAD Doccheck@sss.com

South of No. 6 Plant, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国 (江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 11 of 27

			raye.	11 01 21	
Test Mode	Bandwidth	TX / RX	RF Channel		
1 est Mode			Low (L)	Middle (M)	High (H)
			Channel 19957	Channel 20175	Channel 20393
		TX	1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375
		KA	2112.5 MHz	2132.5MHz	2152.5 MHz
			Channel 19965	Channel 20175	Channel 20385
		TX	1711.5 MHz	1732.5 MHz	1753.5 MHz
	3MHz	DV	Channel 2000	Channel 2175	Channel 2350
		RX	2115 MHz	2132.5MHz	2150 MHz
			Channel 19975	Channel 20175	Channel 20375
	5MHz	TX	1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
LTE Band 4			2112.5 MHz	2132.5MHz	2152.5 MHz
		TX	Channel 20000	Channel 20175	Channel 20350
			1715 MHz	1732.5 MHz	1750 MHz
	10MHz	RX	Channel 2000	Channel 2175	Channel 2350
		IVA	2115 MHz	2132.5MHz	2150 MHz
	15MHz		Channel 20025	Channel 20175	Channel 20325
		TX	1717.5 MHz	1732.5 MHz	1747.5 MHz
_		RX	Channel 2025	Channel 2175	Channel 2325
			2117.5 MHz	2132.5MHz	2147.5 MHz
	20MHz		Channel 20050	Channel 20175	Channel 20300
		TX	1720 MHz	1732.5 MHz	1745 MHz
		DV	Channel 2050	Channel 2175	Channel 2300
		RX	2120 MHz	2132.5MHz	2145 MHz

Toot Made	Dondwidth	TX / RX	RF Channel			
Test Mode	Bandwidth		Low (L)	Middle (M)	High (H)	
		TX	Channel 23017	Channel 23095	Channel 23173	
			699.7 MHz	707.5 MHz	715.3 MHz	
	1.4MHz	RX	Channel 5017	Channel 5095	Channel 5173	
		KA	729.7 MHz	737.5 MHz	745.3 MHz	
			Channel 23025	Channel 23095	Channel 23165	
	3MHz	TX	700.5 MHz	707.5 MHz	714.5 MHz	
		RX	Channel 5025	Channel 5095	Channel 5165	
LTE Daniel 40			730.5 MHz	737.5 MHz	744.5 MHz	
LTE Band 12	5MHz	TX	Channel 23035	Channel 23095	Channel 23155	
			701.5 MHz	707.5 MHz	713.5 MHz	
		RX	Channel 5035	Channel 5095	Channel 5155	
_			731.5 MHz	737.5 MHz	743.5 MHz	
	10MHz TX	111	Channel 23060	Channel 23095	Channel 23130	
			704 MHz	707.5 MHz	711 MHz	
			Channel 5060	Channel 5095	Channel 5130	
		IXA	734 MHz	737.5 MHz	741 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ss.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www t (86–512) 62992980 sgs.



Report No.: SEWM2212000311RG01

Rev.: 01

12 of 27 Page:

#### **Description of Tests** 4

### 4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 13 of 27

## 4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Ferms-and-Conditions.aspx.aaf">https://www.sgs.com/en/Ferms-and-Conditions.aspx.aaf</a>, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx.adtention">https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx.adtention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 14 of 27

### 4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

#### Remark: Reference test setup 1

#### Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at <a href="http://www.sps.com/en/Terms-and-Conditions.apy.and">http://www.sps.com/en/Terms-and-Conditions.apy.and</a>, for electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-Document.apy. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of lish intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州上版区 第一次 1000年 10

5000 t (86–512) 62992980 5000 t (86–512) 62992980



Report No.: SEWM2212000311RG01

Rev.: Page: 15 of 27

### 4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

#### Remark: Reference test setup 1

#### Test Settings

- Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW > 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize





Report No.: SEWM2212000311RG01

Rev.: 01 Page: 16 of 27

### 4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

#### Remark: Reference test setup 1

#### Test Settings

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10\* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 17 of 27

### 4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

#### Remark: Reference test setup 1

#### Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service prints overleaf, available on request or accessible at <a href="http://www.sps.com/en/Terms-and-Conditions.app.and">http://www.sps.com/en/Terms-and-Conditions.app.and</a>, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-e-Document.app. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SEWM2212000311RG01

Rev.: 01 18 of 27 Page:

## 4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

#### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel, the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dBμV/m) + 20 log D - 104.8; where D is the measurement distance in meters

#### Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dBμV/m) + 20 log D - 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20\*LOG(3/1) = 9.54 dB.

#### Remark: Reference test setup 2

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics

had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service proverleaf, available on request or accessible at <a href="http://www.sps.com/en/Terms-and-Conditions.app.and">http://www.sps.com/en/Terms-and-Conditions.app.and</a>, for electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-e-Document. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the lim Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties transaction from exercising all their rights and obligations under the transaction document. This document cannot be reprocedured to the company of the Company. Any unauthorized alteration, forgery or falsification of the company appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise state results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2212000311RG01

Rev.: 01 19 of 27 Page:

## 4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm ) of the center frequency.

#### Time Period and Procedure:

- The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3






Report No.: SEWM2212000311RG01


Rev.: 01 Page: 20 of 27

## 4.9 Test Setups

### 4.9.1 Test Setup 1

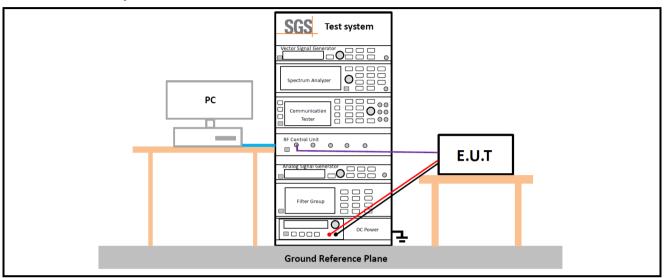

### 4.9.2 Test Setup 2

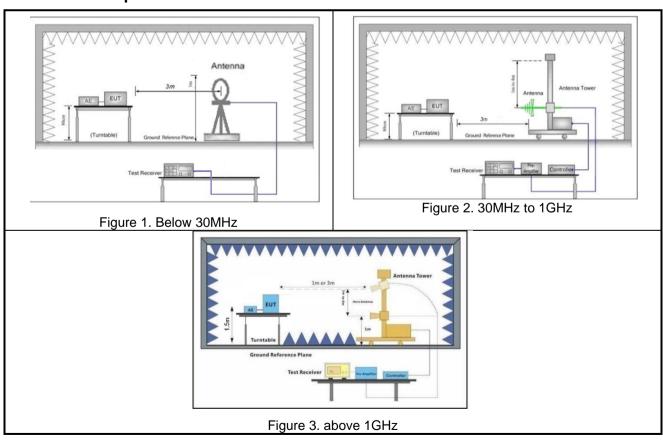



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.apx">http://www.sgs.com/en/Terms-and-Conditions.apx</a>, dor electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Termd-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Termd-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest settor of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 21 of 27

### 4.9.3 Test Setup 3

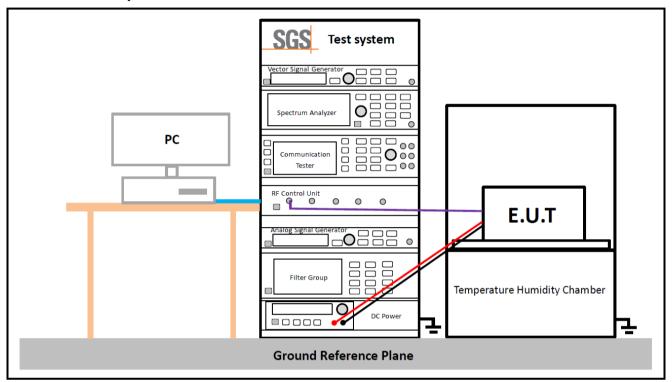



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and

South of No. 6 Plant, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000311RG01

Rev.: Page: 22 of 27

#### 4.10Test Conditions

Transmit Output Power Data - Average Power, Total				
Test Conditions				
Ambient Climate & Rated Voltage				
Test Setup 1				
L, M, H (L= low channel, M= middle channel, H= high channel)				
GSM/TM1;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3				
Peak-to-Average Ratio				
Test Conditions				
Ambient Climate & Rated Voltage				
Test Setup 1				
L, M, H (L= low channel, M= middle channel, H= high channel)				
GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3				
Modulation Characteristics				
Test Conditions				
Ambient Climate & Rated Voltage				
Test Setup 1				
M (M= middle channel)				
GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3				
Bandwidth - Occupied Bandwidth				
Test Conditions				
Ambient Climate & Rated Voltage				
Test Setup 1				
L, M, H (L= low channel, M= middle channel, H= high channel)				
GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3				
Bandwidth - Emission Bandwidth				
Test Conditions				
Ambient Climate & Rated Voltage				
Test Setup 1				
L, M, H (L= low channel, M= middle channel, H= high channel)				
GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3				
Band Edges Compliance				
Test Conditions				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document one one exore exercises and their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CAD Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 sgs.china@sgs.com

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 23 of 27

<u>-</u>	1 ago. 20 01 27		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, H (L= low channel, H= high channel)		
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1		
	Spurious Emission at Antenna Terminals		
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1		
Field Strength of Spurious Radiation			
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 2		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	GSM/TM1;UMTS/TM1;LTE/TM1 Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.		
	Frequency Stability		
Test Case	Test Conditions		
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage		
Test Environment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.		
Test Setup	Test Setup 3		
RF Channels (TX)	M (M= middle channel)		
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;LTE/TM1		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic formard documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the contents or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

South of No. F Plant, No. 1, Purasheng Toad, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜商1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 24 of 27

### 5 Main Test Instruments

RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/07
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2022/02/16	2023/02/15
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2022/05/17	2023/05/16
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2022/02/14	2023/02/13
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2022/02/15	2023/02/14
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2022/02/15	2023/02/14
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2022/09/16	2023/09/15
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Ferms-and-Conditions.aspx.aaf">https://www.sgs.com/en/Ferms-and-Conditions.aspx.aaf</a>, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx.adtention">https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx.adtention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 25 of 27

	RSE Test System				
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-02	2021/11/25	2024/11/24
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-15	2022/02/16	2023/02/15
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-06	2022/11/23	2023/11/22
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2022/02/19	2023/02/18
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-04	2021/12/05	2023/12/04
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-05	2021/12/05	2023/12/04
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2021/05/14	2023/05/13
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2021/06/10	2023/06/09
Amplifier	Tonscend	TAP9K3G32	SUWI-01-14-06	2022/11/23	2023/11/22
Amplifier	Tonscend	TAP01018050	SUWI-01-14-04	2022/11/23	2023/11/22
Amplifier	Tonscend	TAP30M7G30	SUWI-01-14-05	2022/11/23	2023/11/22
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-16-08	2022/02/14	2023/02/13
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ss.com

South of No. F Plant, No. 1, Purasheng Toad, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜商1号的6号厂房南部 邮编: 215000

5000 t (86–512) 62992980 5000 t (86–512) 62992980



Report No.: SEWM2212000311RG01

Rev.: 01 Page: 26 of 27

## 6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	±1.0 %
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	±1.0 %
		± 3.13dB (9k -30MHz)
7	Dodieted Emissies	± 4.88dB (30M -1GHz)
7	Radiated Emission	± 4.75dB (1GHz to 18GHz)
		± 4.77dB (Above 18GHz)

#### Remark:

The Ulab (lab Uncertainty) is less than Ucispr/ETSI (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Ferms-and-Conditions.aspx.aaf">https://www.sgs.com/en/Ferms-and-Conditions.aspx.aaf</a>, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx.adtention">https://www.sgs.com/en/Ferms-and-Conditions/Ferms-a-Document.aspx.adtention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content cappearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (langsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2212000311RG01

Rev.:

Page: 27 of 27

## 7 Appendixes

Appendix A.1	WWAN Setup Photos
Appendix B.1	WCDMA Band IV
Appendix B.2	LTE Band 4

---End of Report---



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980

sgs.china@sgs.com