

MEASUREMENT REPORT

FCC PART 15 Subpart C Bluetooth

FCC ID: Q9DAPIN0303

APPLICANT: Hewlett Packard Enterprise Company

Application Type: Certification

Product: ACCESS POINT

Model No.: APIN0303

Brand Name:  a Hewlett Packard Enterprise company 

FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part15 Subpart C (Section 15.247)

Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v04

Test Date: December 16 ~ 30, 2017

Reviewed By : 

(Paddy Chen)

Approved By : 

(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v04. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1711TW0103-U2	Rev. 01	Initial Report	12-30-2017	Valid

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Feature of Equipment under Test	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Working Frequencies for this report	8
2.4. Test Software	8
2.5. Test Configuration	8
2.6. EMI Suppression Device(s)/Modifications.....	8
2.7. Description of Available Antennas.....	9
2.8. Device Capabilities	10
2.9. Description of Antenna RF Port	11
2.10. Labeling Requirements.....	11
3. DESCRIPTION OF TEST	12
3.1. Evaluation Procedure	12
3.2. AC Line Conducted Emissions	12
3.3. Radiated Emissions	13
4. ANTENNA REQUIREMENTS	14
5. TEST EQUIPMENT CALIBRATION DATE	15
6. MEASUREMENT UNCERTAINTY	16
7. TEST RESULT	17
7.1. Summary	17
7.2. 6dB Bandwidth Measurement.....	18
7.2.1. Test Limit	18
7.2.2. Test Procedure used.....	18
7.2.3. Test Setting.....	18
7.2.4. Test Setup.....	18
7.2.5. Test Result.....	19
7.3. Output Power Measurement.....	20
7.3.1. Test Limit	20
7.3.2. Test Procedure Used	20
7.3.3. Test Setting.....	20
7.3.4. Test Setup.....	20

7.3.5. Test Result of Output Power	21
7.4. Power Spectral Density Measurement	22
7.4.1. Test Limit	22
7.4.2. Test Procedure Used	22
7.4.3. Test Setting	22
7.4.4. Test Setup	22
7.4.5. Test Result	23
7.5. Conducted Band Edge and Out-of-Band Emissions	24
7.5.1. Test Limit	24
7.5.2. Test Procedure Used	24
7.5.3. Test Setting	24
7.5.4. Test Setup	25
7.5.5. Test Result	26
7.6. Radiated Spurious Emission Measurement	28
7.6.1. Test Limit	28
7.6.2. Test Procedure Used	28
7.6.3. Test Setting	28
7.6.4. Test Setup	30
7.6.5. Test Result	32
7.7. Radiated Restricted Band Edge Measurement	37
7.7.1. Test Limit	37
7.7.2. Test Procedure Used	38
7.7.3. Test Setting	38
7.7.4. Test Setup	39
7.7.5. Test Result	40
7.8. AC Conducted Emissions Measurement	48
7.8.1. Test Limit	48
7.8.2. Test Setup	48
7.8.3. Test Result	49
8. CONCLUSION.....	51

§2.1033 General Information

Applicant:	Hewlett Packard Enterprise Company
Applicant Address:	3000 Hanover St. Palo Alto, CA 94304, USA
Manufacturer:	Hewlett Packard Enterprise Company
Manufacturer Address:	3000 Hanover St. Palo Alto, CA 94304, USA
Test Site:	MRT Technology (Taiwan) Co., Ltd
Test Site Address:	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
FCC Registration No.:	153292
Test Device Serial No.:	Conducted Sample S/N: CNF0K9T010 Radiated Sample S/N: CNF0K9T010

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan (R.O.C)

- MRT facility is a FCC registered (Reg. No. 153292) test facility with the site description report on file and is designated by the FCC as an Accredited Test Film.
- MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

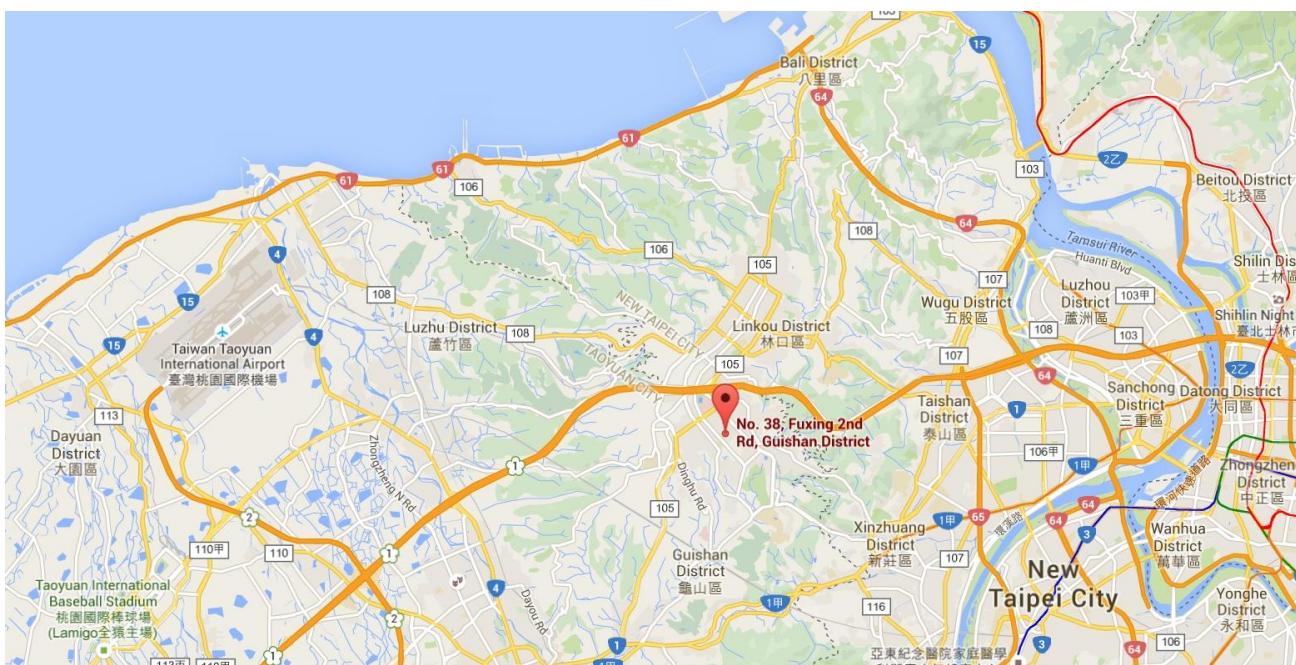

2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name	ACCESS POINT
Model No.	APIN0303
Brand Name:	 a Hewlett Packard Enterprise company , 
Wi-Fi Specification:	802.11a/b/g/n/ac
Bluetooth Specification:	v4.0 single mode
Software Version:	v1.02
Operating Temperature:	0 ~ 40 °C
Power Type:	POE input or AC adapter input
Operating Environment:	Indoor Use
Components	
Adapter	Part No.: SDI30-12-U-P209-C1 Model No.: SDI30-12-U Input Power: 100 - 240V ~ 50/60Hz, 1.0A Output Power: 12VDC/2.5A

Note: The applicant provide one POE adapter (Manufacturer: MICROSEMI) for approval testing, it is not for sale.

2.2. Product Specification Subjective to this Report

Bluetooth Frequency	2402~2480MHz
Bluetooth Version	v4.0
Type of modulation	GFSK
Data Rate	1Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--

2.4. Test Software

The test utility software used during testing was “Smart RF Studio 7.exe”.

Test Mode	Test Frequency (MHz)	Power Parameter Value
BT-LE	2402	4
	2440	4
	2480	4

2.5. Test Configuration

The **ACCESS POINT** was tested per the guidance of KDB 558074 D01v04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.6. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.7. Description of Available Antennas

Antenna Type	Frequency Band (GHz)	TX Paths	Max Peak Gain (dBi)	Beam-Forming Directional Gain (dBi)	CDD Directional Gain (dBi)	
					For Power	For PSD
Wi-Fi Internal Antenna						
PCB	2.4	2	2.1	3.01	2.1	5.11
	5	2	5.7	3.01	5.7	8.71
Bluetooth Internal Antenna						
PCB	2.4	1	4.5		--	

Note:

1. The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

For CDD transmissions, directional gain is calculated as follows, $N_{ANT} = 2$, $N_{SS} = 1$.

If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,
 $\text{Array Gain} = 10 \log (N_{ANT}/ N_{SS}) \text{ dB} = 3.01$;
- For power measurements on IEEE 802.11 devices,
 $\text{Array Gain} = 0 \text{ dB for } N_{ANT} \leq 4$;


2. The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac, not include 802.11a/b/g.

2.8. Device Capabilities


This device contains the following capabilities:

802.11a/b/g/n/ac Wi-Fi and BT v4.0 single mode.

Note: The maximum achievable duty cycle was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz per the guidance of Section 6.0 b) of KDB 558074 D01v04. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

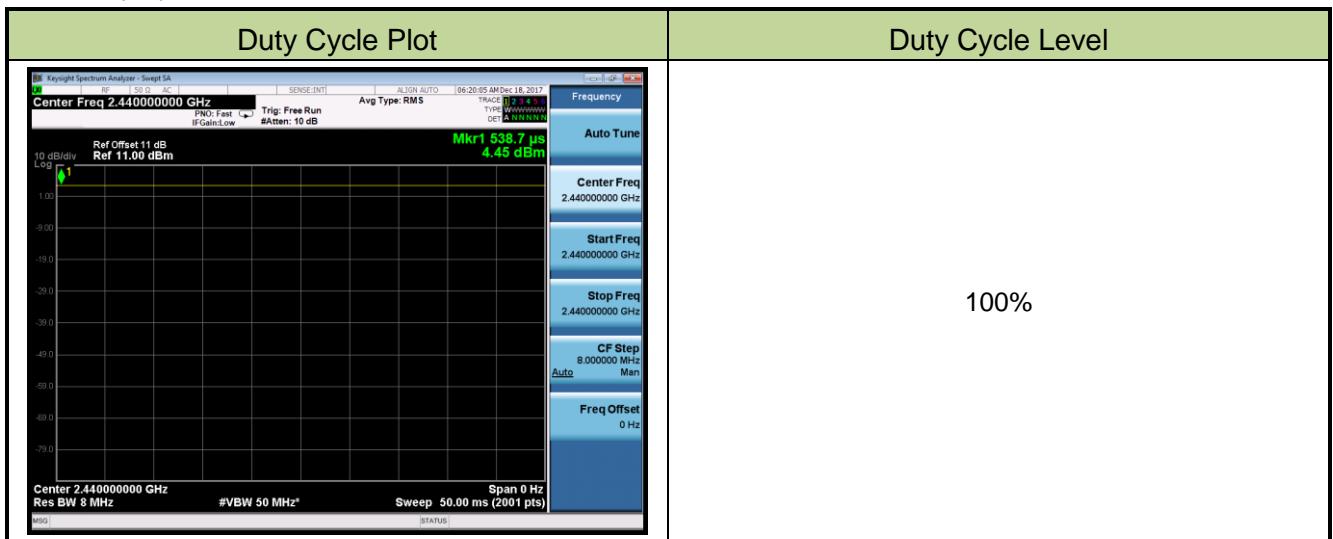

2.9. Description of Antenna RF Port

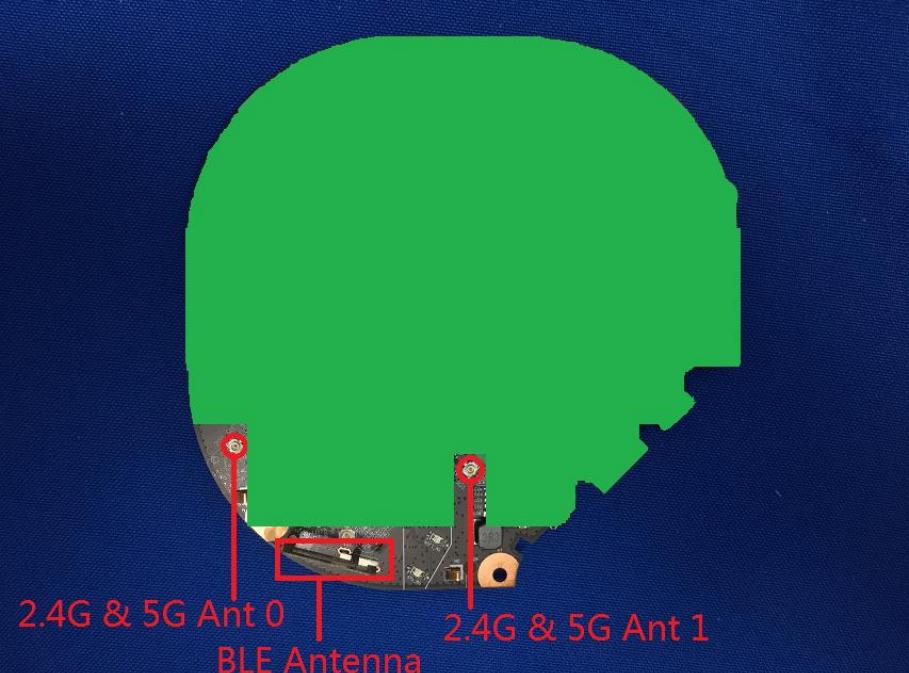Antenna RF Port				
--	2.4GHz RF Port		5GHz RF Port	
Software Control Port	Ant 0	Ant 1	Ant 0	Ant 1
				

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v04 were used in the measurement of the **ACCESS POINT**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions were used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the Antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive Antenna height using a broadband Antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn Antennas were used. For frequencies below 30MHz, a calibrated loop Antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband Antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive Antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn Antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive Antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive Antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn Antenna, the horn Antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **ACCESS POINT** is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **ACCESS POINT** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2018/03/17
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2018/03/23
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2018/03/23
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2018/06/08

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2018/03/02
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2018/03/16
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2018/04/06
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2018/04/06
Acitive Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2018/04/06
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2018/04/06
Broadband Hornantenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2018/04/06
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2018/04/06
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2018/06/08

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2018/07/10
PSA Series Spectrum Analyzer	Agilent	E4447A	MRTTWA00060	1 year	2018/12/10
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2018/03/18
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2018/03/18
Programmable Temperature & Humidity Chamber	TEN BILLION	TTH-B3UP	MRTTWA00036	1 year	2018/05/10
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2018/06/08

Software	Version	Function
e3	V 8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB
Spurious Emissions, Conducted - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 0.78dB
Output Power - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 1.13dB
Power Spectrum Density - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 1.15dB
Occupied Bandwidth - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 0.28%

7. TEST RESULT

7.1. Summary

Product Name: ACCESS POINT

FCC ID: Q9DAPIN0303

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	< 1Watt		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm} / 3\text{kHz}$		Pass	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	$\geq 20\text{dBc}$		Pass	Section 7.5
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Note:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

KDB 558074 D01v04 - Section 8.2 Option 2

7.2.3. Test Setting

- a. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- b. Set RBW = 100 kHz
- c. VBW $\geq 3 \times$ RBW
- d. Detector = Peak
- e. Trace mode = max hold
- f. Sweep = auto couple
- g. Allow the trace was allowed to stabilize

7.2.4. Test Setup

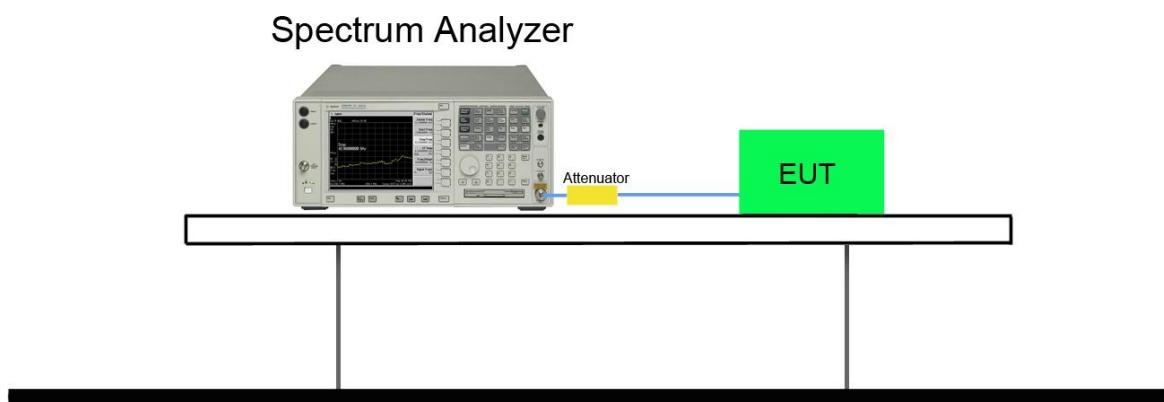

7.2.5. Test Result

Product	ACCESS POINT	Temperature	23°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	SR2	Test Date	2017/12/18
Test Item	6dB Bandwidth		

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
BLE	1	00	2402	0.68	≥ 0.5	Pass
BLE	1	19	2440	0.68	≥ 0.5	Pass
BLE	1	39	2480	0.69	≥ 0.5	Pass



7.3. Output Power Measurement

7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

7.3.2. Test Procedure Used

KDB 558074 D01v04 - Section 9.1.3 PKPM1 - Peak Power Method

KDB 558074 D01v04 - Section 9.2.3.2 AVGPM-G Average Power Method

7.3.3. Test Setting


Method PKPM1 (Peak Power Measurement of Signals with DTS BW ≤ 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a $V_{BW} = 50\text{MHz}$ so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Average Power Measurement

Average power measurements were perform only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

7.3.4. Test Setup

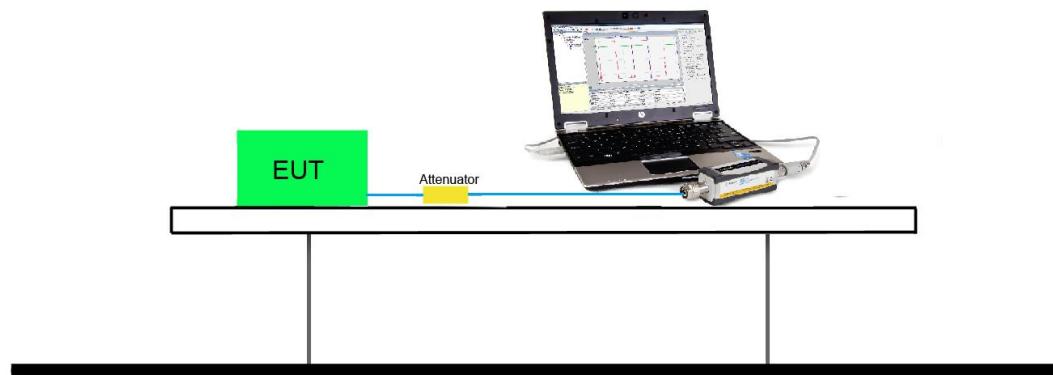

7.3.5. Test Result of Output Power

Product	ACCESS POINT	Temperature	23°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	SR2	Test Date	2017/12/18
Test Item	Output Power		

Test Result of Peak Output Power

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result
BLE	1	00	2402	4.51	≤ 30.0	Pass
BLE	1	19	2440	4.27	≤ 30.0	Pass
BLE	1	39	2480	4.06	≤ 30.0	Pass

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	Result
BLE	1	00	2402	4.43	≤ 30.0	Pass
BLE	1	19	2440	4.12	≤ 30.0	Pass
BLE	1	39	2480	3.98	≤ 30.0	Pass

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.


7.4.2. Test Procedure Used

KDB 558074 D01v04 - Section 10.2 Method PKPSD

7.4.3. Test Setting

- a. Analyzer was set to the center frequency of the DTS channel under investigation
- b. Span = 1.5 times the DTS channel bandwidth
- c. RBW = 3kHz
- d. VBW = 10kHz
- e. Detector = peak
- f. Sweep time = auto couple
- g. Trace mode = max hold
- h. Trace was allowed to stabilize


7.4.4. Test Setup

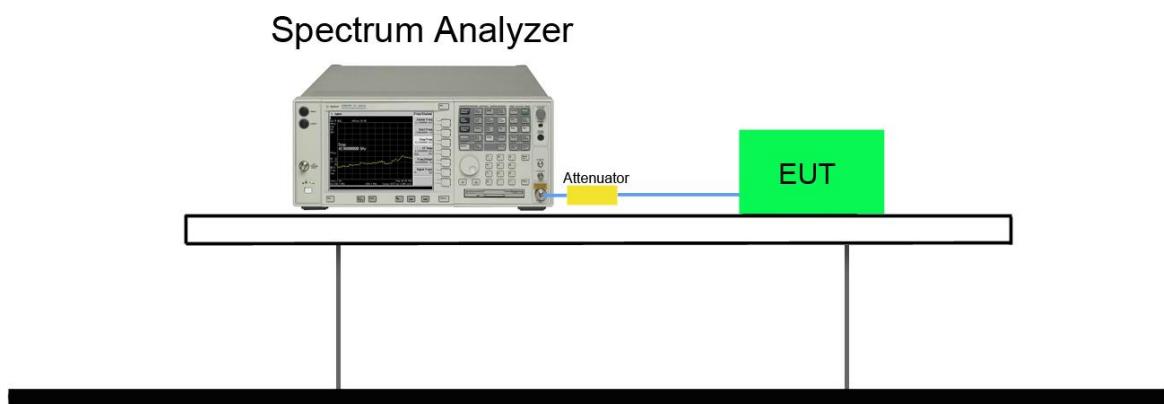

7.4.5. Test Result

Product	ACCESS POINT	Temperature	23°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	SR2	Test Date	2017/12/18
Test Item	Power Spectral Density		

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	PSD Result (dBm/3kHz)	PSD Limit (dBm/3kHz)	Result
BLE	1	00	2402	-6.39	≤ 8.0	Pass
BLE	1	19	2440	-7.01	≤ 8.0	Pass
BLE	1	39	2480	-6.99	≤ 8.0	Pass

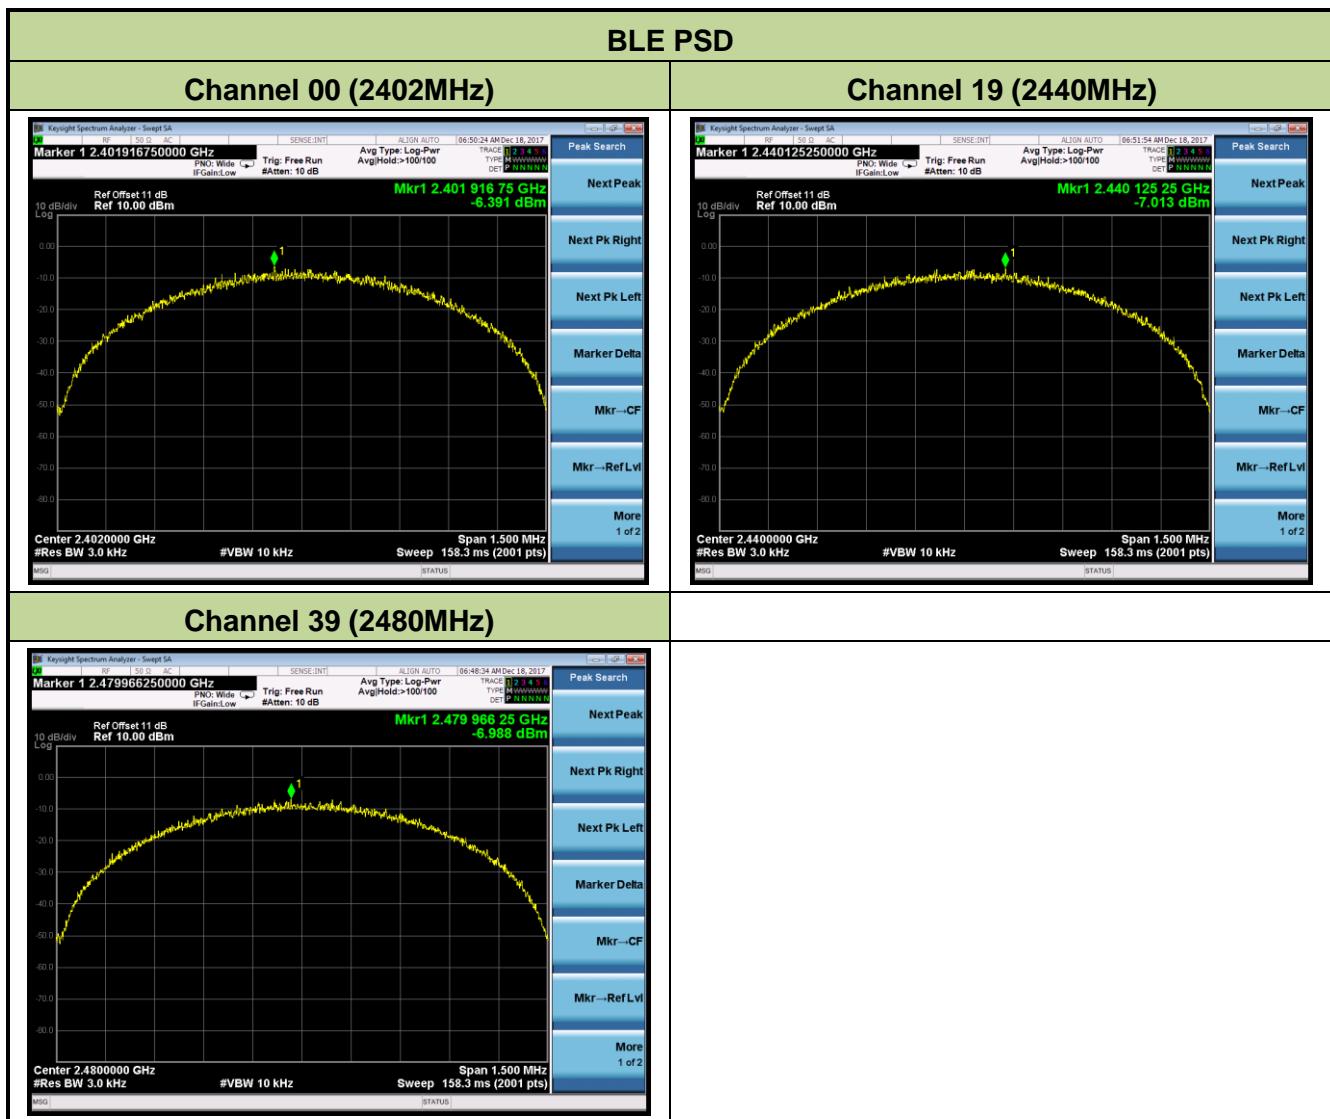

7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

7.5.2. Test Procedure Used

KDB 558074 D01v04 - Section 11.2 & Section 11.3

7.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to \geq 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW \geq 3 x RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize


7.5.4. Test Setup

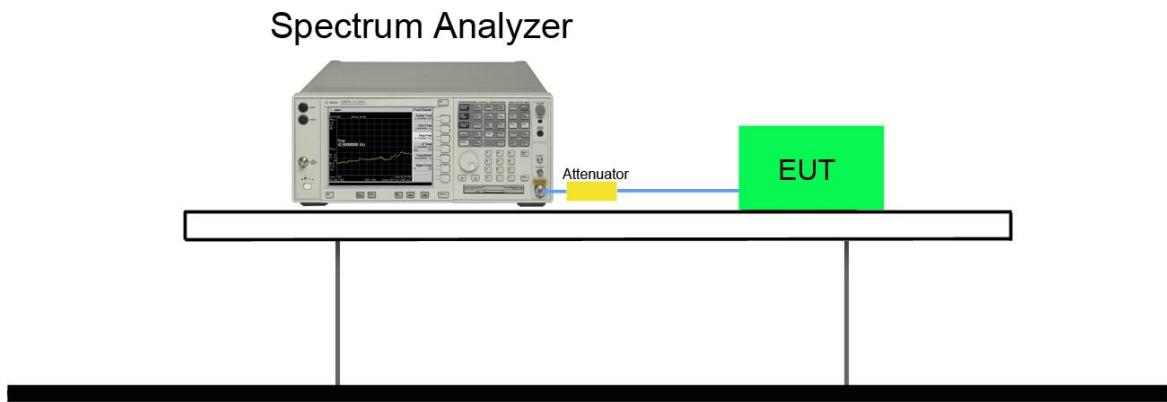

7.5.5. Test Result

Product	ACCESS POINT	Temperature	23°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	SR2	Test Date	2017/12/18
Test Item	Conducted Band Edge and Out-of-Band Emissions		

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit	Result
BLE	1	00	2402	20dBc	Pass
BLE	1	19	2440	20dBc	Pass
BLE	1	39	2480	20dBc	Pass

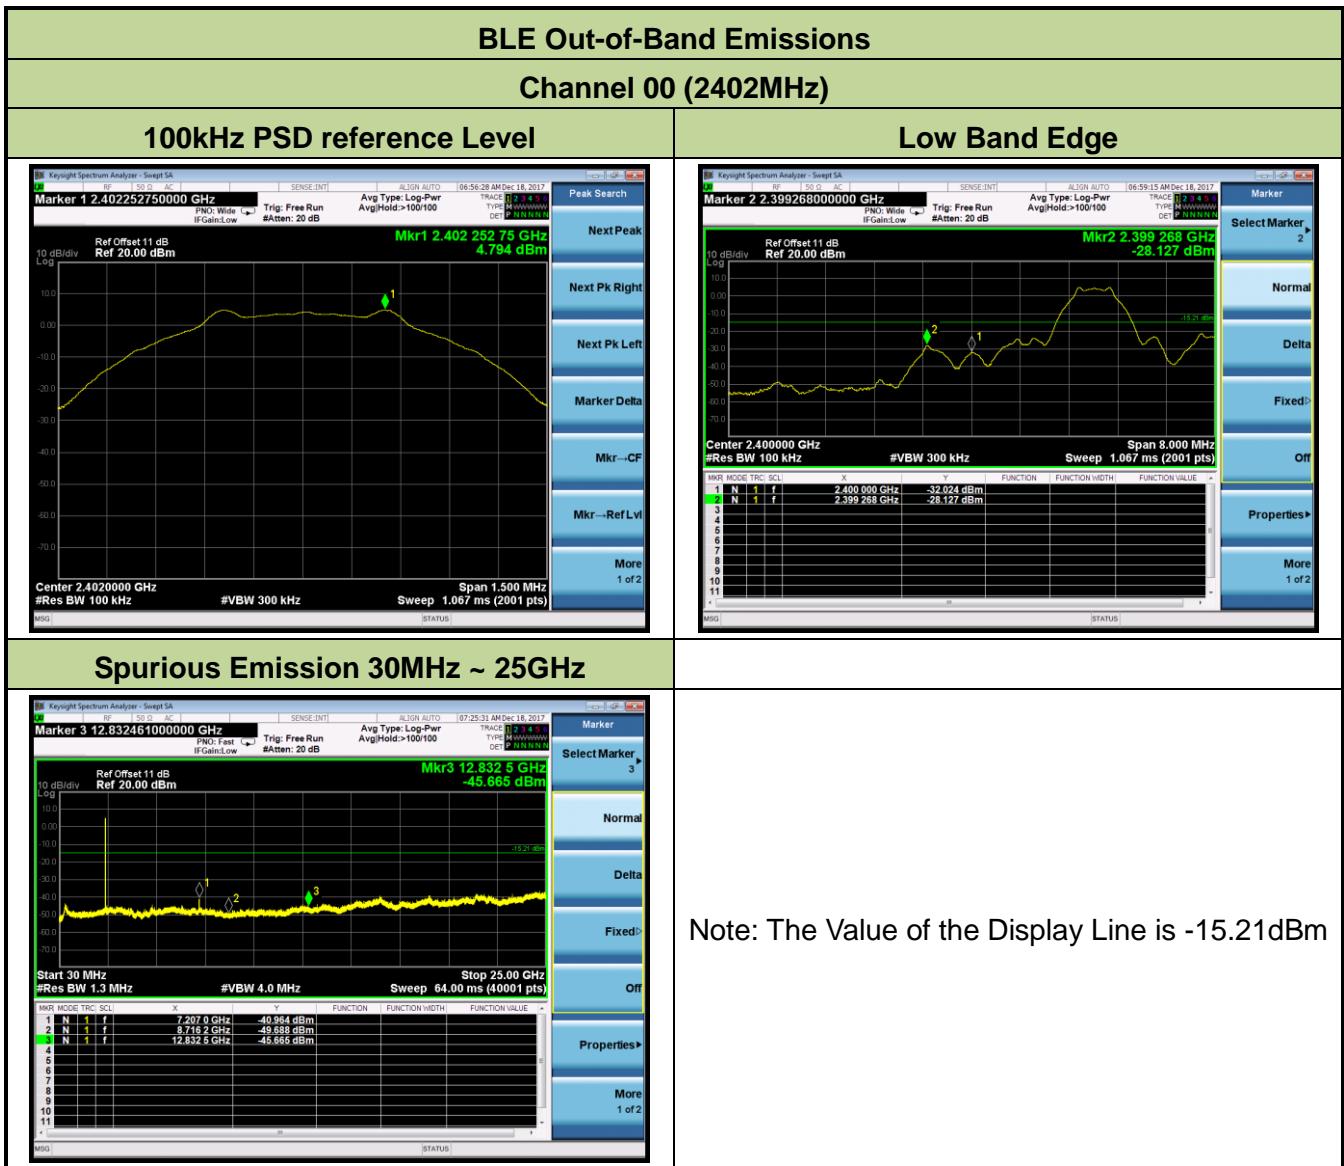


Channel 19 (2440MHz)

100kHz PSD reference Level



Spurious Emission 30MHz ~ 25GHz

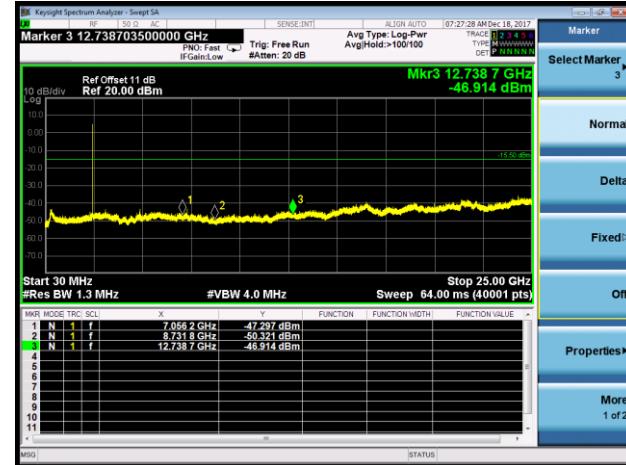


Note: The Value of the Display Line is -15.50dBm

Channel 39 (2480MHz)


100kHz PSD reference Level



High Band Edge

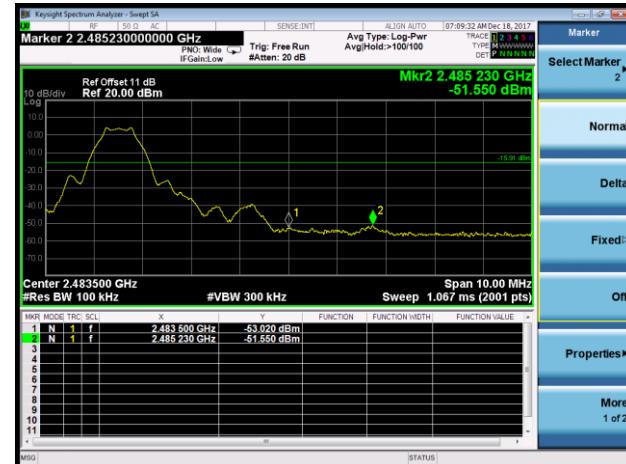

Spurious Emission 30MHz ~ 25GHz

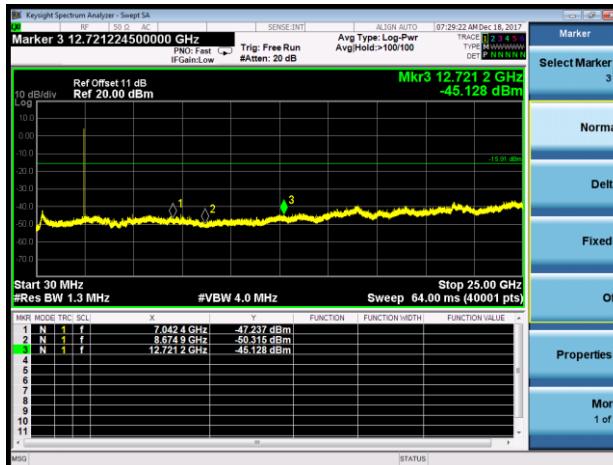

Note: The Value of the Display Line is -15.91dBm

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize



7.6.4. Test Setup

9kHz ~ 30MHz Test Setup:

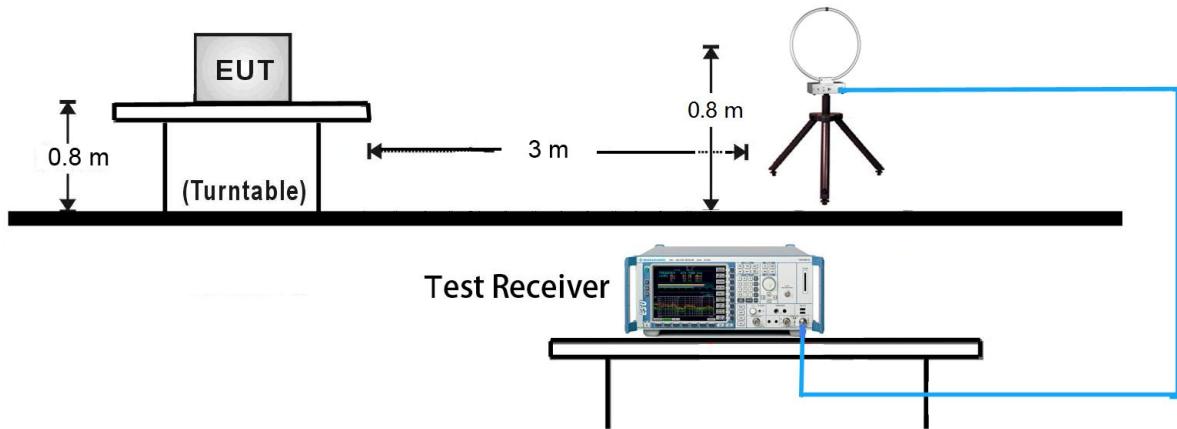

30MHz ~ 1GHz Test Setup:

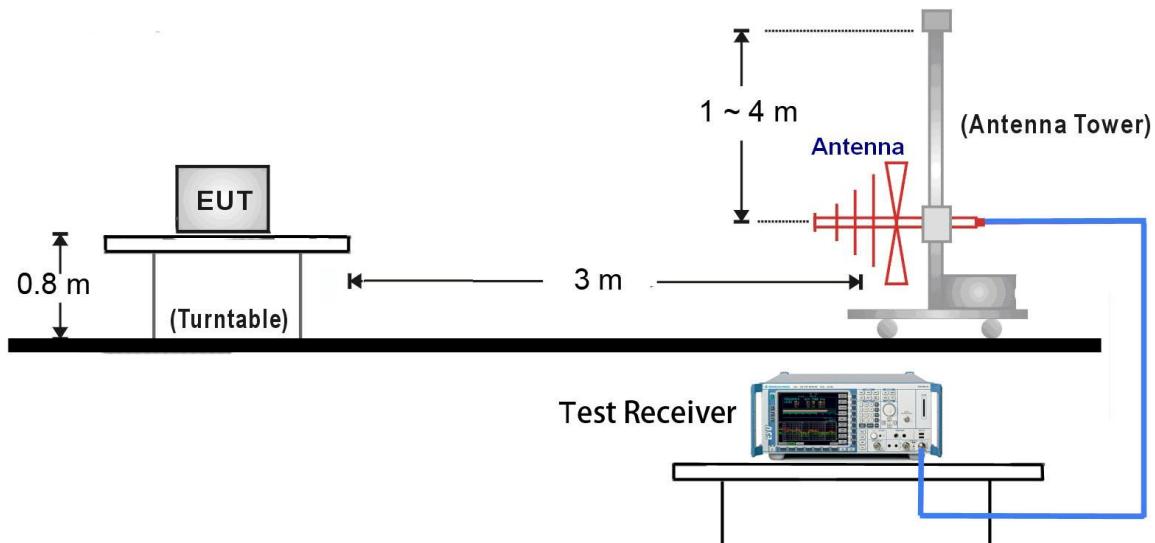

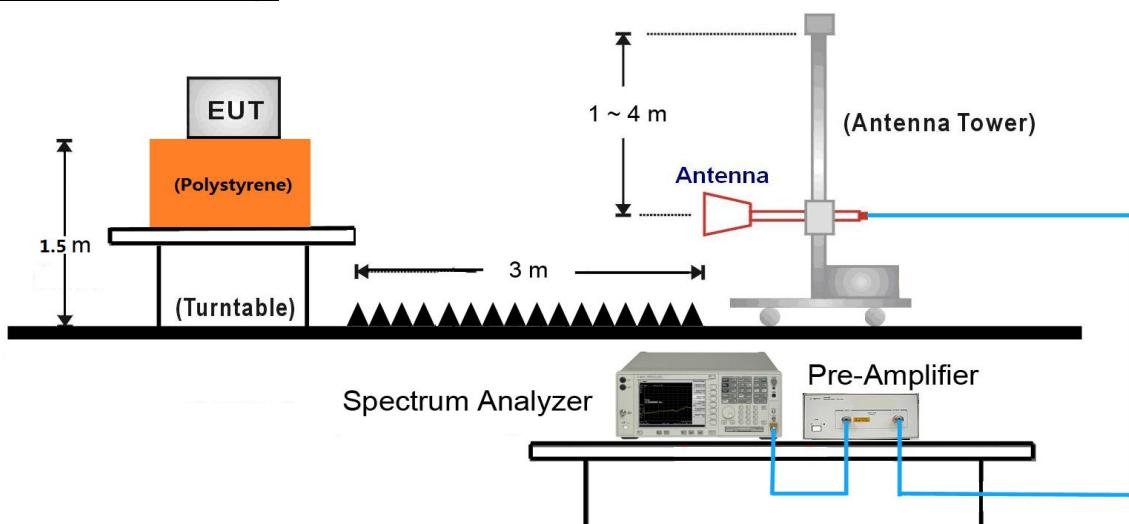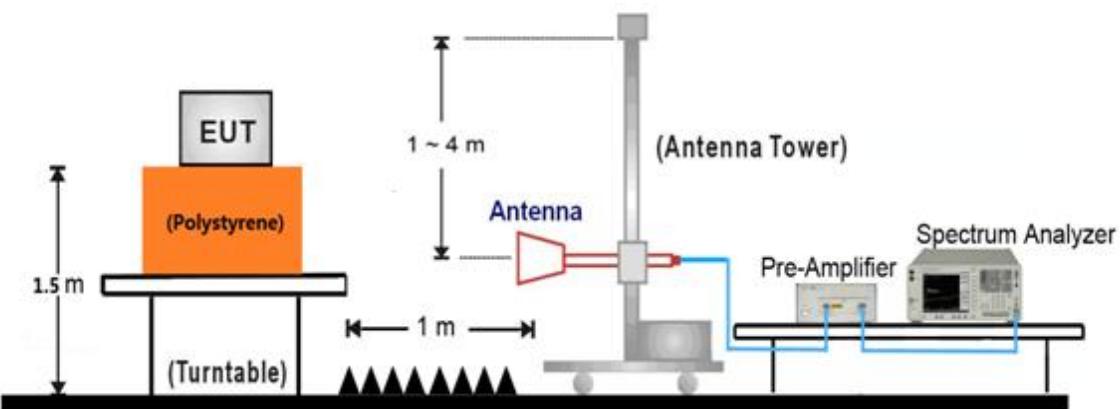1GHz ~ 18GHz Test Setup:

18GHz ~25GHz Test Setup:


Note: This item was performed with the BLE antenna connected.

7.6.5. Test Result

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	56%
Test Site	AC1	Test Date	2017/12/26
Test Mode:	BLE	Test Channel:	00
Remark:	1. Average measurement was not performed if peak level lower than average limit. So the margin was calculated using the average limit for emissions fall within the restricted bands. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	3813.5	37.1	2.2	39.3	54.0	-14.7	Peak	Horizontal
	4804.0	44.9	5.5	50.4	74.0	-23.6	Peak	Horizontal
	4804.0	42.0	5.5	47.5	54.0	-6.5	Average	Horizontal
*	6992.5	33.3	12.3	45.6	80.4	-34.8	Peak	Horizontal
*	8769.0	31.2	14.8	46.0	80.4	-34.4	Peak	Horizontal
	4009.0	37.6	2.6	40.2	54.0	-13.8	Peak	Vertical
	4804.0	38.6	5.5	44.1	54.0	-9.9	Peak	Vertical
*	6695.0	34.0	10.8	44.8	80.4	-35.6	Peak	Vertical
*	8692.5	30.9	14.6	45.5	80.4	-34.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (100.4dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	56%
Test Site	AC1	Test Date	2017/12/26
Test Mode:	BLE	Test Channel:	19
Remark:	1. Average measurement was not performed if peak level lower than average limit. So the margin was calculated using the average limit for emissions fall within the restricted bands. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4179.0	37.4	3.6	41.0	54.0	-13.0	Peak	Horizontal
	4880.0	43.0	5.6	48.6	74.0	-25.4	Peak	Horizontal
	4880.0	41.3	5.6	46.9	54.0	-7.1	Average	Horizontal
*	6933.0	33.1	12.1	45.2	78.3	-33.1	Peak	Horizontal
*	9993.0	30.9	17.4	48.3	78.3	-30.0	Peak	Horizontal
	4060.0	35.0	3.1	38.1	54.0	-15.9	Peak	Vertical
	4880.0	39.2	5.6	44.8	54.0	-9.2	Peak	Vertical
*	8794.5	31.8	14.9	46.7	78.3	-31.6	Peak	Vertical
*	10231.0	31.2	18.1	49.3	78.3	-29.0	Peak	Vertical
Note 1: ** is not in restricted band, its limit is 20dBc of the fundamental emission level (98.3dB μ V/m) or 15.209 which is higher.								
Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB) Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Temperature	26°C
Test Engineer	Kevin Ker	Relative Humidity	56%
Test Site	AC1	Test Date	2017/12/26
Test Mode:	BLE	Test Channel:	39
Remark:	1. Average measurement was not performed if peak level lower than average limit. So the margin was calculated using the average limit for emissions fall within the restricted bands. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
	4247.0	35.3	3.9	39.2	54.0	-14.8	Peak	Horizontal
	4960.0	41.4	5.7	47.1	54.0	-6.9	Average	Horizontal
	4960.0	44.3	5.7	50.0	74.0	-24.0	Peak	Horizontal
*	6763.0	32.8	10.9	43.7	76.6	-32.9	Peak	Horizontal
*	9916.5	31.6	17.4	49.0	76.6	-27.6	Peak	Horizontal
	4111.0	35.8	3.1	38.9	54.0	-15.1	Peak	Vertical
	4960.0	39.5	5.7	45.2	54.0	-8.8	Peak	Vertical
*	7842.5	31.2	14.5	45.7	76.6	-30.9	Peak	Vertical
*	9823.0	30.6	17.1	47.7	76.6	-28.9	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (96.6dB μ V/m) or 15.209 which is higher.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst Case of Radiated Emission below 1GHz:

Site: AC1	Time: 2017/11/06 - 18:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Worse Case Mode: Transmit by BLE at channel 2402MHz	

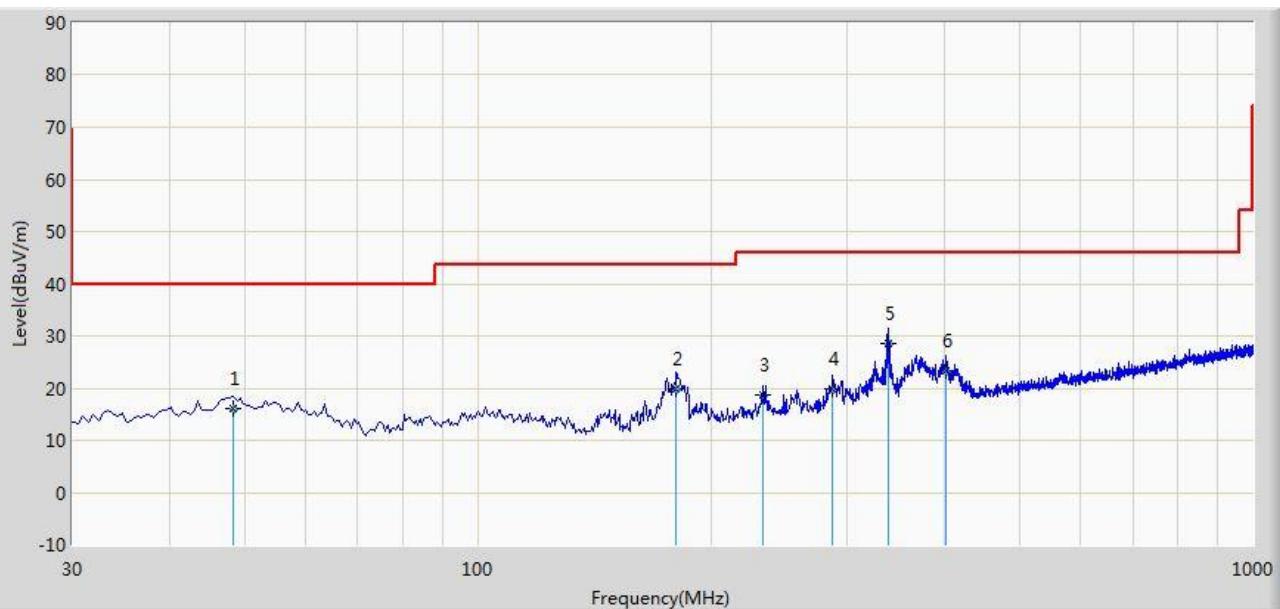


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V/m)	Factor (dB)	Type
1			48.430	16.168	1.200	-23.832	40.000	14.968	QP
2			180.350	19.893	8.930	-23.607	43.500	10.962	QP
3			233.215	18.645	5.450	-27.355	46.000	13.195	QP
4			287.050	19.765	5.450	-26.235	46.000	14.315	QP
5	*		338.945	28.586	12.930	-17.414	46.000	15.656	QP
6			402.480	23.379	6.560	-22.621	46.000	16.819	QP

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC1	Time: 2017/11/06 - 18:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Worse Case Mode: Transmit by BLE at channel 2402MHz	

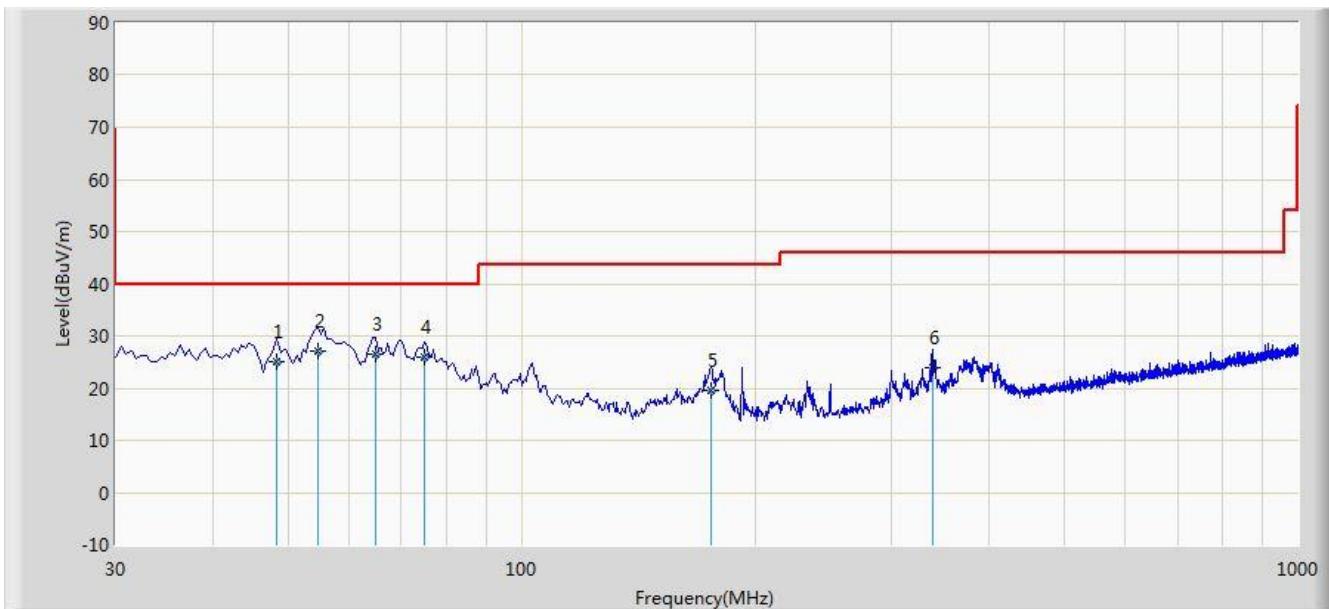

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			48.430	25.198	10.230	-14.802	40.000	14.968	QP
2	*		54.735	27.177	12.450	-12.823	40.000	14.727	QP
3			64.920	26.615	14.030	-13.385	40.000	12.585	QP
4			75.105	26.053	16.340	-13.947	40.000	9.713	QP
5			175.500	19.622	9.030	-23.878	43.500	10.593	QP
6			338.945	23.886	8.230	-22.114	46.000	15.656	QP

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.25 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 10 Hz.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize


7.7.4. Test Setup

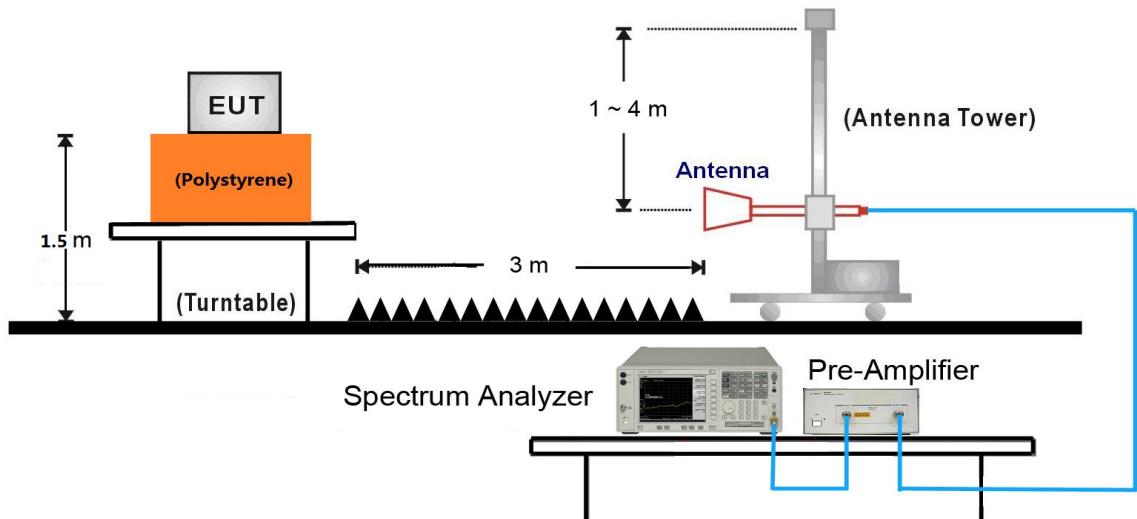

Note: This item was performed with the BLE antenna connected.

7.7.5. Test Result

Site: AC1	Time: 2017/12/26 - 11:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE at Channel 2402MHz	

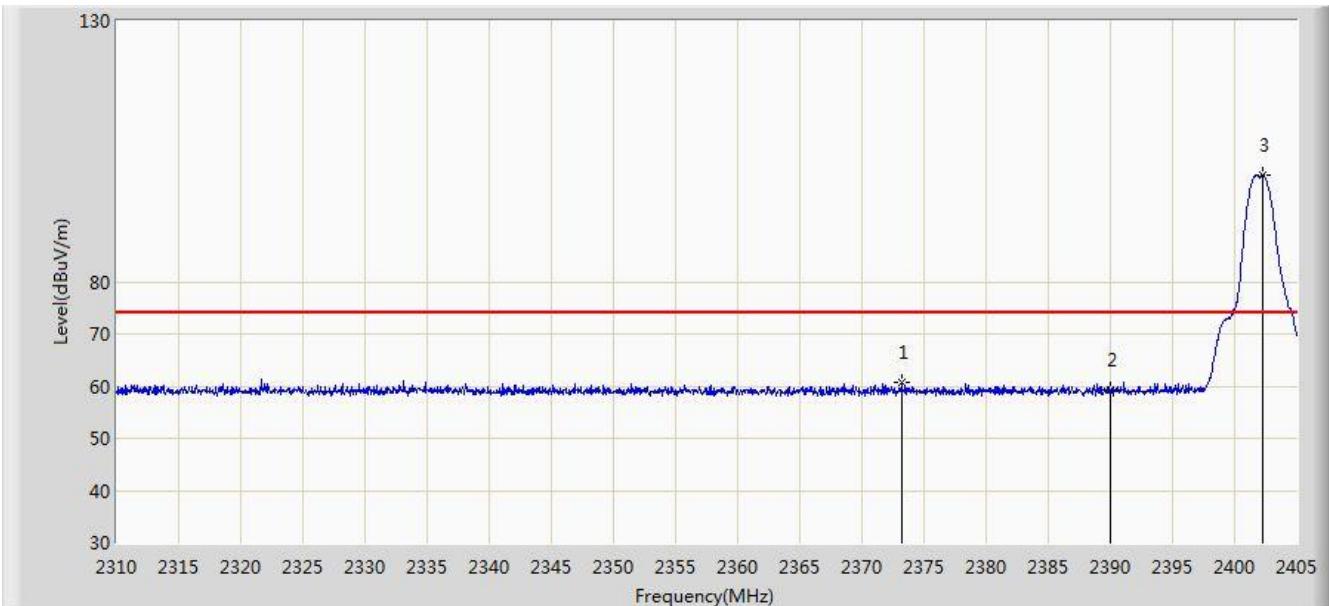


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V/m)	Factor (dB)	Type
1			2373.222	60.755	28.152	-13.245	74.000	32.603	PK
2			2390.000	59.204	26.629	-14.796	74.000	32.575	PK
3			2402.245	100.360	67.801	N/A	N/A	32.559	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/12/26 - 11:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE at Channel 2402MHz	

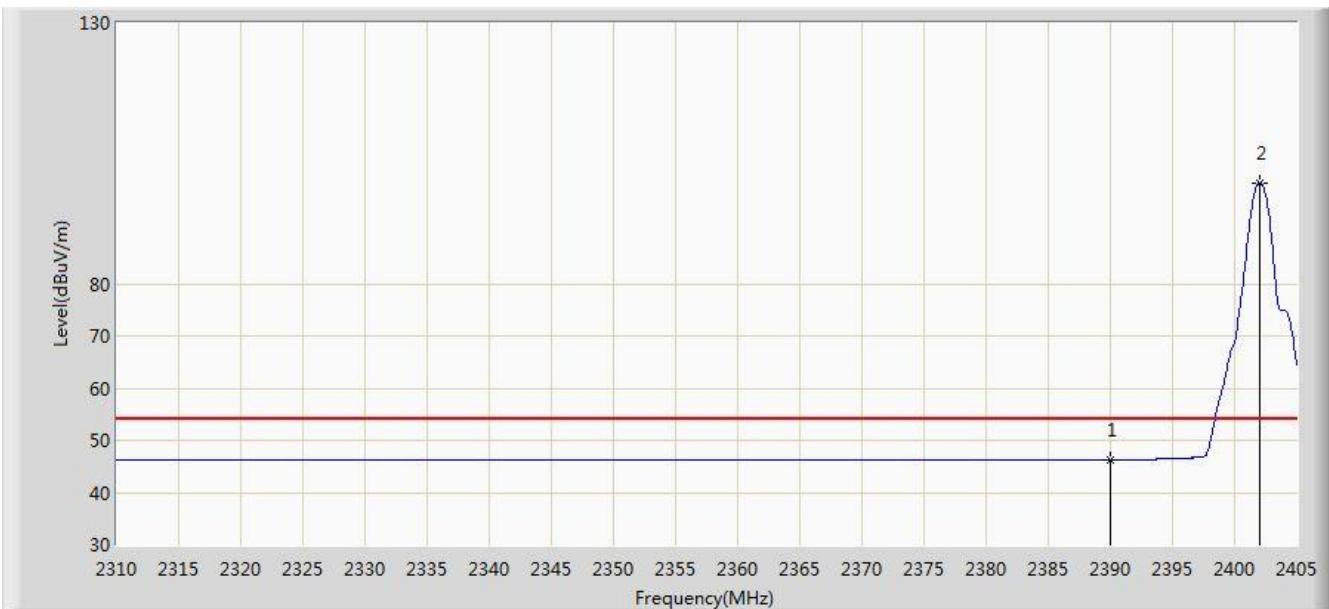


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.244	13.669	-7.756	54.000	32.575	AV
2			2402.008	99.406	66.847	N/A	N/A	32.559	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/12/26 - 11:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE at Channel 2402MHz	

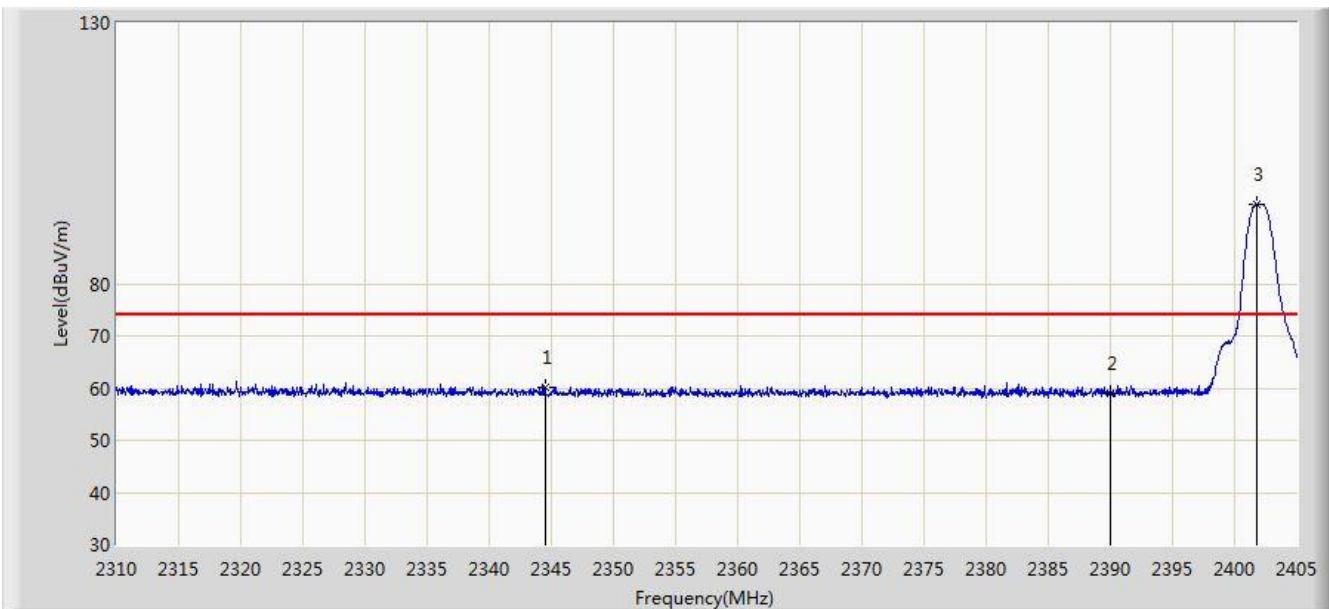


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2344.485	60.286	27.619	-13.714	74.000	32.668	PK
2			2390.000	58.905	26.330	-15.095	74.000	32.575	PK
3			2401.770	95.271	62.712	N/A	N/A	32.559	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/12/26 - 11:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE at Channel 2402MHz	

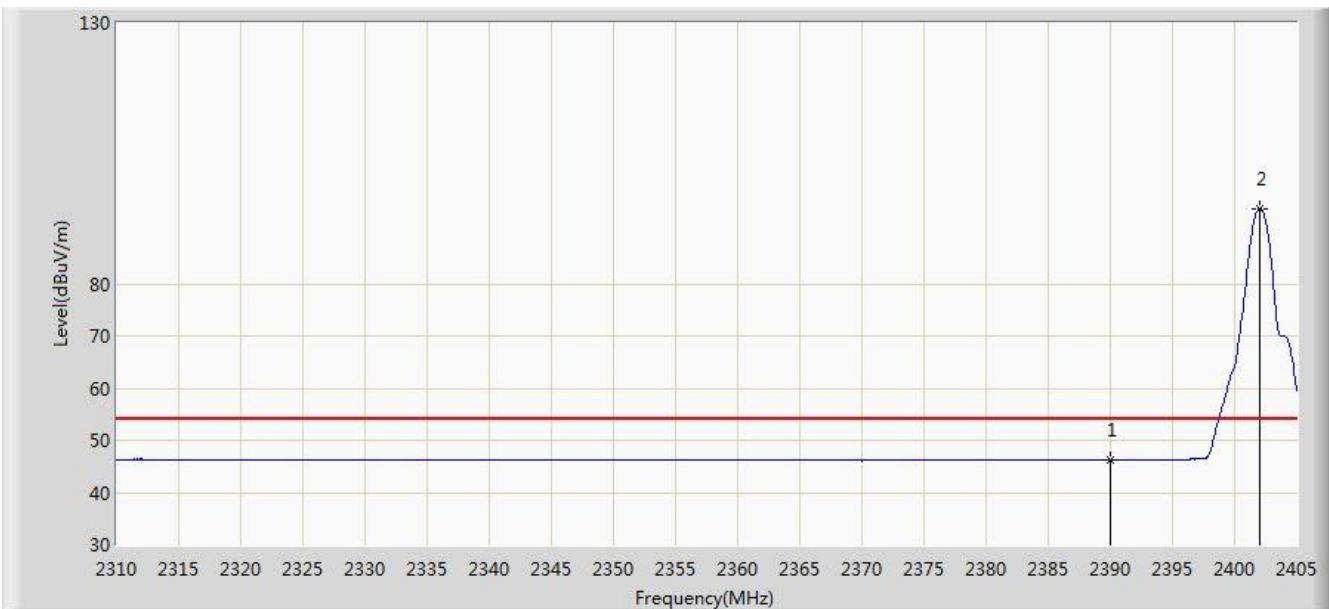


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V/m)	Over Limit (dB)	Limit (dB μ V/m)	Factor (dB)	Type
1			2390.000	46.225	13.650	-7.775	54.000	32.575	AV
2			2402.008	94.399	61.840	N/A	N/A	32.559	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/12/26 - 11:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE at Channel 2480MHz	

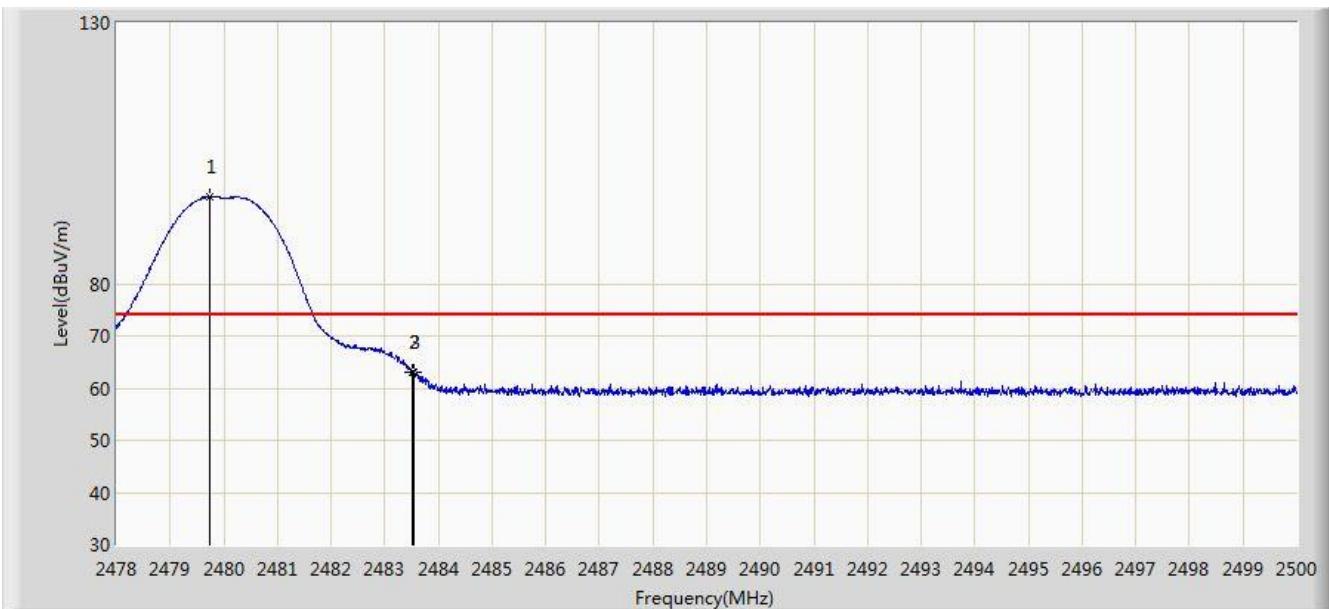

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2479.749	96.620	64.034	N/A	N/A	32.587	PK
2			2483.500	63.117	30.521	-10.883	74.000	32.596	PK
3			2483.544	63.133	30.537	-10.867	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/12/26 - 12:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE at Channel 2480MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2480.046	95.992	63.405	N/A	N/A	32.587	AV
2			2483.500	51.678	19.082	-2.322	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/12/26 - 12:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE at Channel 2480MHz	

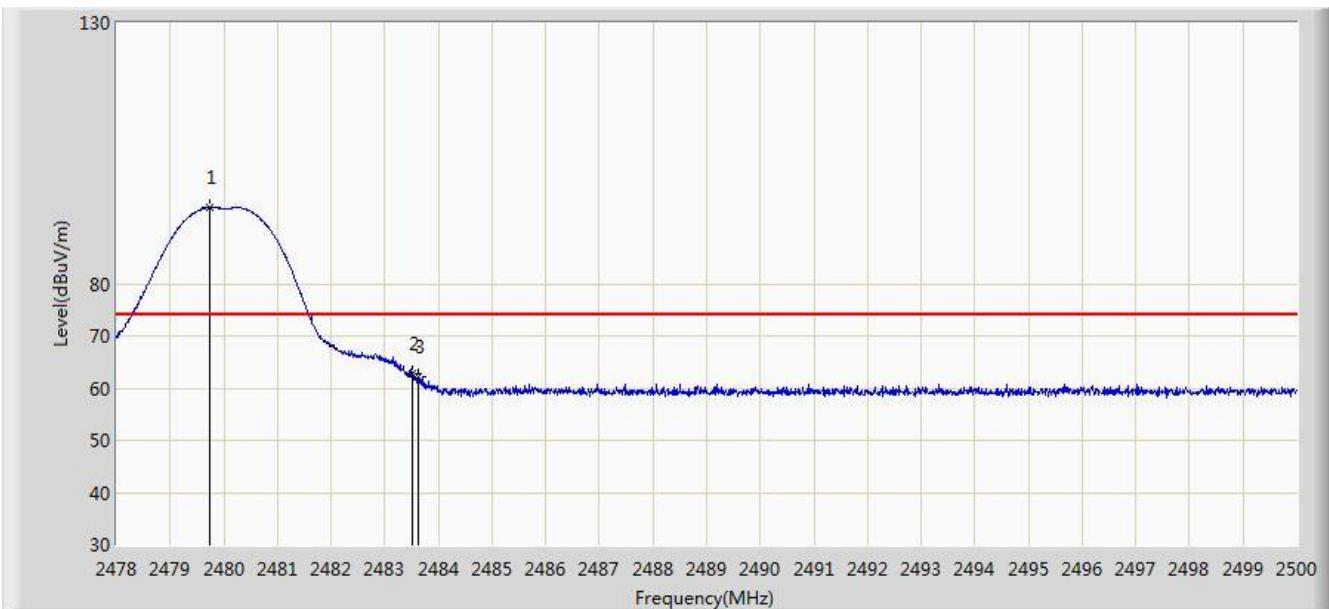

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2479.738	94.583	61.997	N/A	N/A	32.587	PK
2			2483.500	62.879	30.283	-11.121	74.000	32.596	PK
3			2483.621	62.301	29.705	-11.699	74.000	32.596	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2017/12/26 - 12:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by BLE at Channel 2480MHz	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2480.024	93.948	61.361	N/A	N/A	32.587	AV
2			2483.500	50.694	18.098	-3.306	54.000	32.596	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)


7.8. AC Conducted Emissions Measurement

7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50


Note 1: The lower limit shall apply at the transition frequencies.
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

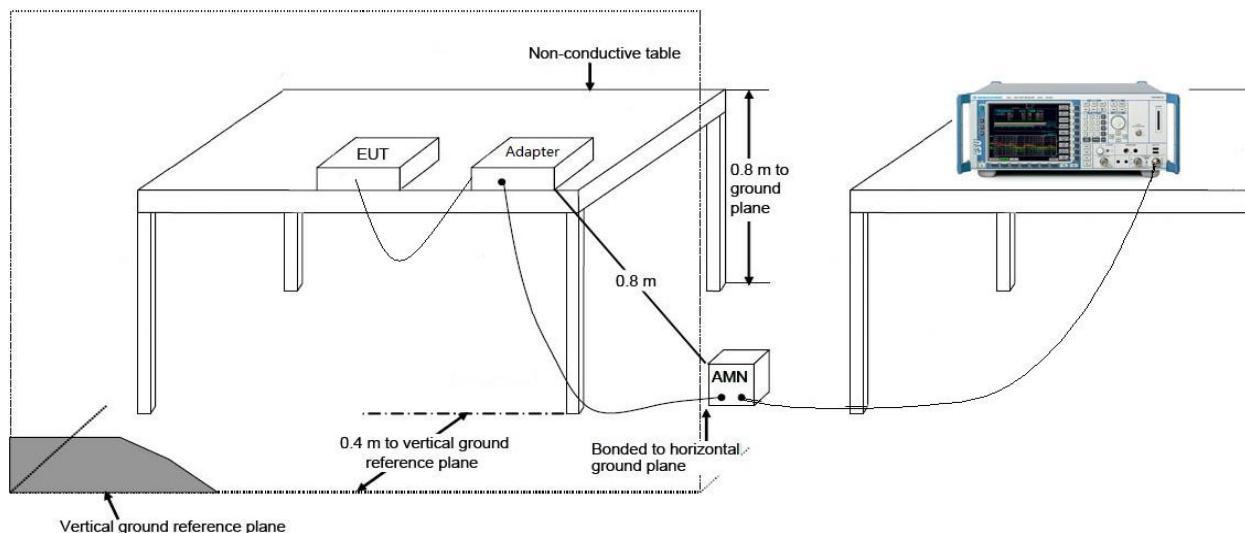

7.8.3. Test Result

Site: SR2	Time: 2017/11/06 - 16:13
Limit: FCC_Part15.207_CE	Engineer: Kevin Ker
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: ACCESS POINT	Power: AC 120V/60Hz
Worst Case Mode: Transmit by BLE at channel 2402MHz	

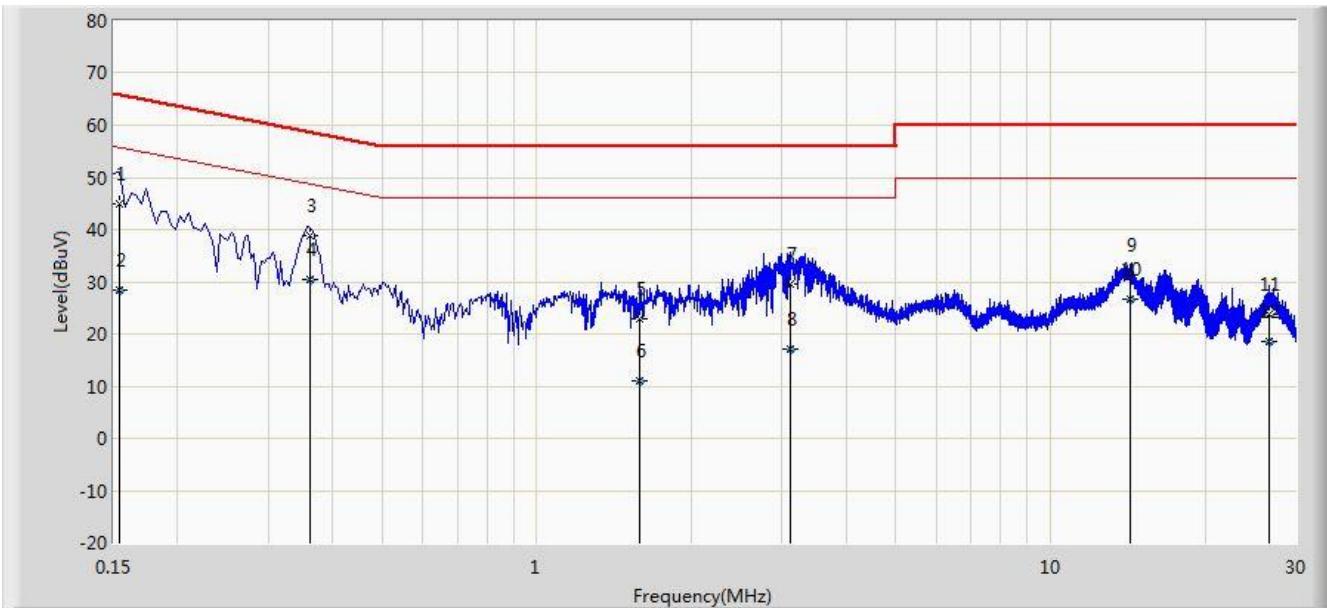


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V)	Factor (dB)	Type
1			0.154	44.929	34.190	-20.852	65.781	10.740	QP
2			0.154	28.550	17.811	-27.231	55.781	10.740	AV
3			0.362	38.912	28.858	-19.770	58.682	10.055	QP
4	*		0.362	30.471	20.417	-18.211	48.682	10.055	AV
5			1.586	22.803	12.917	-33.197	56.000	9.886	QP
6			1.586	10.887	1.001	-35.113	46.000	9.886	AV
7			3.114	29.525	19.666	-26.475	56.000	9.858	QP
8			3.114	17.135	7.277	-28.865	46.000	9.858	AV
9			14.334	31.170	21.113	-28.830	60.000	10.057	QP
10			14.334	26.560	16.502	-23.440	50.000	10.057	AV
11			26.618	23.893	13.649	-36.107	60.000	10.244	QP
12			26.618	18.605	8.362	-31.395	50.000	10.244	AV

Note: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2017/11/06 - 16:17
Limit: FCC_Part15.207_CE	Engineer: Kevin Ker
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: ACCESS POINT	Power: AC 120V/60Hz
Worst Case Mode: Transmit by BLE at channel 2402MHz	

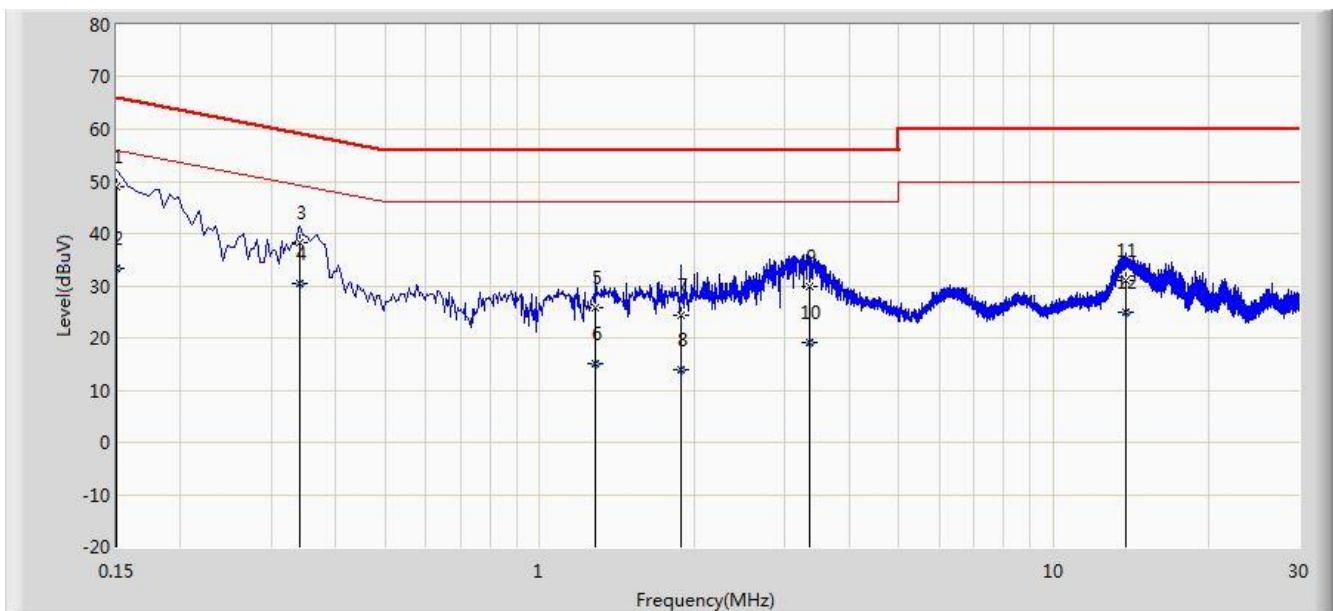

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.150	48.866	37.724	-17.134	66.000	11.142	QP
2			0.150	33.445	22.303	-22.555	56.000	11.142	AV
3			0.342	38.181	28.112	-20.973	59.155	10.069	QP
4			0.342	30.440	20.372	-18.714	49.155	10.069	AV
5			1.286	25.657	15.759	-30.343	56.000	9.898	QP
6			1.286	14.984	5.086	-31.016	46.000	9.898	AV
7			1.882	24.411	14.534	-31.589	56.000	9.877	QP
8			1.882	13.988	4.111	-32.012	46.000	9.877	AV
9			3.350	29.852	19.950	-26.148	56.000	9.902	QP
10			3.350	19.010	9.108	-26.990	46.000	9.902	AV
11			13.790	30.983	20.896	-29.017	60.000	10.086	QP
12			13.790	24.793	14.707	-25.207	50.000	10.086	AV

Note: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **ACCESS POINT FCC ID: Q9DAPIN0303** is in compliance with Part 15C of the FCC Rules.

The End