

Site: AC1	Time: 2020/07/24 - 02:18
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2437MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.995	50.361	18.074	-3.639	54.000	32.288	AV
2			2390.000	48.678	16.382	-5.322	54.000	32.296	AV
3		*	2436.160	107.209	74.710	N/A	N/A	32.500	AV
4			2483.500	48.803	16.095	-5.197	54.000	32.707	AV
5			2485.845	49.794	17.076	-4.206	54.000	32.718	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 17:15
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz	

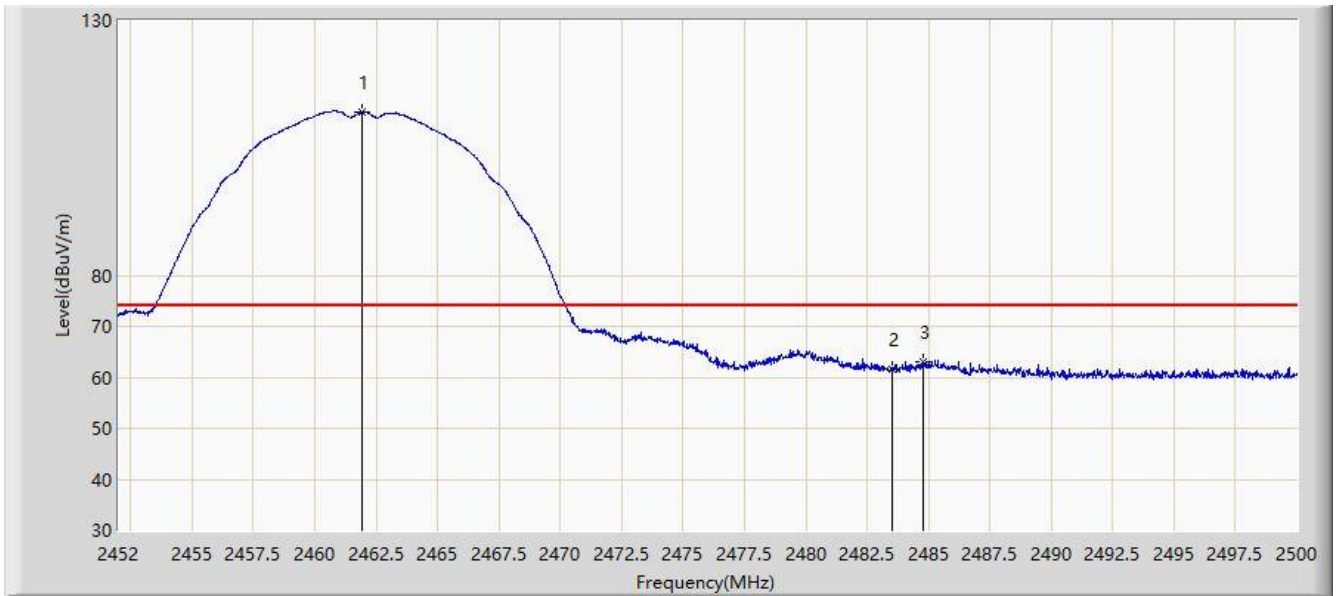

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.912	112.049	79.437	N/A	N/A	32.612	PK
2			2483.500	61.734	29.026	-12.266	74.000	32.707	PK
3			2484.784	63.179	30.466	-10.821	74.000	32.713	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 17:13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	X	*	2462.728	108.476	75.860	N/A	N/A	32.615	AV
2			2483.500	49.367	16.659	-4.633	54.000	32.707	AV
3			2484.736	51.608	18.895	-2.392	54.000	32.713	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 17:17
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz	

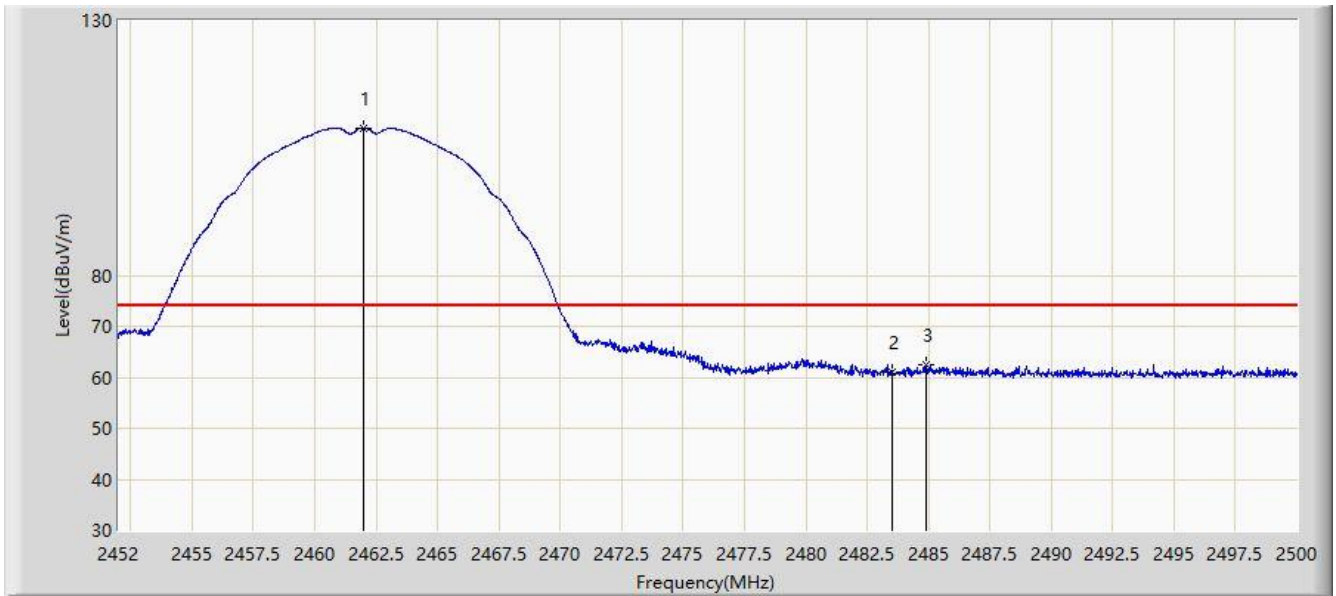


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.984	108.944	76.332	N/A	N/A	32.612	PK
2			2483.500	61.007	28.299	-12.993	74.000	32.707	PK
3			2484.928	62.567	29.853	-11.433	74.000	32.714	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 17:20
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2462MHz	

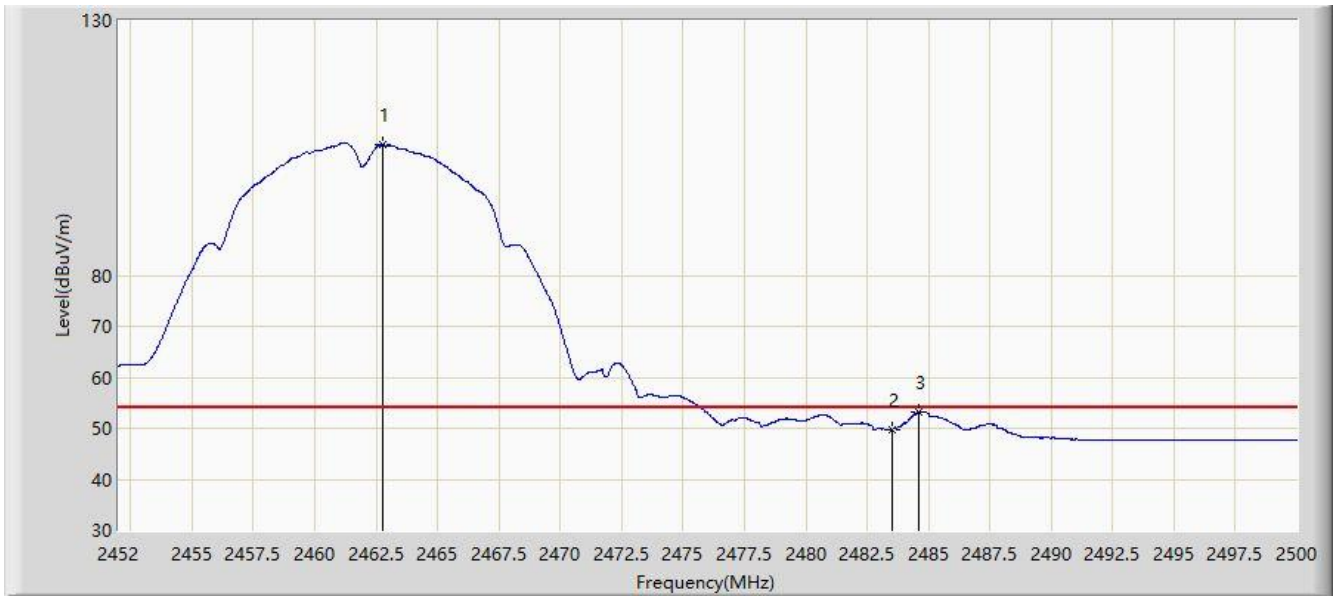


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.752	105.624	73.008	N/A	N/A	32.615	AV
2			2483.500	49.805	17.097	-4.195	54.000	32.707	AV
3			2484.592	53.150	20.438	-0.850	54.000	32.713	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 03:21
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz	

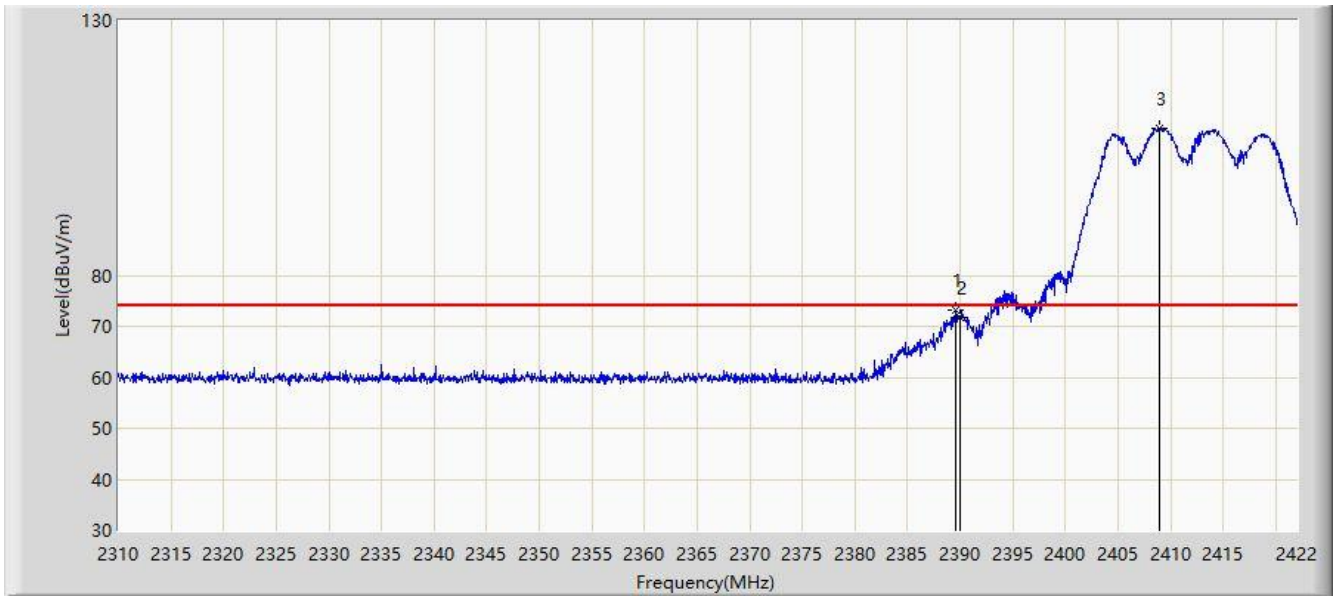


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.632	73.059	40.764	-0.941	74.000	32.295	PK
2			2390.000	71.847	39.551	-2.153	74.000	32.296	PK
3		*	2409.008	108.906	76.527	N/A	N/A	32.380	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 03:22
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz	

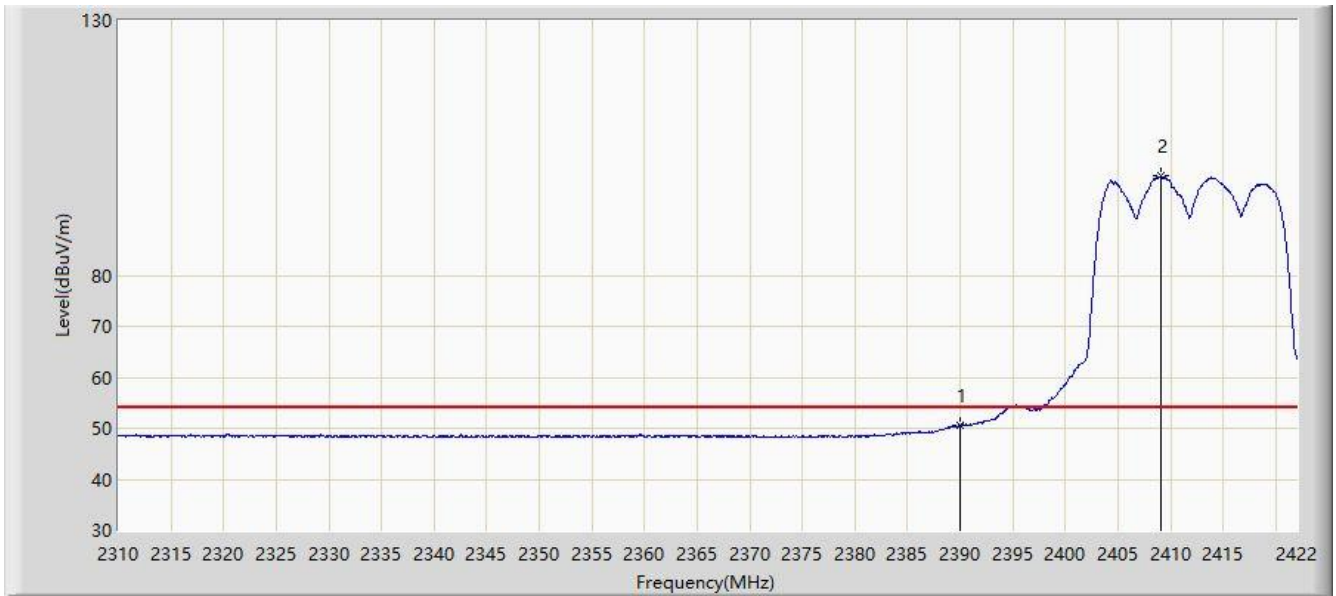


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.443	18.147	-3.557	54.000	32.296	AV
2		*	2409.064	99.433	67.054	N/A	N/A	32.380	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 03:22
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz	

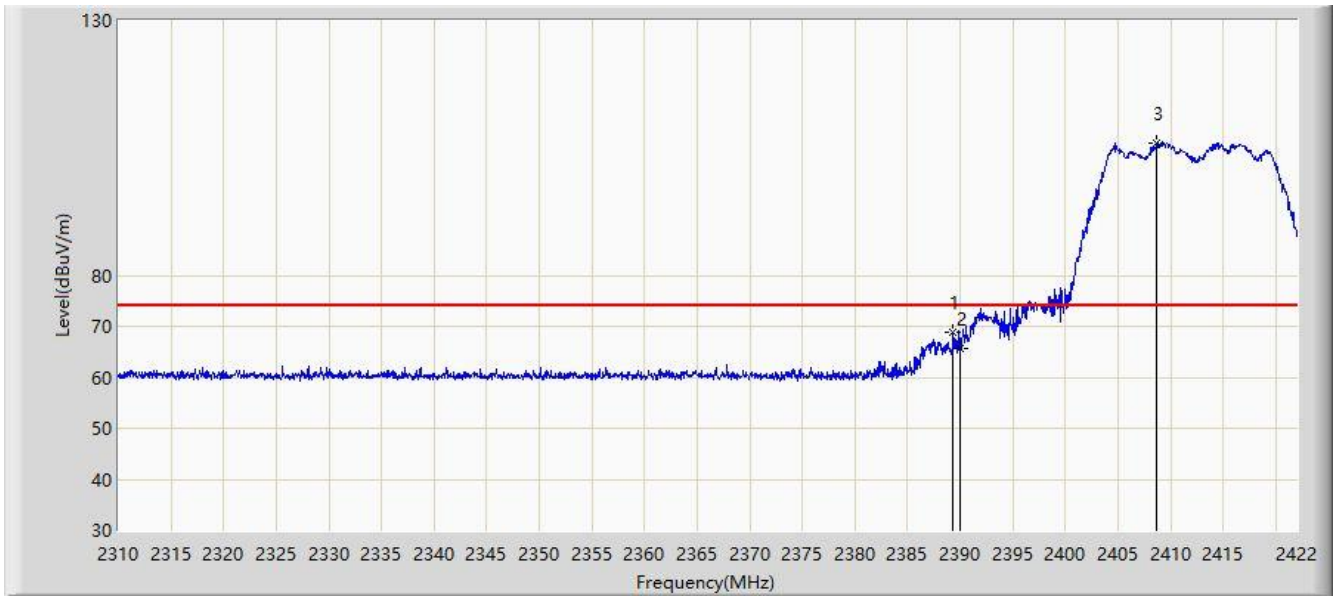


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.352	68.809	36.516	-5.191	74.000	32.293	PK
2			2390.000	65.536	33.240	-8.464	74.000	32.296	PK
3		*	2408.728	106.075	73.697	N/A	N/A	32.378	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 03:23
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2412MHz	

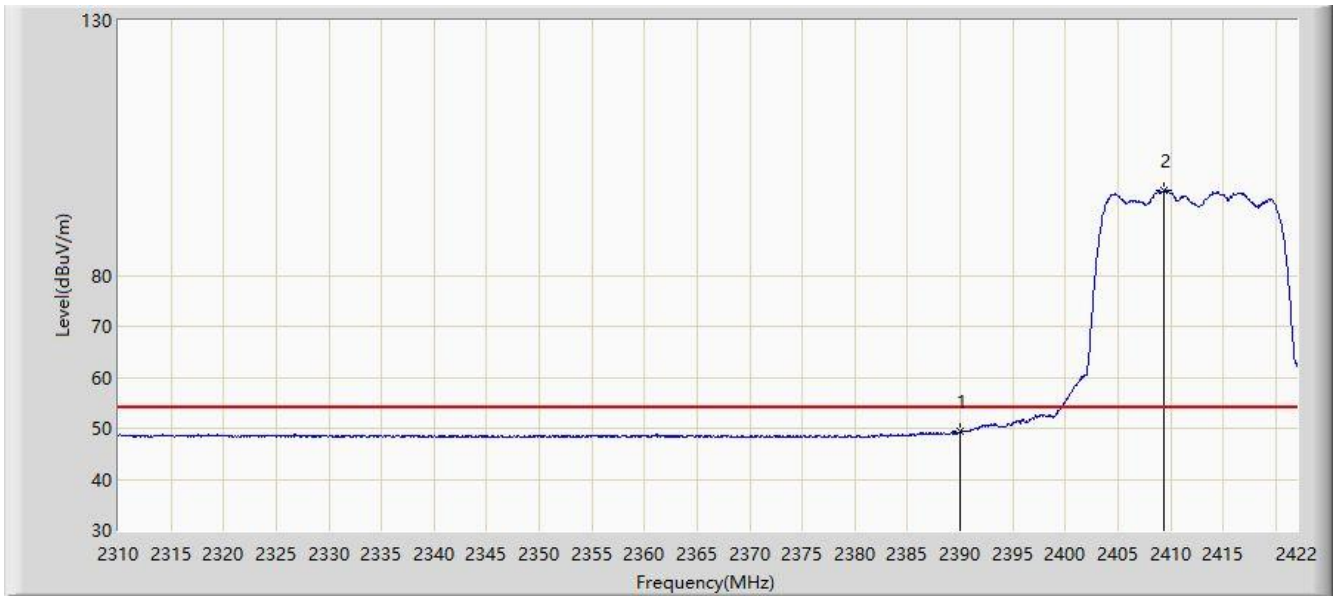

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.423	17.127	-4.577	54.000	32.296	AV
2		*	2409.400	96.629	64.248	N/A	N/A	32.381	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 21:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2417MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.928	67.740	35.444	-6.260	74.000	32.296	PK
2			2390.000	66.366	34.070	-7.634	74.000	32.296	PK
3		*	2409.696	104.486	72.104	N/A	N/A	32.382	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 22:00
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2417MHz	

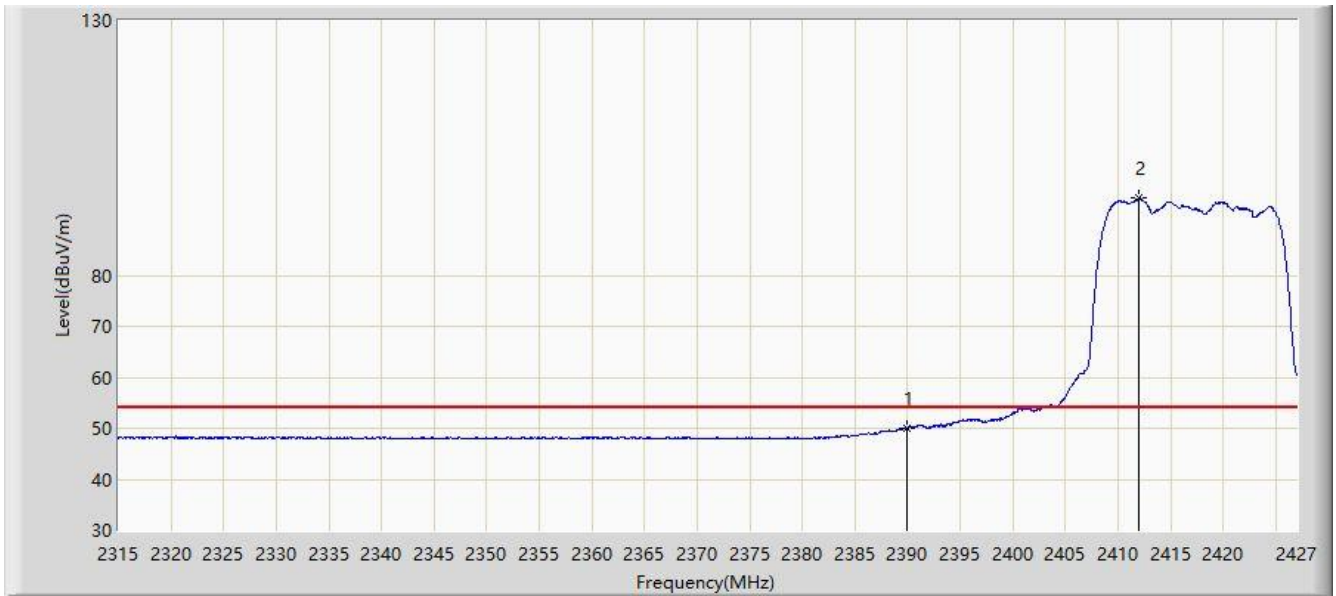


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.076	17.780	-3.924	54.000	32.296	AV
2		*	2411.992	95.159	62.767	N/A	N/A	32.392	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 21:58
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2417MHz	

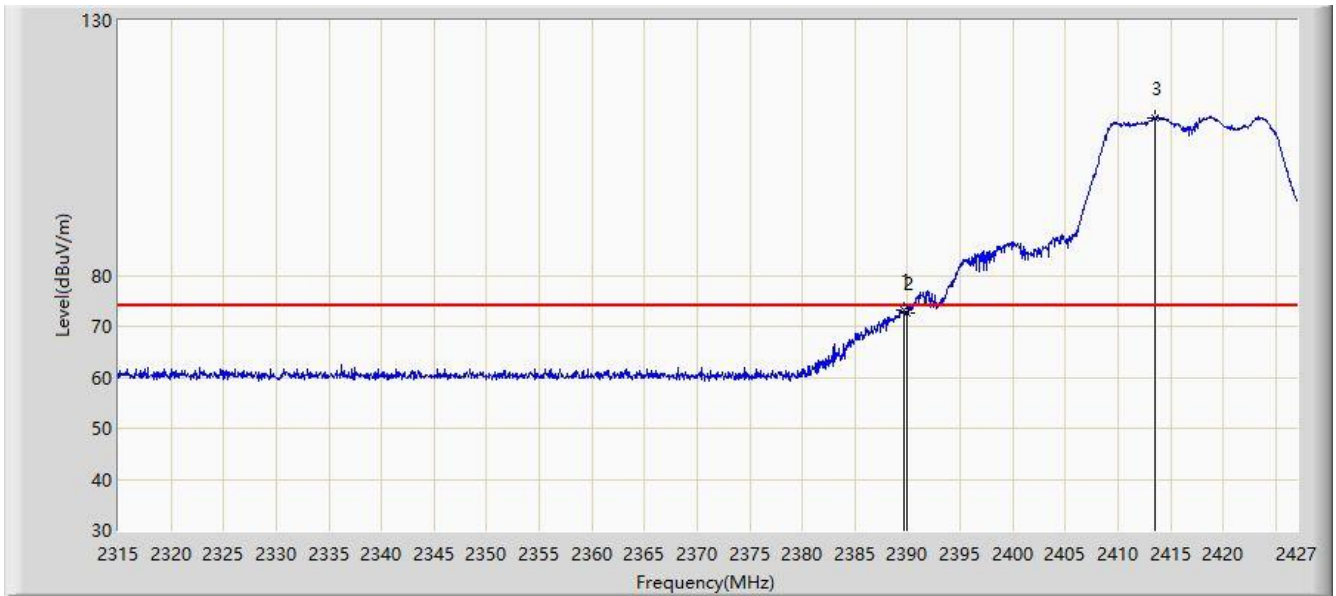


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.648	73.154	40.859	-0.846	74.000	32.295	PK
2			2390.000	72.556	40.260	-1.444	74.000	32.296	PK
3		*	2413.560	110.959	78.560	N/A	N/A	32.399	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 21:52
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2417MHz	

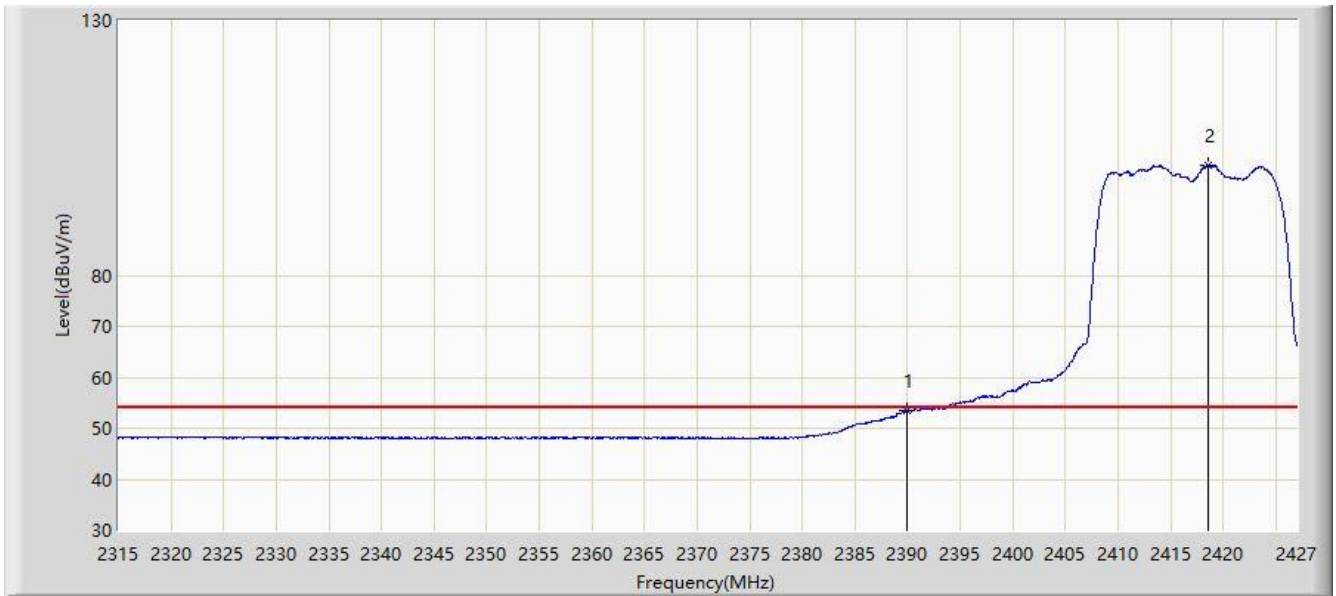


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.352	21.056	-0.648	54.000	32.296	AV
2		*	2418.600	101.643	69.221	N/A	N/A	32.422	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 03:33
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2437MHz	

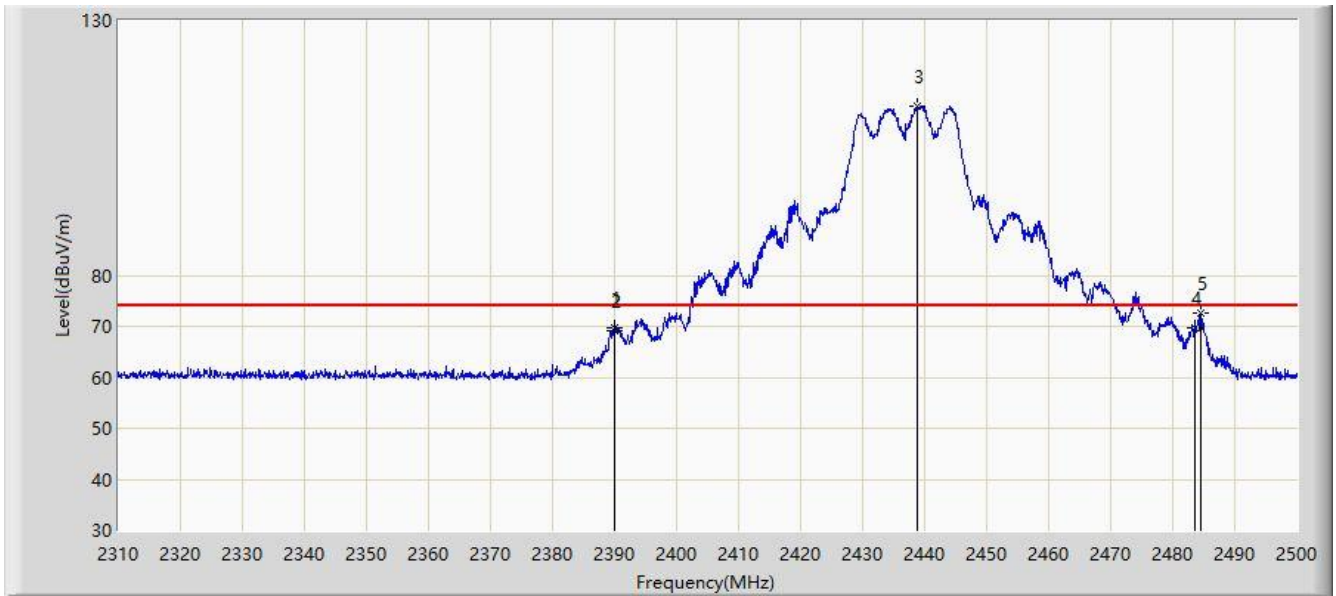


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.895	69.851	37.555	-4.149	74.000	32.296	PK
2			2390.000	69.237	36.941	-4.763	74.000	32.296	PK
3		*	2438.915	113.114	80.602	N/A	N/A	32.512	PK
4			2483.500	69.635	36.927	-4.365	74.000	32.707	PK
5			2484.610	72.506	39.793	-1.494	74.000	32.713	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 03:24
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2437MHz	

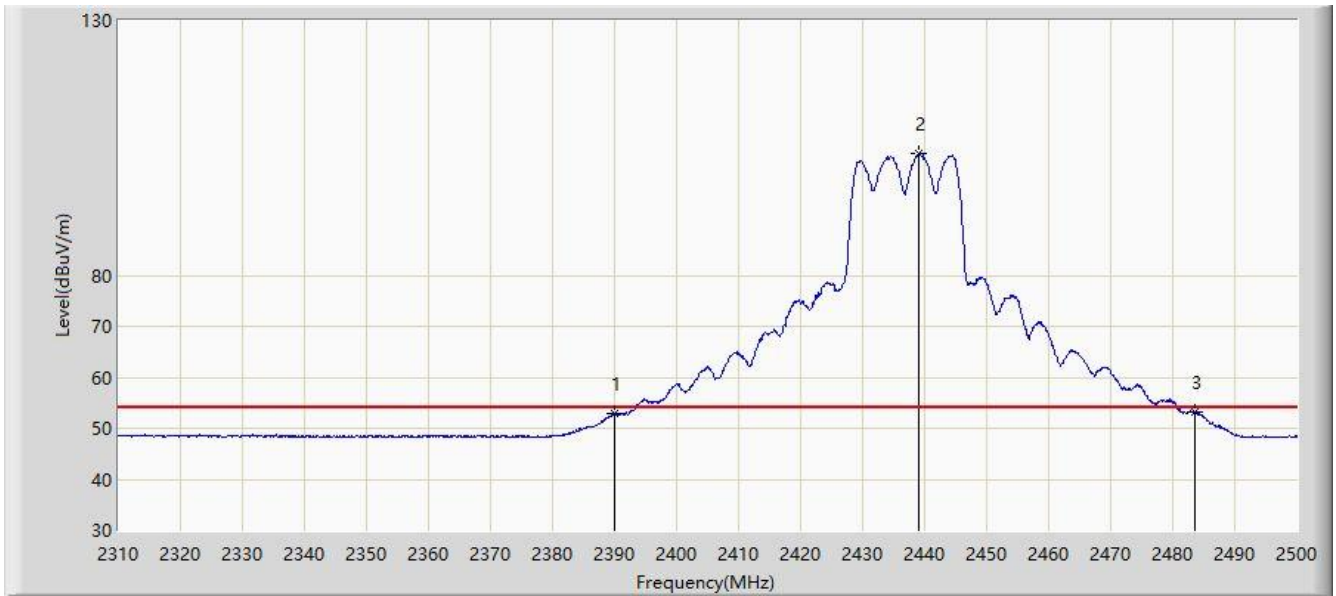

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.765	20.469	-1.235	54.000	32.296	AV
2		*	2439.010	103.793	71.281	N/A	N/A	32.512	AV
3			2483.500	53.182	20.474	-0.818	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 03:34
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2437MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.855	66.057	33.775	-7.943	74.000	32.282	PK
2			2390.000	65.512	33.216	-8.488	74.000	32.296	PK
3		*	2431.505	110.064	77.585	N/A	N/A	32.479	PK
4			2483.500	65.998	33.290	-8.002	74.000	32.707	PK
5			2484.610	69.598	36.885	-4.402	74.000	32.713	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 03:35
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2437MHz	

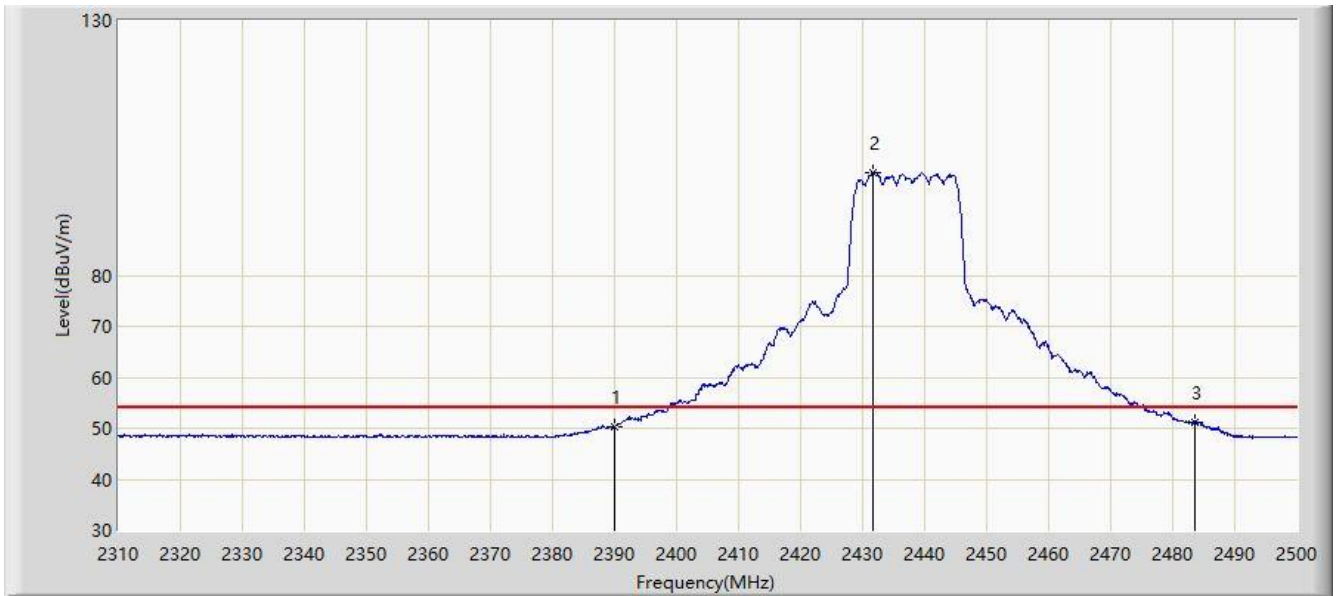


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.298	18.002	-3.702	54.000	32.296	AV
2		*	2431.600	100.035	67.556	N/A	N/A	32.479	AV
3			2483.500	51.040	18.332	-2.960	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 22:25
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2457MHz	

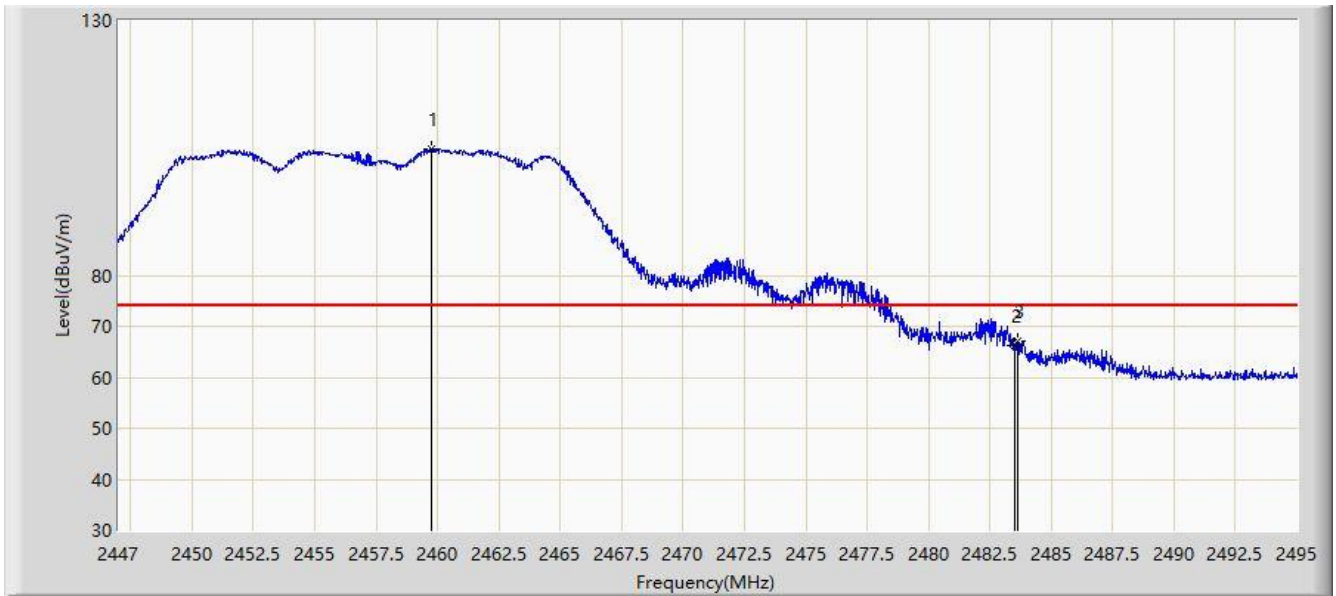


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.744	104.720	72.117	N/A	N/A	32.603	PK
2			2483.500	66.183	33.475	-7.817	74.000	32.707	PK
3			2483.624	67.005	34.297	-6.995	74.000	32.709	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 22:26
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2457MHz	

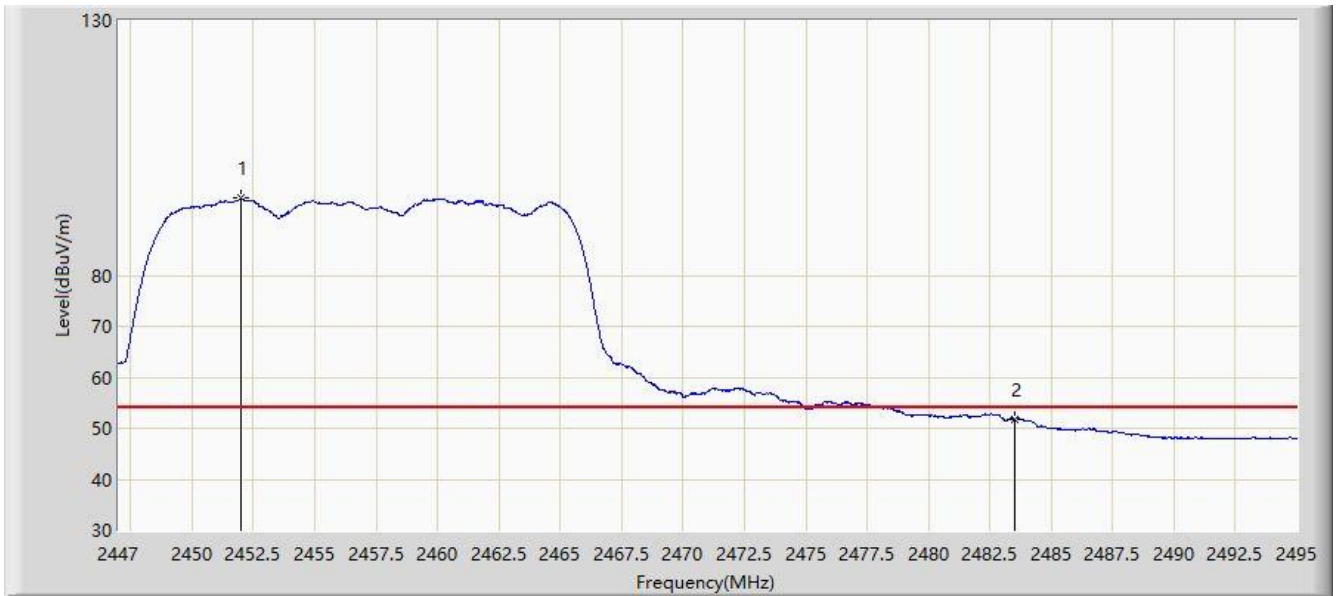


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2452.016	95.079	62.510	N/A	N/A	32.569	AV
2			2483.500	51.804	19.096	-2.196	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 22:23
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2457MHz	

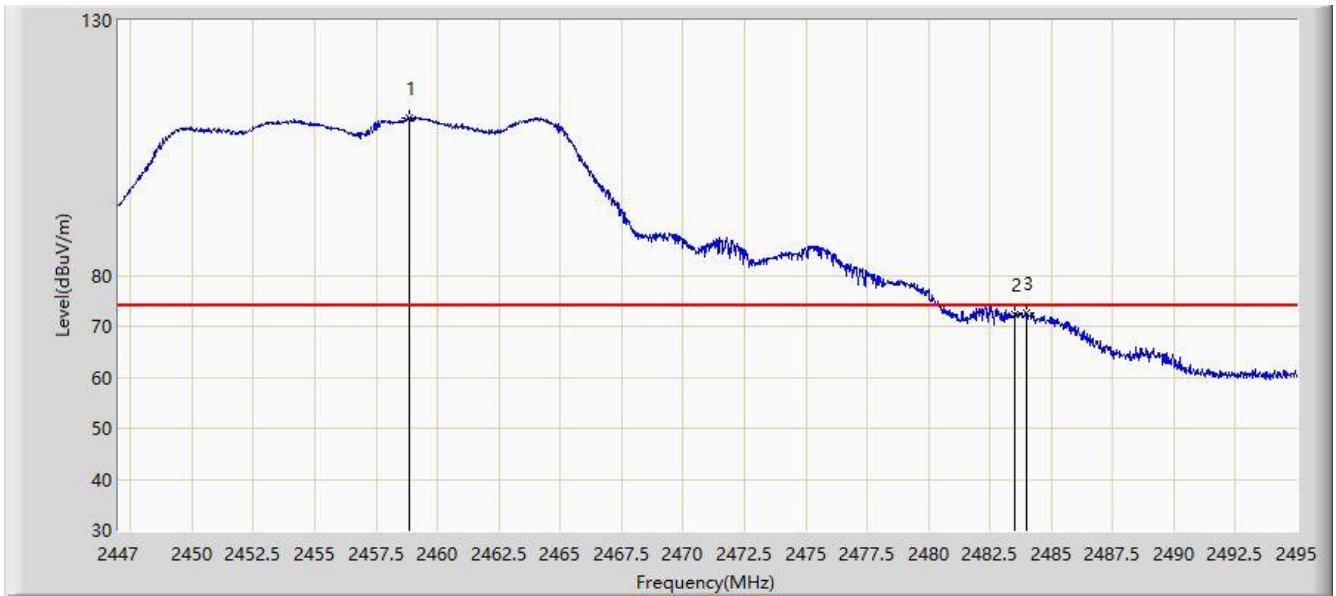


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.832	110.912	78.313	N/A	N/A	32.599	PK
2			2483.500	72.367	39.659	-1.633	74.000	32.707	PK
3			2484.008	72.713	40.003	-1.287	74.000	32.710	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 22:21
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2457MHz	

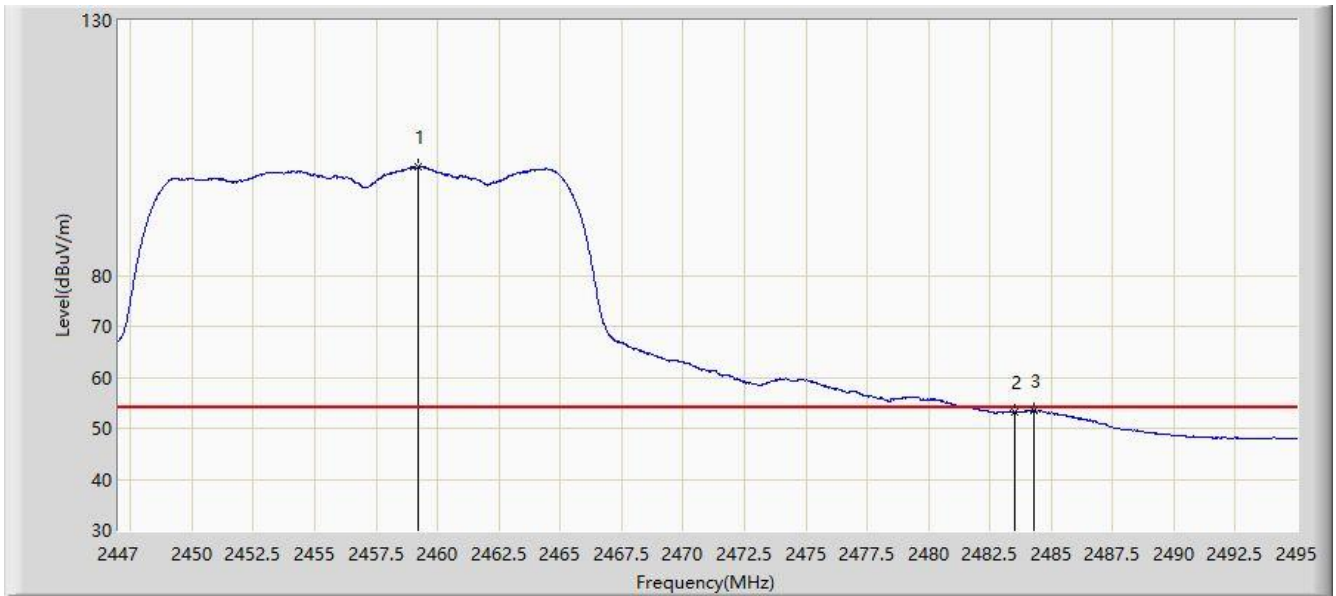


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.216	101.280	68.680	N/A	N/A	32.600	AV
2			2483.500	53.156	20.448	-0.844	54.000	32.707	AV
3			2484.296	53.469	20.758	-0.531	54.000	32.711	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/22 - 03:38
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz	

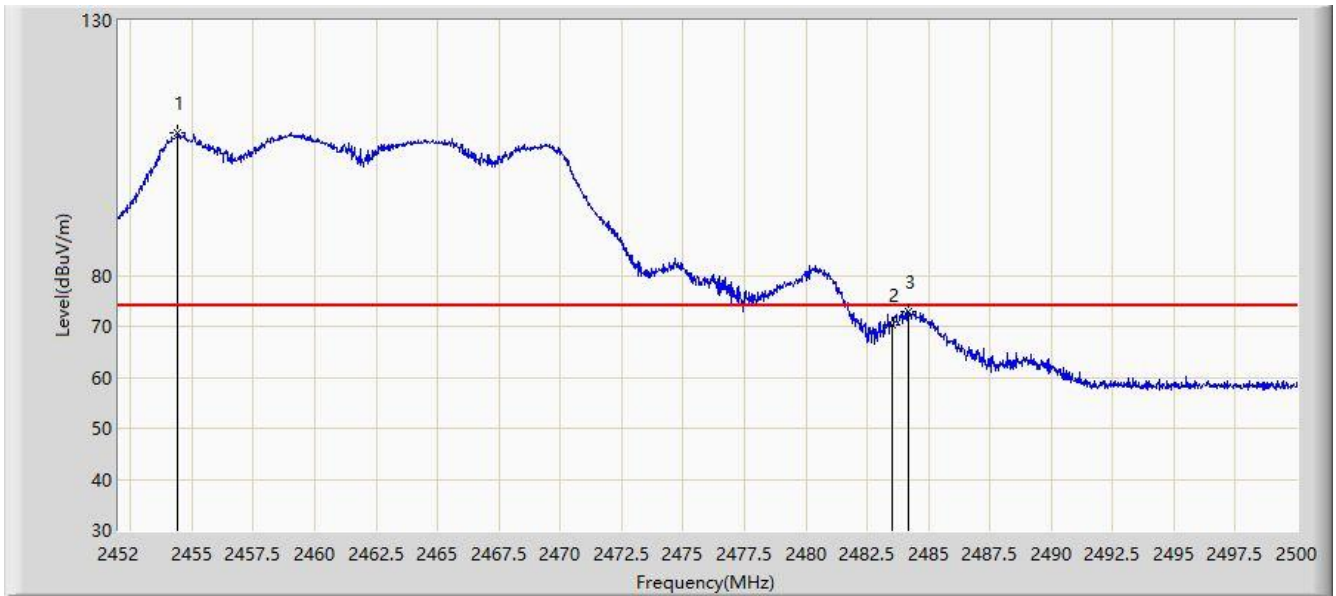


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.424	107.885	75.306	N/A	N/A	32.579	PK
2			2483.500	70.205	37.497	-3.795	74.000	32.707	PK
3			2484.160	72.854	40.143	-1.146	74.000	32.710	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/22 - 03:40
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz	

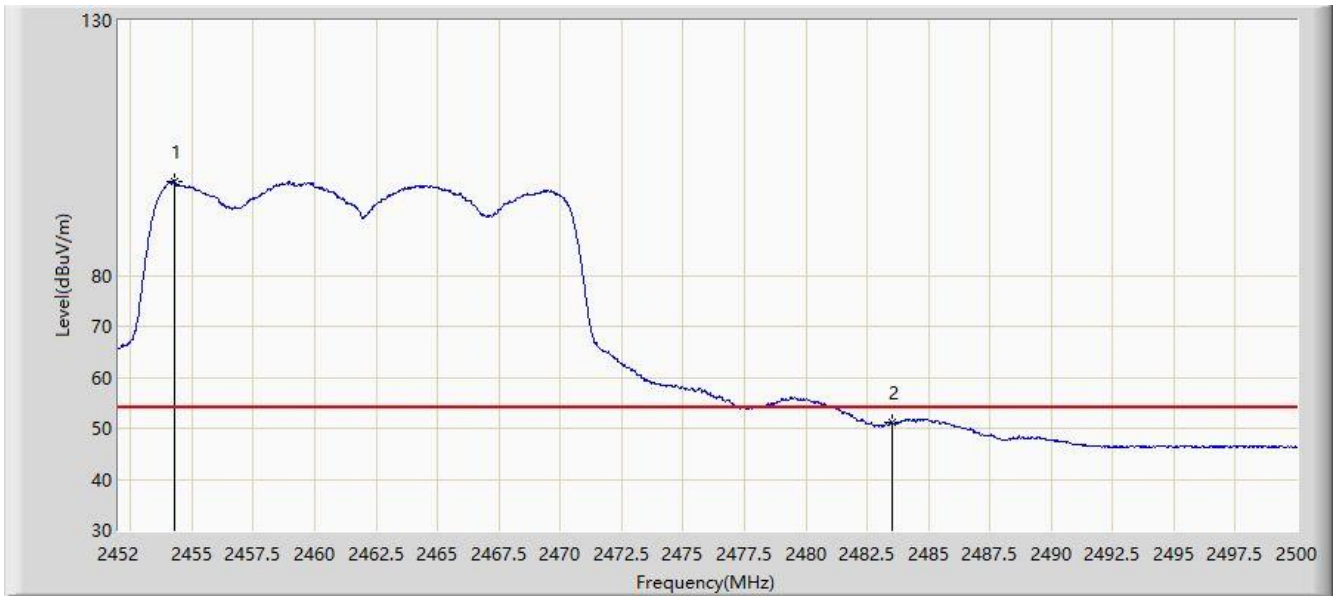


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.256	98.494	65.915	N/A	N/A	32.578	AV
2			2483.500	51.172	18.464	-2.828	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/22 - 03:41
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz	

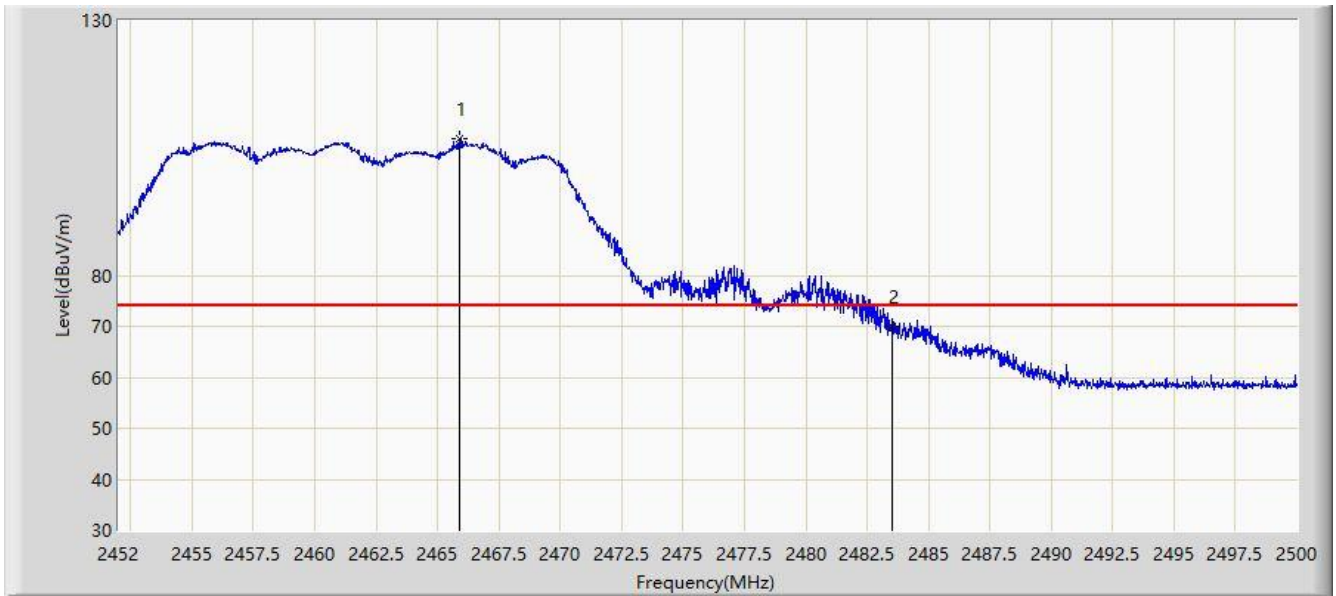

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.896	106.899	74.270	N/A	N/A	32.630	PK
2			2483.500	70.144	37.436	-3.856	74.000	32.707	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/22 - 03:42
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.056	96.996	64.409	N/A	N/A	32.586	AV
2			2483.500	50.244	17.536	-3.756	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 19:47
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

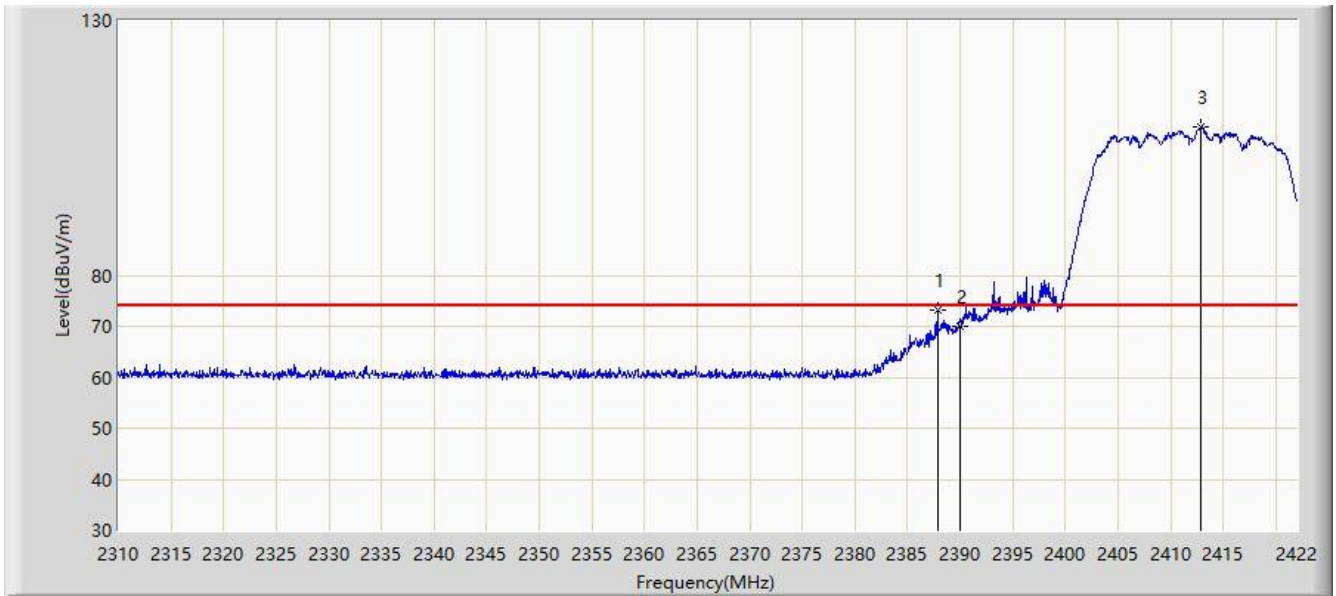


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.840	73.068	40.781	-0.932	74.000	32.286	PK
2			2390.000	69.891	37.595	-4.109	74.000	32.296	PK
3		*	2412.928	109.165	76.769	N/A	N/A	32.396	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 19:50
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

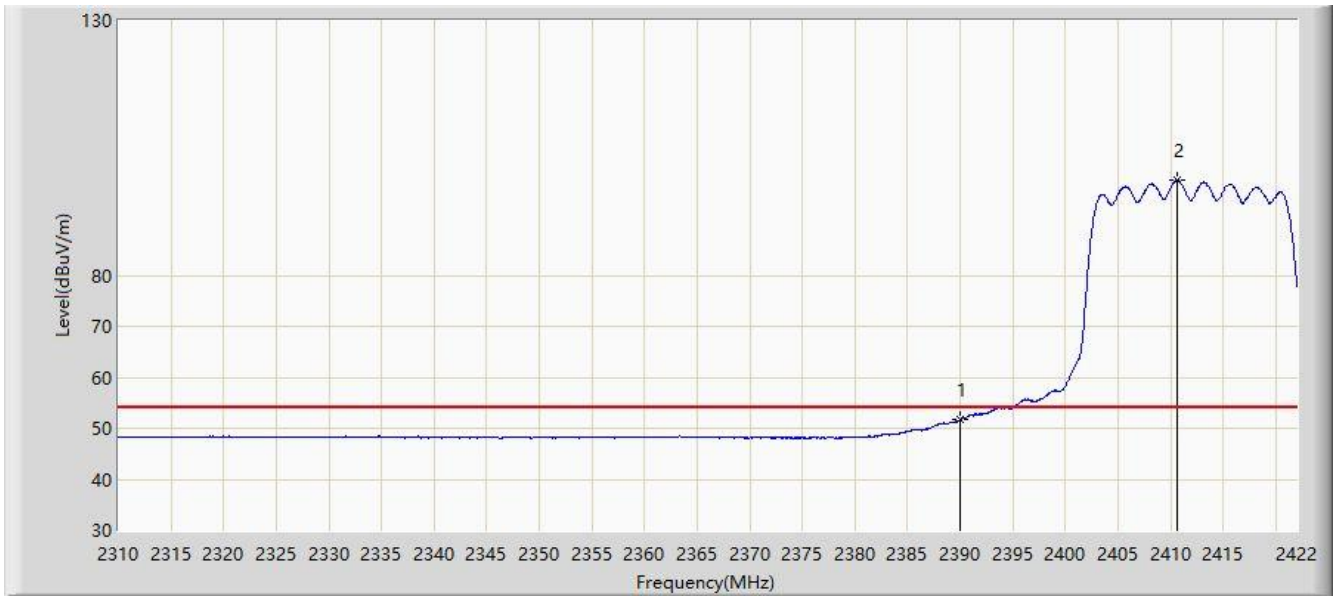


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.654	19.358	-2.346	54.000	32.296	AV
2		*	2410.576	98.808	66.422	N/A	N/A	32.386	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 19:53
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

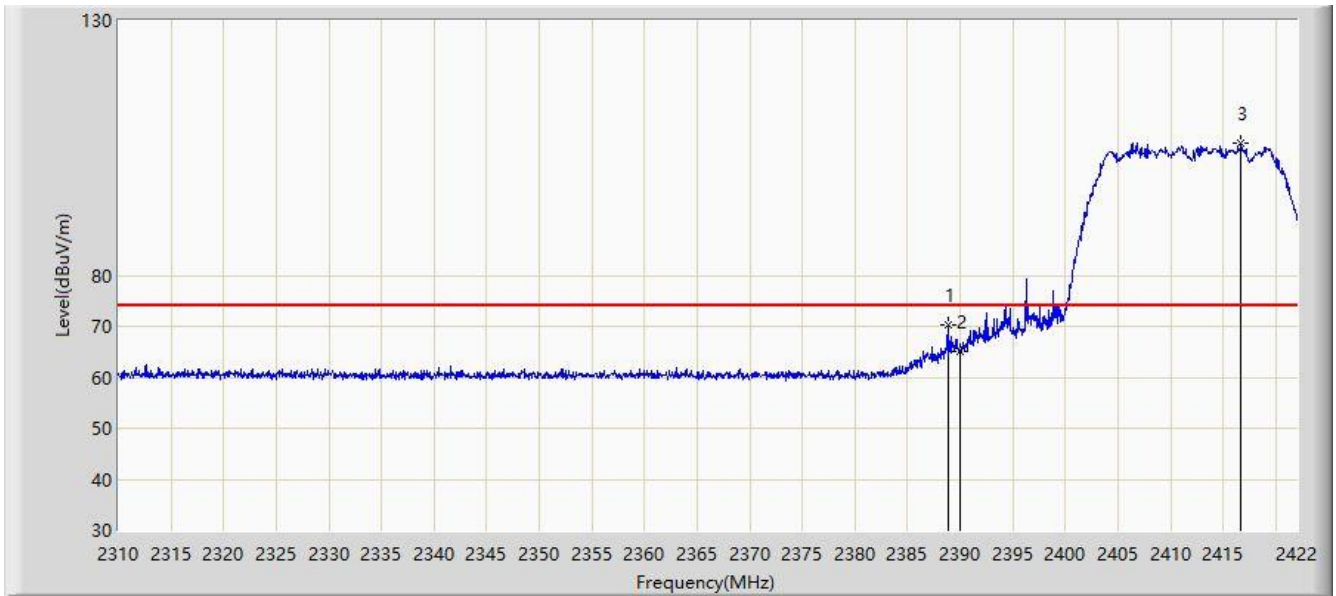


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.848	70.399	38.108	-3.601	74.000	32.291	PK
2			2390.000	65.207	32.911	-8.793	74.000	32.296	PK
3		*	2416.680	106.076	73.663	N/A	N/A	32.413	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 19:52
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

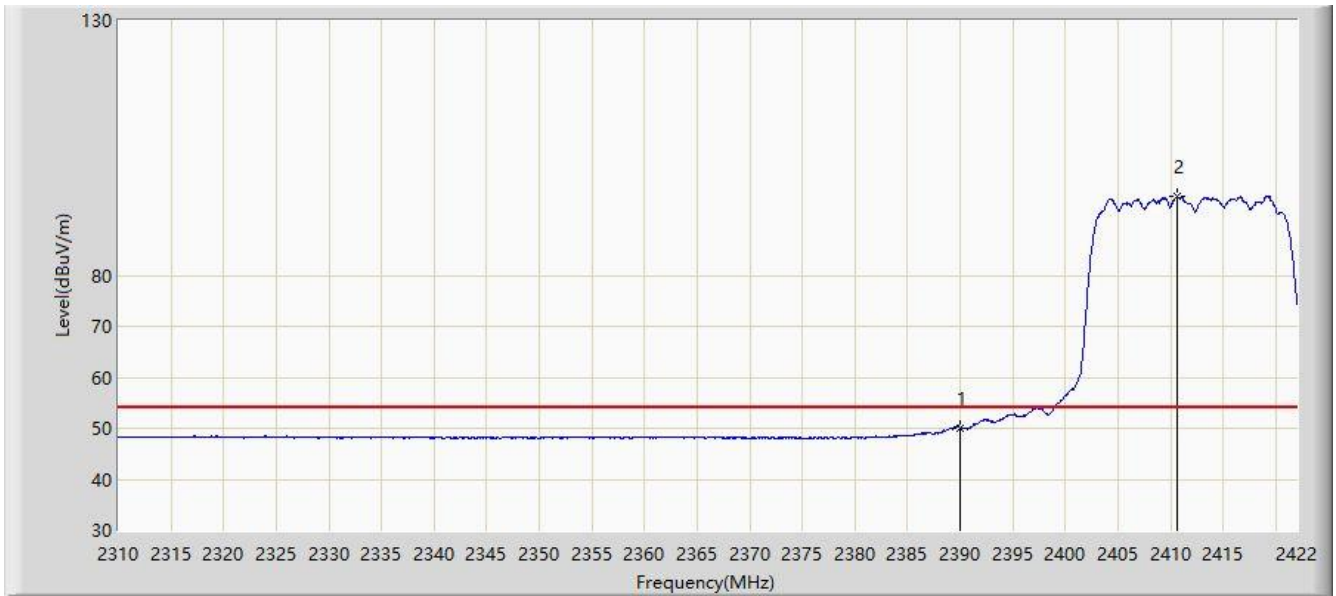


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.118	17.822	-3.882	54.000	32.296	AV
2		*	2410.632	95.407	63.021	N/A	N/A	32.386	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 22:43
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2417MHz	

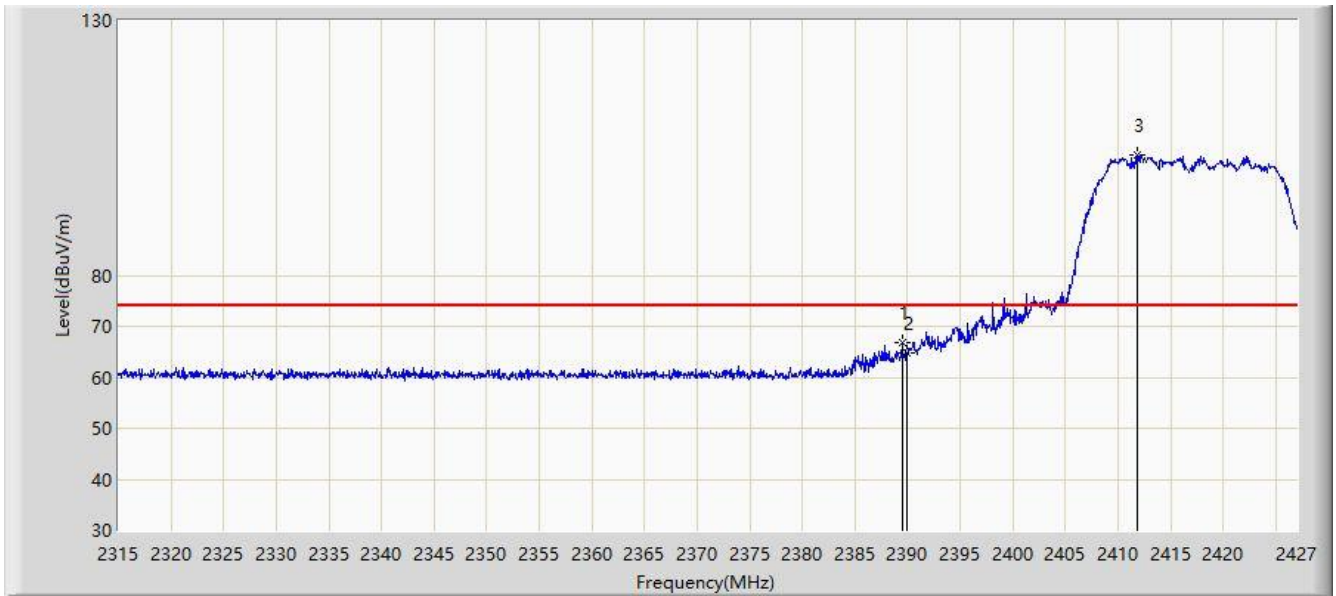


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.480	66.676	34.382	-7.324	74.000	32.293	PK
2			2390.000	64.718	32.422	-9.282	74.000	32.296	PK
3		*	2411.880	103.607	71.215	N/A	N/A	32.392	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 22:47
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2417MHz	

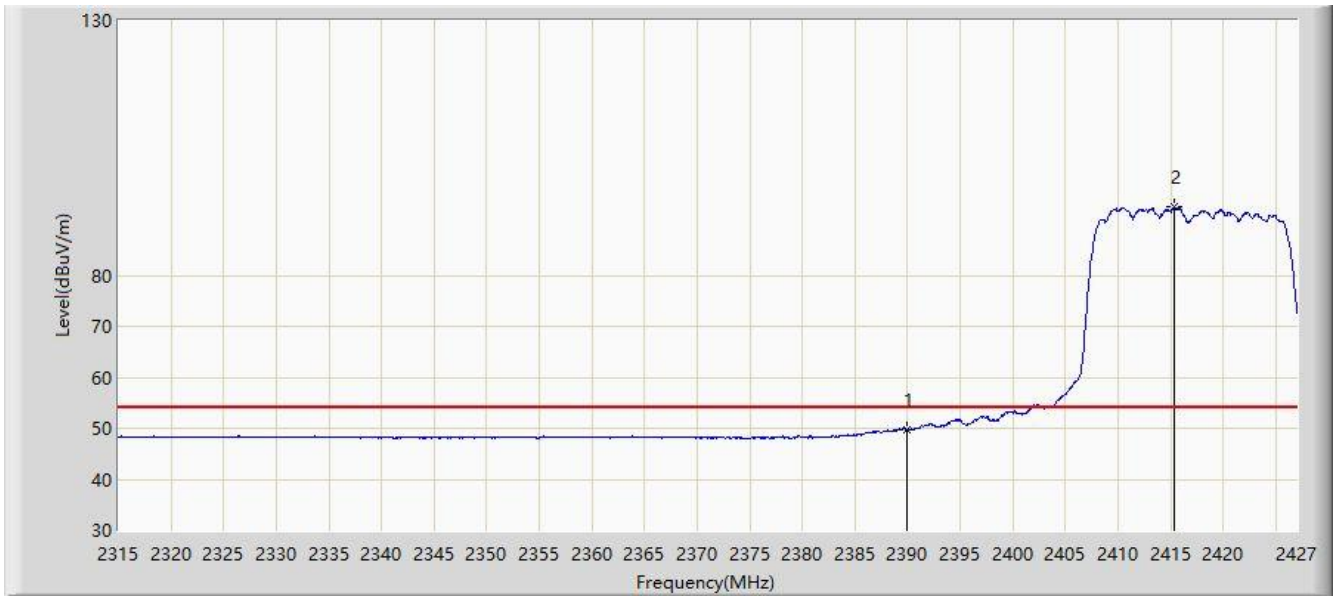


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.830	17.534	-4.170	54.000	32.296	AV
2		*	2415.352	93.576	61.169	N/A	N/A	32.407	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 22:52
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2417MHz	

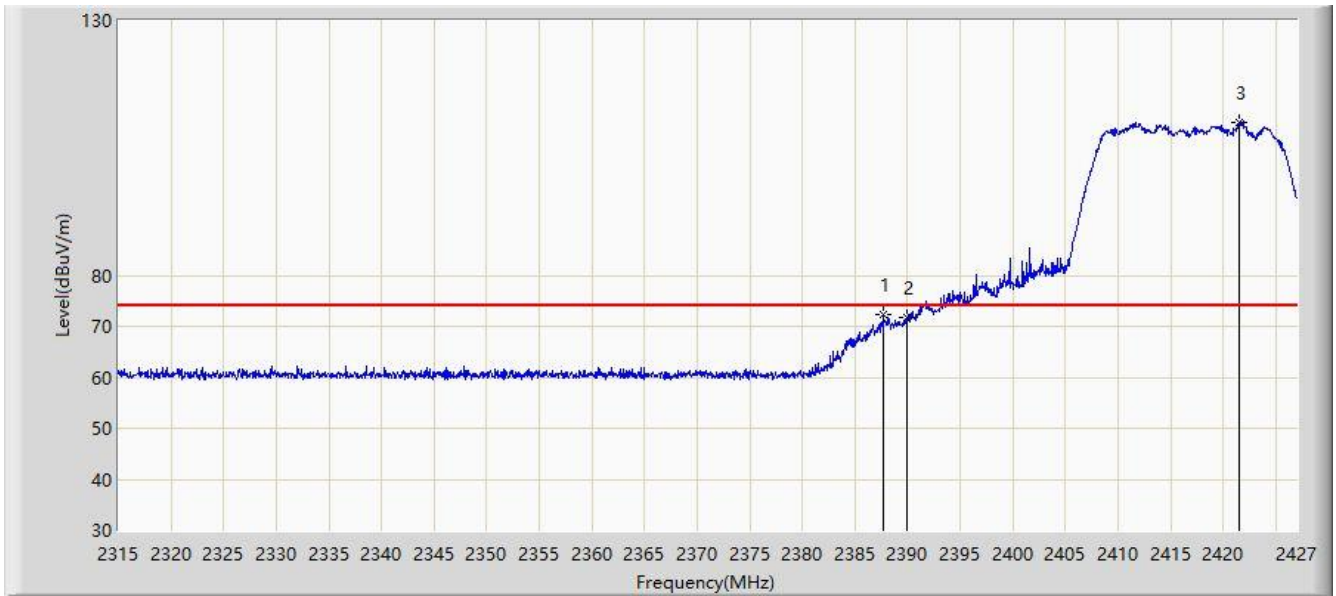


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.688	72.179	39.893	-1.821	74.000	32.286	PK
2			2390.000	71.708	39.412	-2.292	74.000	32.296	PK
3		*	2421.512	109.998	77.563	N/A	N/A	32.435	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 22:48
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2417MHz	

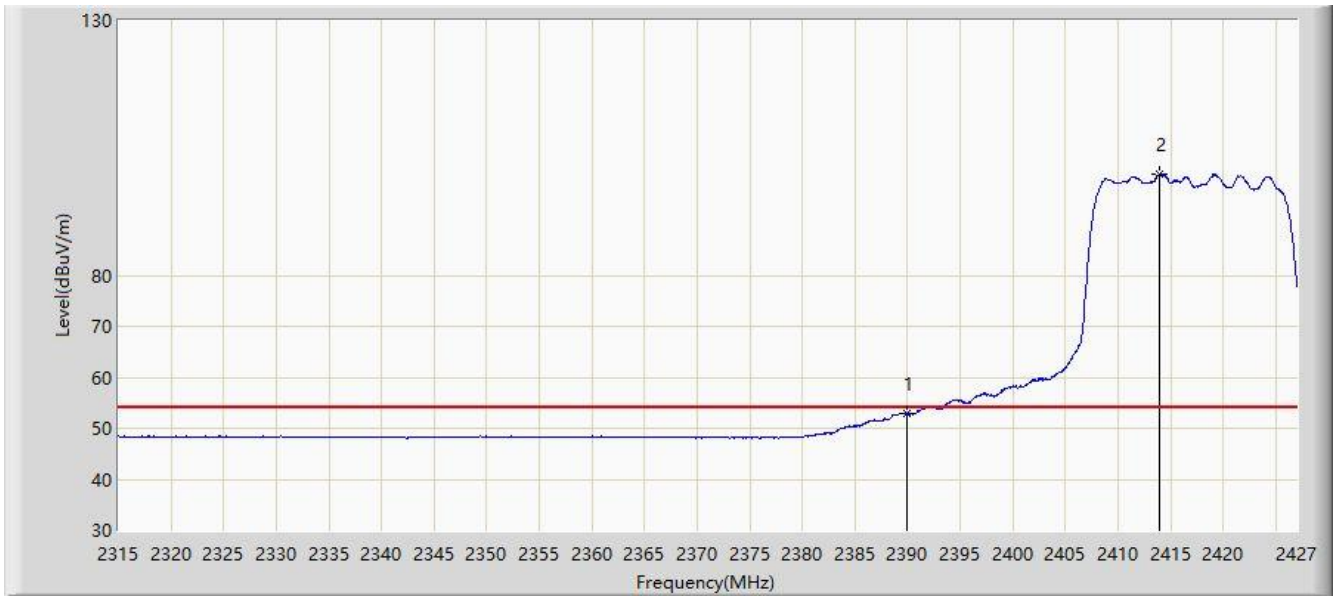


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.900	20.604	-1.100	54.000	32.296	AV
2		*	2413.952	99.750	67.349	N/A	N/A	32.401	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/22 - 23:35
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz	

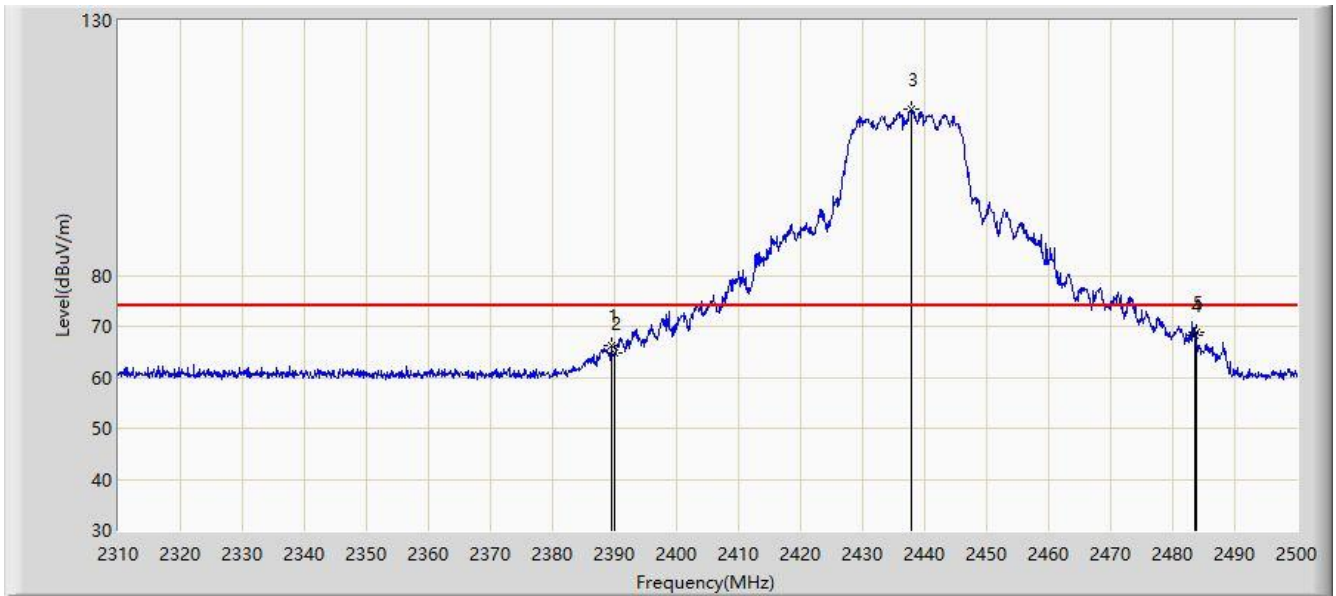


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.515	66.174	33.880	-7.826	74.000	32.294	PK
2			2390.000	64.726	32.430	-9.274	74.000	32.296	PK
3		*	2437.775	112.478	79.971	N/A	N/A	32.506	PK
4			2483.500	68.378	35.670	-5.622	74.000	32.707	PK
5			2483.755	68.797	36.088	-5.203	74.000	32.709	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/22 - 23:34
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz	

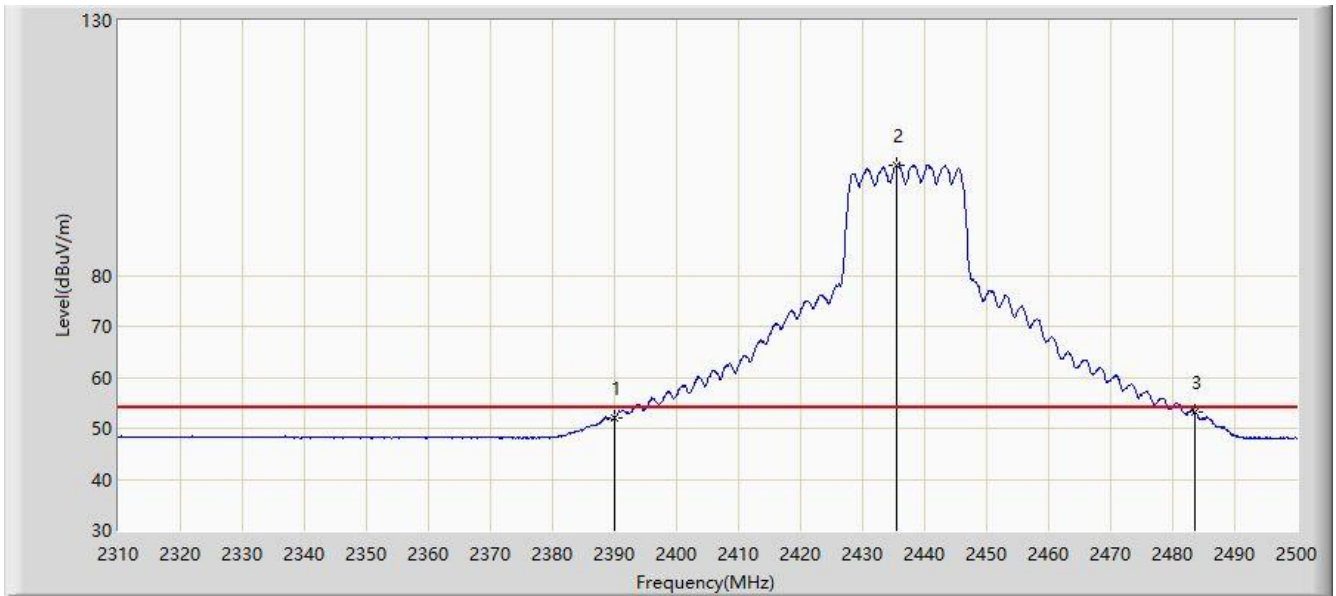


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.034	19.738	-1.966	54.000	32.296	AV
2		*	2435.590	101.686	69.189	N/A	N/A	32.497	AV
3			2483.500	53.147	20.439	-0.853	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/22 - 23:37
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz	

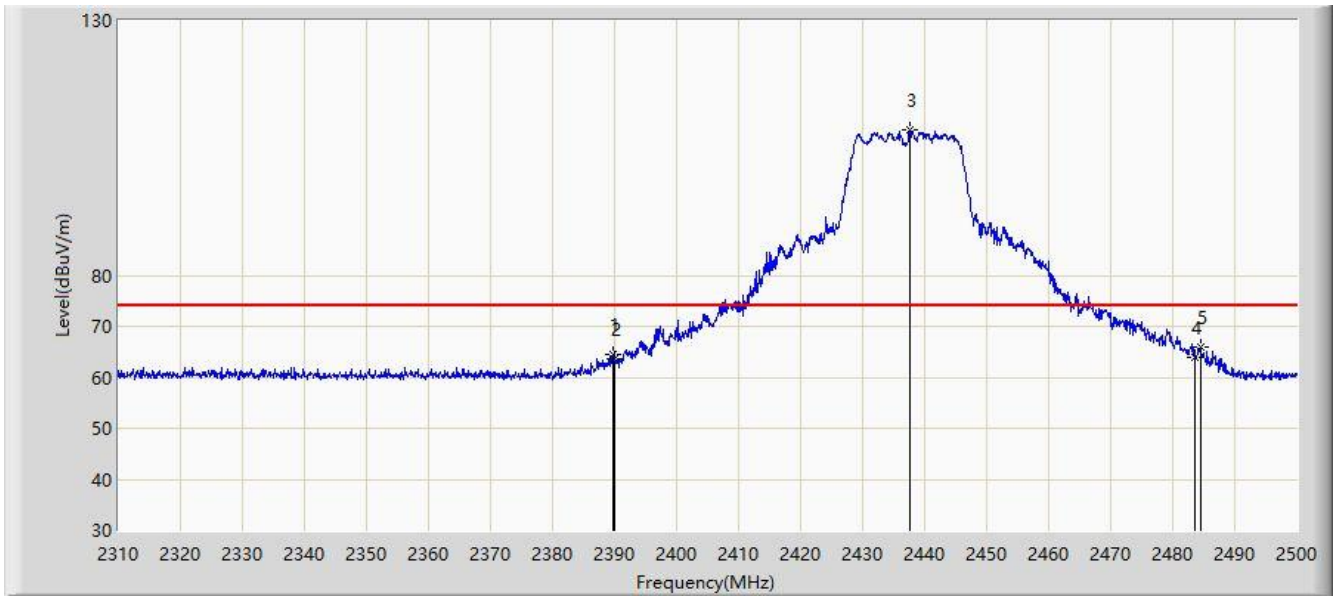


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.705	64.428	32.133	-9.572	74.000	32.295	PK
2			2390.000	63.654	31.358	-10.346	74.000	32.296	PK
3		*	2437.680	108.608	76.102	N/A	N/A	32.506	PK
4			2483.500	63.994	31.286	-10.006	74.000	32.707	PK
5			2484.515	65.826	33.114	-8.174	74.000	32.713	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/22 - 23:38
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz	

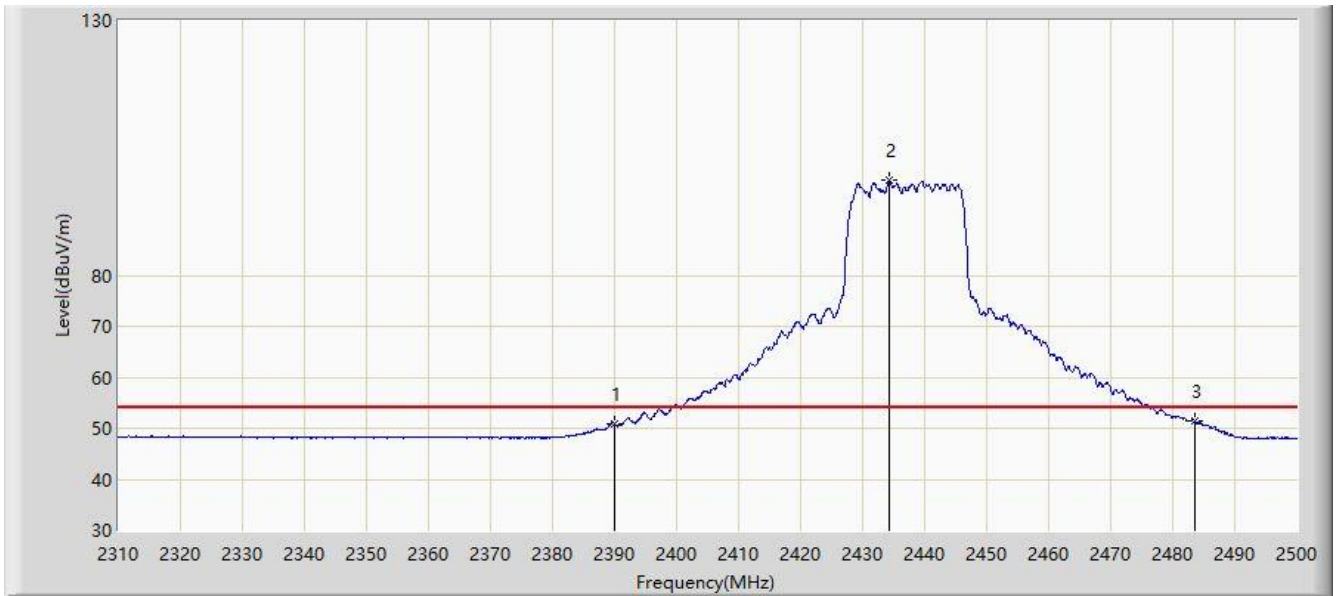

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.746	18.450	-3.254	54.000	32.296	AV
2		*	2434.260	98.572	66.081	N/A	N/A	32.491	AV
3			2483.500	51.460	18.752	-2.540	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 23:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2457MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.848	104.178	71.584	N/A	N/A	32.594	PK
2			2483.500	66.621	33.913	-7.379	74.000	32.707	PK
3			2484.992	67.700	34.986	-6.300	74.000	32.714	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 23:03
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2457MHz	

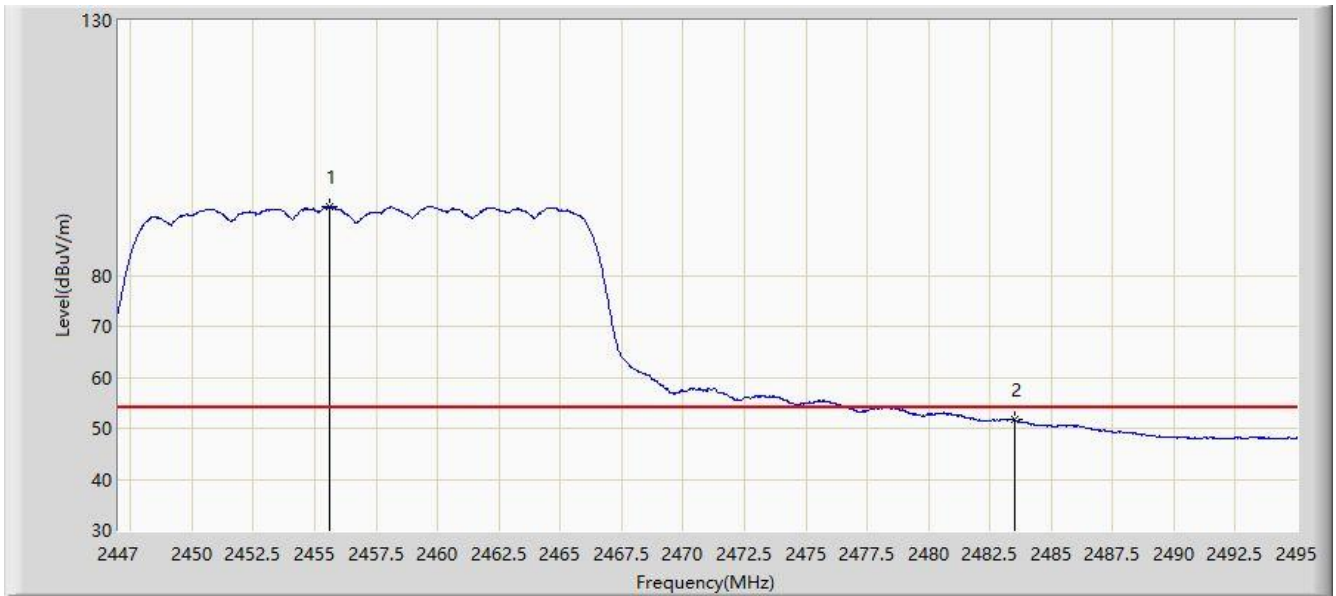


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.592	93.520	60.936	N/A	N/A	32.585	AV
2			2483.500	51.714	19.006	-2.286	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 23:00
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2457MHz	

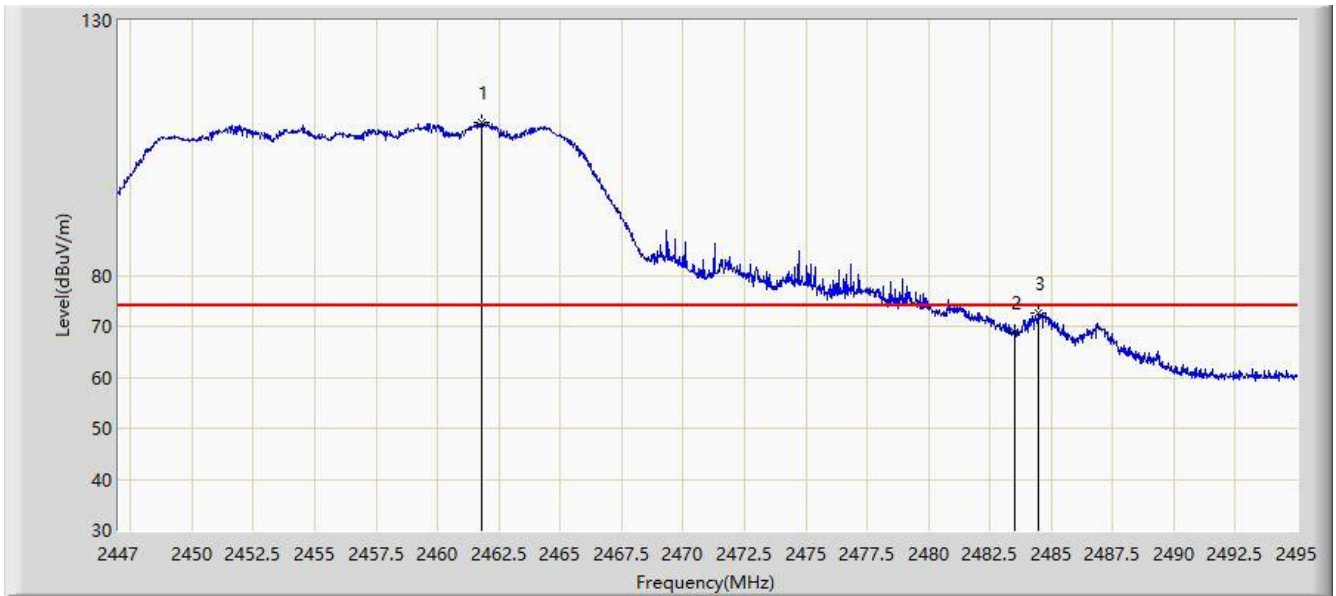


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.784	110.026	77.415	N/A	N/A	32.611	PK
2			2483.500	68.836	36.128	-5.164	74.000	32.707	PK
3			2484.488	72.533	39.821	-1.467	74.000	32.712	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 22:58
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2457MHz	

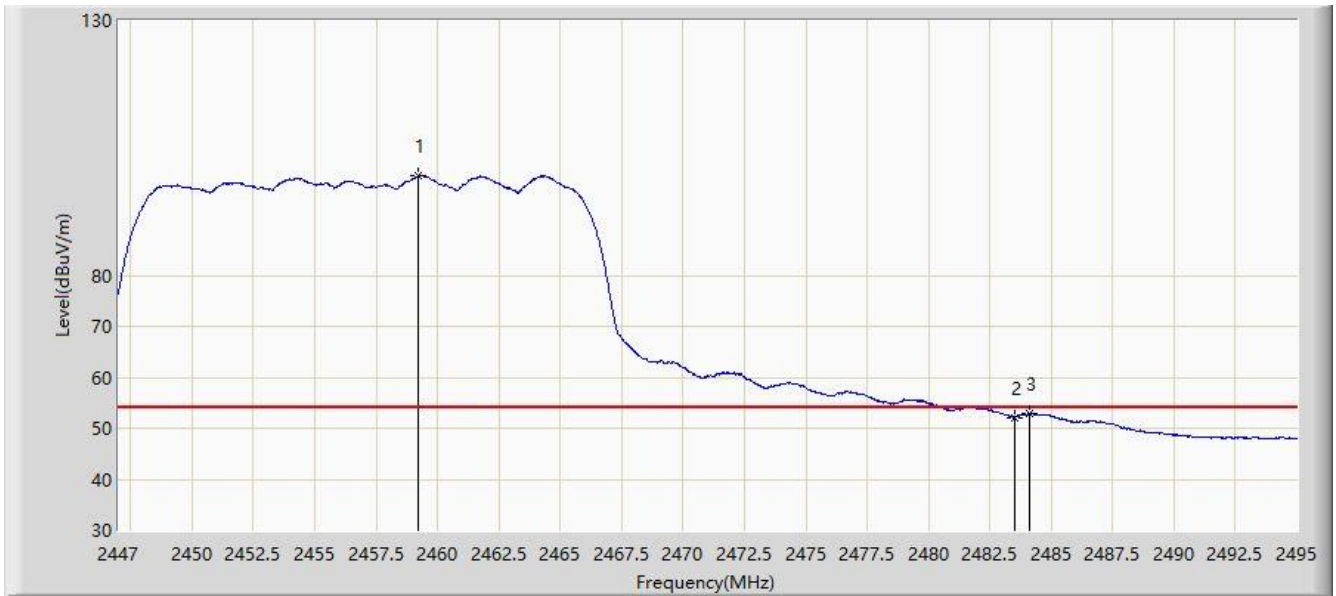

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.192	99.424	66.824	N/A	N/A	32.600	AV
2			2483.500	52.147	19.439	-1.853	54.000	32.707	AV
3			2484.128	52.905	20.195	-1.095	54.000	32.710	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:30
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.512	108.624	76.036	N/A	N/A	32.589	PK
2			2483.500	69.872	37.164	-4.128	74.000	32.707	PK
3			2484.232	72.722	40.011	-1.278	74.000	32.711	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

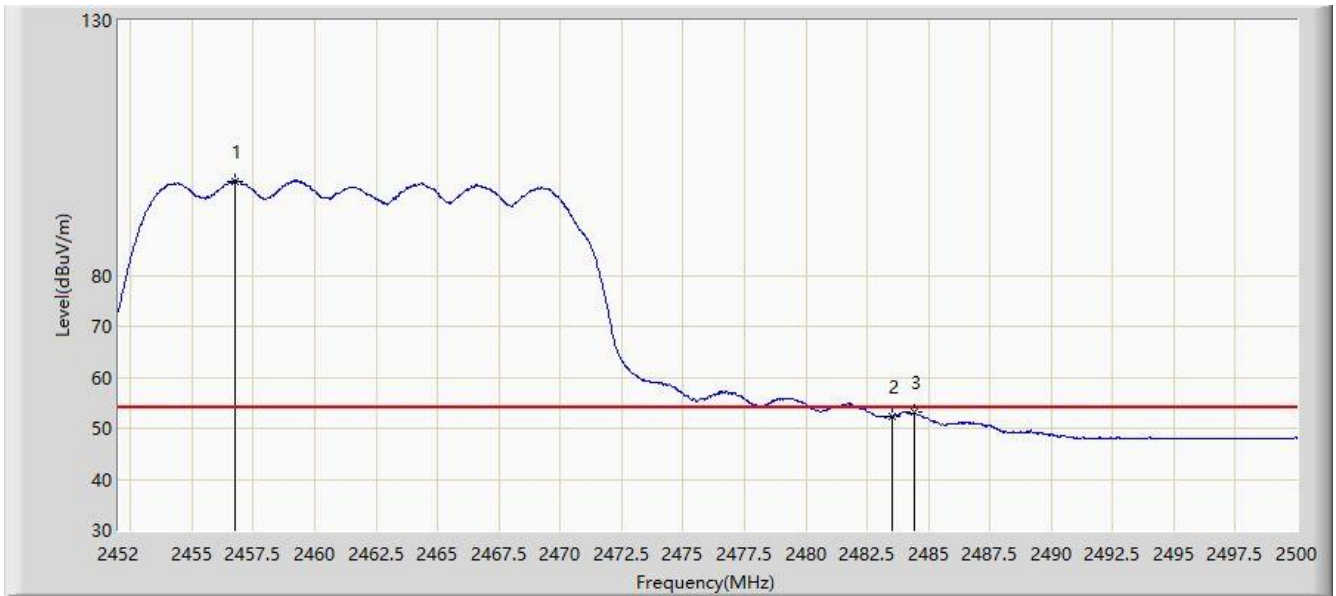


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.752	98.534	65.944	N/A	N/A	32.589	AV
2			2483.500	52.309	19.601	-1.691	54.000	32.707	AV
3			2484.400	53.170	20.458	-0.830	54.000	32.711	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:33
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

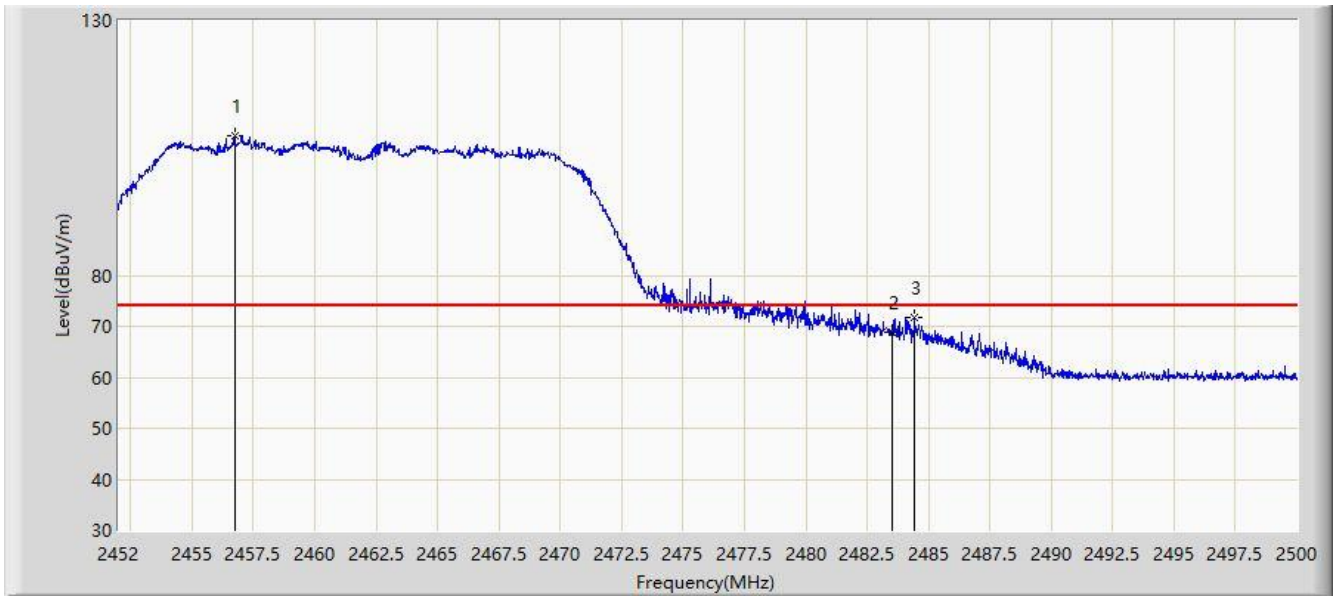


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.752	107.521	74.931	N/A	N/A	32.589	PK
2			2483.500	68.821	36.113	-5.179	74.000	32.707	PK
3			2484.424	71.858	39.146	-2.142	74.000	32.711	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:34
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

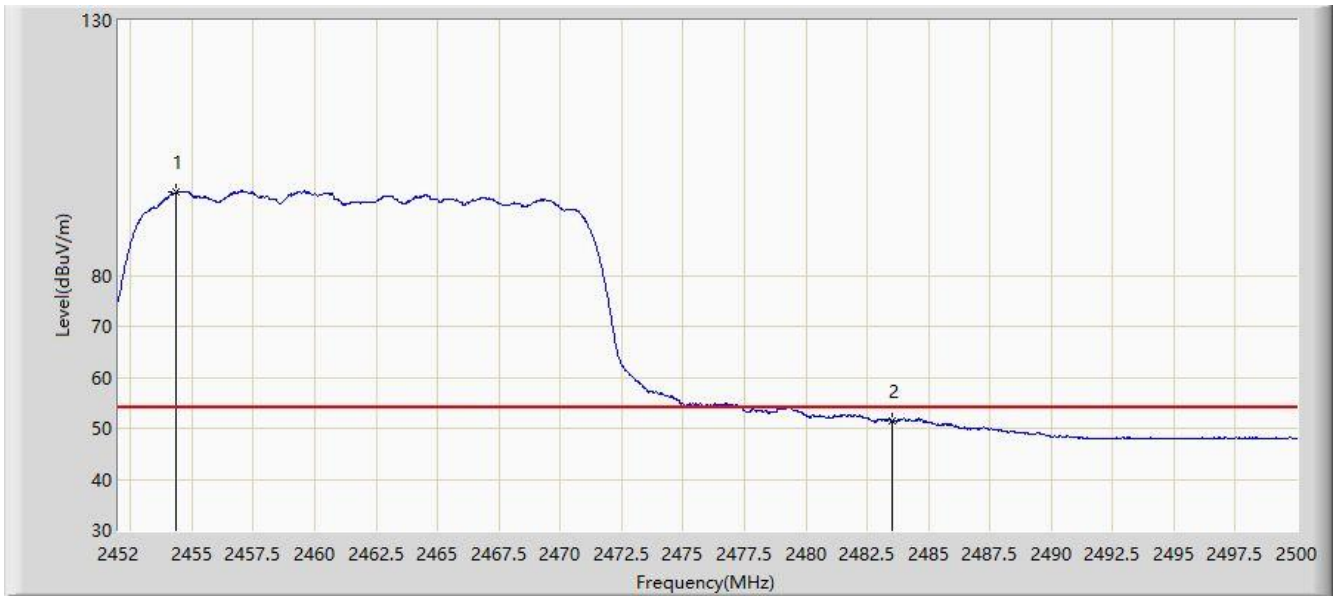


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.352	96.396	63.817	N/A	N/A	32.579	AV
2			2483.500	51.316	18.608	-2.684	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:36
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

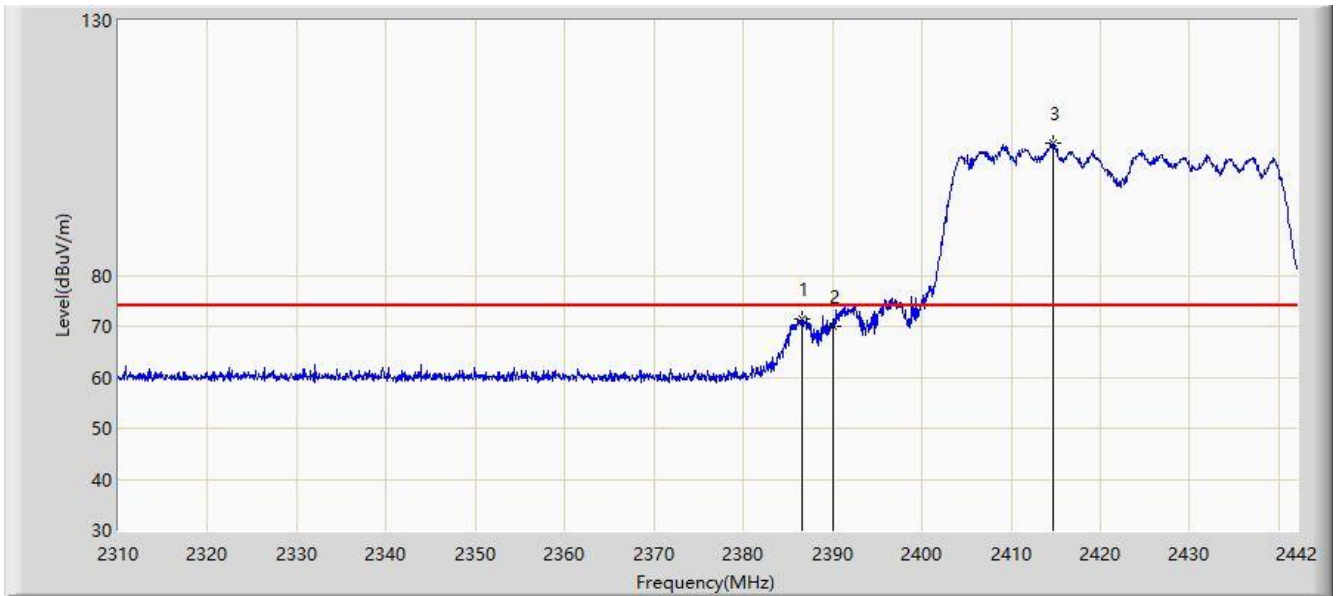


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.626	71.519	39.238	-2.481	74.000	32.281	PK
2			2390.000	69.996	37.700	-4.004	74.000	32.296	PK
3		*	2414.676	106.027	73.623	N/A	N/A	32.404	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:37
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

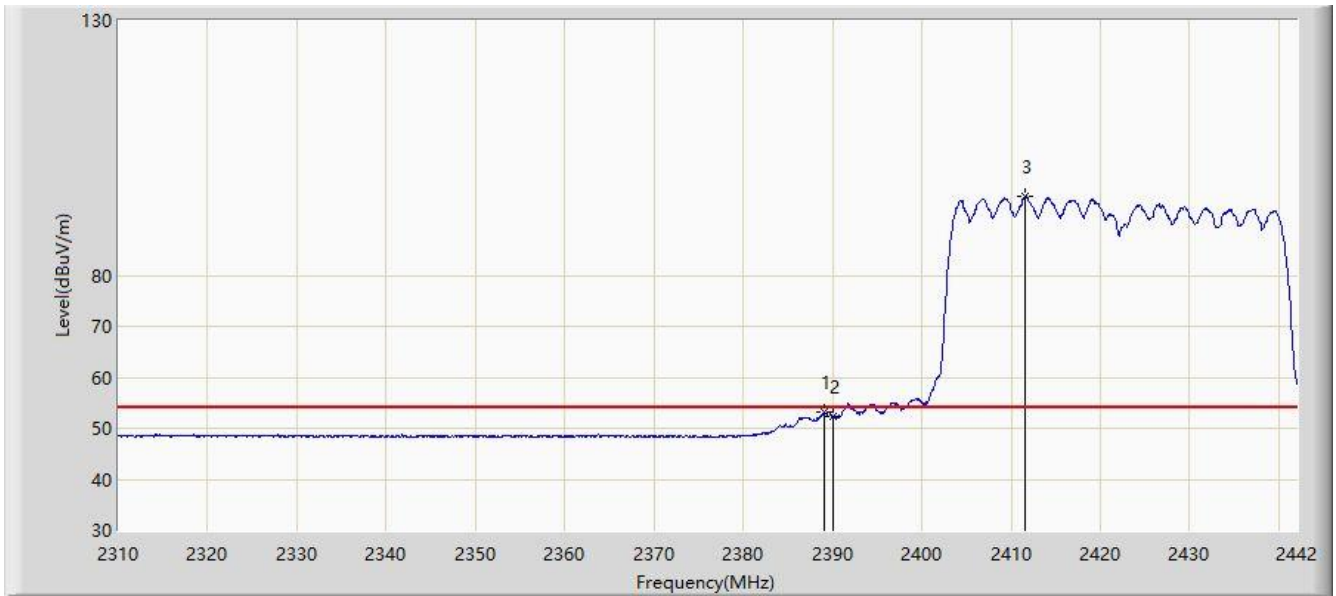


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.068	53.248	20.956	-0.752	54.000	32.292	AV
2			2390.000	52.427	20.131	-1.573	54.000	32.296	AV
3		*	2411.574	95.405	63.015	N/A	N/A	32.390	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:43
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

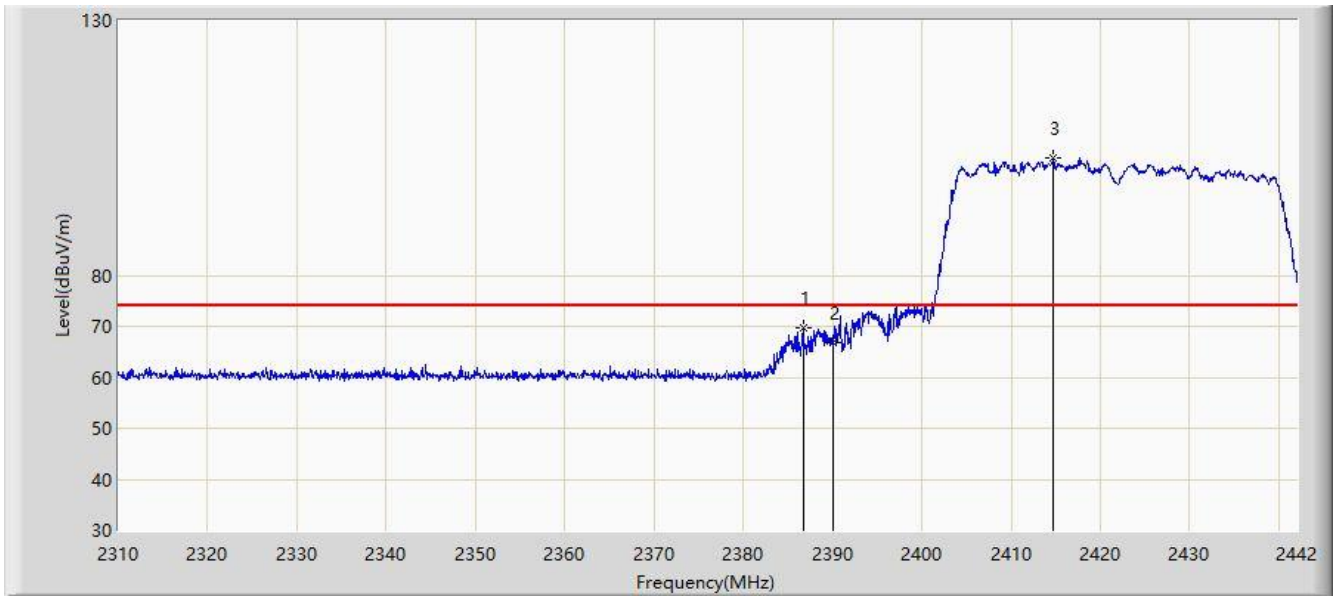


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.692	69.715	37.434	-4.285	74.000	32.281	PK
2			2390.000	66.837	34.541	-7.163	74.000	32.296	PK
3		*	2414.742	102.910	70.506	N/A	N/A	32.404	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:44
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

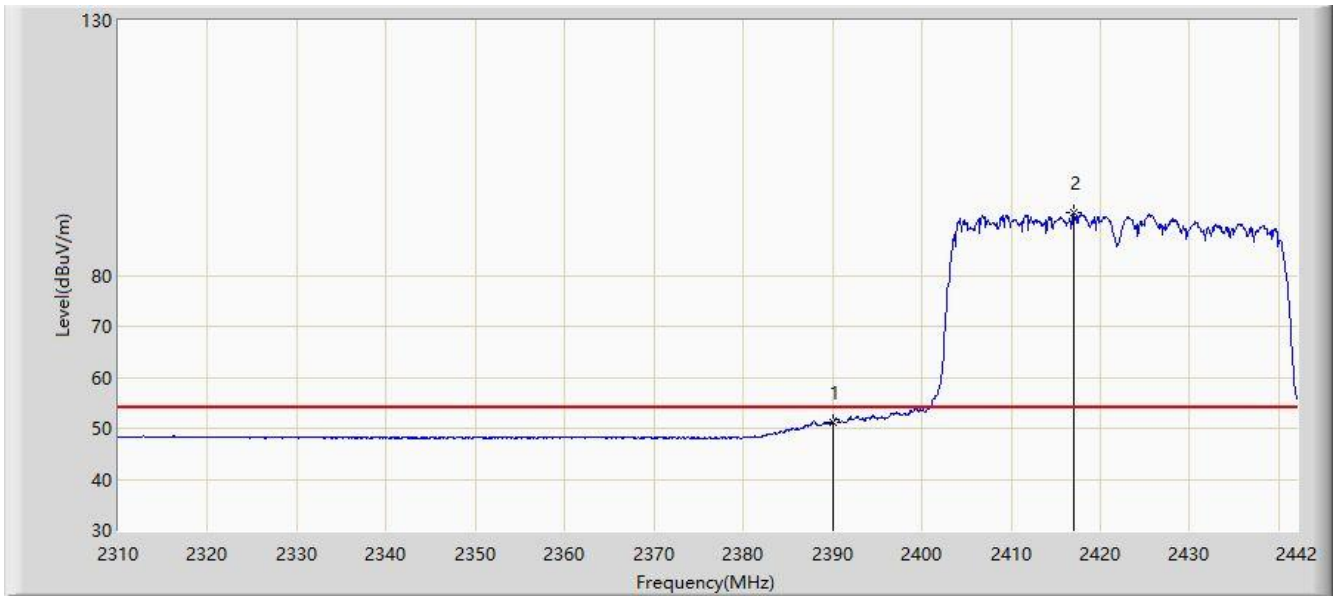


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.181	18.885	-2.819	54.000	32.296	AV
2		*	2417.052	92.227	59.812	N/A	N/A	32.415	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 23:12
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2427MHz	

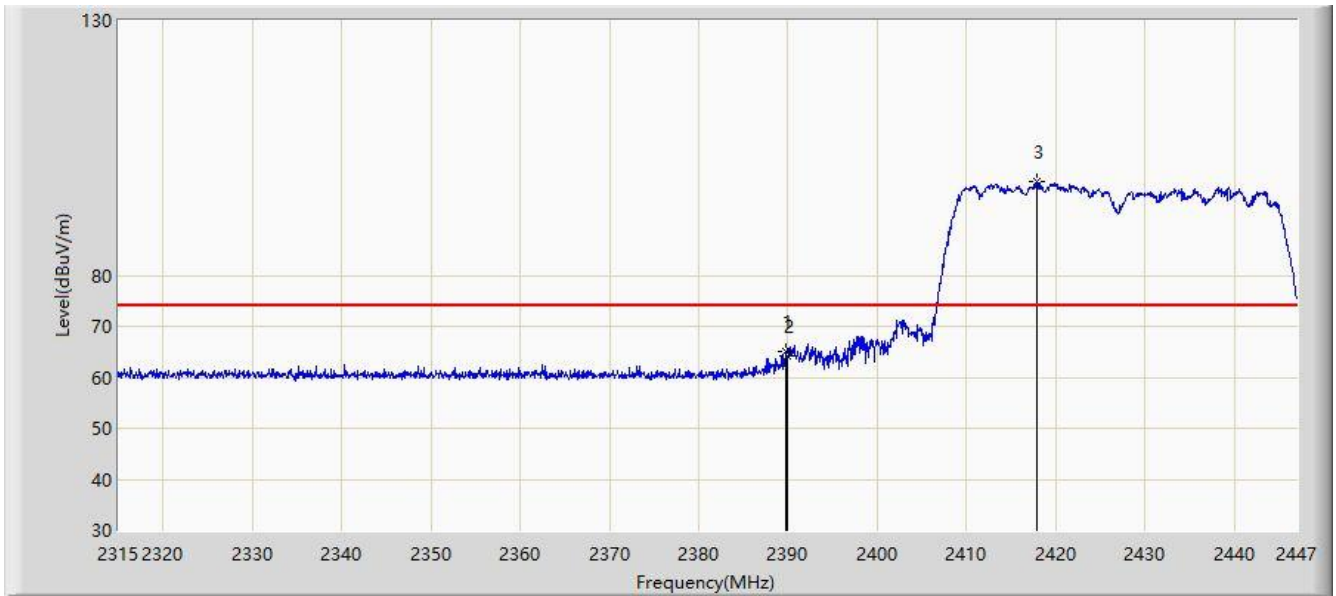


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.844	65.215	32.920	-8.785	74.000	32.296	PK
2			2390.000	64.125	31.829	-9.875	74.000	32.296	PK
3		*	2417.960	98.321	65.902	N/A	N/A	32.419	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 23:14
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2427MHz	

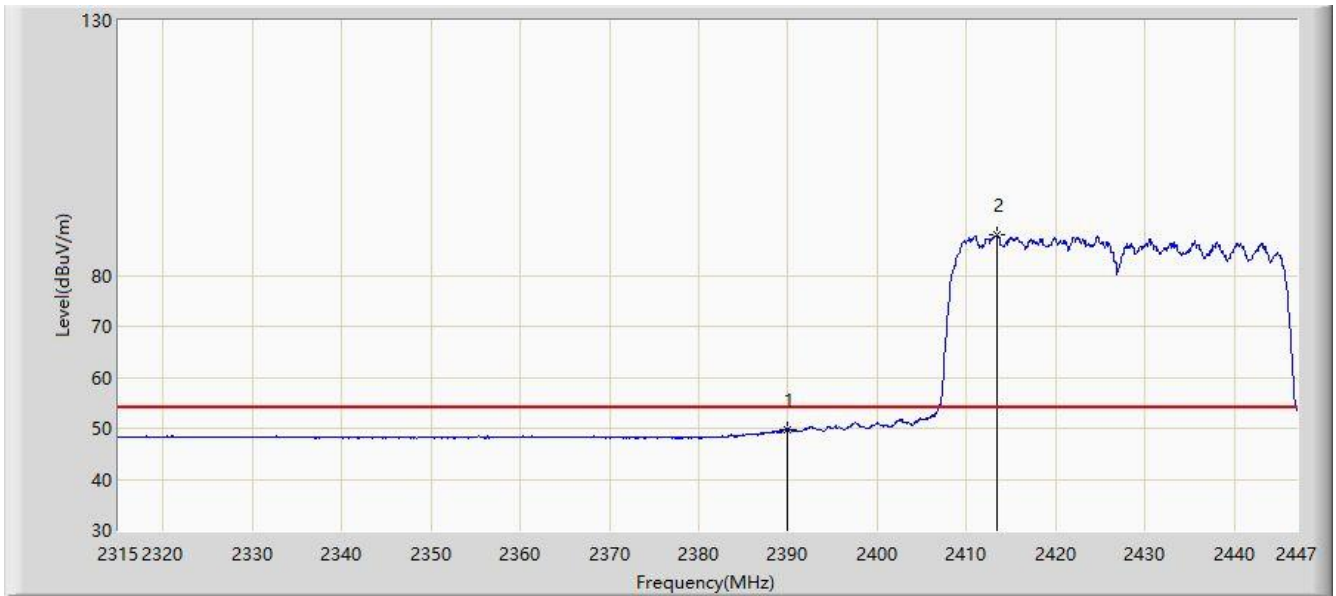

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.594	17.298	-4.406	54.000	32.296	AV
2		*	2413.406	87.922	55.524	N/A	N/A	32.399	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 23:11
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2427MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.976	71.432	39.136	-2.568	74.000	32.296	PK
2			2390.000	71.032	38.736	-2.968	74.000	32.296	PK
3		*	2419.346	105.659	73.234	N/A	N/A	32.425	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 23:07
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2427MHz	

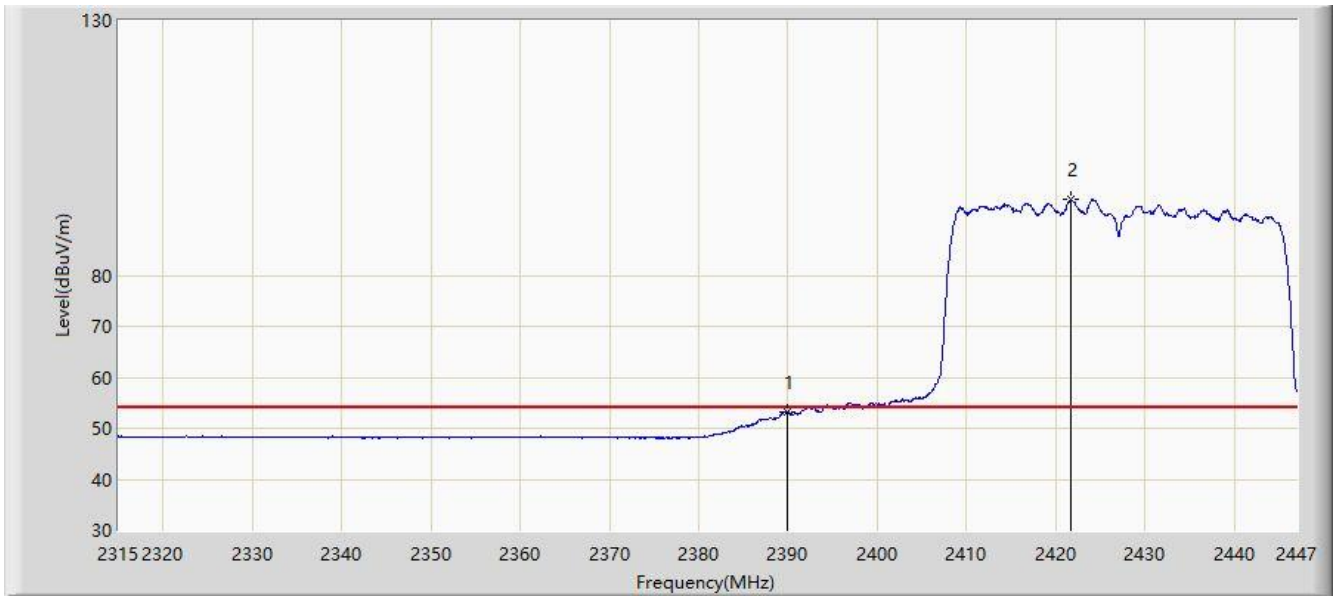


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.235	20.939	-0.765	54.000	32.296	AV
2		*	2421.722	94.802	62.366	N/A	N/A	32.436	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/22 - 23:53
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2437MHz	

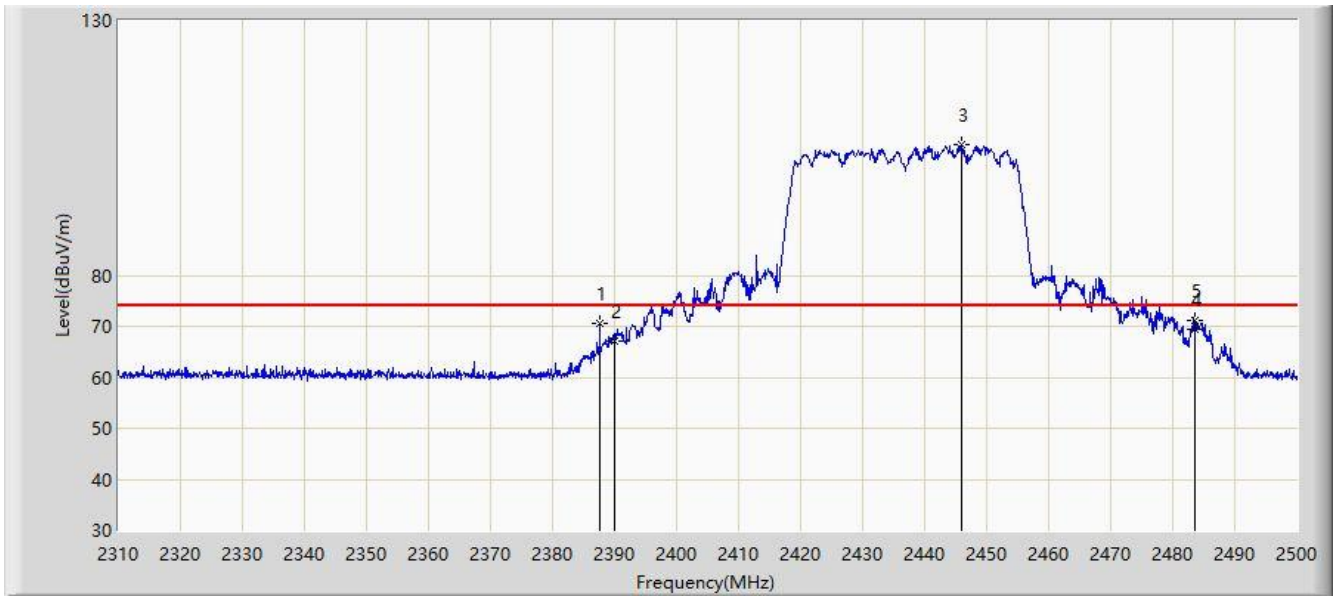


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.615	70.709	38.423	-3.291	74.000	32.285	PK
2			2390.000	67.116	34.820	-6.884	74.000	32.296	PK
3		*	2445.850	105.646	73.104	N/A	N/A	32.542	PK
4			2483.500	69.328	36.620	-4.672	74.000	32.707	PK
5			2483.565	71.222	38.514	-2.778	74.000	32.708	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/22 - 23:52
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2437MHz	

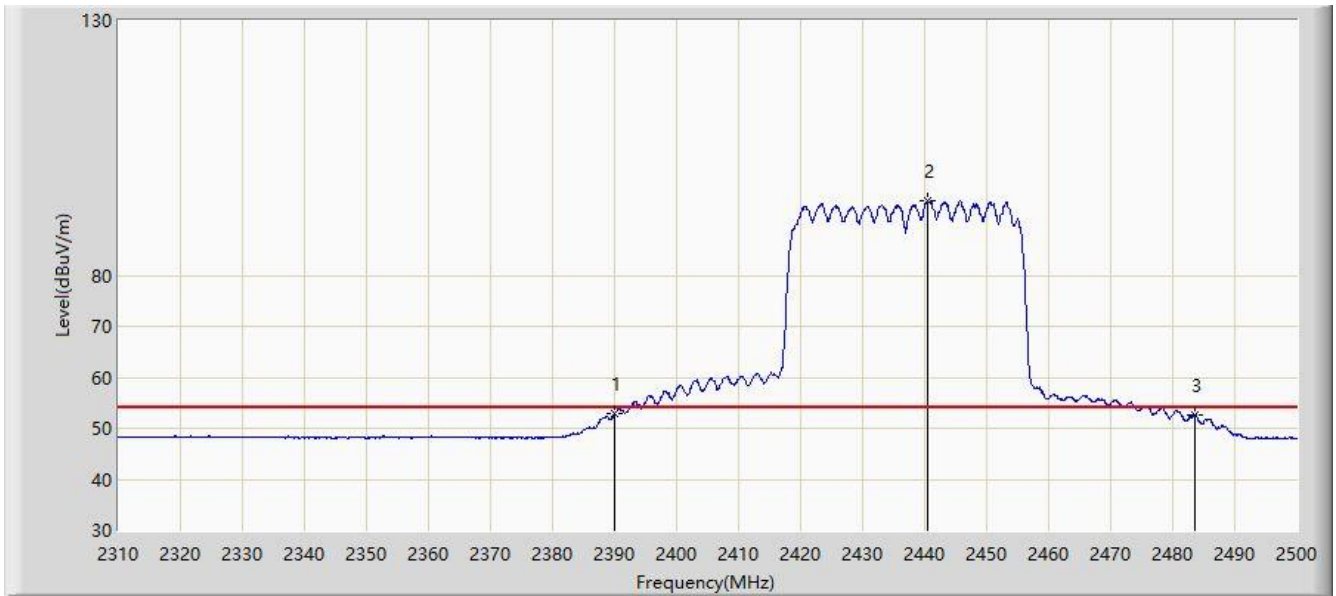


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.037	20.741	-0.963	54.000	32.296	AV
2		*	2440.435	94.646	62.128	N/A	N/A	32.518	AV
3			2483.500	52.571	19.863	-1.429	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/22 - 23:55
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2437MHz	

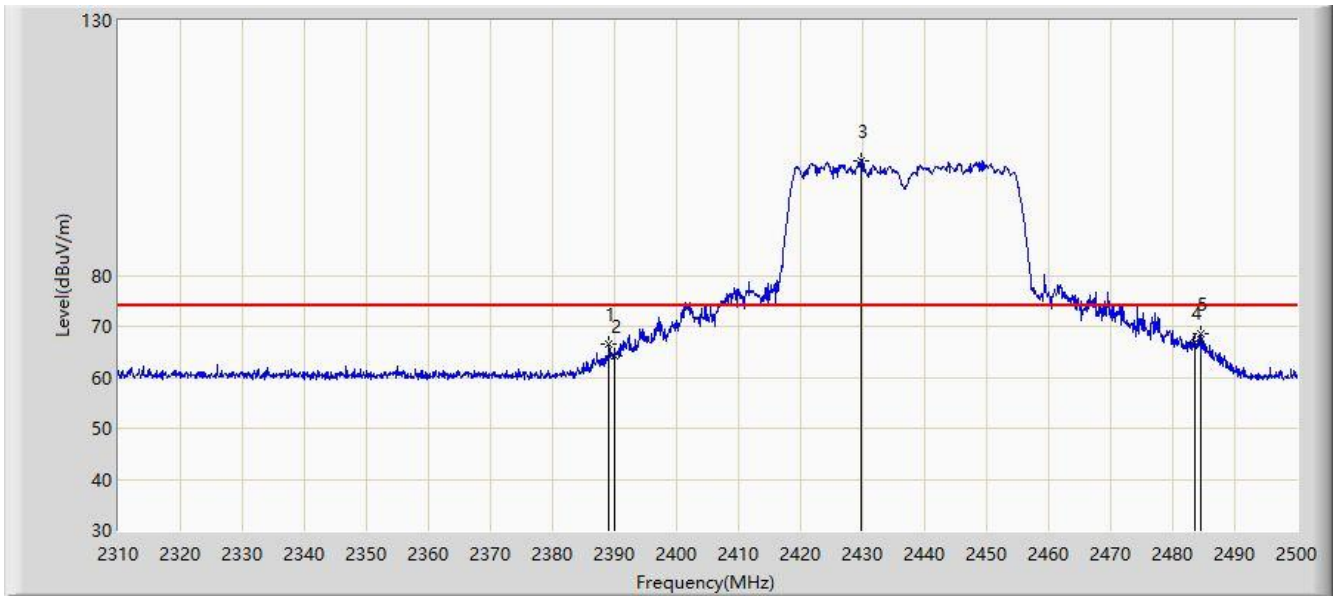


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.040	66.483	34.191	-7.517	74.000	32.292	PK
2			2390.000	64.153	31.857	-9.847	74.000	32.296	PK
3		*	2429.700	102.576	70.105	N/A	N/A	32.471	PK
4			2483.500	66.805	34.097	-7.195	74.000	32.707	PK
5			2484.515	68.432	35.720	-5.568	74.000	32.713	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/22 - 23:56
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2437MHz	

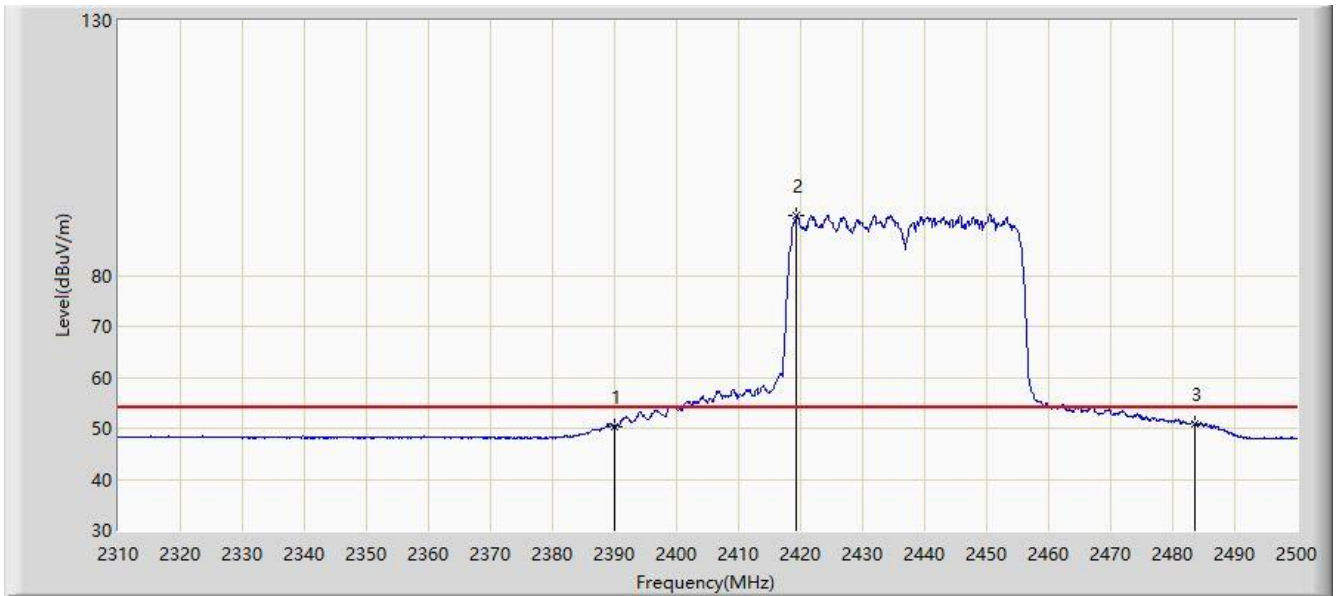


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.427	18.131	-3.573	54.000	32.296	AV
2		*	2419.345	91.698	59.273	N/A	N/A	32.425	AV
3			2483.500	50.862	18.154	-3.138	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 23:36
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2447MHz	

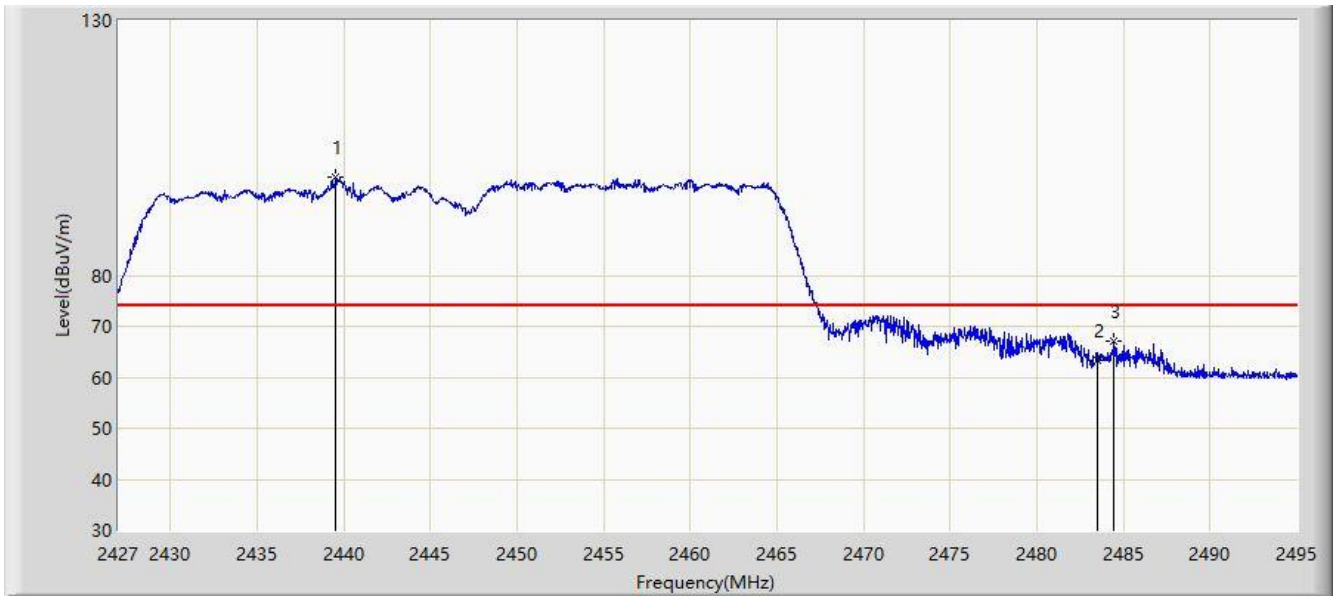


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2439.546	99.139	66.625	N/A	N/A	32.515	PK
2			2483.500	63.398	30.690	-10.602	74.000	32.707	PK
3			2484.460	67.144	34.432	-6.856	74.000	32.712	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 23:35
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2447MHz	

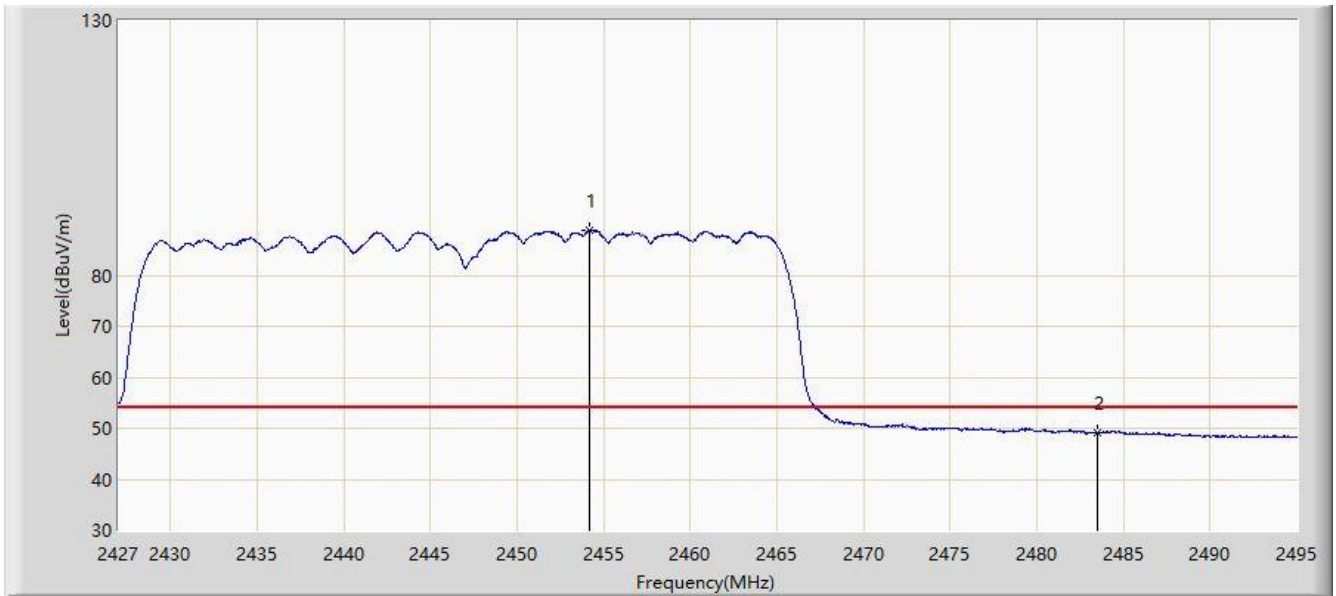


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.166	88.872	56.294	N/A	N/A	32.578	AV
2			2483.500	49.119	16.411	-4.881	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 23:31
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2447MHz	

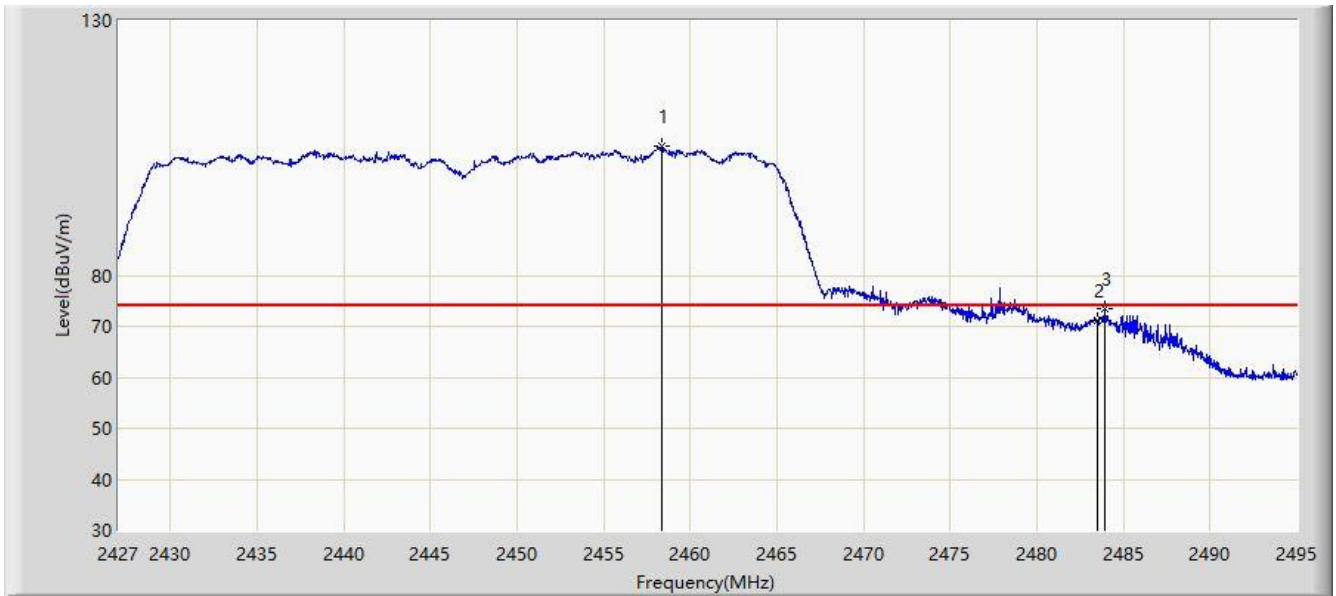


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.348	105.322	72.726	N/A	N/A	32.596	PK
2			2483.500	71.157	38.449	-2.843	74.000	32.707	PK
3			2483.950	73.512	40.802	-0.488	74.000	32.710	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/27 - 23:34
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2447MHz	

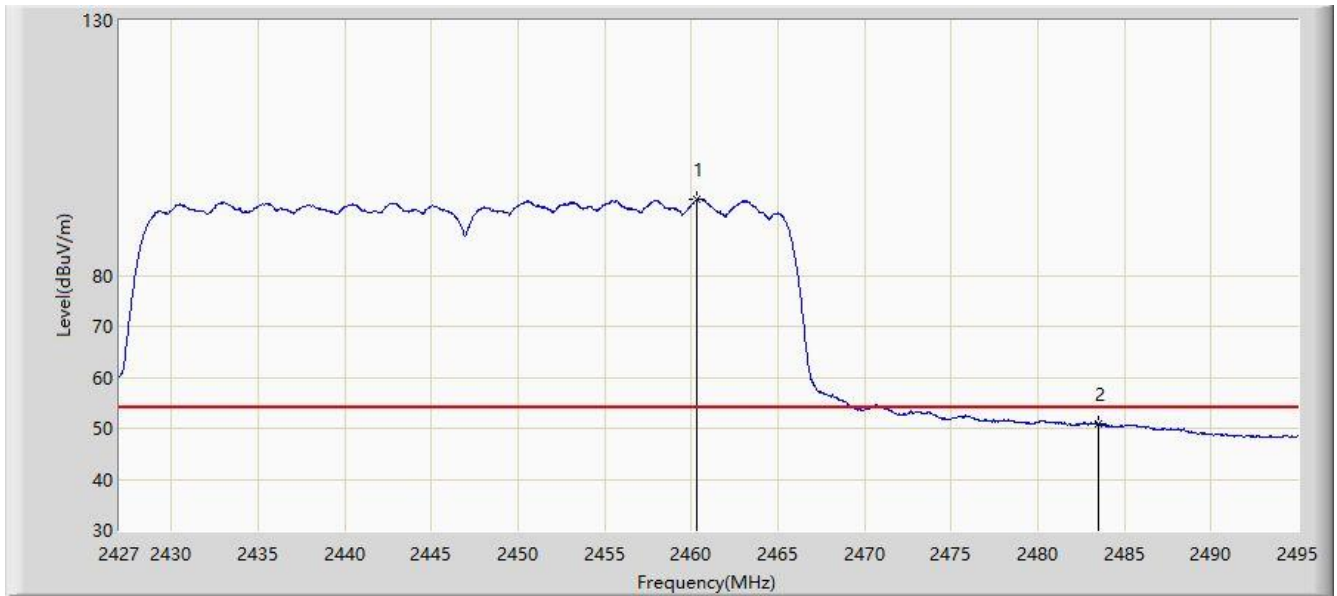

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.320	94.862	62.257	N/A	N/A	32.605	AV
2			2483.500	50.978	18.270	-3.022	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:45
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2444.682	105.430	72.893	N/A	N/A	32.537	PK
2			2483.500	68.181	35.473	-5.819	74.000	32.707	PK
3			2483.782	73.363	40.654	-0.637	74.000	32.709	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:46
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	

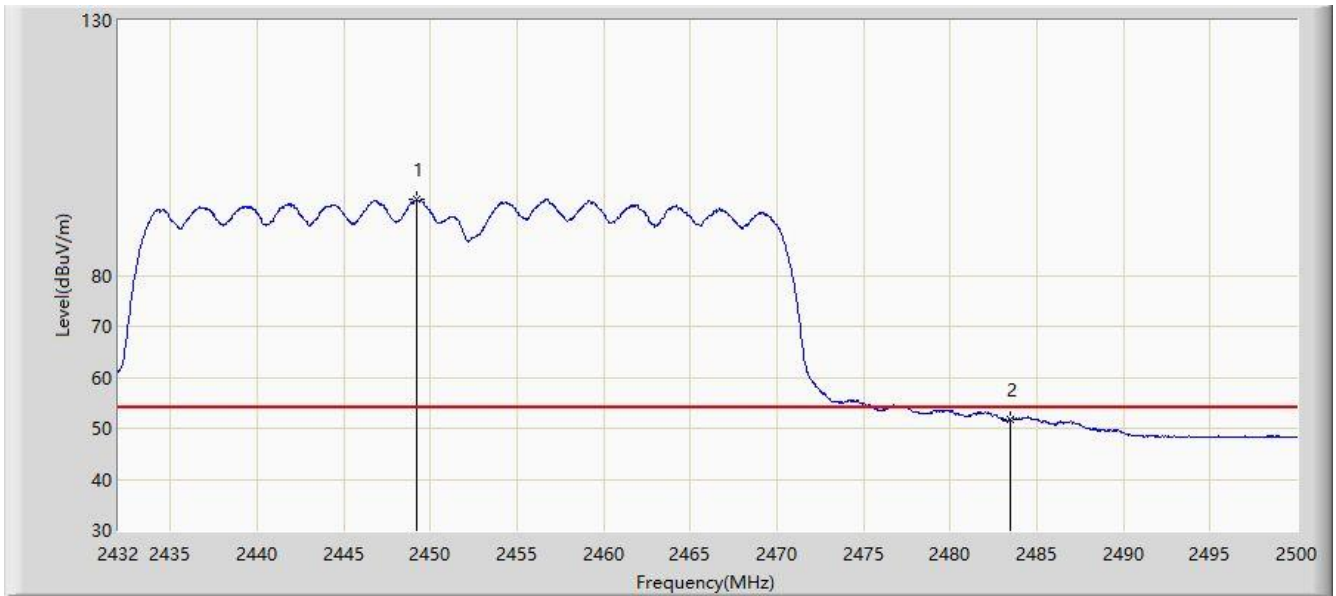


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2449.238	94.792	62.235	N/A	N/A	32.556	AV
2			2483.500	51.604	18.896	-2.396	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:47
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	

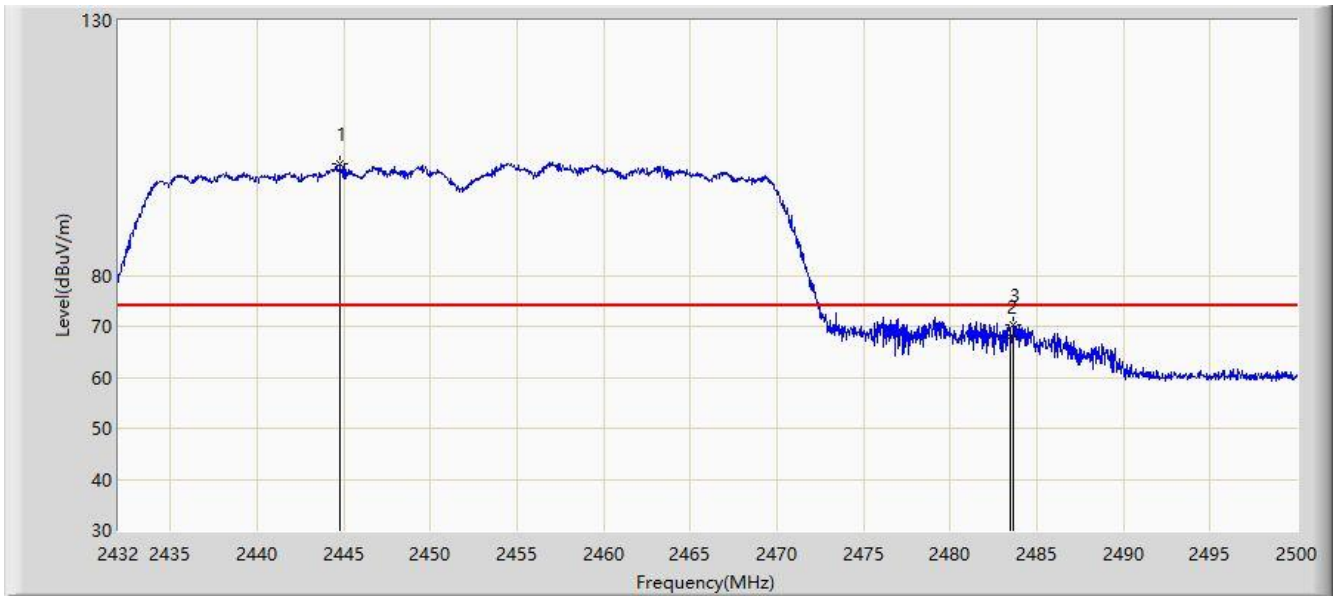


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2444.784	101.914	69.377	N/A	N/A	32.537	PK
2			2483.500	68.042	35.334	-5.958	74.000	32.707	PK
3			2483.680	70.252	37.544	-3.748	74.000	32.709	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:48
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	

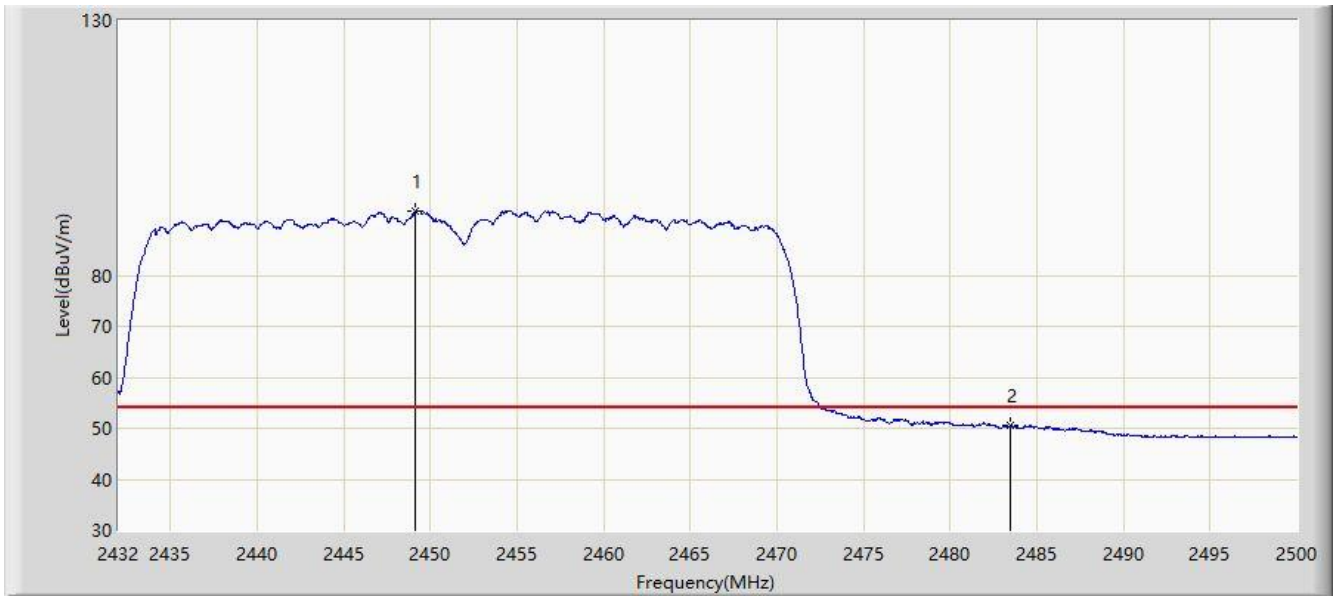


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2449.102	92.594	60.038	N/A	N/A	32.556	AV
2			2483.500	50.473	17.765	-3.527	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 21:07
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz	

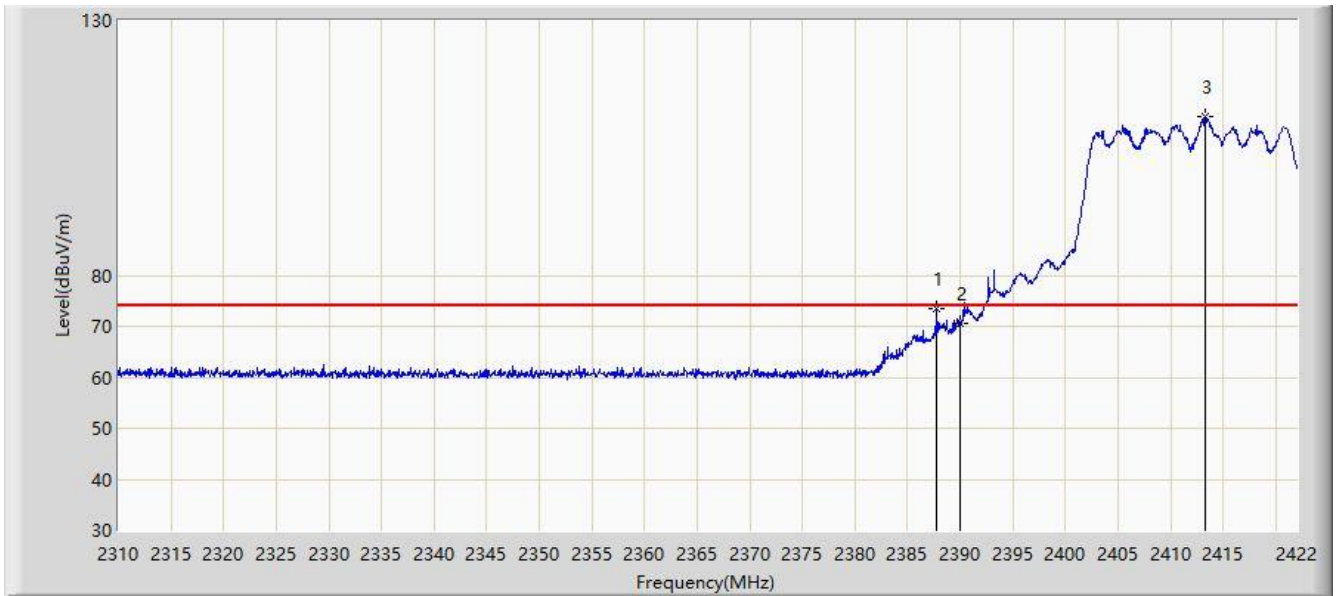


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.784	73.423	41.137	-0.577	74.000	32.286	PK
2			2390.000	70.574	38.278	-3.426	74.000	32.296	PK
3		*	2413.320	111.286	78.888	N/A	N/A	32.399	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 21:10
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz	

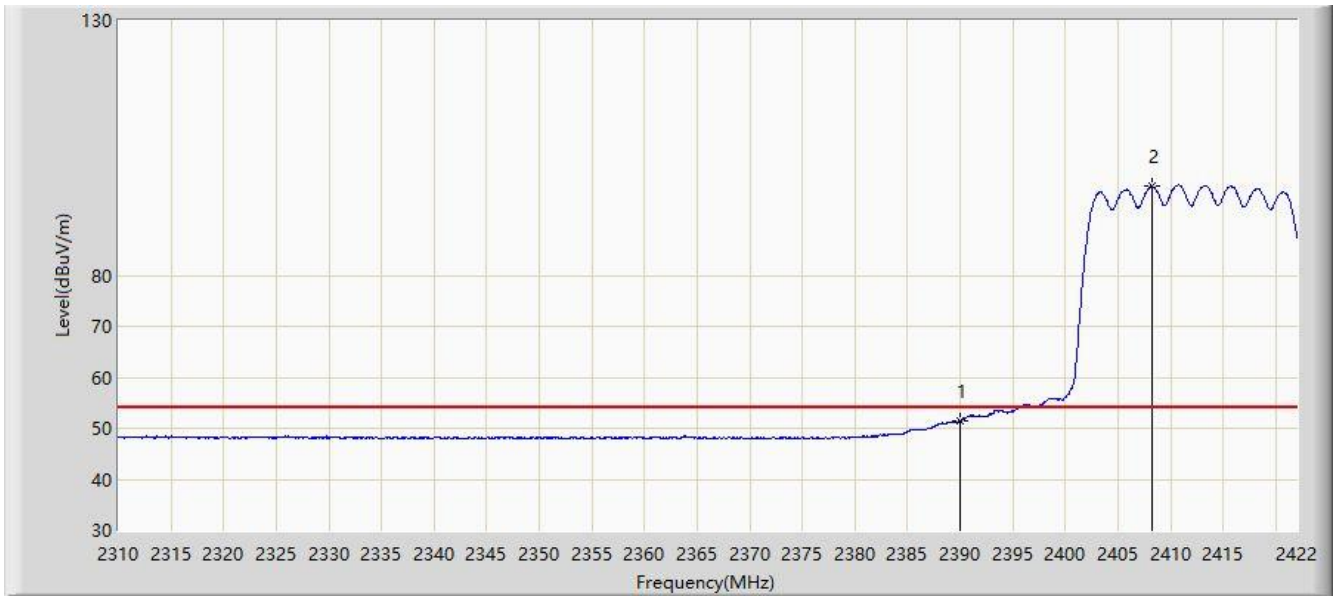


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.386	19.090	-2.614	54.000	32.296	AV
2		*	2408.224	97.557	65.181	N/A	N/A	32.376	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 21:19
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz	

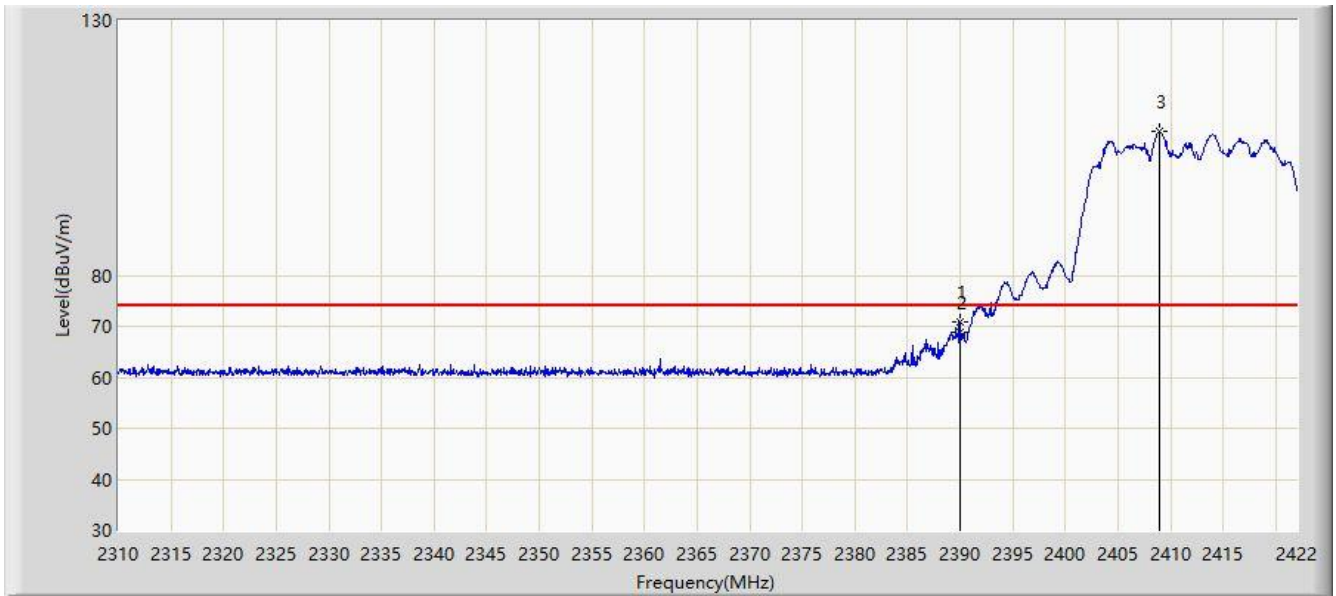


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.968	70.951	38.655	-3.049	74.000	32.296	PK
2			2390.000	68.709	36.413	-5.291	74.000	32.296	PK
3		*	2408.952	108.188	75.809	N/A	N/A	32.378	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 21:25
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz	

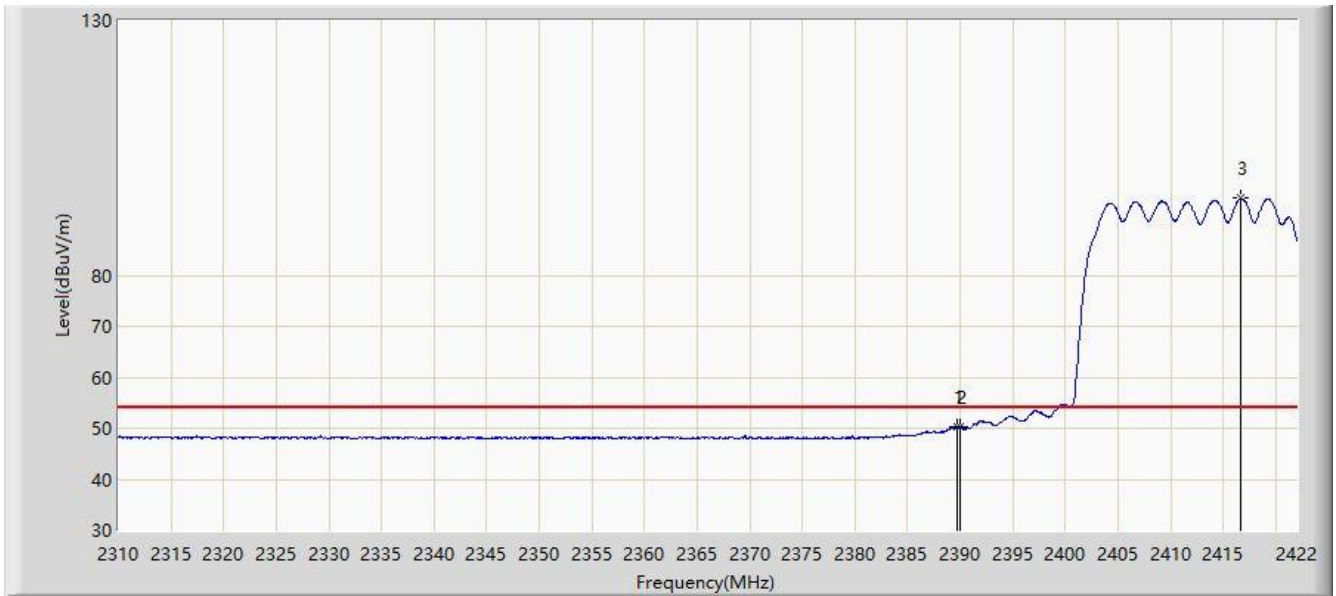


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.688	50.247	17.952	-3.753	54.000	32.295	AV
2			2390.000	50.166	17.870	-3.834	54.000	32.296	AV
3		*	2416.680	95.079	62.666	N/A	N/A	32.413	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 00:08
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2417MHz	

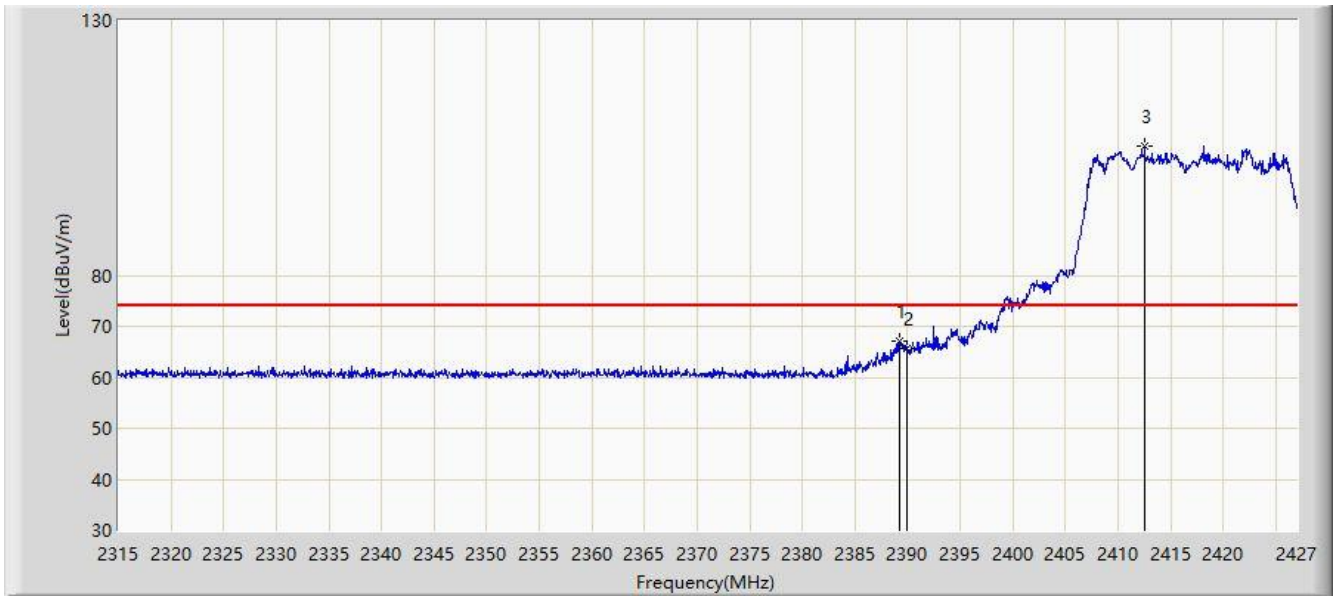


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.312	67.077	34.784	-6.923	74.000	32.293	PK
2			2390.000	65.768	33.472	-8.232	74.000	32.296	PK
3		*	2412.552	105.462	73.067	N/A	N/A	32.395	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 00:10
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2417MHz	

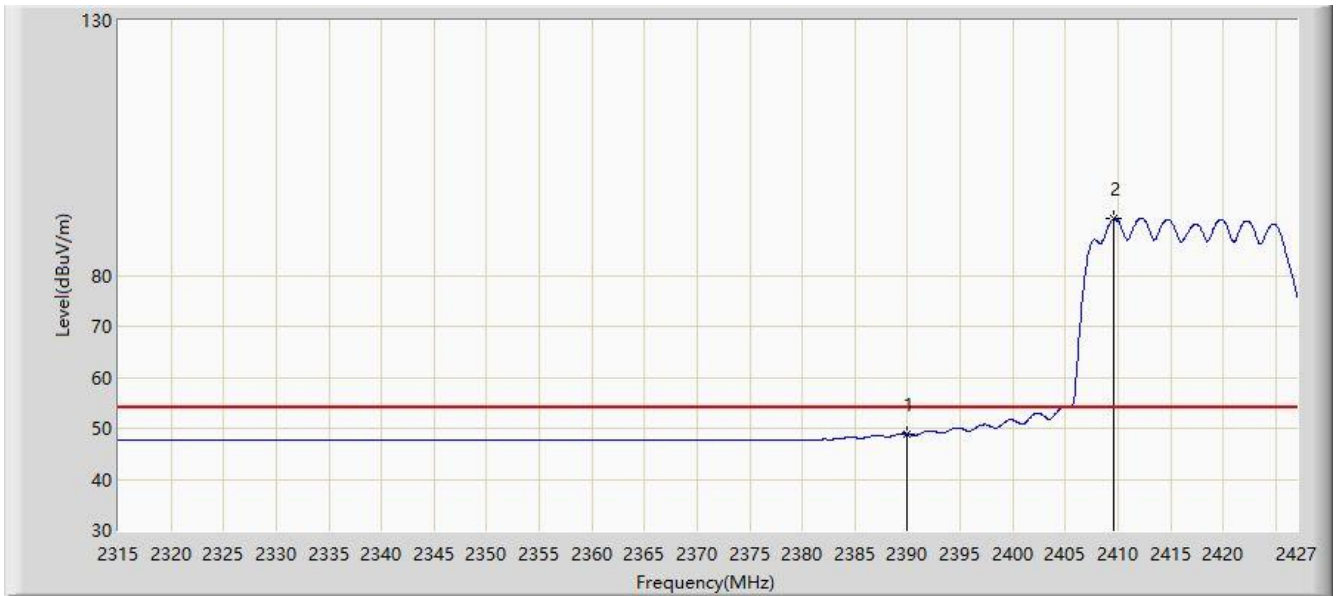


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.958	16.662	-5.042	54.000	32.296	AV
2		*	2409.528	91.035	58.654	N/A	N/A	32.381	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 00:05
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2417MHz	

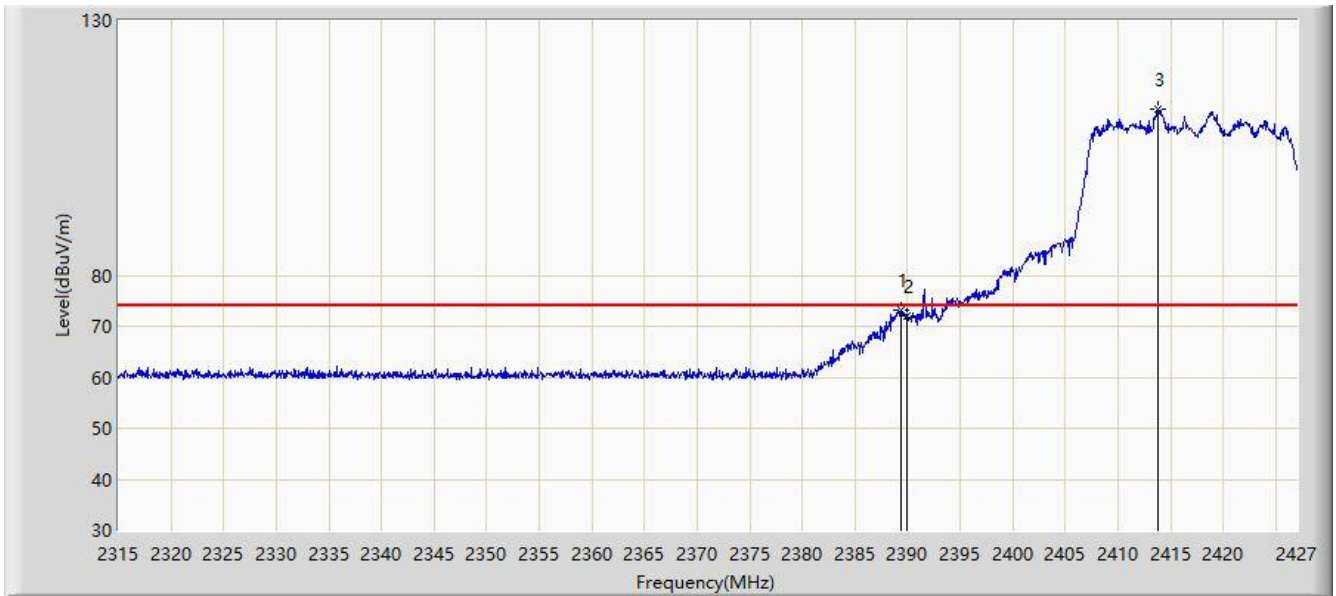


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.368	73.232	40.939	-0.768	74.000	32.293	PK
2			2390.000	72.037	39.741	-1.963	74.000	32.296	PK
3		*	2413.840	112.520	80.120	N/A	N/A	32.400	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 00:06
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2417MHz	

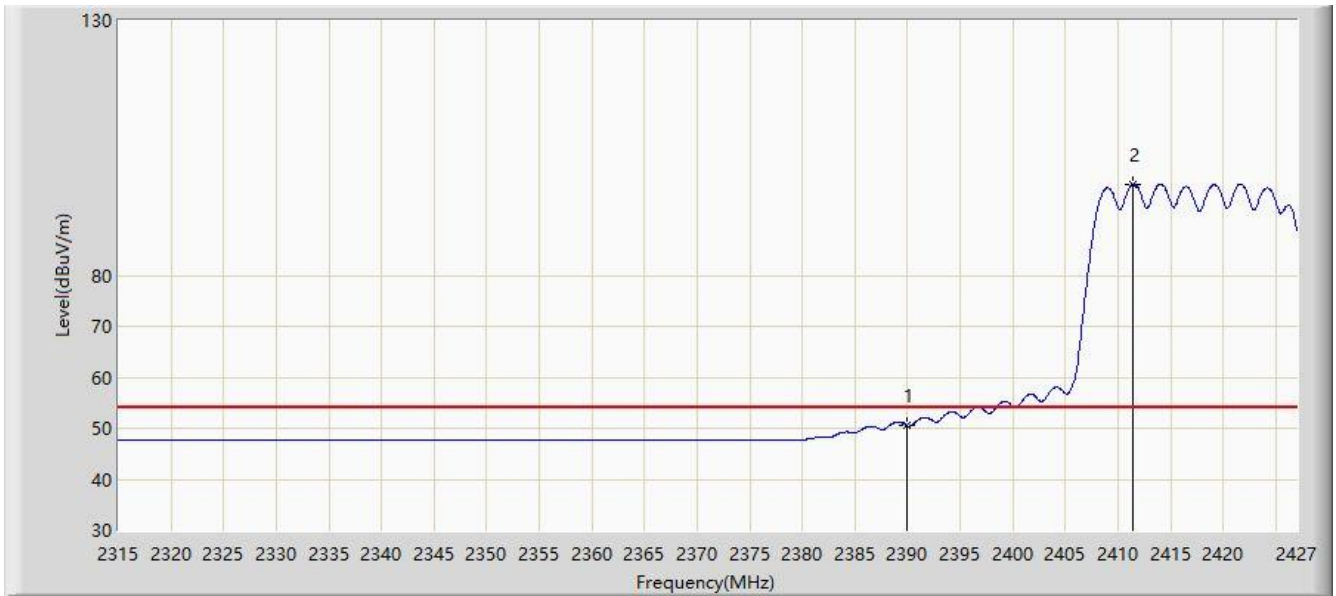


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.436	18.140	-3.564	54.000	32.296	AV
2		*	2411.432	97.899	65.509	N/A	N/A	32.389	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:55
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2437MHz	

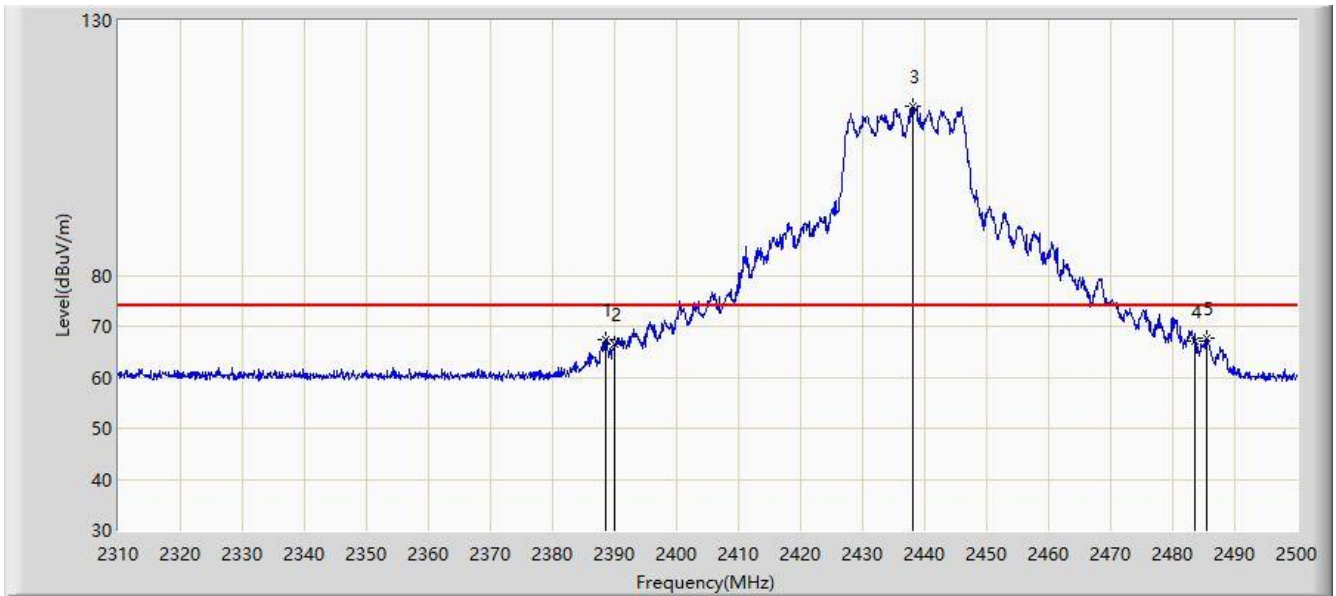


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.470	67.483	35.194	-6.517	74.000	32.289	PK
2			2390.000	66.392	34.096	-7.608	74.000	32.296	PK
3		*	2438.060	113.225	80.717	N/A	N/A	32.508	PK
4			2483.500	67.135	34.427	-6.865	74.000	32.707	PK
5			2485.370	67.719	35.003	-6.281	74.000	32.716	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:54
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2437MHz	

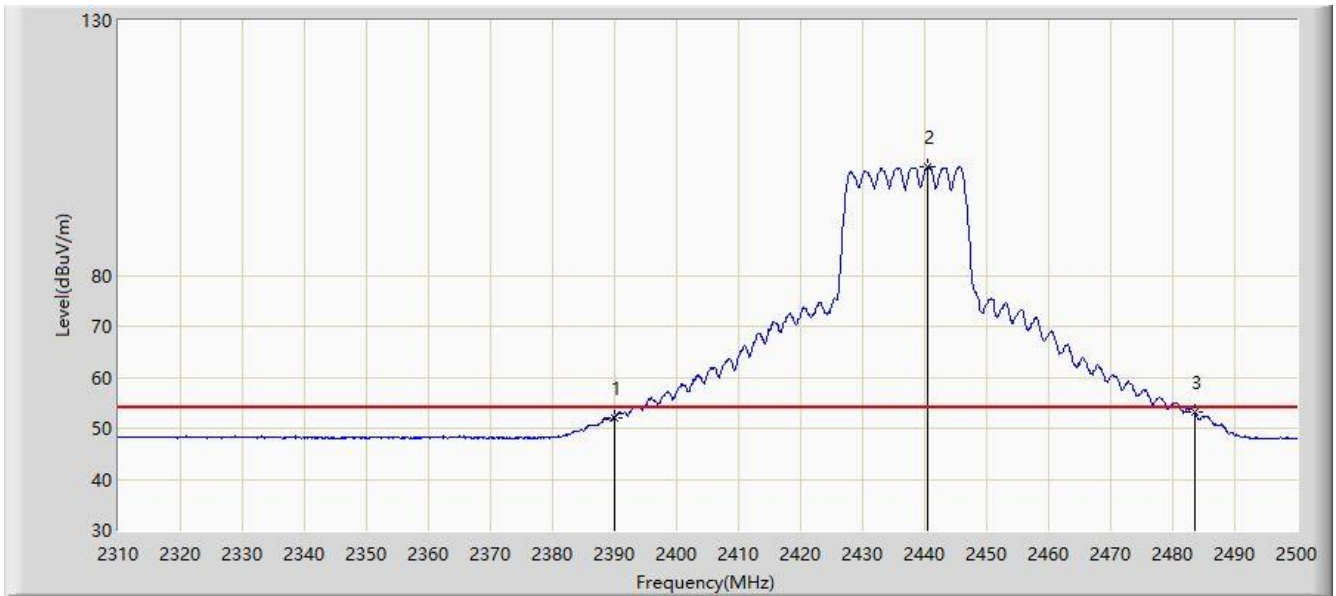

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.138	19.842	-1.862	54.000	32.296	AV
2		*	2440.435	101.354	68.836	N/A	N/A	32.518	AV
3			2483.500	53.126	20.418	-0.874	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:56
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2437MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.325	66.348	34.055	-7.652	74.000	32.293	PK
2			2390.000	64.921	32.625	-9.079	74.000	32.296	PK
3		*	2434.165	110.663	78.172	N/A	N/A	32.491	PK
4			2483.500	64.223	31.515	-9.777	74.000	32.707	PK
5			2484.325	66.695	33.984	-7.305	74.000	32.711	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:57
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2437MHz	

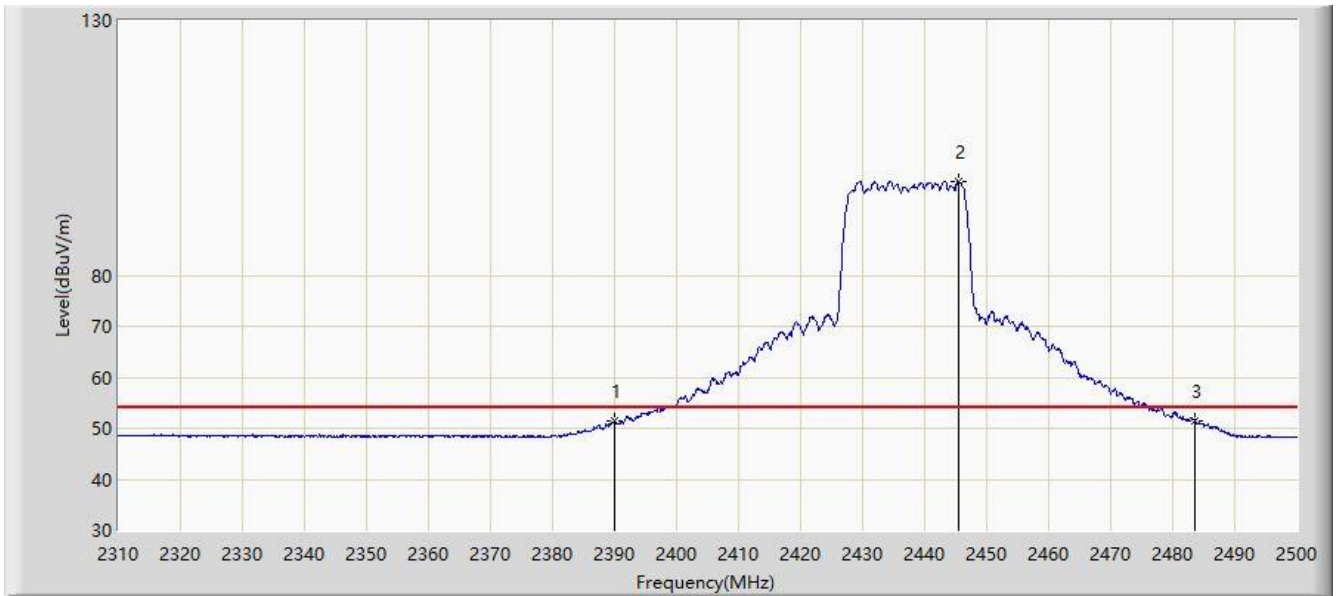

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.384	19.088	-2.616	54.000	32.296	AV
2		*	2445.375	98.486	65.946	N/A	N/A	32.540	AV
3			2483.500	51.494	18.786	-2.506	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 00:46
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2457MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.312	105.969	73.355	N/A	N/A	32.614	PK
2			2483.500	67.248	34.540	-6.752	74.000	32.707	PK
3			2484.224	69.509	36.798	-4.491	74.000	32.711	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 00:49
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2457MHz	

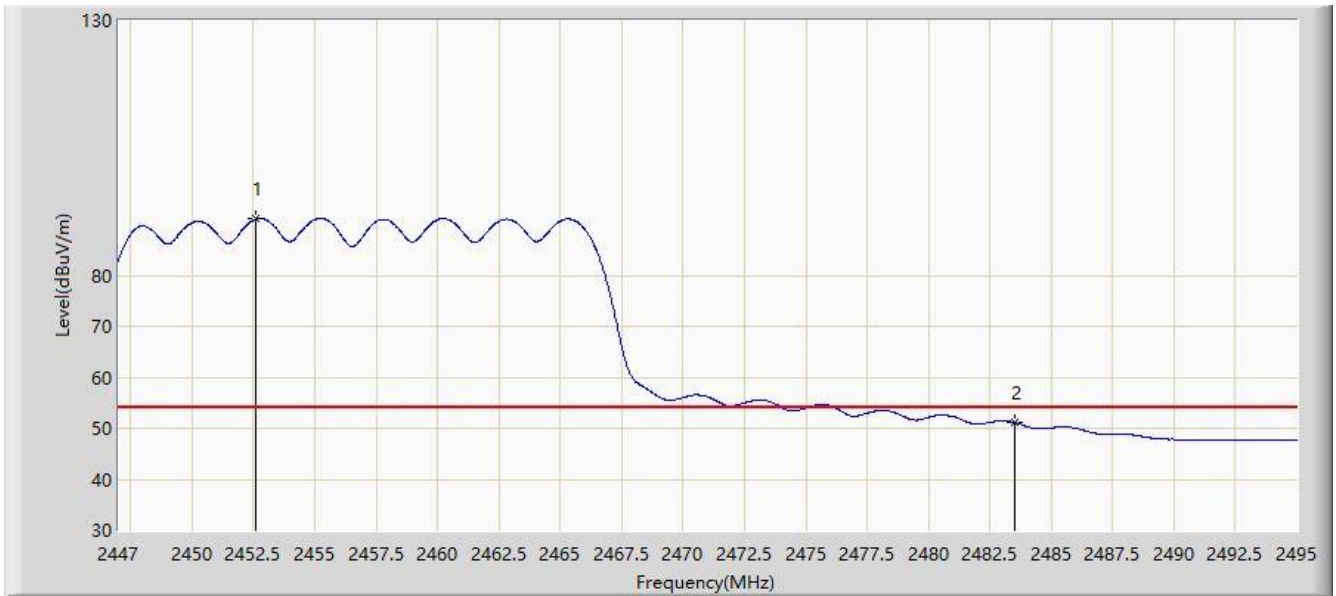

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2452.568	91.037	58.466	N/A	N/A	32.571	AV
2			2483.500	51.174	18.466	-2.826	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 00:45
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2457MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2453.912	112.467	79.890	N/A	N/A	32.577	PK
2			2483.500	70.090	37.382	-3.910	74.000	32.707	PK
3			2484.488	72.606	39.894	-1.394	74.000	32.712	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 00:40
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2457MHz	

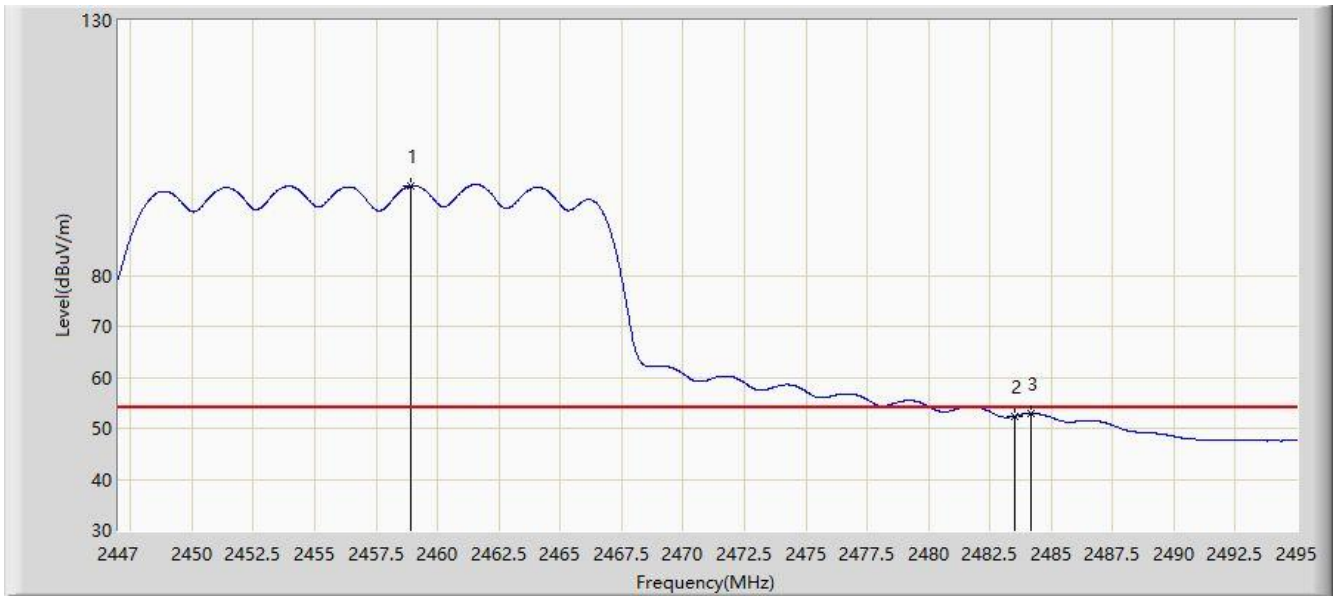


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.880	97.554	64.955	N/A	N/A	32.599	AV
2			2483.500	52.368	19.660	-1.632	54.000	32.707	AV
3			2484.176	52.916	20.205	-1.084	54.000	32.710	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 21:57
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz	

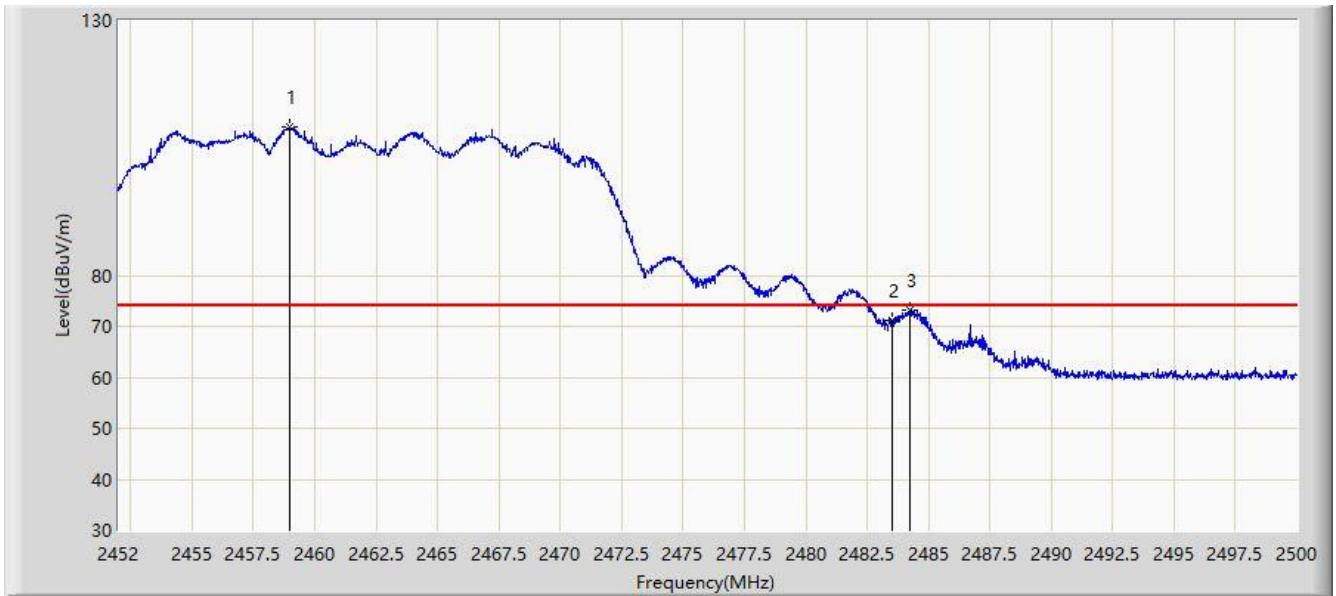


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2458.984	109.086	76.487	N/A	N/A	32.599	PK
2			2483.500	71.155	38.447	-2.845	74.000	32.707	PK
3			2484.232	73.300	40.589	-0.700	74.000	32.711	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 21:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz	

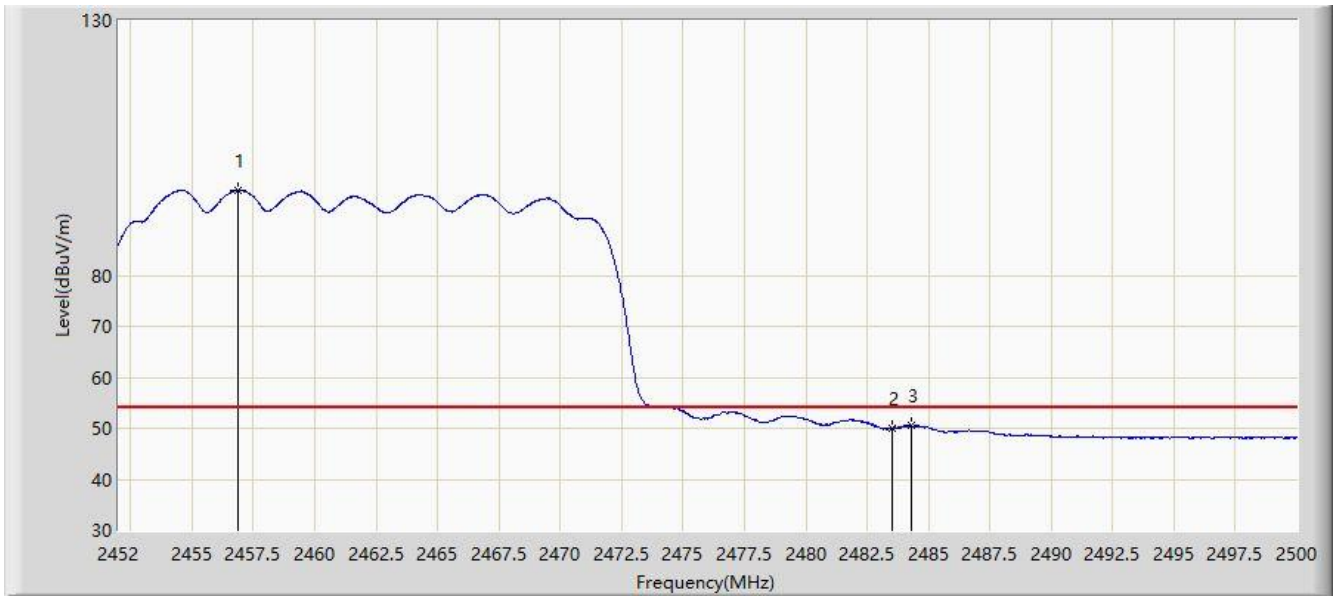

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.896	96.665	64.075	N/A	N/A	32.590	AV
2			2483.500	49.947	17.239	-4.053	54.000	32.707	AV
3			2484.304	50.676	17.965	-3.324	54.000	32.711	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 22:00
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.496	107.680	75.074	N/A	N/A	32.606	PK
2			2483.500	70.533	37.825	-3.467	74.000	32.707	PK
3			2483.848	71.486	38.777	-2.514	74.000	32.709	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 22:03
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz	

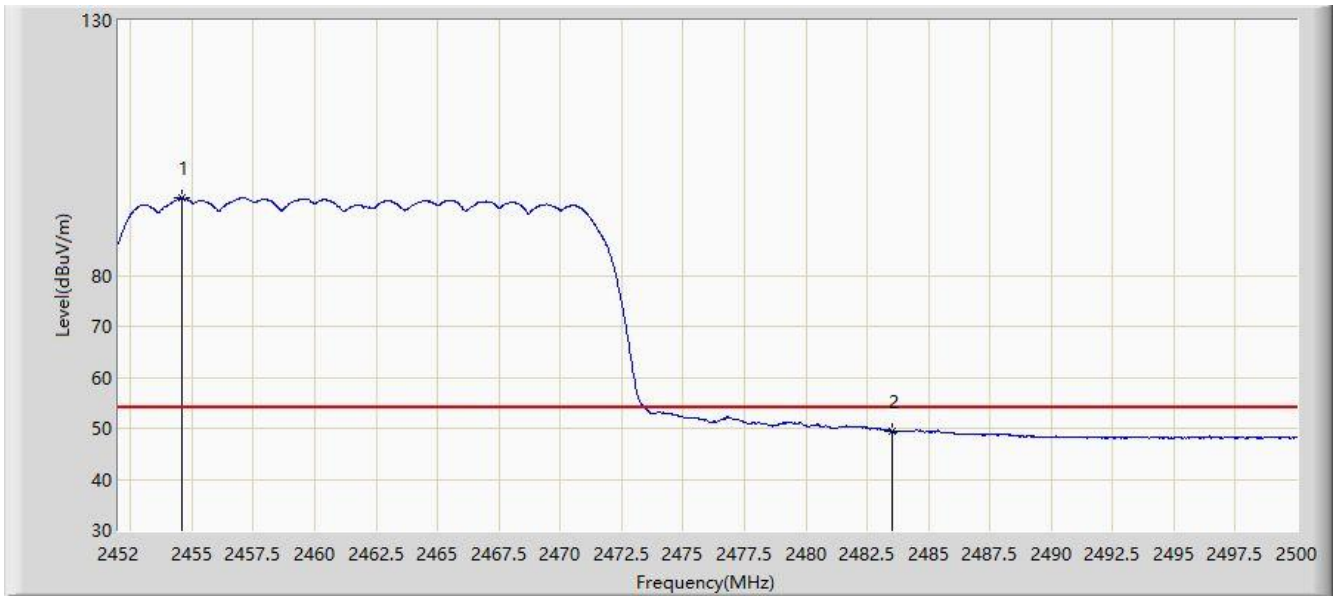


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.592	95.110	62.530	N/A	N/A	32.580	AV
2			2483.500	49.506	16.798	-4.494	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 03:00
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz	

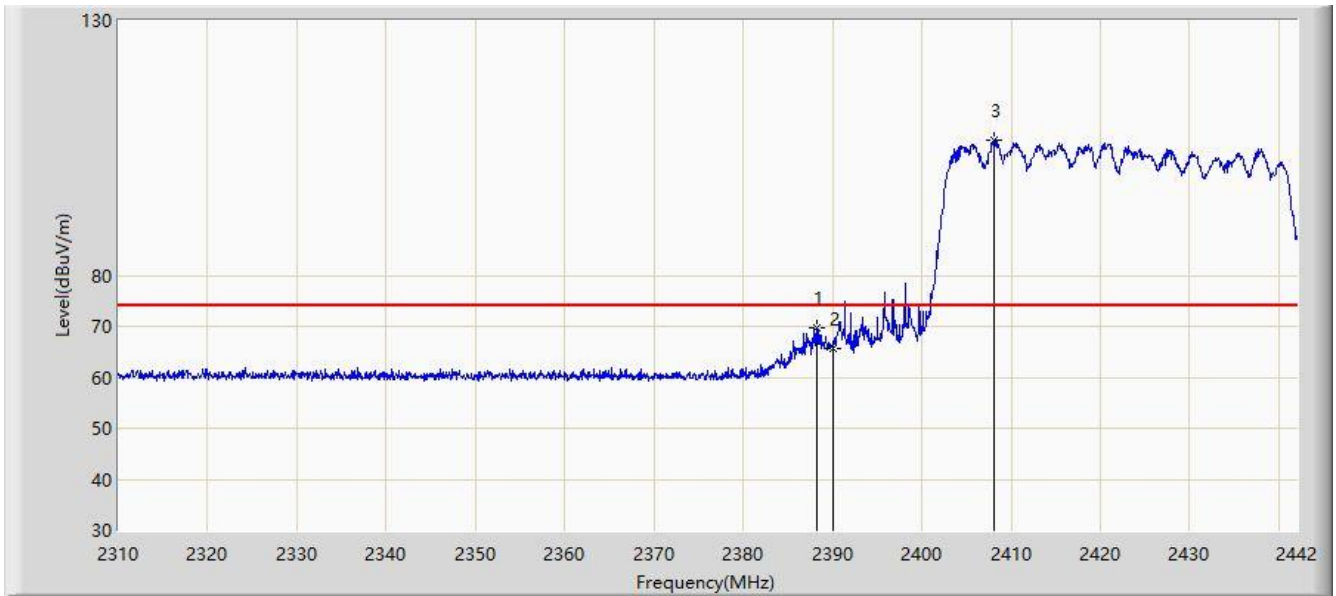


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.276	69.811	37.523	-4.189	74.000	32.288	PK
2			2390.000	65.789	33.493	-8.211	74.000	32.296	PK
3		*	2408.010	106.561	74.186	N/A	N/A	32.375	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 02:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz	

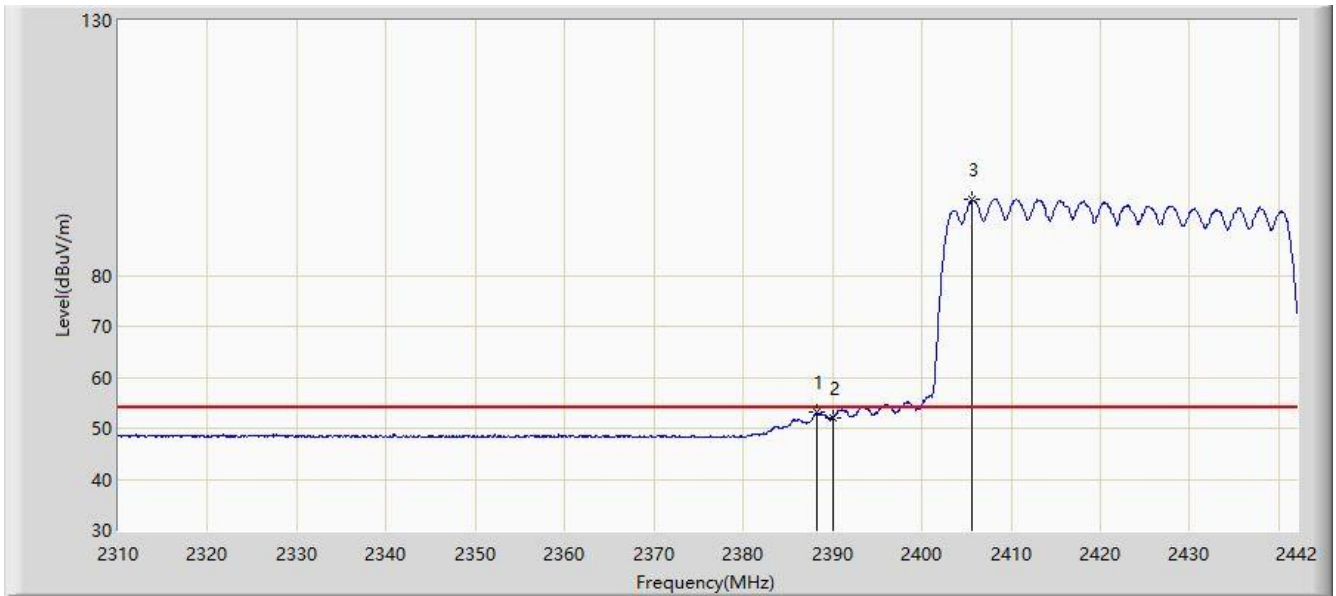


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.276	53.069	20.781	-0.931	54.000	32.288	AV
2			2390.000	52.169	19.873	-1.831	54.000	32.296	AV
3		*	2405.634	94.932	62.567	N/A	N/A	32.365	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 03:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz	

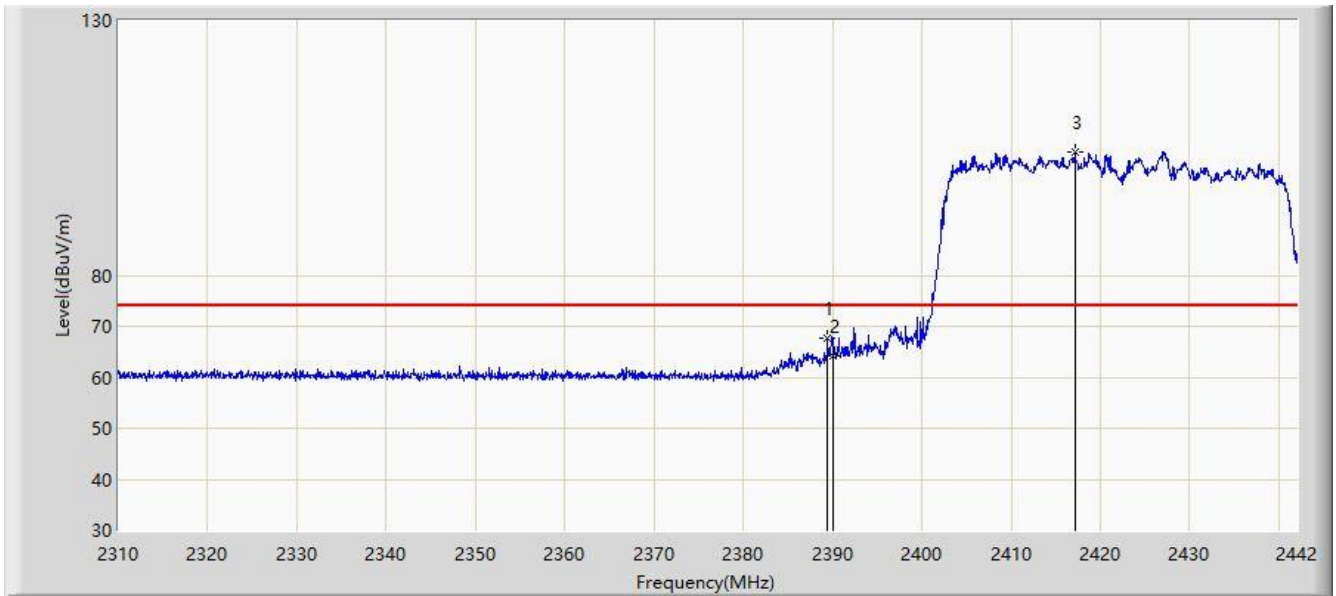


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.464	67.592	35.298	-6.408	74.000	32.293	PK
2			2390.000	64.259	31.963	-9.741	74.000	32.296	PK
3		*	2417.118	104.223	71.808	N/A	N/A	32.415	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/24 - 03:02
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz	

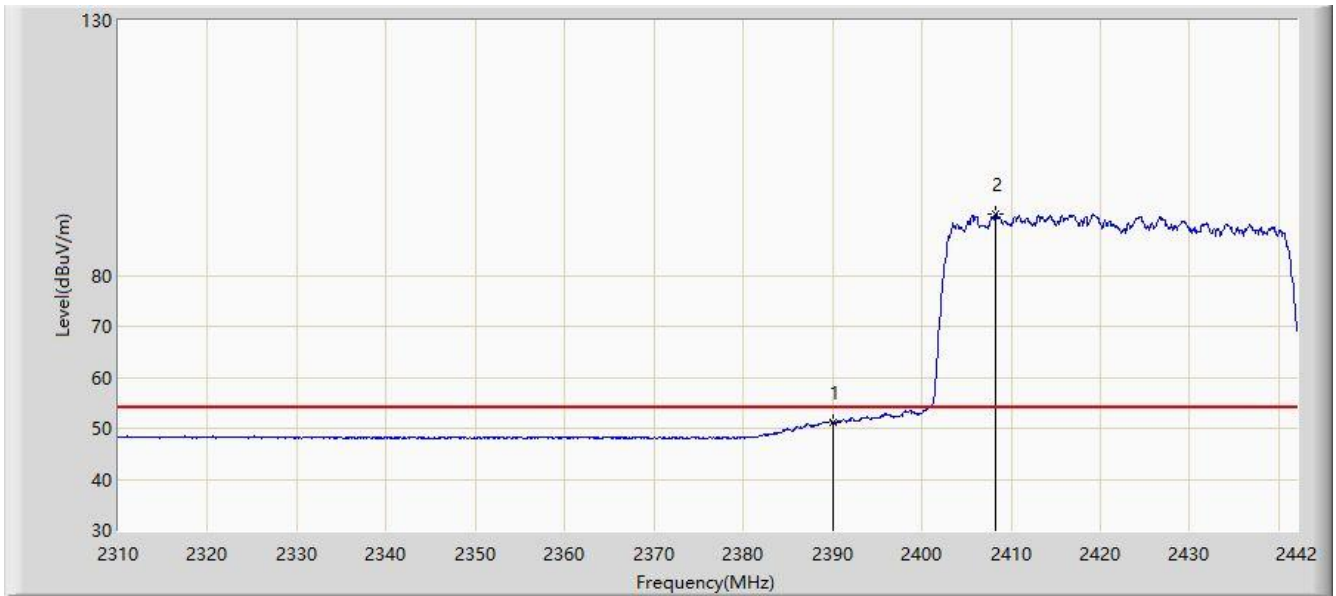


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.078	18.782	-2.922	54.000	32.296	AV
2		*	2408.274	91.960	59.584	N/A	N/A	32.376	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 01:08
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2427MHz	

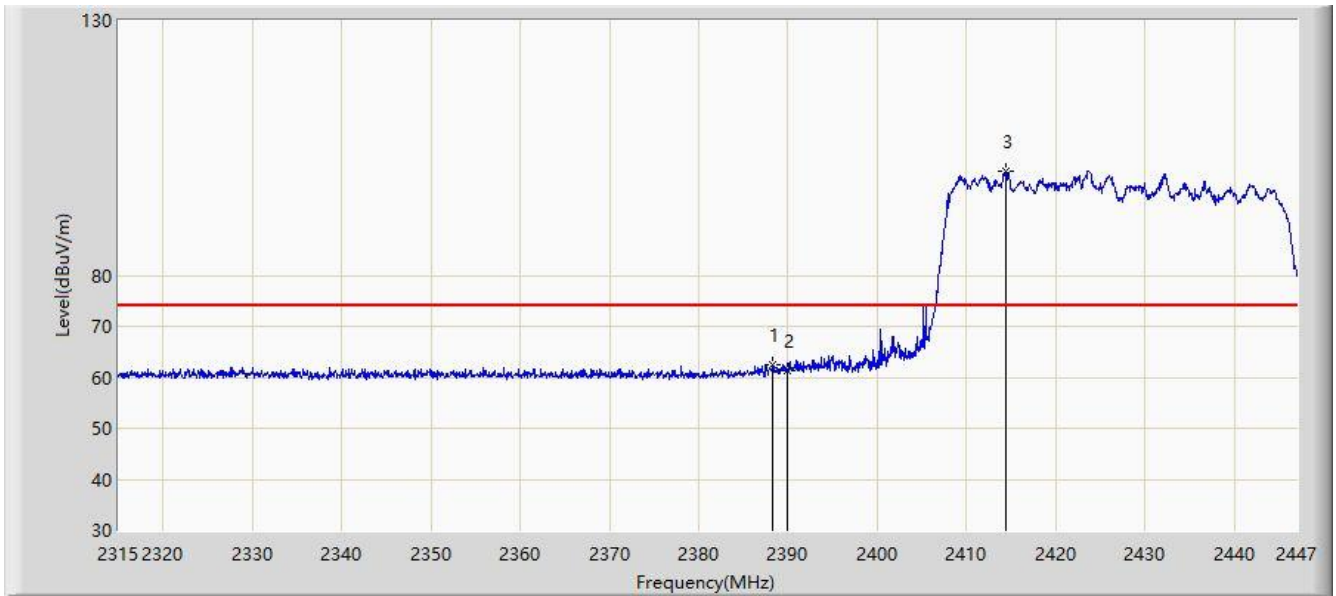


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.326	62.356	30.067	-11.644	74.000	32.289	PK
2			2390.000	61.220	28.924	-12.780	74.000	32.296	PK
3		*	2414.462	100.529	68.126	N/A	N/A	32.403	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 01:12
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2427MHz	

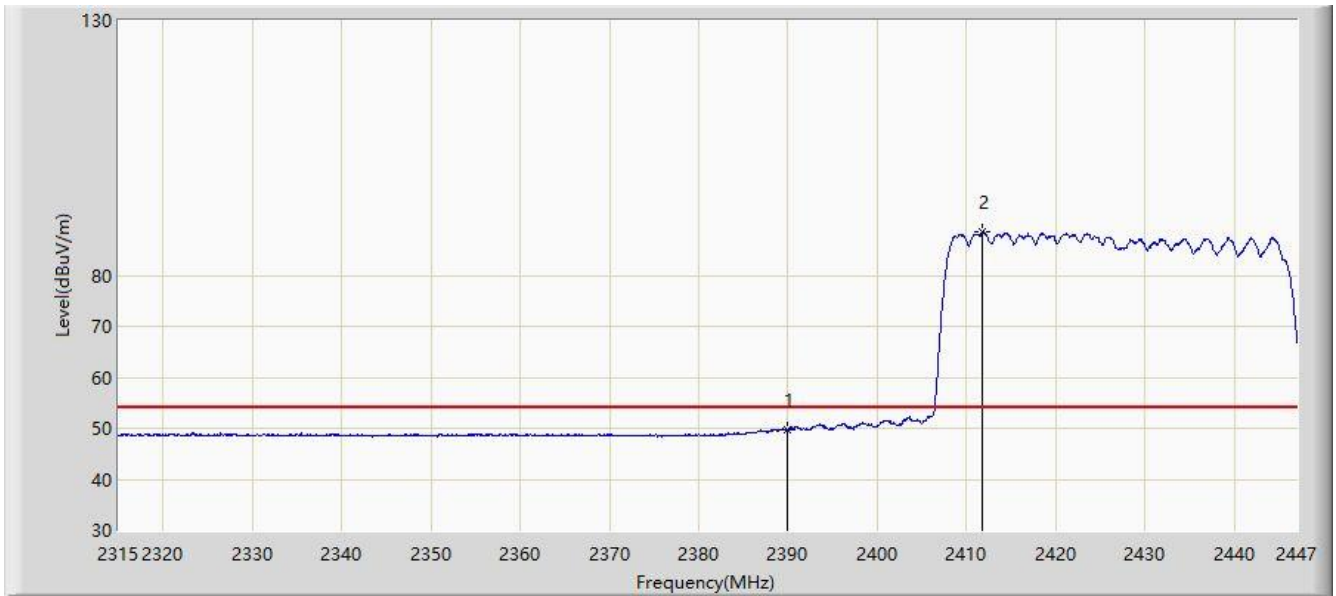


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.620	17.324	-4.380	54.000	32.296	AV
2		*	2411.822	88.409	56.018	N/A	N/A	32.392	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 01:07
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2427MHz	

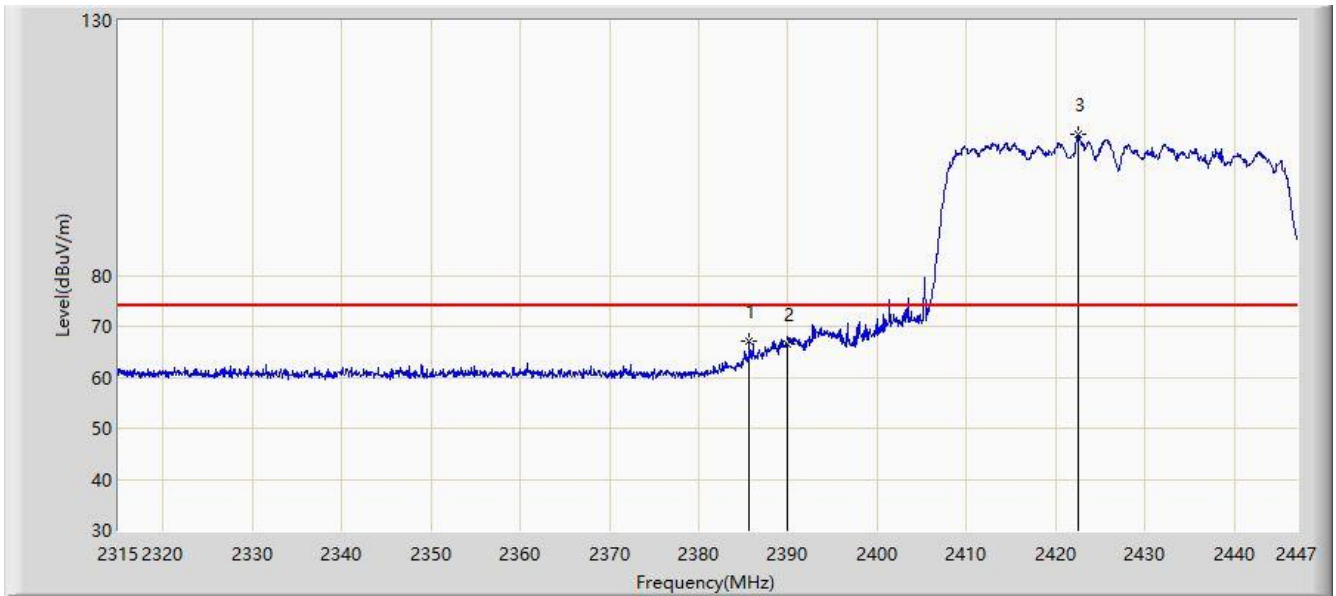


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.686	67.212	34.935	-6.788	74.000	32.277	PK
2			2390.000	66.579	34.283	-7.421	74.000	32.296	PK
3		*	2422.580	107.796	75.357	N/A	N/A	32.439	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 01:05
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2427MHz	

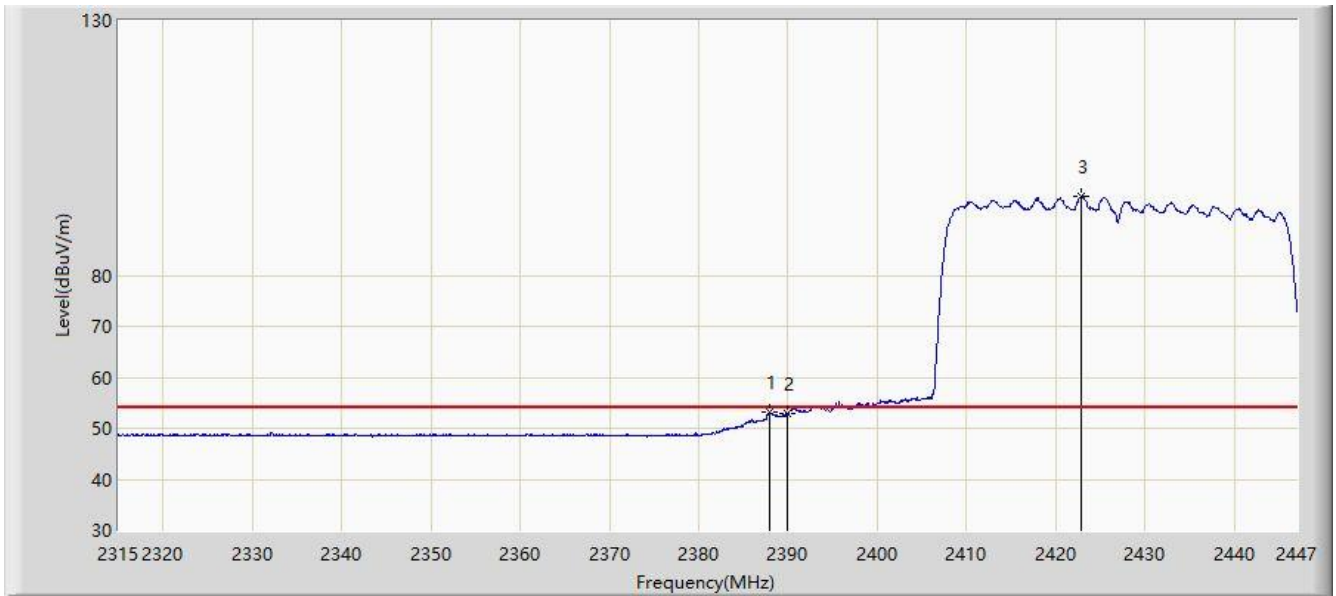


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.996	53.200	20.913	-0.800	54.000	32.288	AV
2			2390.000	52.837	20.541	-1.163	54.000	32.296	AV
3		*	2422.778	95.422	62.982	N/A	N/A	32.440	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/23 - 00:27
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2437MHz	

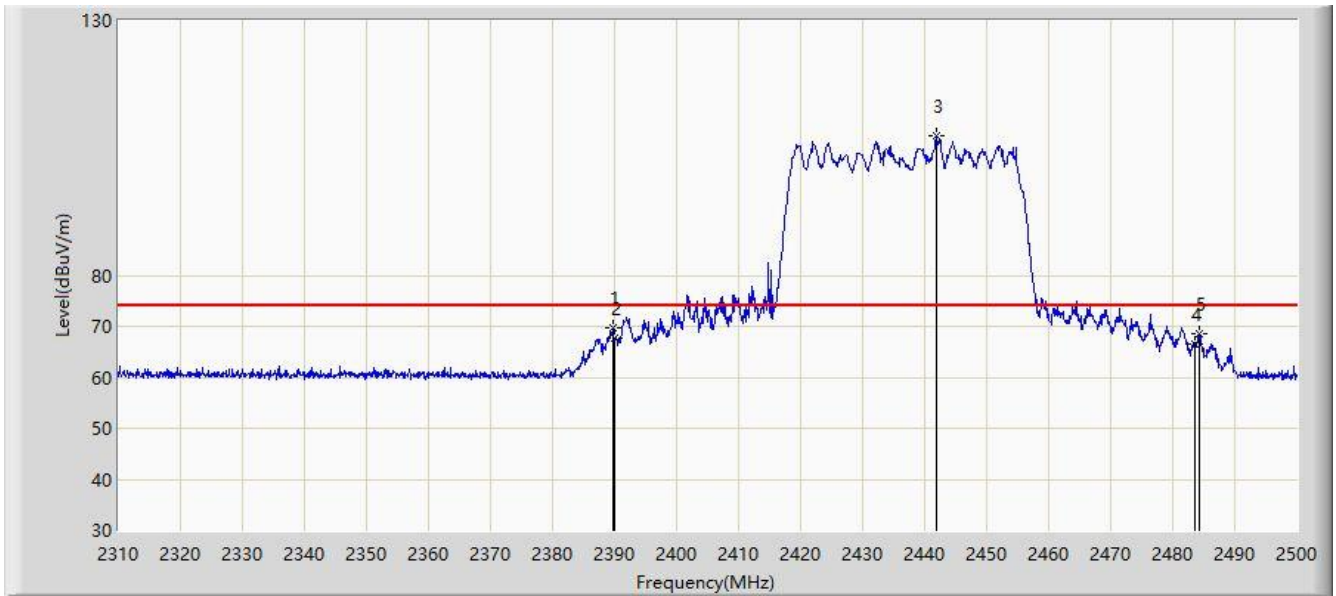


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.705	69.635	37.340	-4.365	74.000	32.295	PK
2			2390.000	67.569	35.273	-6.431	74.000	32.296	PK
3		*	2441.955	107.434	74.909	N/A	N/A	32.525	PK
4			2483.500	66.623	33.915	-7.377	74.000	32.707	PK
5			2484.230	68.435	35.724	-5.565	74.000	32.711	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/23 - 00:24
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2437MHz	

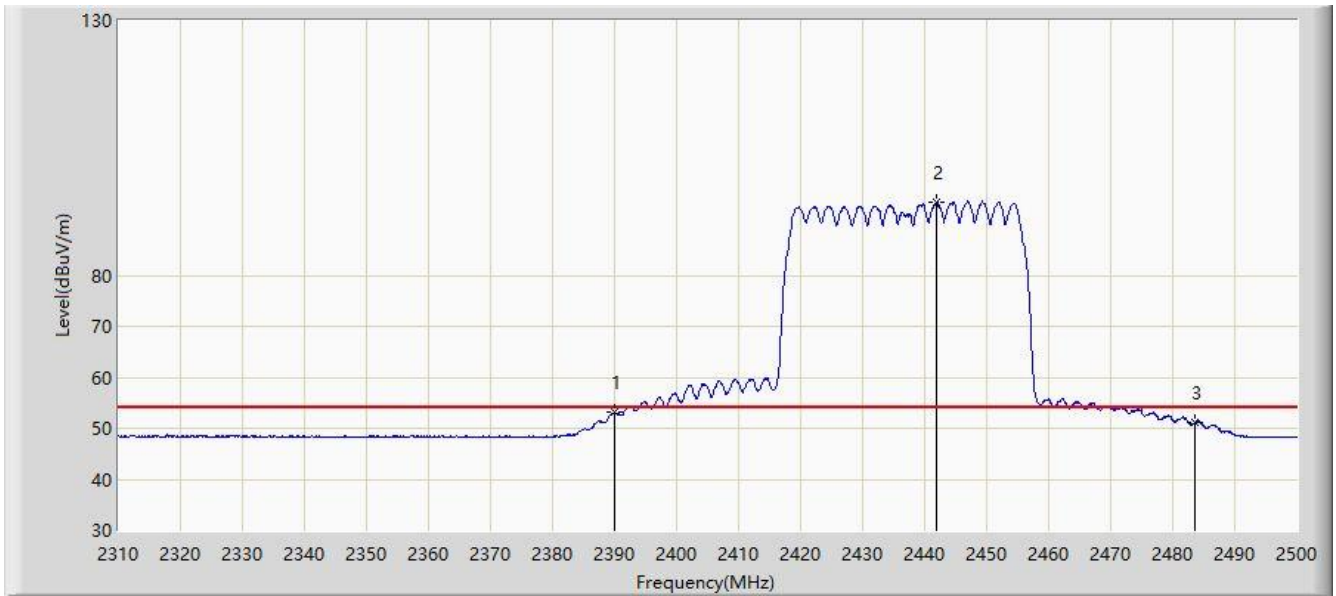


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.146	20.850	-0.854	54.000	32.296	AV
2		*	2441.955	94.444	61.919	N/A	N/A	32.525	AV
3			2483.500	51.023	18.315	-2.977	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/23 - 00:28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2437MHz	

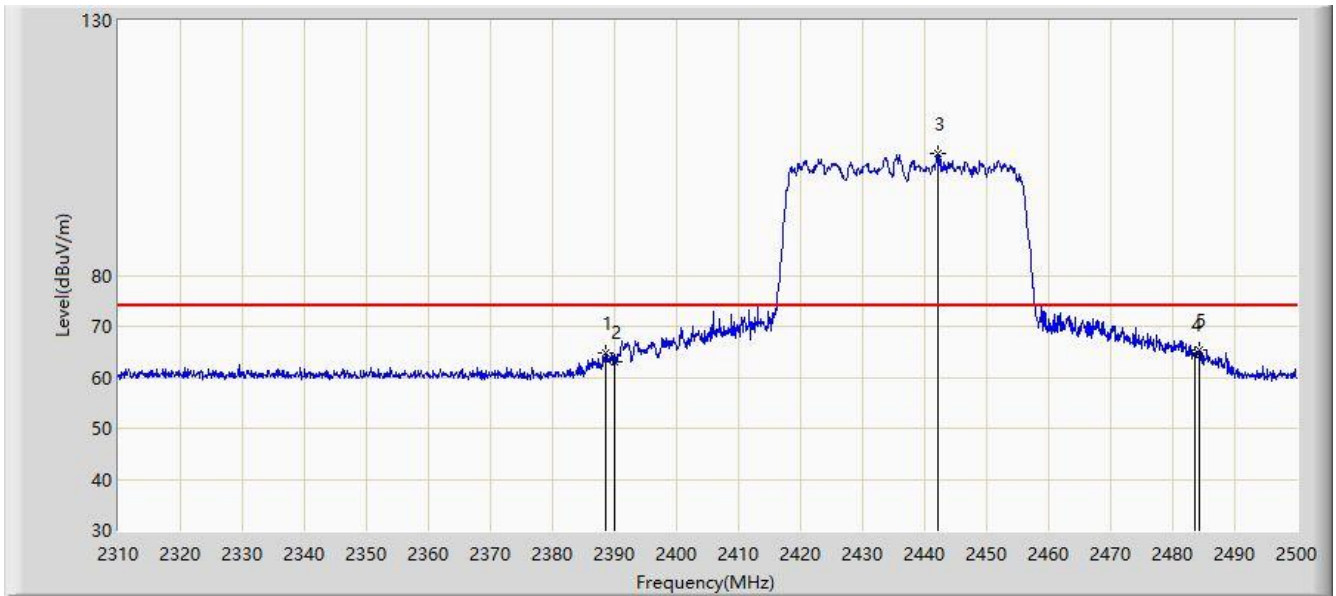


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.470	64.831	32.542	-9.169	74.000	32.289	PK
2			2390.000	63.093	30.797	-10.907	74.000	32.296	PK
3		*	2442.050	103.936	71.411	N/A	N/A	32.526	PK
4			2483.500	64.475	31.767	-9.525	74.000	32.707	PK
5			2484.230	65.427	32.716	-8.573	74.000	32.711	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/23 - 00:30
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2437MHz	

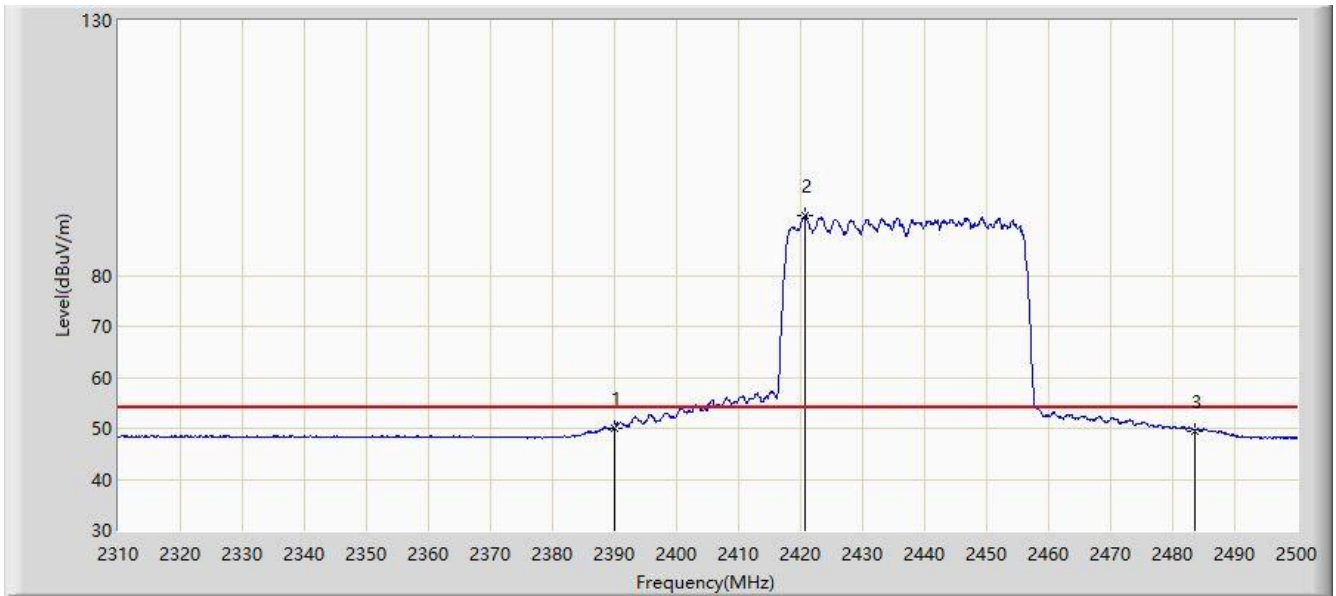


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.084	17.788	-3.916	54.000	32.296	AV
2		*	2420.675	91.735	59.304	N/A	N/A	32.431	AV
3			2483.500	49.561	16.853	-4.439	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 01:22
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2447MHz	

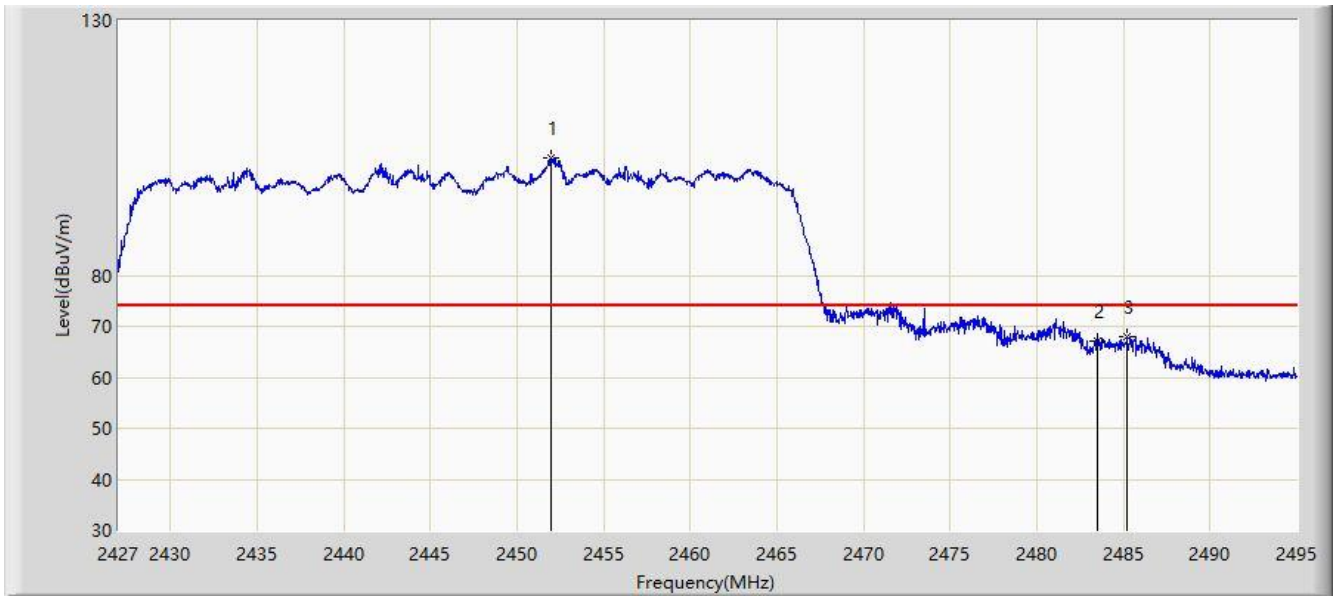


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2451.990	102.932	70.363	N/A	N/A	32.569	PK
2			2483.500	67.123	34.415	-6.877	74.000	32.707	PK
3			2485.208	68.104	35.389	-5.896	74.000	32.715	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 01:23
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2447MHz	

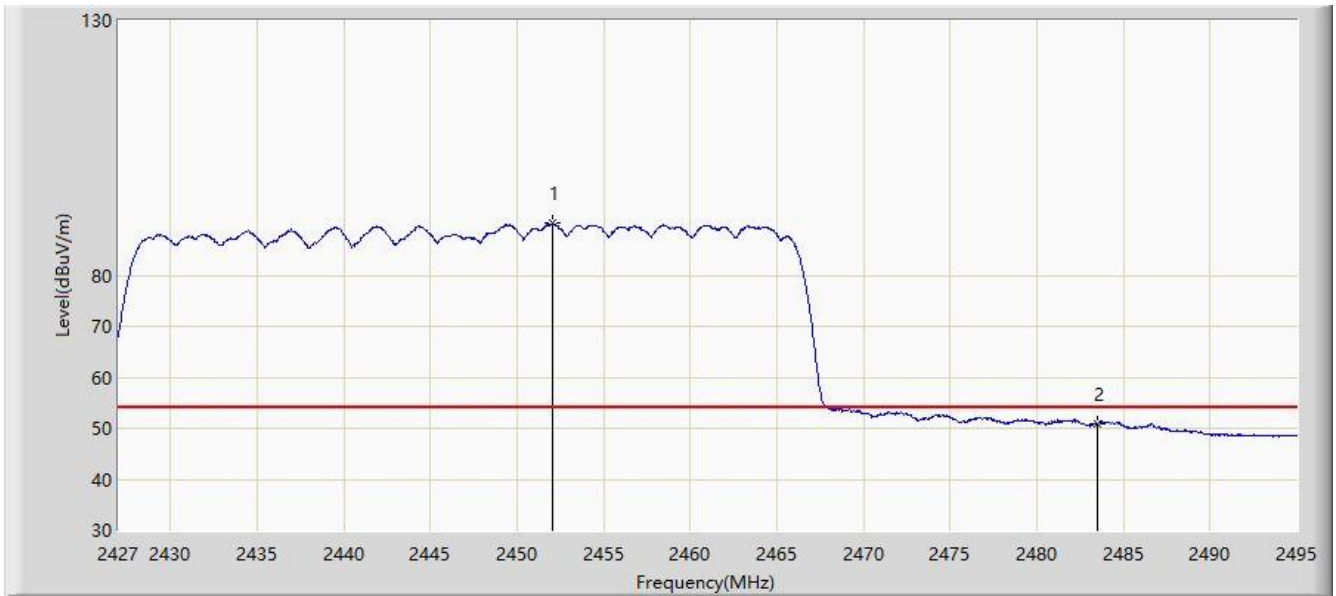


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2452.024	90.147	57.578	N/A	N/A	32.569	AV
2			2483.500	50.869	18.161	-3.131	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 01:21
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2447MHz	

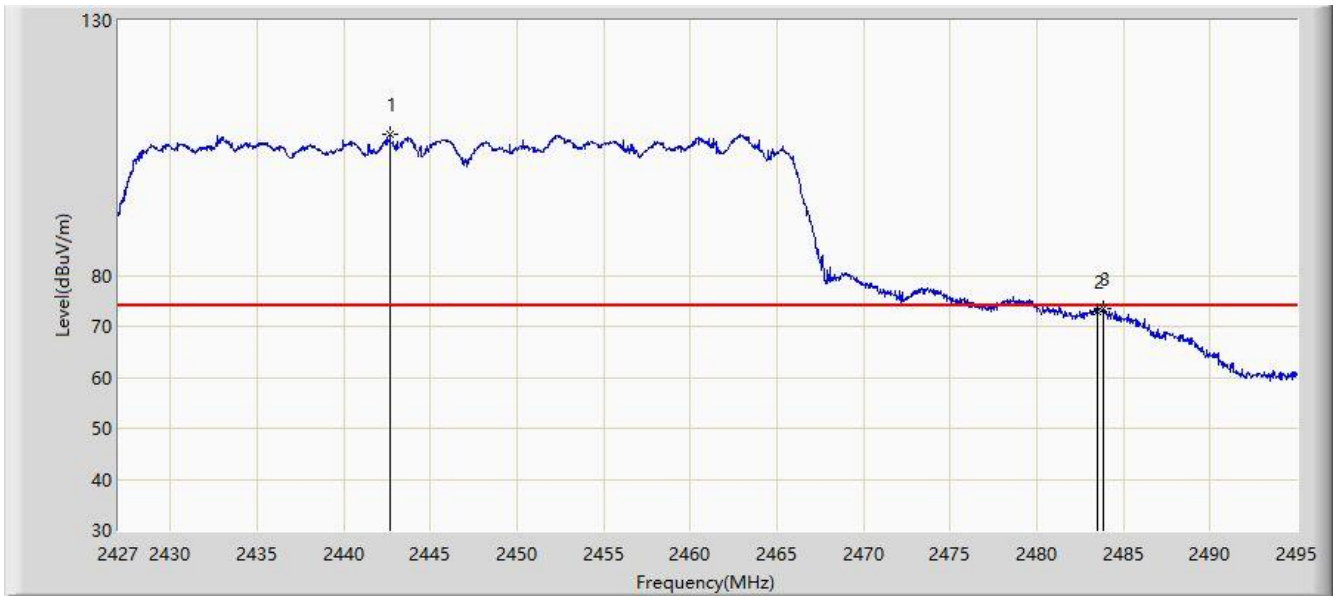


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2442.674	107.585	75.057	N/A	N/A	32.528	PK
2			2483.500	72.842	40.134	-1.158	74.000	32.707	PK
3			2483.814	73.335	40.626	-0.665	74.000	32.709	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/28 - 01:19
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2447MHz	

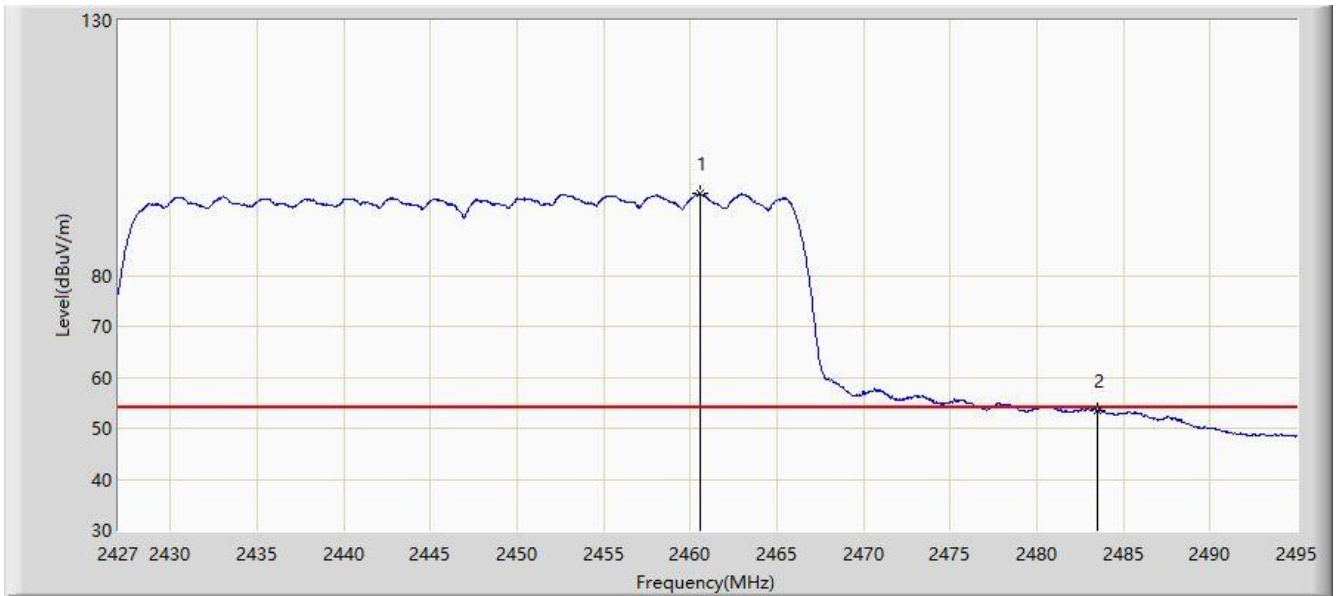


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.558	96.000	63.394	N/A	N/A	32.606	AV
2			2483.500	53.393	20.685	-0.607	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 22:40
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz	

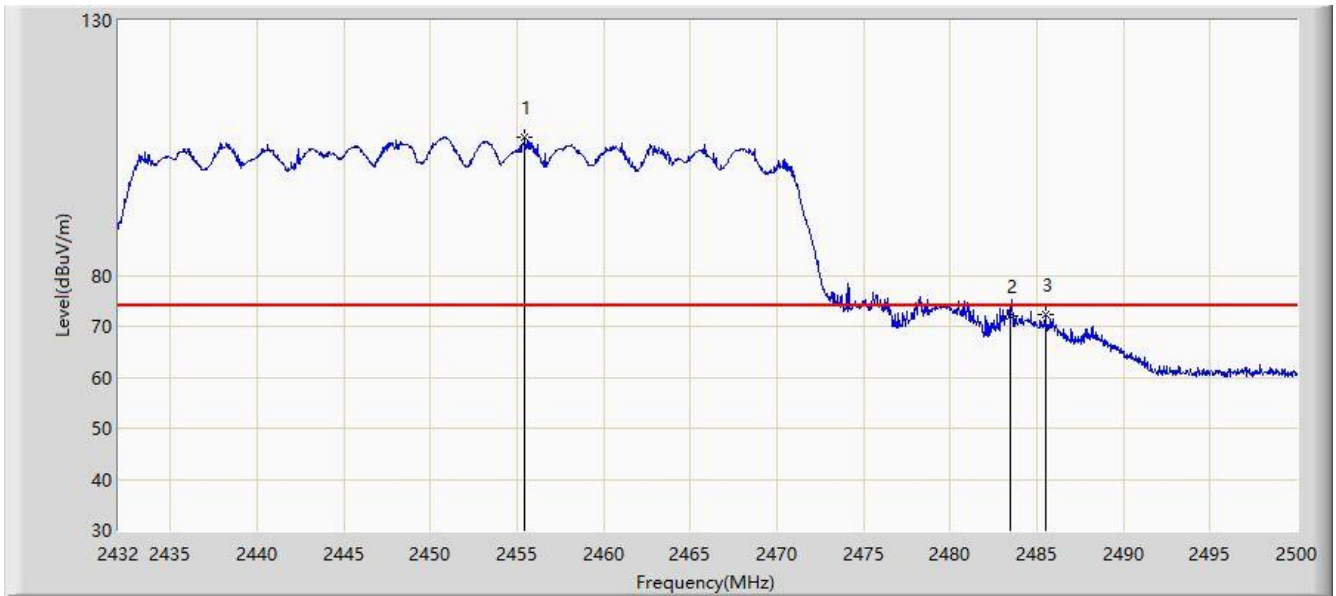


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.460	107.152	74.568	N/A	N/A	32.584	PK
2			2483.500	72.059	39.351	-1.941	74.000	32.707	PK
3			2485.482	72.265	39.549	-1.735	74.000	32.717	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 22:46
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz	

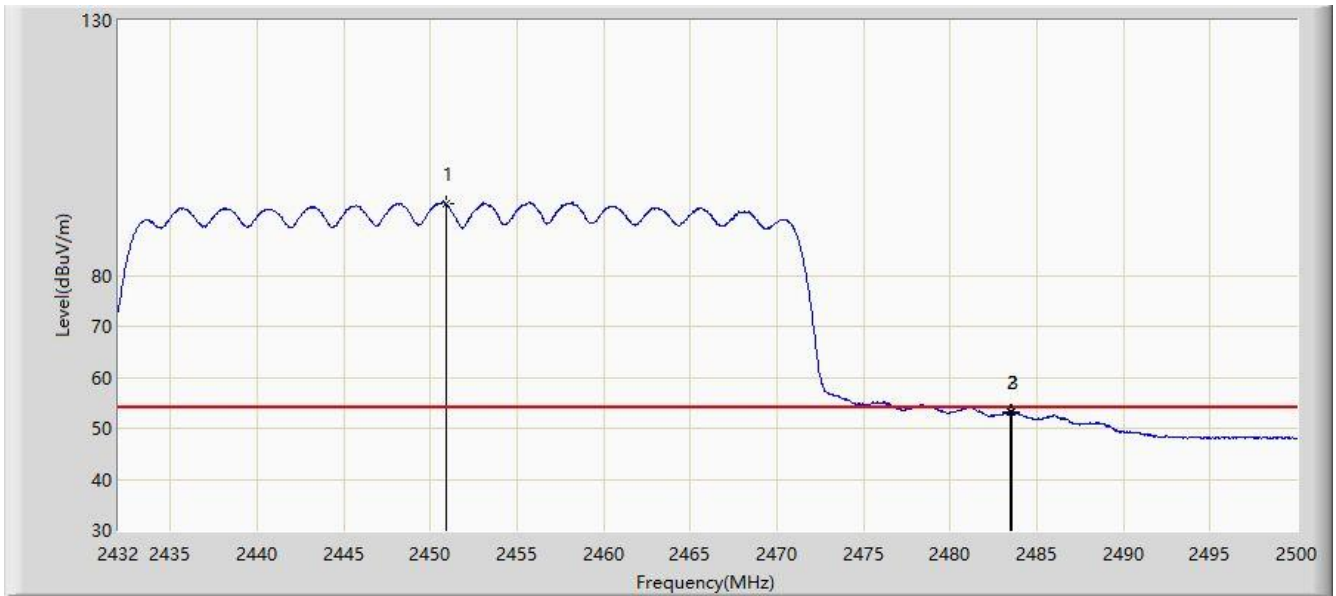


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.904	94.166	61.602	N/A	N/A	32.564	AV
2			2483.500	53.087	20.379	-0.913	54.000	32.707	AV
3			2483.578	53.189	20.481	-0.811	54.000	32.708	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 22:47
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz	

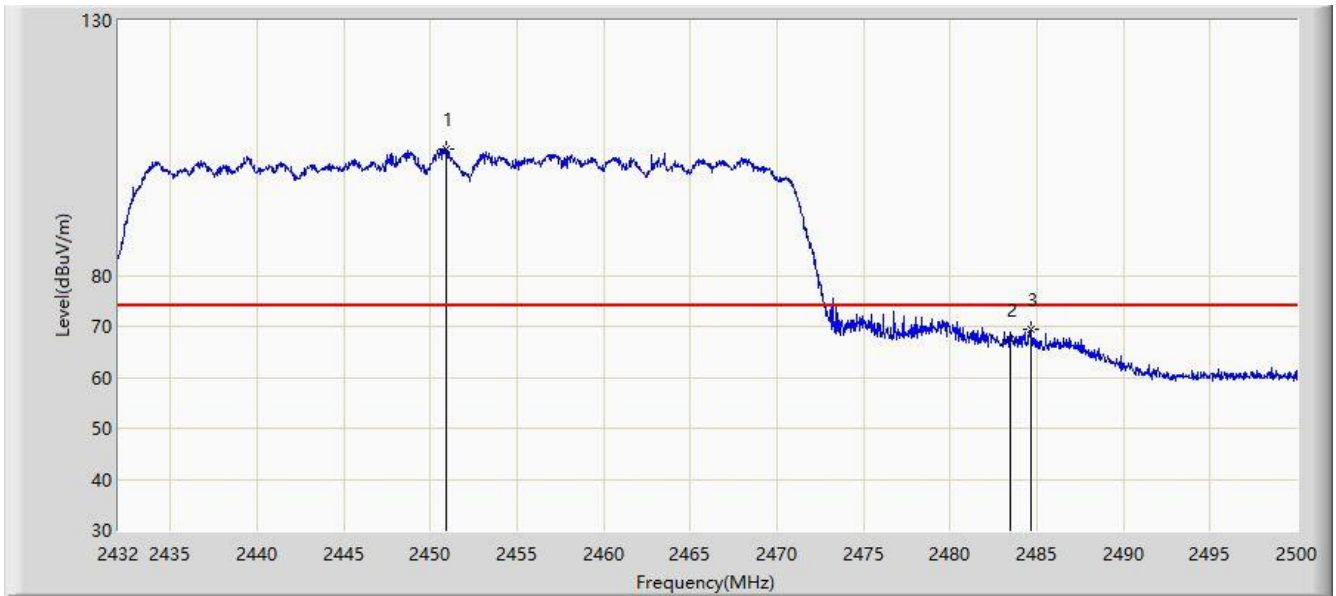


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.938	104.705	72.141	N/A	N/A	32.564	PK
2			2483.500	67.508	34.800	-6.492	74.000	32.707	PK
3			2484.700	69.476	36.763	-4.524	74.000	32.713	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/13 - 22:49
Limit: FCC_Part15.209_RSE(3m)	Engineer: Jay Chu
Probe: BBHA 9120D (1GHz~18GHz)	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz	

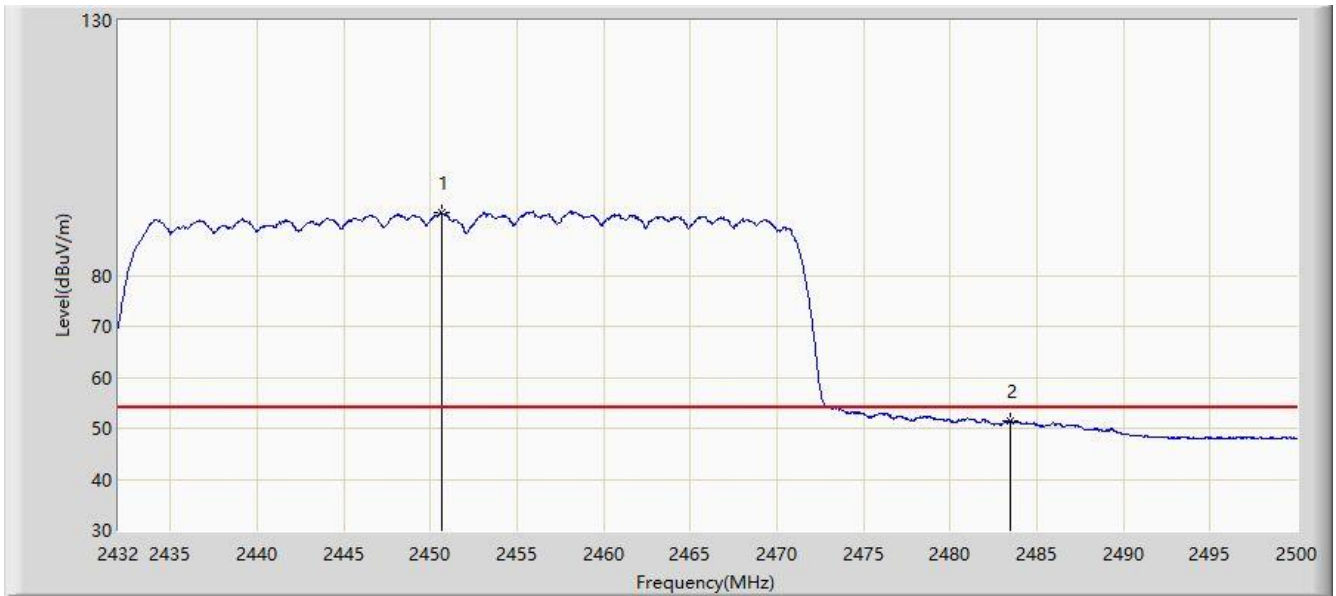

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.666	92.278	59.715	N/A	N/A	32.563	AV
2			2483.500	51.340	18.632	-2.660	54.000	32.707	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

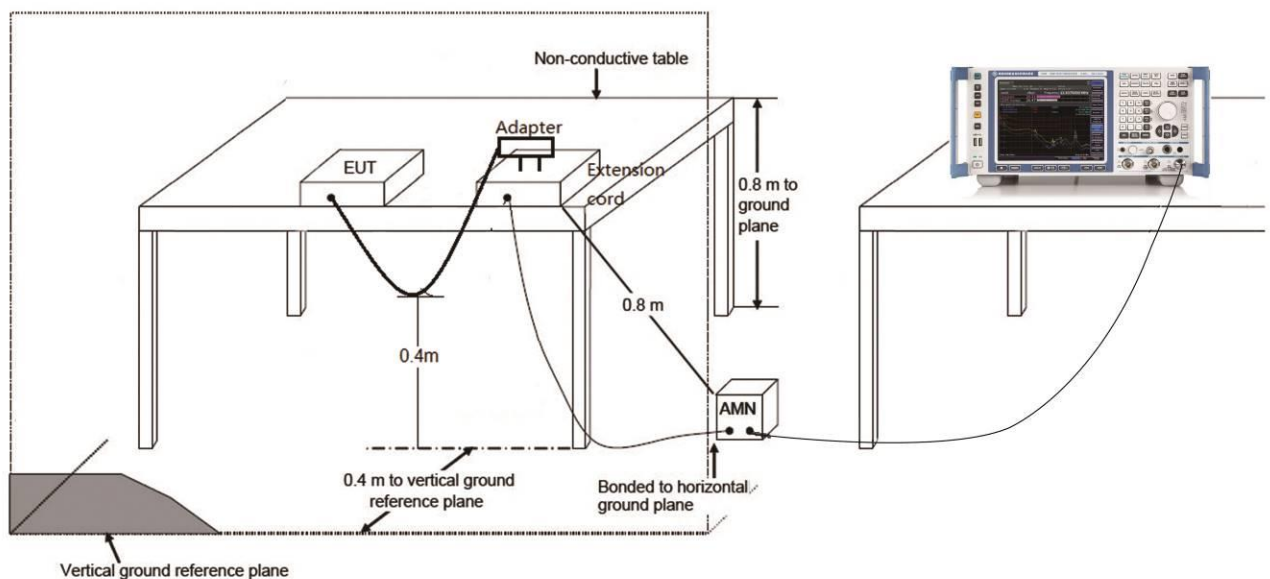

7.8.3.Test Result

Site: SR2	Time: 2020/08/10 - 10:16
Limit: FCC_Part15.207_CE	Engineer: Jay Chu
Probe: ENV216_Filter On	Polarity: Line
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

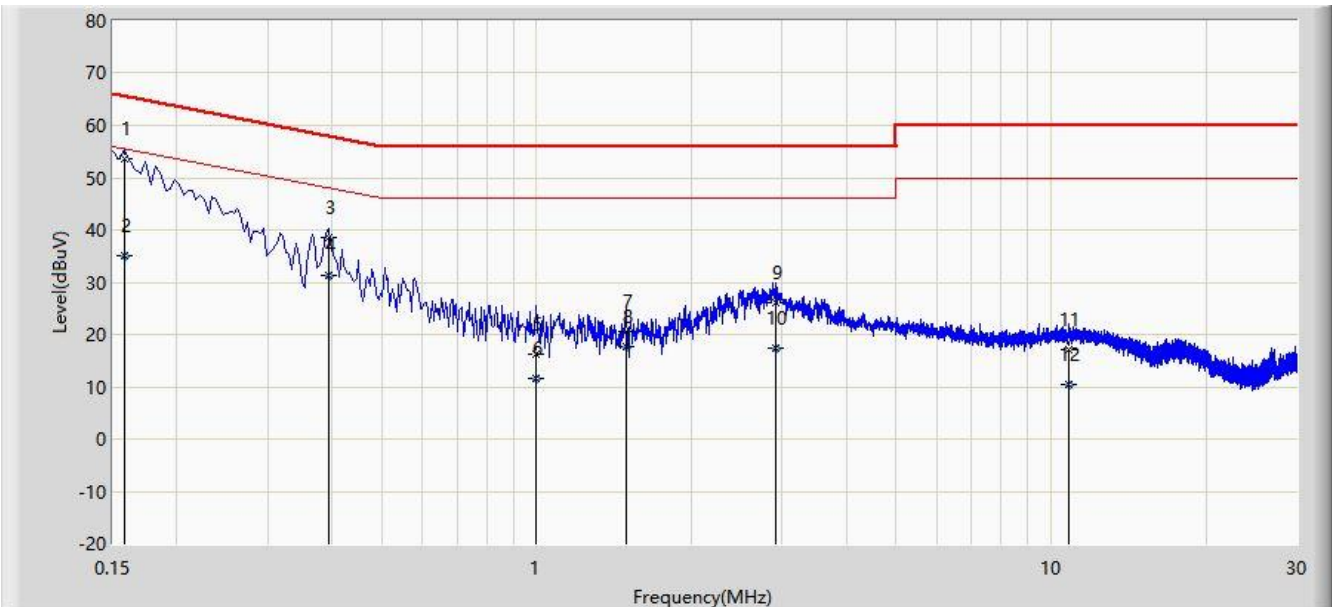


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.158	53.508	43.753	-12.060	65.568	9.755	QP
2			0.158	34.963	25.208	-20.605	55.568	9.755	AV
3			0.394	38.559	28.935	-19.420	57.979	9.624	QP
4			0.394	31.191	21.567	-16.788	47.979	9.624	AV
5			0.994	16.356	6.696	-39.644	56.000	9.660	QP
6			0.994	11.712	2.052	-34.288	46.000	9.660	AV
7			1.494	20.500	10.825	-35.500	56.000	9.675	QP
8			1.494	17.654	7.979	-28.346	46.000	9.675	AV
9			2.910	26.178	16.474	-29.822	56.000	9.704	QP
10			2.910	17.301	7.597	-28.699	46.000	9.704	AV
11			10.814	17.043	7.155	-42.957	60.000	9.888	QP
12			10.814	10.291	0.403	-39.709	50.000	9.888	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2020/08/06 - 14:37
Limit: FCC_Part15.207_CE	Engineer: Jay Chu
Probe: ENV216_Filter On	Polarity: Neutral
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

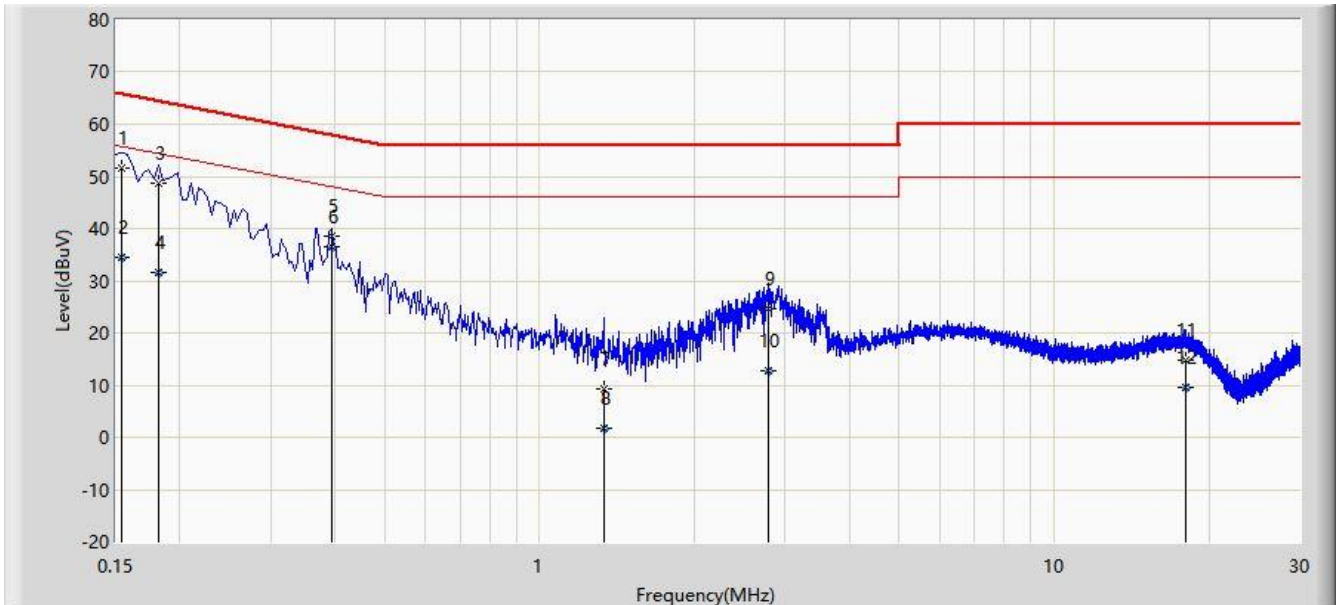

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.154	51.671	42.050	-14.111	65.781	9.621	QP
2			0.154	34.537	24.916	-21.245	55.781	9.621	AV
3			0.182	48.711	39.089	-15.683	64.394	9.622	QP
4			0.182	31.562	21.940	-22.832	54.394	9.622	AV
5			0.394	38.435	28.801	-19.544	57.979	9.634	QP
6		*	0.394	36.622	26.988	-11.357	47.979	9.634	AV
7			1.334	9.342	-0.335	-46.658	56.000	9.677	QP
8			1.334	1.814	-7.863	-44.186	46.000	9.677	AV
9			2.786	24.685	14.979	-31.315	56.000	9.706	QP
10			2.786	12.715	3.009	-33.285	46.000	9.706	AV
11			18.062	14.799	4.765	-45.201	60.000	10.034	QP
12			18.062	9.690	-0.344	-40.310	50.000	10.034	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15C of the FCC rules.

The End

Appendix A - Test Setup Photograph

Refer to “2007TW0002-UT” file.

Appendix B - EUT Photograph

Refer to "2007TW0002-UE" file.