

MEASUREMENT REPORT

FCC PART 15 Subpart E WLAN 802.11a/n/ac

FCC ID: Q9DAPINP303

APPLICANT: Hewlett Packard Enterprise Company

Application Type: Certification

Product: ACCESS POINT

Model No.: APINP303

Brand Name:  

FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s): Part15 Subpart E (Section 15.407)

Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02v02r01,
KDB 644545 D03v01, KDB 662911 D01v02r01

Test Date: October 16, 2017 ~ September 27, 2018

Reviewed By:


(Paddy Chen)

Approved By:


(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v02r01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1810TW0101-U4	Rev. 01	Initial Report	10-11-2018	Valid

Note 1: The APINP303 is a variation on the existing APIN0303. The APIN0303 is currently FCC certified under FCC ID: Q9DAPIN0303 and ISED certified under IC: 4675A-APIN0303.

The APINP303 differs from the APIN0303 in the following ways:

- A second Ethernet port was added (second port supports POE out).
- The BLE radio chip (previously from TI) was changed to a Nordic BLE/ZigBee IC.

Detail EUT information and test summary information refers to operation description.

Note 2: Some test items were spot-checked shown as below table, most test data refer to APIN0303 original test report no. 1711TW0103-U3 & 1711TW0103-U7.

Test	Worse Case Mode	Comment
UNII1 (5150-5250MHz)		
Radiated Spurious Emission	11a (Channel 44)	The data is coming from the original FCC ID report Q9DAPIN0303
Radiated Band Edge	HT40 (CDD Mode)	
Output Power	Detail spot check data and re-test data see test report.	Increase of 0.2dB on antenna gain would not affect compliance. Results from APIN0303 still valid.
Power Density		
Occupied Bandwidth	The data is coming from the original FCC ID report Q9DAPIN0303	
UNII2a (5150-5250MHz)		
Radiated Spurious Emission	HT20 (BF Mode)	The data is coming from the original FCC ID report Q9DAPIN0303
Radiated Band Edge	VHT80	
Output Power	Detail spot check data and re-test data see test report.	Limited power measurements performed to address 0.2dB increase in antenna gain. Results from APIN0303 still valid.
Power Density		
Occupied Bandwidth	The data is coming from the original FCC ID report Q9DAPIN0303	

Test	Worse Case Mode	Comment
UNII2c (5470-5725MHz)		
Radiated Spurious Emission	VHT20 (CDD Mode)	The data is coming from the original FCC ID report Q9DAPIN0303
Radiated Band Edge	VHT80 (CDD Mode)	
Output Power	Detail spot check data and re-test data see test report.	Limited power measurements performed to address 0.2dB increase in antenna gain. Results from APIN0303 still valid.
Power Density		
Occupied Bandwidth	The data is coming from the original FCC ID report Q9DAPIN0303	
UNII3 (5725-5850MHz)		
Radiated Spurious Emission	HT20 (CDD mode)	The data is coming from the original FCC ID report Q9DAPIN0303
Radiated Band Edge	VHT80 (BF mode)	
Output Power	Detail spot check data and re-test data see test report.	Increase of 0.2dB on antenna gain would not affect compliance. Results from APIN0303 still valid.
Power Density		
Occupied Bandwidth	The data is coming from the original FCC ID report Q9DAPIN0303	

Note 3: The applicant declares that they will take full responsibility that the test data represents compliance for the new FCC ID (Q9DAPINP303).

CONTENTS

Description	Page
§2.1033 General Information	7
1. INTRODUCTION	8
1.1. Scope	8
1.2. MRT Test Location	8
2. PRODUCT INFORMATION	9
2.1. Equipment Description.....	9
2.2. Product Specification Subjective to this Report.....	9
2.3. Working Frequencies for this report	10
2.4. Description of Available Antennas	11
2.5. Description of Antenna RF Port	12
2.6. Test Mode	12
2.7. Description of Test Software	13
2.8. Device Capabilities	16
2.9. Test Configuration	18
2.10. EMI Suppression Device(s)/Modifications.....	18
2.11. Labeling Requirements.....	18
3. DESCRIPTION OF TEST	19
3.1. Evaluation Procedure	19
3.2. AC Line Conducted Emissions	19
3.3. Radiated Emissions	20
4. ANTENNA REQUIREMENTS.....	21
5. TEST EQUIPMENT CALIBRATION DATE	22
6. MEASUREMENT UNCERTAINTY	24
7. TEST RESULT	25
7.1. Summary	25
7.2. 26dB Bandwidth Measurement.....	26
7.2.1. Test Limit	26
7.2.2. Test Procedure used.....	26
7.2.3. Test Setting.....	26
7.2.4. Test Setup	26
7.2.5. Test Result.....	27
7.3. 6dB Bandwidth Measurement.....	44
7.3.1. Test Limit	44

7.3.2. Test Procedure used.....	44
7.3.3. Test Setting.....	44
7.3.4. Test Setup	44
7.3.5. Test Result.....	45
7.4. Output Power Measurement	50
7.4.1. Test Limit	50
7.4.2. Test Procedure Used	50
7.4.3. Test Setting.....	50
7.4.4. Test Setup	50
7.4.5. Test Result.....	51
7.5. Transmit Power Control	59
7.5.1. Test Limit	59
7.5.2. Test Procedure Used	59
7.5.3. Test Setting.....	59
7.5.4. Test Setup	59
7.5.5. Test Result.....	59
7.6. Power Spectral Density Measurement	60
7.6.1. Test Limit	60
7.6.2. Test Procedure Used	60
7.6.3. Test Setting.....	60
7.6.4. Test Setup	61
7.6.5. Test Result.....	62
7.7. Frequency Stability Measurement.....	118
7.7.1. Test Limit	118
7.7.2. Test Procedure Used	118
7.7.3. Test Setup	119
7.7.4. Test Result.....	120
7.8. Radiated Spurious Emission Measurement	121
7.8.1. Test Limit	121
7.8.2. Test Procedure Used	121
7.8.3. Test Setting.....	121
7.8.4. Test Setup	123
7.8.5. Test Result.....	126
7.9. Radiated Restricted Band Edge Measurement	257
7.9.1. Test Limit	257
7.9.2. Test Procedure Used	258
7.9.3. Test Setting.....	259
7.9.4. Test Setup	260
7.9.5. Test Result.....	261

7.10. AC Conducted Emissions Measurement.....	483
7.10.1. Test Limit	483
7.10.2. Test Setup	483
7.10.3. Test Result.....	484
8. CONCLUSION.....	486
Appendix A – Test Setup Photograph.....	487
Appendix B – EUT Photograph	488

§2.1033 General Information

Applicant:	Hewlett Packard Enterprise Company
Applicant Address:	6280 America Center Drive, San Jose, CA 95002
Manufacturer:	Hewlett Packard Enterprise Company
Manufacturer Address:	6280 America Center Drive, San Jose, CA 95002
Test Site:	MRT Technology (Taiwan) Co., Ltd
Test Site Address:	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
FCC Registration No.:	153292
Test Device Serial No.:	Conducted Sample S/N: CNGHKGX006 (M/N: APINP303) Radiated Sample S/N: CNGHKGX00D (M/N: APINP303) Conducted Sample S/N: CNDVK9T00F (M/N: APIN0303) Radiated Sample S/N: CNDVK9T00J (M/N: APIN0303)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan (R.O.C)

- MRT facility is a FCC registered (Reg. No. 153292) test facility with the site description report on file and is designated by the FCC as an Accredited Test Film.
- MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Taiwan, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

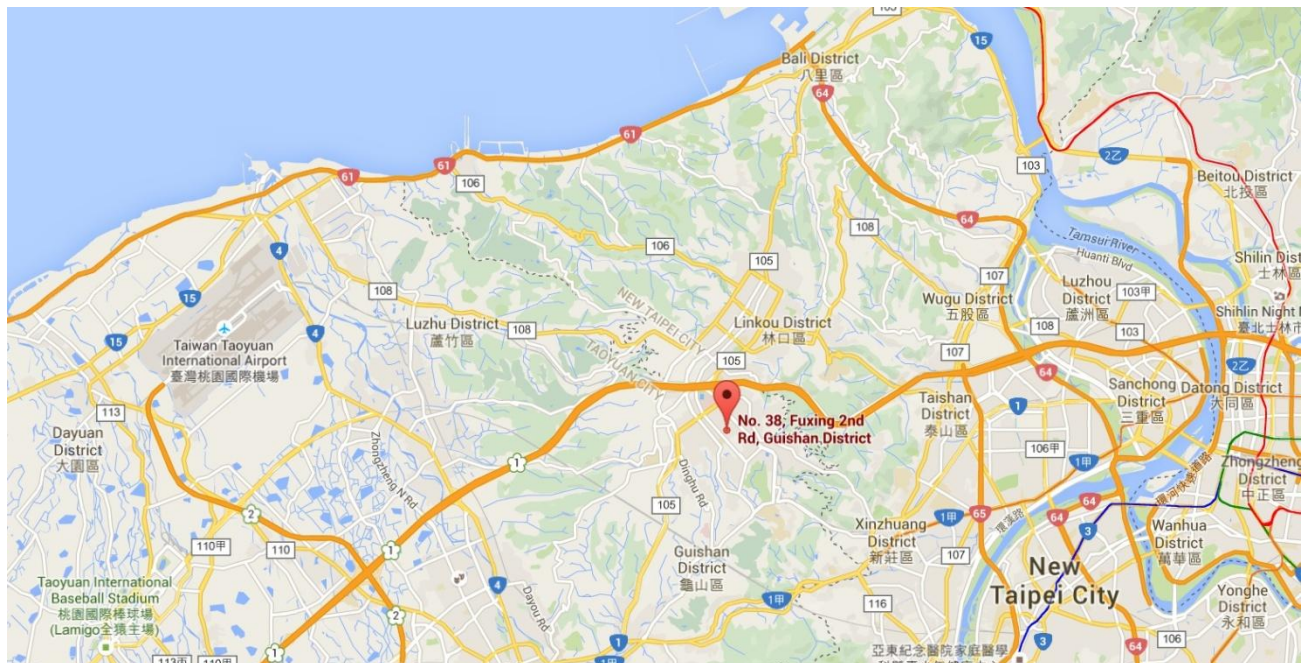

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	ACCESS POINT
Model No.	APINP303
Brand Name:	 
Wi-Fi Specification:	802.11a/b/g/n/ac
Bluetooth Specification:	v4.2 single mode
ZigBee Specification:	802.15.4
Software Version:	v1.02
Operating Temperature:	0 ~ 40 °C
Power Type:	POE input or AC adapter input
Operating Environment:	Indoor Use
Components	
Adapter	Part No.: SDI40-48-U-P7R-C2 Model No.: ATS048T-A480 Input Power: 100 - 240V ~ 50/60Hz, 1.2A Output Power: 48VDC/1A

Note: The applicant provide one POE adapter (Manufacturer: MICROSEMI) for approval testing, it is not for sale.

2.2. Product Specification Subjective to this Report

Frequency Range	For 802.11a/n-HT20/ac-VHT20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80: 5210MHz, 5290MHz, 5530MHz, 5610MHz, 5690MHz, 5775MHz
Type of Modulation:	802.11a/n/ac: OFDM
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.6Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

802.11a/n-HT20/ac-VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11n-HT40/ac-VHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550 MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

2.4. Description of Available Antennas

For model APINP303

Antenna Type	Frequency Band (GHz)	TX Paths	Max Peak Gain (dBi)	Beam-Forming Directional Gain(dBi)	CDD Directional Gain(dBi)	
					For Power	For PSD
Wi-Fi Internal Antenna						
PCB	2.4	2	2.1	3.01	2.1	5.11
	5	2	5.9	3.01	5.9	8.91
Bluetooth Internal Antenna						
PCB	2.4	1	4.5	--		

For model APIN0303


Antenna Type	Frequency Band (GHz)	TX Paths	Max Peak Gain (dBi)	Beam-Forming Directional Gain (dBi)	CDD Directional Gain (dBi)	
					For Power	For PSD
Wi-Fi Internal Antenna						
PCB	2.4	2	2.1	3.01	2.1	5.11
	5	2	5.7	3.01	5.7	8.71
Bluetooth Internal Antenna						
PCB	2.4	1	4.5	--		

Note:

- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
For CDD transmissions, directional gain is calculated as follows, $N_{ANT} = 2$, $N_{SS} = 1$.
If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.
 - For power spectral density (PSD) measurements on all devices,
Array Gain = $10 \log (N_{ANT} / N_{SS}) \text{ dB} = 3.01$;
 - For power measurements on IEEE 802.11 devices,
Array Gain = 0 dB for $N_{ANT} \leq 4$;
- The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac, not include 802.11a/b/g.

2.5. Description of Antenna RF Port

Antenna RF Port				
--	2.4GHz RF Port		5GHz RF Port	
Software Control Port	Ant 0	Ant 1	Ant 0	Ant 1

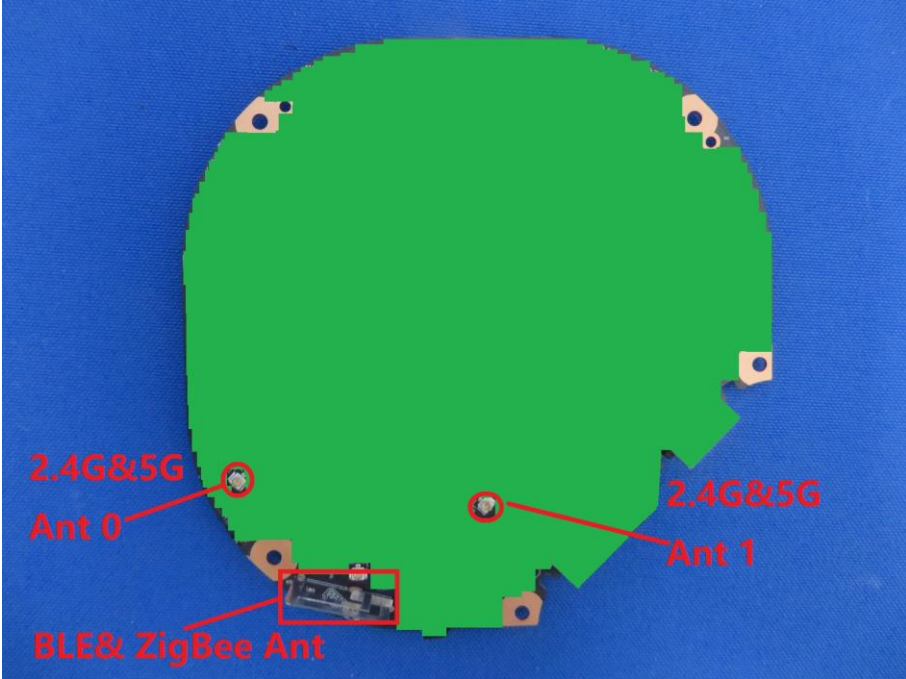

2.6. Test Mode

Test Mode	Mode 1: Transmit by 802.11a (6Mbps)
	Mode 2: Transmit by 802.11n-HT20 (MCS0)
	Mode 3: Transmit by 802.11n-HT40 (MCS0)
	Mode 4: Transmit by 802.11ac-VHT20 (MCS0)
	Mode 5: Transmit by 802.11ac-VHT40 (MCS0)
	Mode 6: Transmit by 802.11ac-VHT80 (MCS0)

5GHz Test Mode	Ant 0 + 1	
	CDD	Beam-Forming
802.11a	√	×
802.11n-HT20	√	√
802.11n-HT40	√	√
802.11ac-VHT20	√	√
802.11ac-VHT40	√	√
802.11ac-VHT80	√	√

2.7. Description of Test Software

The test utility software used during testing was “QCARCT”, and the version was “v3.0.210.0”.

Power Parameter Value:

Test Mode	Test Channel No.	Test Frequency (MHz)	Power Parameter Value for Ant 0 + 1	
			CDD Mode	Beam-Forming Mode
802.11a	36	5180	18.0	--
	44	5220	18.0	--
	48	5240	18.0	--
	52	5260	15.5	
	60	5300	15.5	
	64	5320	15.5	
	100	5500	16.0	
	120	5600	15.5	
	140	5700	16.0	
	144	5720	16.0	
	149	5745	18.0	--
	157	5785	18.0	--
	165	5825	18.0	--
802.11 n-HT20	36	5180	18.0	18.0
	44	5220	18.0	18.0
	48	5240	18.0	18.0
	52	5260	16.0	16.0
	60	5300	16.0	16.0
	64	5320	16.0	16.0
	100	5500	16.0	16.0
	120	5600	16.0	16.0
	140	5700	16.5	16.5
	144	5720	16.5	16.5
	149	5745	18.0	18.0
	157	5785	18.0	18.0
	165	5825	18.0	18.0

Test Mode	Test Channel No.	Test Frequency (MHz)	Power Parameter Value for Ant 0 + 1	
			CDD Mode	Beam-Forming Mode
802.11n-HT40	38	5190	17.0	17.5
	46	5230	18.0	17.5
	54	5270	18.0	17.0
	62	5310	16.5	17.5
	102	5510	17.0	17.5
	118	5590	18.0	17.5
	134	5670	18.0	17.5
	142	5710	18.0	17.5
	151	5755	18.0	17.5
	159	5795	17.5	17.5
802.11ac-VHT20	36	5180	18.0	18.0
	44	5220	18.0	18.0
	48	5240	18.0	18.0
	52	5260	16.0	16.0
	60	5300	16.0	16.0
	64	5320	15.5	15.5
	100	5500	16.0	16.0
	120	5600	16.0	16.0
	140	5700	16.5	16.5
	144	5720	16.5	16.5
	149	5745	18.0	18.0
	157	5785	18.0	18.0
	165	5825	17.5	17.5
802.11ac-VHT40	38	5190	17.0	17.5
	46	5230	18.0	17.5
	54	5270	18.0	17.0
	62	5310	16.5	17.0
	102	5510	17.0	17.5
	118	5590	18.0	17.5
	134	5670	18.0	17.5
	142	5710	18.0	17.5
	151	5755	18.0	17.5
	159	5795	17.5	17.5

Test Mode	Test Channel No.	Test Frequency (MHz)	Power Parameter Value for Ant 0 + 1	
			CDD Mode	Beam-Forming Mode
802.11ac-VHT80	42	5210	16.0	18.0
	58	5290	15.0	17.5
	106	5530	16.5	17.5
	122	5610	18.0	18.0
	138	5690	18.0	17.5
	155	5775	18.0	18.0

Note: For BF mode, the radiated emission and band edge using the radiated setup method shown on page 125, the conducted test item using the “QCARCT” software, both of them using the same power setting value. Based on these conditions as above, we found that the test result using the “QCARCT” software was worse than using radiated setup method within 0.3dB after verification.


2.8. Device Capabilities

This device contains the following capabilities:


802.11a/b/g/n/ac Wi-Fi and BT v4.2 single & ZigBee

Note: 5GHz (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = average per the guidance of Section B)2)b) of KDB 789033 D02v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


Test Mode	Duty Cycle
802.11a	95.80%
802.11n-HT20	98.21%
802.11n-HT40	95.21%
802.11ac-VHT20	98.04%
802.11ac-VHT40	95.24%
802.11ac-VHT80	92.21%

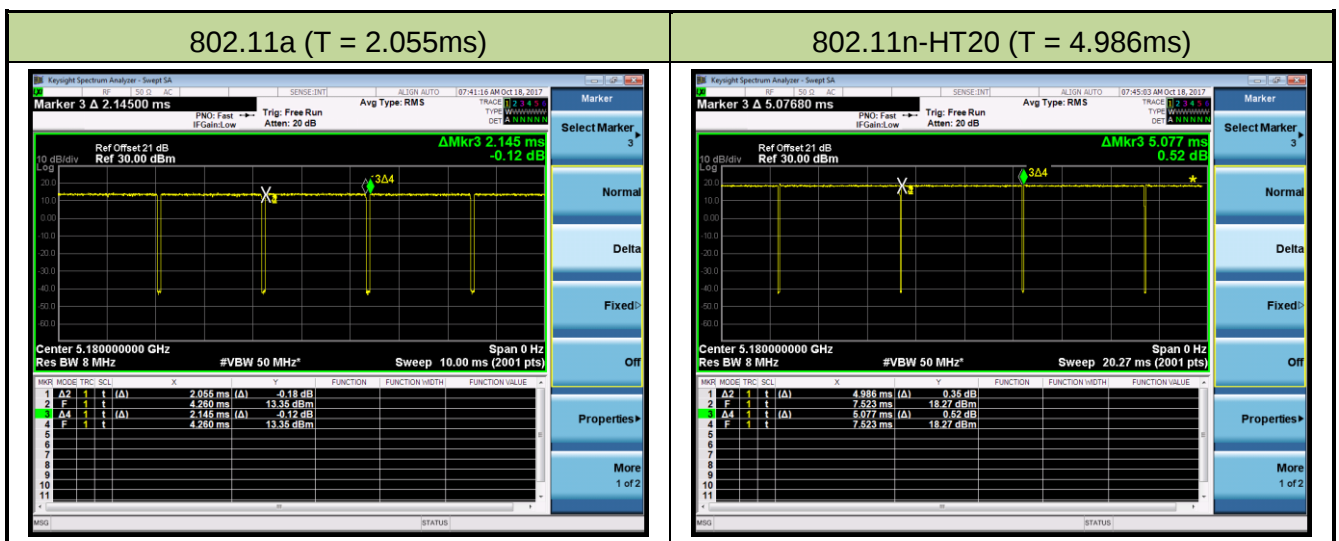


802.11n-HT40 (T = 2.385ms)

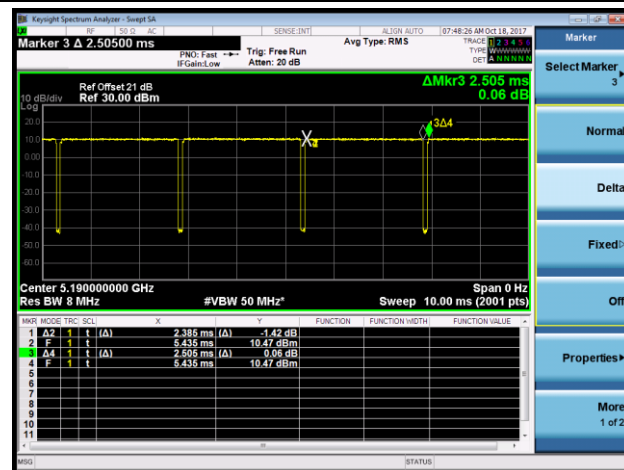


802.11ac-VHT20 (T = 4.990ms)

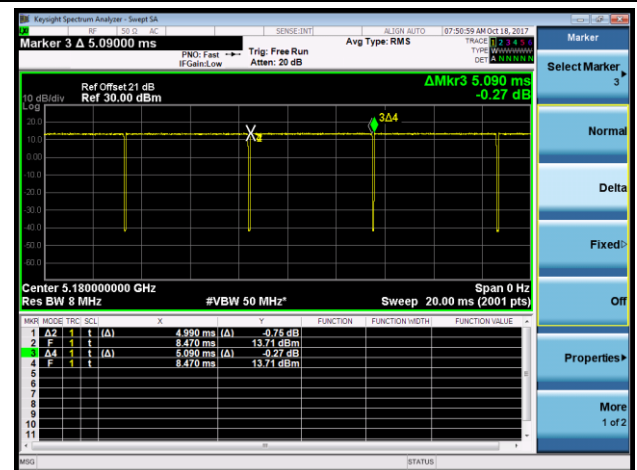

802.11ac-VHT40 (T = 2.400ms)

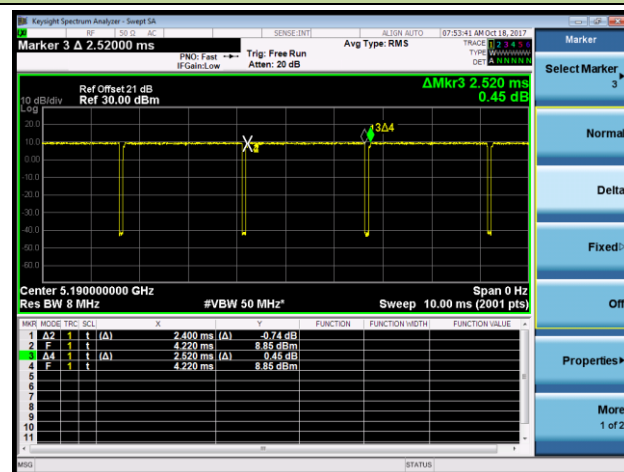

802.11ac-VHT80 (T = 1.112ms)

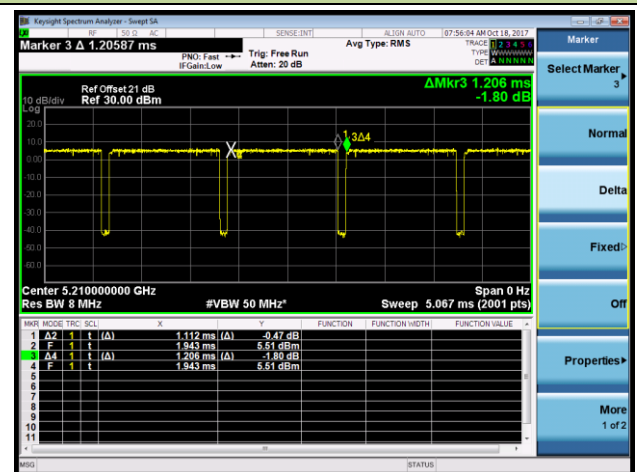

2.9. Test Configuration

The **ACCESS POINT** was tested per the guidance of KDB 789033 D02v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.10. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.11. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlets supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in the measurement of the **ACCESS POINT**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remotecontrolled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **ACCESS POINT** is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **ACCESS POINT** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

M/N: APINP303

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2019/03/20
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2019/03/20
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2019/05/14
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2019/06/07

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2019/04/24
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2019/05/22
Broadband Horn Antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2019/04/24
Breitband Horn Antenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2019/04/23
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2019/04/23
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2019/04/23
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2019/03/19
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2019/07/30
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2019/05/18
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2019/05/21

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2019/07/30
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2019/04/24
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2019/05/21

Software	Version	Function
e3	9.160520a	EMI Test Software

M/N: APIN0303

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2018/03/17
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2018/03/23
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2018/03/23
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2018/06/08

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2018/03/02
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2018/03/16
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2018/04/06
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2018/04/06
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2018/04/06
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2018/04/06
Broadband Horn antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2018/04/06
Breitband Horn antenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2018/04/06
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2018/06/08

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2018/07/10
PSA Series Spectrum Analyzer	Agilent	E4447A	MRTTWA00060	1 year	2017/12/11
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2018/03/18
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2018/03/18
Programmable Temperature & Humidity Chamber	TEN BILLION	TTH-B3UP	MRTTWA00036	1 year	2018/05/10
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2018/06/08

Software	Version	Function
e3	V 8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB
Output Power - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Power Spectrum Density - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.15dB
Occupied Bandwidth - SR1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%

7. TEST RESULT

7.1. Summary

Product Name: ACCESS POINT

FCC ID: Q9DAPINP303

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 7.3
15.407(a)(1)(ii), (2), (3)	Maximum Conducted Output Power	< 1Watt for UNII-1 & UNII-3 < 250mW for UNII-2		Pass	Section 7.4
15.407(h)(1)	Transmit Power Control	< 24 dBm		N/A	Section 7.5
15.407(a)(1)(ii), (2), (3), (5)	Peak Power Spectral Density	< 17dBm/MHz for UNII-1 < 11dBm/MHz for UNII-2 < 30dBm/500kHz for UNII-3		Pass	Section 7.6
15.407(g)	Frequency Stability	± 20 ppm		Pass	Section 7.7
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	Refer to Section 7.8	Radiated	Pass	Section 7.8 & 7.9
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits(Restricted Bands andRadiated Emission Limits)	Emissions in restrictedbands must meet theradiated limits detailed in15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) Test Items "26dB Bandwidth", "99% Bandwidth" & "6dB Bandwidth" have been assessed MIMO transmission, and showed the worst test data in this report.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

KDB 789033 D02v02r01 - Section C.1

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. $VBW \geq 3 \times RBW$.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

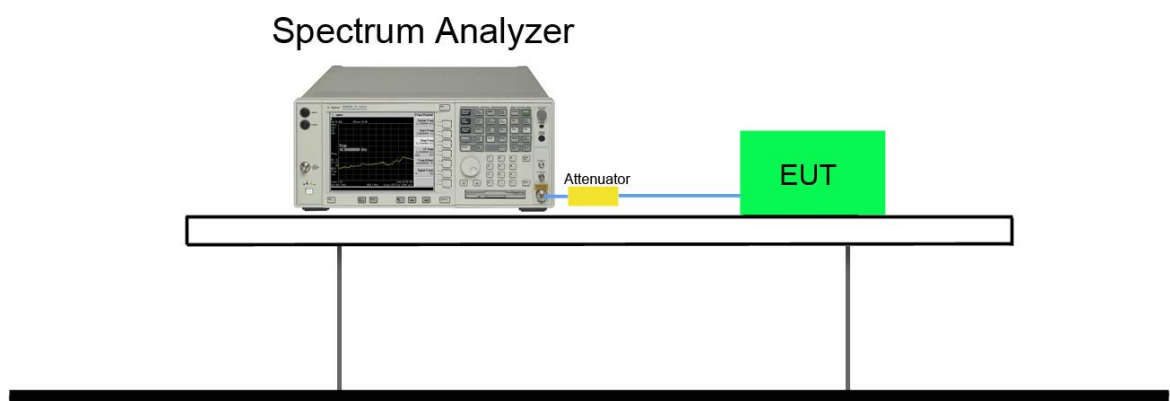

7.2.5. Test Result

Product	ACCESS POINT	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	53%
Test Site	SR2	Test Date	2017/10/18


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1 / Ant 0 + 1					
802.11a	6Mbps	36	5180	19.00	16.42
802.11a	6Mbps	44	5220	18.88	16.40
802.11a	6Mbps	48	5240	18.97	16.40
802.11a	6Mbps	52	5260	18.89	16.40
802.11a	6Mbps	60	5300	18.87	16.41
802.11a	6Mbps	64	5320	18.88	16.41
802.11a	6Mbps	100	5500	18.72	16.43
802.11a	6Mbps	120	5600	18.78	16.42
802.11a	6Mbps	140	5700	18.86	16.40
802.11a	6Mbps	144	5720	18.77	16.41
802.11a	6Mbps	149	5745	18.83	16.40
802.11a	6Mbps	157	5785	18.88	16.41
802.11a	6Mbps	165	5825	18.90	16.42
802.11n-HT20	MCS0	36	5180	19.84	17.60
802.11n-HT20	MCS0	44	5220	19.83	17.59
802.11n-HT20	MCS0	48	5240	19.67	17.59
802.11n-HT20	MCS0	52	5260	20.03	17.60
802.11n-HT20	MCS0	60	5300	19.86	17.59
802.11n-HT20	MCS0	64	5320	20.18	17.59
802.11n-HT20	MCS0	100	5500	20.08	17.59
802.11n-HT20	MCS0	120	5600	20.09	17.60
802.11n-HT20	MCS0	140	5700	20.01	17.61
802.11n-HT20	MCS0	144	5720	20.14	17.60
802.11n-HT20	MCS0	149	5745	20.17	17.60
802.11n-HT20	MCS0	157	5785	20.10	17.59
802.11n-HT20	MCS0	165	5825	20.27	17.61

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1 / Ant 0 + 1					
802.11n-HT40	MCS0	38	5190	39.45	35.95
802.11n-HT40	MCS0	46	5230	39.53	35.92
802.11n-HT40	MCS0	54	5270	39.54	35.95
802.11n-HT40	MCS0	62	5310	39.22	35.93
802.11n-HT40	MCS0	102	5510	39.16	35.89
802.11n-HT40	MCS0	118	5590	39.53	35.88
802.11n-HT40	MCS0	134	5670	39.21	35.90
802.11n-HT40	MCS0	142	5710	39.50	35.90
802.11n-HT40	MCS0	151	5755	39.21	35.90
802.11n-HT40	MCS0	159	5795	39.53	35.88
802.11ac-VHT20	MCS0	36	5180	19.95	17.61
802.11ac-VHT20	MCS0	44	5220	19.89	17.62
802.11ac-VHT20	MCS0	48	5240	19.85	17.60
802.11ac-VHT20	MCS0	52	5260	19.85	17.61
802.11ac-VHT20	MCS0	60	5300	19.77	17.61
802.11ac-VHT20	MCS0	64	5320	19.75	17.60
802.11ac-VHT20	MCS0	100	5500	19.64	17.61
802.11ac-VHT20	MCS0	120	5600	19.96	17.61
802.11ac-VHT20	MCS0	140	5700	19.86	17.59
802.11ac-VHT20	MCS0	144	5720	20.00	17.60
802.11ac-VHT20	MCS0	149	5745	19.65	17.61
802.11ac-VHT20	MCS0	157	5785	19.99	17.62
802.11ac-VHT20	MCS0	165	5825	20.00	17.61
802.11ac-VHT40	MCS0	38	5190	39.68	35.93
802.11ac-VHT40	MCS0	46	5230	39.14	35.92
802.11ac-VHT40	MCS0	54	5270	39.31	35.95
802.11ac-VHT40	MCS0	62	5310	39.28	35.94
802.11ac-VHT40	MCS0	102	5510	38.92	35.91
802.11ac-VHT40	MCS0	118	5590	39.62	35.89
802.11ac-VHT40	MCS0	134	5670	39.13	35.95
802.11ac-VHT40	MCS0	142	5710	39.54	35.94
802.11ac-VHT40	MCS0	151	5755	39.52	35.93
802.11ac-VHT40	MCS0	159	5795	39.17	35.92


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1 / Ant 0 + 1					
802.11ac-VHT80	MCS0	42	5210	83.03	75.66
802.11ac-VHT80	MCS0	58	5290	82.85	75.70
802.11ac-VHT80	MCS0	106	5530	82.45	75.61
802.11ac-VHT80	MCS0	122	5610	83.06	75.63
802.11ac-VHT80	MCS0	138	5690	82.87	75.66
802.11ac-VHT80	MCS0	155	5775	82.51	75.62

802.11a 26dB Bandwidth & 99% Bandwidth - Ant 1 / Ant 0 + 1


Channel 36 (5180MHz)

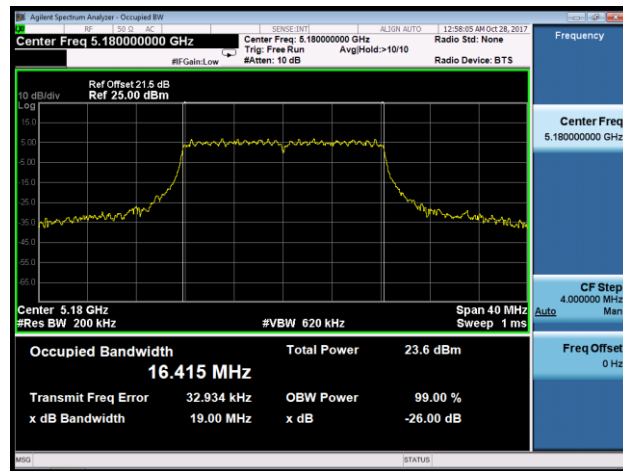


Channel 44 (5220MHz)

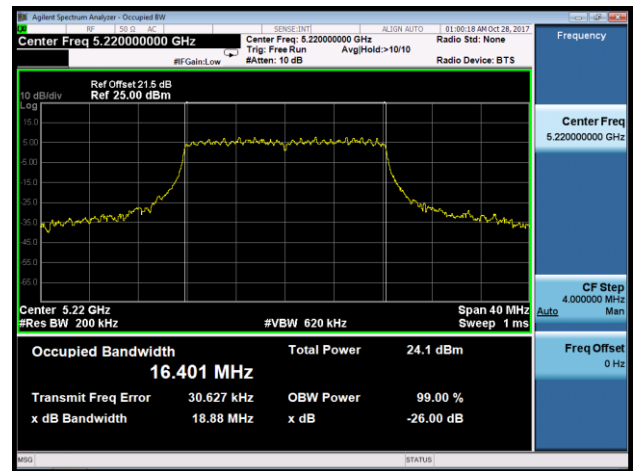


Channel 48 (5240MHz)

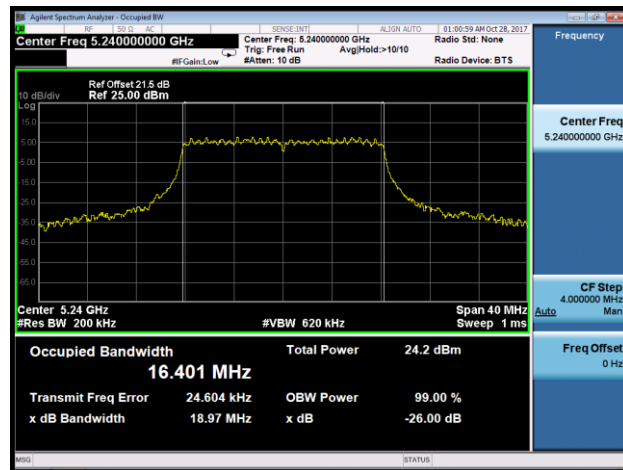


Channel 52 (5260MHz)

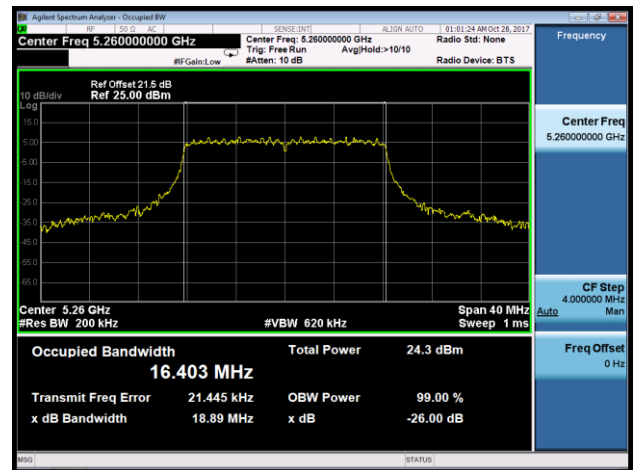


Channel 60 (5300MHz)

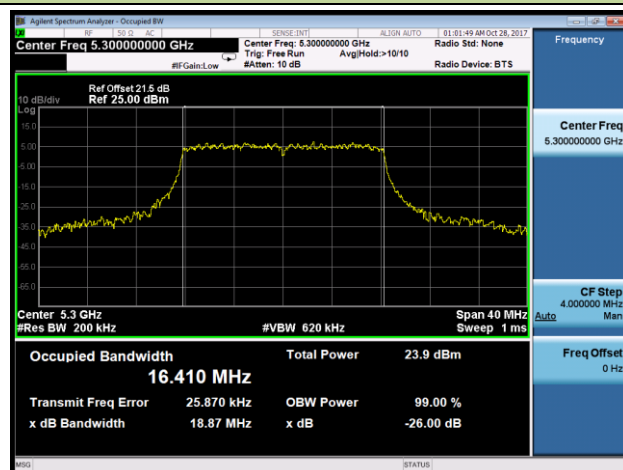


Channel 64 (5320MHz)

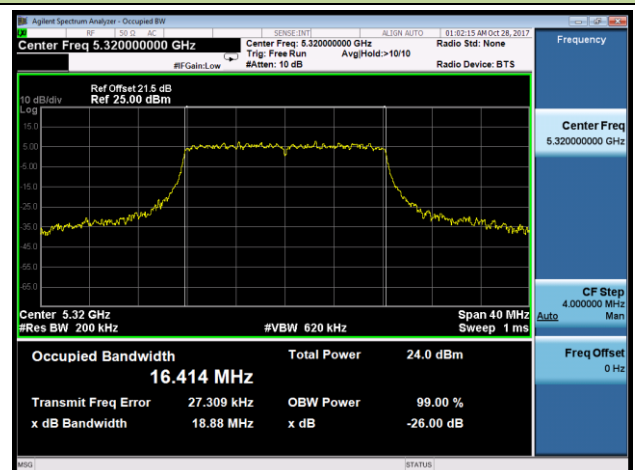


Channel 100 (5500MHz)

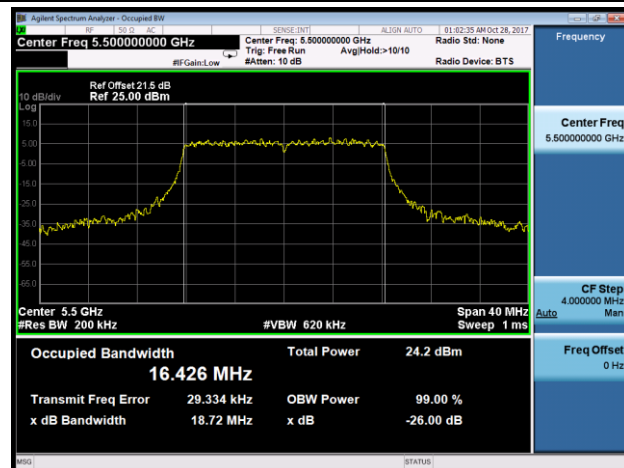


Channel 100 (5600MHz)

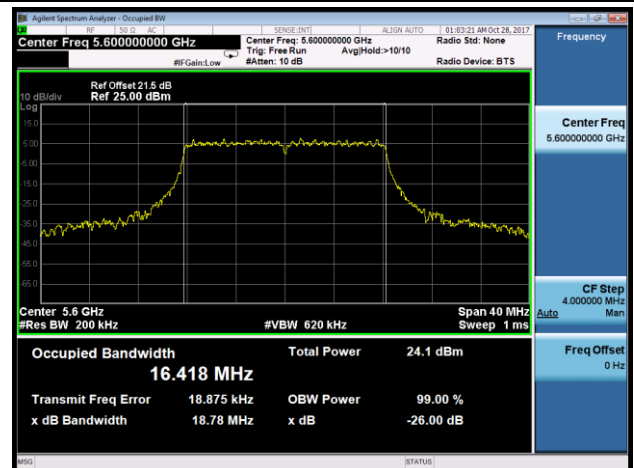


Channel 140 (5700MHz)

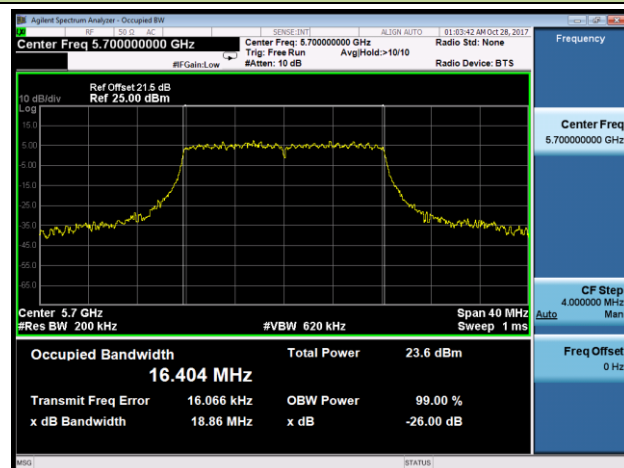


Channel 144 (5720MHz)

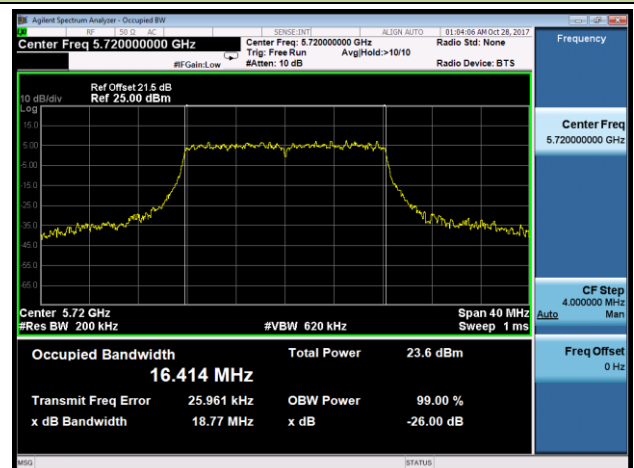


Channel 149 (5745MHz)

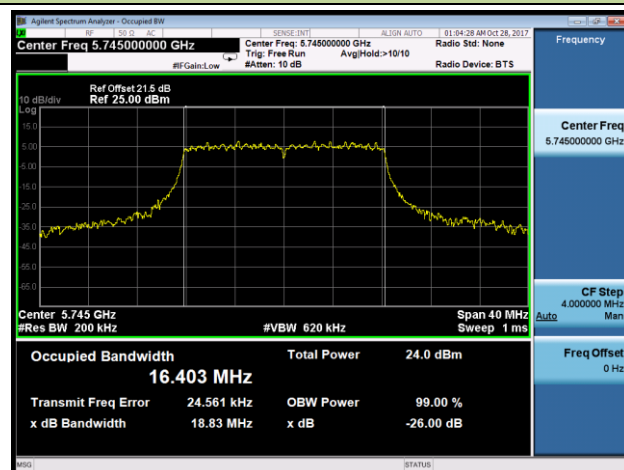

Channel 157 (5785MHz)

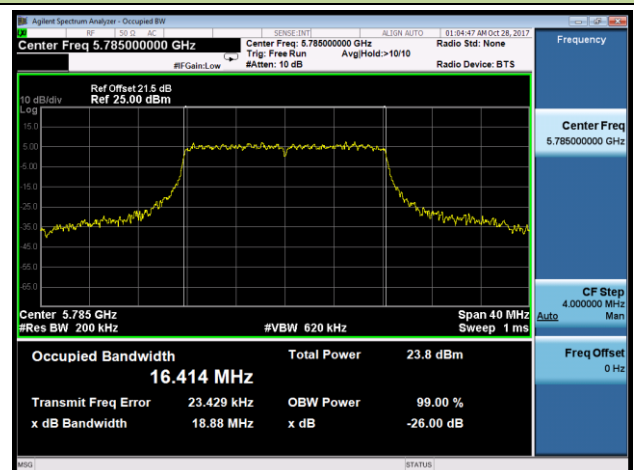


Channel 165 (5825MHz)

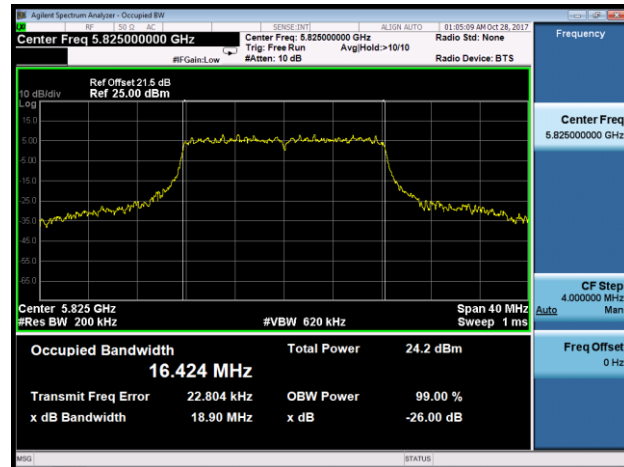


802.11n-HT20 26dB Bandwidth & 99% Bandwidth - Ant 1 / Ant 0 + 1


Channel 36 (5180MHz)

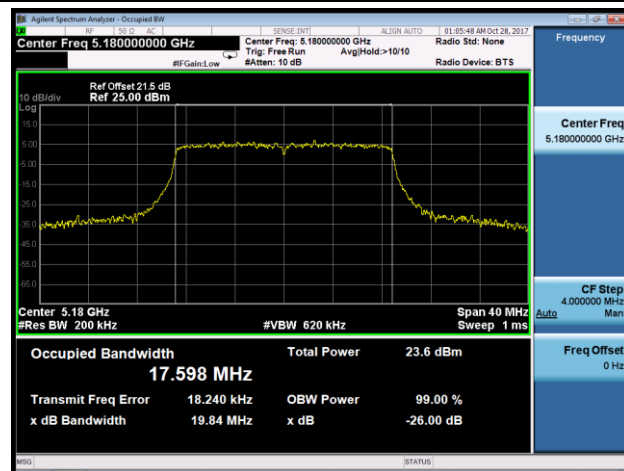


Channel 44 (5220MHz)

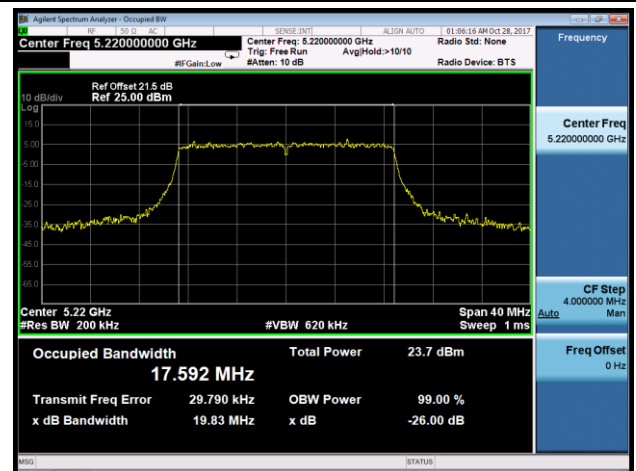


Channel 48 (5240MHz)

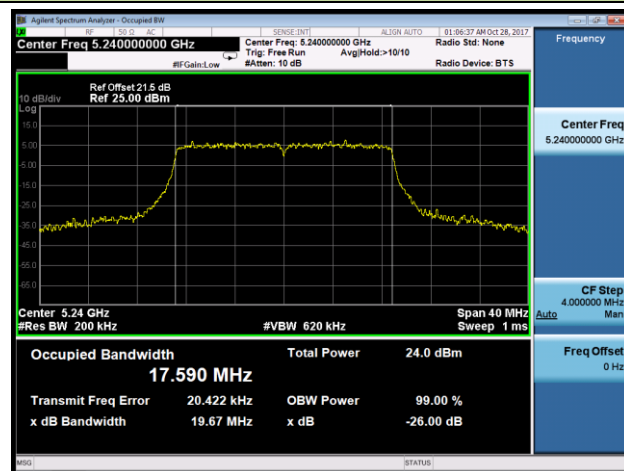


Channel 52 (5260MHz)

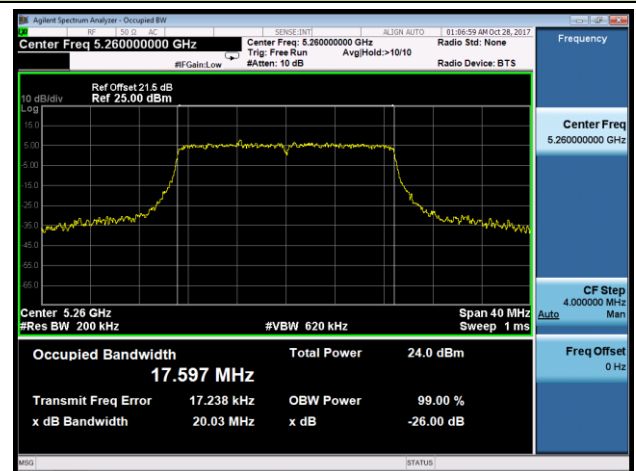


Channel 60 (5300MHz)

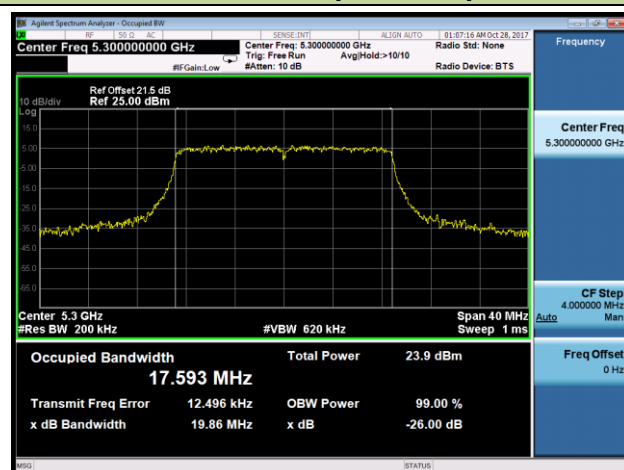


Channel 64 (5320MHz)

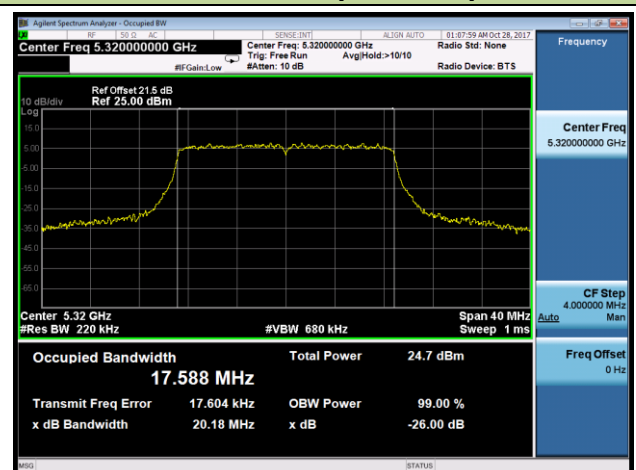


Channel 100 (5500MHz)

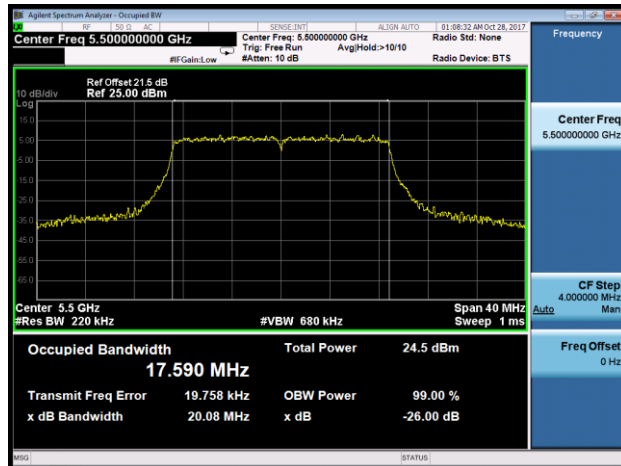


Channel 120 (5600MHz)

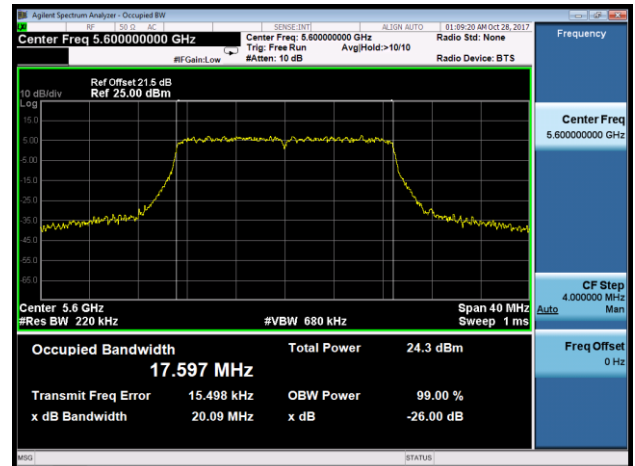


Channel 140 (5700MHz)

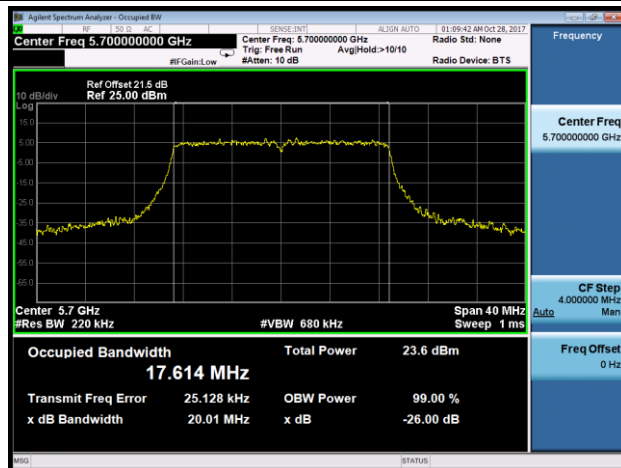


Channel 144 (5720MHz)

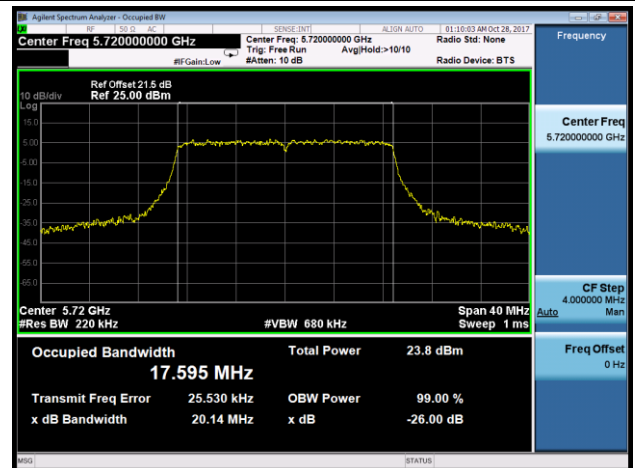


Channel 149 (5745MHz)

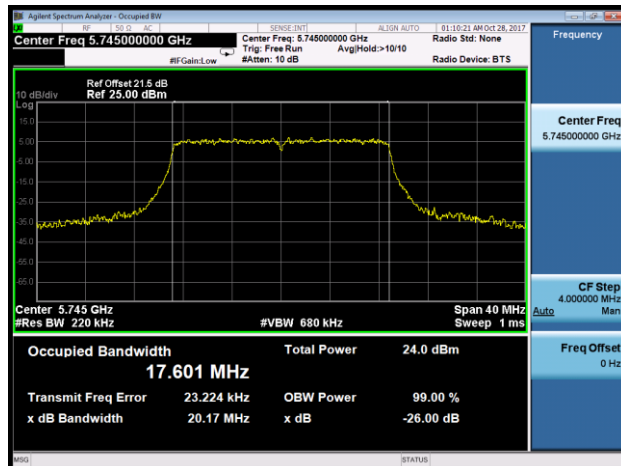

Channel 157 (5785MHz)

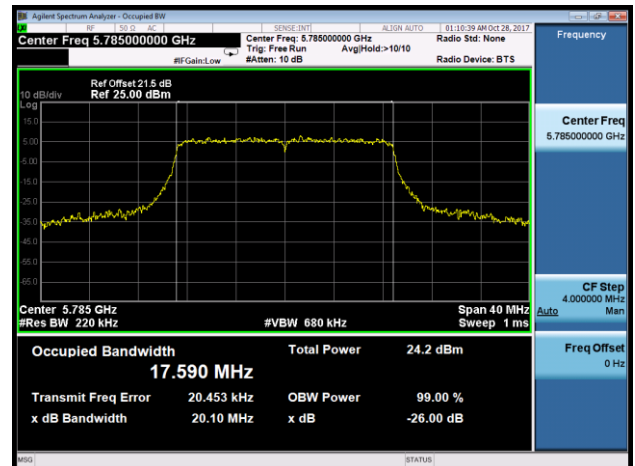


Channel 165 (5825MHz)

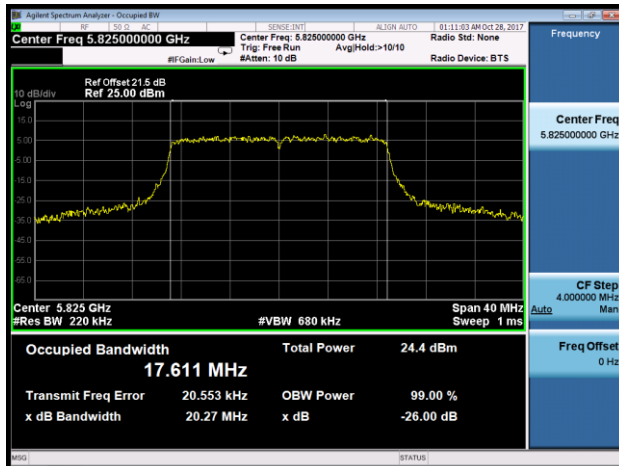


802.11n-HT40 26dB Bandwidth & 99% Bandwidth - Ant 1 / Ant 0 + 1


Channel 38 (5190MHz)

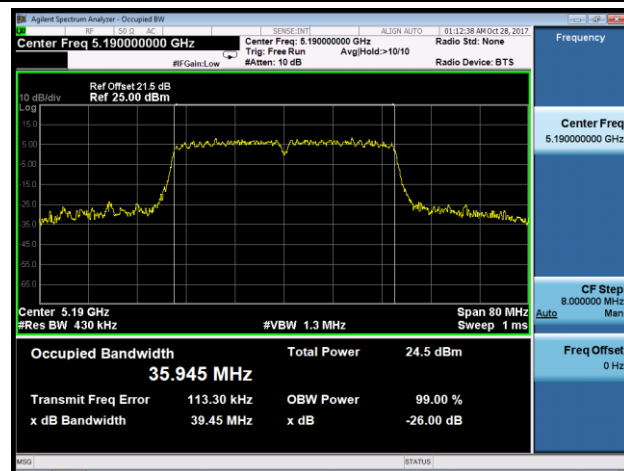


Channel 46 (5230MHz)

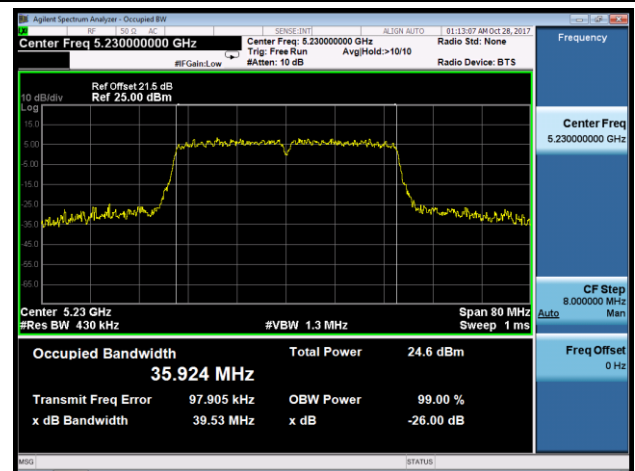


Channel 54 (5270MHz)

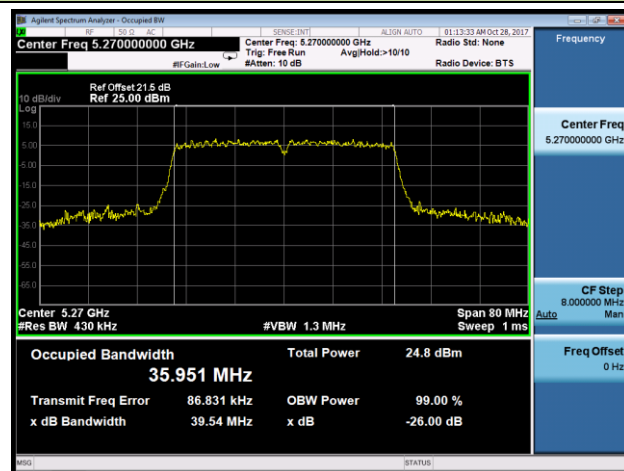


Channel 62 (5310MHz)





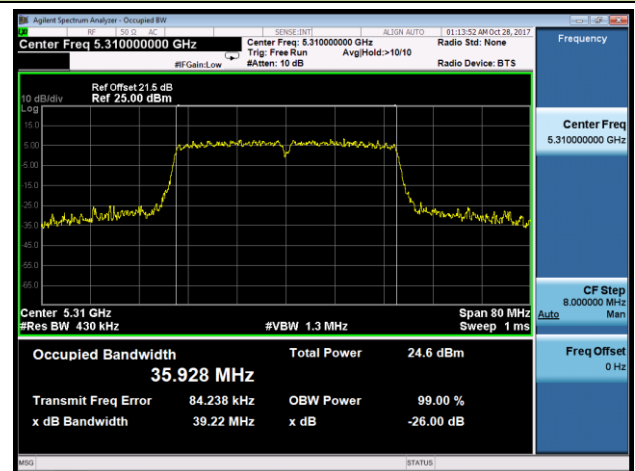


Channel 102 (5510MHz)

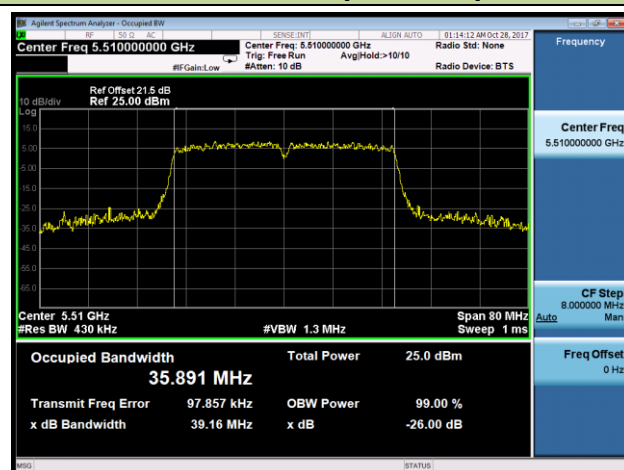


Channel 118 (5590MHz)

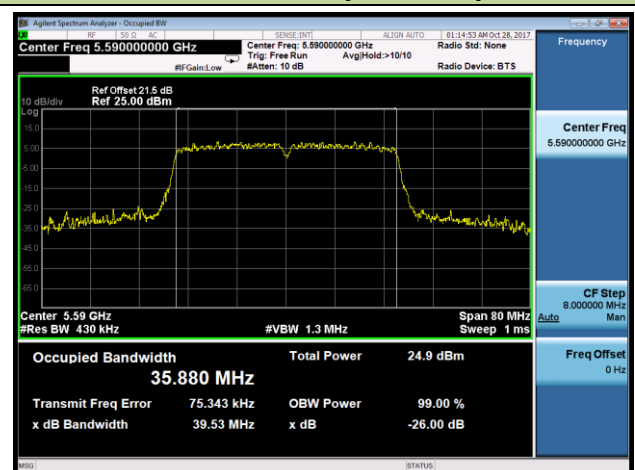

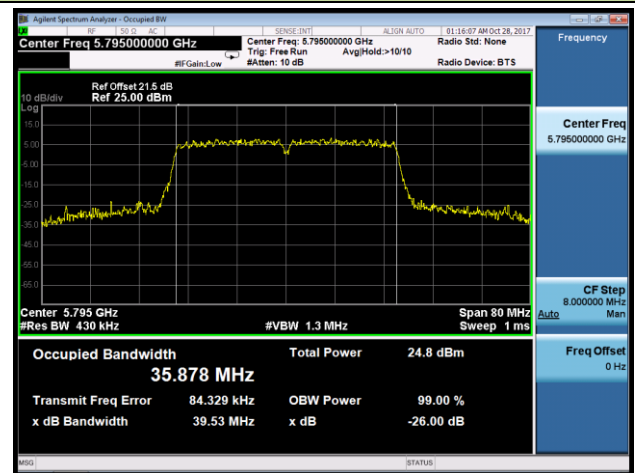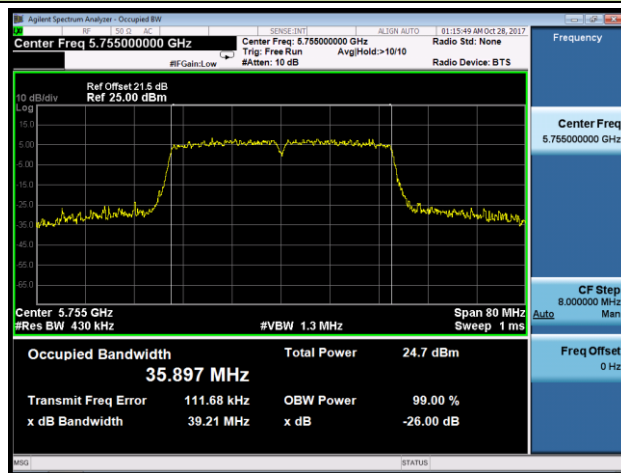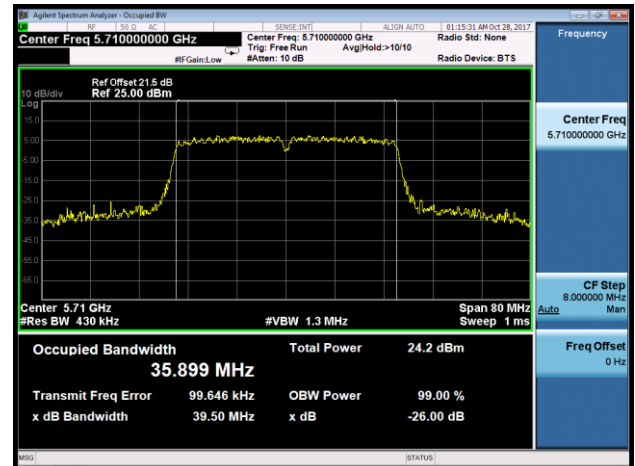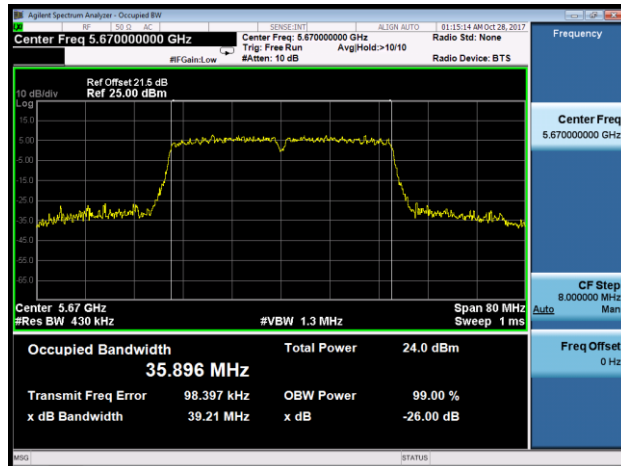


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth - Ant 1 / Ant 0 + 1


Channel 36 (5180MHz)

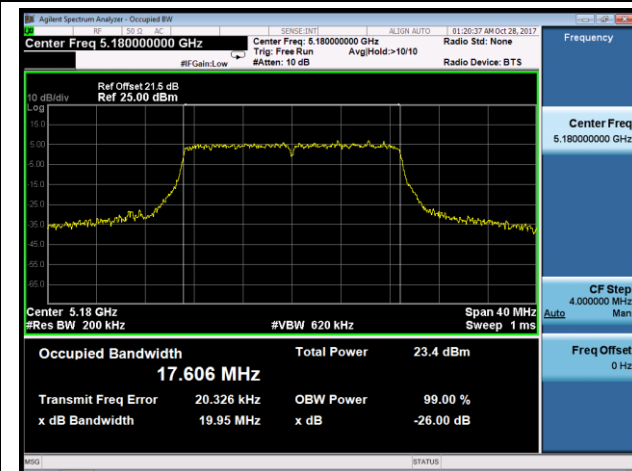


Channel 44 (5220MHz)

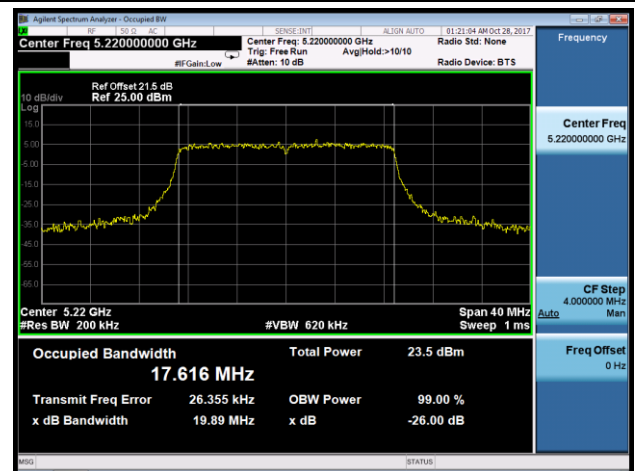


Channel 48 (5240MHz)

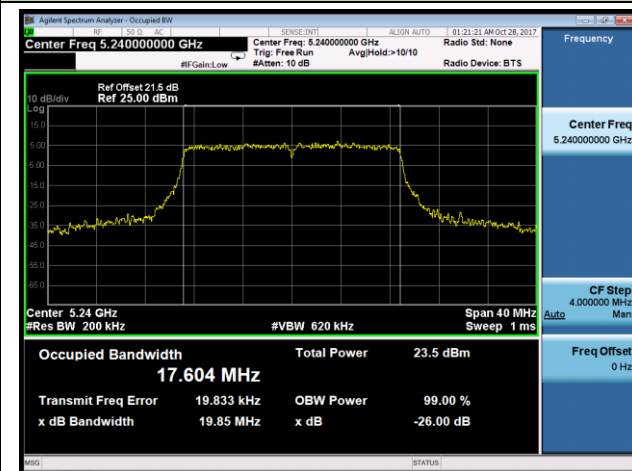

Channel 52 (5260MHz)

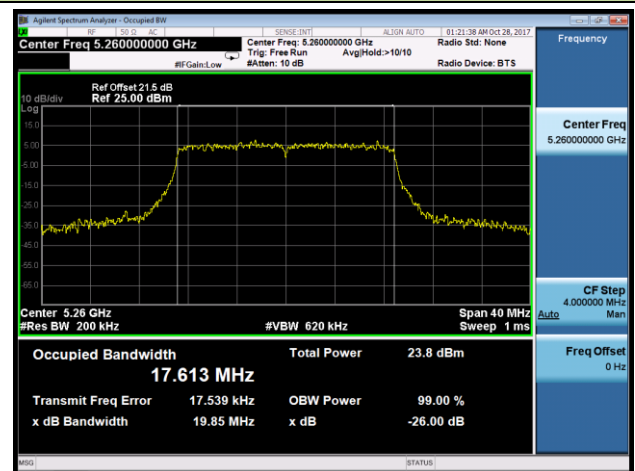

Channel 60 (5300MHz)

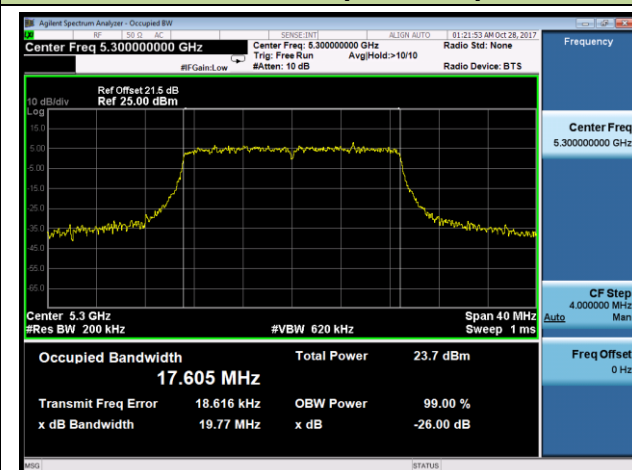

Channel 64 (5320MHz)

