

Report No.: ER/2008/50020 **Issue Date: Oct. 20, 2008**

Page: 1 of 64

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Product Name: GPS

Brand Name: GC430XXX

Model Name: GC430XXXXX,430 XXXXX classic XXXXX

NAV740XXXXX (X=0~9,A~z or blank)

Different model name depend on different **Model Differences**

traders

FCC ID: **QWWGC-BT-430**

Report No: ER/2008/50020

Issue Date: Oct. 20, 2008

FCC Rule Part: §15.247

Prepared for: Fortuna electronic corp.

5F-2, No.23, Sec.1, ChangAn East Rd., Taipei,

Taiwan 104

Prepared by: SGS Taiwan Ltd.

> **Electronics & Communication Laboratory** No. 134, Wu Kung Rd., Wuku Industrial

Zone, Taipei County, Taiwan.



Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the

Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is totis Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. | No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台牌和股工業區工工路134號



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 2 of 64

VERIFICATION OF COMPLIANCE

Applicant: Fortuna electronic corp.

5F-2, No.23, Sec.1, ChangAn East Rd., Taipei, Taiwan 104

Equipment Under Test: GPS

Brand Name: GC430XXX

FCC ID Number: QWWGC-BT-430

GC430XXXXX,430 XXXXX classic XXXXX Model No.:

NAV740XXXXX (X=0~9,A~z or blank)

Model Difference: Different model name depend on different traders.

File Number: ER/2008/50020

Date of test: May. 09, 2008 ~ Oct. 16, 2008

Date of EUT Received: May. 09, 2008

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Brian Chang	Date:	Oct. 20, 2008
	Brian Chang / Engineer		
Prepared By:	Alex Hsieh	Date:	Oct. 20, 2008
·	Alex Hsieh / Sr. Engineer		
Approved By:	Timent Su	Date:	Oct. 20, 2008

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Vincent Su / Manager



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 3 of 64

Version

Version No.	Date	Description
00	Oct. 20, 2008	Initial creation of document



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 4 of 64

Table of Contents

ı.	GEN	ERAL INFORMATION	¢
	1.1.	Product Description	6
	1.2.	Related Submittal(s) / Grant (s)	7
	1.3.	Test Methodology	7
	1.4.	Test Facility	7
	1.5.	Special Accessories	7
	1.6.	Equipment Modifications	7
2.	SYS	TEM TEST CONFIGURATION	8
	2.1.	EUT Configuration	8
	2.2.	EUT Exercise	8
	2.3.	Test Procedure	8
	2.4.	Configuration of Tested System	9
3.	SUM	MARY OF TEST RESULTS	10
4.	DES	CRIPTION OF TEST MODES	10
5.	CON	DUCTED EMISSION TEST	11
	5.1.	Standard Applicable	11
	5.2.	EUT Setup	11
	5.3.	Measurement Procedure	11
	5.4.	Measurement Equipment Used:	12
	5.5.	Measurement Result	12
6.	PEA	K OUTPUT POWER MEASUREMENT	13
	6.1.	Standard Applicable	13
	6.2.	Measurement Procedure	13
	6.3.	Measurement Result	13
	6.4.	Measurement Equipment Used:	14
7.	20dB	BAND WIDTH	16
	7.1.	Standard Applicable	16
	7.2.	Measurement Procedure	16
	7.3.	Measurement Result	16
	7.4.	Measurement Equipment Used:	17
8.	100K	Hz BANDWIDTH OF BAND EDGES MEASUREMENT	19
	8 1	Standard Applicable	10

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明:此報告結果僅對调試之樣品負責。本報告未經本公司書面評可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's sole responsibility is totis Client and this document toos not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.*



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 5 of 64

	8.2.	Measurement Procedure	19
	8.3.	Measurement Result	19
	8.4.	Measurement Equipment Used:	20
9.	SPUR	RIOUS RADIATED EMISSION TEST	24
	9.1.	Standard Applicable	24
	9.2.	EUT Setup	24
	9.3.	Measurement Procedure	24
	9.4.	Test SET-UP (Block Diagram of Configuration)	25
	9.5.	Measurement Equipment Used:	26
	9.6.	Field Strength Calculation	26
	9.7.	Measurement Result	26
10.	FRE(QUENCY SEPARATION	39
	10.1.	Standard Applicable	39
	10.2.	Measurement Procedure	39
	10.3.	Measurement Result	39
	10.4.	Measurement Equipment Used:	39
11.	NUM	BER OF HOPPING FREQUENCY	41
	11.1.	Standard Applicable	
	11.2.	Measurement Procedure	41
	11.3.	Measurement Result	41
	11.4.	Measurement Equipment Used:	41
12.	TIME	E OF OCCUPANCY (DWELL TIME)	43
	12.1.	Standard Applicable	
	12.2.	Measurement Procedure	43
	12.3.	Measurement Result	43
	12.4.	Measurement Equipment Used:	44
13.	Peak	Power Spectral Density	50
	13.1.	Standard Applicable	50
	13.2.	Measurement Procedure	50
	13.3.	Measurement Result	50
	13.4.	Measurement Equipment Used:	50
14.	ANTI	ENNA REQUIREMENT	53
	14.1.	Standard Applicable	53
	14.2.	Antenna Connected Construction	53
PH	OTOG	GRAPHS OF SET UP	54
PН	OTOG	CRAPHS OF EUT	56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

\[\text{\text{NNO. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / \text{\text{\text{\text{\text{\text{report is advised}}}}} \]

\[\text{\tex



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 6 of 64

GENERAL INFORMATION

Product Description 1.1

1. Product Description		
Product Name:	GPS	
Brand Name:	GC430XXX	
Model Name:	GC430XXXXX,430 XXXXX classic XXXXX	
11100011(01110)	NAV740XXXXX (X=0~9,A~z or blank)	
Model Difference:	Different model name depend on different traders.	
Hardware Version:	1.0 &up	
Software Version:	wce 5.0	
Simple Hands-Free (SHF):	One provide , Model number: GC430XXX	
Power Supply	3.7Vdc re-chargeable battery or 12Vdc form car charger, model:IC-MUB-GPS1	
Bluetooth:		
Bluetooth Version	 V1.1 (GFSK) V1.2 (GFSK) V2.0 (GFSK) V2.0 + EDR (GFSK + π/4DQPSK + 8DPSK) V2.1 + EDR (GFSK + π/4DQPSK + 8DPSK) 	
Frequency Range	2402 – 2480MHz	
Channel number	79 channels max.	
Rated Power	3.24 dBm (Peak)	
Modulation type	Frequency Hopping Spread Spectrum	

The EUT is compliance with Bluetooth Standard.

This test report applies for Bluetooth.

Antenna Designation

Member of SGS Group

Chip Antenna / 2dBi.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 7 of 64

1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: QWWGC-BT-430** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number is 236194, Canada Registration Number: 4620A-1

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 & 10 meters) and FCC Registration Number: 94644.

1.5. Special Accessories

Not available for this EUT intended for grant.

1.6. Equipment Modifications

Not available for this EUT intended for grant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 8 of 64

2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 and Subclause 8.3.1.2 of ANSI C63.4-2003.

.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 9 of 64

2.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.
1	Notebook	Compaq	Presarlo 2100	CNF345Q1R
2	Test software	BlueSuite 1.22	CSR	Verson1.22
3	CASIRA	CSR	BCES301199/1	7383070403
4	DC Power Supply	Topward	3303A	715856

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 10 of 64

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	Conducted Emission	Compliant
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(a)	20dB Bandwidth	No Limit
§15.247I	100 KHz Bandwidth Of Fre-	Compliant
	quency Band Edges	
§15.209(a) (f)	Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	Time of Occupancy	Compliant
§15.247	Peak Power Density	Compliant
§15.203,	Antenna Requirement	Compliant
§15.247(b)(4)(i)		_

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2402MHz) · mid (2441MHz) and high (2480MHz) with highest data rate are chosen for full testing.



Report No.: ER/2008/50020 **Issue Date: Oct. 20, 2008**

Page: 11 of 64

5. CONDUCTED EMISSION TEST

5.1. Standard Applicable

According to §15.207. frequency within 150KHz to 30MHz shall not exceed the limit table as below.

	Limits		
Frequency range	dB(uV)		
MHz	Quasi-peak	Average	
0.15 to 0.50	66 to 56	56 to 46	
0.50 to 5	56	46	
5 to 30	60	50	

Note

5.2. EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The EUT was plug-in the AC/DC Power adapter. The host system was placed on the center of the back edge on the test table. The peripherals was placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The spacing between the peripherals was 10 centimeters.
- 4. External I/O cables were draped along the edge of the test table and bundle when necessary.
- 5. The host system was connected with 110Vac/60Hz power source.

5.3. Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

^{1.} The lower limit shall apply at the transition frequencies

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 12 of 64

5.4. Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
EMI Test Receiver	R&S	ESCS30	828985/004	09/15/2007	09/14/2008	
LISN	Rolf-Heine	NNB-2/16Z	99012	02/18/2008	02/17/2009	
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	02/18/2008	02/17/2009	
Coaxial Cables	N/A	WK CE Cable	N/A	10/30/2007	10/29/2008	

5.5. **Measurement Result:**

N/A



Report No.: ER/2008/50020 **Issue Date: Oct. 20, 2008**

Page: 13 of 64

PEAK OUTPUT POWER MEASUREMENT

6.1. Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: 0.125 Watts.

6.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW, VBW = 1MHz)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.

6.3. Measurement Result

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	3.05	0.10	3.15	0.00207	1
2441.00	3.14	0.10	3.24	0.00211	1
2480.00	2.78	0.10	2.88	0.00194	1

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 14 of 64

6.4. Measurement Equipment Used:

	Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010		
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2008	07/03/2009		
Spectrum Analyzer	R&S	FSP 40	100034	02/22/2008	02/21/2009		
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2008	01/04/2009		
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2008	07/04/2009		

Peak Power Output Data Plot (CH Low)

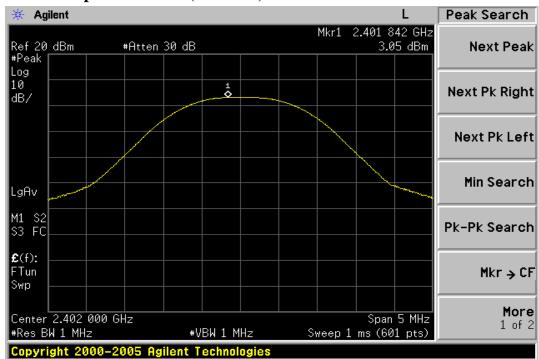


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Ompany、除非另有說明,此報告結果僅對測試之樣品負責,本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 15 of 64

Peak Power Output Data Plot (CH Mid)

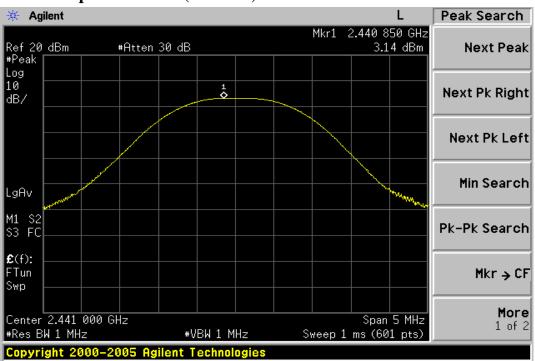

Peak Power Output Data Plot (CH High)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the

Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。 This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2008/50020 **Issue Date: Oct. 20, 2008**

Page: 16 of 64

7. 20dB BAND WIDTH

7.1. Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

7.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW=10KHz (1 % of Bandwidth.), Span=3MHz, Sweep=auto
- 4. Mark the peak frequency and –20dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.

7.3. Measurement Result

СН	Bandwidth
	(MHz)
Lower	0.863
Mid	0.864
Higher	0.865



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 17 of 64

7.4. Measurement Equipment Used:

	Conducted Emission Test Site											
EQUIPMENT MFR		MODEL SERIAL		LAST	CAL DUE.							
TYPE		NUMBER	NUMBER	CAL.								
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010							
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2008	07/03/2009							
Spectrum Analyzer	R&S	FSP 40	100034	02/22/2008	02/21/2009							
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2008	01/04/2009							
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2008	07/04/2009							

20dB Band Width Test Data CH-Low



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。 This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 18 of 64

20dB Bandwidth Test Data CH-Mid



20dB Bandwidth Test Data CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 19 of 64

8. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1. Standard Applicable

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

8.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.
- 7. Radiated Emission refer to section 9.

8.3. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.4. Measurement Result

Refer to attach spectrum analyzer data chart.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008


Page: 20 of 64

8.5. Measurement Equipment Used:

	Conducted Emission Test Site											
EQUIPMENT MFR		MODEL SERIAL		LAST	CAL DUE.							
TYPE		NUMBER	NUMBER	CAL.								
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010							
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2008	07/03/2009							
Spectrum Analyzer	R&S	FSP 40	100034	02/22/2008	02/21/2009							
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2008	01/04/2009							
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2008	07/04/2009							

Note: Measurement Equipment for radiated emission refers to section 9.

Conducted Emission: Test Data CH-Low

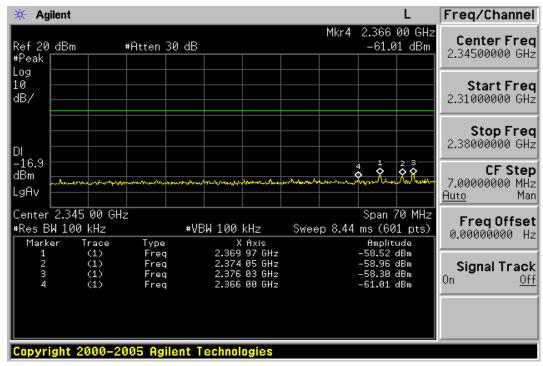


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention




Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 21 of 64

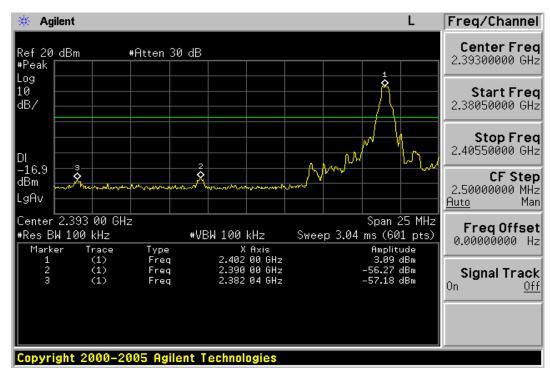

Conducted Emission: Test Data CH-High

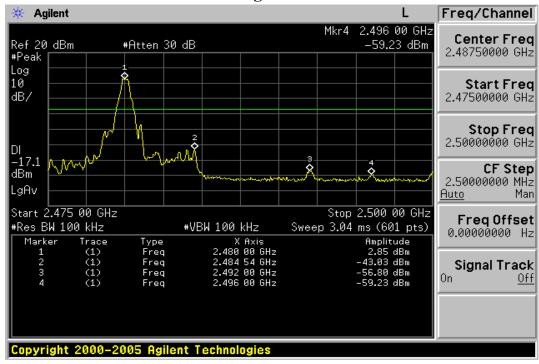

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 22 of 64

Radiated Emission:

Operation Mode TX CH Low Test Date Oct. 13, 2008

Fundamental Frequency 2402 MHz Test By Brain Temperature Pol Ver. 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	n) (dB)	
2369.97	48.20		-10.82	37.38		74.00	54.00	-16.62	Peak
2382.00	47.89		-10.76	37.13		74.00	54.00	-16.87	Peak
2390.00	48.14		-10.76	37.38		74.00	54.00	-16.62	Peak
Operation			CH Low				Date	Oct. 13, 20	800
Fundamen	tal Freque	ncy 2402	MHz			Test	By	Brain	
Temperatu	ire	25 ℃				Pol		Hor.	
Humidity		65 %							

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2369.97	49.50		-10.82	38.68		74.00	54.00	-15.32	Peak
2382.04	48.54		-10.82	37.72		74.00	54.00	-16.28	Peak
2390.00	48.91		-10.76	38.15		74.00	54.00	-15.85	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS columno
- (3) Spectrum Peak Setting: 1GHz-26GHz, RBW=1MHz, VBW=3MHz, Sweep time=200 ms.
- (4) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the

Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is totis Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 23 of 64

Radiated Emission:

Operation Mode TX CH High Test Date Oct. 13, 2008

Fundamental Frequency 2480 MHz Test By Brain Pol Ver. Temperature 25 °C

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2483.50	49.59		-10.46	39.13		74.00	54.00	-14.87	Peak

Operation Mode TX CH High Test Date Oct. 13, 2008 Fundamental Frequency 2480 MHz Test By Brain Temperature Pol Hor. 25 °C Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}		
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2483.50	49.47		-10.46	39.01		74.00	54.00	-14.99	Peak

Remark:

- (1) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS columno
- (3) Spectrum Peak Setting: 1GHz-26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting: 1GHz-26GHz, RBW=1MHz, VBW=10Hz, Sweep time=200 ms.



Report No.: ER/2008/50020 **Issue Date: Oct. 20, 2008**

Page: 24 of 64

9. SPURIOUS RADIATED EMISSION TEST

8.3. Standard Applicable

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

8.4. EUT Setup

- 1. The radiated emission tests were performed in the 3 meter open-test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The EUT was put in the front of the test table. The peripherals was placed on the side of the host system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The spacing between the peripherals was 10 centimeters.
- 4. External I/O cables were draped along the edge of the test table and bundle when necessary.
- 5. The host PC system was connected with 110Vac/60Hz power source.

8.5. Measurement Procedure

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency measured were complete.




Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008


Page: 25 of 64

8.6. Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1GHz

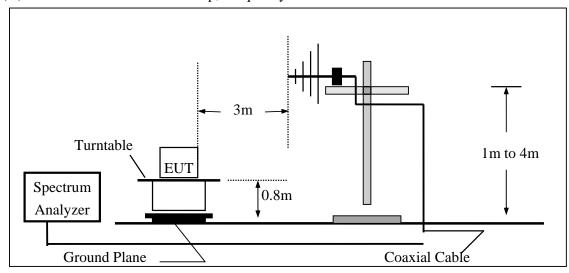

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

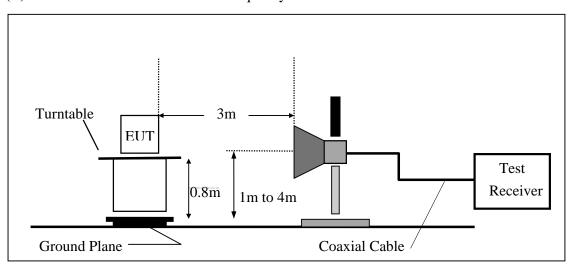

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the

Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is totis Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 26 of 64

8.7. Measurement Equipment Used:

	9	66 Chamber			
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
ITPE		NUMBER	NUMBER		
Spectrum Analyzer	R&S	FSP 40	100034	02/22/2008	02/21/2009
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2007	07/03/2009
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010
Bilog Antenna	SCHWAZBECK	VULB9160	9160-3158	11/29/2007	11/28/2008
Horn antenna	Schwarzbeck	BBHA 9120D	9120D-673	05/09/2008	05/10/2010
Horn antenna	Schwarzbeck	BBHA 9170	184/185	12/31/2007	12/30/2008
Pre-Amplifier	HP	8447F	3113A06892	01/05/2008	01/04/2009
Pre-Amplifier	HP	8449B	3008A01973	01/05/2008	01/04/2009
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable HUBER+SUHNER		SUCOFLEX 104PEA-10M	10m	01/05/2008	01/04/2009
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2008	01/04/2009

8.8. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

8.9. Measurement Result

Refer to attach tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the


Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is totis Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 27 of 64

Conducted Spurious Emission Measurement Result Ch Low 30MHz - 3GHz

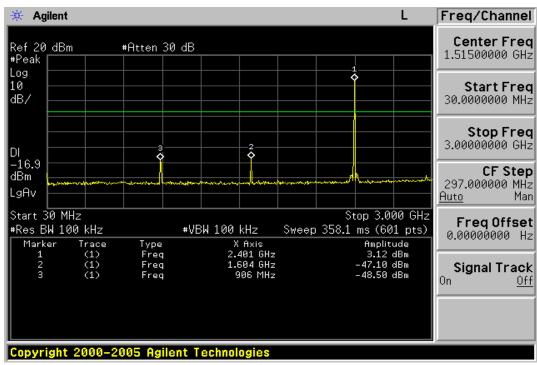

Ch Low 3GHz – 26.5GHz

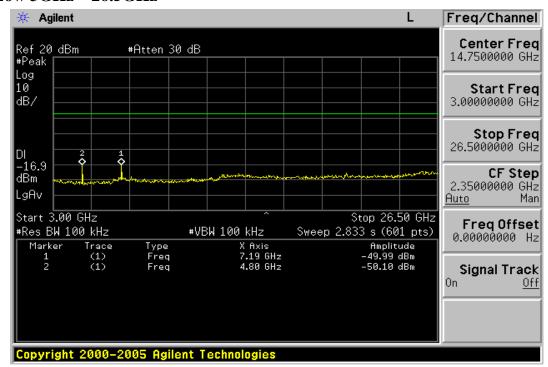


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention




Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 28 of 64

Ch Mid 30MHz - 3GHz

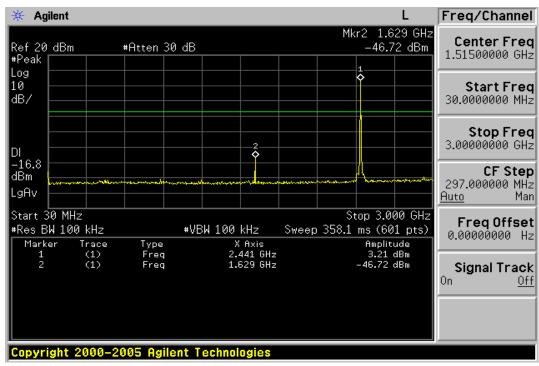

Ch Mid 3GHz – 26.5GHz

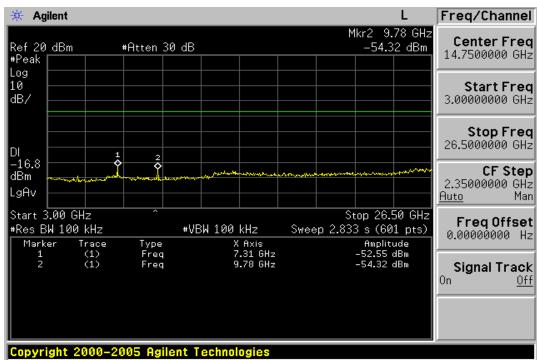


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention




Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 29 of 64

Ch High 30MHz - 3GHz

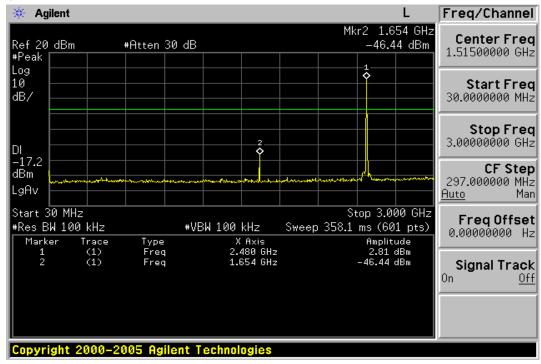

Ch High 3GHz – 26.5GHz

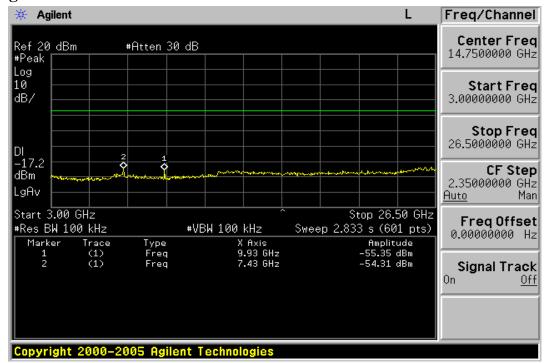

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 30 of 64

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode TX CH Low Test Date Oct. 13, 2008

Fundamental Frequency 2402MHz Test By Brain Ver./Hor. Pol Temperature 25 °C Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
58.13	V	Peak	42.20	-26.67	15.53	40.00	-24.47
99.84	V	Peak	39.89	-30.49	9.40	43.50	-34.10
305.48	V	Peak	42.94	-28.19	14.75	46.00	-31.25
877.78	V	Peak	43.24	-19.36	23.88	46.00	-22.12
953.44	V	Peak	52.60	-18.38	34.22	46.00	-11.78
99.84	Н	Peak	52.24	-30.49	21.75	43.50	-21.75
162.89	Н	Peak	50.11	-27.18	22.93	43.50	-20.57
305.48	Н	Peak	52.70	-28.19	24.51	46.00	-21.49
497.54	Н	Peak	51.17	-24.81	26.36	46.00	-19.64
877.78	Н	Peak	54.15	-19.36	34.79	46.00	-11.21

Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 31 of 64

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode TX CH Mid Test Date Oct. 13, 2008

Fundamental Frequency 2441MHz Test By Brain Ver./Hor. Pol Temperature 25 °C Humidity 65 %

Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
58.13	V	Peak	56.55	-26.67	29.88	40.00	-10.12
99.84	V	Peak	60.01	-30.49	29.52	43.50	-13.98
305.48	V	Peak	51.14	-28.19	22.95	46.00	-23.05
446.13	V	Peak	50.43	-25.10	25.33	46.00	-20.67
877.78	V	Peak	55.53	-19.36	36.17	46.00	-9.83
99.84	Н	Peak	55.44	-30.49	24.95	43.50	-18.55
159.98	Н	Peak	50.82	-26.99	23.83	43.50	-19.67
305.48	Н	Peak	54.91	-28.19	26.72	46.00	-19.28
557.68	Н	Peak	51.20	-23.57	27.63	46.00	-18.37
877.78	Н	Peak	54.59	-19.36	35.23	46.00	-10.77

Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 32 of 64

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode TX CH High Test Date Oct. 13, 2008 Fundamental Frequency 2480MHz Test By Brain Ver./Hor. **Temperature** Pol 25 °C

Humidity 65 %

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)
58.13	V	Peak	56.82	-26.67	30.15	40.00	-9.85
99.84	V	Peak	60.43	-30.49	29.94	43.50	-13.56
841.89	V	Peak	50.76	-19.78	30.98	46.00	-15.02
877.78	V	Peak	54.24	-19.36	34.88	46.00	-11.12
99.84	Н	Peak	55.33	-30.49	24.84	43.50	-18.66
159.98	Н	Peak	50.17	-26.99	23.18	43.50	-20.32
305.48	Н	Peak	55.22	-28.19	27.03	46.00	-18.97
424.79	Н	Peak	51.20	-25.49	25.71	46.00	-20.29
877.78	Н	Peak	53.80	-19.36	34.44	46.00	-11.56

Remark:

- 1 Measuring frequencies from 30 MHz to the 1GHz •
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- 3 Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 33 of 64

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH Low Test Date Oct. 13, 2008

Fundamental Frequency 2402 MHz Test By Brain Temperature 25 °C Pol Ver.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}	
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4804.00	47.02		-6.01	41.01		74.00	54.00	-12.99
7209.00	50.01		1.57	51.58		74.00	54.00	-2.42
9608.0						74.00	54.00	
12010.0						74.00	54.00	
14412.0						74.00	54.00	
16814.0						74.00	54.00	
19216.0						74.00	54.00	
21618.0						74.00	54.00	
24020.0						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz-26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms
- (5) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 34 of 64

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH Low Test Date Oct. 13, 2008

Fundamental Frequency 2402 MHz Test By Brain Temperature 25 °C Pol Hor.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}	
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4804.00	50.63		-6.01	44.62		74.00	54.00	-9.38
7206.00	45.73		1.57	47.30		74.00	54.00	-6.70
9608.00						74.00	54.00	
12010.0						74.00	54.00	
14412.0						74.00	54.00	
16814.0						74.00	54.00	
19216.0						74.00	54.00	
21618.0						74.00	54.00	
24020.0						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency $_{\circ}$
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 35 of 64

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH Mid Test Date Oct. 13, 2008

Fundamental Frequency 2441 MHz Test By Brain Temperature 25 °C Pol Ver.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}	
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4882.00	45.59		-5.93	39.66		74.00	54.00	-14.34
7323.00	48.32		1.76	50.08		74.00	54.00	-3.92
9764.00						74.00	54.00	
12205.0						74.00	54.00	
14646.0						74.00	54.00	
17087.0						74.00	54.00	
19528.0						74.00	54.00	
21969.0						74.00	54.00	
24410.0						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency $_{\circ}$
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 36 of 64

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH Mid Test Date Oct. 13, 2008

Fundamental Frequency 2441 MHz Test By Brain Temperature 25 °C Pol Hor.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}	
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4882.00	45.28		-5.93	39.35		74.00	54.00	-14.65
7323.00	46.27		1.76	48.03		74.00	54.00	-5.97
9764.00						74.00	54.00	
12205.0						74.00	54.00	
14646.0						74.00	54.00	
17087.0						74.00	54.00	
19528.0						74.00	54.00	
21969.0						74.00	54.00	
24410.0						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 37 of 64

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH High Test Date Oct. 13, 2008

Fundamental Frequency 2480 MHz Test By Brain Temperature 25 °C Pol Ver.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}	
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4960.00	44.33		-5.62	38.71		74.00	54.00	-15.29
7440.00	43.82		1.57	45.39		74.00	54.00	-8.61
9920.00						74.00	54.00	
12400.0						74.00	54.00	
14880.0						74.00	54.00	
17360.0						74.00	54.00	
19840.0						74.00	54.00	
22320.0						74.00	54.00	
24800.0						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency_o
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 38 of 64

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH High Test Date Oct. 13, 2008

Fundamental Frequency 2480 MHz Test By Brain Temperature 25 °C Pol Hor.

Humidity 65 %

	Peak	\mathbf{AV}		Actu	al FS	Peak	\mathbf{AV}	
Freq.	Reading	Reading	Ant./CL	Peak	\mathbf{AV}	Limit	Limit	Margin
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)
4960.00	47.27		-5.87	41.40		74.00	54.00	-12.60
7440.00	42.53		9.57	52.10		74.00	54.00	-1.90
9920.00						74.00	54.00	
12400.0						74.00	54.00	
14880.0						74.00	54.00	
17360.0						74.00	54.00	
19840.0						74.00	54.00	
22320.0						74.00	54.00	
24800.0						74.00	54.00	

Remark:

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency $_{\circ}$
- (2) Data of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting: 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No.: ER/2008/50020 **Issue Date: Oct. 20, 2008**

Page: 39 of 64

10. FREQUENCY SEPARATION

10.1. Standard Applicable

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

10.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Adjust Span to 5 MHz, Sweep = auto.
- 5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

10.3. Measurement Result

Channel separation	Limit	Result
MHz	kHz	
1	>=25KHz or 2/3* 20 dB bandwidth	PASS

10.4. Measurement Equipment Used:


10.4. Measurement Equipment Osea.								
	Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010			
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2008	07/03/2009			
Spectrum Analyzer	R&S	FSP 40	100034	02/22/2008	02/21/2009			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	02/13/2008	02/12/2009			
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2008	07/04/2009			



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 40 of 64

Frequency Separation Test Data

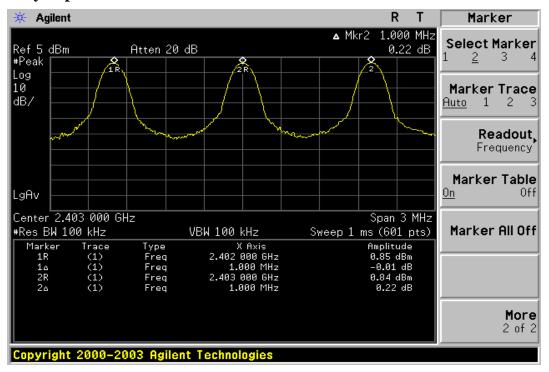

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。 This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: ER/2008/50020 **Issue Date: Oct. 20, 2008**

Page: 41 of 64

11. NUMBER OF HOPPING FREQUENCY

11.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

11.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz,
- 5. Max hold, view and count how many channel in the band.

11.3. Measurement Result

Total No of	Limit (CH)	Measurement result (CH)	Result
hopping channel	15	79	Pass

11.4. Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010		
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2008	07/03/2009		
Spectrum Analyzer	R&S	FSP 40	100034	02/22/2008	02/21/2009		
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	02/13/2008	02/12/2009		
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2008	07/04/2009		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008


Page: 42 of 64

Channel Number

2.4 GHz - 2.441GHz

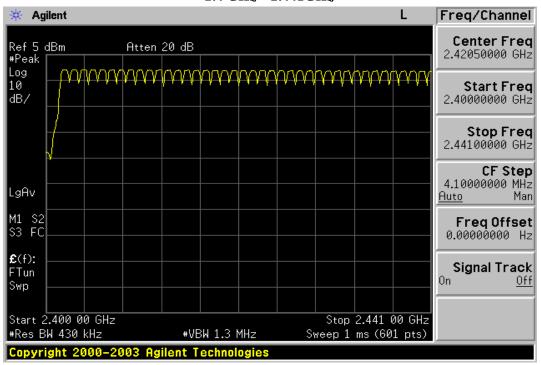

2.441 GHz - 2.4835GHz

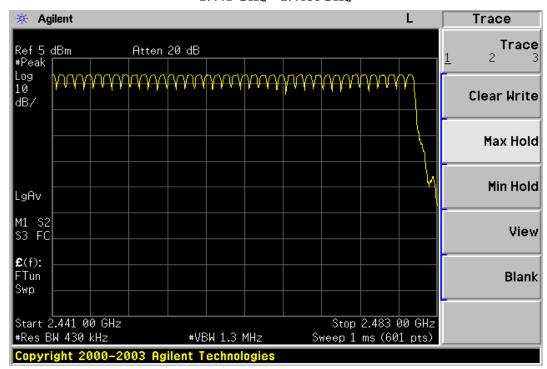

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 43 of 64

12. TIME OF OCCUPANCY (DWELL TIME)

12.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

12.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span = 0Hz, Adjust Sweep = 30s.
- 5. Repeat above procedures until all frequency measured were complete.

12.3. Measurement Result

A period time = 0.4 (ms) * 79 = 31.6 (s)

CH Low: DH1 time slot = 0.405 (ms) * (1600/(1*79)) * 31.6 = 259.2 (ms)

DH3 time slot = 1.675 (ms) * (1600/(3*79)) * 31.6 = 357.3 (ms)

DH5 time slot = 2.925 (ms) * (1600/(5*79)) * 31.6 = 374.4 (ms)

CH Mid: DH1 time slot = 0.405 (ms) * (1600/(1*79)) * 31.6 = 259.2 (ms)

DH3 time slot = 1.675 (ms) * (1600/(3*79)) * 31.6 = 357.3 (ms)

DH5 time slot = 2.906 (ms) * (1600/(5*79)) * 31.6 = 371.9 (ms)

CH High: DH1 time slot = 0.405 (ms) * (1600/(1*79)) * 31.6 = 259.2 (ms)

DH3 time slot = 1.662 (ms) * (1600/(3*79)) * 31.6 = 354.5 (ms)

DH5 time slot = 2.906 (ms) * (1600/(5*79)) * 31.6 = 371.9 (ms)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of SGS Group



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008


Page: 44 of 64

12.4. Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010		
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2008	07/03/2009		
Spectrum Analyzer	R&S	FSP 40	100034	02/22/2008	02/21/2009		
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2008	01/04/2009		
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2008	07/04/2009		

Dwell Time Test Data CH-Low

DH1

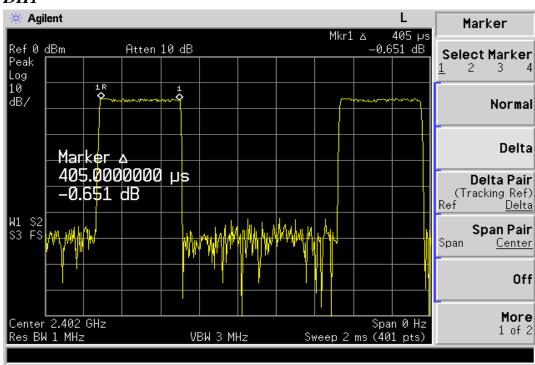


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 45 of 64

DH3

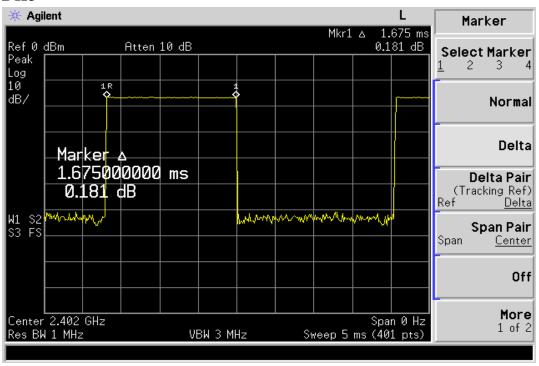

DH5

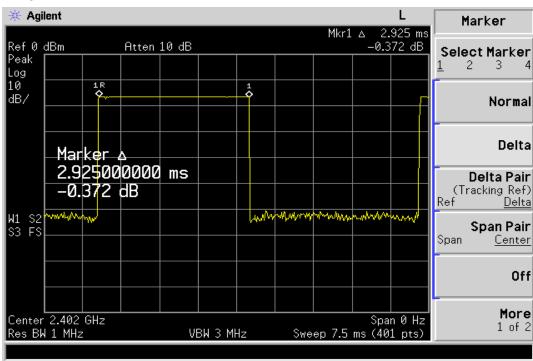

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the




Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008


Page: 46 of 64

CH-Mid

DH1

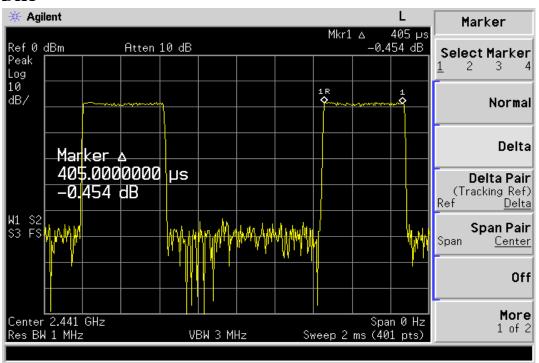

DH3

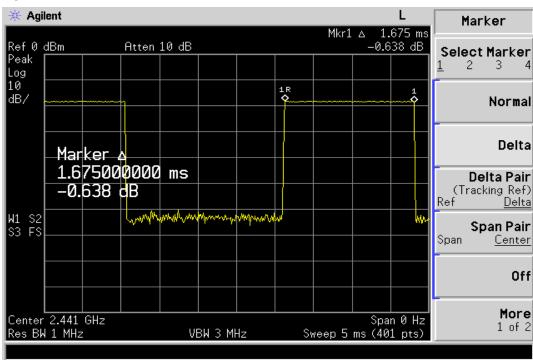


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 47 of 64

DH5

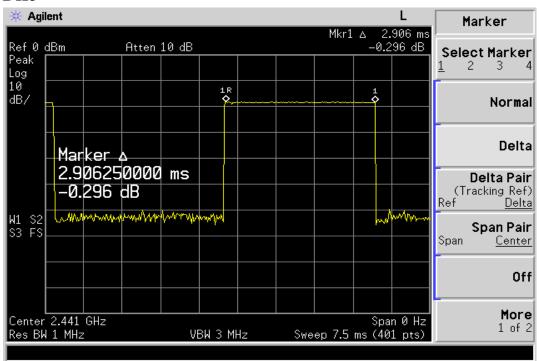




Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008


Page: 48 of 64

CH-High

DH1

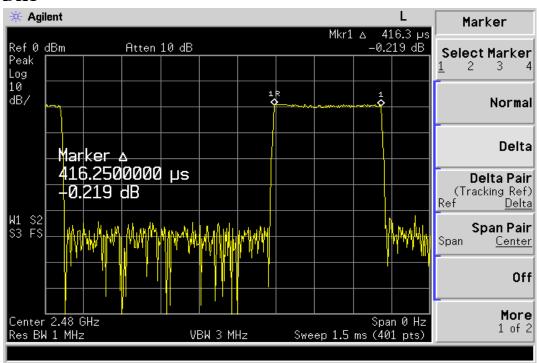

DH3

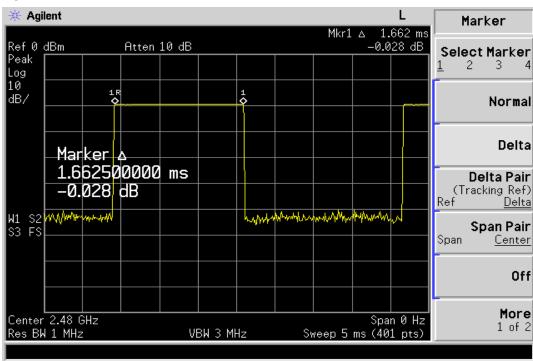


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 49 of 64

DH5

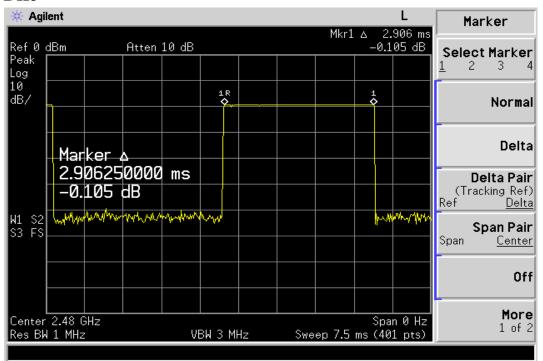



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 50 of 64

13. Peak Power Spectral Density

13.1. Standard Applicable

According to §15.247(d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3kHz band during any time interval of continuous transmission.

13.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 300KHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.

13.3. Measurement Result

СН	RF Power Density	Cable loss	RF Power Density	Maximum Limit
	Reading (dBm)	(dB)	Level (dBm)	(dBm)
Low	-10.29	0.10	-10.19	8
Mid	-7.66	0.10	-7.56	8
High	-10.43	0.10	-10.33	8

13.4. Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010		
Spectrum Analyzer	Agilent	E7405A	US41160416	07/04/2008	07/03/2009		
Spectrum Analyzer	R&S	FSP 40	100034	02/22/2008	02/21/2009		
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/05/2008	01/04/2009		
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2008	07/04/2009		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。


Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 51 of 64

Power Spectral Density Test Plot (CH-Low)

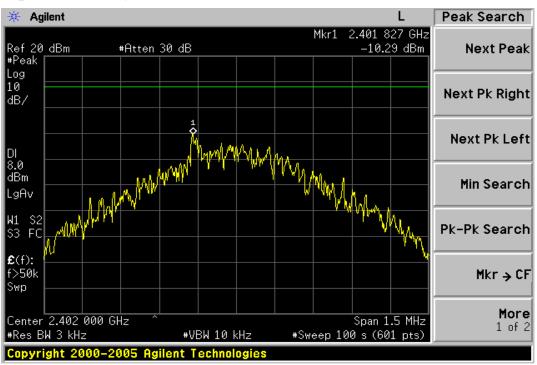

Power Spectral Density Test Plot (CH-Mid)

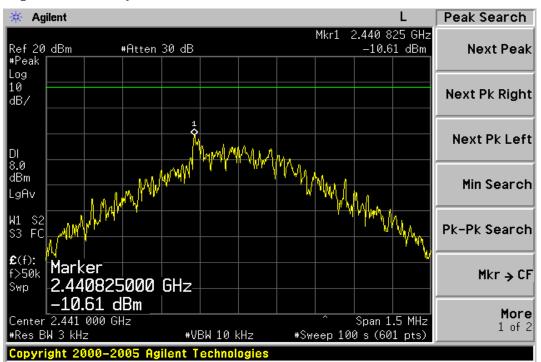


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 52 of 64

Power Spectral Density Test Plot (CH-High)

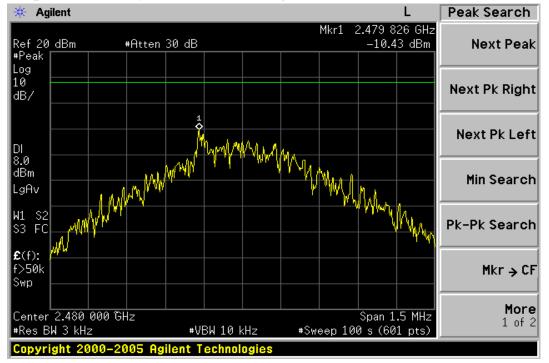

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the



Report No.: ER/2008/50020 Issue Date: Oct. 20, 2008

Page: 53 of 64

14. ANTENNA REQUIREMENT

14.1. Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

14.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is 2 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.