

Prüfbericht-Nr.: <i>Test report no.:</i>	ULR-TC568822300000034F	Auftrags-Nr.: <i>Order no.:</i>	146643820 0010	Seite 1 von 73 Page 1 of 73
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	2024735	Auftragsdatum: <i>Order date:</i>	2021-12-20	
Auftraggeber: <i>Client:</i>	1. HONEYWELL INTERNATIONAL INC 1860W, ROSE GARDEN LANE, AZ75,M-16-7988, PHOENIX, ARIZON, UNITED STATES 2. Honeywell LTD 500 Brooksbank Avenue, North Vancouver, BC, V7J 3S4; Canada			
Prüfgegenstand: <i>Test item:</i>	Field Device Access Point Gen3 Anchor			
Bezeichnung <i>Identification</i>	FDAP31, FDAP32, FDAP3P	Serien -Nr.: <i>Serial no.:</i>	FC-00	
Auftrags-Inhalt: <i>Order content:</i>	Testing and issue of Test Report and Grant Certificate			
Prüfgrundlage: <i>Test specification:</i>	FCC Part 15 Subpart C 15.247,15.205, 15.207 & 15.209 RSS 247 Issue 2,RSS Gen Issue 5			
Wareneingangsdatum: <i>Date of sample receipt:</i>	27-01-2022			
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003207433-001			
Prüfzeitraum: <i>Testing period:</i>	2022-01-27 - 2022-02-23			
Ort der Prüfung: <i>Place of testing:</i>	Wireless laboratory, Bangalore			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (India) Pvt. Ltd. 27/B,2nd cross road, Electronic city Phase1, Bangalore-560100, India FCC Test Site Registration No: 496599 IC Test Site Registration Number: 3665-1			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	genehmigt von: <i>authorized by:</i>			
Datum: <i>Date:</i> 2022-01-27	Ausstellatum: <i>Issue date:</i> 2022-05-20			
Stellung / Position: Yogesh V Engineer	Stellung / Position: Lokesh Ramu Manager			
Sonstiges / Other: FCC ID: S5751308987 IC: 573W-51308987				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 2 von 73
Page 2 of 73

TEST SUMMARY

Test Item	Applicable Standard		Result
	FCC	ISED	
Maximum conducted (Peak) output power	FCC 15.247 (b)(3)	RSS 247 Issue 2, Section 5.4 (d)	Pass
Maximum Power Spectral Density	FCC 15.247(e)	RSS 247 Issue 2, Section 5.2 (b)	Pass
DTS Bandwidth	FCC 15.247(a)(2)	RSS 247 Issue 2, Section 5.2 (a)	Pass
Emissions in non-restricted frequency bands	FCC 15.247(d)	RSS 247 Issue 2, Section 5.5	Pass
Spurious Radiated Emissions and Restricted Bands of Operation	FCC 15.209 / FCC 15.205	RSS-Gen Issue 5, Section 8.9 /8.10	Pass
Conducted Spurious Emission on AC Power lines	FCC 15.207	RSS-Gen Issue 5,Section 8.8	Pass

Product Category: Electronics Testing
Test Discipline: EMC Test Facility

Note:

- Host products Field device access point (FDAP) Gen3 Anchor has following model variants , all the models are electrically identical & RF characteristics are similar, please refer the Previous FDAP Report (FCC ID: S5751307990 and IC:573W-51307990).
Model number:
FDAP31
FDAP32
FDAP3P
- GXRM Radio module(ZigBee) Considered as approved referring to previous FDAP report FCC ID: S5751307990 and IC:573W-51307990
- BLE approved module as Listed FCC ID:XPYNINAB1 and IC 8595A-NINAB1
- FDAP Gen3 Anchor unit integrated with Three Transmitters as simultaneous operation.
 - BLE transmitter
 - Radio1 (GXRM transmitter)
 - Radio2 (Anchor Transmitter)

Prüfbericht - Nr.:

Test Report No.:

ULR-TC568822300000034F

Seite 3 von 73

Page 3 of 73

REVISION HISTORY OF THIS REPORT

Report Number	Version	Description	Issue date
ULR-TC568822300000034F	01	Initial issue of report	2022-05-20
ULR-TC568822300000034F	02	Reviewer comments updated	2022-06-06

Table of Contents

1	GENERAL REMARKS	5
1.1	Attachments	5
2	TEST SITES	6
2.1	Testing Facilities.....	6
2.2	List of Test and Measurement Instruments.....	6
3	GENERAL PRODUCT INFORMATION.....	7
3.1	Product Function and Intended Use.....	7
3.2	Ratings and System Details of Equipment under Test	7
3.3	Antenna Details	8
3.4	Measurement Uncertainty:	8
4	TEST SET-UP AND OPERATION MODE.....	9
4.1	Principle of Configuration Selection	9
4.2	Test Operation and Test Software	9
4.3	Special Accessories and Auxiliary Equipment	9
4.4	Simultaneous Transmission	9
4.5	Countermeasures to achieve EMC Compliance	9
4.6	List of frequencies	10
4.7	Report References	10
5	Operational Description	11
6	Block Diagram.....	11
7	TEST METHODOLOGY	12
7.1	Conducted Spurious Emission Test on AC Power Line.....	12
7.1.1	Test setup Configuration	12
7.2	Radiated Emission Test	13
7.2.1	Test Setup Configuration	13
8	TEST RESULTS	15
8.1	Maximum Peak Conducted Output Power	15
8.2	Maximum Power Spectral Density	21
8.3	Occupied bandwidth.....	23
8.4	Emissions in non-restricted frequency bands and Conducted Spurious Emission.....	25
8.4.1	Band edge and reference plots	26
8.4.2	Out-Of-Band Emissions.....	29
8.5	Spurious Radiated Emissions & Restricted Bands of Operation	33
8.5.1	RSE Test Results of Simultaneous Operation with Anchor 1 and GXRM Transmitter:	67
8.6	Conducted spurious emission Test on AC Power lines	70
9	LIST OF TABLES.....	73
10	LIST OF FIGURES.....	73

Prüfbericht - Nr.:

ULR-TC568822300000034F

Test Report No.:

Seite 5 von 73

Page 5 of 73

1 GENERAL REMARKS

1.1 Attachments

All attachments are part of this test report and are issued in separate document

1. TEST SETUP PHOTOS
2. EUT EXTERNAL PHOTOS
3. EUT INTERNAL PHOTOS
4. FCC LABEL AND LABEL LOCATION
5. BLOCK DIAGRAM
6. SPECIFICATION OF EUT
7. SCHEMATIC DIAGRAMS
8. BILL OF MATERIAL
9. USER MANUAL
10. MAXIMUM PERMISSIBLE EXPOSURE INFORMATION

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 6 von 73
Page 6 of 73

2 TEST SITES

2.1 Testing Facilities

1. TÜV Rheinland (India) Pvt.Ltd.,
27/B, 2nd Cross,
ElectronicCityPhase1
Bangalore – 560 100,
India
2. TUV Rheinland (India) Pvt.Ltd.,
108 , Beside ISBR Business School,
Electronic city Phase I
Bangalore - 560 100,
India

2.2 List of Test and Measurement Instruments

Table 1: List of test and measurement instruments

Equipment	Manufacturer	Model Name	Serial Number	Firmware Versions	Calibration Due Date	Periodicity	Test Facility
Active loop antenna	Schwarz beck	FMZB 1519 B	1519B-00111	-	27.04.2022	Yearly	Radiated Spurious Emission
Balun & Biconical Antenna	Schwarz beck Mess-Elektronik	BBA 9106+V HBB 9124	9124-1117	-	03.02.2023	Yearly	
Log - Periodical Antenna	Schwarzbeck Mess-Elektronik	VUSLP 9111B	9111B-324	-	04.02.2023	Yearly	
Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-1944	-	11.05.2022	Yearly	
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170-0904	-	06.05.2022	Yearly	
Semi Anechoic Chamber	Frankonia	-	-	-	-	-	
Fully Anechoic Chamber	Albatross	-	-	-	-	-	
EMI Receiver	Rohde & Schwarz	ESW 44	101732	4.73.SP5	19.05.2022	Yearly	
EMI Receiver	Rohde & Schwarz	ESW44	101773	1.72SP1	12.02.2023	Yearly	
Spectrum Analyzer	Agilent	E4407B	US41192 772	A.14.06	15.12.2022	Yearly	

Table 2: Instrument application Software versions

SL. No.	Test Type	Application software	Version
1	Radiated spurious emission measurement in 10Mtr - SAC	BAT EMC	3.20.0.17
2	Radiated spurious emission measurement in 3Mtr - FAC	EMC 32	10.60.00

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 7 von 73
Page 7 of 73

3 GENERAL PRODUCT INFORMATION

3.1 Product Function and Intended Use

The Field Device Access Point (FDAP) is a ruggedized industrial radio device intended for use in hazardous location to provide wireless connectivity for Wireless compatible field devices. As an industrial meshing access point, FDAP provides secure and reliable wireless coverage for wireless field devices. It also serves as a routing access point for wireless field devices and is located between the wired DCS network and wireless field devices. In addition to this FDAP support the Real Time Location Sensing. (RTLS) with the Help of Anchor radio.

3.2 Ratings and System Details of Equipment under Test

Table 3: Ratings and System Details as declared by Client*

Protocol		Proprietary
Operating Frequency Range		2402 MHz – 2476 MHz
No. of Channels		2
Channel Spacing		75.5MHz
Tx Transmitting Power		15 dBm
Maximum Measured e.i.r.p		19.22dBm with gain of 5dBi antenna and 22.22dBm with gain of 8dBi antenna
Modulation		OOK
Data Rate		2068.48 bps
Number of antennas		6
Antenna Gain & Antenna Type		Refer clause 3.3
Supply Voltage to Product		24V DC Supply
Environmental conditions	Storage	-40°C to +85°C
		Relative humidity 5% to 95% RH
	Operating	-40°C to +70°C
		Relative humidity 5% to 95% RH
EUT Dimension		217 x 319 x 379 mm (H x W x L)

***Disclaimer:** The information/data is supplied by the client and the same is considered to arrive at the final value. Any changes made apart from the specified specification, can directly impact on the tests results. Refer the products user manual for more details.

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 8 von 73
Page 8 of 73

3.3 Antenna Details

Sl.No	Antenna description	Antenna gain (dBi)	Power level (dBm)	Antenna Type
1	AIR-ANT2480V-N	8	15	External antenna- Omni directional
2	AIR-ANT2450V-N	5	15	External antenna- Omni directional
3	L-COM HGV-2409U	8	15	External antenna- Omni directional
4	Laird Technologies-OD24M-5	5	15	External antenna- Omni directional
5	SG1015NM-2450-5dBi	5	15	External antenna- Omni directional
6	NINA-B112	3	Max as per original module	Integral antenna

3.4 Measurement Uncertainty:

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k = 2$

Table 4: Measurement Uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 5 \%$
RF output power, conducted	$\pm 1.5 \text{ dB}$
Power Spectral Density, conducted	$\pm 3 \text{ dB}$
Unwanted Emissions, conducted	$\pm 3 \text{ dB}$
All emissions, radiated	$\pm 6 \text{ dB}$
Temperature	$\pm 3 \text{ }^{\circ}\text{C}$
Supply Voltages	$\pm 3 \%$
Time	$\pm 5 \%$

Note: The Listed Measurement Uncertainties are the worst-case uncertainty, for the respective test cases. Above Table is for reporting purpose only and not used in determining Final Pass/Fail verdict.

4 TEST SET-UP AND OPERATION MODE

4.1 Principle of Configuration Selection

Transmission was enabled with highest possible duty cycle transmission on low, mid and high channel.

4.2 Test Operation and Test Software

Hardware Version: FDAP 51156751-101, 102,103 (Rev B)

Software Version: FDAP Software (OW323.1-09.0)

Hardware version of identification Number (HVIN): FDAP 51156751-101, 102,103 (Rev B)

Firmware version of identification Number (FVIN): FDAP Software (OW323.1-09.0)

4.3 Special Accessories and Auxiliary Equipment

None

4.4 Simultaneous Transmission

Combinations of Simultaneous Operations performed	IEEE 802.15.4(Anchor 1)
	IEEE 802.15.4(GXRM Transmitter)
	BLE

Note: Simultaneous Operation was performed with the above mentioned combination and worst case test results are mentionrd in this report.

4.5 Countermeasures to achieve EMC Compliance

None

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 10 von 73
Page 10 of 73

4.6 List of frequencies

Frequency Band (MHz)	Channel No.	Channel Frequency (MHz)
2400 – 2483.5	1	2402
	2	2476

Table 5: List of EUT Center frequencies

Channel used for EUT testing

Channel low : 2402MHz

Channel High : 2476MHz

Note:

1. TUV Sample Identification number : A003207433-001 – Radiated & Conducted test Sample

4.7 Report References


Note: Field Device Access Point (FDAP) has multiple protocols. All the supported wireless protocols and their respective test results are issued in separate test reports, following table lists the report numbers.

Radio Protocol	Report Number
RF test report for Proprietary (2.4GHz) – (This report)	ULR-TC568822300000034F
RF test report for IEEE 802.15.4 (2.4GHz)	ULR-TC568822300000032F
RF test report for Proprietary (2.4GHz)	ULR-TC568822300000033F

5 Operational Description

FDAP Gen3 Anchor: It serves as a routing access point for wireless field devices and is located between the wired DCS network and wireless-based wireless field devices. Once deployed in the field, FDAPs self-discover and selforganize into a managed, secure, and redundant wireless field device mesh network. With FDAPs, wireless field devices do not have to route data from other field devices. In addition FDAP3X Anchor work in tandem with RTLS-Tag and find the distance between the tag and Anchor. This data will be used by software to identify the location of the tag.

6 Block Diagram

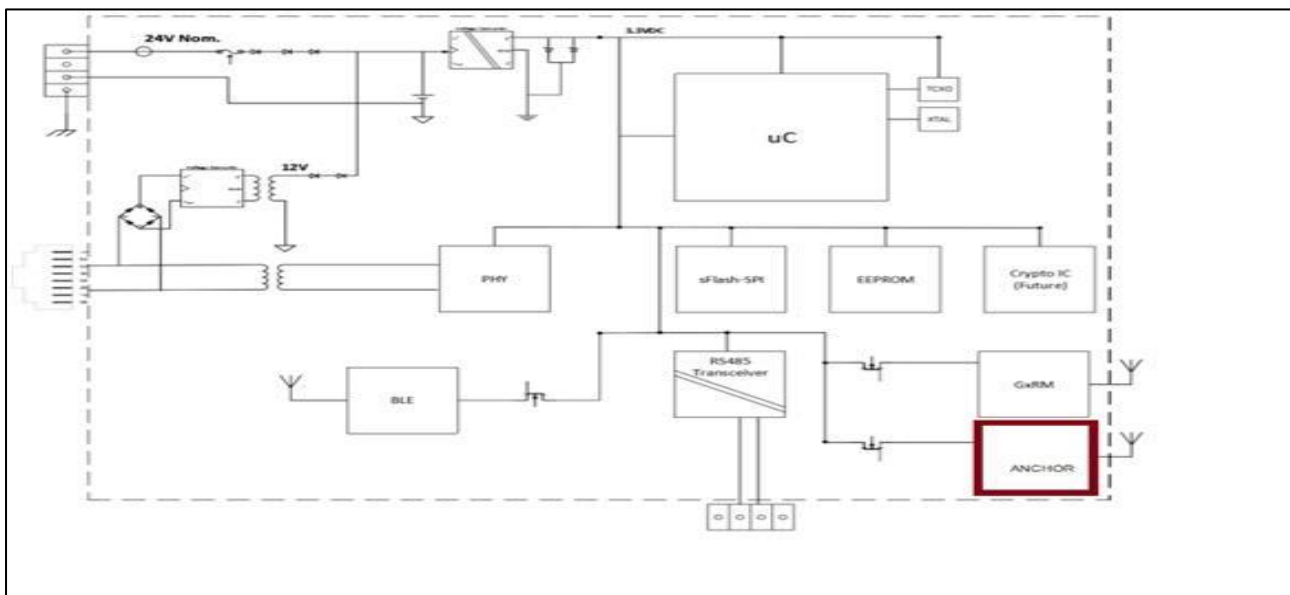


7 TEST METHODOLOGY

7.1 Conducted Spurious Emission Test on AC Power Line

Measured levels of ac power-line conducted emission across the 50Ω LISN port (to which the EUT is connected). All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer.

The device is placed on the test table, raised 80cm above the reference ground plane. The vertical conducting plane is located 40cm to the rear of the device. AC Conducted emission measurement is made over frequency range from 150kHz to 30MHz, this measurement was performed with EUT powered by 2 methods and both method are tested individually, one with an AC adaptor with 110V AC 60Hz supply and second with Wireless charger with supply 110V AC 60Hz.

7.1.1 Test setup Configuration

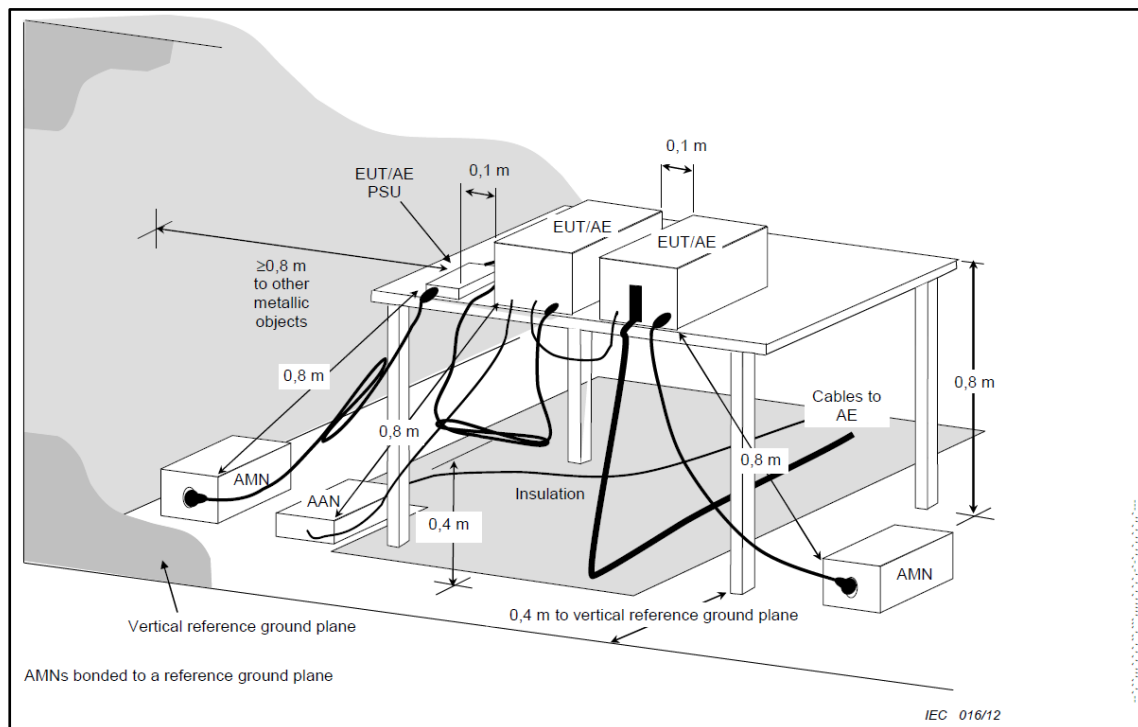

7.2 Radiated Emission Test

The radiated emission measurement was performed according to the procedures in ANSI C63.10-2013. The equipment under test (EUT) was placed at the middle of the 80 cm high turntable for below 1 GHz & 1.5 m height for above 1 GHz measurement, and the EUT is 3 meters far from the measuring antenna. The turntable was rotated 360° for obtaining the maximum emission. The height of the measuring antennas was scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained. The measurement above 1000 MHz was performed by horn antenna, The measurement below 30 MHz was performed by loop antenna, Measurement from 30 MHz to 200 MHz was performed by Baloon and Biconical Antenna, and measurement from 200 MHz to 1 GHz was performed by Log-Periodic Antenna.

The EUT was rotated around the X-, Y-, and Z-Axis and the results from worst case axis are recorded

7.2.1 Test Setup Configuration

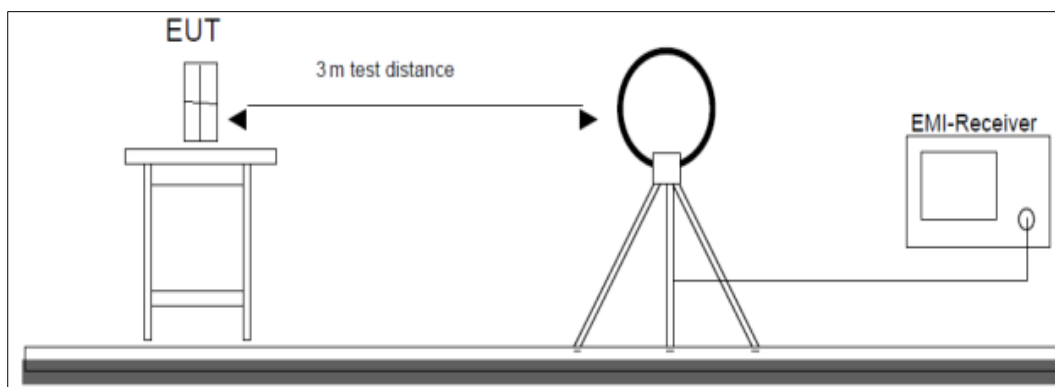


Figure 1: Frequency Range 9 kHz- 30 MHz

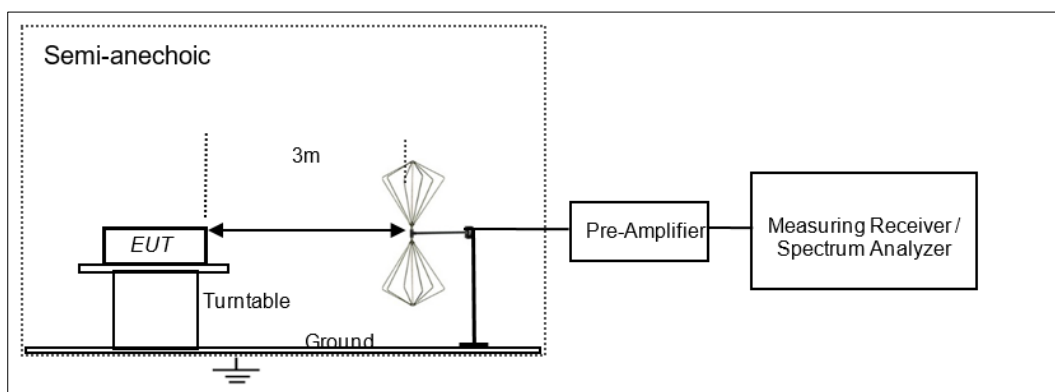


Figure 2: Frequency Range 30 MHz – 200 MHz

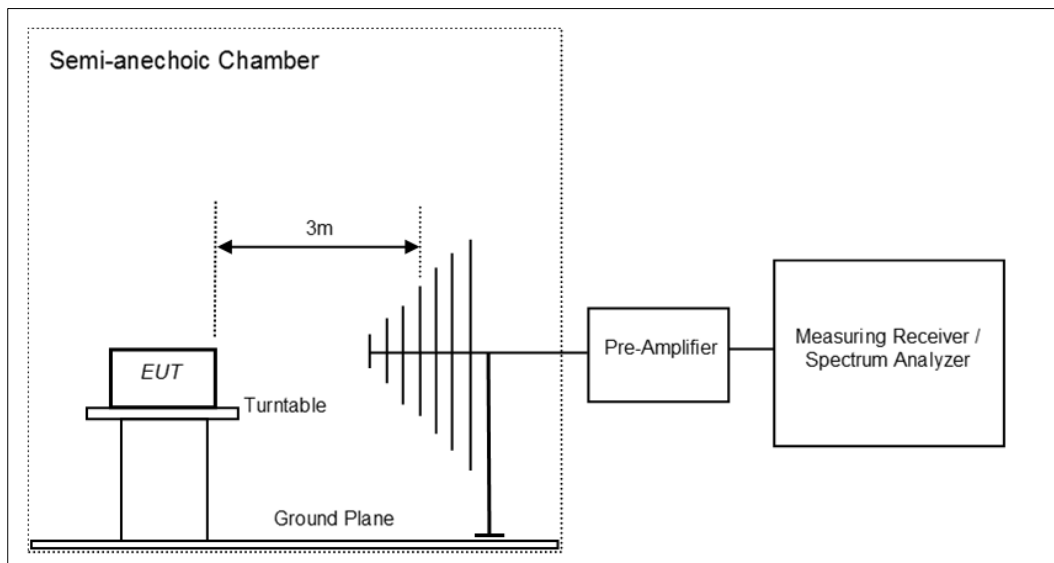


Figure 3: Frequency Range 200 MHz - 1GHz

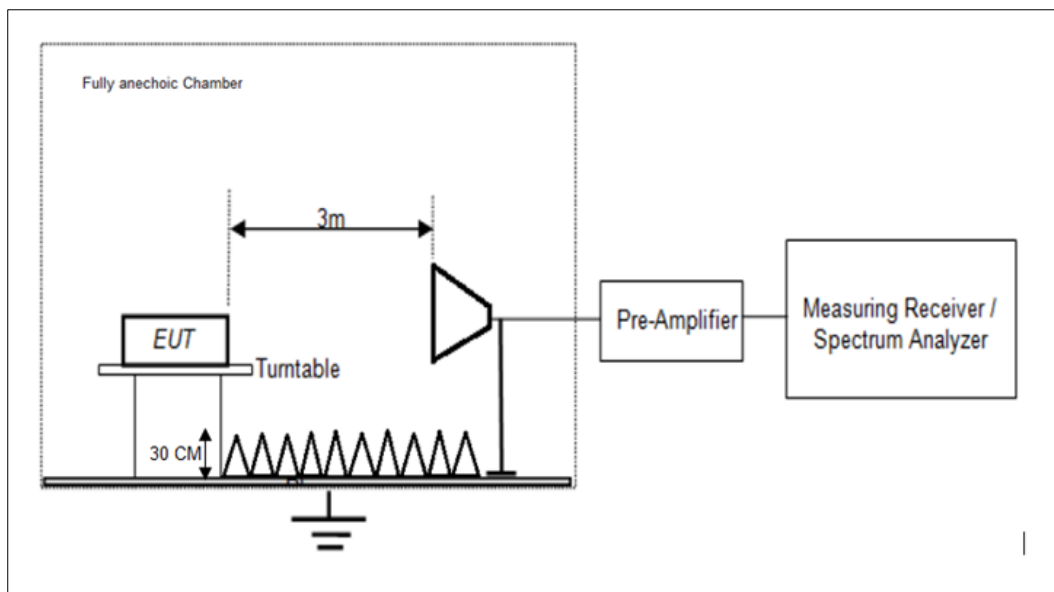


Figure 4: Frequency Range above 1 GHz

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 15 von 73
Page 15 of 73


8 TEST RESULTS

8.1 Maximum Peak Conducted Output Power

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (b)(3) / RSS 247 Issue 2, Section 5.4 (d)
Test Method	Subclause 11.9.1.3 of ANSI C63.10
Detector	Peak
Port of testing	Antenna port
Requirement	Power ≤ 1 W (30 dBm) & e.i.r.p ≤ 4 W (36 dBm)

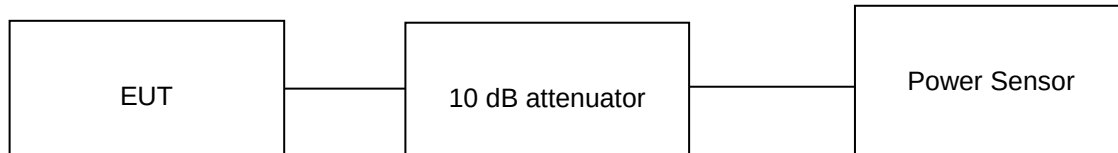

Test Condition

Normal Test Condition:

Temperature (Norm) = + 23.3 °C Voltage = 24V DC (AC – DC Adapter) Relative humidity: 63%

KDB Guidelines applied:

Measurements were made as per section 8.3.1.3 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 16 von 73
Page 16 of 73

Test results:

Note:

1. All the losses are included during measurement and final values are mentioned in the test report
2. Total Peak Output power (dBm) = Measured Peak power (dBm) + Attenuator factor (10dB) + Cable loss (0.6dB)
3. This product supports additional beamforming gain / directional gain, it uses dual antennas and hence Directional gain of the dual antennas are 5 dBi and 8dBi.

Transmitted power 15dBm and Antenna: AIR-ANT2450V-N (+5dBi gain)

Channel Frequency (MHz)	Measured Peak Power (dBm)	Maximum e.i.r.p (dBm)	Power Limit (dBm)	e.i.r.p limit (dBm)
2402	14.00	19.00	30	36
2476	14.22	19.22	30	36

Transmitted power 15dBm and Antenna: AIR-ANT2480V-N (+8dBi gain)

Channel Frequency (MHz)	Measured Peak Power (dBm)	Maximum e.i.r.p (dBm)	Power Limit (dBm)	e.i.r.p limit (dBm)
2402	14.00	22.00	30	36
2476	14.22	22.22	30	36

Prüfbericht - Nr.:

Test Report No.:

ULR-TC568822300000034F

Seite 17 von 73


Page 17 of 73

Test results for spot check of Maximum Conducted Output power for GXRM Host

Transmitted power 20dBm and Antenna gain of 5dBi

Data rate (Kbps)	Channel Frequency (MHz)	Measured Average Power (dBm)	Maximum e.i.r.p (dBm)	Power Limit (dBm)	e.i.r.p limit (dBm)
250	2405	18.74	23.74	30	36
	2440	18.99	23.99	30	36
	2475	15.92	20.92	30	36

Test Plots:

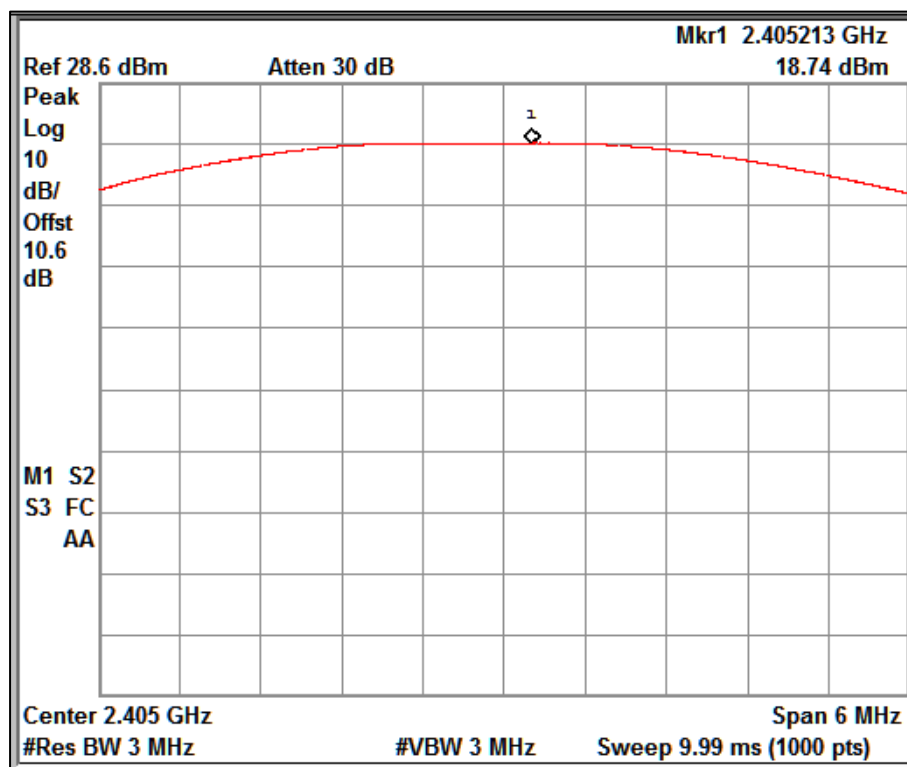

Channel Frequency: 2405MHz


Prüfbericht - Nr.:

Test Report No.:


ULR-TC568822300000034F

Seite 18 von 73

Page 18 of 73

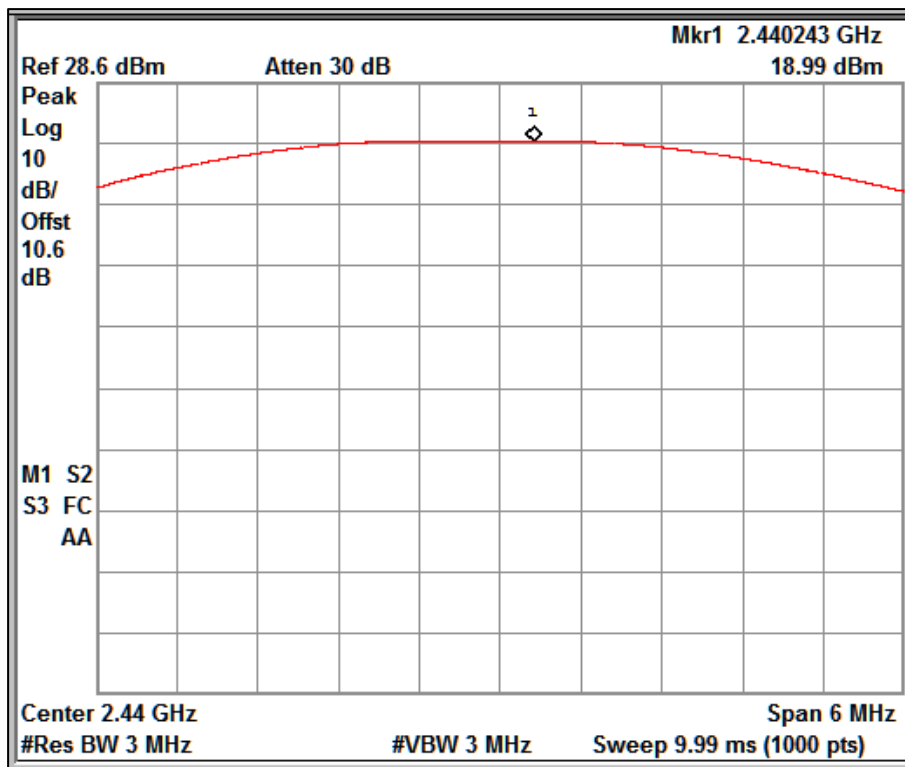

Channel Frequency: 2440MHz

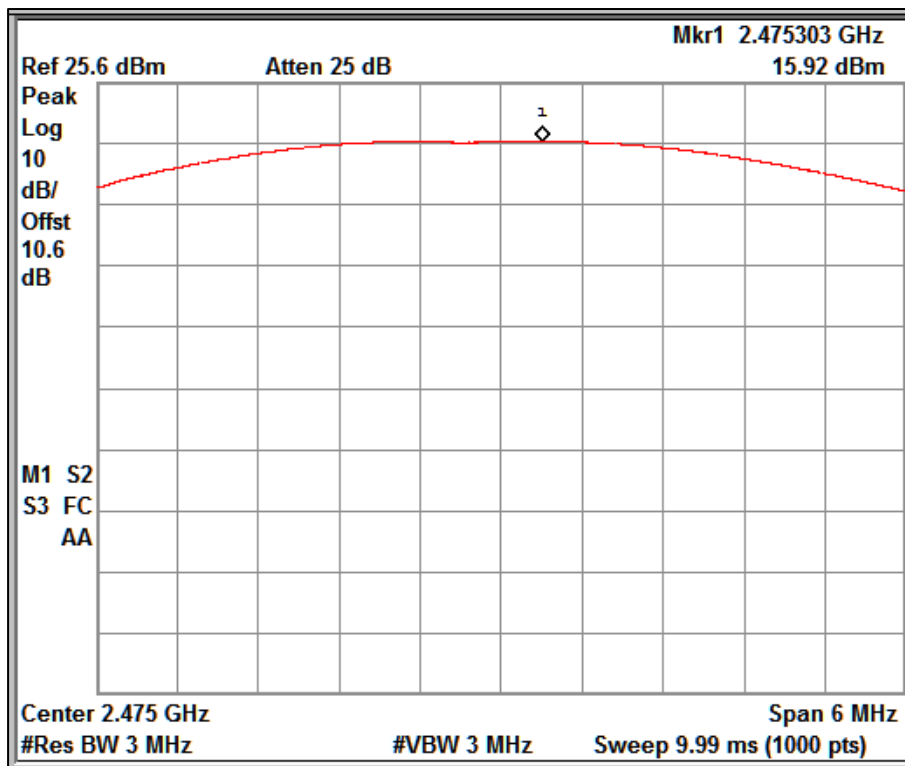

Channel Frequency: 2475MHz

Prüfbericht - Nr.:

Test Report No.:

ULR-TC568822300000034F


Seite 19 von 73

Page 19 of 73

Transmitted power 17dBm and Antenna gain of 8dBi

Data rate (Kbps)	Channel Frequency (MHz)	Measured Average Power (dBm)	Maximum e.i.r.p (dBm)	Power Limit (dBm)	e.i.r.p limit (dBm)
250	2405	15.89	23.89	30	36
	2440	16.11	24.11	30	36
	2475	15.91	23.91	30	36

Test Plots:

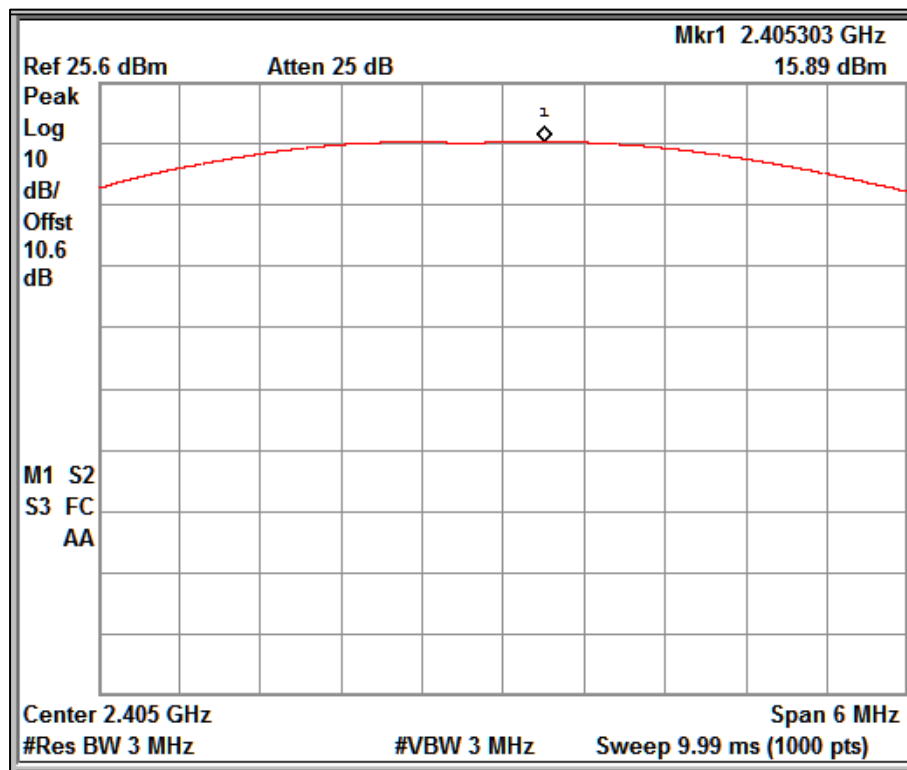


Channel Frequency: 2405MHz


Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 20 von 73
Page 20 of 73

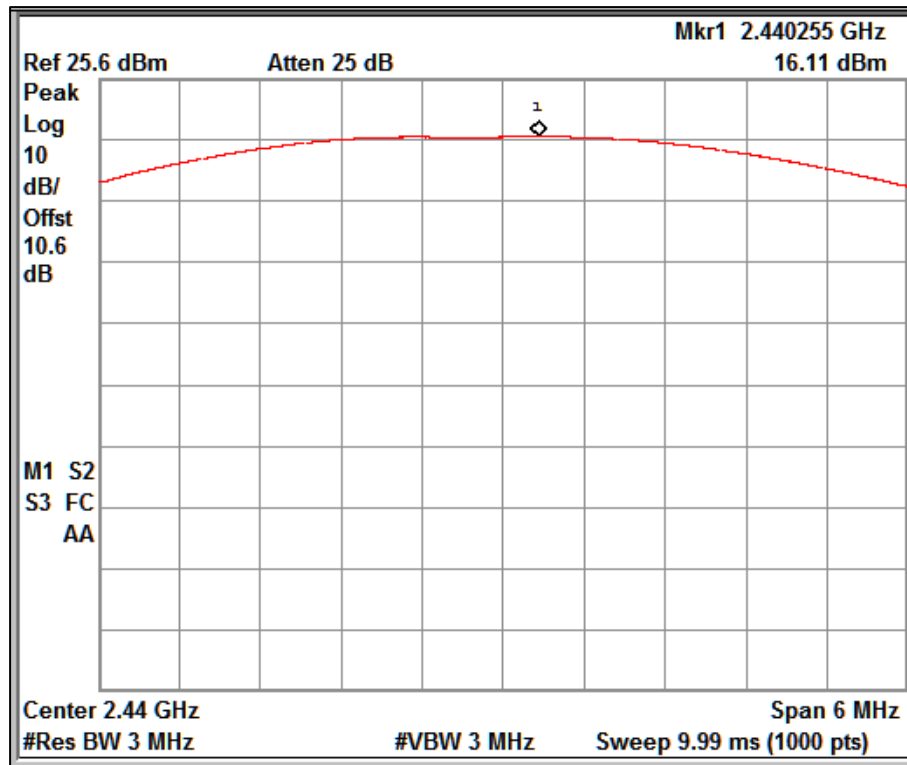

Channel Frequency: 2440MHz

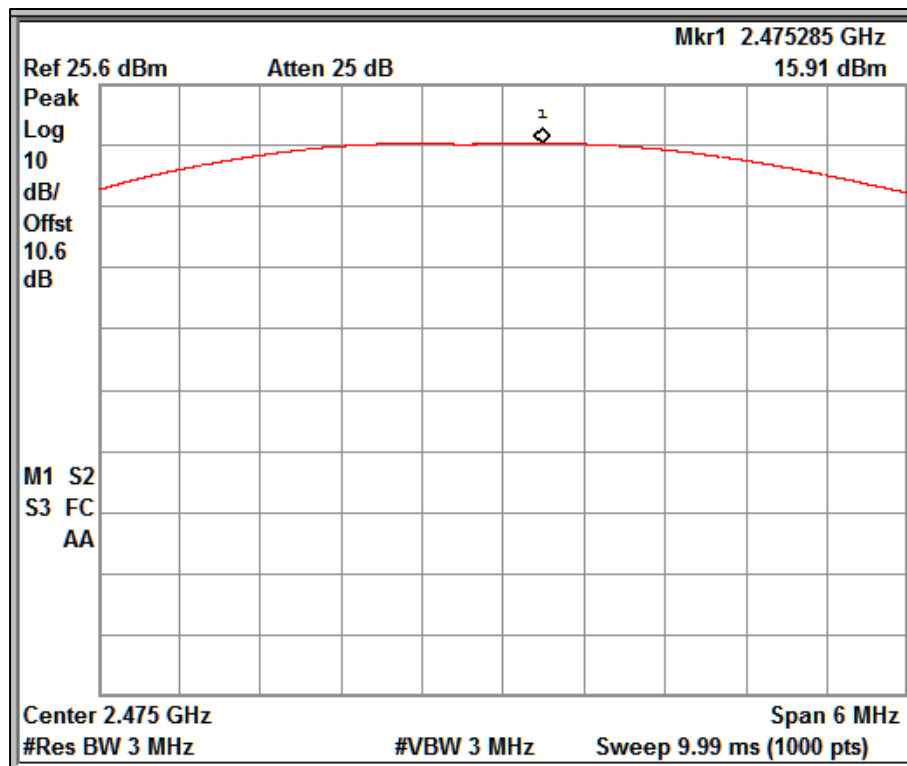

Channel Frequency: 2475MHz

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 21 von 73
Page 21 of 73


8.2 Maximum Power Spectral Density

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (e) / RSS 247 Issue 2, Section 5.2 (b)
Test Method	Subclause 11.10.2 of ANSI C63.10
Measurement Bandwidth	3 kHz
Detector	Peak detector mode
Port of testing	Antenna port
Requirement	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm

Test Method:

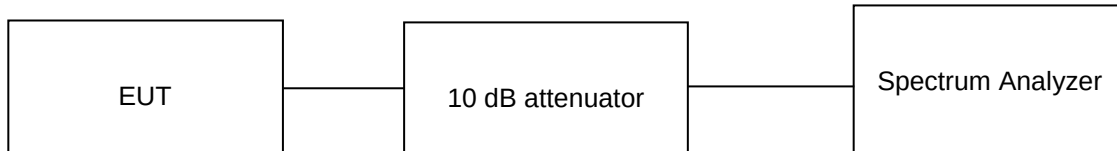

Test Condition

Normal Test Condition:

Temperature (Norm) = + 23.3°C

Voltage = 24V DC (AC – DC Adapter)

Relative humidity: 63 %

KDB Guidelines applied:

Measurements were made as per section 8.4 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F



Seite 22 von 73
Page 22 of 73

Test results:

Note:

1. All the losses are included during measurement and final values are mentioned in the test report.
2. Total Average PSD (dBm) = Measured Average PSD (dBm) + Attenuator factor (10dB) + Cable loss (0.6dB)
3. This product supports additional beamforming gain / directional gain, it uses dual antennas and hence Directional gain of the dual antennas are 5 dBi and 8dBi

Channel Frequency (MHz)	Measured PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)
2402	-2.15	8
2476	-1.31	8

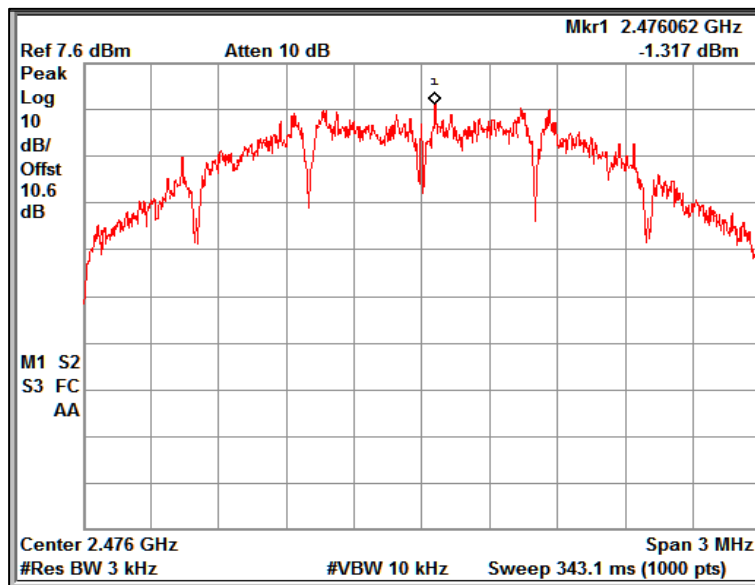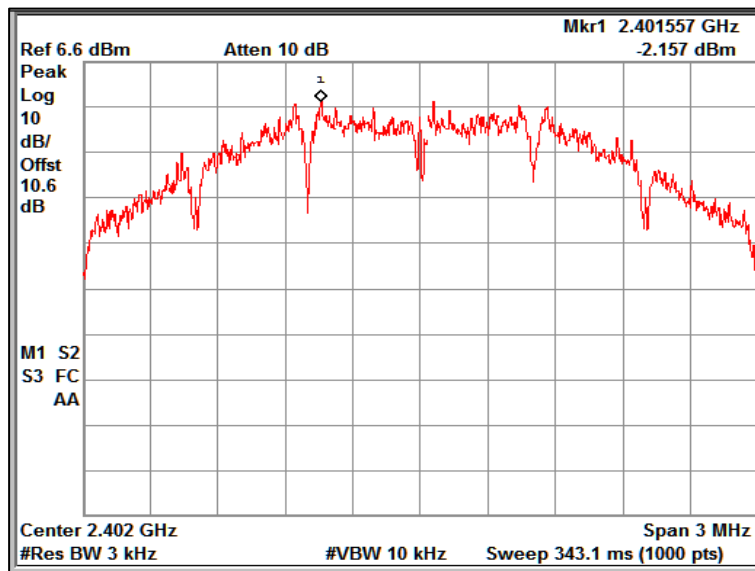

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 23 von 73
Page 23 of 73


8.3 Occupied bandwidth

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (a) (2) / RSS 247 Issue 2, Section 5.2 (a)
Test Method	Subclause 11.8.1 of ANSI C63.10
Measurement Bandwidth	100 kHz for x dB bandwidth 1 to 5% of OCB for 99% bandwidth
Detector	Peak
Port of testing	Antenna port
Requirement	The minimum 6 dB bandwidth shall be at least 500 kHz

Test Method:

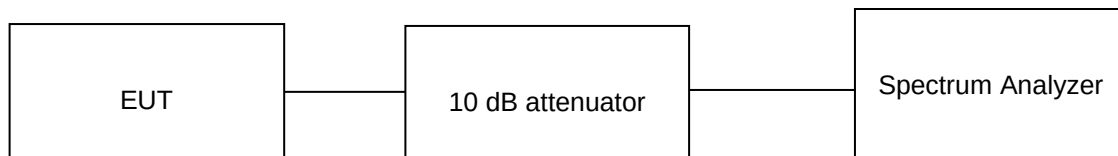

Test Condition

Normal Test Condition:

Temperature (Norm) = + 23.3 °C Voltage = 24V DC (AC – DC Adapter) Relative humidity: 63%

KDB Guidelines applied:

Measurements were made as per section 8.2 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:

Test Report No.:

ULR-TC568822300000034F

Seite 24 von 73



Page 24 of 73

Test results:

Note:

1. All the losses are included during measurement and final values are mentioned in the test report.
2. Total Peak Output power (dBm) = Measured Peak power (dBm) + Attenuator factor (10dB) + Cable loss (1.6dB)
3. This product supports additional beamforming gain / directional gain, it uses dual antennas and hence Directional gain of the dual antennas are 5 dBi and 8dBi

Channel Frequency (MHz)	6 dB Bandwidth (MHz)	99% OBW (MHz)
2402	1.58	2.22
2476	1.60	2.19

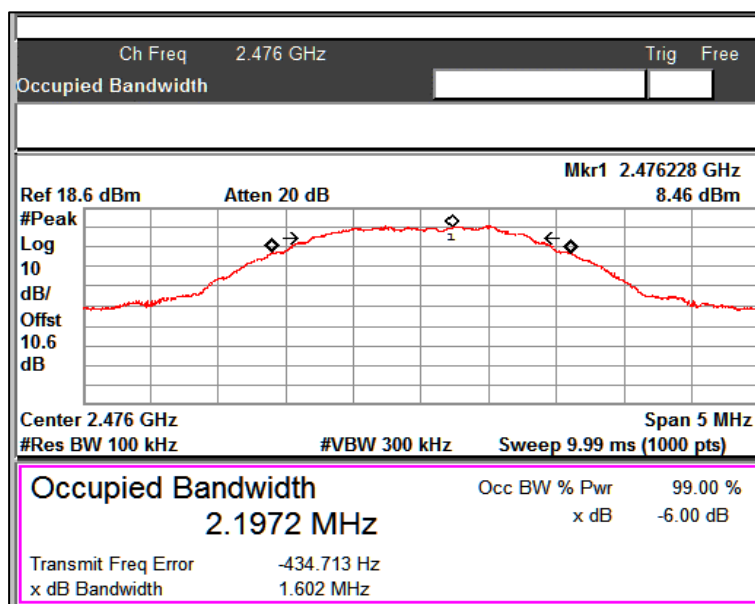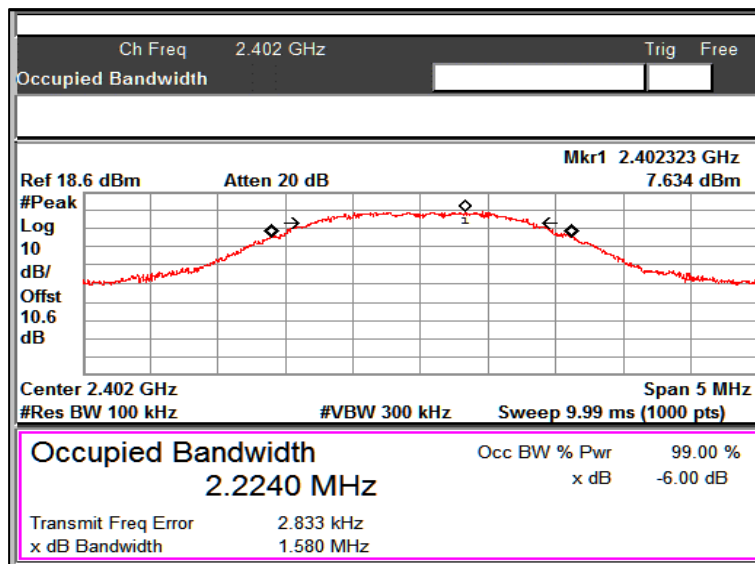

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 25 von 73
Page 25 of 73


8.4 Emissions in non-restricted frequency bands and Conducted Spurious Emission

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d) / RSS 247 Issue 2, Section 5.5
Test Method	Subclause 11.11 of ANSI C63.10
Measurement Bandwidth	100 kHz
Detector	Peak
Port of testing	Antenna port
Requirement	In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits

Test Method:

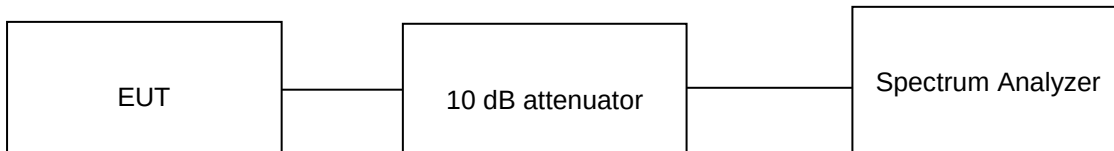

Test Condition

Normal Test Condition:

Temperature (Norm) = + 23.3 °C Voltage = 24V DC (AC – DC Adapter) Relative humidity: 63%

KDB Guidelines applied:

Measurements were made as per section 8.5 in KDB 558074 D01 15.247 Measurement Guidance v05r02.

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 26 von 73
Page 26 of 73


Test results:

Note:


1. All the losses are included during measurement and final values are mentioned in the test report
2. Final Value (dBm) = Measured Value (dBm) + Attenuator factor (10dB) + Cable loss (0.6dB)
3. This product supports additional beamforming gain / directional gain, it uses dual antennas and hence Directional gain of the dual antennas are 5 dBi and 8dBi

8.4.1 Band edge and reference plots


Channel Frequency (MHz)	Reference Value (B) (dBm)	Band edge Frequency (MHz)	Value at Band edge (A) (dBm)	A-B (dBc)	Limit (dBc)
2402	8.72	2400	-25.44	-34.16	-20
2476	9.66	2483.5	-47.13	-56.79	-20

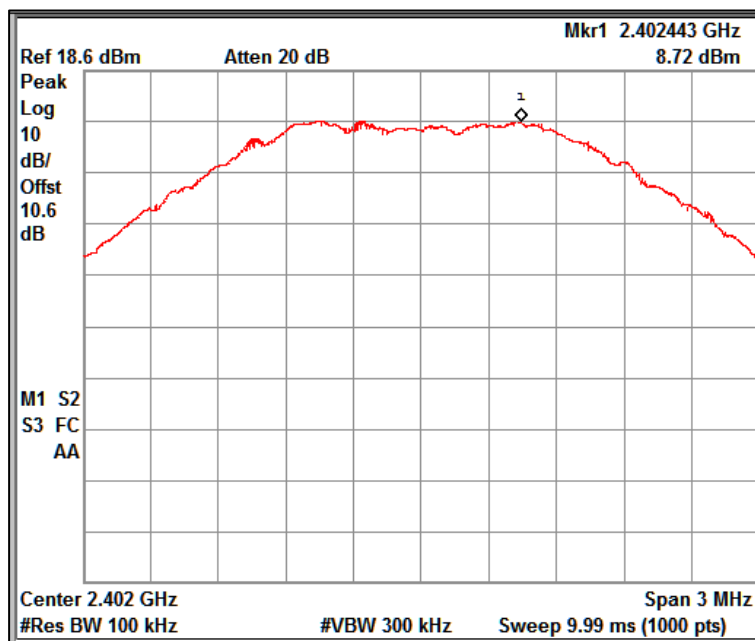

Reference plot for 2402MHz

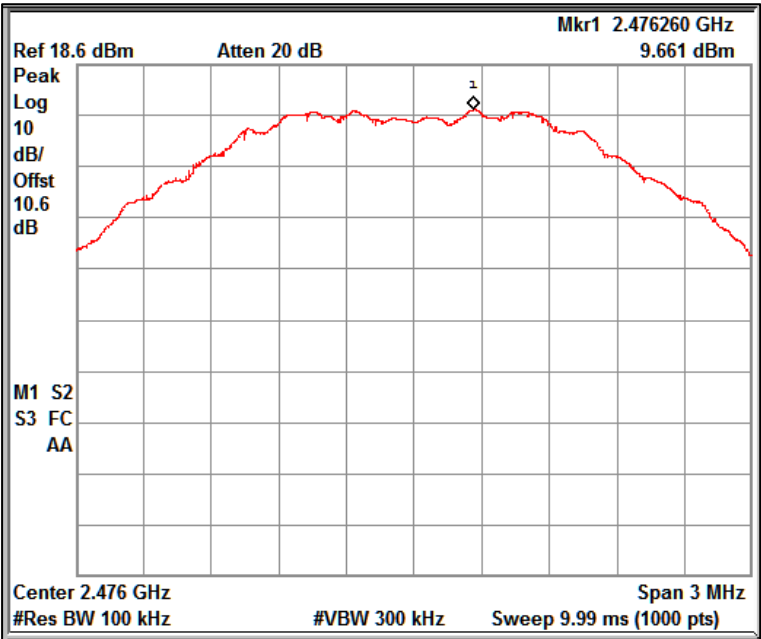

Reference plot for 2476MHz

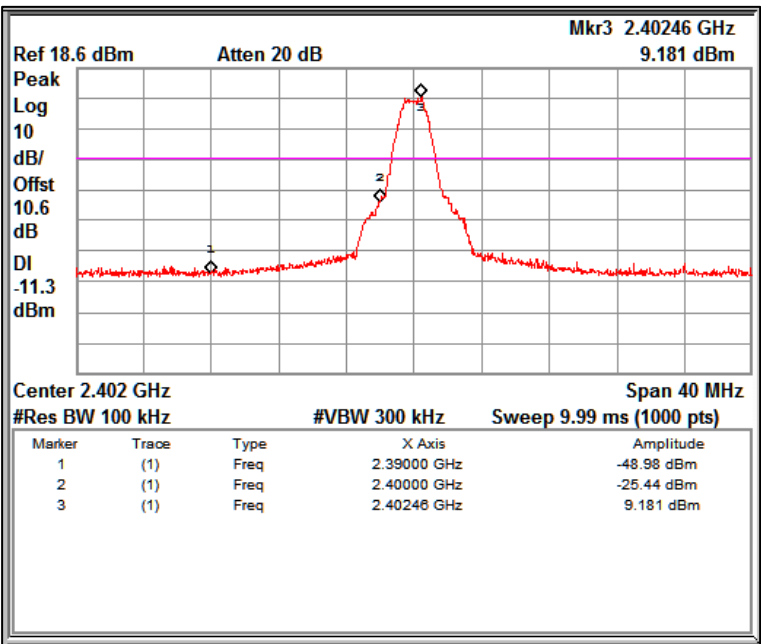


Band edge Channel Frequency 2402MHz

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000034F

Seite 28 von 73
Page 28 of 73

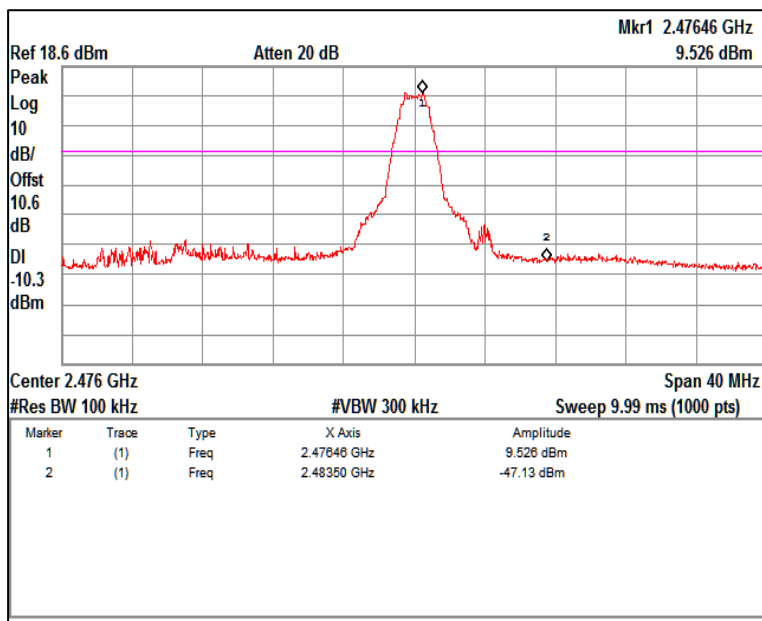


Band edge Channel Frequency 2476MHz

8.4.2 Out-Of-Band Emissions

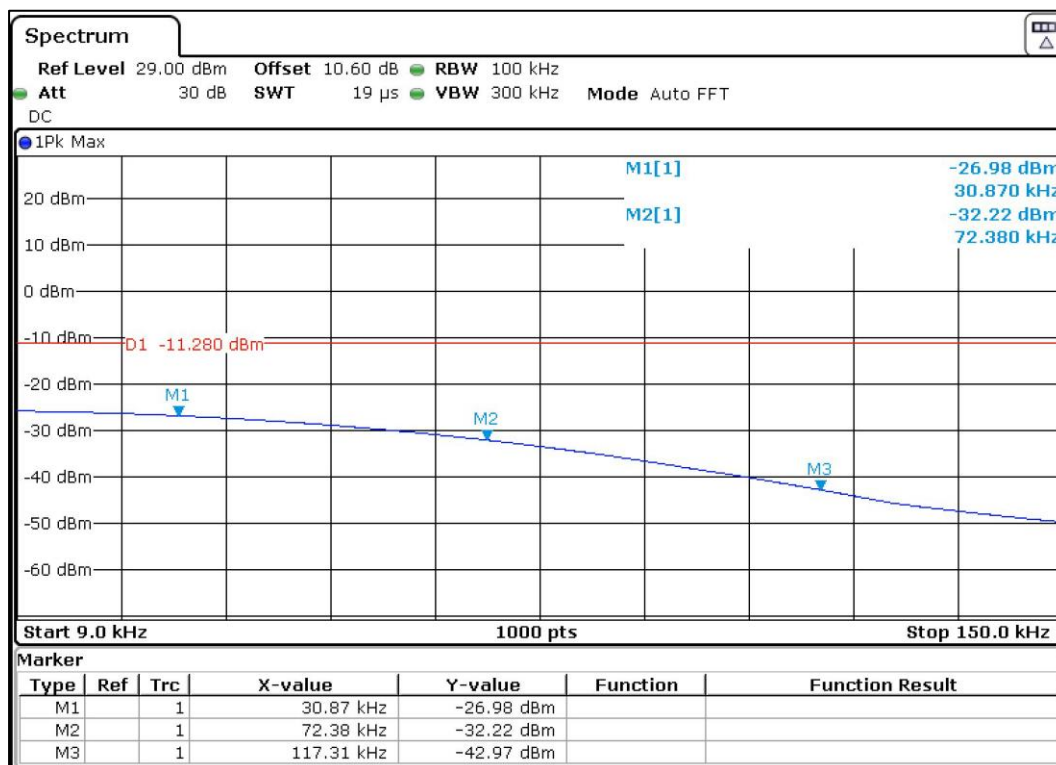

Channel Frequency 2402MHz

Frequency Range 9KHz – 150KHz

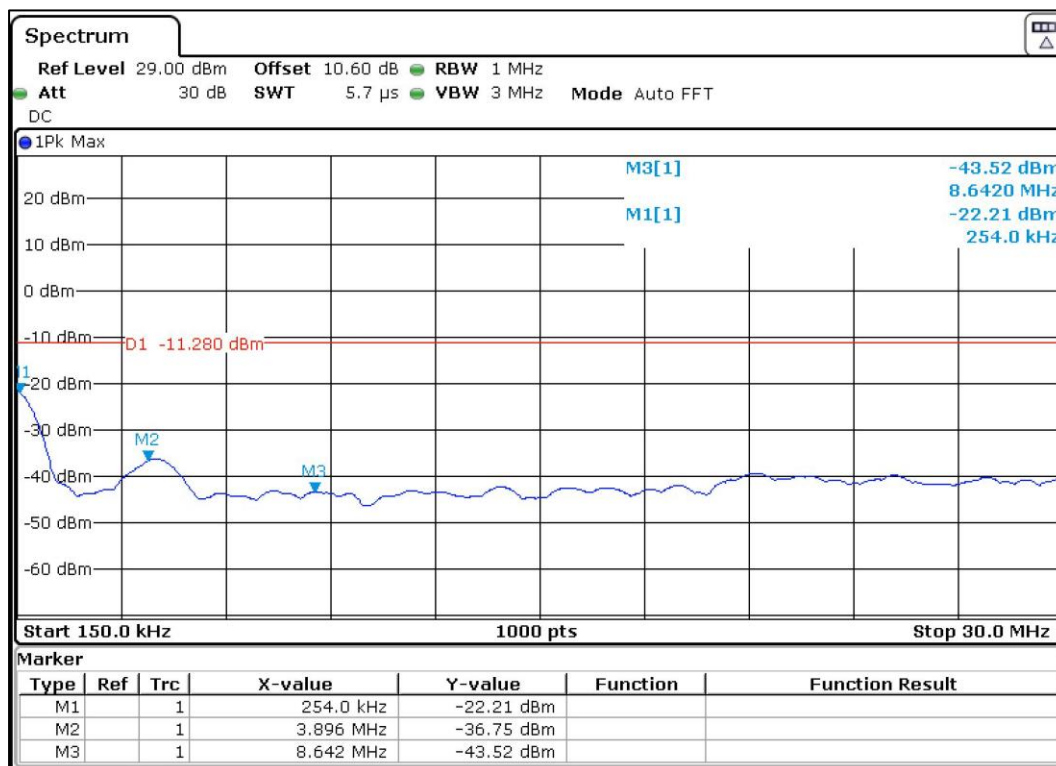

Channel Frequency 2402MHz

Frequency Range 150KHz – 30MHz


Prüfbericht - Nr.:

Test Report No.:

ULR-TC568822300000034F


Seite 30 von 73

Page 30 of 73

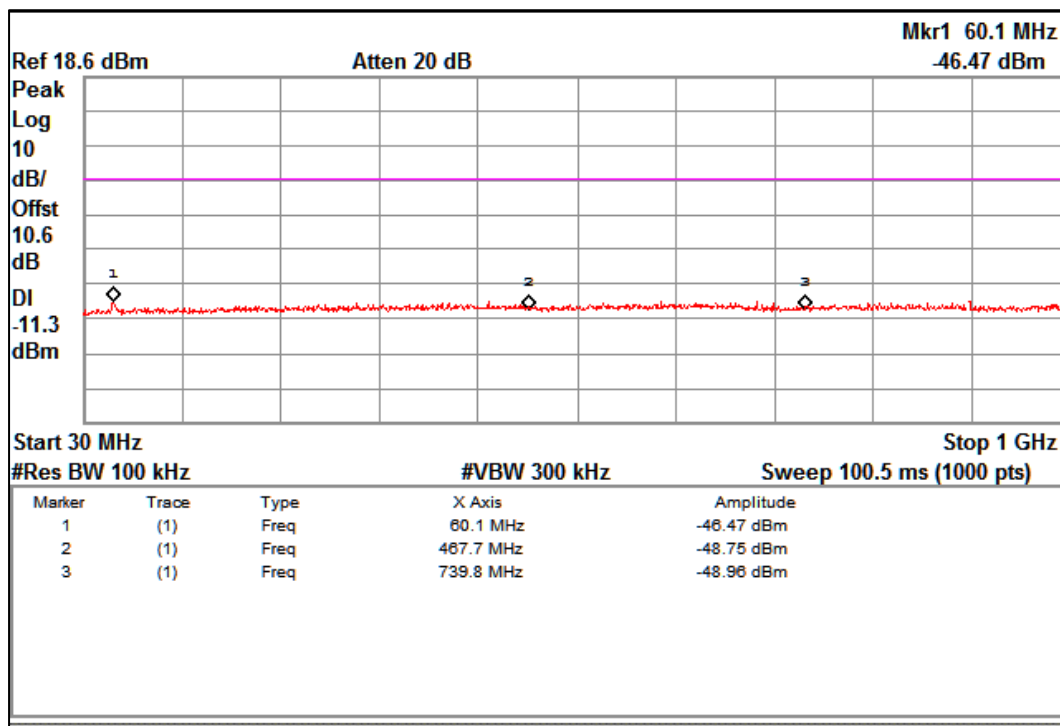

Channel Frequency 2402MHz

Frequency Range 30MHz – 1GHz

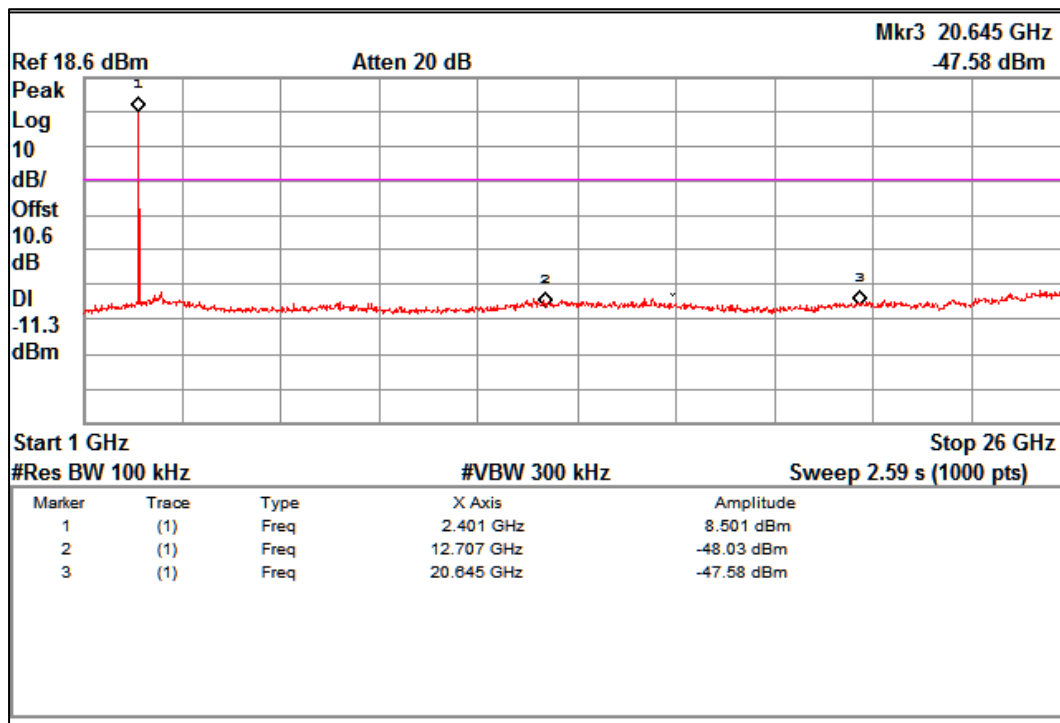


Channel Frequency 2402MHz

Frequency Range 1GHz – 26GHz

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000034F

Seite 31 von 73
Page 31 of 73

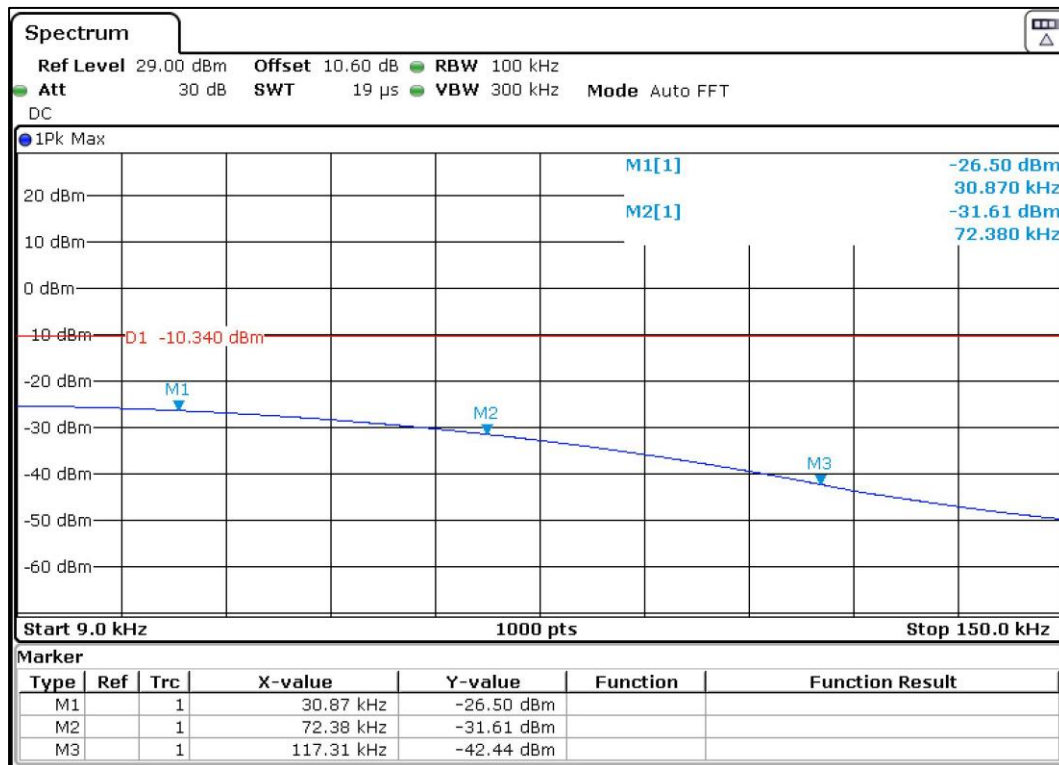

Channel Frequency 2476MHz

Frequency Range 9KHz – 150KHz

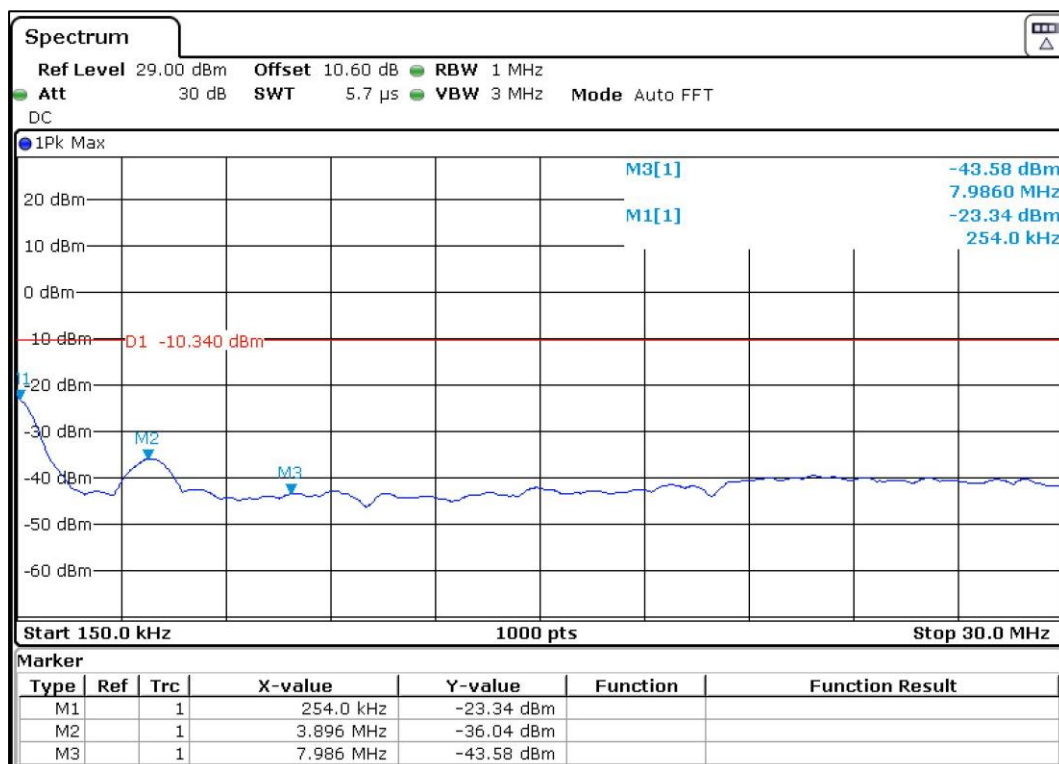


Channel Frequency 2476MHz

Frequency Range 150KHz – 30MHz

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000034F

Seite 32 von 73
Page 32 of 73

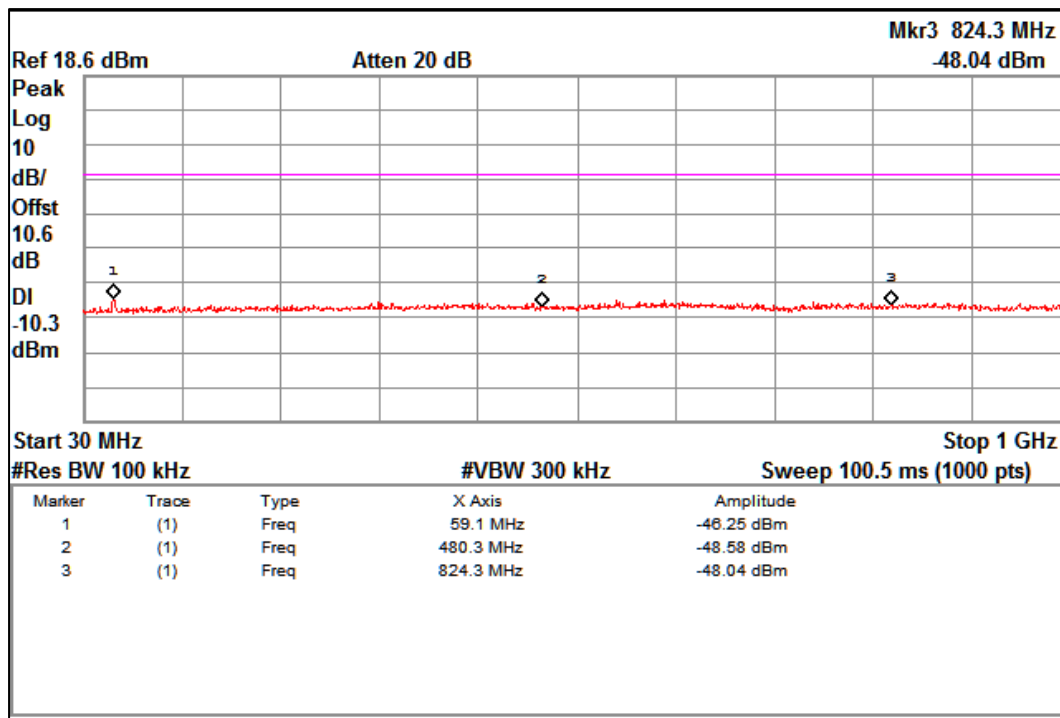

Channel Frequency 2476MHz

Frequency Range 30MHz – 1GHz

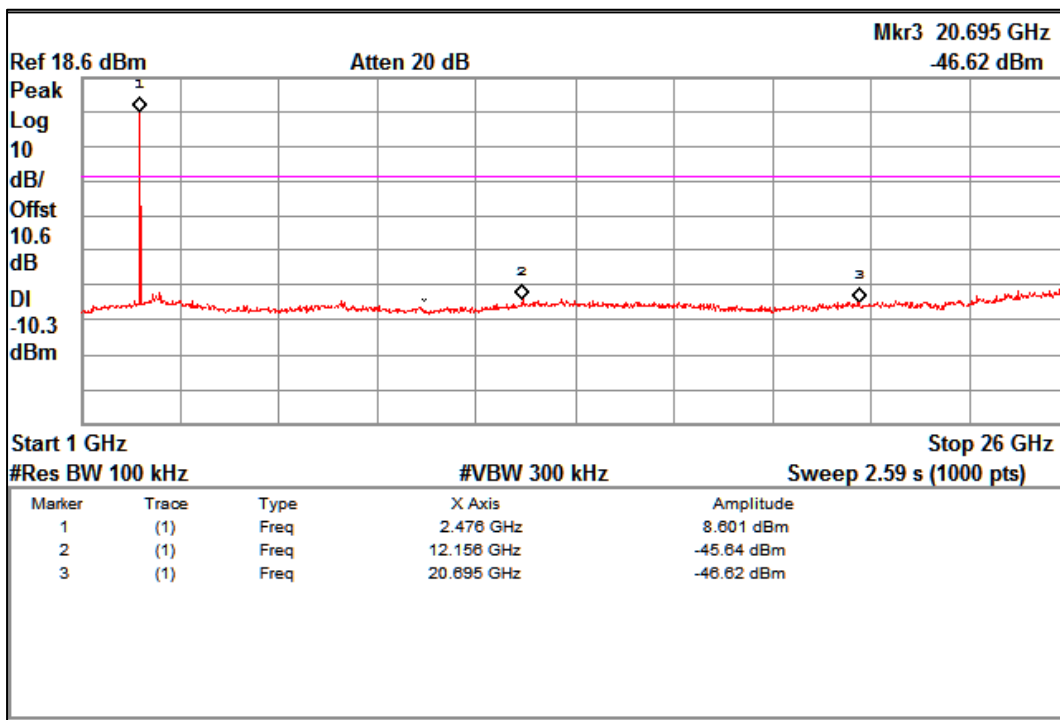

Channel Frequency 2476MHz

Frequency Range 1GHz – 26GHz

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 33 von 73
Page 33 of 73

8.5 Spurious Radiated Emissions & Restricted Bands of Operation

Result

Pass

Test Specification	FCC part 15 Subpart C 15.247 (d) / (15.209 & 15.205) RSS-Gen Issue 5, Section 8.9 /8.10
Test Method	ANSI C63.10
Measurement Location	Semi Anechoic Chamber 30MHz - 1 GHz Fully Anechoic Chamber 1 GHz - 40GHz
Measurement Bandwidth	100 kHz for frequency range < 1GHz 1 MHz for Frequency range >1GHz
Detector	Refer remarks below
Measuring Distance	3 m
Requirement	As per the limits mentioned in the below table
Test setup	Refer TEST METHODOLOGY

Table 6: Transmitter limits for Radiated emission

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Distance of Measurement (m)
0.009 – 0.490	2400/F(kHz)	48.50 – 13.80	300*
0.490 – 1.705	24000/F(kHz)	33.80 – 23.00	30*
1.705 -30	30	29.54	30*
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Remark: * The limit shows in the table above of frequency range 0.009 – 0.490, 0.490 – 1.705 MHz and 1.705-30MHz is at 300 meter, 30 meter and 30 meter range respectively, which corresponds to 128.51 – 93.80, 73.80 – 62.96 and 69.54 dBμV/m at 3m range by extrapolation calculation and the measurement of loop antenna.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

Test Conditions:

Temperature (Norm) = + 21.8 °C

Voltage = 24V DC (AC – DC Adapter)

Relative humidity: 62%

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 34 von 73
Page 34 of 73

Test results:



Note: All the losses are included during measurement and final values are mentioned in the test report. Refer TEST METHODOLOGY for more details

Test results for frequency range 9kHz – 30MHz

No emissions found in frequency range 9 kHz to 30 MHz, and measured levels are below 20dB from the limit line, hence not reported

Table 7: Test results for frequency range 30MHz – 1GHz


Antenna Polarization	Measured Frequency (MHz)	Measured Emission (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Vertical	30.15	27.70	40.00	-12.30
	39.84	22.20	40.00	-17.80
	48.96	21.20	40.00	-18.80
	61.38	30.20	40.00	-9.80
	72.00	21.70	40.00	-18.30
	133.23	16.70	43.50	-26.80
	221.18	22.70	46.00	-23.30
	536.03	29.20	46.00	-16.80
	600.20	36.70	46.00	-9.30
	728.69	36.00	46.00	-10.00
	821.75	33.00	46.00	-13.00
Horizontal	63.87	19.80	40.00	-20.20
	72.03	16.90	40.00	-23.10
	133.56	13.50	43.50	-30.00
	168.00	13.30	43.50	-30.20
	221.18	22.20	46.00	-23.80
	600.02	32.10	46.00	-13.90
	768.32	34.00	46.00	-12.00
	821.48	35.80	46.00	-10.20

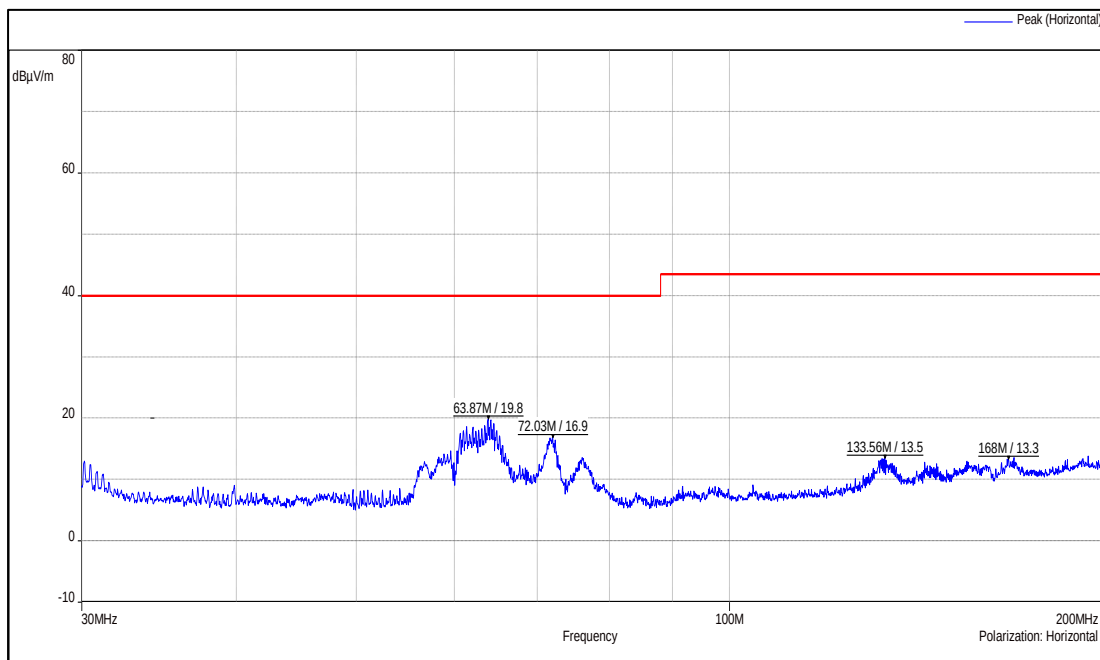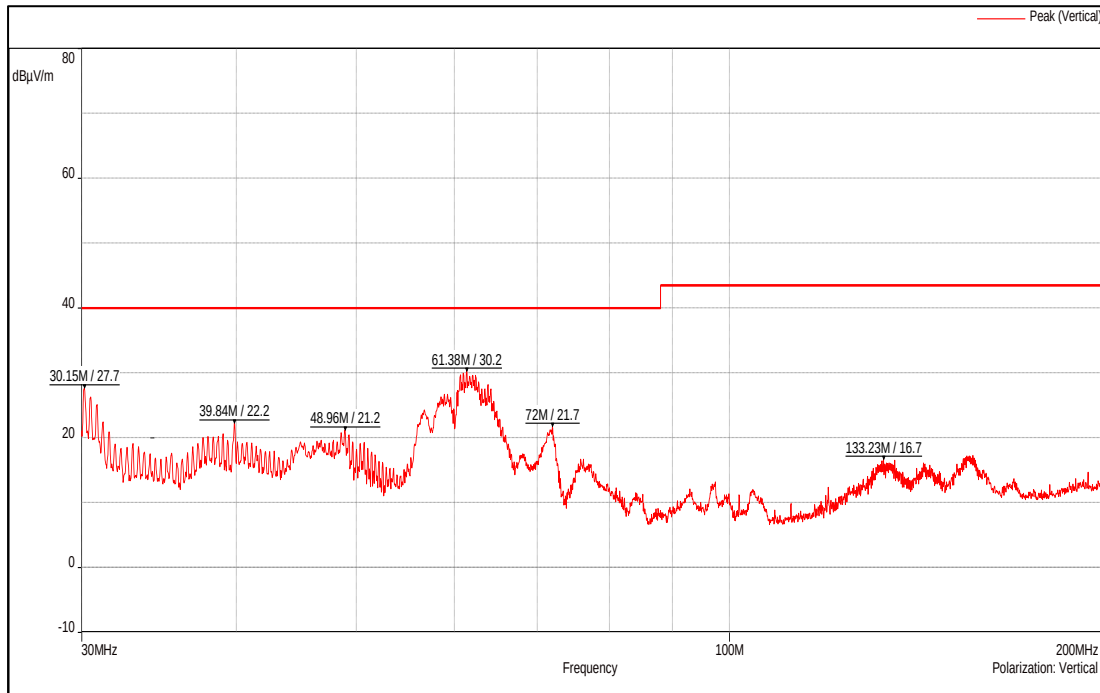

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000034F

Seite 36 von 73
Page 36 of 73

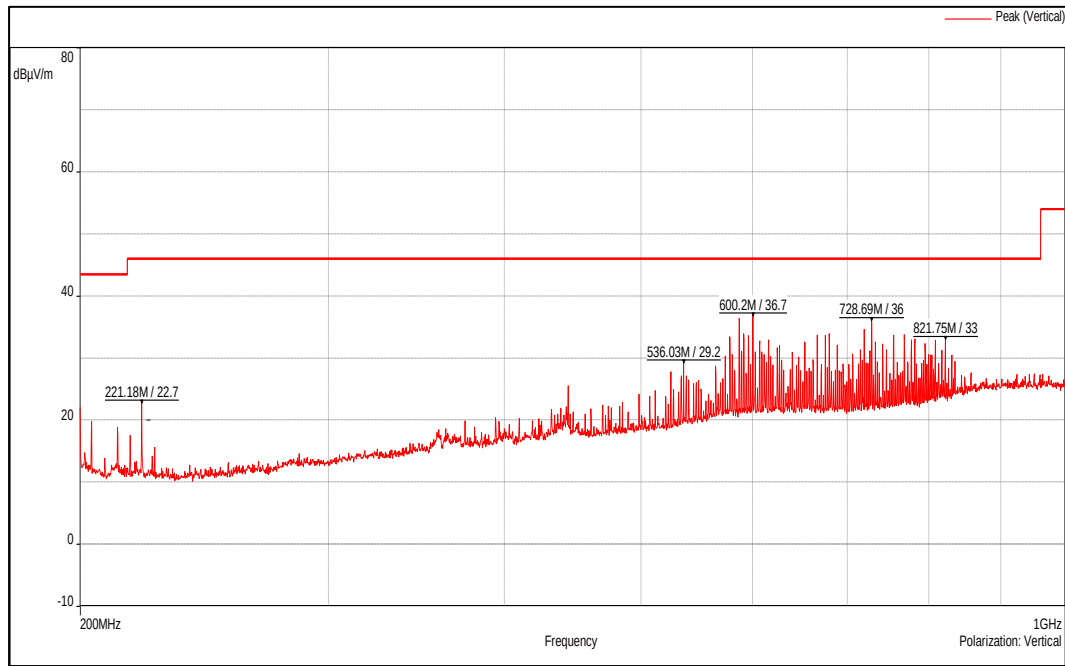

Channel Frequency 200MHz – 1GHz

Polarization Vertical

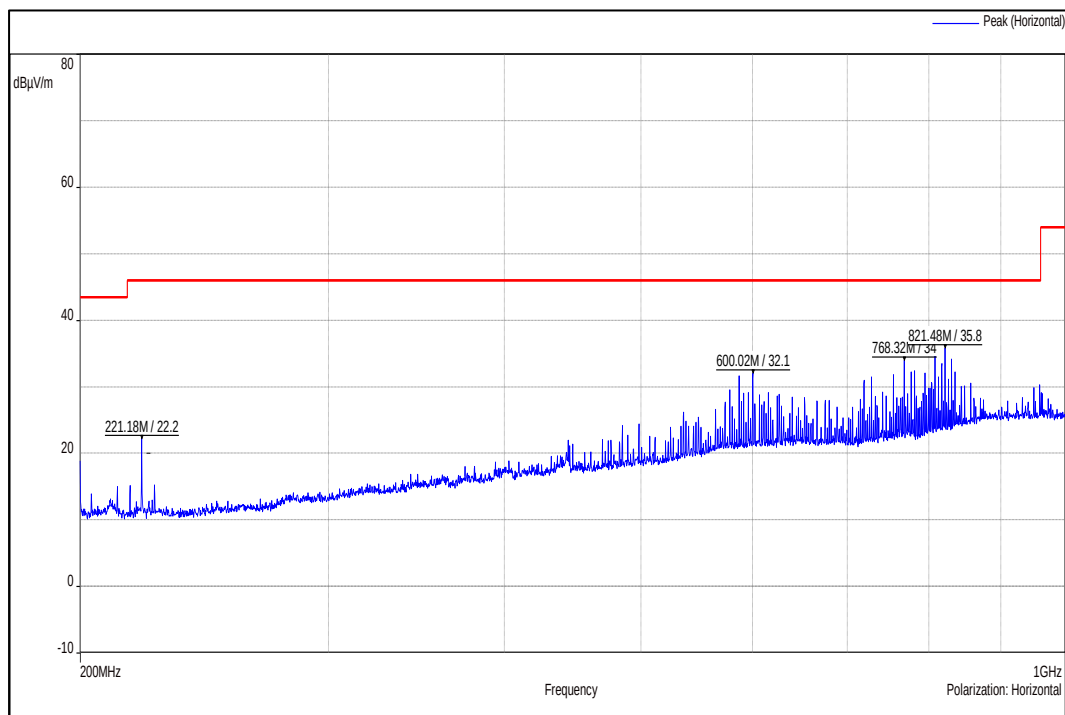

Channel Frequency 200MHz – 1GHz

Polarization Horizontal

Prüfbericht - Nr.:

Test Report No.:

ULR-TC568822300000034F

Seite 37 von 73


Page 37 of 73

Table 8: Test results for the frequencies above 1GHz

AIR-ANT2450V-N (+5dBi gain):


Channel Frequency (MHz)	Frequency (MHz)	Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2402	2402(Pk)	Vertical	114.67	-	-
	2402(Av)		106.09	-	-
	2390(Pk)		57.74	74*	-16.26
	2390(Av)		40.62	54*	-13.38
	4804(Pk)		42.58	74	-31.42
	4804(Av)		32.27	54	-21.73
	7206(Pk)		46.83	74	-27.17
	7206(Av)		34.93	54	-19.07
	2402(Pk)	Horizontal	93.50	-	-
	2402(Av)		84.42	-	-
	2390(Pk)		40.62	74*	-33.38
	2390(Av)		25.40	54*	-28.60
	4804(Pk)		43.76	74	-30.24
	4804(Av)		29.86	54	-24.14
	7206(Pk)		47.05	74	-26.95
	7206(Av)		34.97	54	-19.03
2476	2476(Pk)	Vertical	113.77	-	-
	2476(Av)		105.46	-	-
	2483.5(Pk)		64.08	74*	-9.92
	2483.5(Av)		45.08	54*	-8.92
	4952(Pk)		41.61	74	-32.39
	4952(Av)		29.49	54	-24.51
	7428(Pk)		47.07	74	-26.93
	7428(Av)		34.99	54	-19.01
	2476(Pk)	Horizontal	94.13	-	-
	2476(Av)		85.16	-	-
	2483.5(Pk)		44.71	74*	-29.29
	2483.5(Av)		27.71	54*	-26.29
	4952(Pk)		41.12	74	-32.88
	4952(Av)		29.38	54	-24.62
	7428(Pk)		47.22	74	-26.78
	7428(Av)		34.94	54	-19.06

Pk: Peak Detector;
Av: Average Detector;
*→ Restricted Bands
- → Fundamental Frequency

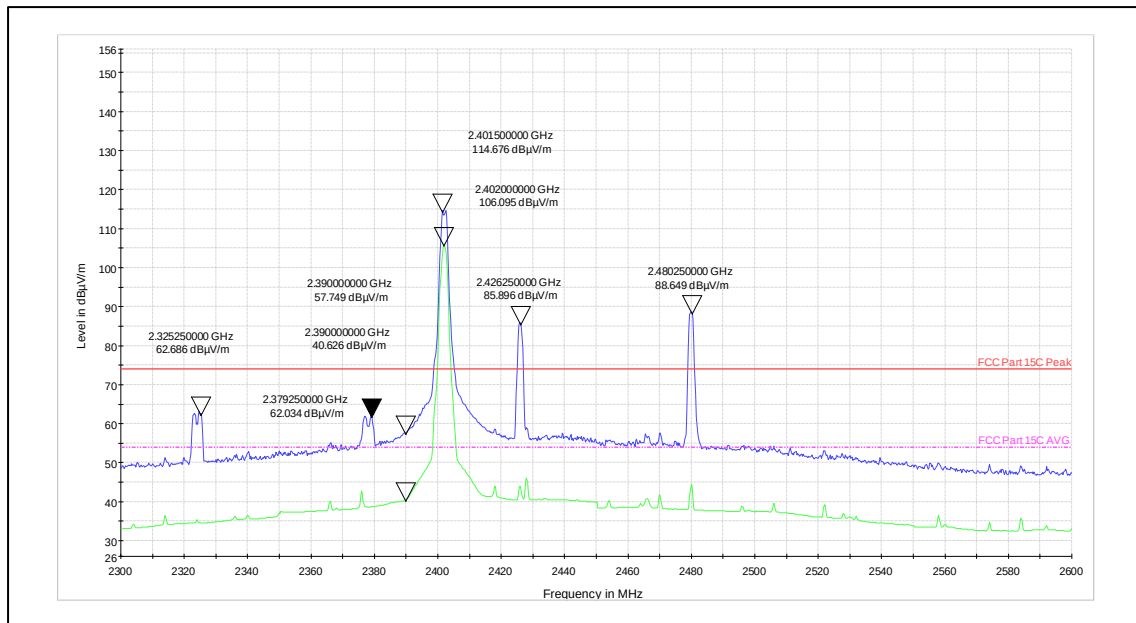


Channel Frequency: 2402MHz

Polarization: Vertical

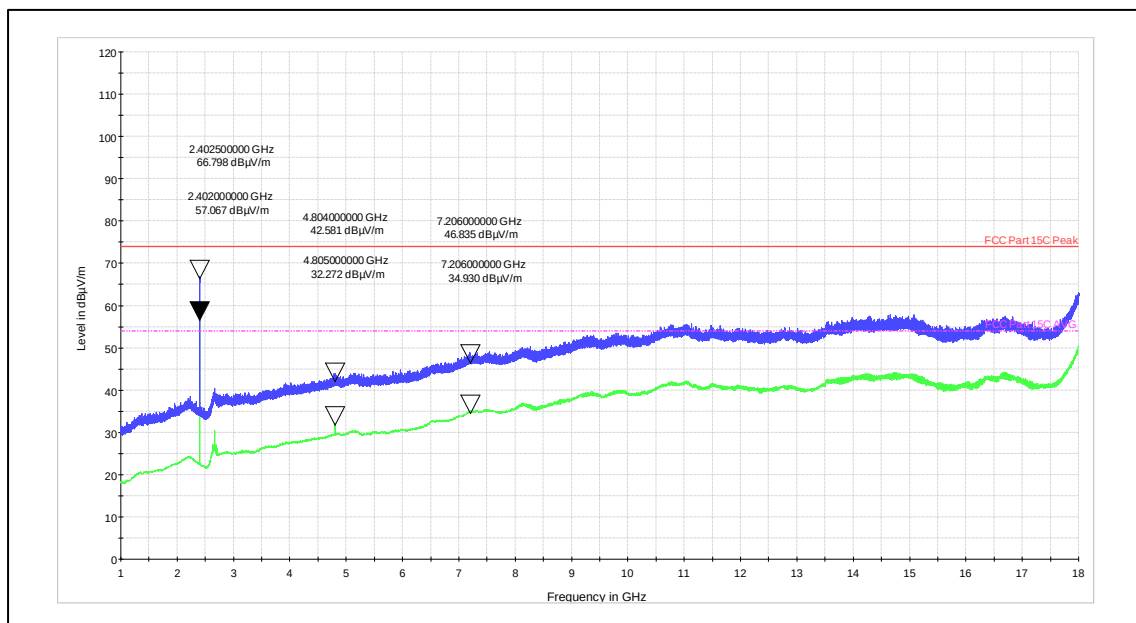


Channel Frequency: 1GHz -18GHz

Polarization: Vertical

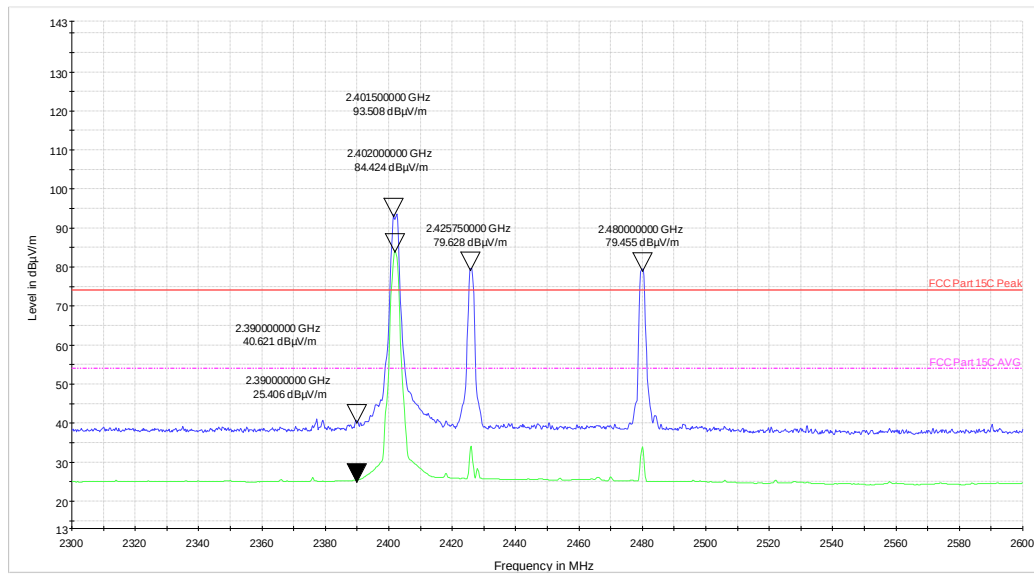


Channel Frequency: 2402MHz

Polarization: Horizontal

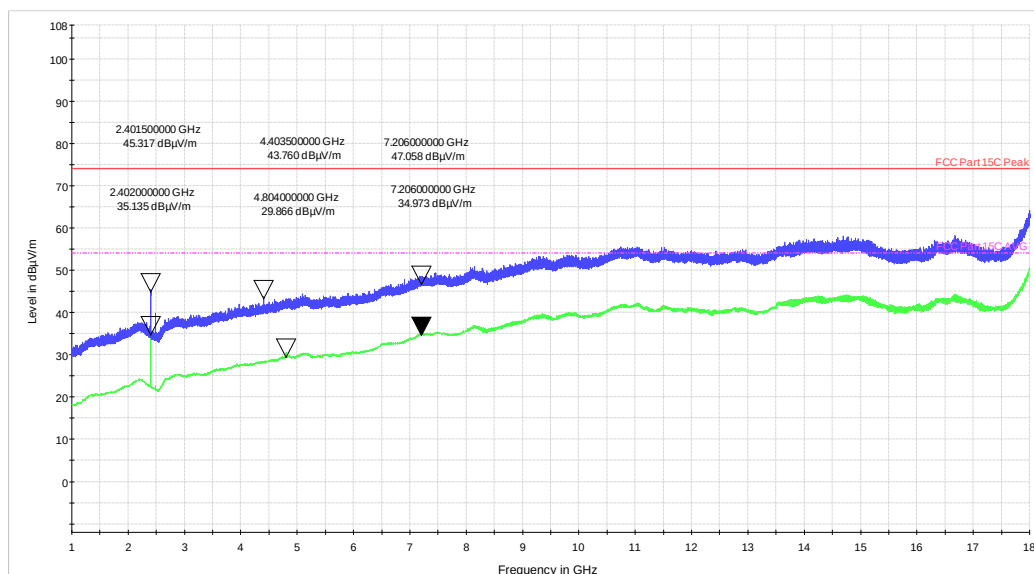


Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

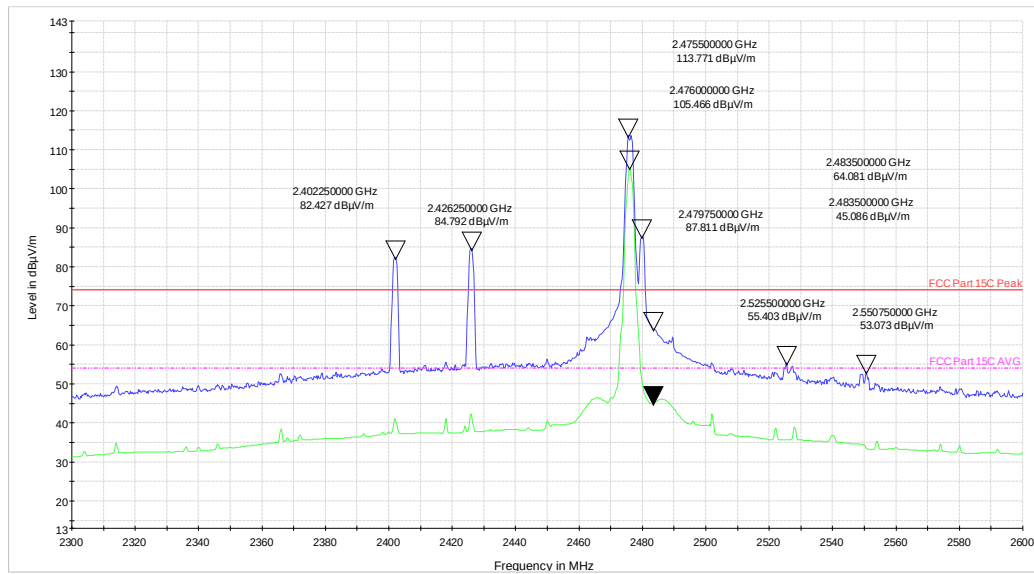


Channel Frequency: 2476MHz

Polarization: vertical

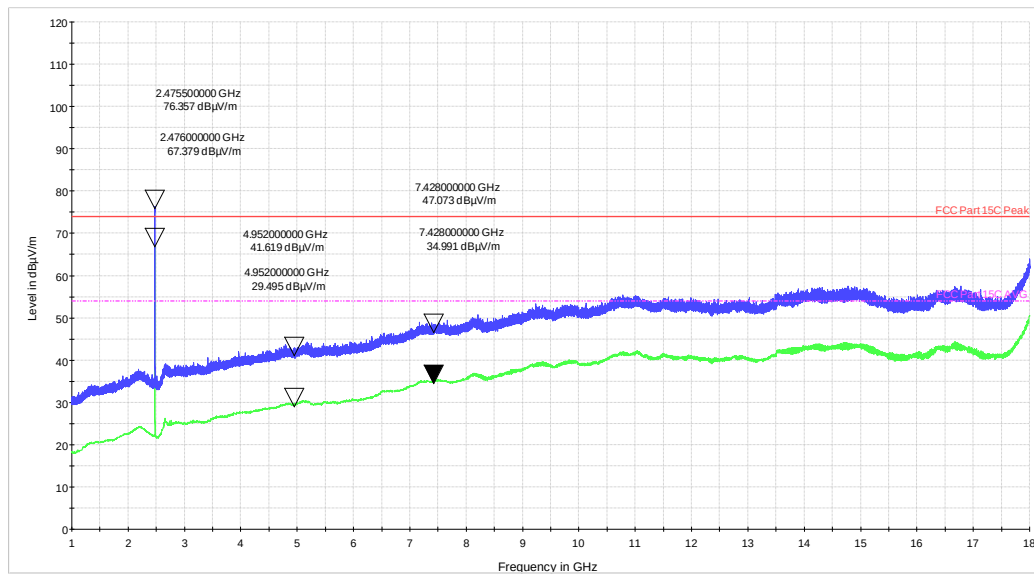


Channel Frequency: 1GHz -18GHz

Polarization: vertical

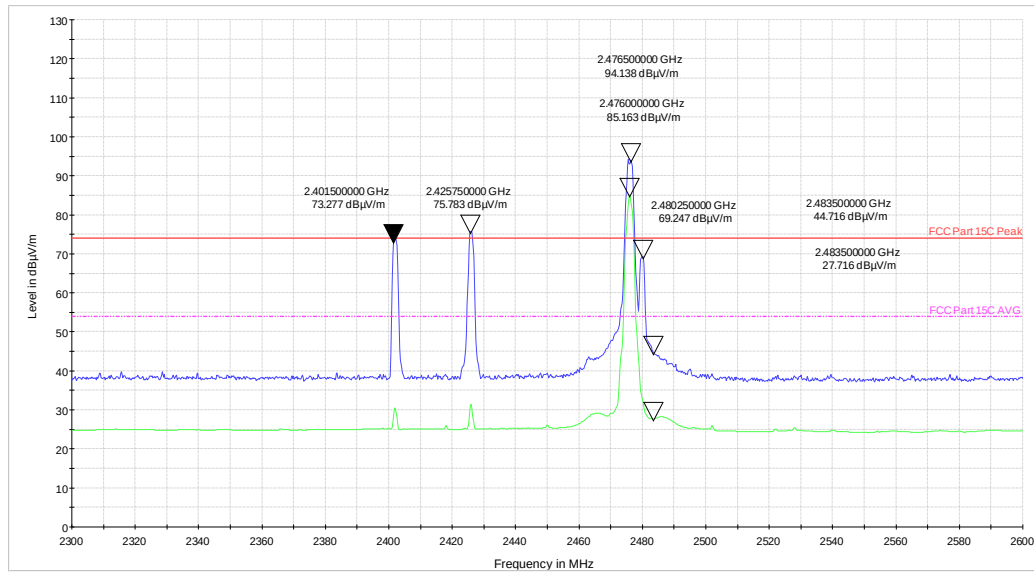


Channel Frequency: 2476MHz

Polarization: Horizontal

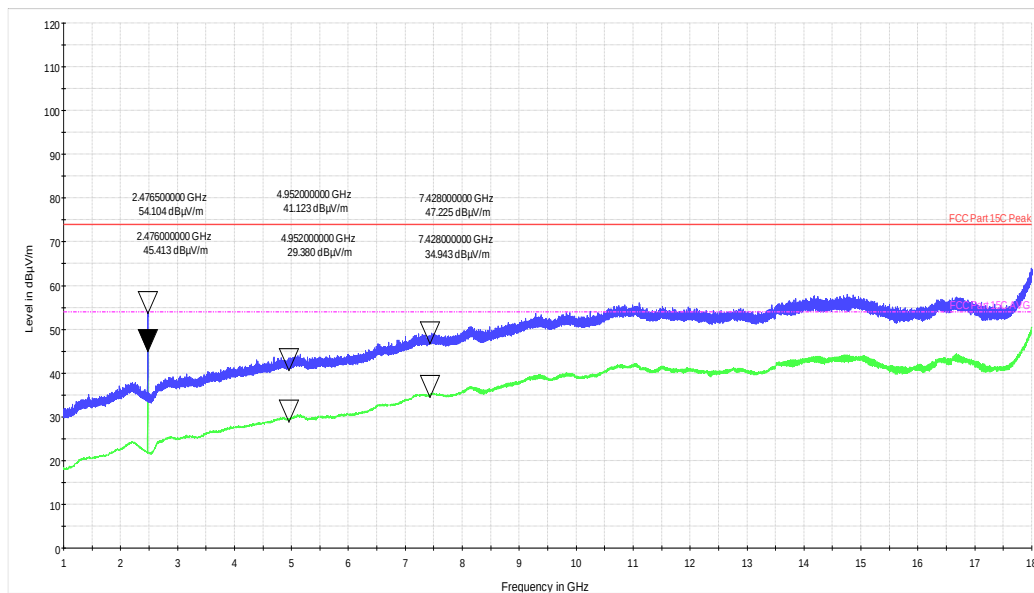


Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

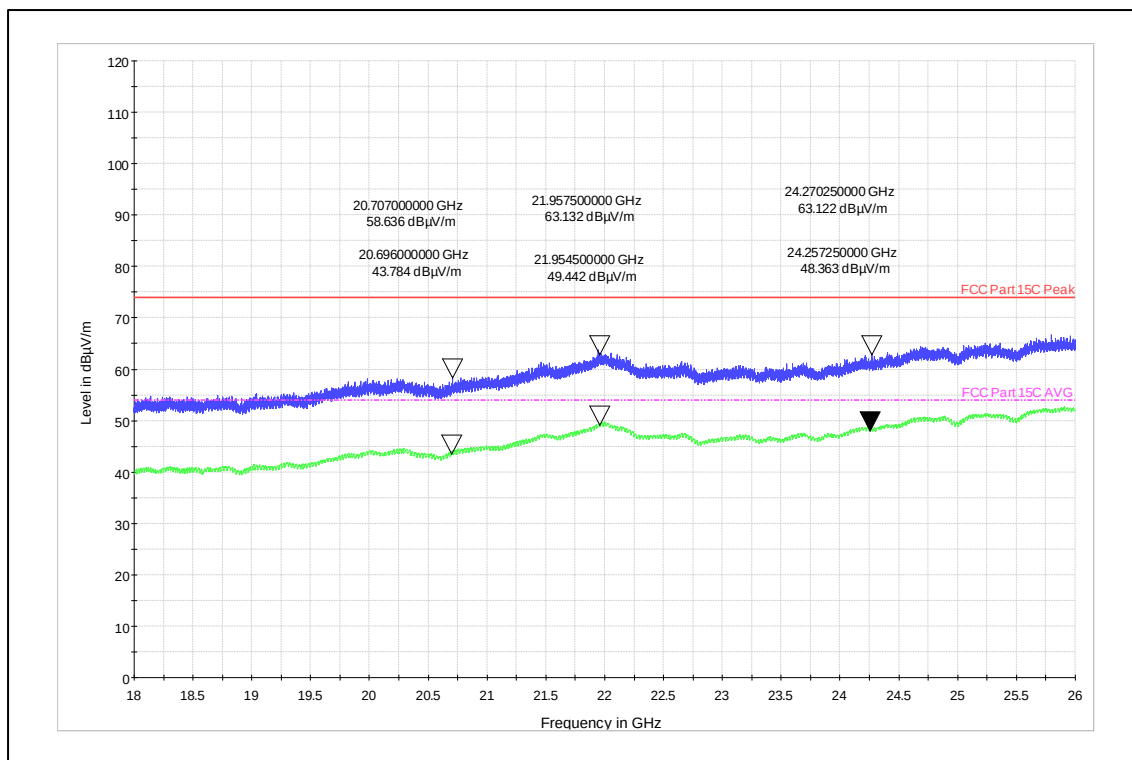

Channel Frequency: 18GHz -26GHz

Polarization: Vertical

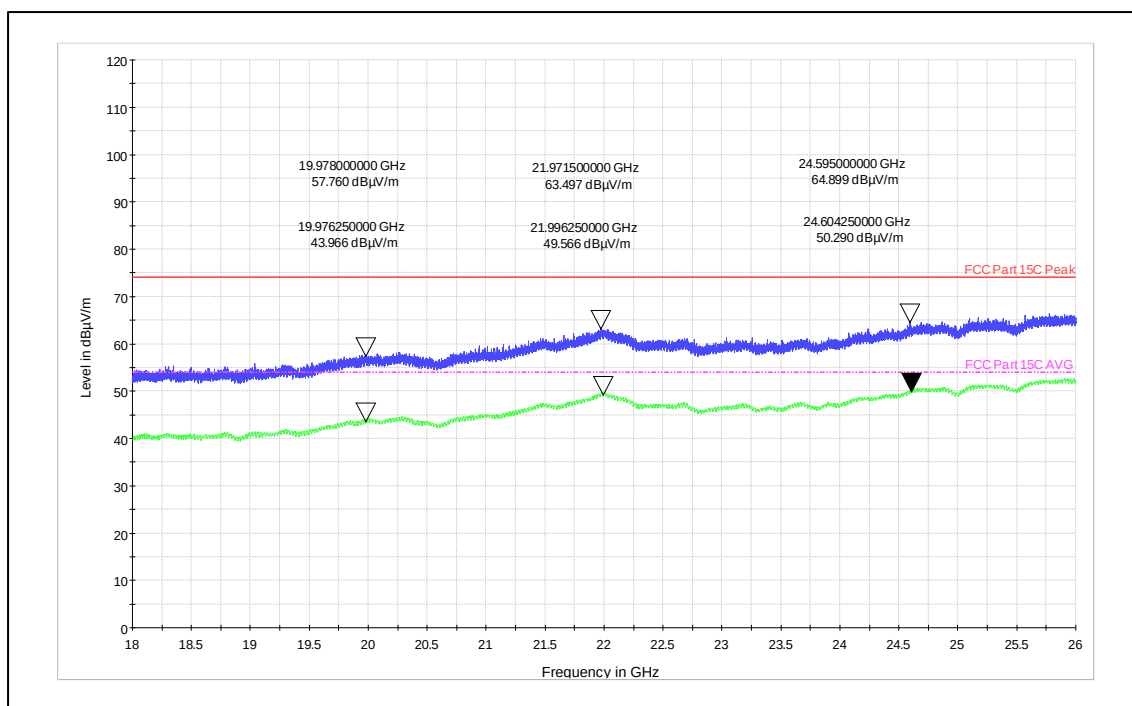

Channel Frequency: 18GHz -26GHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000034F

Seite 43 von 73
Page 43 of 73

AIR-ANT2480V-N:


Channel Frequency (MHz)	Frequency (MHz)	Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2402	2402(Pk)	Vertical	113.52	-	-
	2402(Av)		104.64	-	-
	2390(Pk)		58.26	74*	-15.74
	2390(Av)		39.59	54*	-14.41
	4804(Pk)		41.59	74	-32.41
	4804(Av)		29.70	54	-24.30
	7206(Pk)		46.69	74	-27.31
	7206(Av)		34.79	54	-19.21
	2402(Pk)	Horizontal	95.12	-	-
	2402(Av)		86.12	-	-
	2390(Pk)		42.19	74*	-31.81
	2390(Av)		26.22	54*	-27.78
	4804(Pk)		42.00	74	-32.00
	4804(Av)		29.71	54	-24.29
	7206(Pk)		47.61	74	-26.39
	7206(Av)		34.81	54	-19.19
2476	2476(Pk)	Vertical	113.78	-	-
	2476(Av)		105.35	-	-
	2483.5(Pk)		64.00	74*	-10.00
	2483.5(Av)		44.57	54*	-9.43
	4952(Pk)		41.09	74	-32.91
	4952(Av)		29.36	54	-24.64
	7428(Pk)		46.71	74	-27.29
	7428(Av)		34.86	54	-19.14
	2476(Pk)	Horizontal	98.54	-	-
	2476(Av)		89.50	-	-
	2483.5(Pk)		49.34	74*	-24.66
	2483.5(Av)		30.68	54*	-23.32
	4952(Pk)		42.03	74	-31.97
	4952(Av)		29.35	54	-24.65
	7428(Pk)		47.48	74	-26.52
	7428(Av)		34.86	54	-19.14

Pk: Peak Detector;
Av: Average Detector;
*→ Restricted Bands
- → Fundamental Frequency

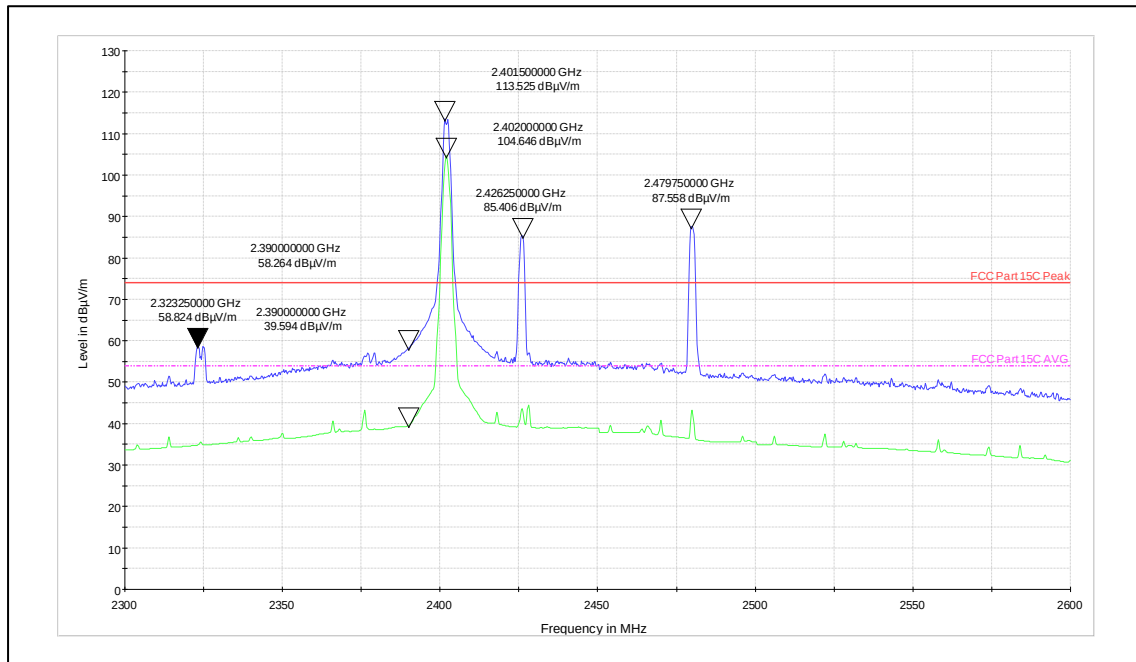


Channel Frequency: 2402MHz

Polarization: Vertical

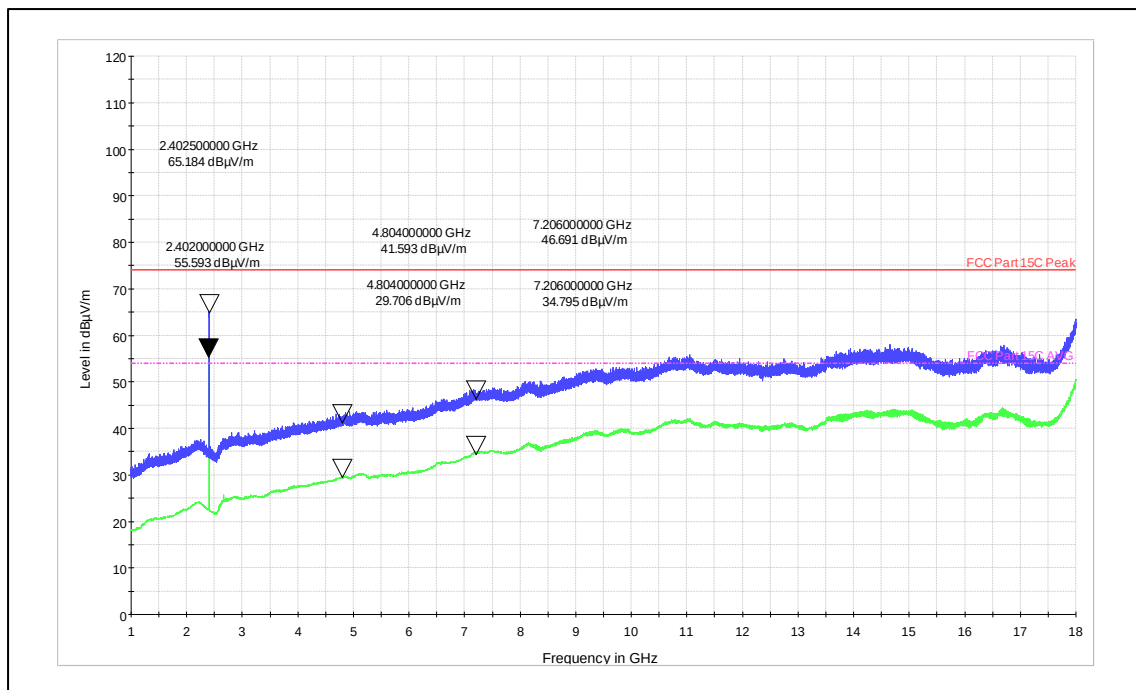


Channel Frequency: 1GHz -18GHz

Polarization: Vertical

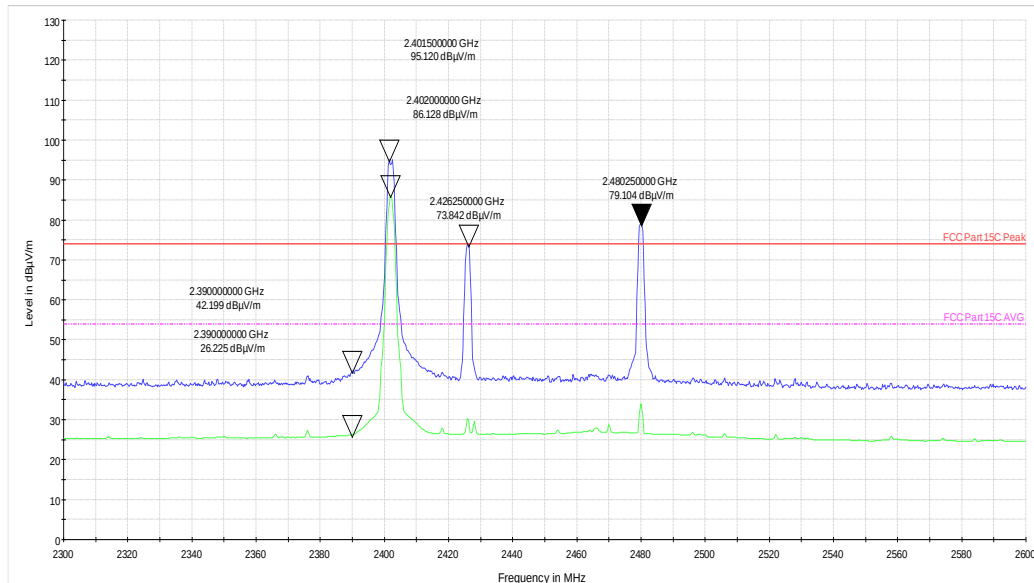


Channel Frequency: 2402MHz

Polarization: Horizontal

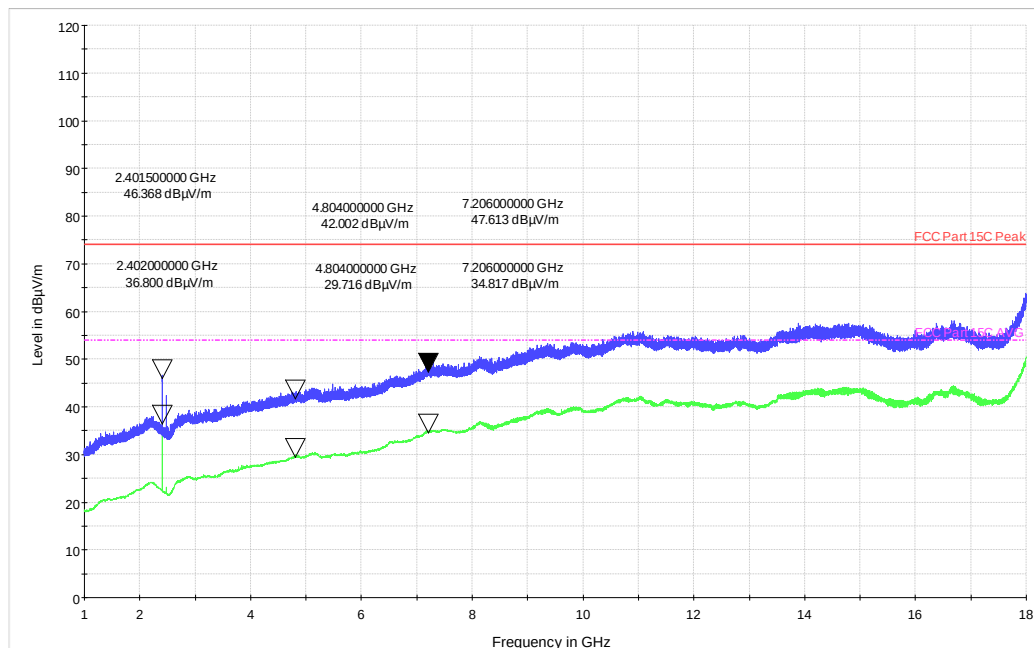


Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

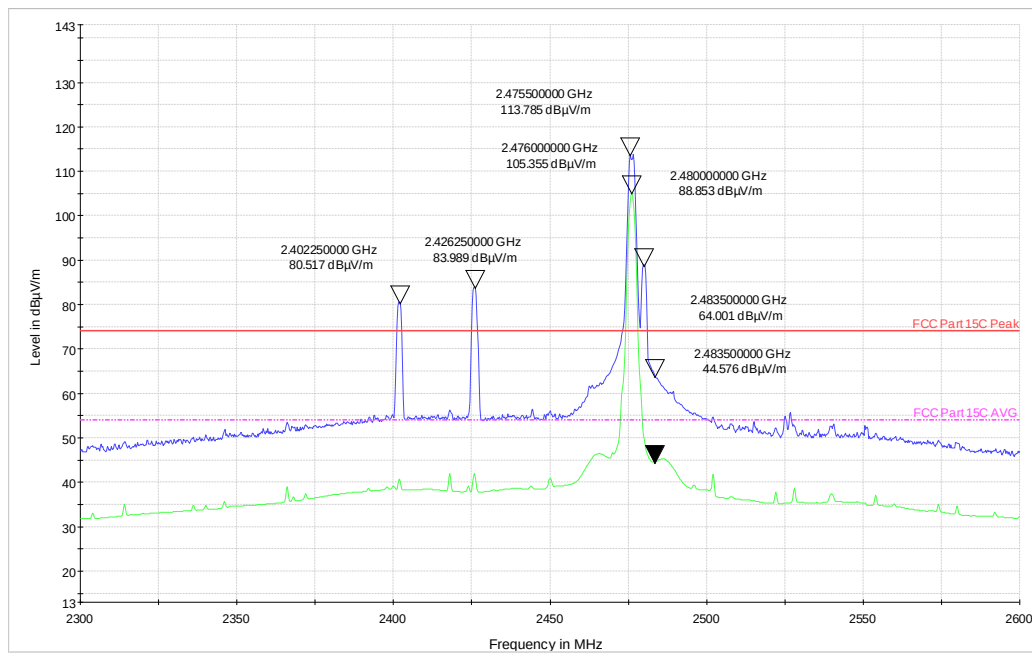


Channel Frequency: 2476MHz

Polarization: vertical

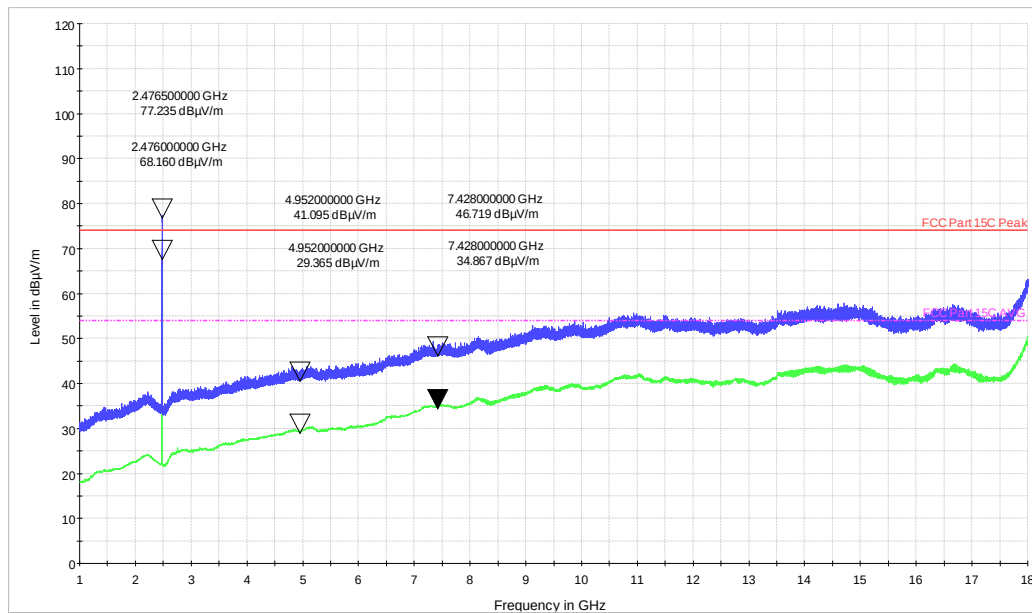


Channel Frequency: 1GHz -18GHz

Polarization: vertical

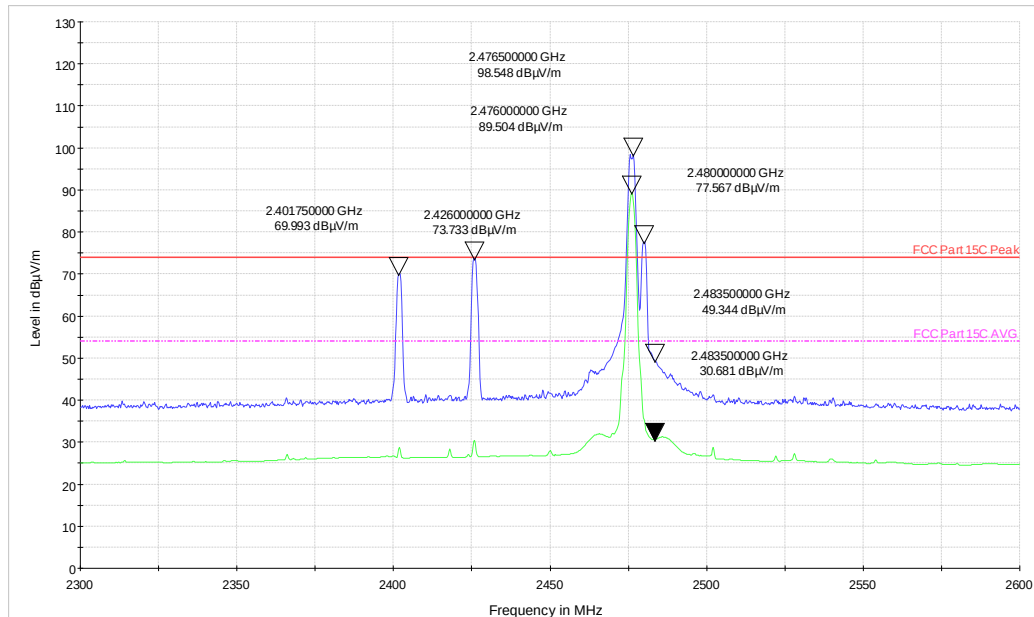


Channel Frequency: 2476MHz

Polarization: Horizontal

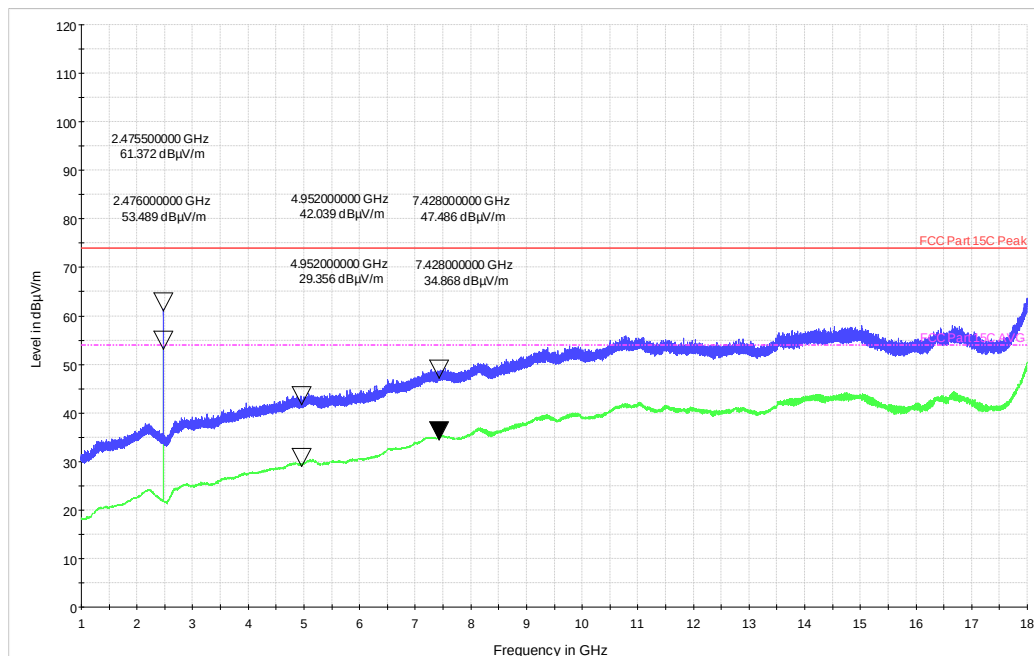


Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

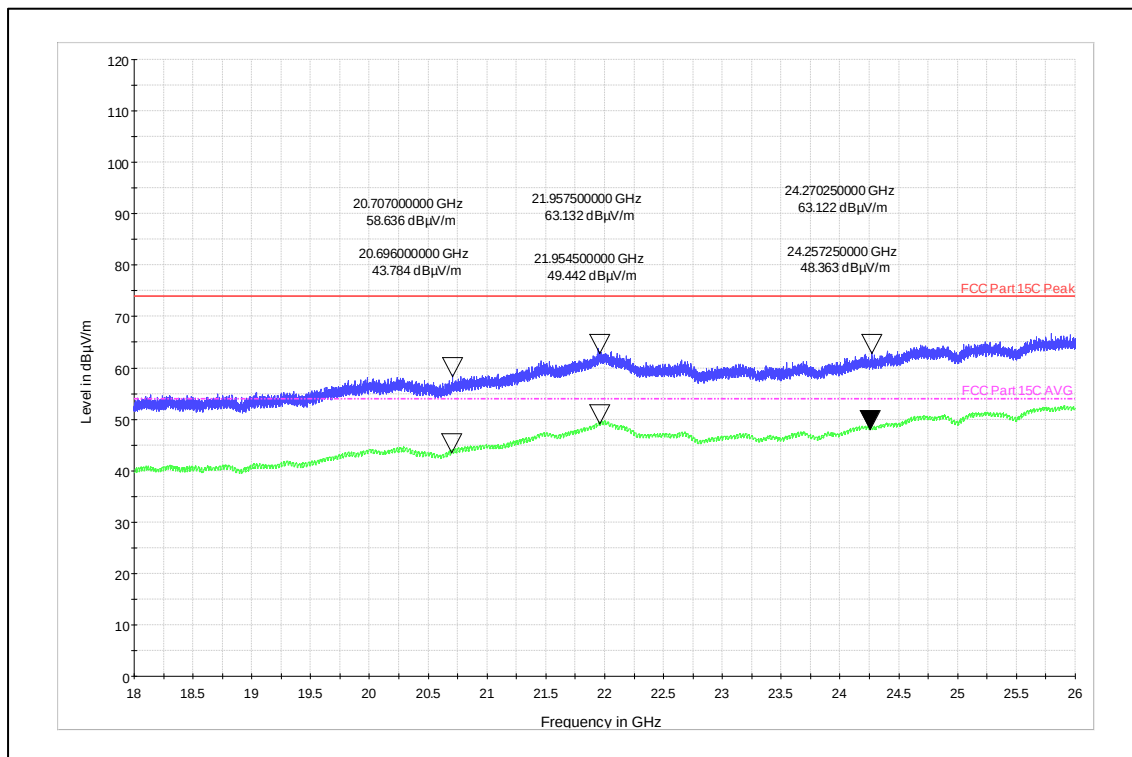

Channel Frequency: 18GHz -26GHz

Polarization: Vertical

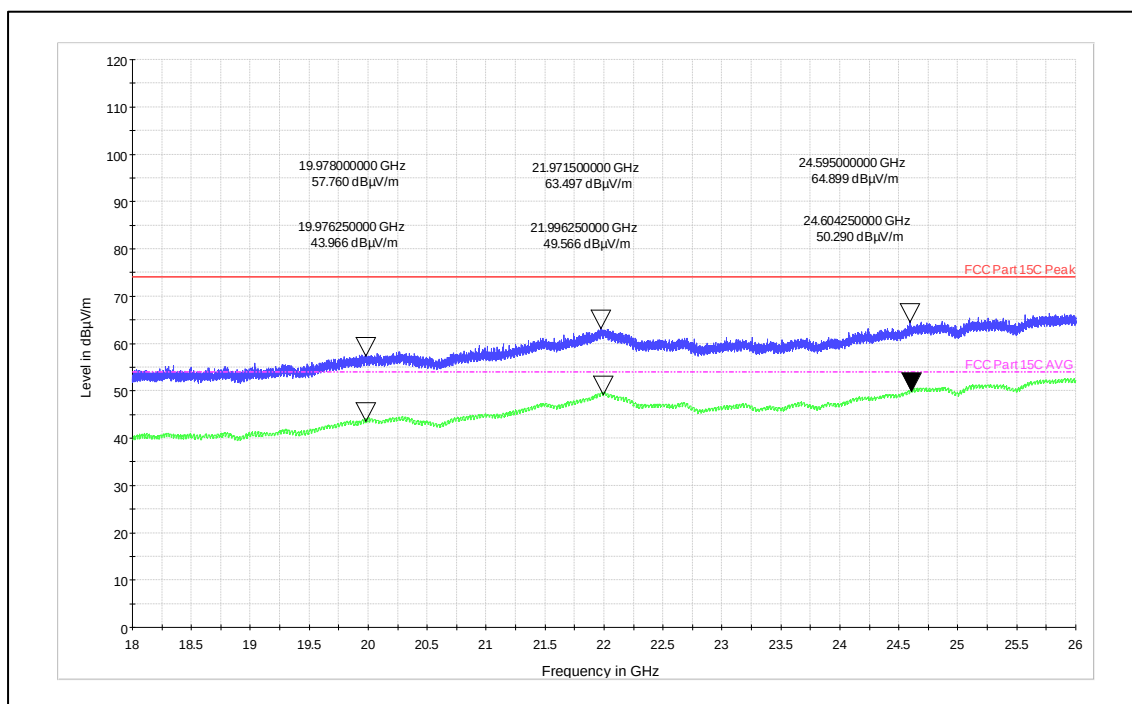

Channel Frequency: 18GHz -26GHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000034F

Seite 49 von 73
Page 49 of 73

Laird Technologies-OD24M-5:


Channel Frequency (MHz)	Frequency (MHz)	Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2402	2402(Pk)	Vertical	113.44	-	-
	2402(Av)		104.45	-	-
	2390(Pk)		57.57	74*	-16.43
	2390(Av)		41.29	54*	-12.71
	4804(Pk)		42.02	74	-31.98
	4804(Av)		29.56	54	-24.44
	7206(Pk)		47.02	74	-26.98
	7206(Av)		34.65	54	-19.35
	2402(Pk)	Horizontal	89.19	-	-
	2402(Av)		80.07	-	-
	2390(Pk)		37.60	74*	-36.40
	2390(Av)		24.55	54*	-29.45
	4804(Pk)		41.98	74	-32.02
	4804(Av)		29.34	54	-24.66
	7206(Pk)		46.90	74	-27.10
	7206(Av)		34.60	54	-19.40
2476	2476(Pk)	Vertical	111.78	-	-
	2476(Av)		103.54	-	-
	2483.5(Pk)		61.18	74*	-12.82
	2483.5(Av)		42.79	54*	-11.21
	4952(Pk)		41.81	74	-32.19
	4952(Av)		29.39	54	-24.61
	7428(Pk)		47.54	74	-26.46
	7428(Av)		34.57	54	-19.43
	2476(Pk)	Horizontal	88.52	-	-
	2476(Av)		81.08	-	-
	2483.5(Pk)		42.46	74*	-31.54
	2483.5(Av)		25.87	54*	-28.13
	4952(Pk)		40.90	74	-33.10
	4952(Av)		29.11	54	-24.89
	7428(Pk)		46.44	74	-27.56
	7428(Av)		34.50	54	-19.50

Pk: Peak Detector;
Av: Average Detector;
*→ Restricted Bands
- → Fundamental Frequency

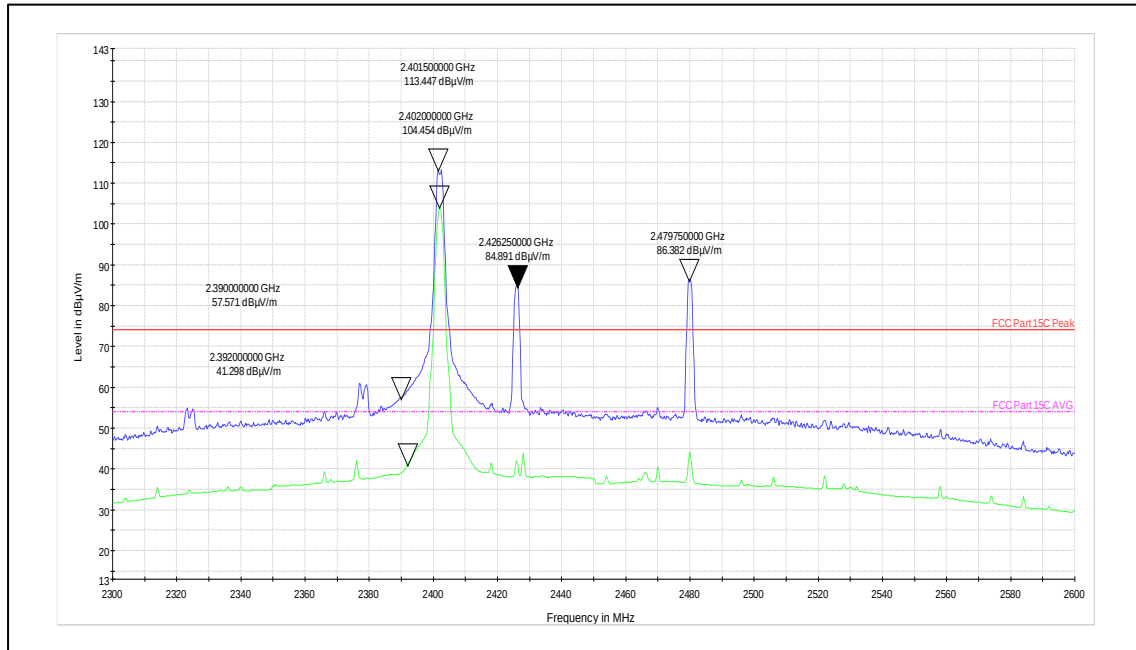


Channel Frequency: 2402MHz

Polarization: Vertical

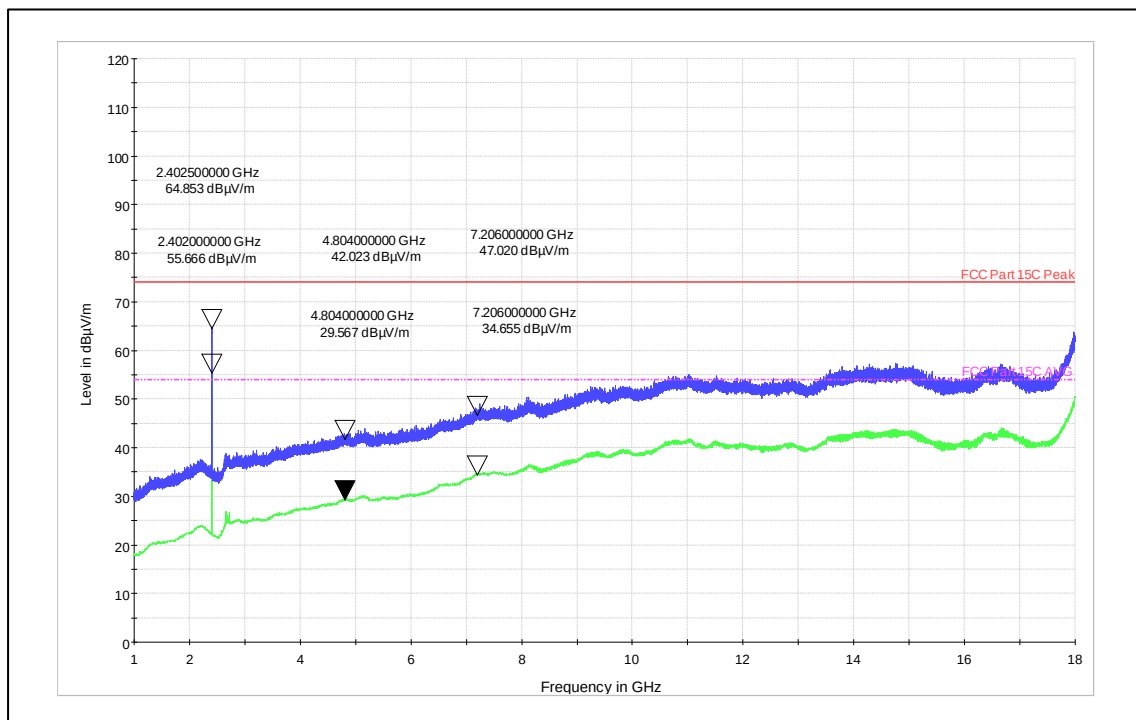


Channel Frequency: 1GHz -18GHz

Polarization: Vertical

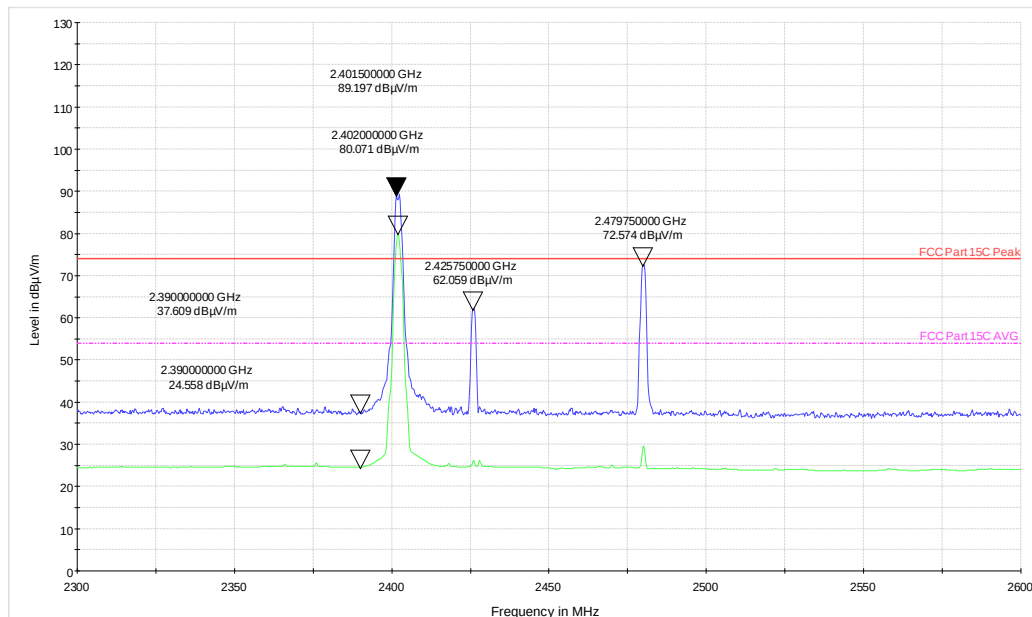


Channel Frequency: 2402MHz

Polarization: Horizontal

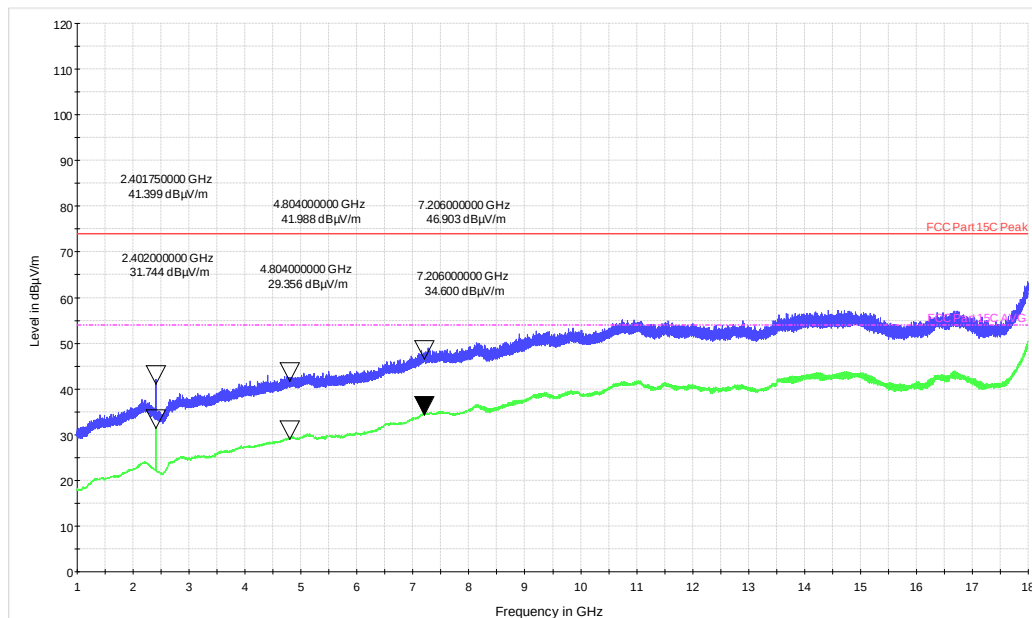


Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

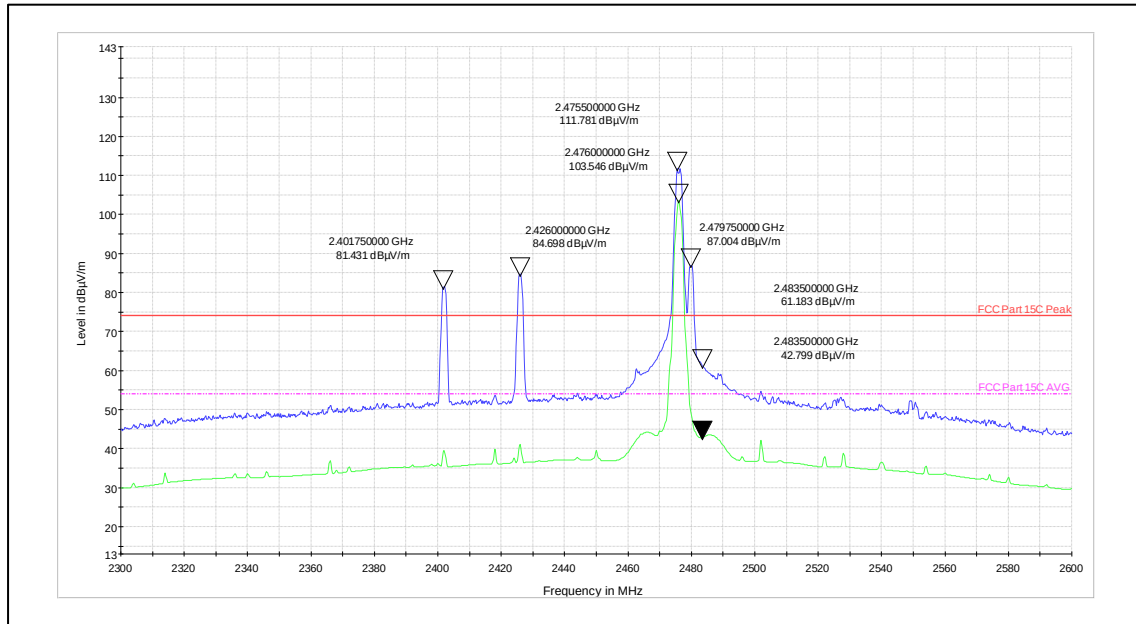


Channel Frequency: 2476MHz

Polarization: vertical

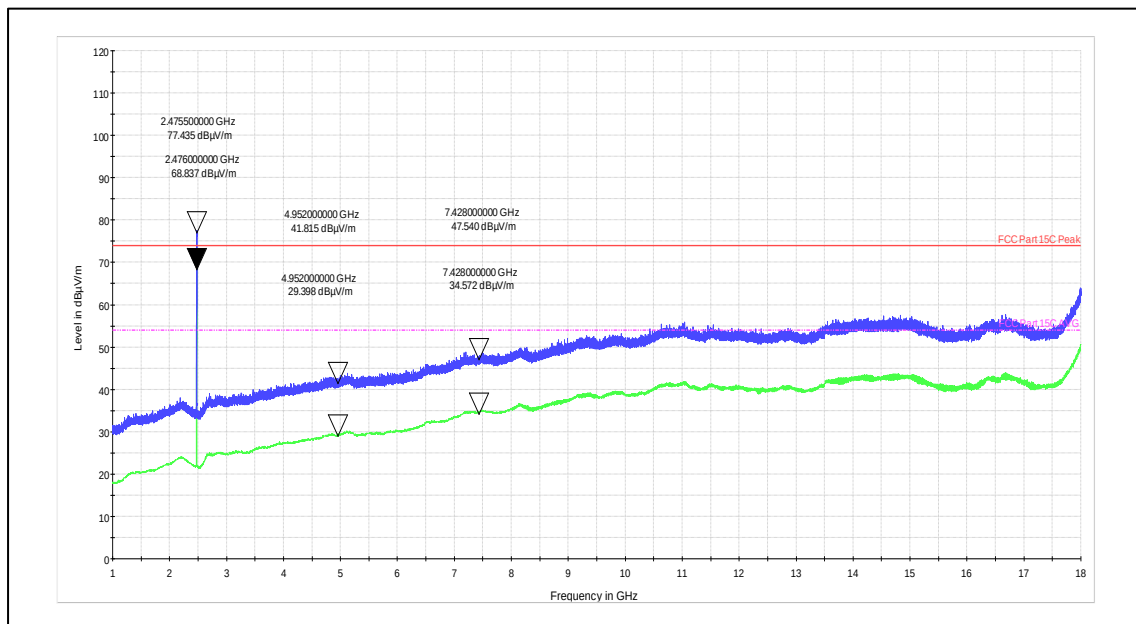


Channel Frequency: 1GHz -18GHz

Polarization: vertical

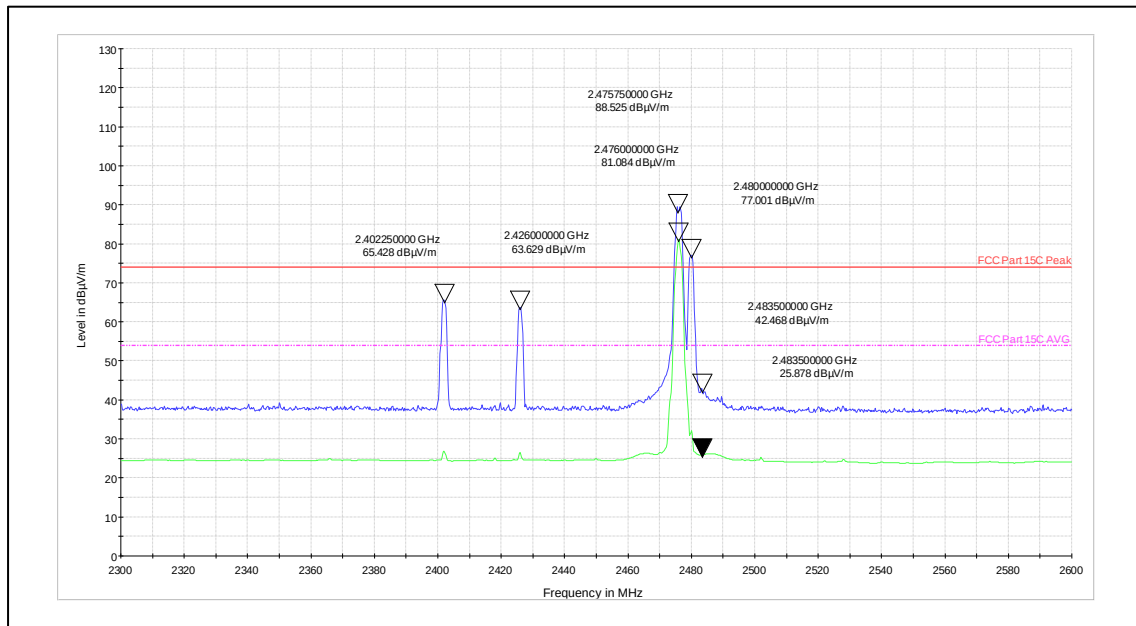


Channel Frequency: 2476MHz

Polarization: Horizontal

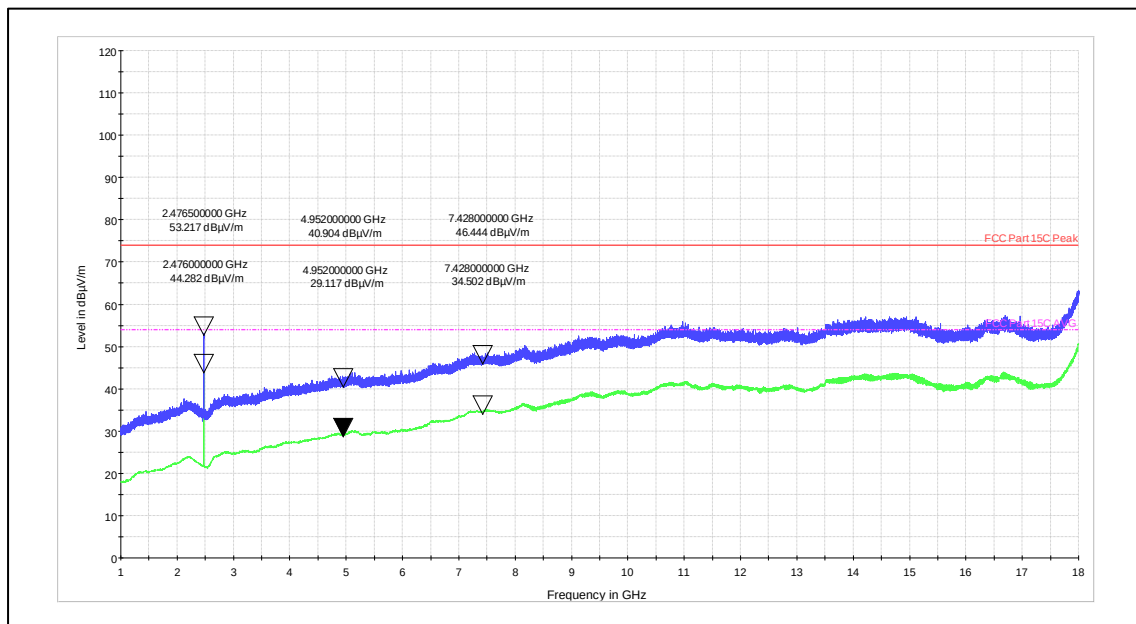


Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

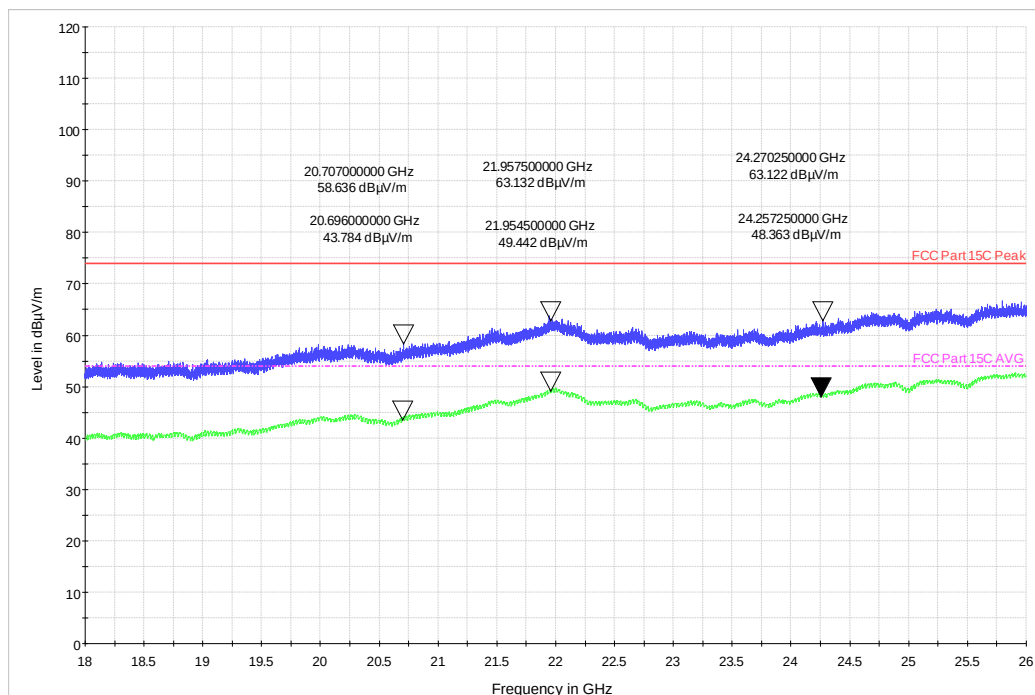

Channel Frequency: 18GHz -26GHz

Polarization: Vertical

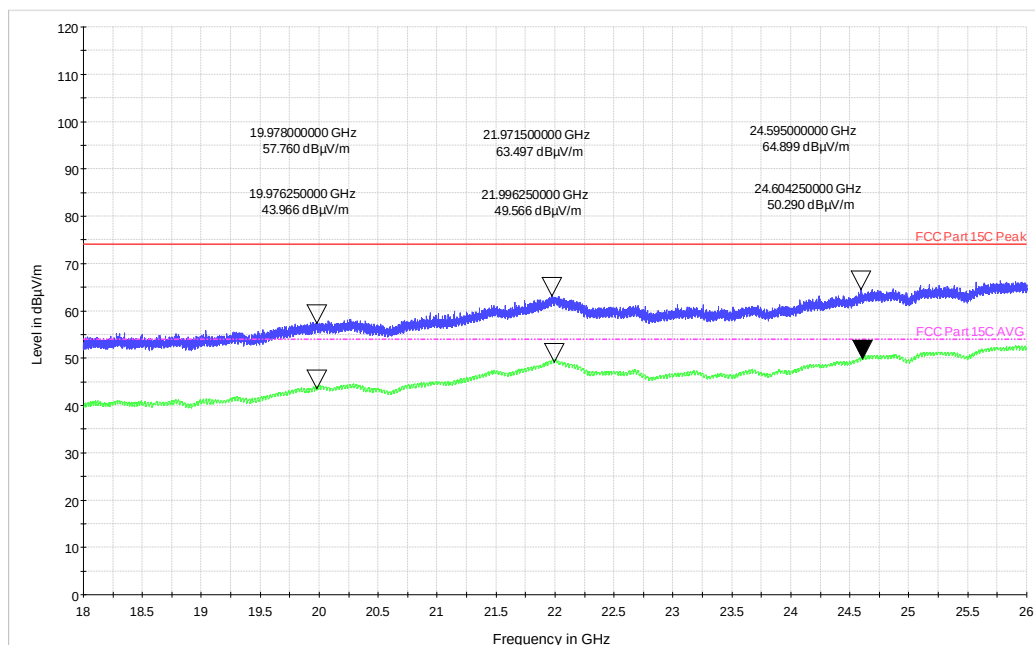

Channel Frequency: 18GHz -26GHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000034F

Seite 55 von 73
Page 55 of 73

L-COM HGV-2409U:


Channel Frequency (MHz)	Frequency (MHz)	Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2402	2402(Pk)	Vertical	115.01	-	-
	2402(Av)		106.95	-	-
	2390(Pk)		59.77	74*	-14.23
	2390(Av)		41.44	54*	-12.56
	4804(Pk)		41.28	74	-32.72
	4804(Av)		29.60	54	-24.40
	7206(Pk)		46.96	74	-27.04
	7206(Av)		34.68	54	-19.32
	2402(Pk)	Horizontal	90.85	-	-
	2402(Av)		82.62	-	-
	2390(Pk)		39.12	74*	-34.88
	2390(Av)		25.25	54*	-28.75
	4804(Pk)		41.24	74	-32.76
	4804(Av)		29.51	54	-24.49
	7206(Pk)		47.01	74	-26.99
	7206(Av)		34.60	54	-19.40
2476	2476(Pk)	Vertical	116.47	-	-
	2476(Av)		108.27	-	-
	2483.5(Pk)		66.72	74*	-7.28
	2483.5(Av)		47.21	54*	-6.79
	4952(Pk)		41.29	74	-32.71
	4952(Av)		29.37	54	-24.63
	7428(Pk)		46.21	74	-27.79
	7428(Av)		35.75	54	-18.25
	2476(Pk)	Horizontal	92.76	-	-
	2476(Av)		83.80	-	-
	2483.5(Pk)		44.50	74*	-29.50
	2483.5(Av)		27.23	54*	-26.77
	4952(Pk)		40.92	74	-33.08
	4952(Av)		29.30	54	-24.70
	7428(Pk)		46.26	74	-27.74
	7428(Av)		34.54	54	-19.46

Pk: Peak Detector;
Av: Average Detector;
*→ Restricted Bands
- → Fundamental Frequency

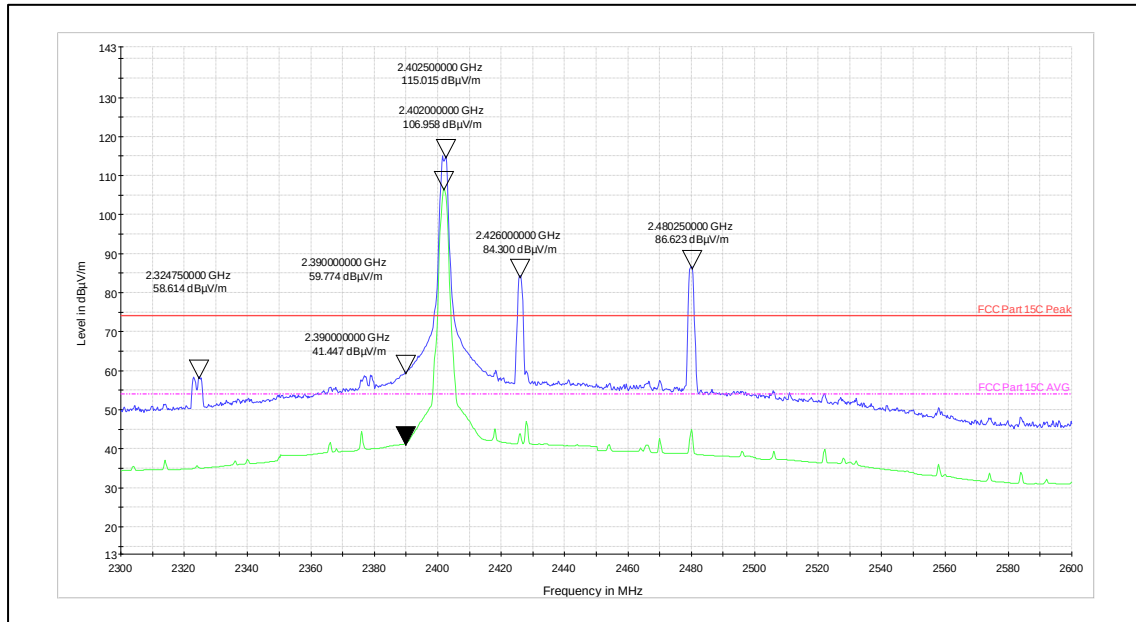



Channel Frequency: 2402MHz


Polarization: Vertical

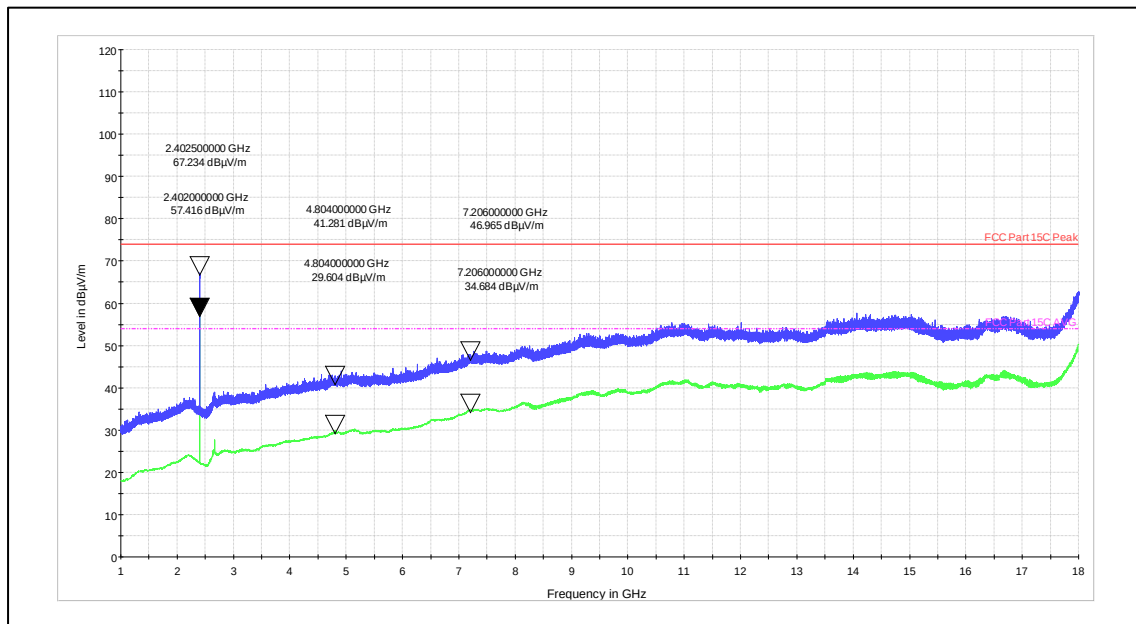

Channel Frequency: 1GHz -18GHz


Polarization: Vertical

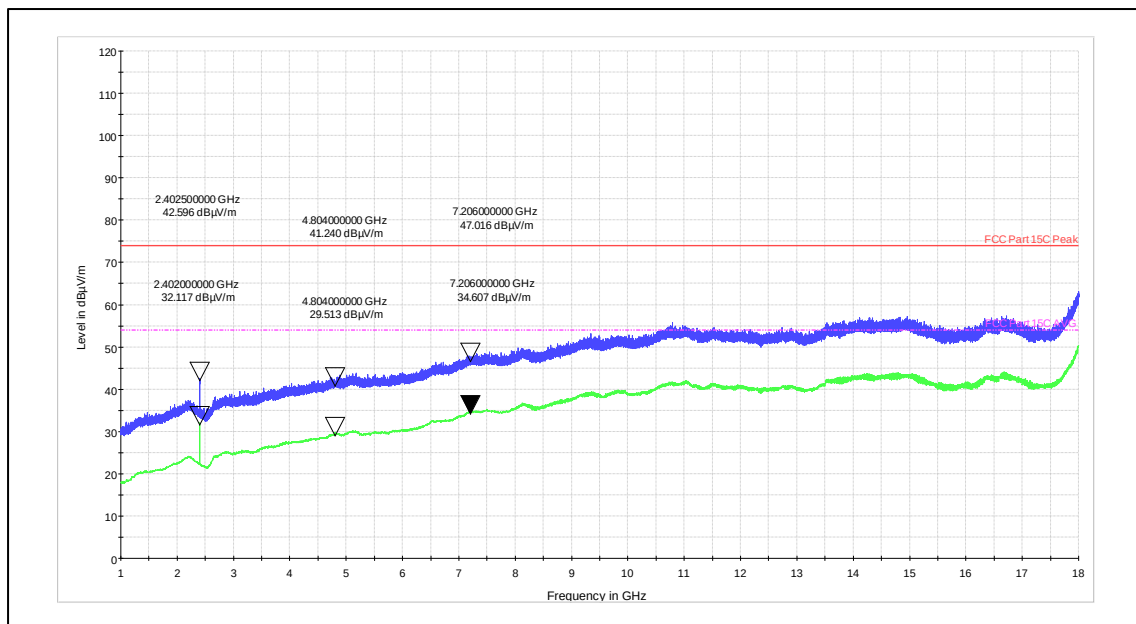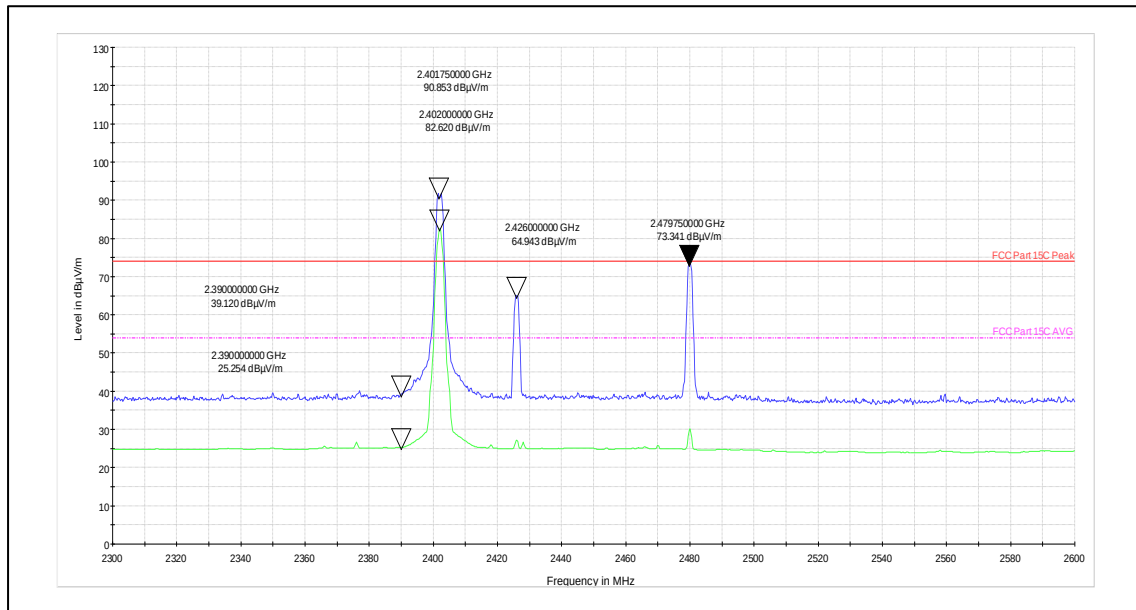

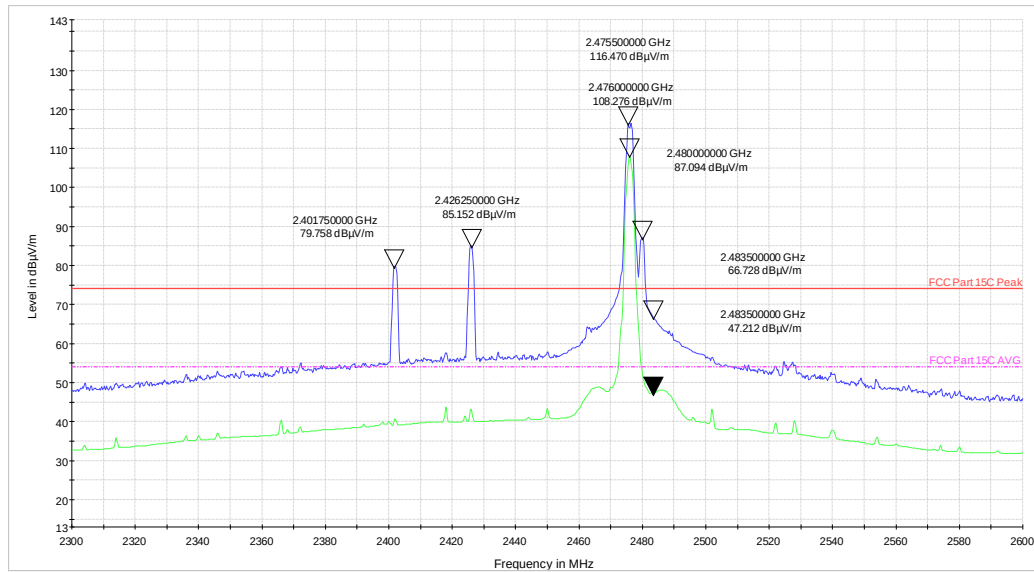


Channel Frequency: 2476MHz

Polarization: vertical

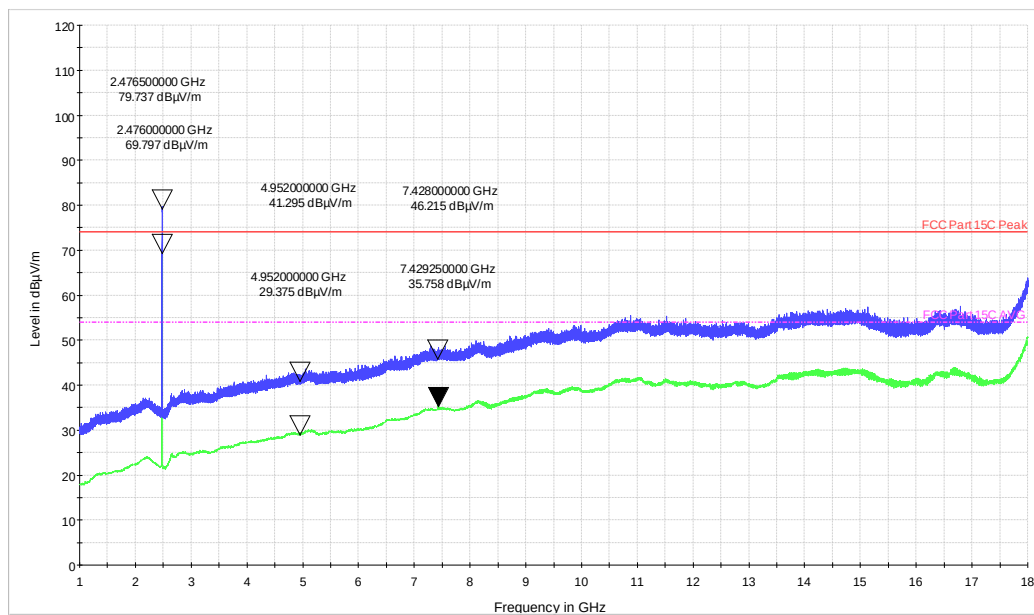


Channel Frequency: 1GHz -18GHz

Polarization: vertical

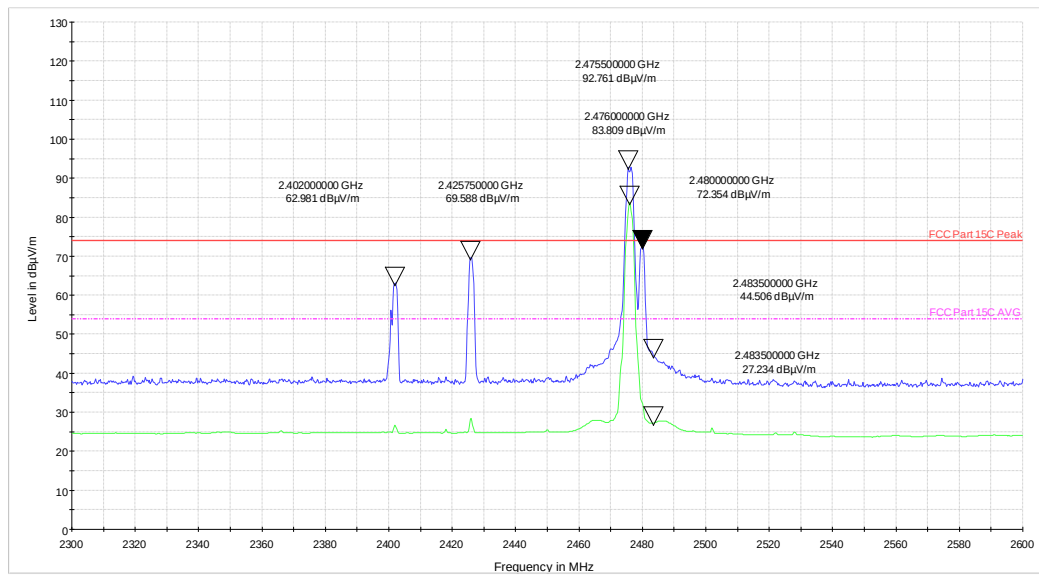


Channel Frequency: 2476MHz

Polarization: Horizontal

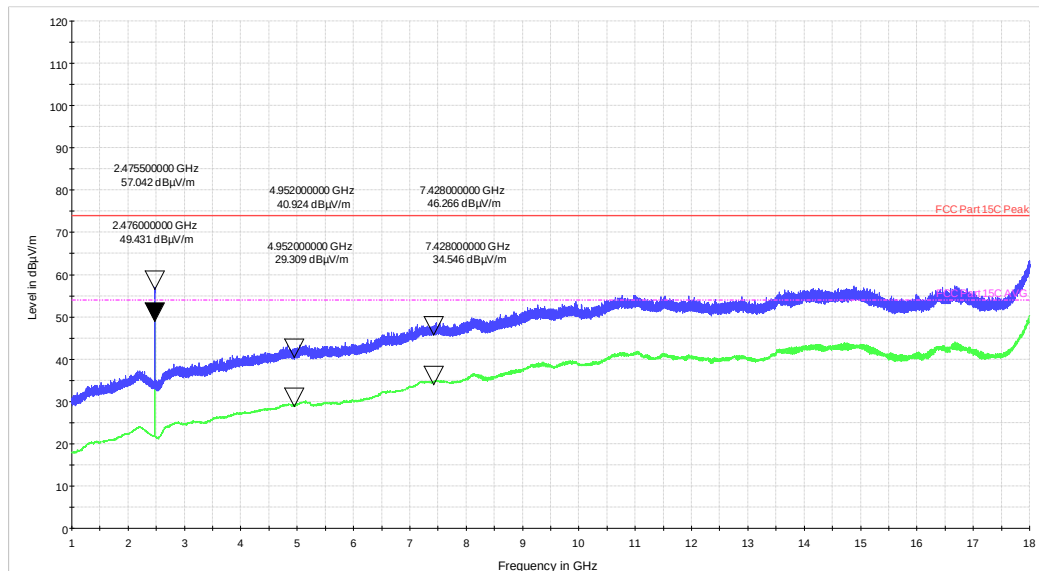


Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

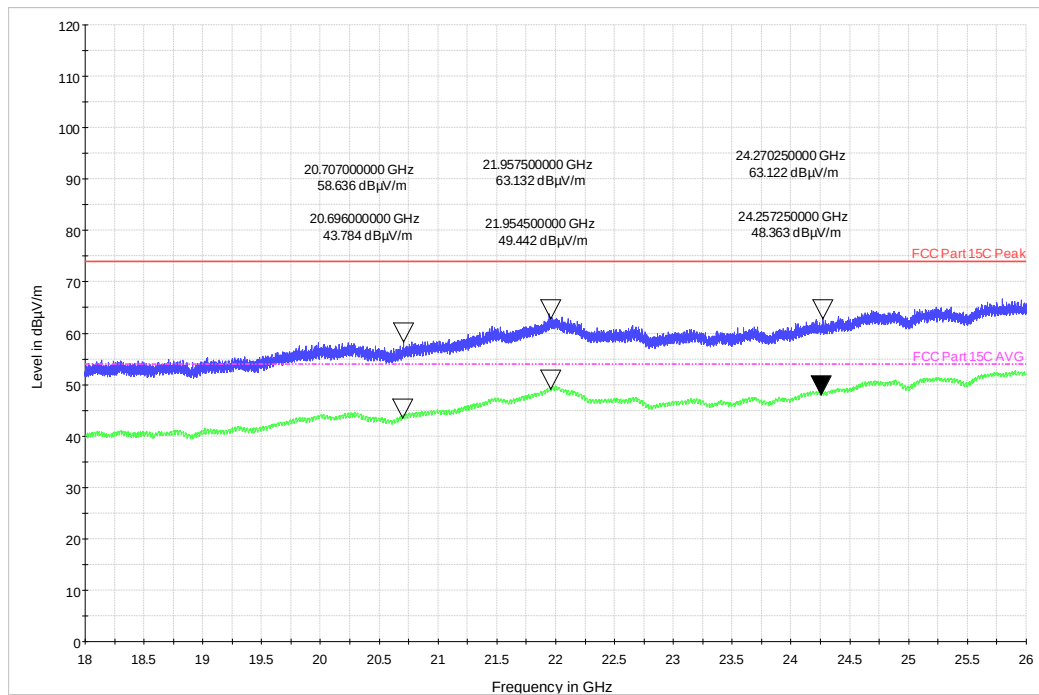

Channel Frequency: 18GHz -26GHz

Polarization: Vertical

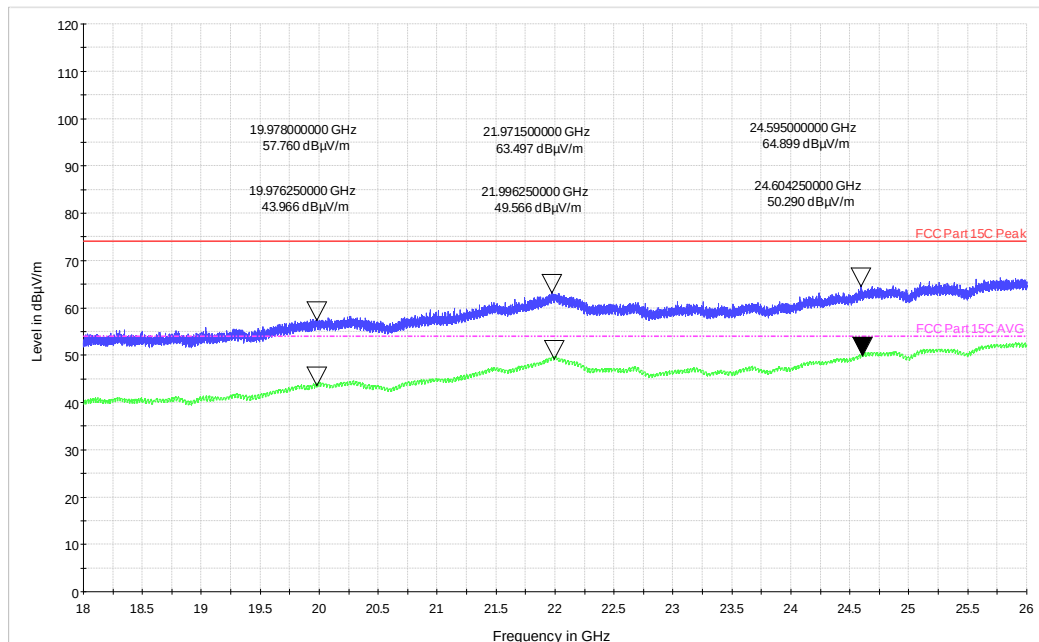

Channel Frequency: 18GHz -26GHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:


ULR-TC568822300000034F

Seite 61 von 73
Page 61 of 73

SG1015NM-2450-5dBi:


Channel Frequency (MHz)	Frequency (MHz)	Polarization	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2402	2402(Pk)	Vertical	109.55	-	-
	2402(Av)		100.37	-	-
	2390(Pk)		53.12	74*	-20.88
	2390(Av)		35.89	54*	-18.11
	4804(Pk)		41.25	74	-32.75
	4804(Av)		29.18	54	-24.82
	7206(Pk)		34.59	74	-39.41
	7206(Av)		46.74	54	-7.26
	2402(Pk)	Horizontal	89.29	-	-
	2402(Av)		79.69	-	-
	2390(Pk)		36.69	74*	-37.31
	2390(Av)		23.71	54*	-30.29
	4804(Pk)		40.56	74	-33.44
	4804(Av)		28.82	54	-25.18
	7206(Pk)		46.45	74	-27.55
	7206(Av)		34.59	54	-19.41
2476	2476(Pk)	Vertical	112.12	-	-
	2476(Av)		103.58	-	-
	2483.5(Pk)		61.54	74*	-12.46
	2483.5(Av)		42.94	54*	-11.06
	4952(Pk)		40.98	74	-33.02
	4952(Av)		29.36	54	-24.64
	7428(Pk)		46.77	74	-27.23
	7428(Av)		34.99	54	-19.01
	2476(Pk)	Horizontal	97.45	-	-
	2476(Av)		88.51	-	-
	2483.5(Pk)		47.06	74*	-26.94
	2483.5(Av)		29.77	54*	-24.23
	4952(Pk)		41.50	74	-32.50
	4952(Av)		29.25	54	-24.75
	7428(Pk)		46.88	74	-27.12
	7428(Av)		35.03	54	-18.97

Pk: Peak Detector;
Av: Average Detector;
*→ Restricted Bands
- → Fundamental Frequency

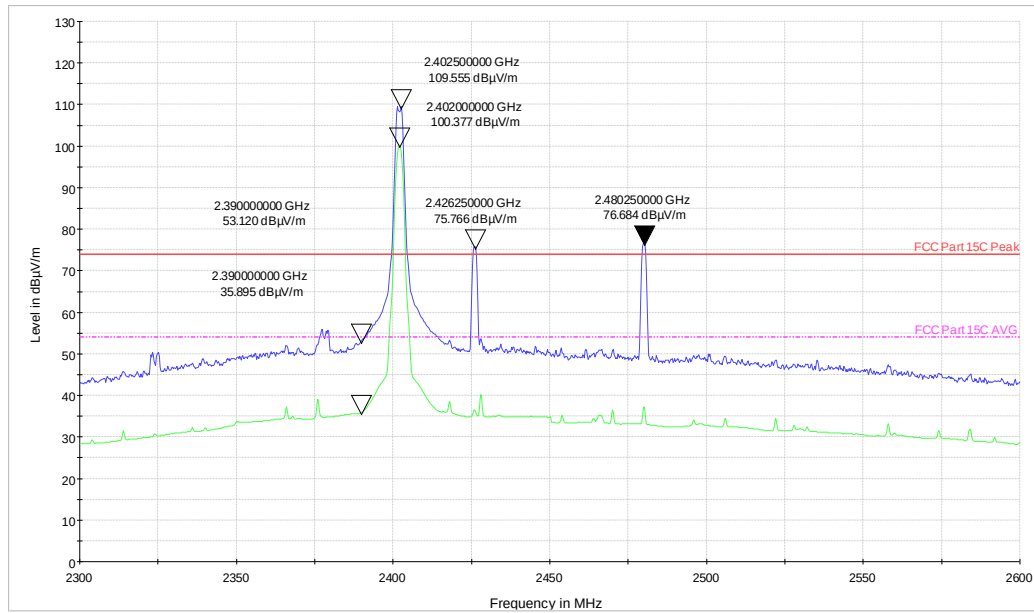


Channel Frequency: 2402MHz

Polarization: Vertical

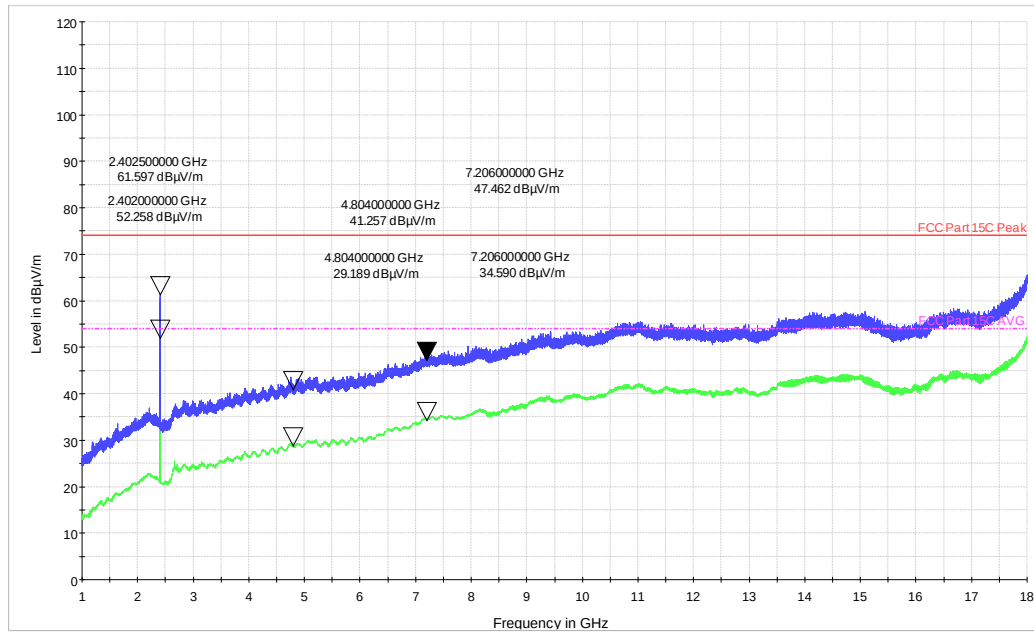


Channel Frequency: 1GHz -18GHz

Polarization: Vertical

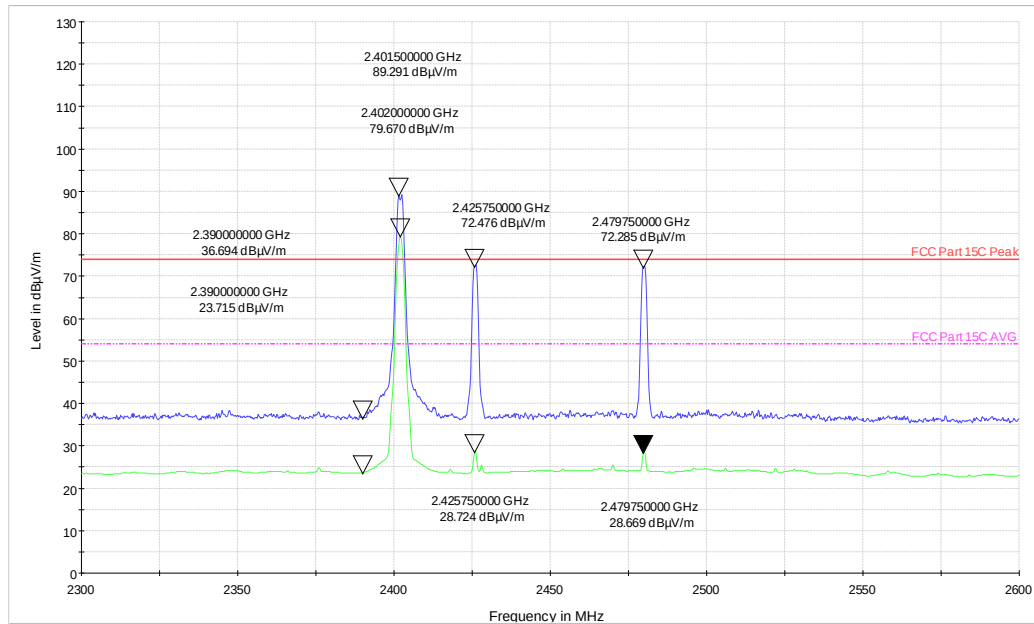


Channel Frequency: 2402MHz

Polarization: Horizontal

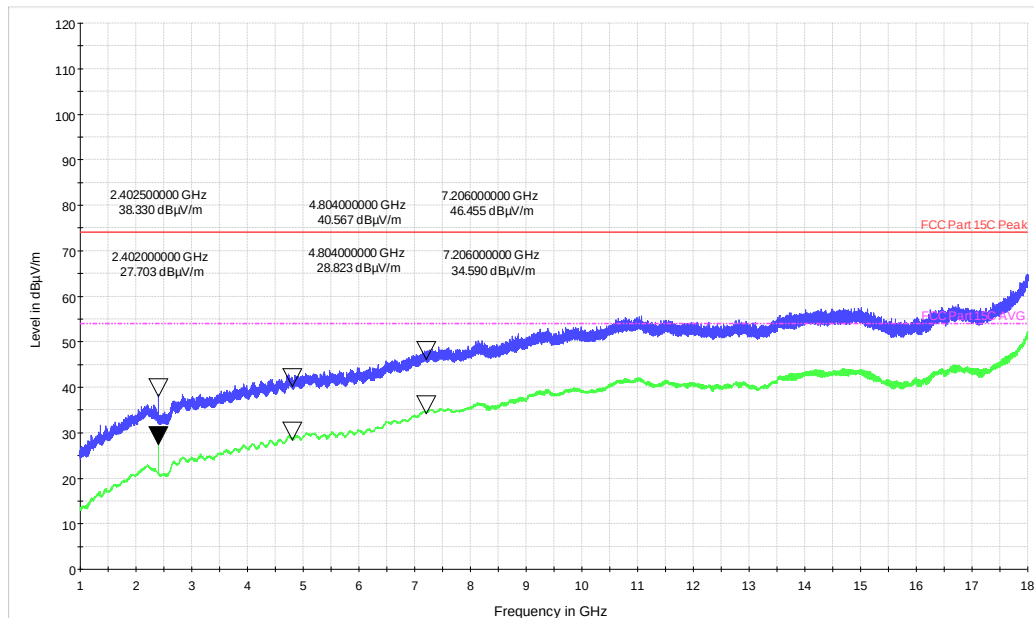


Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

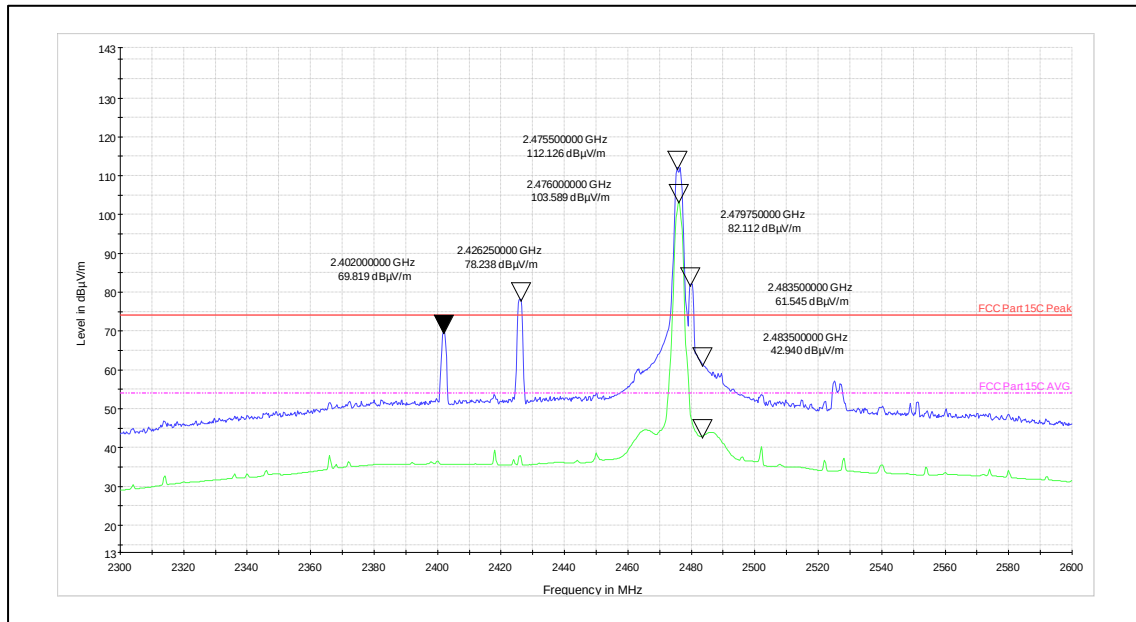


Channel Frequency: 2476MHz

Polarization: vertical

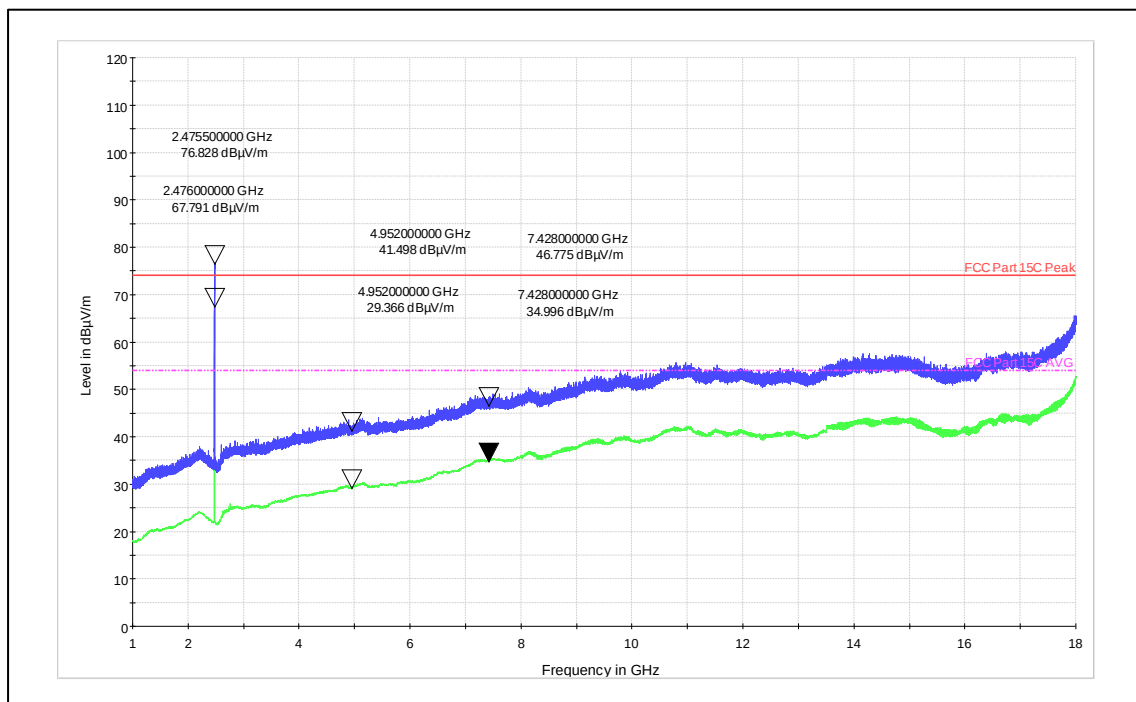


Channel Frequency: 1GHz -18GHz

Polarization: vertical

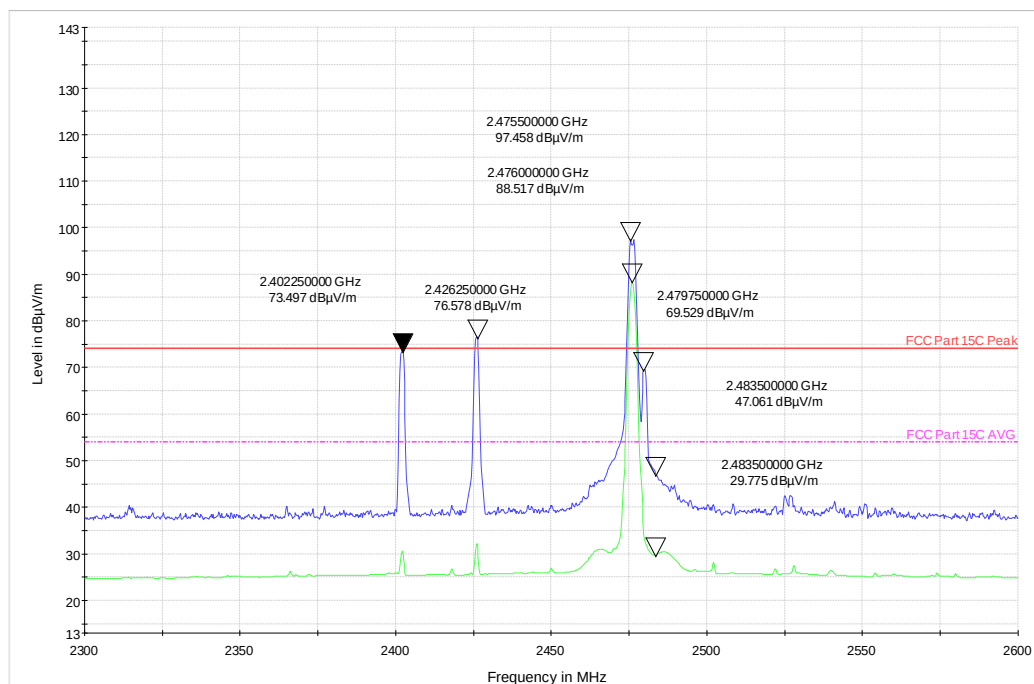


Channel Frequency: 2476MHz

Polarization: Horizontal

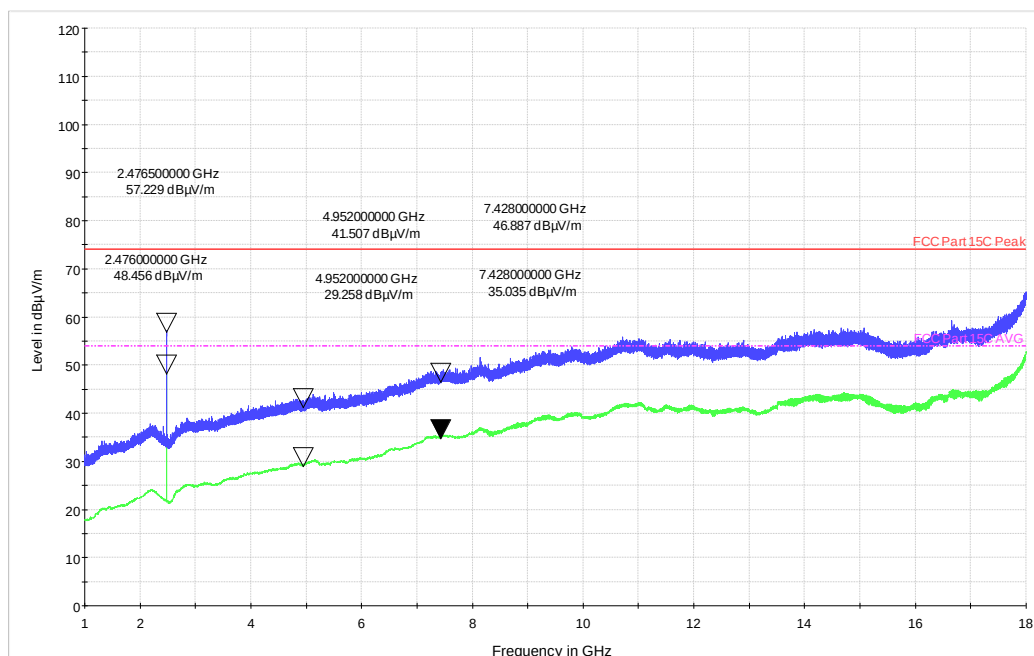


Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

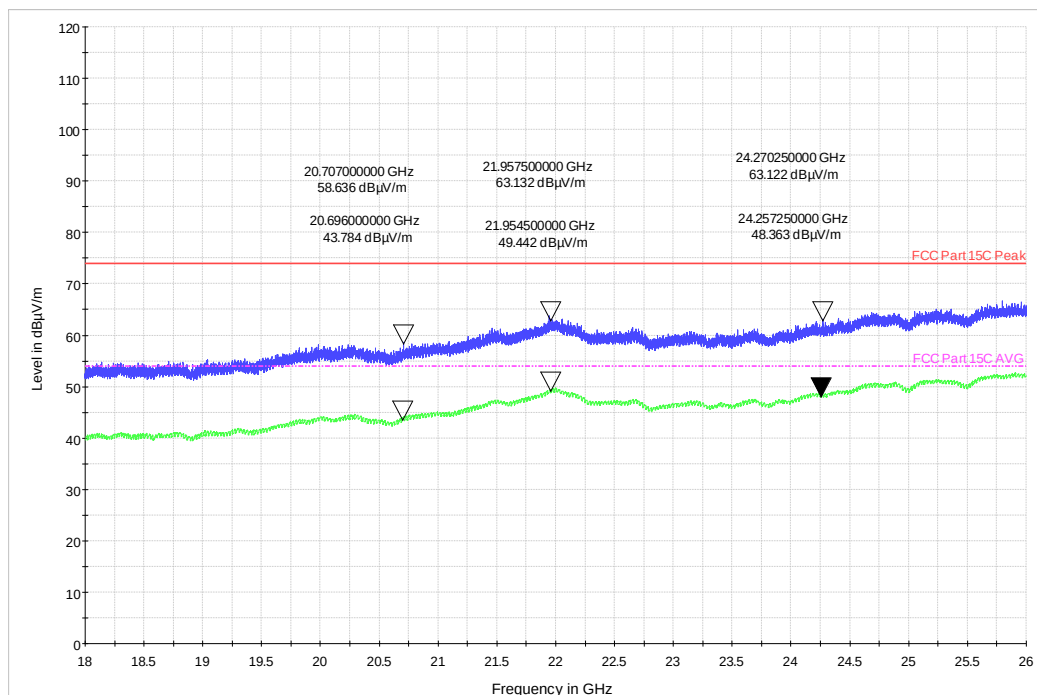

Channel Frequency: 18GHz -26GHz

Polarization: Vertical

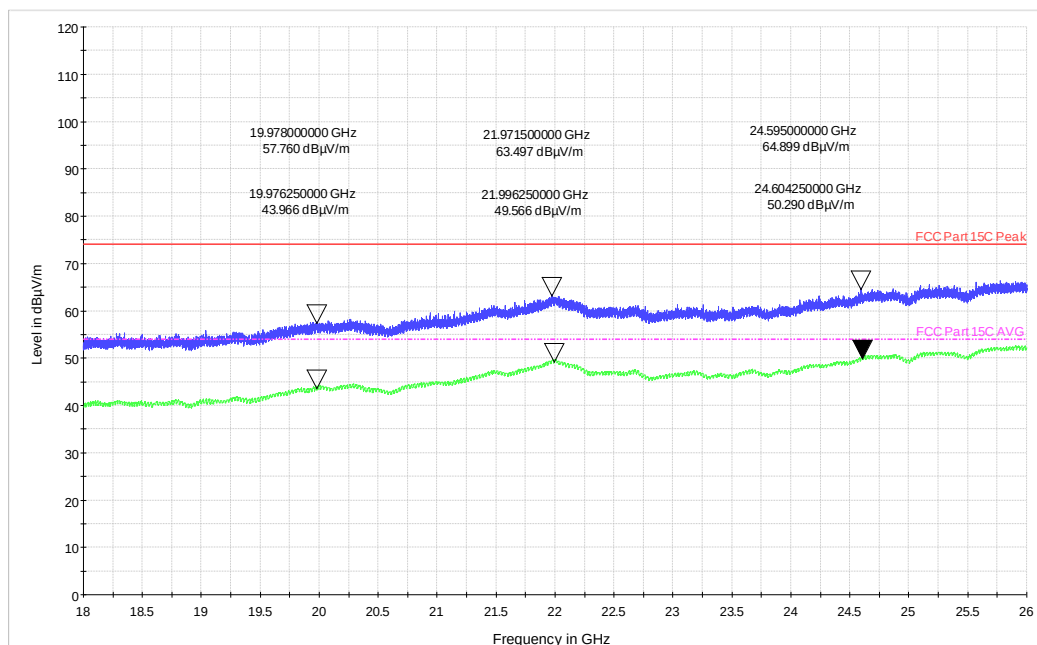

Channel Frequency: 18GHz -26GHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 67 von 73
Page 67 of 73

8.5.1 RSE Test Results of Simultaneous Operation with Anchor 1, GXRM Transmitter and BLE:

Note: Simultaneous Operation was performed As specified under the section 4.4 and worst case test results are mentioned in this report.

Test results for Simultaneous operation


Combination: IEEE 802.15.4 + IEEE 802.15.4 + BLE

AIR-ANT2450V-N:


Protocol	Polarization	Measured Frequency (MHz)	Measured Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
IEEE 802.15.4	Vertical	2405(Pk)	115.54	-	-
		2405(Av)	115.45	-	-
		2390(Pk)	60.14	74*	-13.86
		2390(Av)	46.40	54*	-7.60
		4810(Pk)	48.01	74	-25.99
		4810(Av)	39.25	54	-14.75
		7215(Pk)	47.12	74	-26.88
		7215(Av)	35.83	54	-18.17
IEEE 802.15.4		2475(Pk)	114.79	-	-
		2475(Av)	114.75	-	-
		2483.5(Pk)	63.81	74*	-10.19
		2483.5(Av)	52.21	54*	-1.79
		4950(Pk)	40.40	74	-33.6
		4950(Av)	28.68	54	-25.32
		7425(Pk)	47.23	74	-26.77
		7425(Av)	35.37	54	-18.63
IEEE 802.15.4	Horizontal	2405(Pk)	89.83	-	-
		2405(Av)	89.66	-	-
		2390(Pk)	56.42	74*	-17.58
		2390(Av)	42.88	54*	-11.12
		4810(Pk)	41.39	74	-32.61
		4810(Av)	30.76	54	-23.24
		7215(Pk)	49.85	74	-24.15
		7215(Av)	37.85	54	-16.15
IEEE 802.15.4		2475(Pk)	90.77	-	-
		2475(Av)	90.63	-	-
		2483.5(Pk)	55.98	74*	-18.02
		2483.5(Av)	42.61	54*	-11.39
		4950(Pk)	39.82	74	-34.18
		4950(Av)	27.93	54	-26.07
		7425(Pk)	47.67	74	-26.33
		7425(Av)	34.77	54	-19.23

Pk: Peak Detector;
Av: Average Detector;
*→ Restricted Bands
- → Fundamental Frequency


Test Plots:

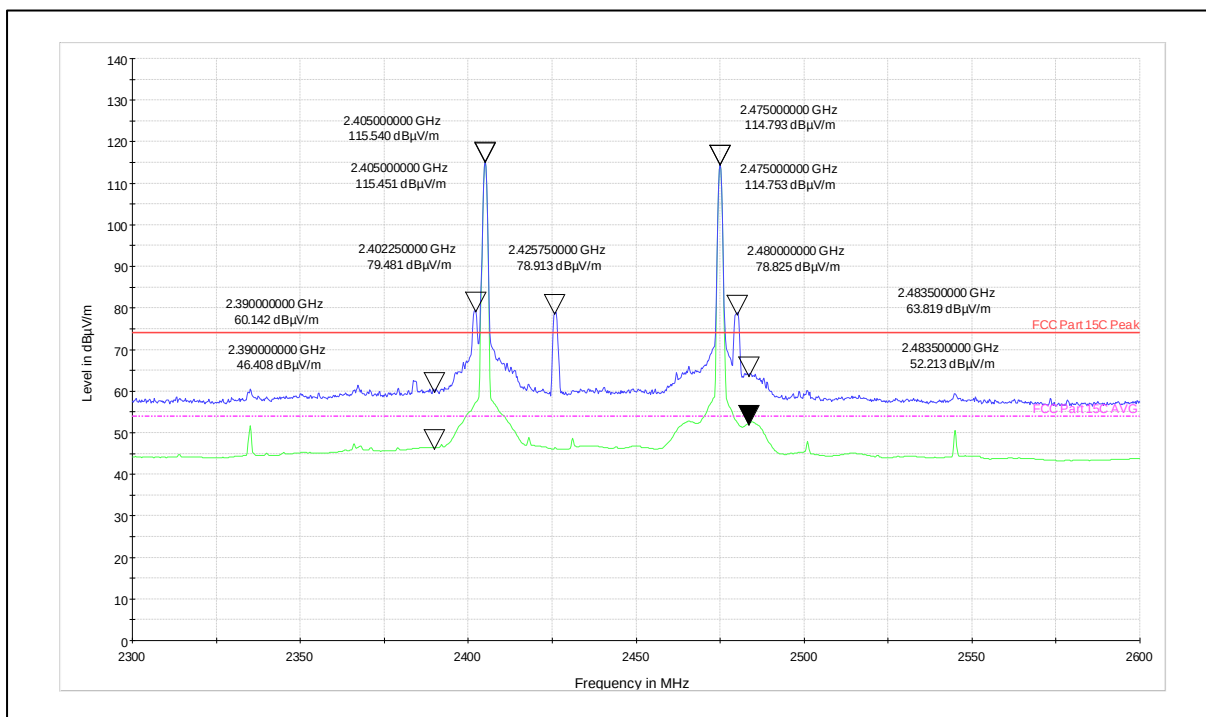


Fundamental Frequency: (IEEE 802.15.4-2405MHz, IEEE 802.15.4-2475MHz) Polarization: vertical

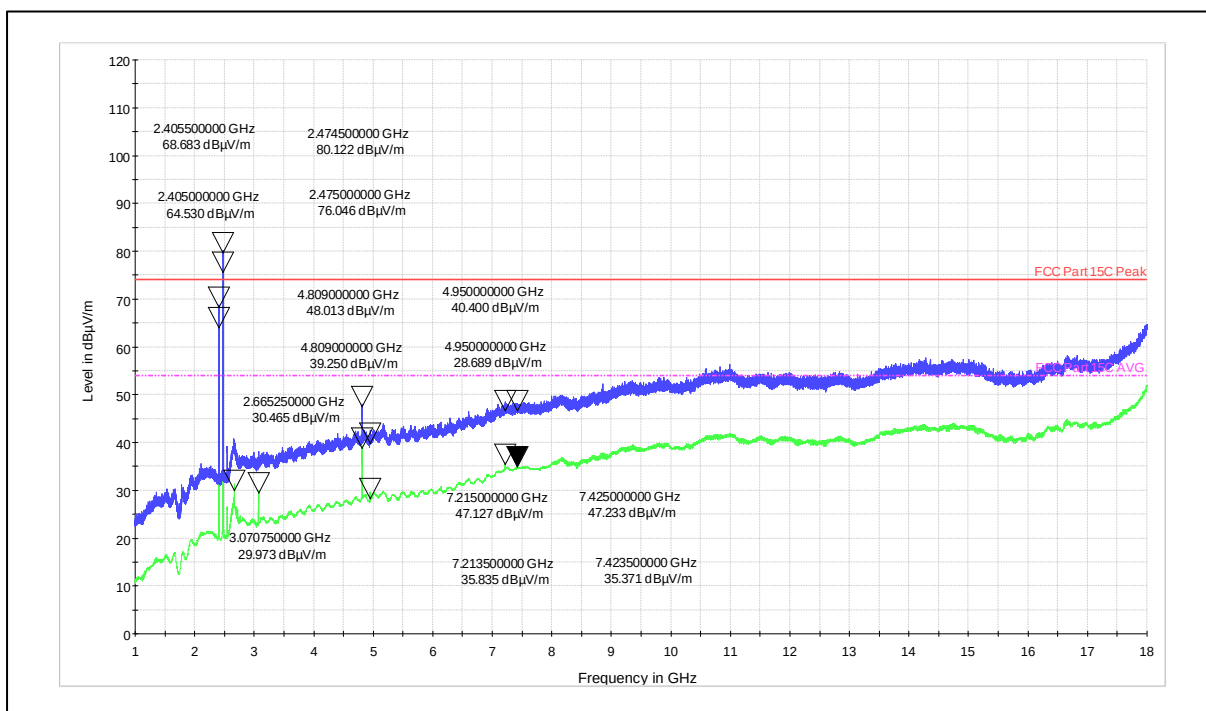

Channel Frequency: 1GHz -18GHz Polarization: vertical

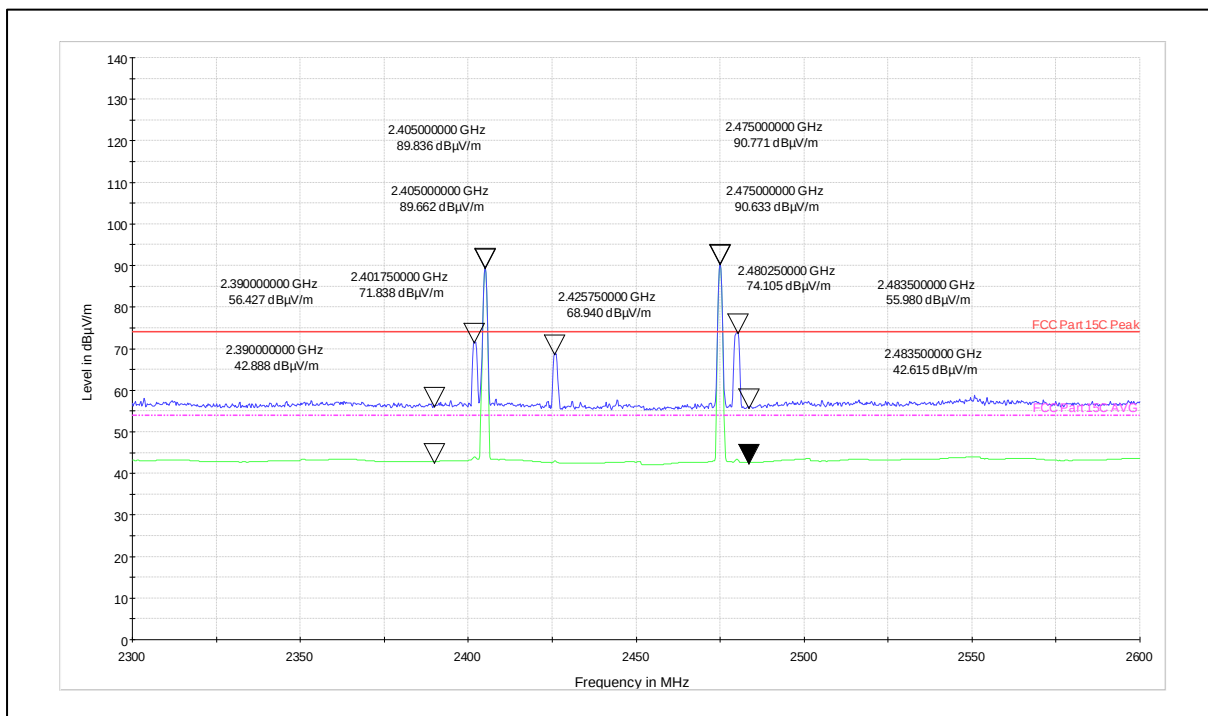

Fundamental Frequency: (IEEE 802.15.4-2405MHz, IEEE 802.15.4-2475MHz) Polarization: Horizontal

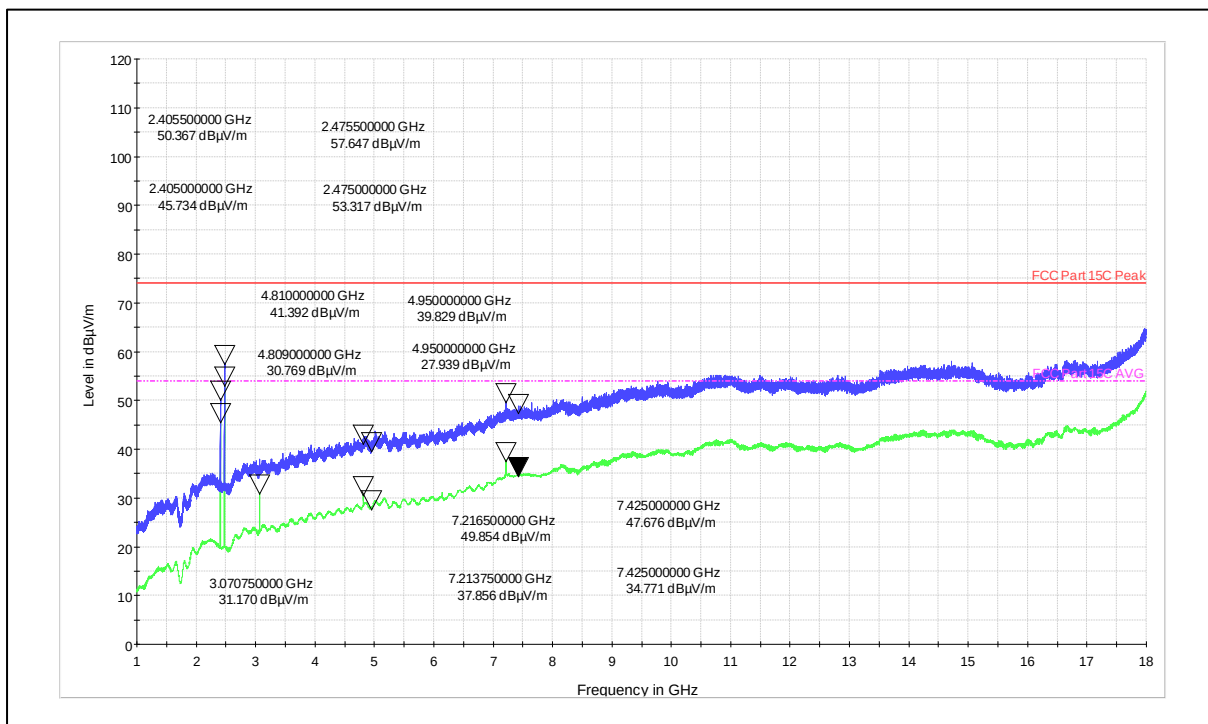

Channel Frequency: 1GHz -18GHz

Polarization: Horizontal

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 70 von 73
Page 70 of 73

8.6 Conducted spurious emission Test on AC Power lines

Result

Pass

Test Specification : FCC Part 15 Section 15.207 / RSS Gen Issue 5 Section 8.8
Test Method : ANSI C 63.10-2013
Testing Location : Screened room
Measurement Bandwidth : 9kHz
Frequency Range : 150kHz – 30MHz
Supply Voltage : 110VAC,60Hz
Test Method : Refer TEST METHODOLOGY

Table 9: Limits for Conducted poweline emission

Frequency of emission (MHz)	QP Limit (dBμV)	AV Limit (dBμV/m)
0.15 – 0.5	66 – 56*	56 – 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency

Test Conditions:

Temperature (Norm) = +23.1 °C

Voltage = 24V DC (AC – DC Adapter)

Relative humidity: 66%


Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 71 von 73
Page 71 of 73

Test results:

110VAC-60Hz-Line

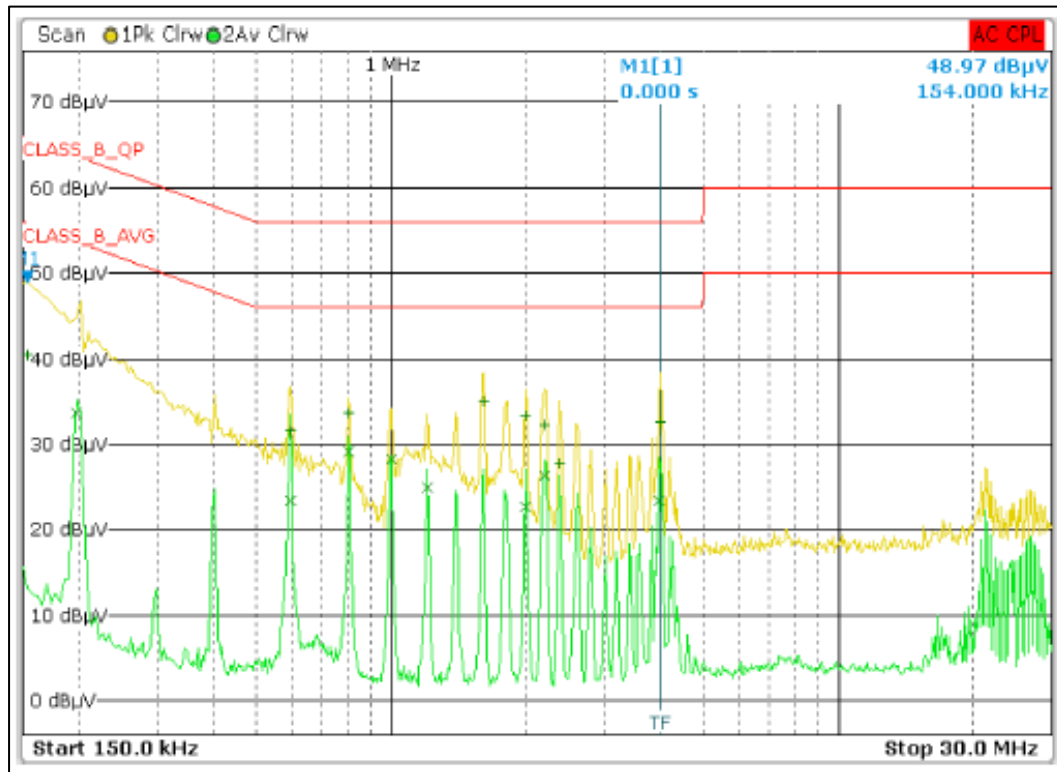


Trace	Frequency	Level (dBμV)	Phase	Detector	Delta Limit/dB
2	802.000000000 kHz	29.15		Average	-16.85
2	998.000000000 kHz	28.18		Average	-17.82
2	2.206000000 MHz	26.30		Average	-19.70
2	198.000000000 kHz	33.67		Average	-20.02
1	1.610000000 MHz	35.01		Quasi Peak	-20.99
2	1.206000000 MHz	24.96		Average	-21.04
1	802.000000000 kHz	33.57		Quasi Peak	-22.43
2	3.986000000 MHz	23.44		Average	-22.56
2	594.000000000 kHz	23.39		Average	-22.61
1	1.998000000 MHz	33.30		Quasi Peak	-22.70
2	1.998000000 MHz	22.73		Average	-23.27
1	3.994000000 MHz	32.64		Quasi Peak	-23.36
1	2.206000000 MHz	32.30		Quasi Peak	-23.70
1	594.000000000 kHz	31.56		Quasi Peak	-24.44
1	154.000000000 kHz	40.40		Quasi Peak	-25.38
1	2.382000000 MHz	27.73		Quasi Peak	-28.27

Prüfbericht - Nr.:
Test Report No.:

ULR-TC568822300000034F

Seite 72 von 73
Page 72 of 73

110VAC-60Hz-Neutral:

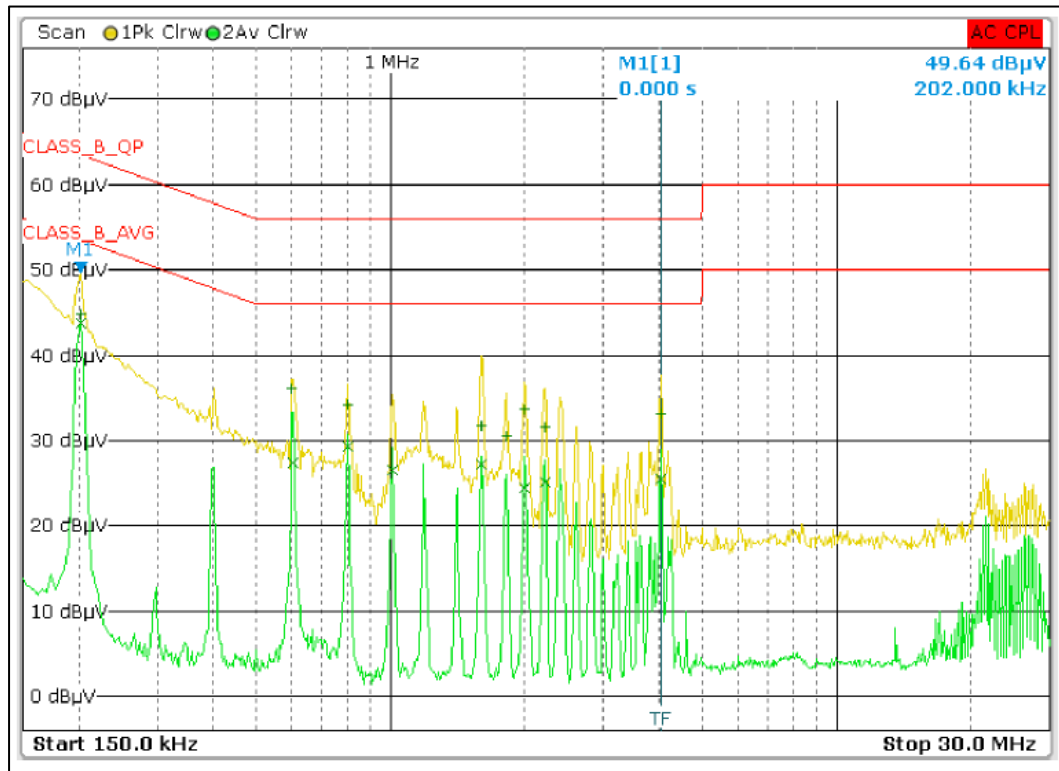

Trace	Frequency	Level (dBμV)	Phase	Detector	Delta Limit/dB
2	202.000000000 kHz	43.67		Average	-9.86
2	802.000000000 kHz	29.35		Average	-16.65
2	606.000000000 kHz	27.37		Average	-18.63
1	202.000000000 kHz	44.79		Quasi Peak	-18.74
2	1.602000000 MHz	27.26		Average	-18.74
2	1.006000000 MHz	26.53		Average	-19.47
1	602.000000000 kHz	36.15		Quasi Peak	-19.85
2	4.026000000 MHz	25.46		Average	-20.54
2	2.218000000 MHz	25.18		Average	-20.82
2	2.002000000 MHz	24.46		Average	-21.54
1	802.000000000 kHz	34.12		Quasi Peak	-21.88
1	2.002000000 MHz	33.56		Quasi Peak	-22.44
1	4.022000000 MHz	33.19		Quasi Peak	-22.81
1	1.602000000 MHz	31.65		Quasi Peak	-24.35
1	2.222000000 MHz	31.63		Quasi Peak	-24.37
1	1.818000000 MHz	30.57		Quasi Peak	-25.43

9 LIST OF TABLES

Table 1: List of test and measurement instruments	6
Table 2: Instrument application Software versions	6
Table 3: Ratings and System Details as declared by Client*	7
Table 4: Measurement Uncertainty	8
Table 5: List of EUT Center frequencies	10
Table 6: Transmitter limits for Radiated emission	33
Table 7: Test results for frequency range 30MHz – 1GHz	34
Table 8: Test results for the frequencies above 1GHz.....	37
Table 9: Limits for Conducted poweline emission	70

10 LIST OF FIGURES

Figure 1: Frequency Range 9 kHz- 30 MHz	13
Figure 2: Frequency Range 30 MHz – 200 MHz	13
Figure 3: Frequency Range 200 MHz - 1GHz	14
Figure 4: Frequency Range above 1 GHz	14

*****End of Test report*****