



Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 121 of 404


APPENDIX

A. SUPPORTING INFORMATION

A.1. CONDUCTED TEST PLOTS

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

A.1.1. Peak Power Spectral Density

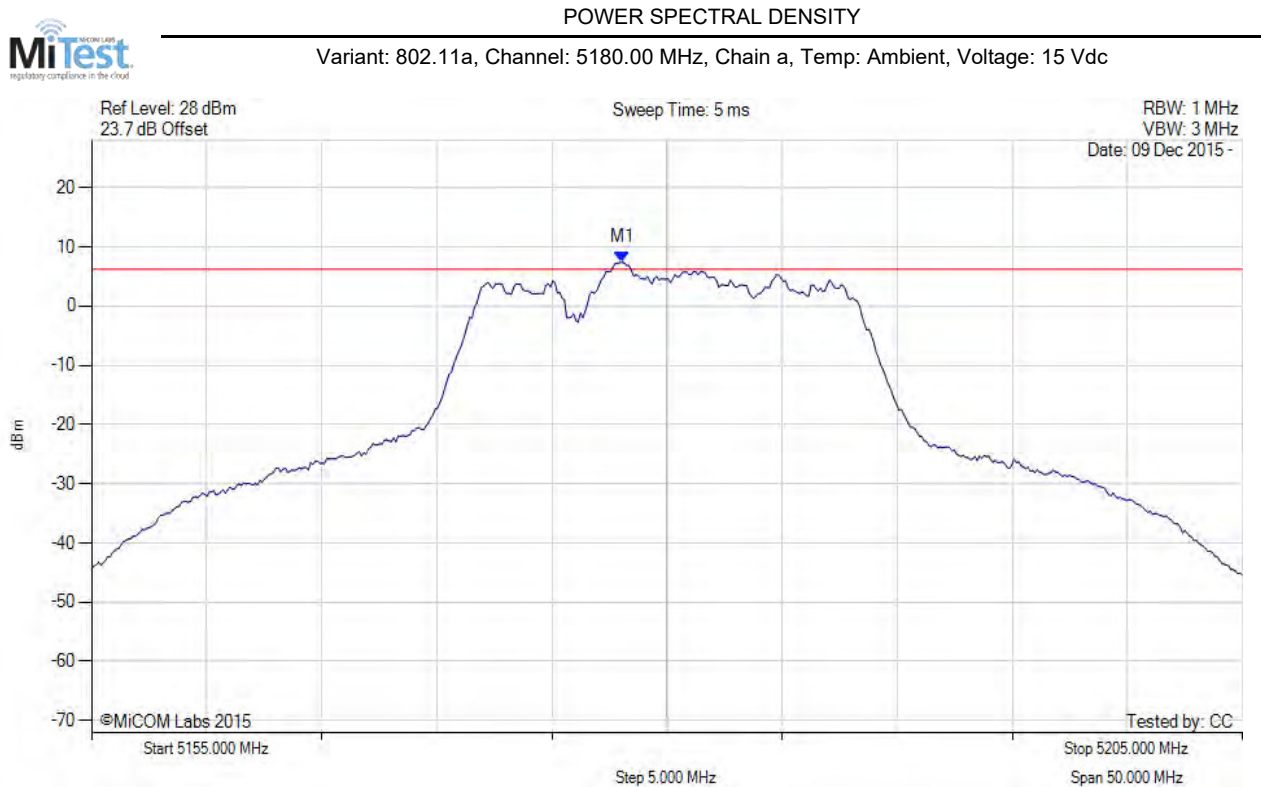

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5178.046 MHz : 7.390 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 123 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5180.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

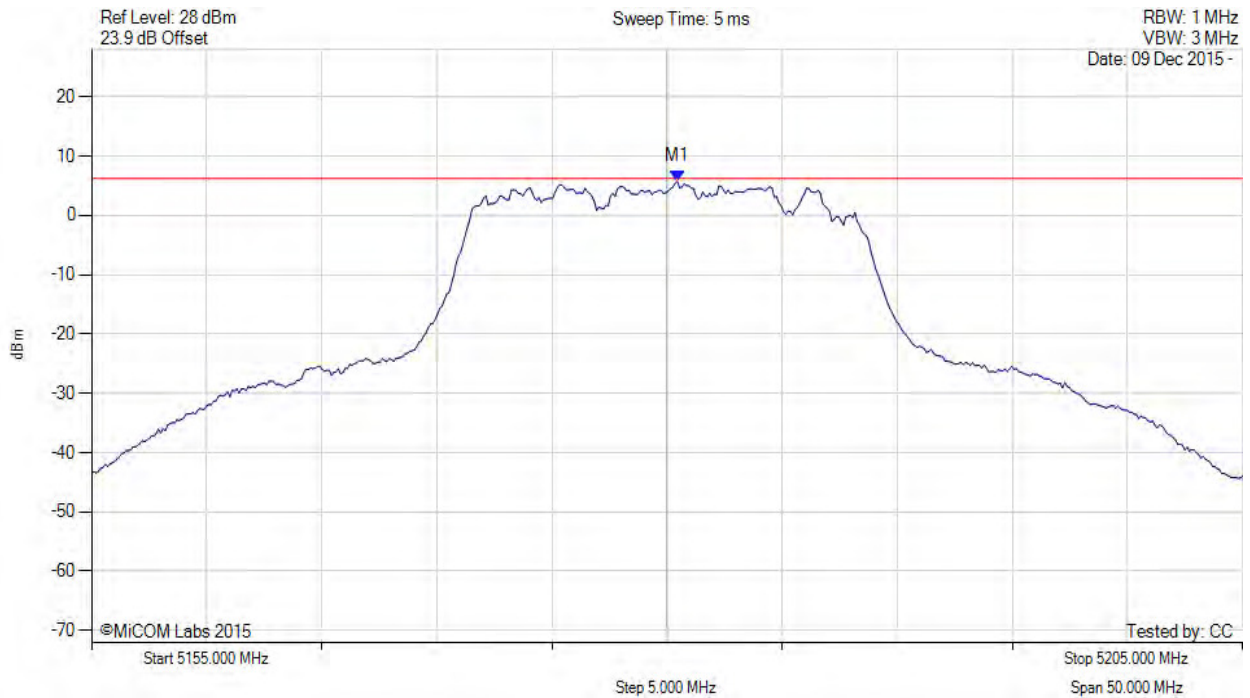

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5180.451 MHz : 5.711 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 124 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5180.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

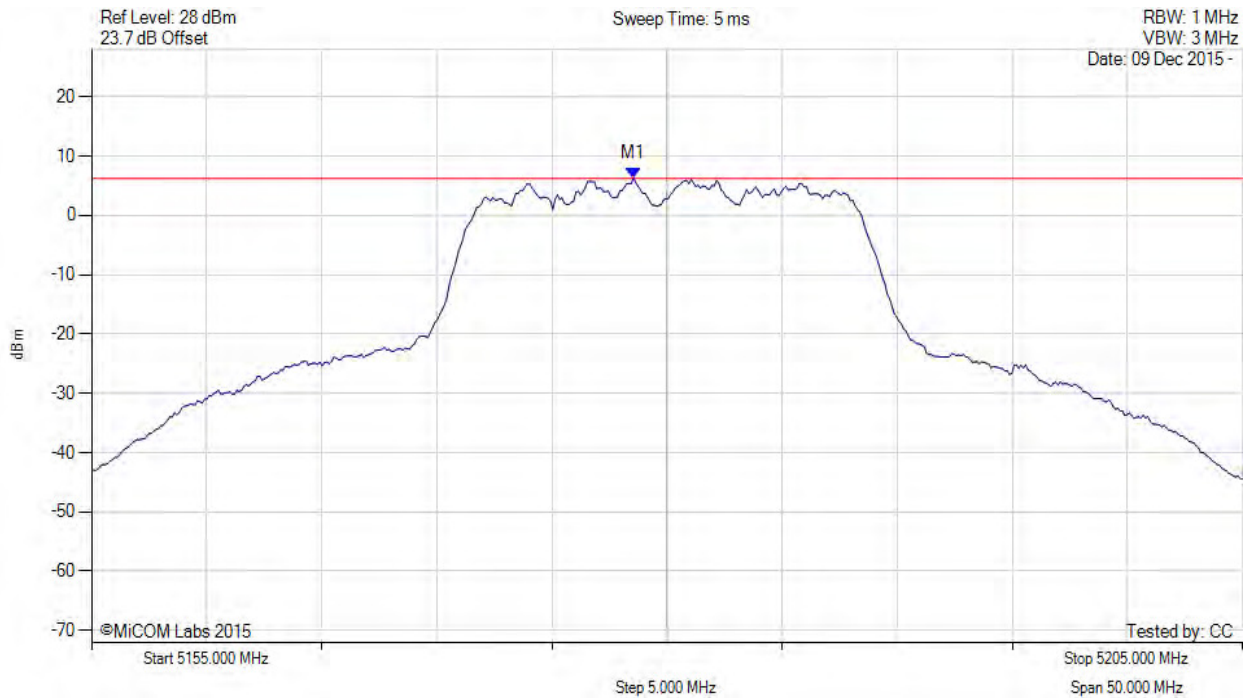

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5178.547 MHz : 6.336 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 125 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5180.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

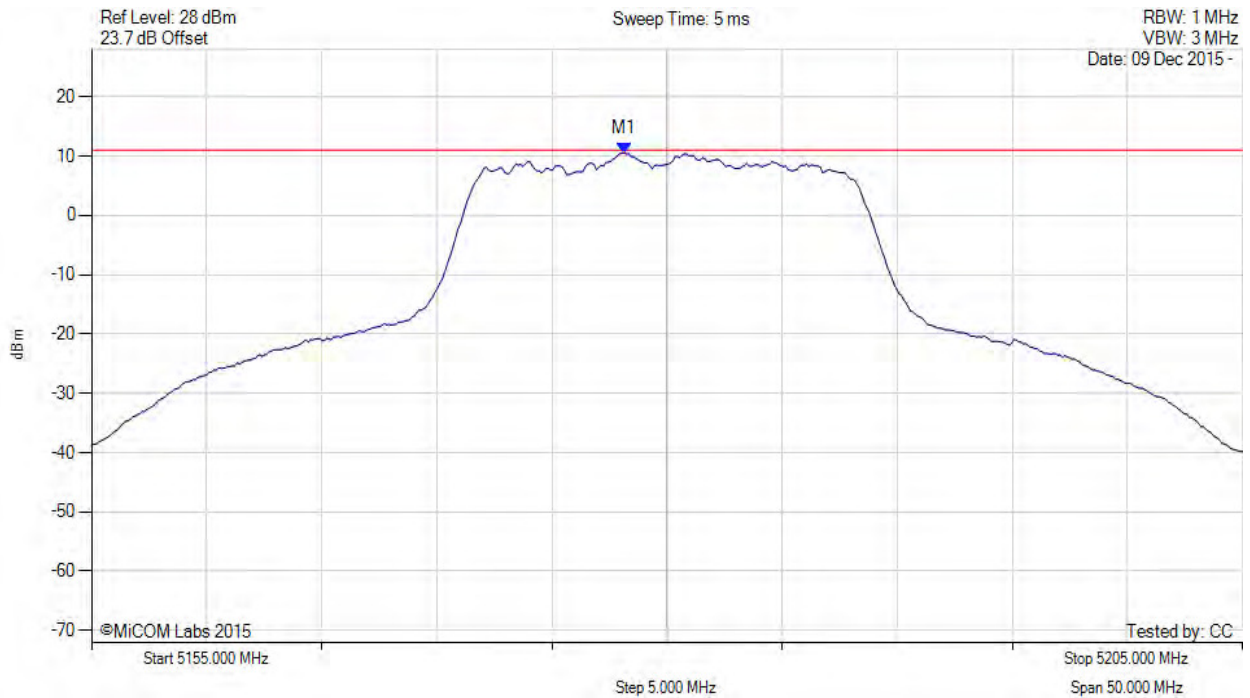

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5178.100 MHz : 10.507 dBm M1 + DCCF : 5178.100 MHz : 10.776 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -0.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 126 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

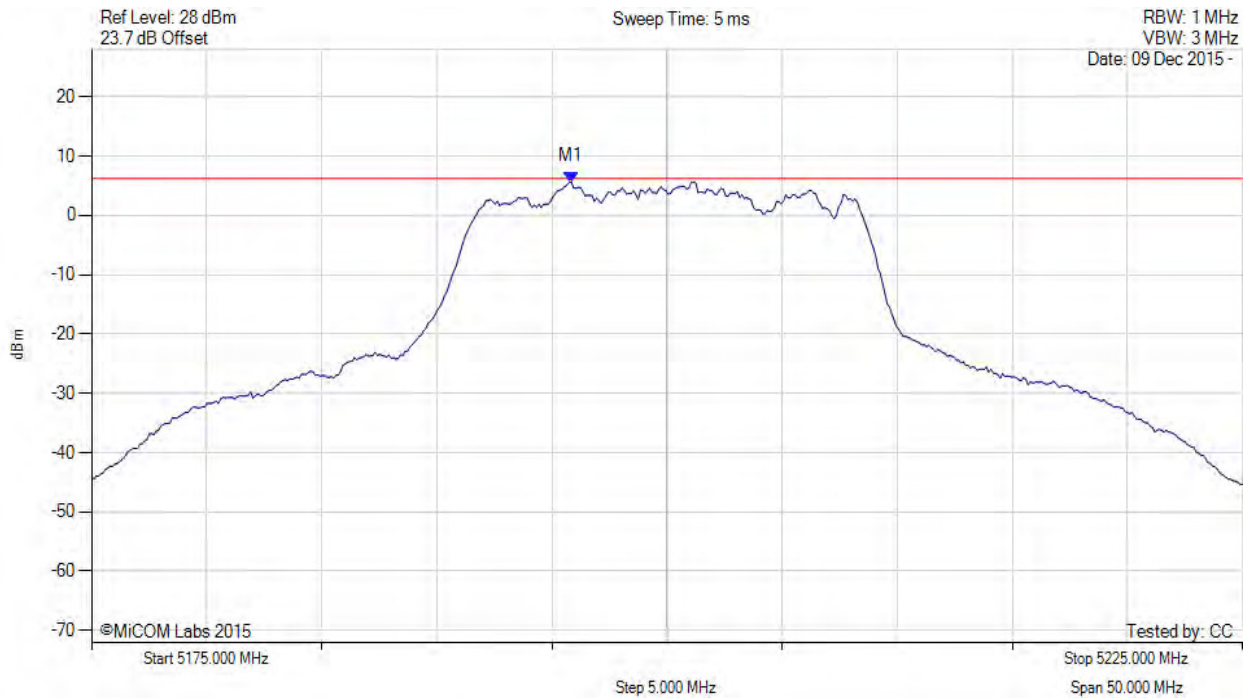

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5195.842 MHz : 5.652 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 127 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5200.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

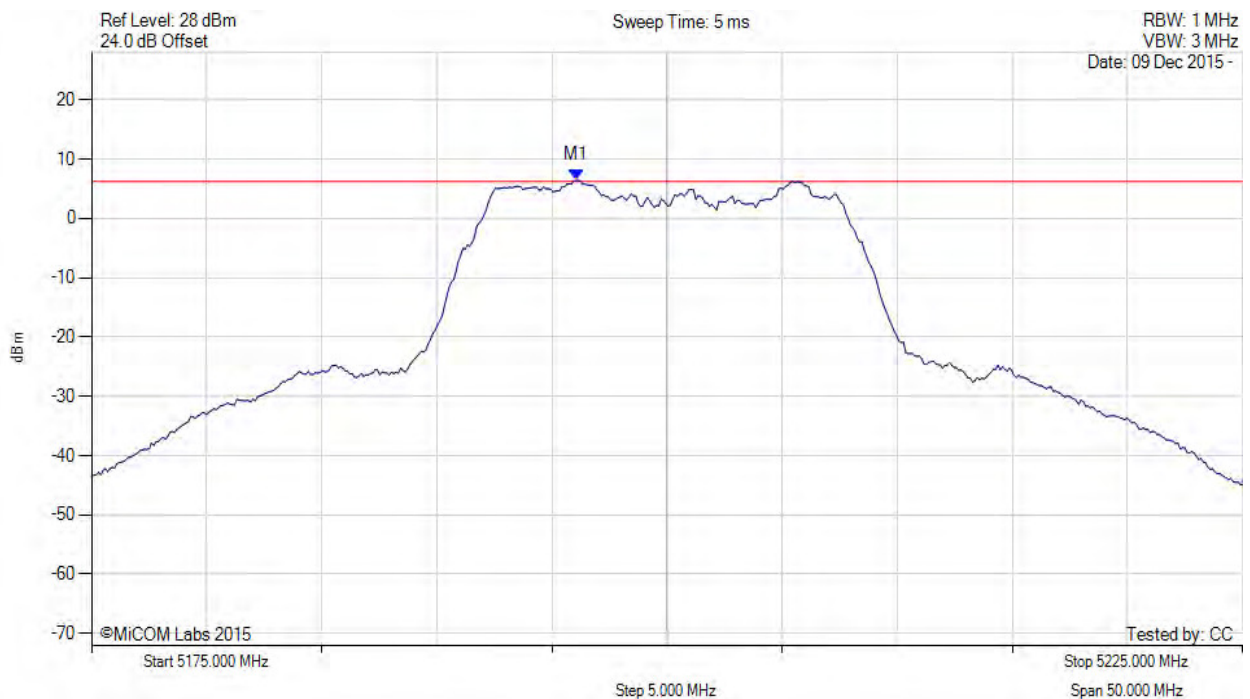

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5196.042 MHz : 6.407 dBm	Channel Frequency: 5200.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 128 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5200.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

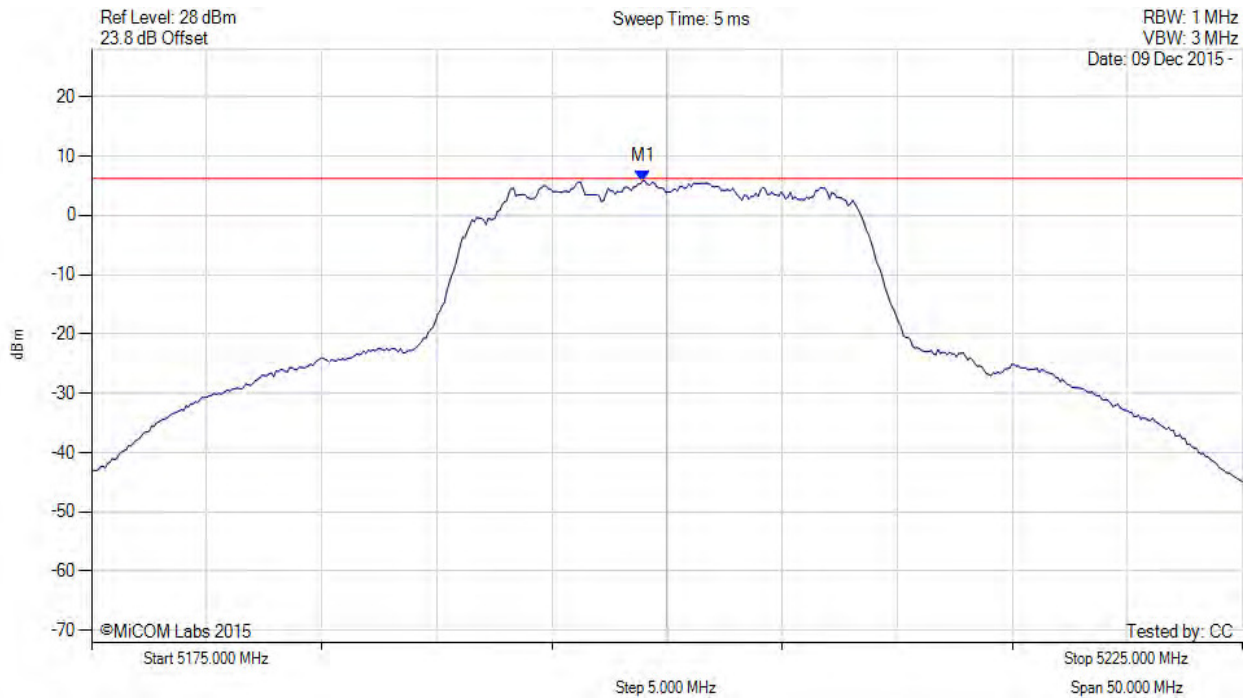

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5198.948 MHz : 5.846 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 129 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5200.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

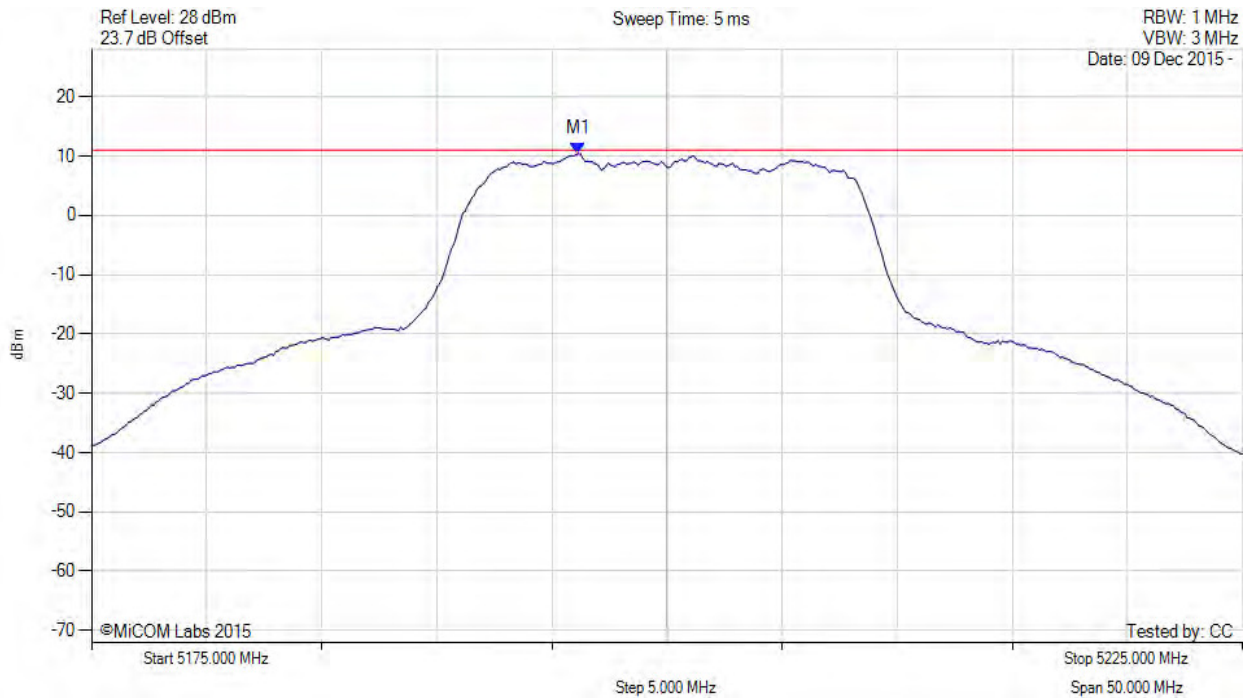

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5196.100 MHz : 10.415 dBm M1 + DCCF : 5196.100 MHz : 10.684 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -0.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 130 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5240.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

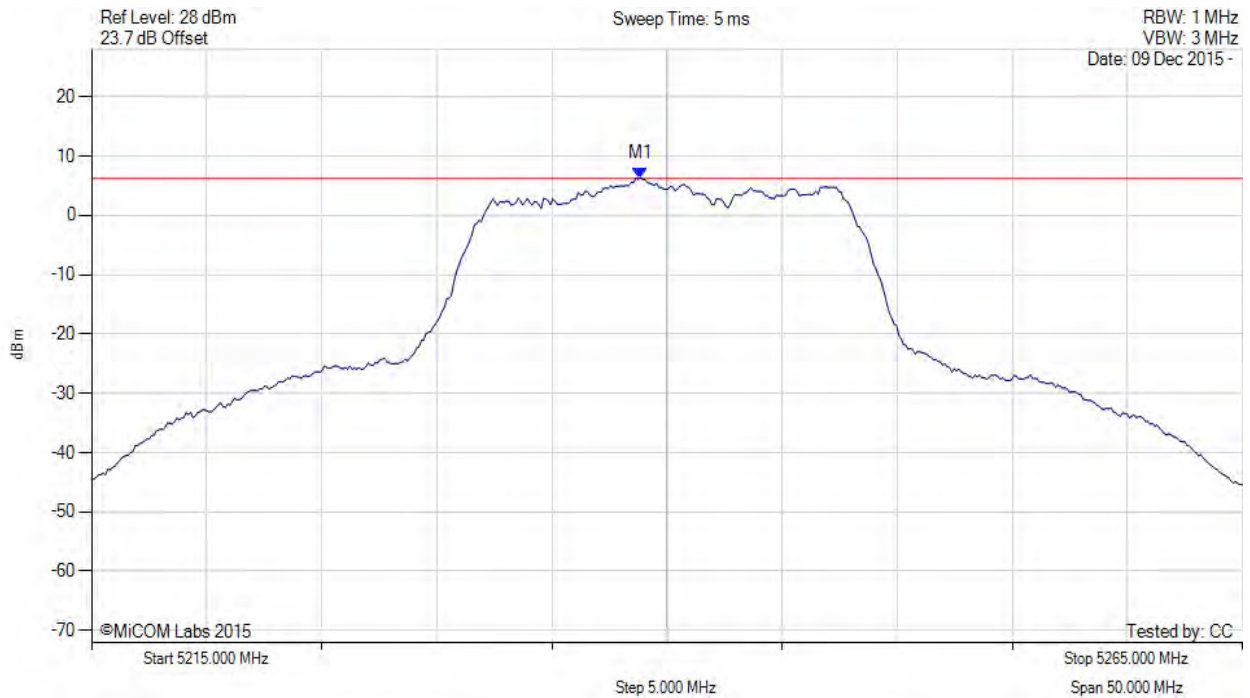

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5238.848 MHz : 6.302 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 131 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5240.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

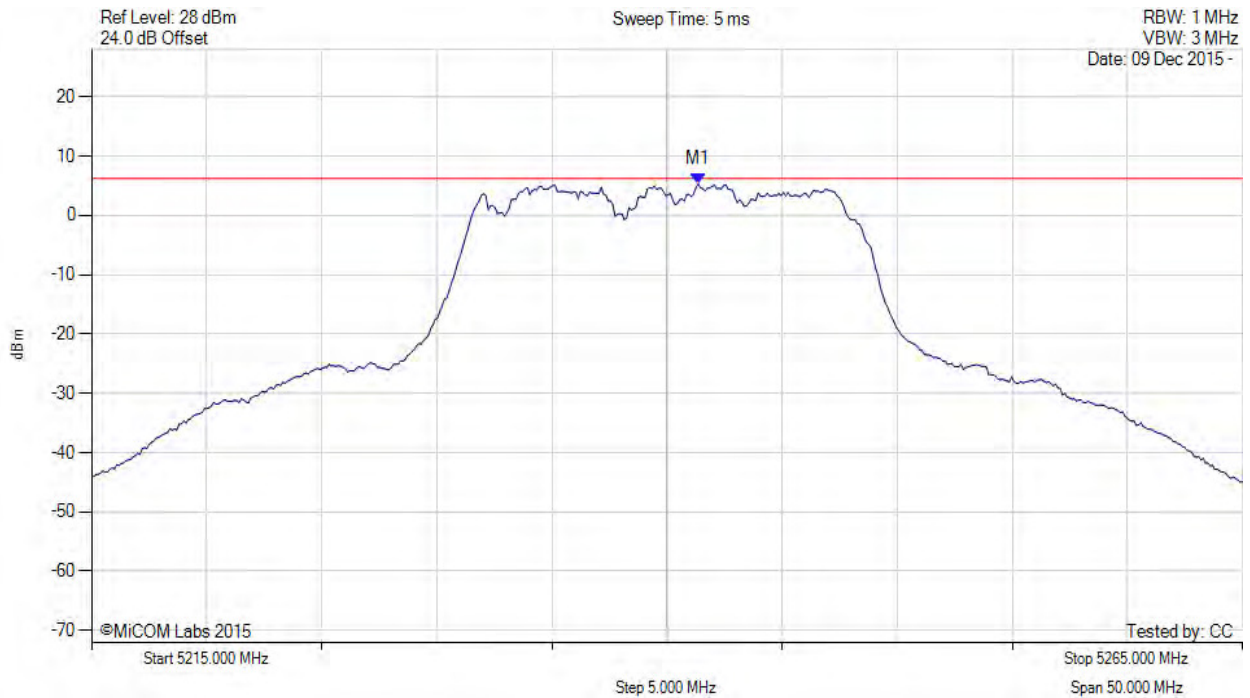

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5241.353 MHz : 5.321 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 132 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5240.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

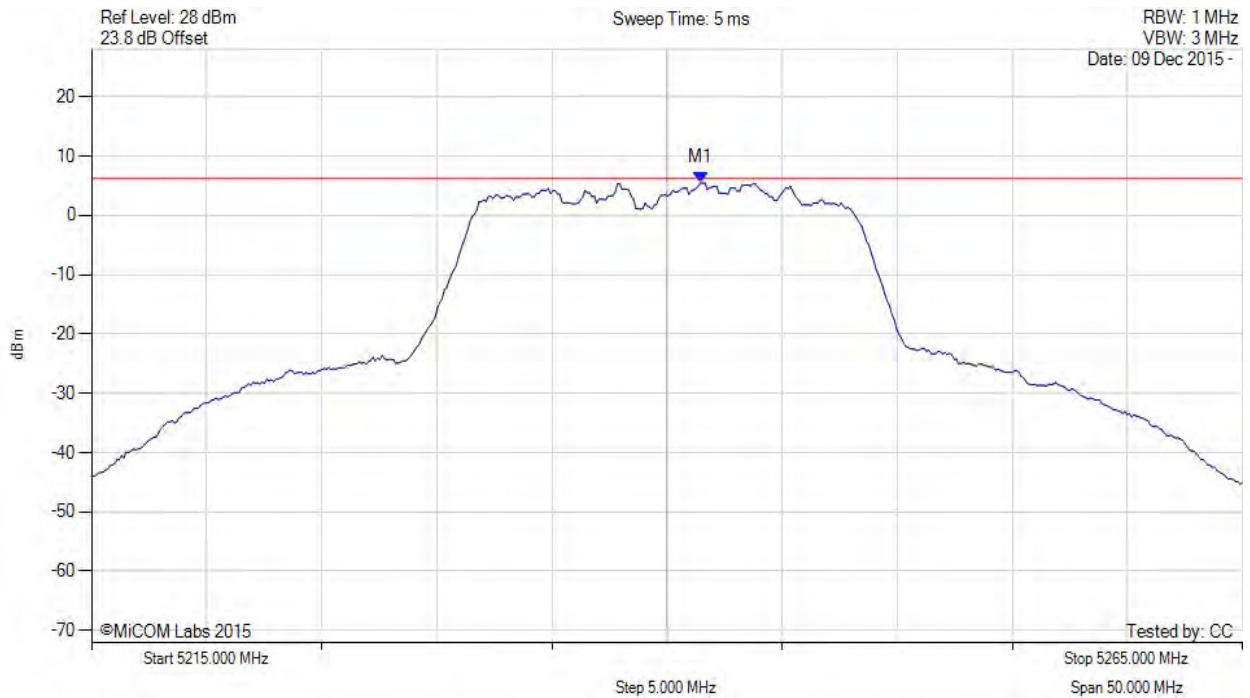

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5241.453 MHz : 5.495 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 133 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5240.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

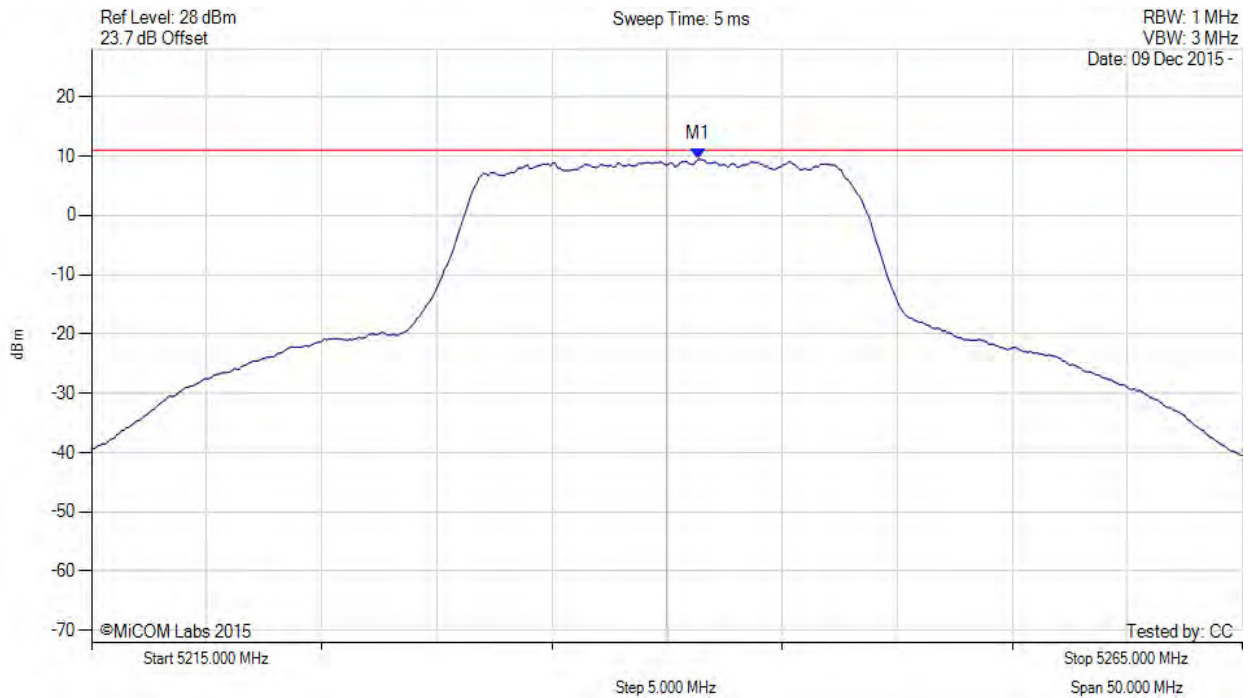

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5241.400 MHz : 9.436 dBm M1 + DCCF : 5241.400 MHz : 9.705 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -1.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 134 of 404



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

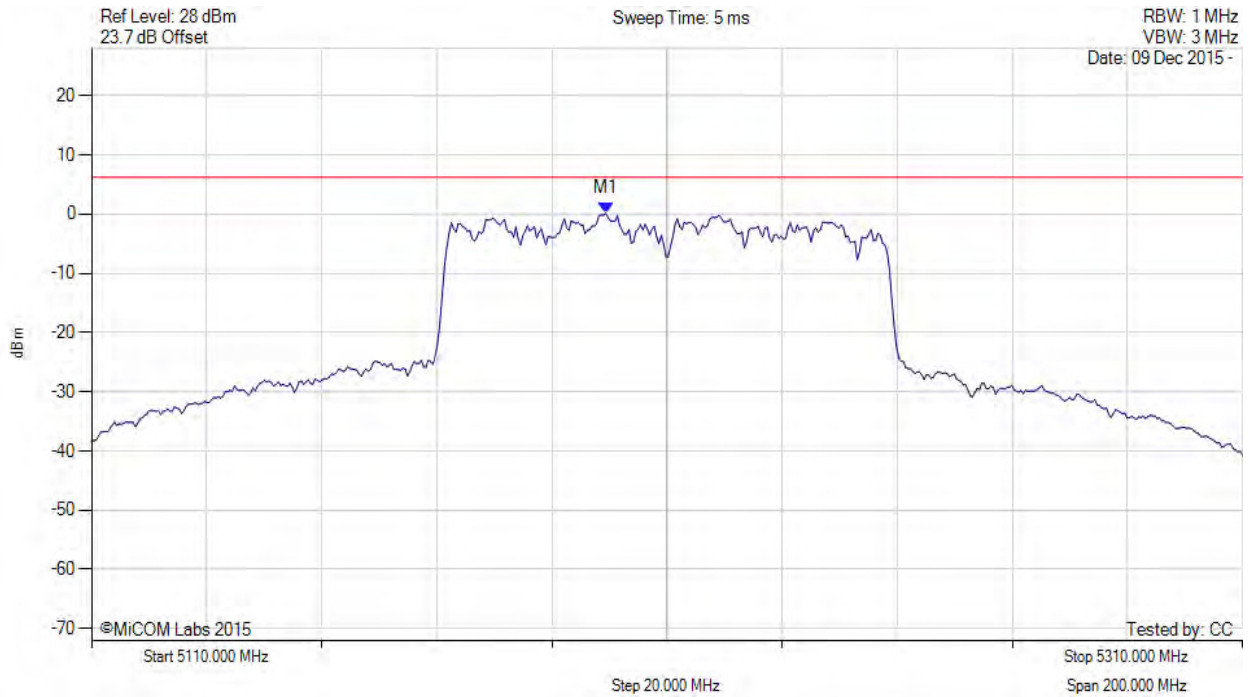

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5199.379 MHz : 0.126 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 135 of 404



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

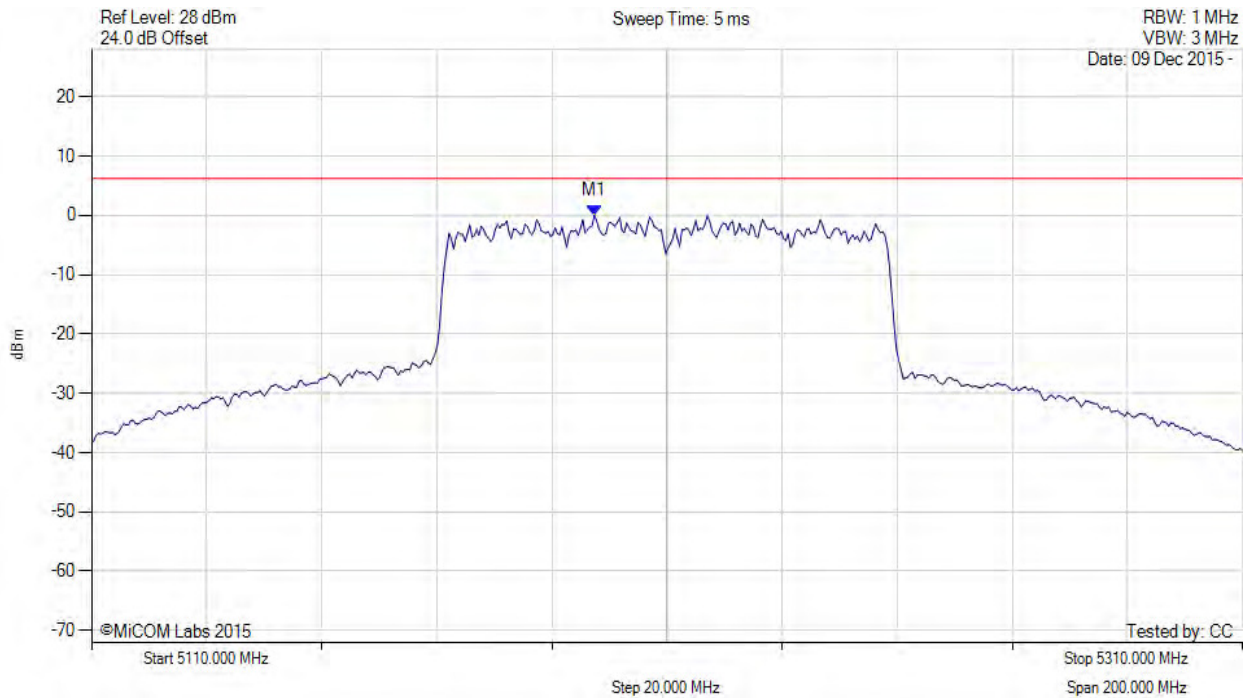

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5197.375 MHz : 0.017 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 136 of 404



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5210.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

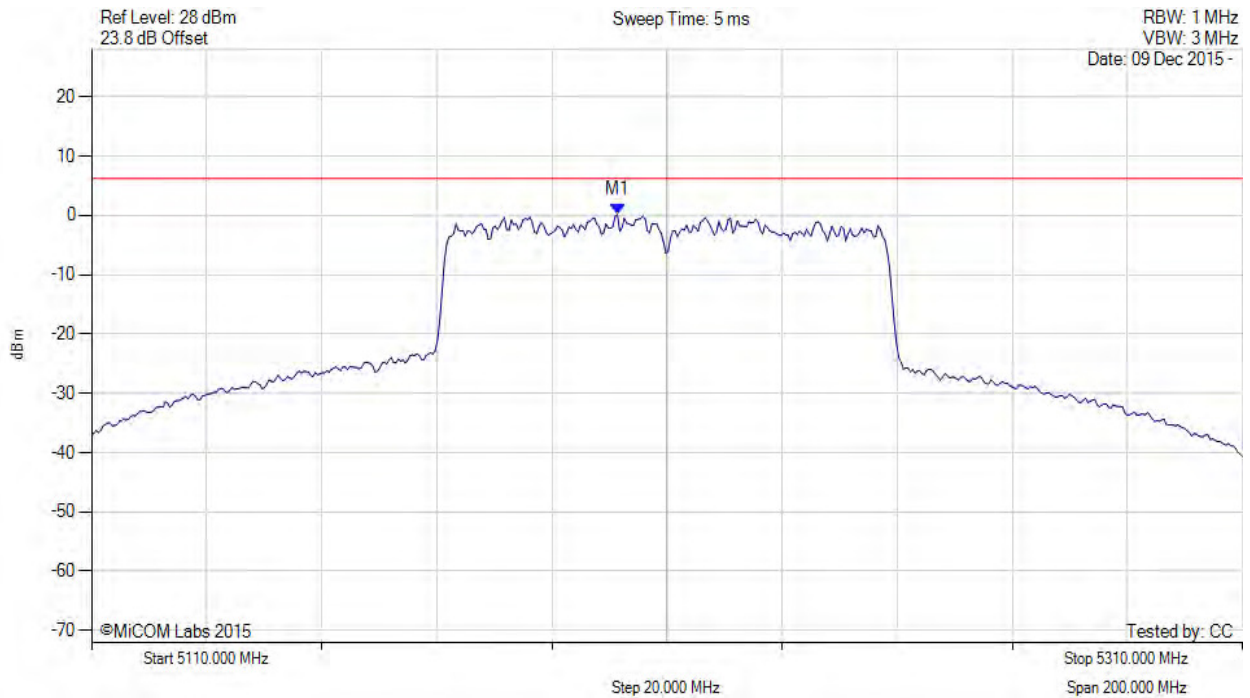

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5201.383 MHz : 0.169 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 137 of 404



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5210.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

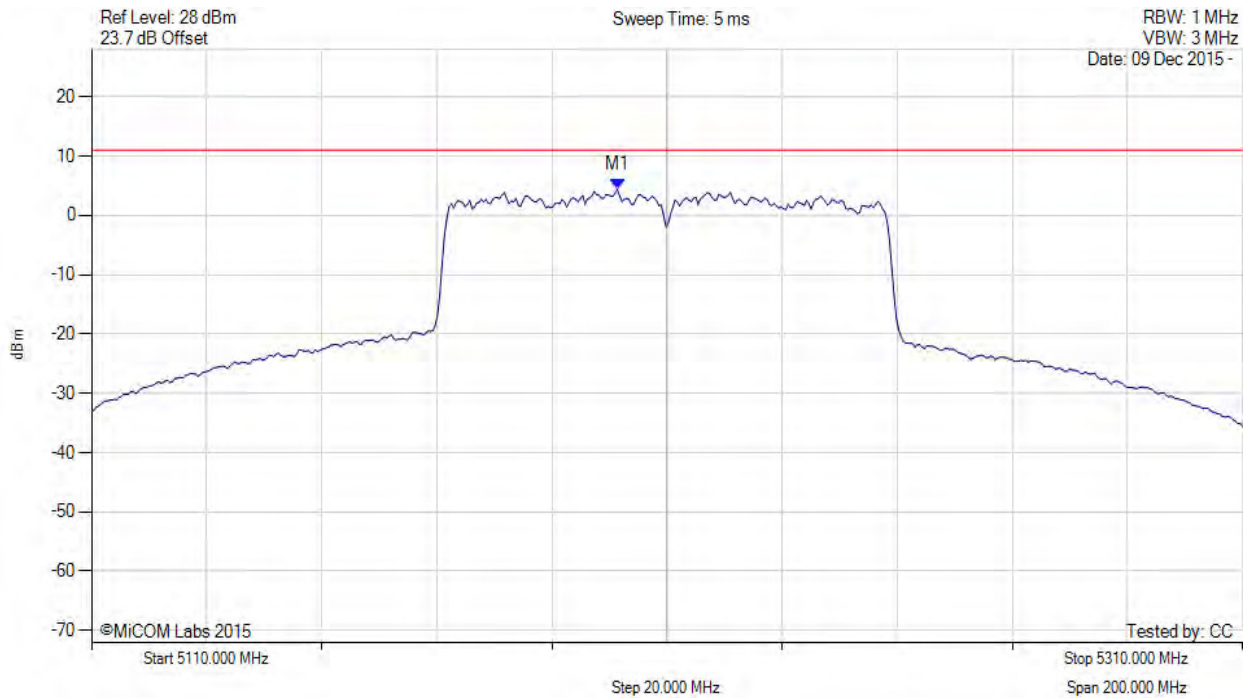

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5201.400 MHz : 4.380 dBm M1 + DCCF : 5201.400 MHz : 5.086 dBm Duty Cycle Correction Factor : +0.71 dB	Limit: ≤ 11.0 dBm Margin: -5.9 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 138 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

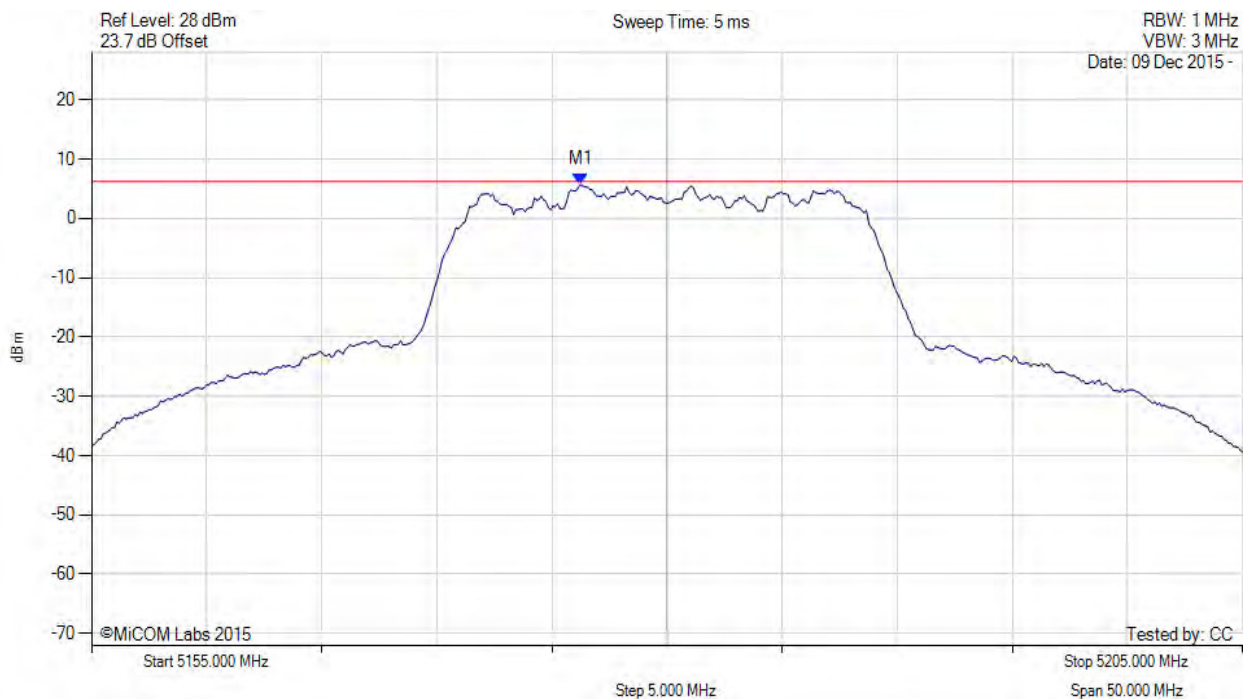

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5176.242 MHz : 5.738 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 139 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

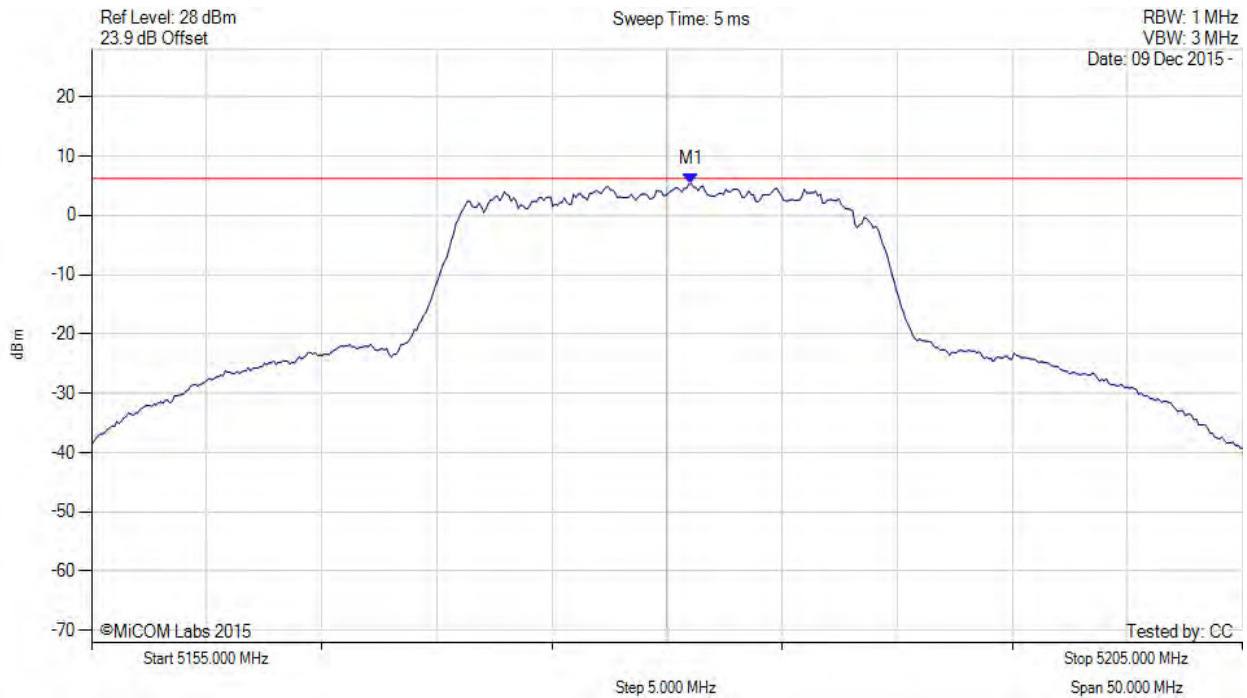

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5181.052 MHz : 5.287 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 140 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5180.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

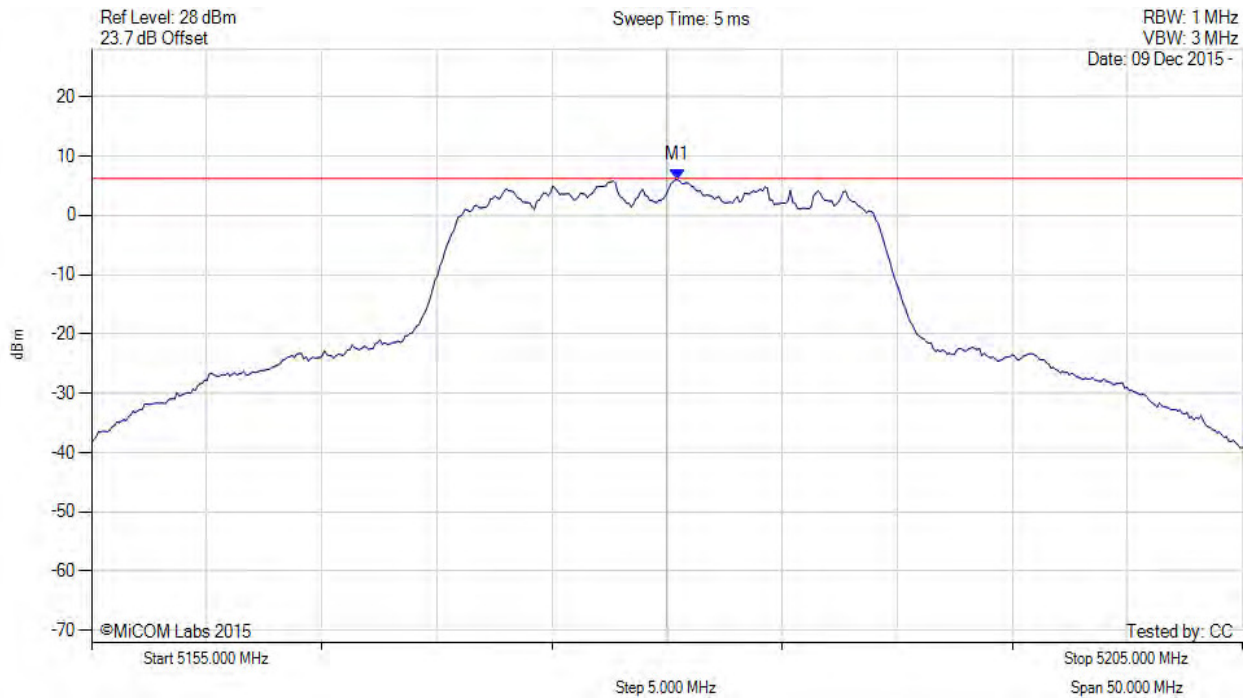

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5180.451 MHz : 6.003 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 141 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5180.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

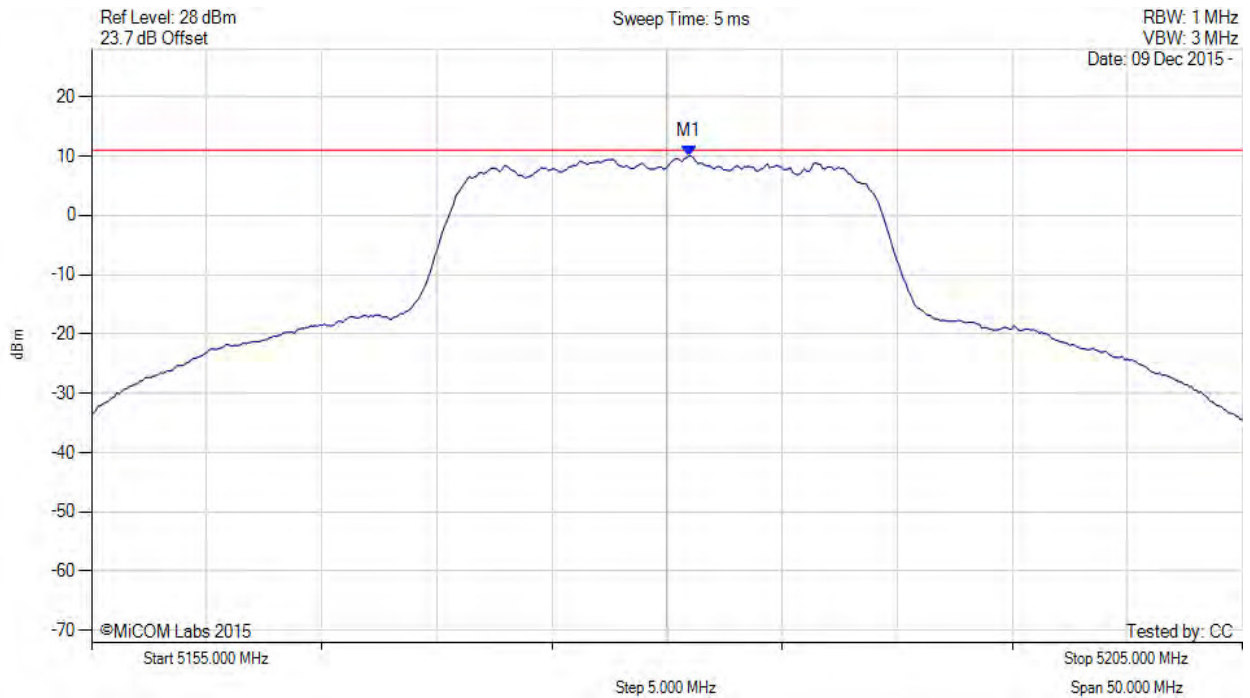

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5181.000 MHz : 10.028 dBm M1 + DCCF : 5181.000 MHz : 10.297 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -0.7 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 142 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

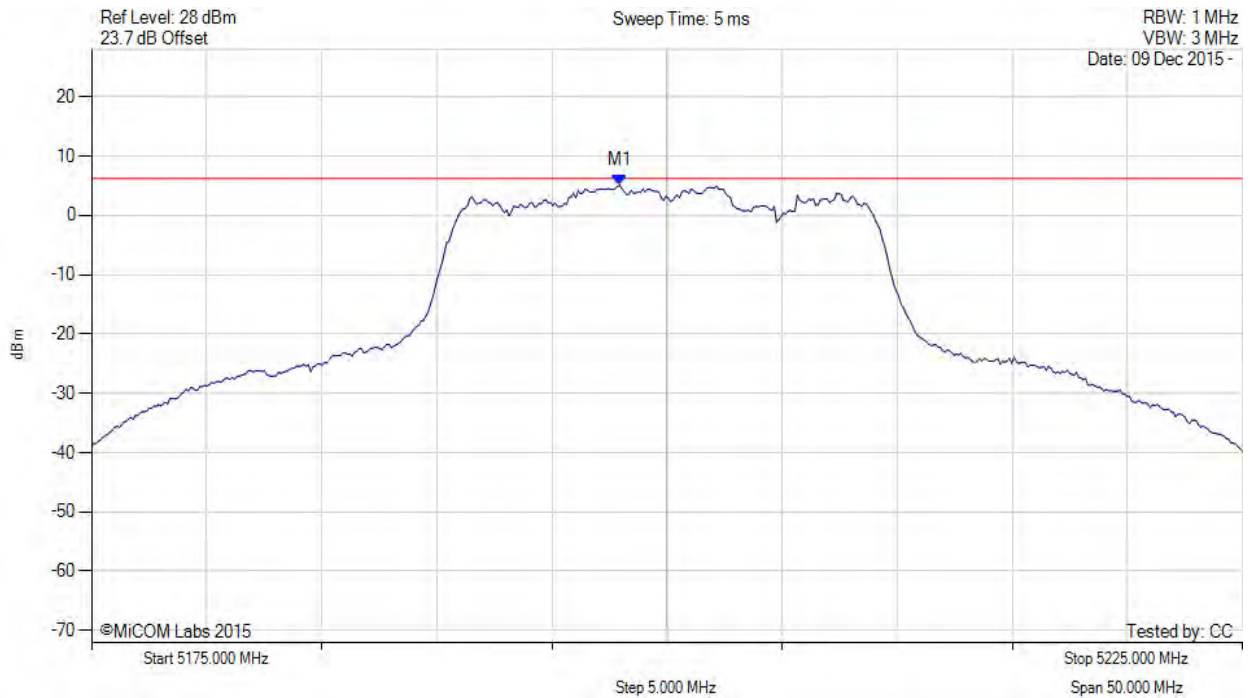

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5197.946 MHz : 5.103 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 143 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

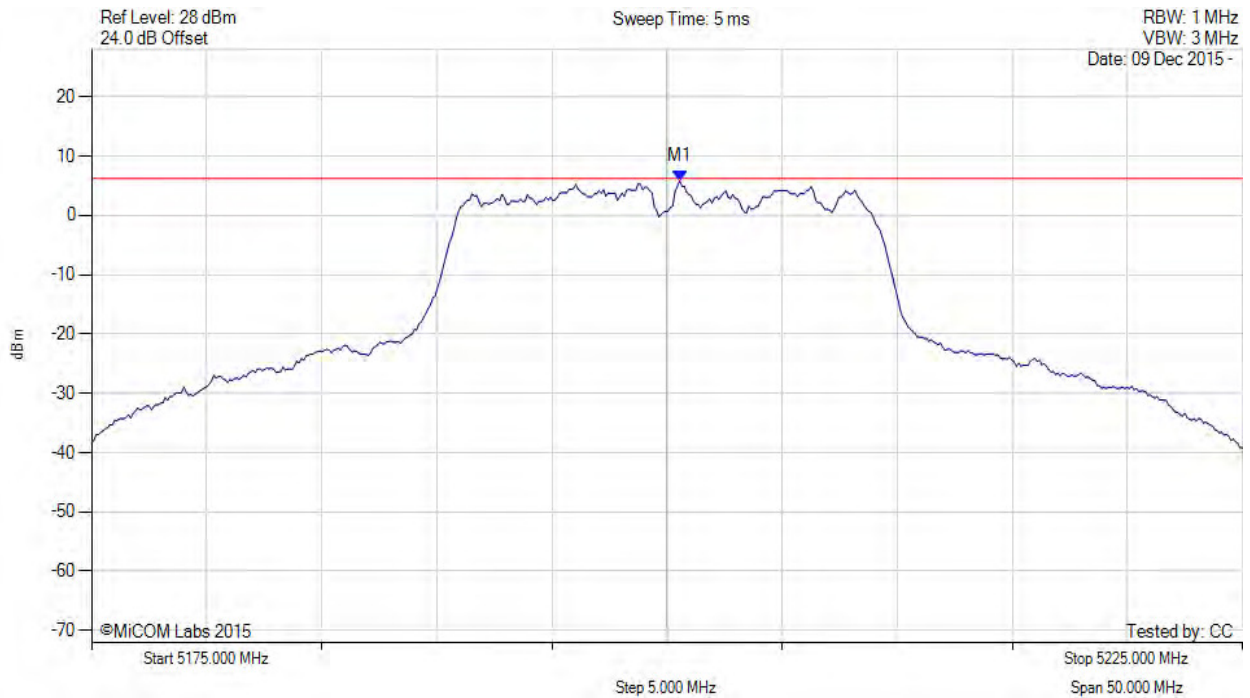

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5200.551 MHz : 5.791 dBm	Channel Frequency: 5200.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 144 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5200.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

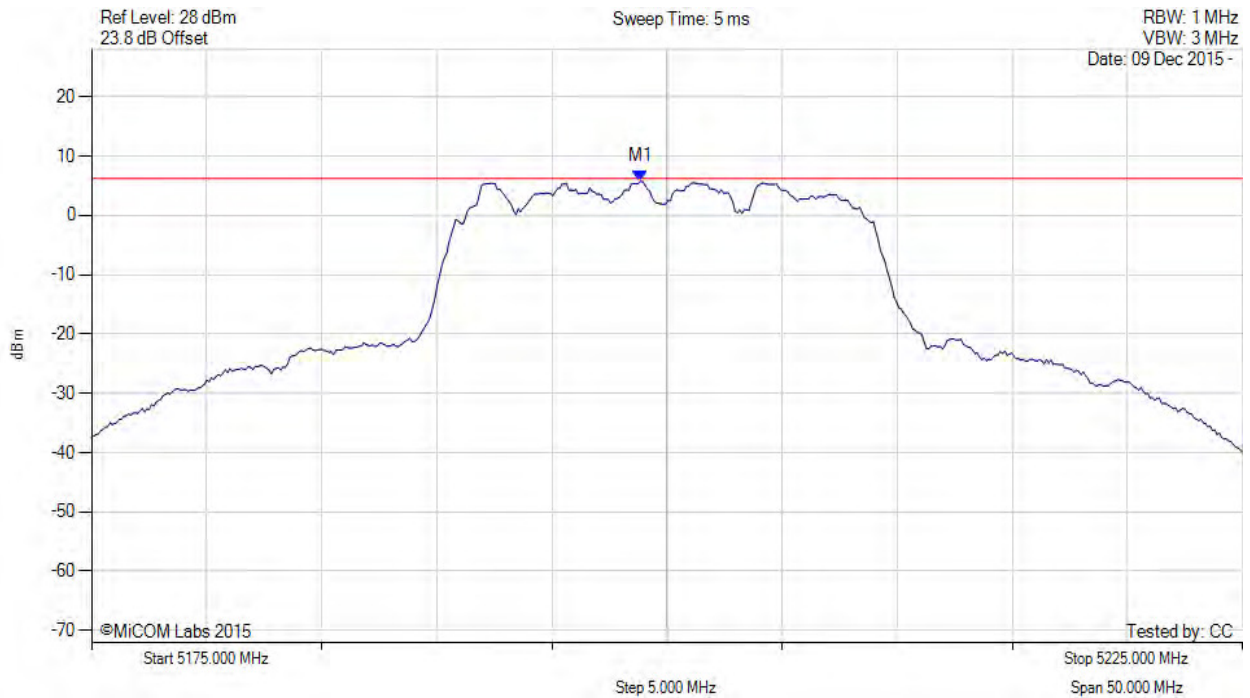

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5198.848 MHz : 5.752 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 145 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5200.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

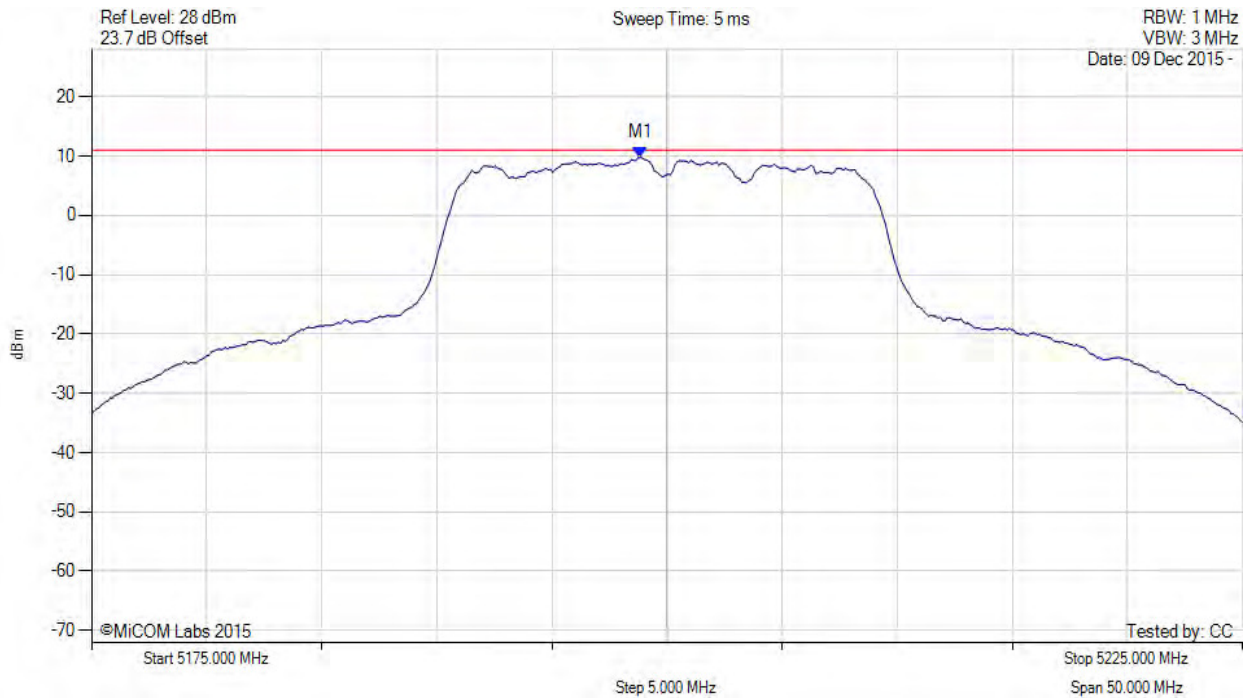

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5198.800 MHz : 9.758 dBm M1 + DCCF : 5198.800 MHz : 10.027 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -0.9 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 146 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

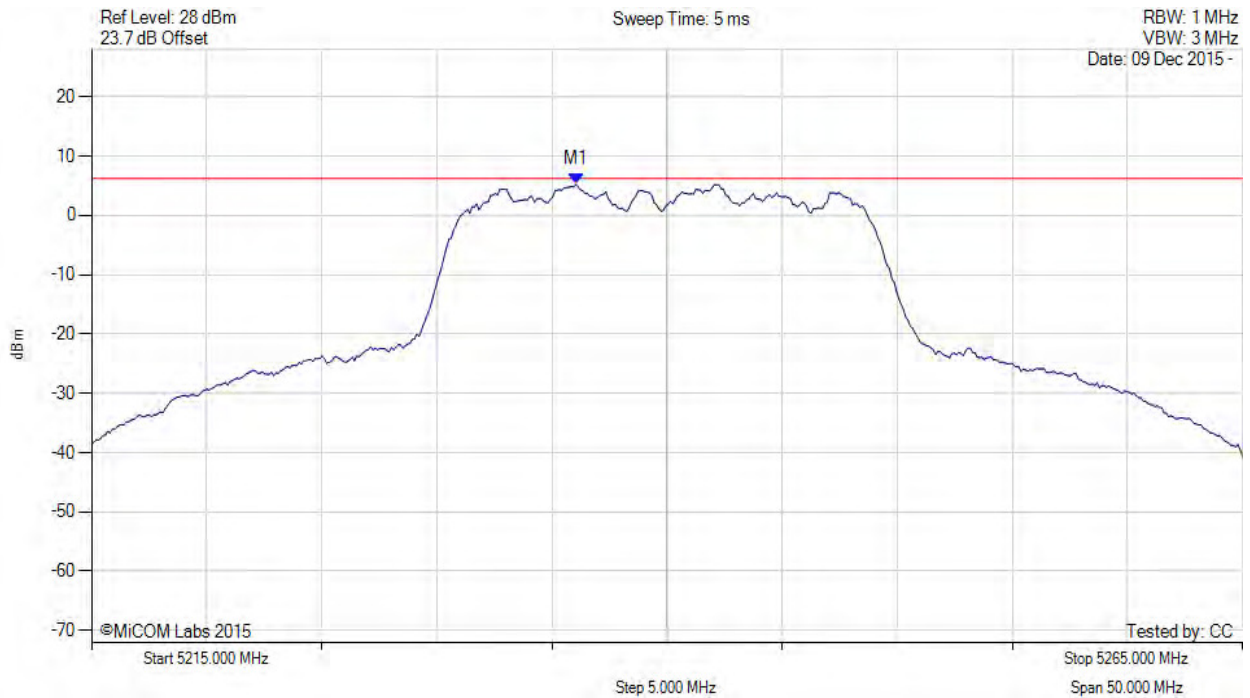

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5236.042 MHz : 5.240 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 147 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

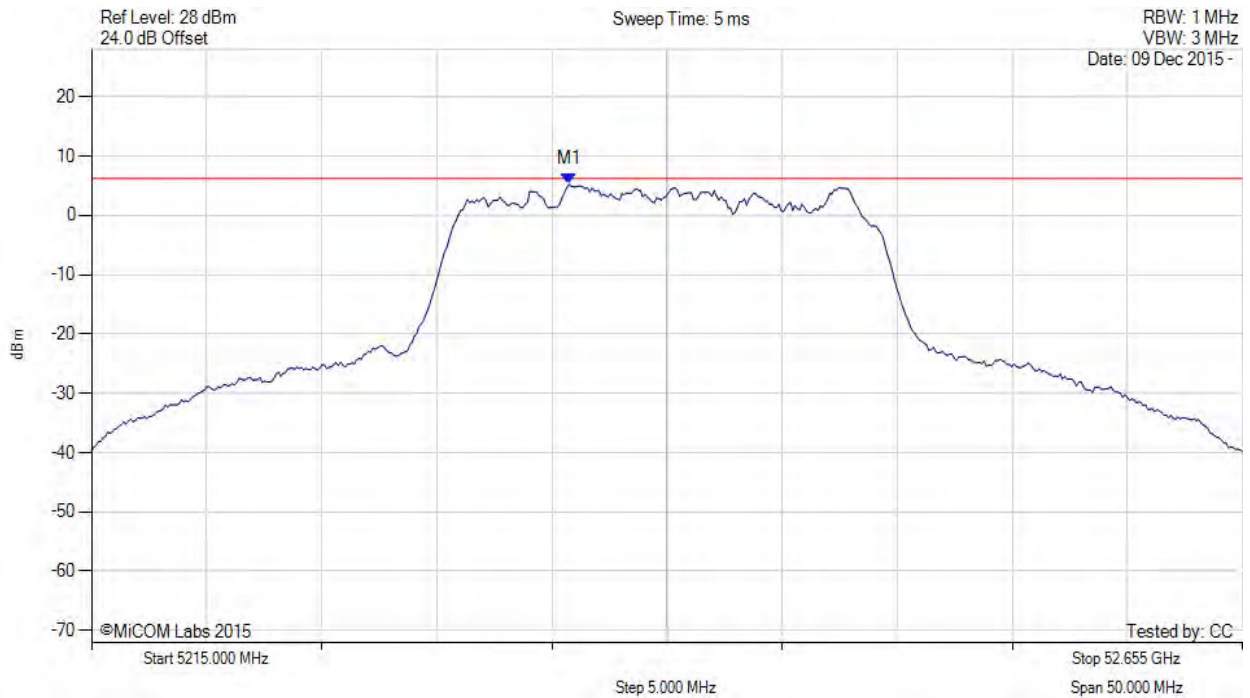

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5235.741 MHz : 5.251 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 148 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5240.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

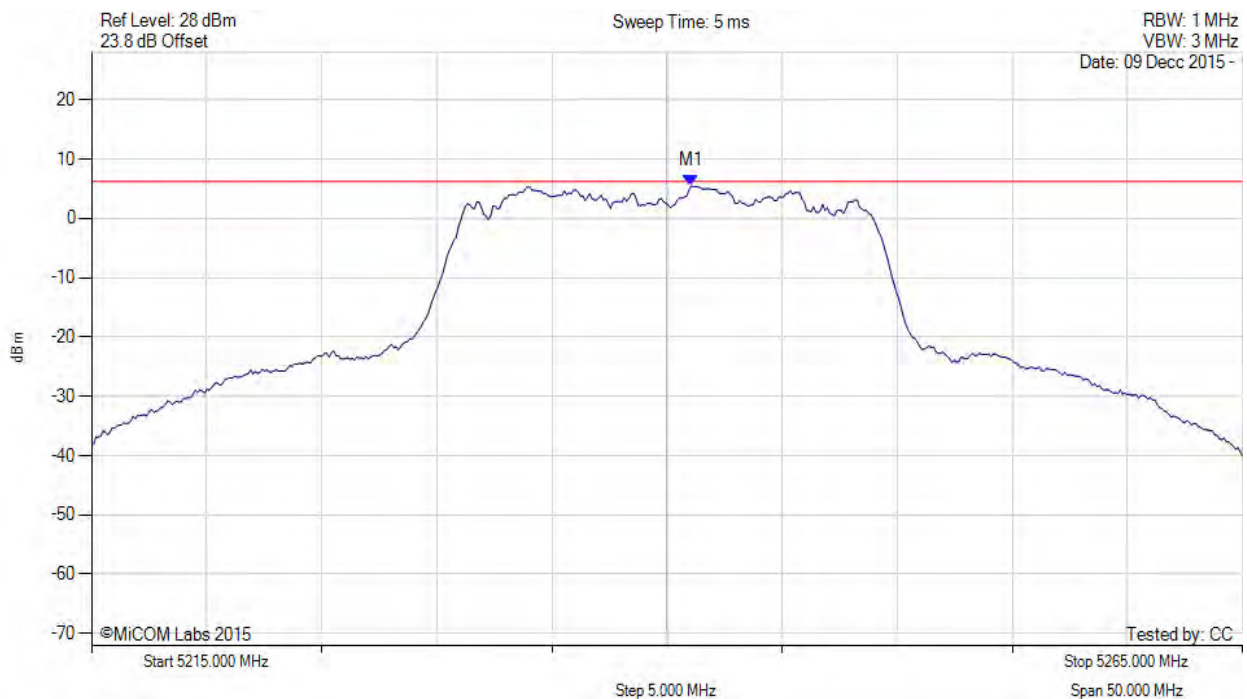

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5241.052 MHz : 5.434 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 149 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5240.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

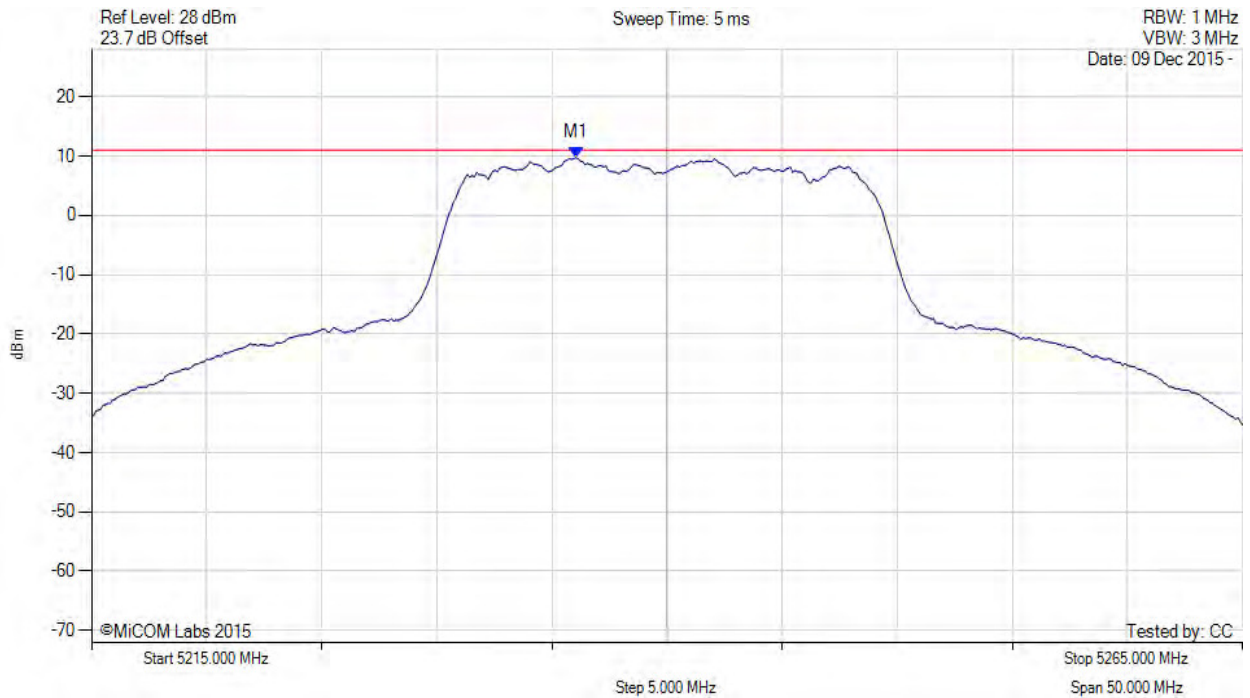

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5236.000 MHz : 9.728 dBm M1 + DCCF : 5236.000 MHz : 9.997 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -1.0 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 150 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

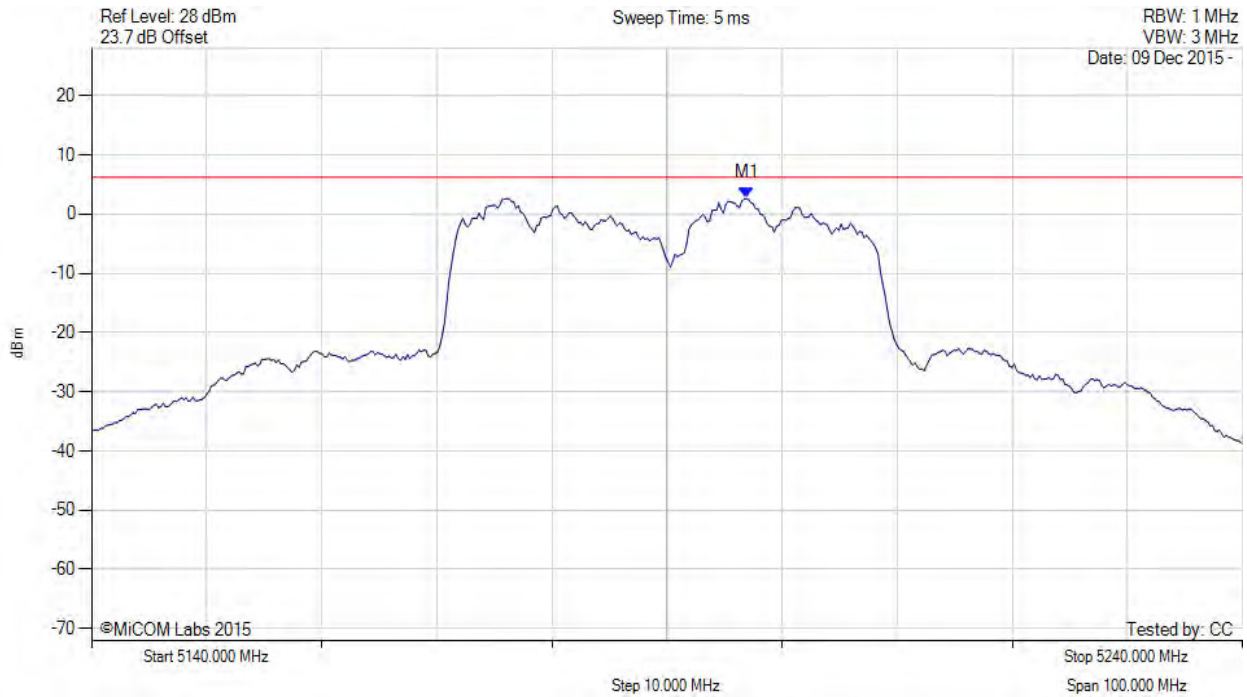

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5196.914 MHz : 2.631 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 151 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

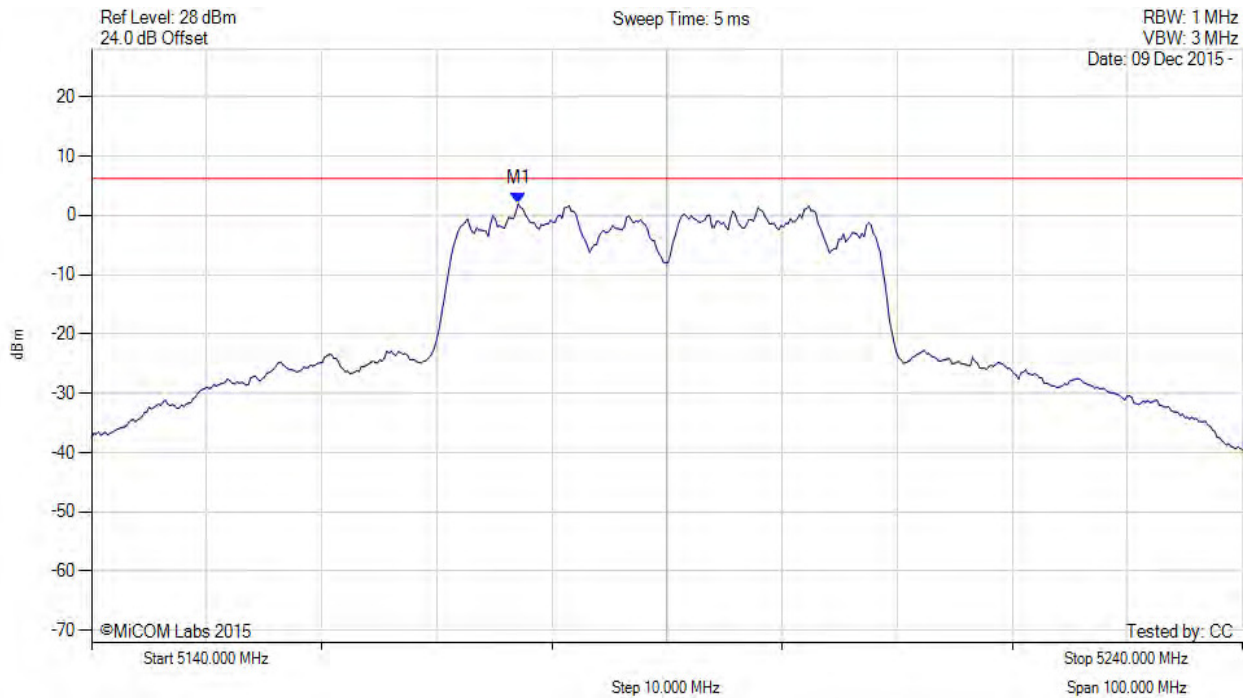

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5177.074 MHz : 1.951 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 152 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5190.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

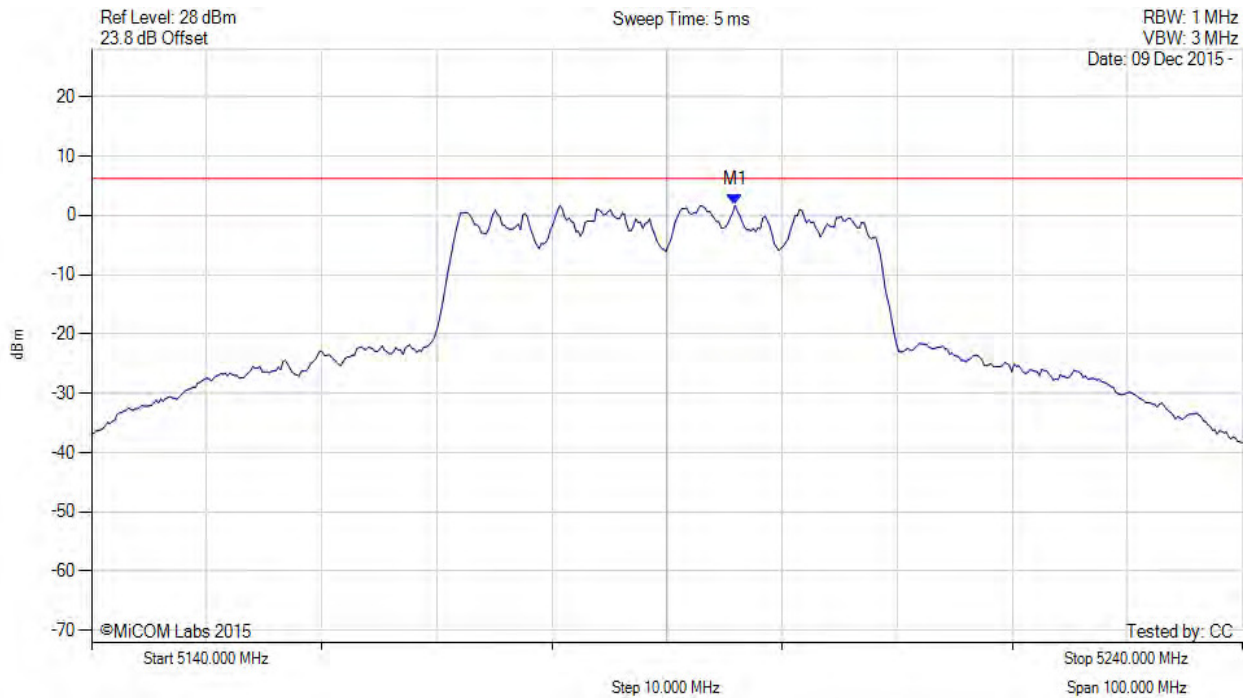

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5195.912 MHz : 1.699 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 153 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5190.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

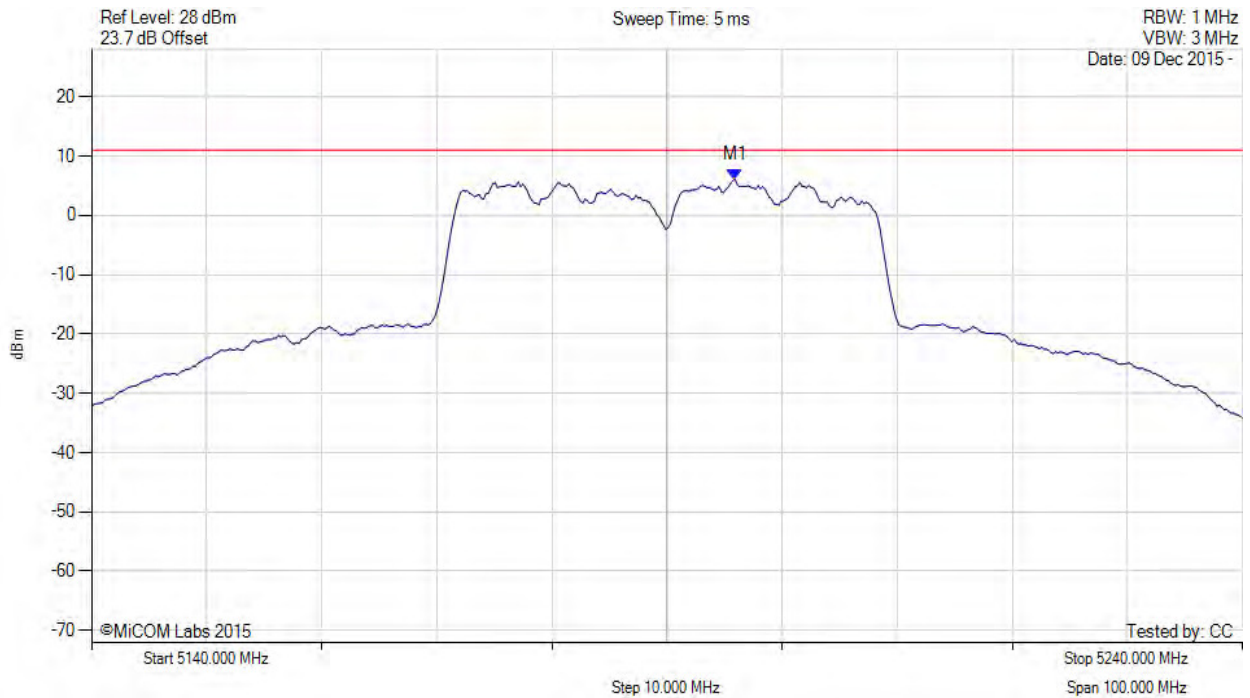

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5195.900 MHz : 6.090 dBm M1 + DCCF : 5195.900 MHz : 6.796 dBm Duty Cycle Correction Factor : +0.71 dB	Limit: ≤ 11.0 dBm Margin: -4.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 154 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

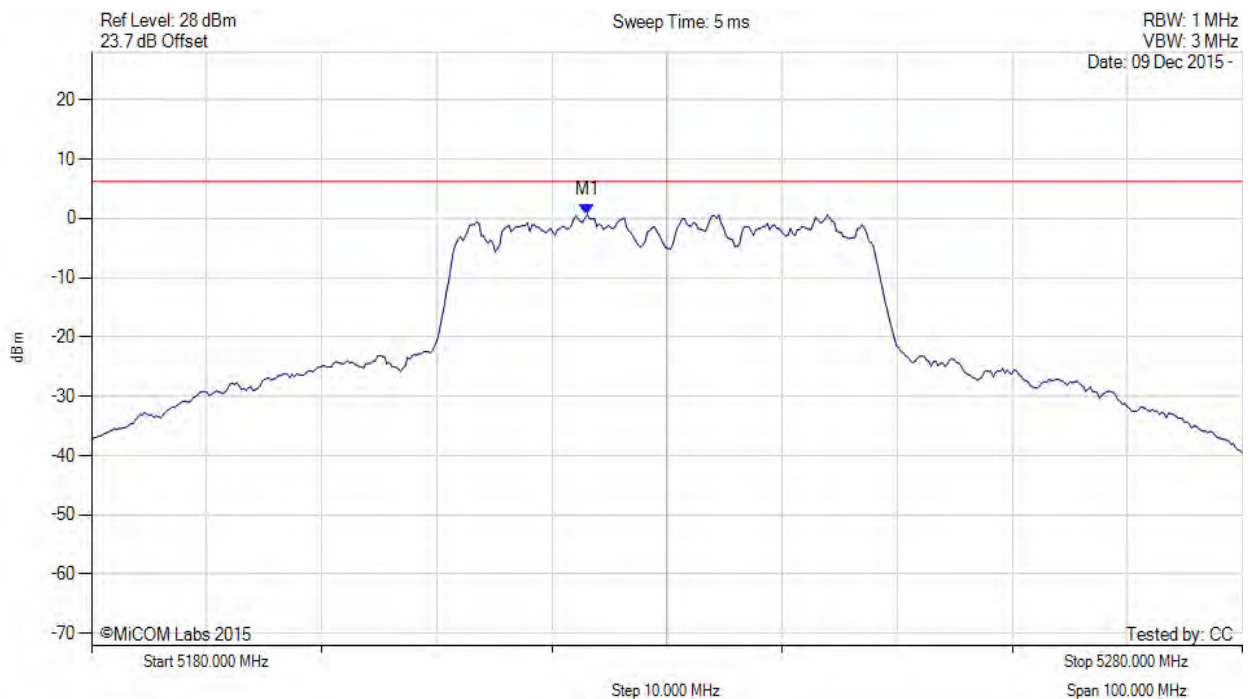

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5223.086 MHz : 0.614 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 155 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

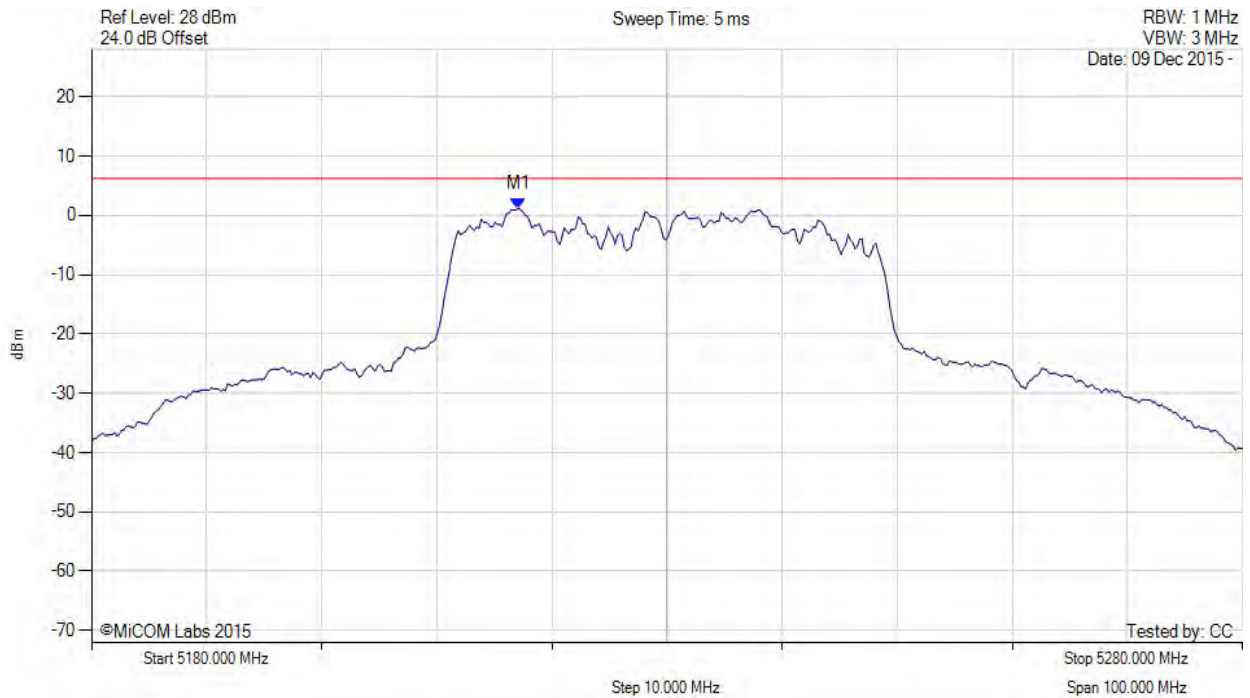

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5217.074 MHz : 1.179 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 156 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5230.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

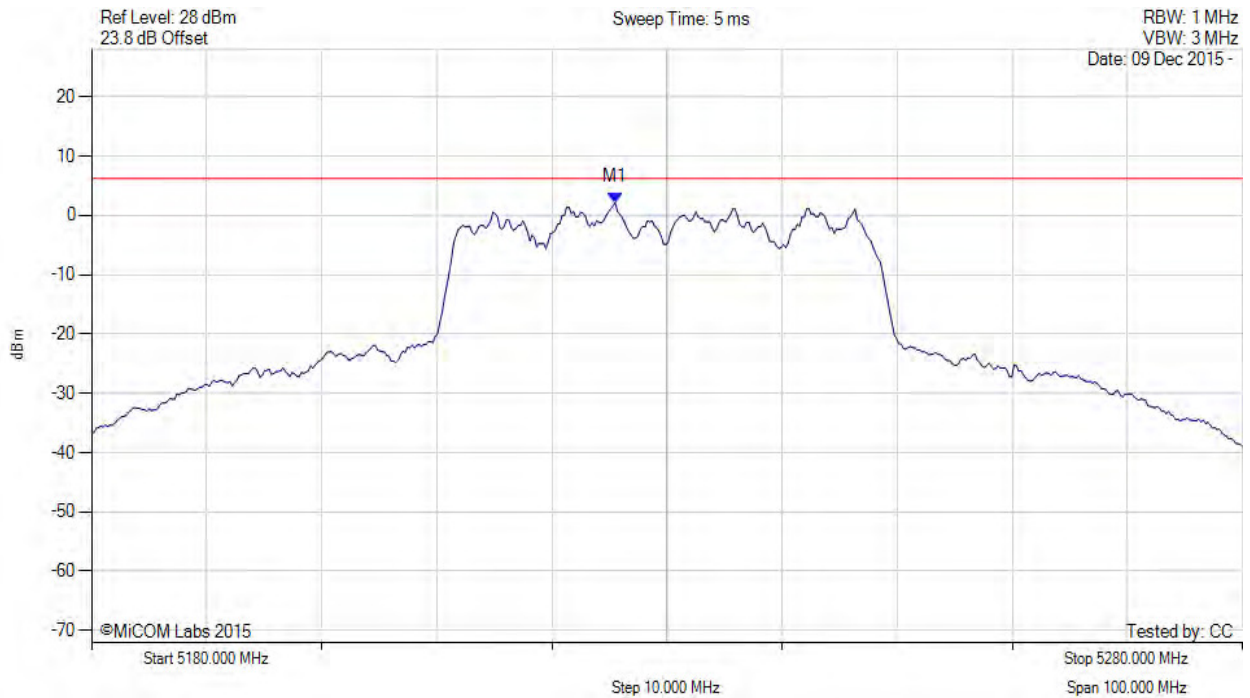

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5225.491 MHz : 2.146 dBm	Limit: ≤ 6.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 157 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5230.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

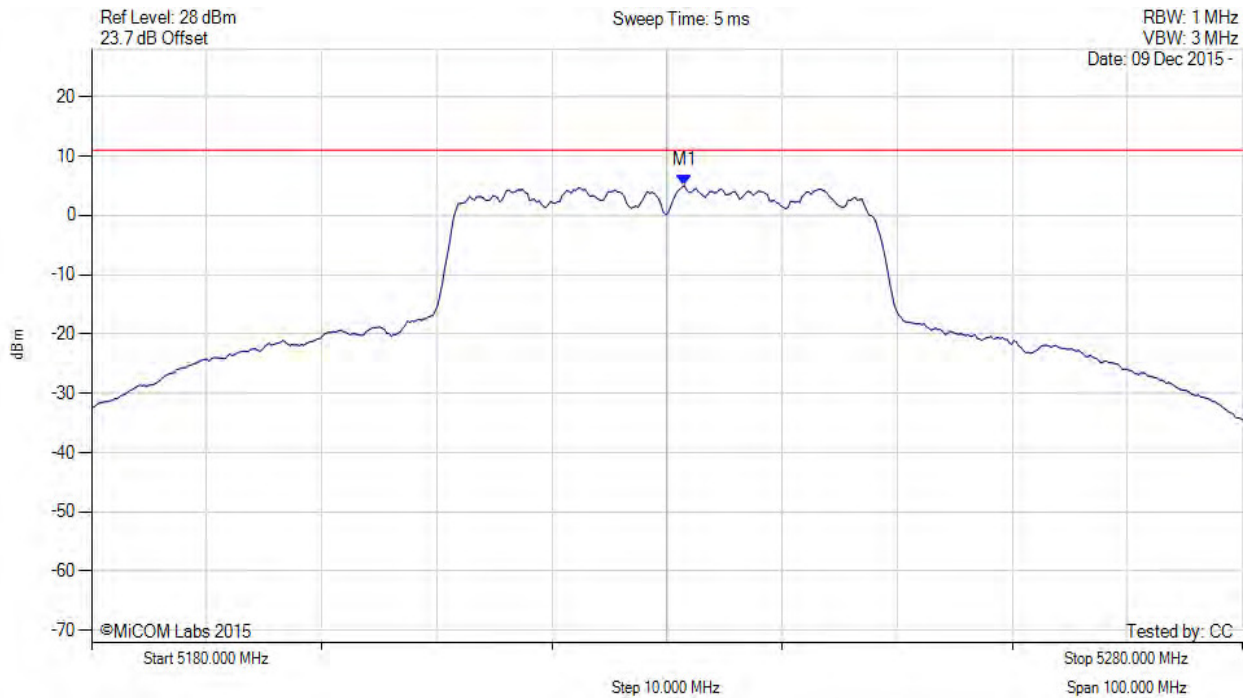

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5231.500 MHz : 5.050 dBm M1 + DCCF : 5231.500 MHz : 5.756 dBm Duty Cycle Correction Factor : +0.71 dB	Limit: ≤ 11.0 dBm Margin: -5.2 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 158 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5260.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

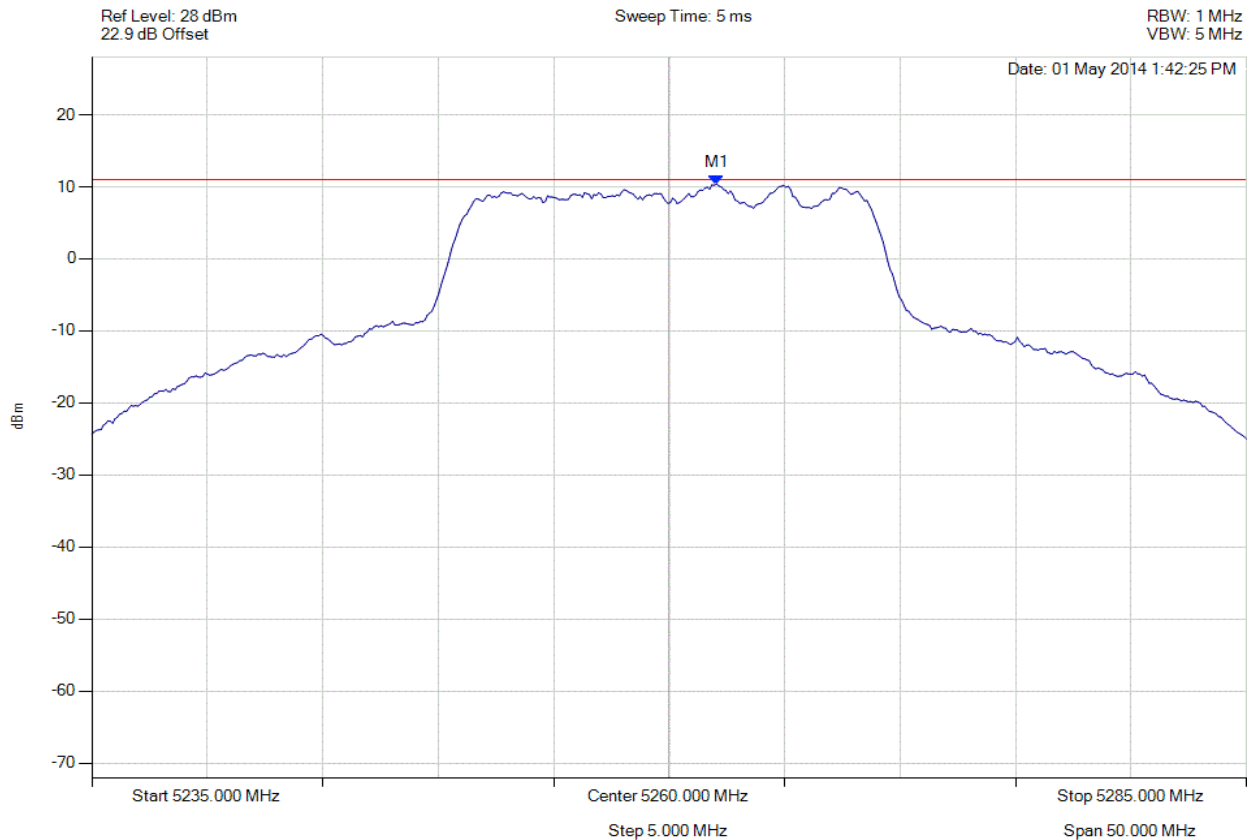

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5262.054 MHz : 10.378 dBm M1 + DCCF : 5262.054 MHz : 10.648 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -0.4 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 159 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5300.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

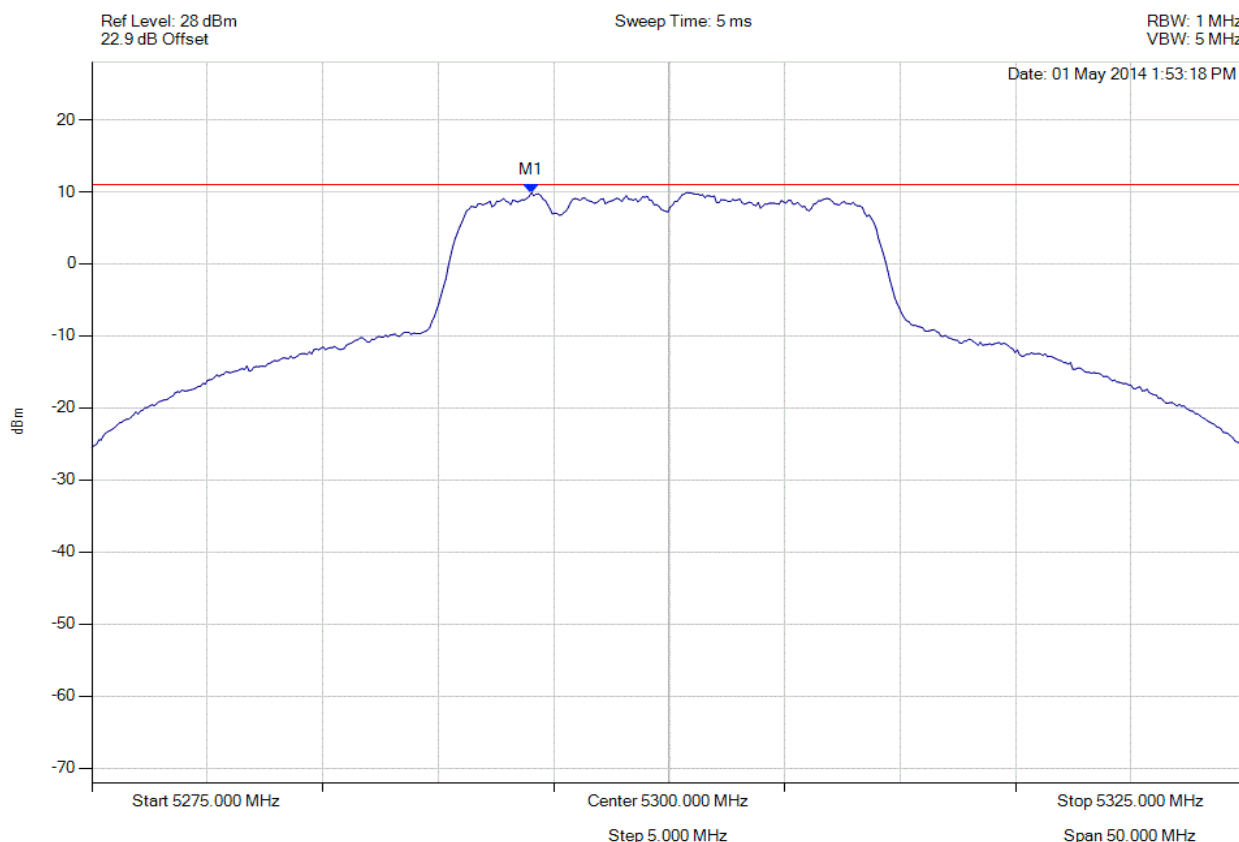

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5294.038 MHz : 9.888 dBm M1 + DCCF : 5294.038 MHz : 10.158 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -0.8 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 160 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5320.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

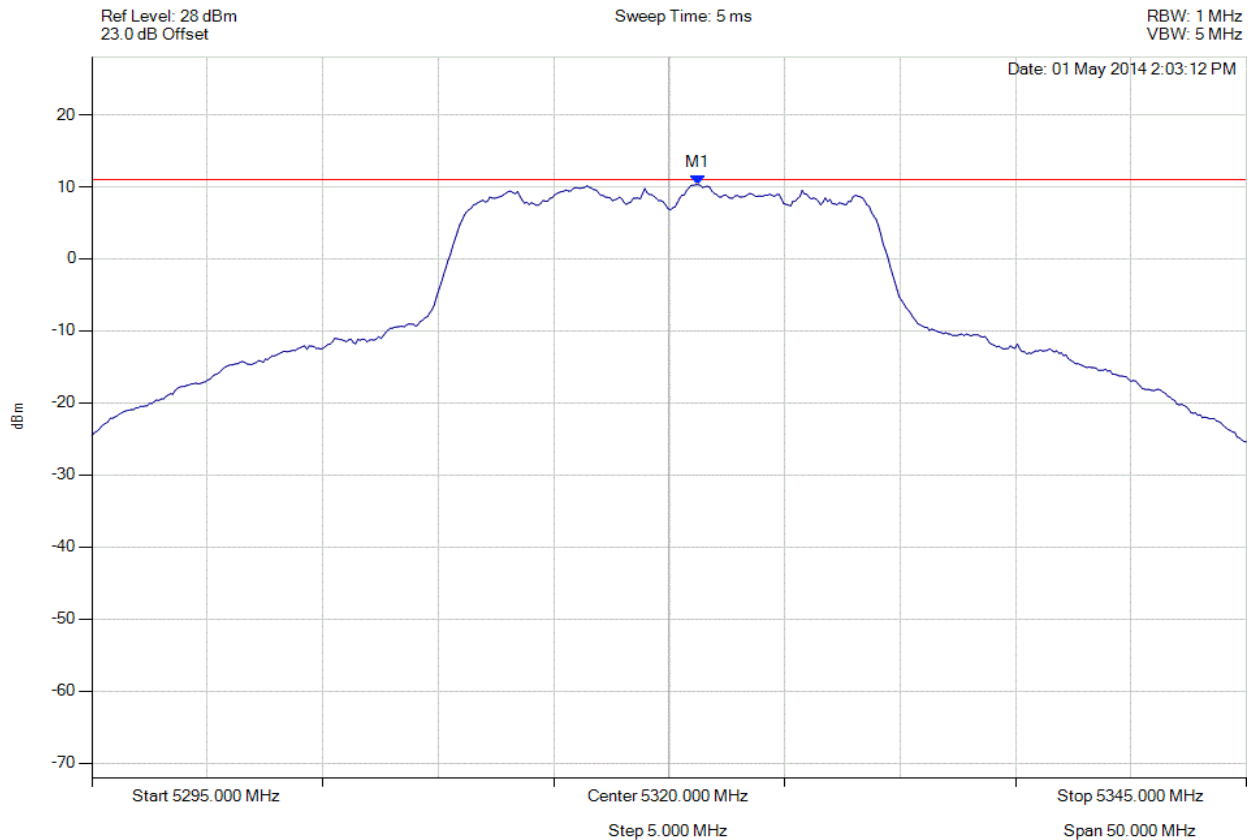

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5321.253 MHz : 10.309 dBm M1 + DCCF : 5321.253 MHz : 10.579 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -0.4 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 161 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

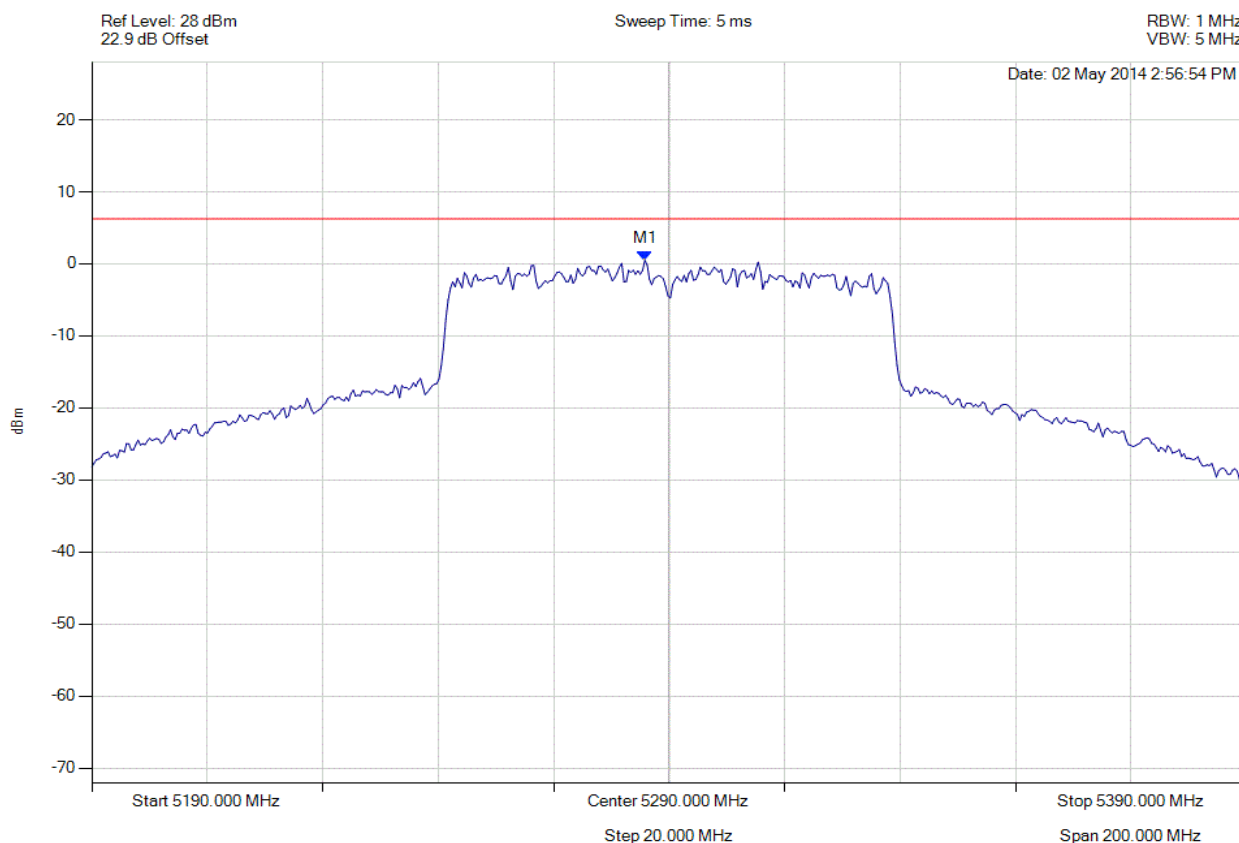

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5285.792 MHz : 0.484 dBm	Limit: ≤ 6.229 dBm Margin: -4.98 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 162 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

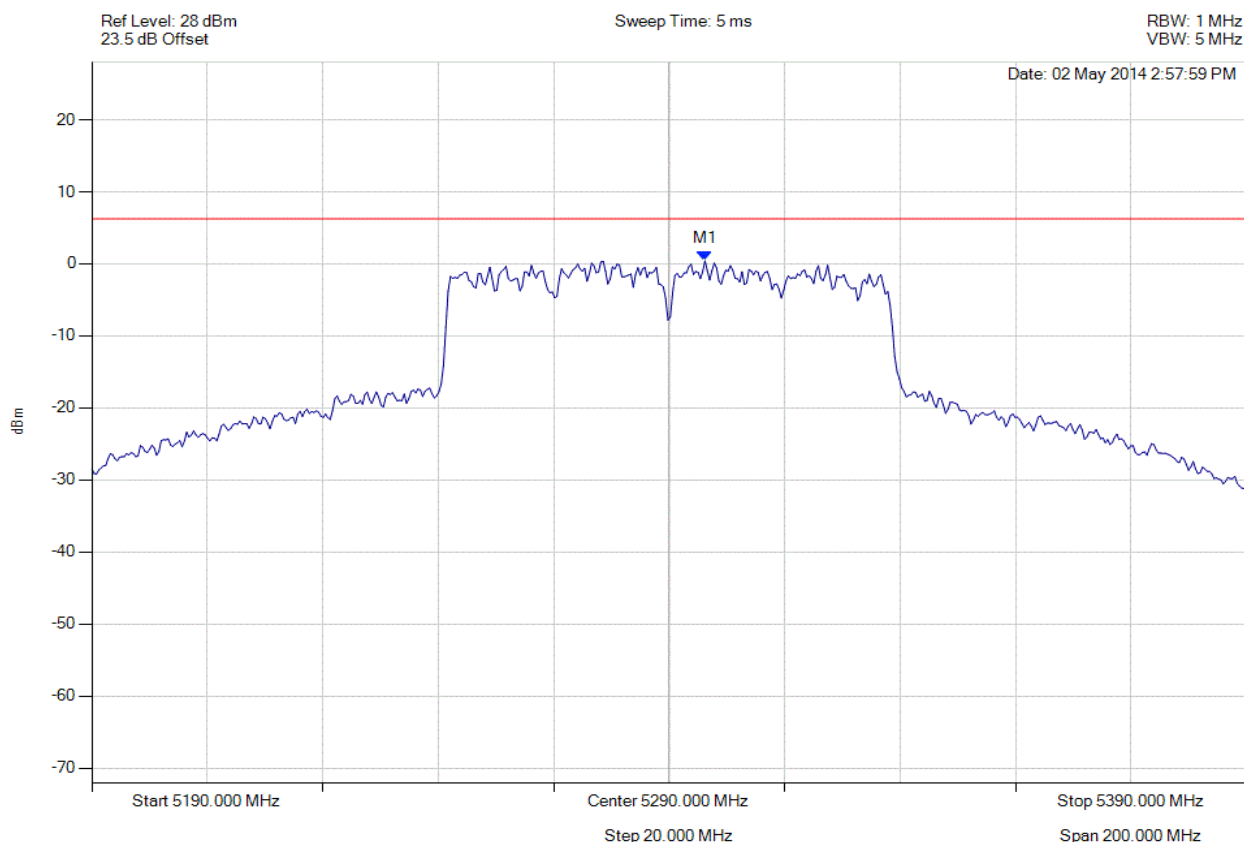

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5296.212 MHz : 0.402 dBm	Limit: ≤ 6.229 dBm Margin: -5.06 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 163 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5290.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

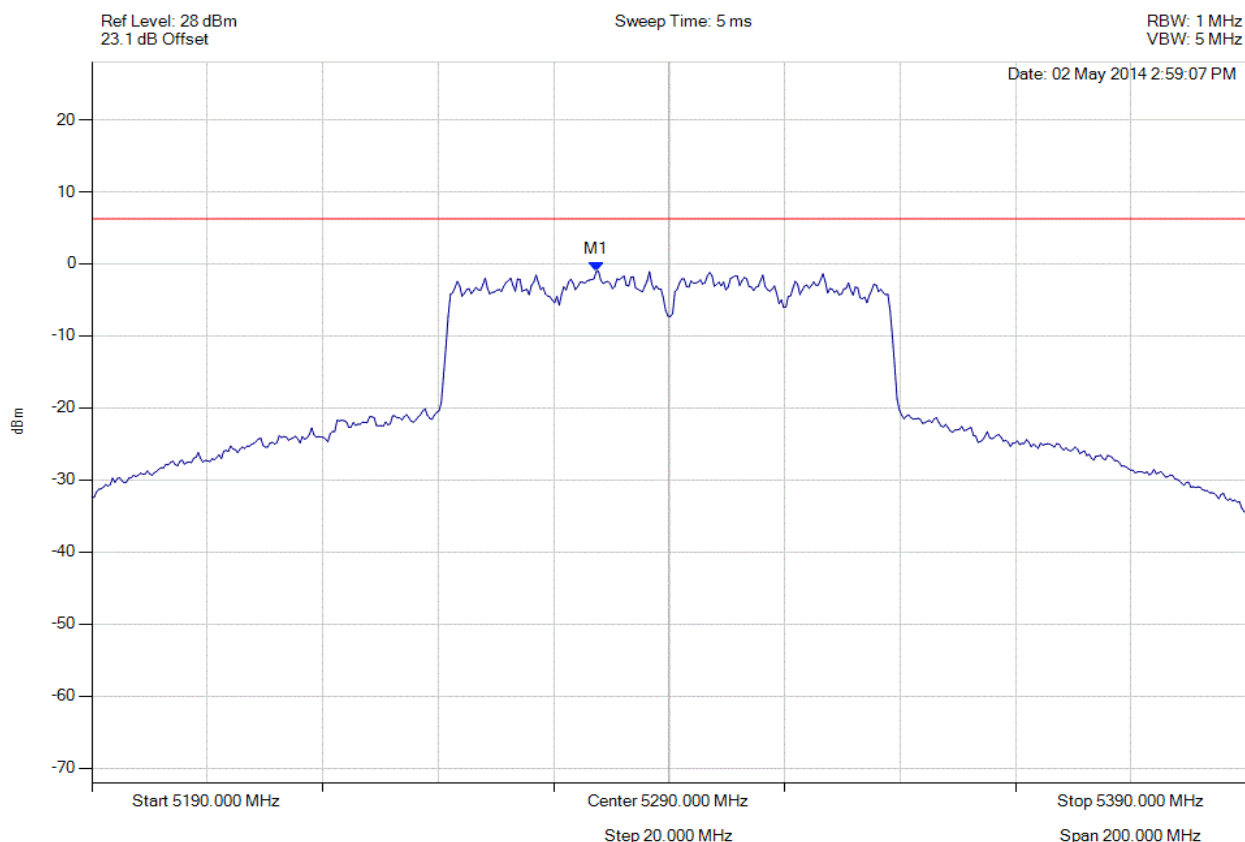

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5277.375 MHz : -1.056 dBm	Limit: ≤ 6.229 dBm Margin: 6.52 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 164 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5290.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

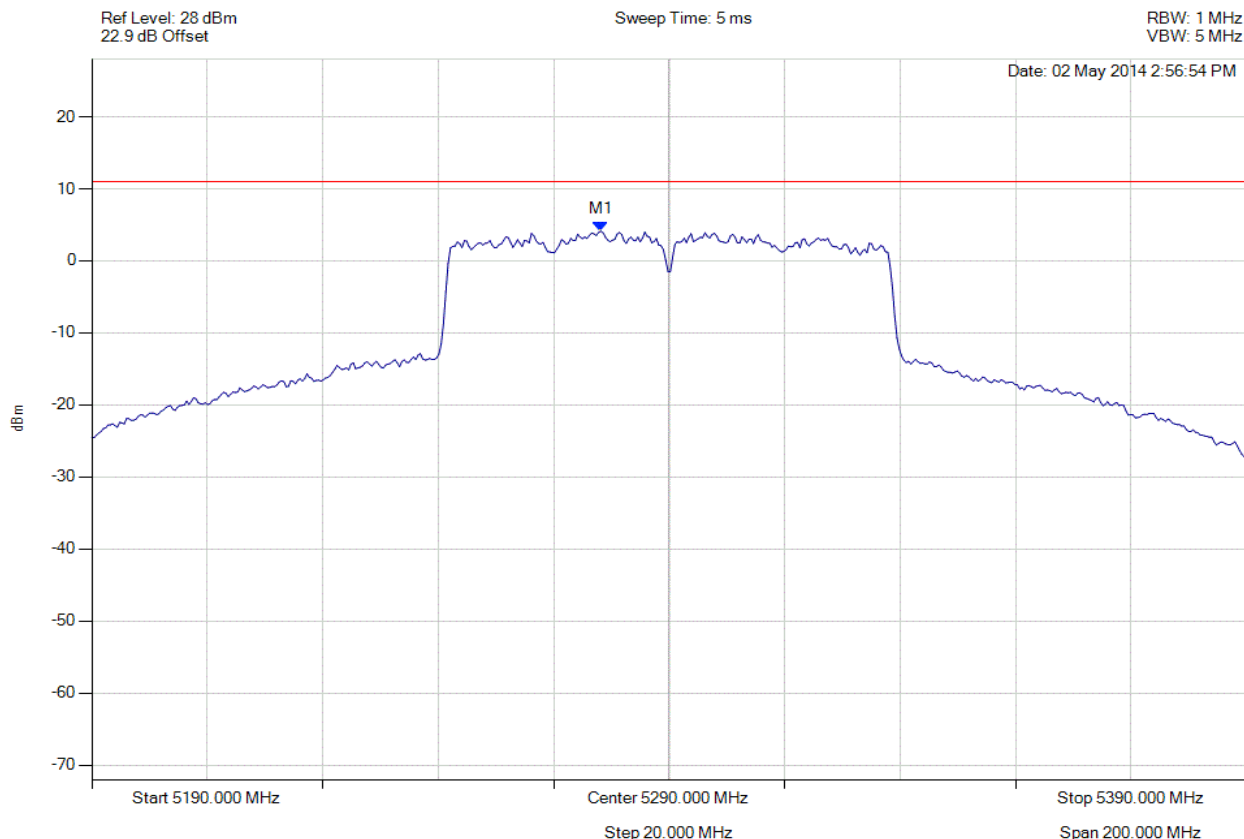

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5278.176 MHz : 4.117 dBm M1 + DCCF : 5278.176 MHz : 4.827 dBm Duty Cycle Correction Factor : +0.71 dB	Limit: ≤ 11.0 dBm Margin: -6.2 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 165 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

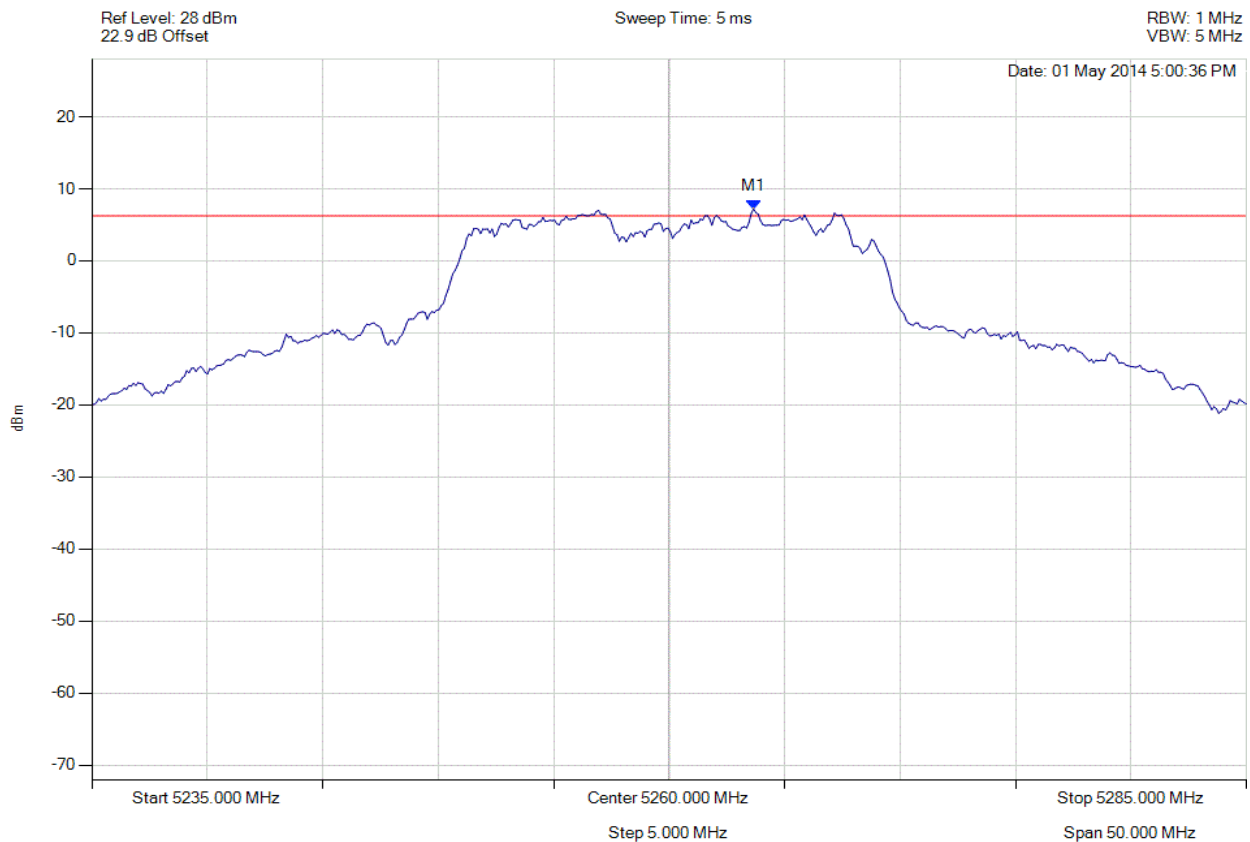

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5263.657 MHz : 7.213 dBm	Limit: ≤ 6.229 dBm Margin: 1.23 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 166 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

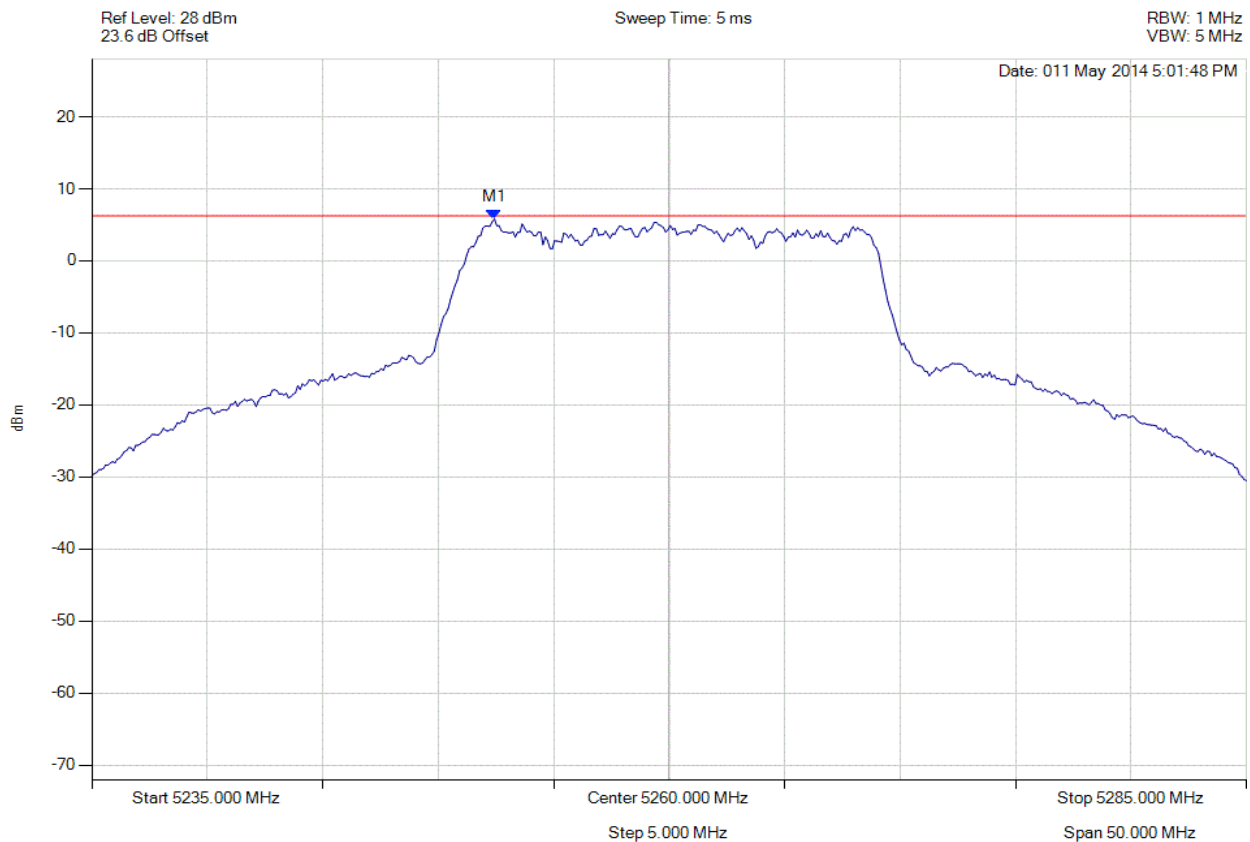

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5252.435 MHz : 5.813 dBm	Limit: ≤ 6.229 dBm Margin: -0.17 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 167 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5260.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

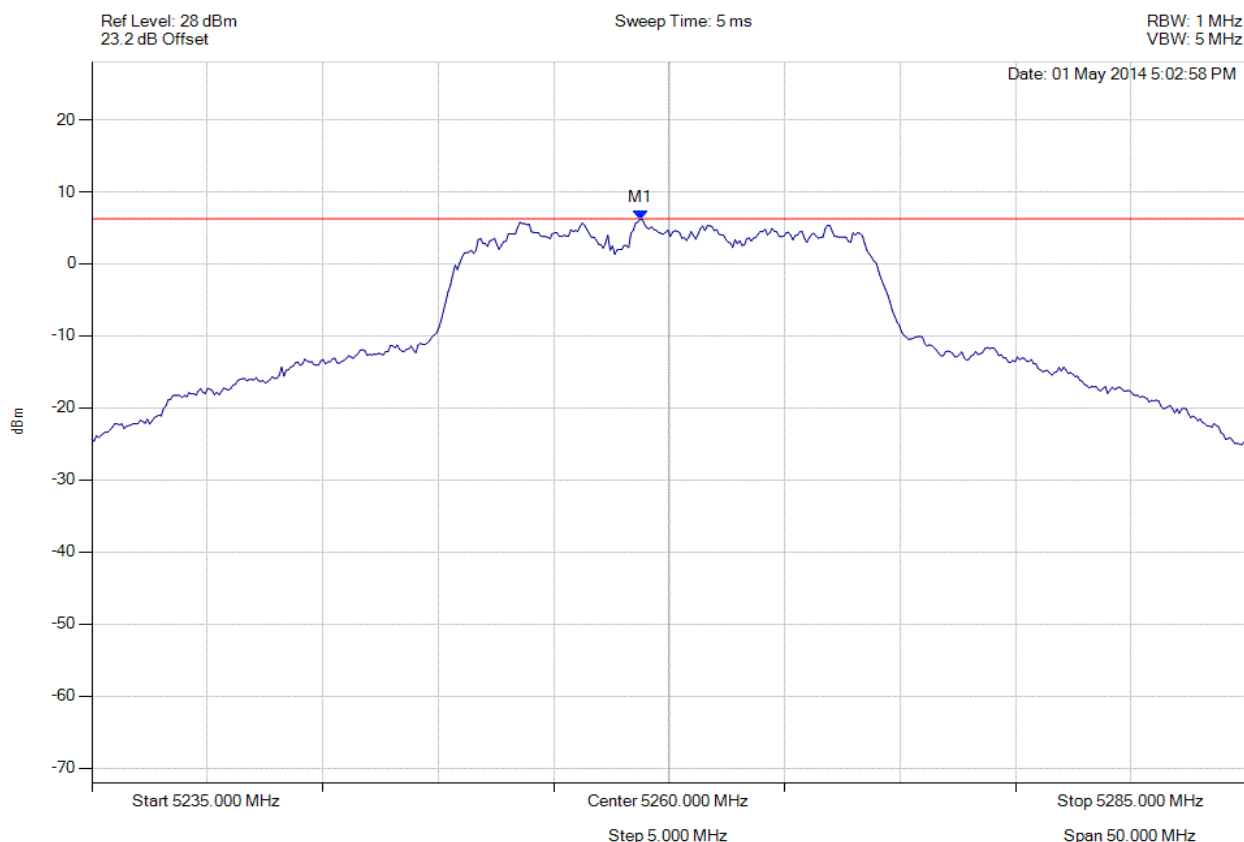

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5258.747 MHz : 6.191 dBm	Limit: ≤ 6.229 dBm Margin: 0.21 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 168 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5260.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

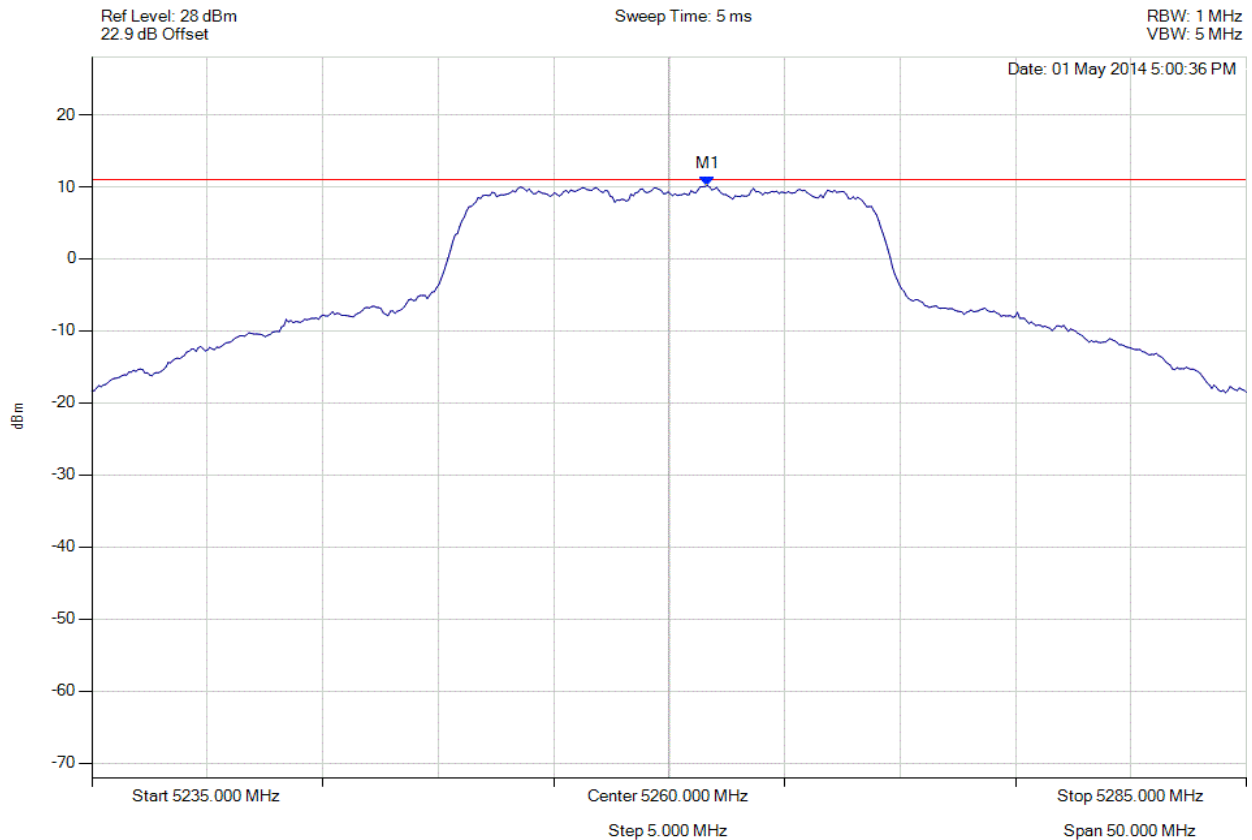

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5261.653 MHz : 10.175 dBm M1 + DCCF : 5261.653 MHz : 10.445 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -0.5 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 169 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

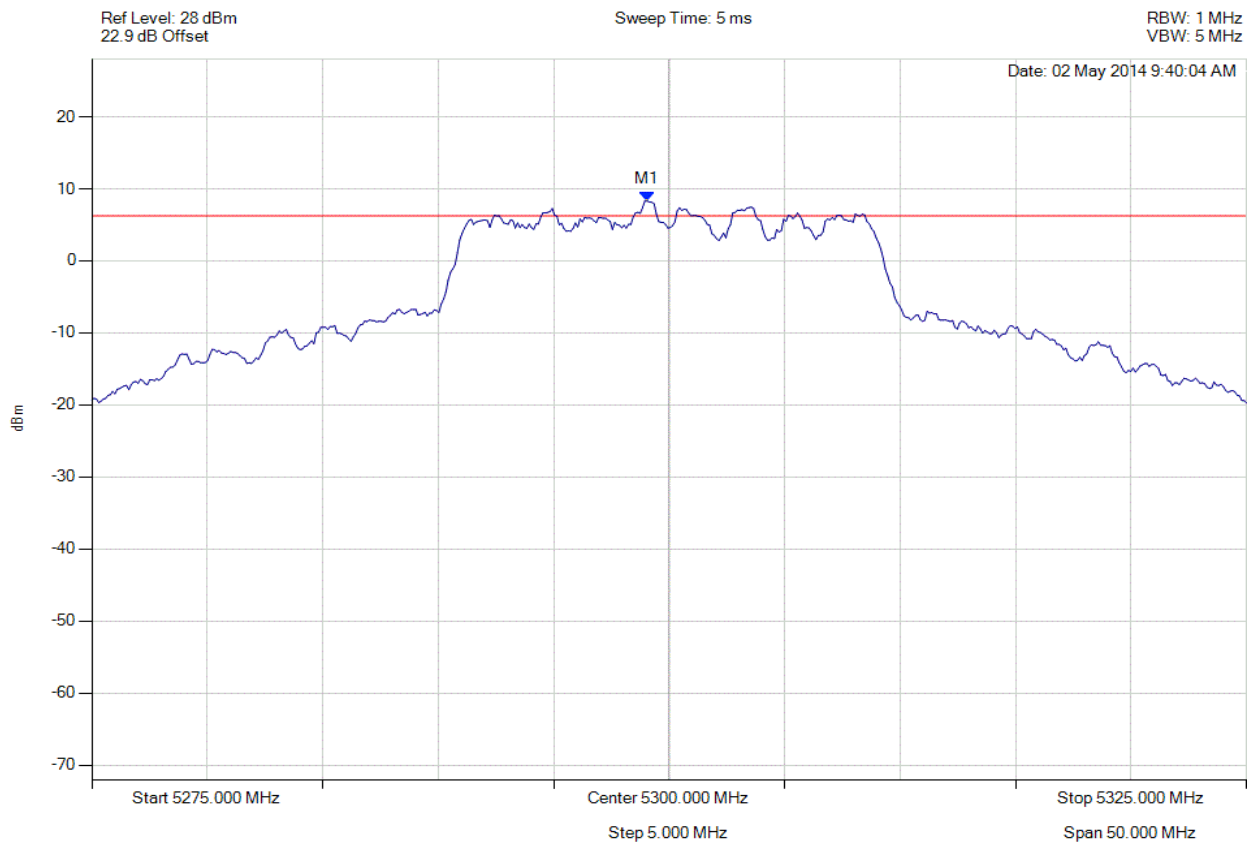

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5299.048 MHz : 8.314 dBm	Limit: ≤ 6.229 dBm Margin: 2.33 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 170 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

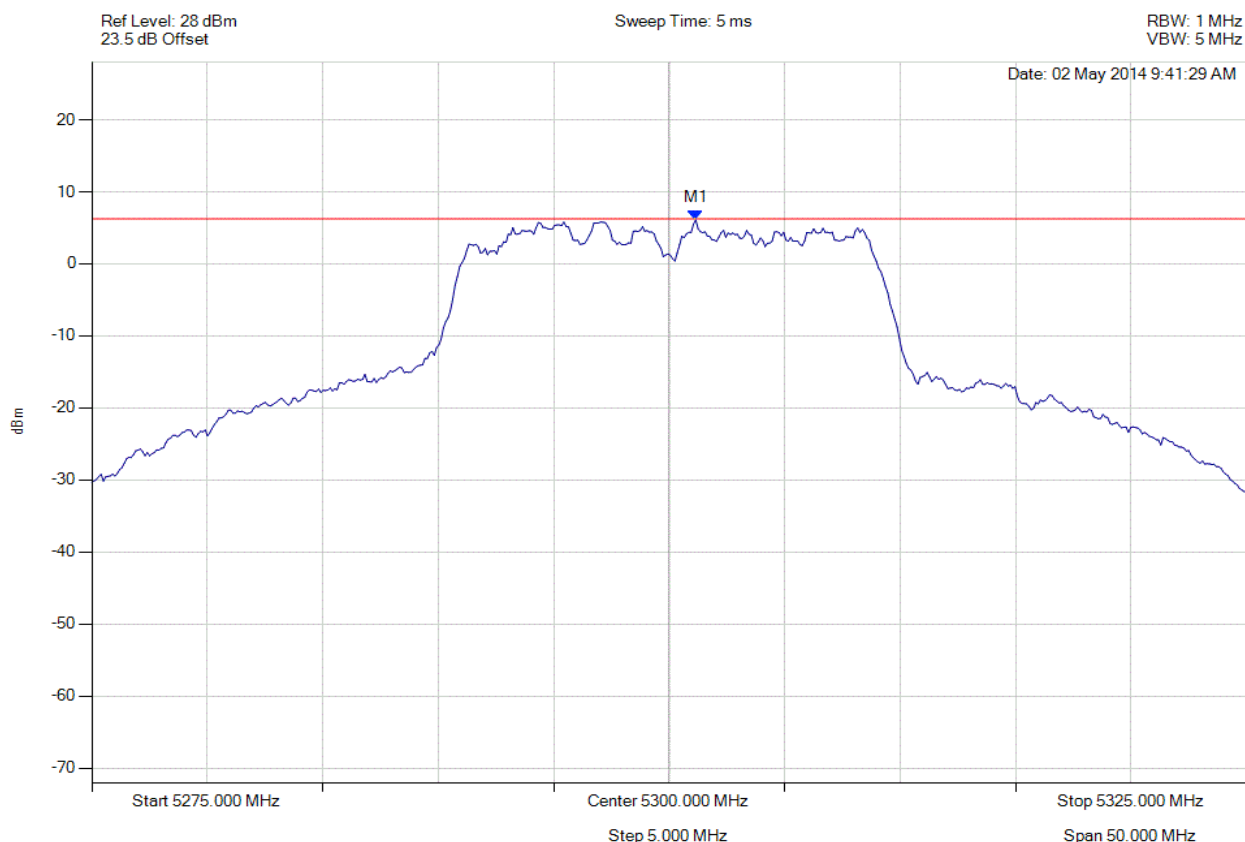

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5301.152 MHz : 6.081 dBm	Limit: ≤ 6.229 dBm Margin: 0.10 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 171 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5300.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

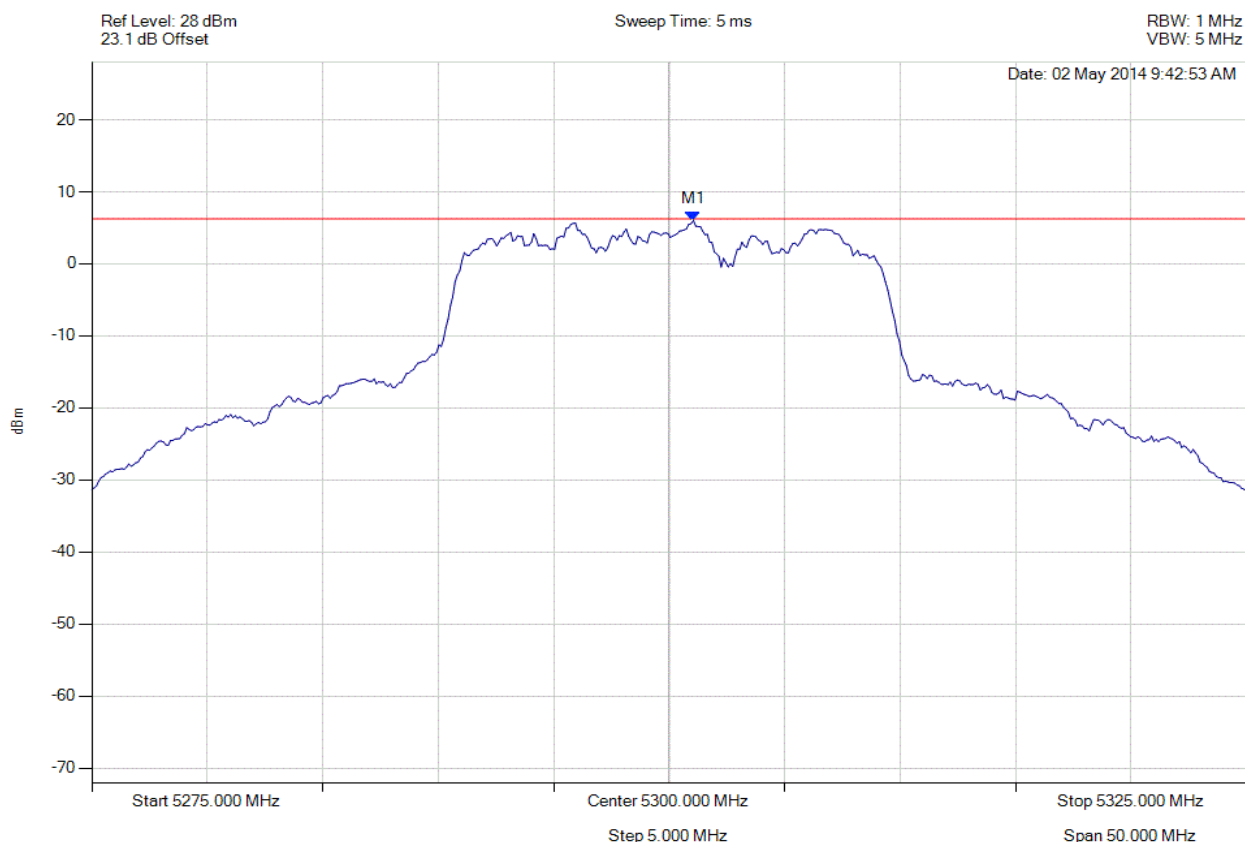

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5301.052 MHz : 6.022 dBm	Limit: ≤ 6.229 dBm Margin: 0.04 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 172 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5300.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

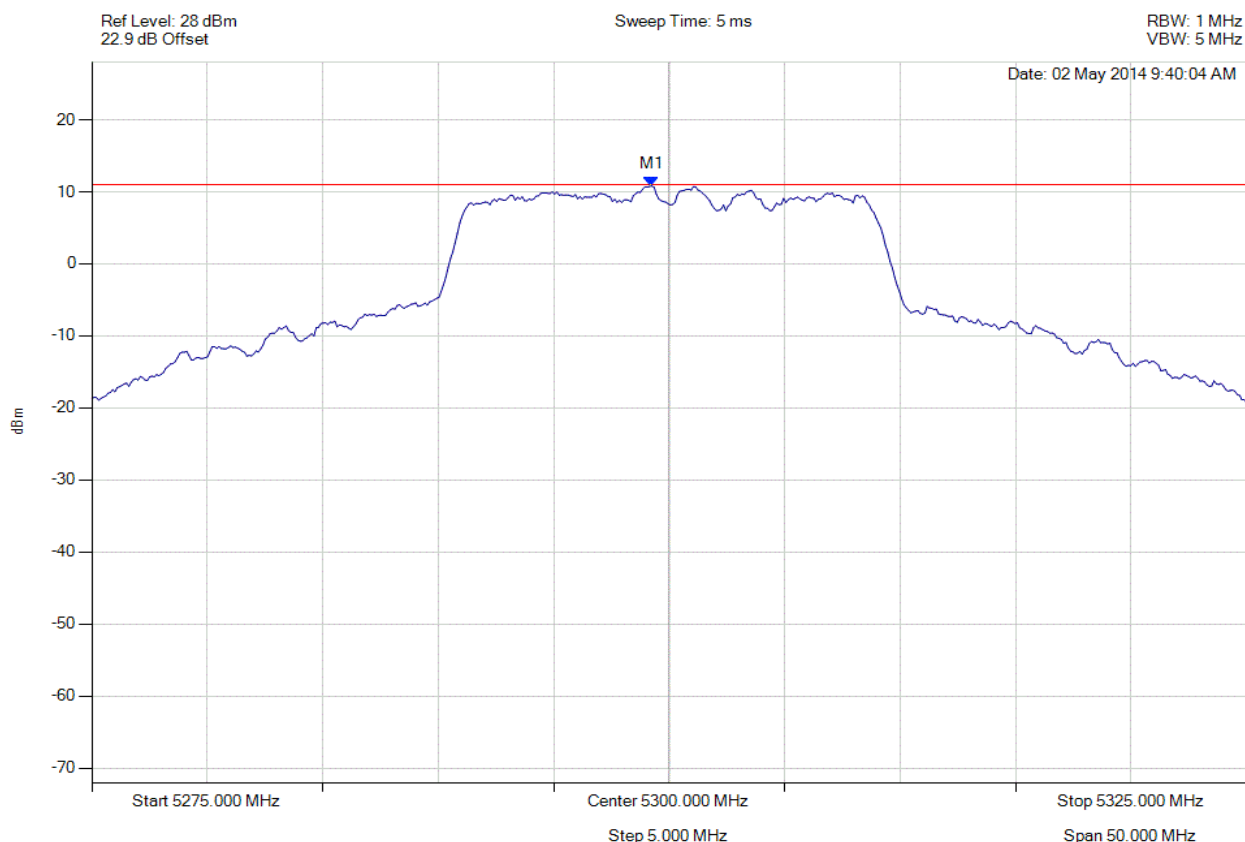

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5299.248 MHz : 10.713 dBm M1 + DCCF : 5299.248 MHz : 10.983 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -0.1 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 173 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

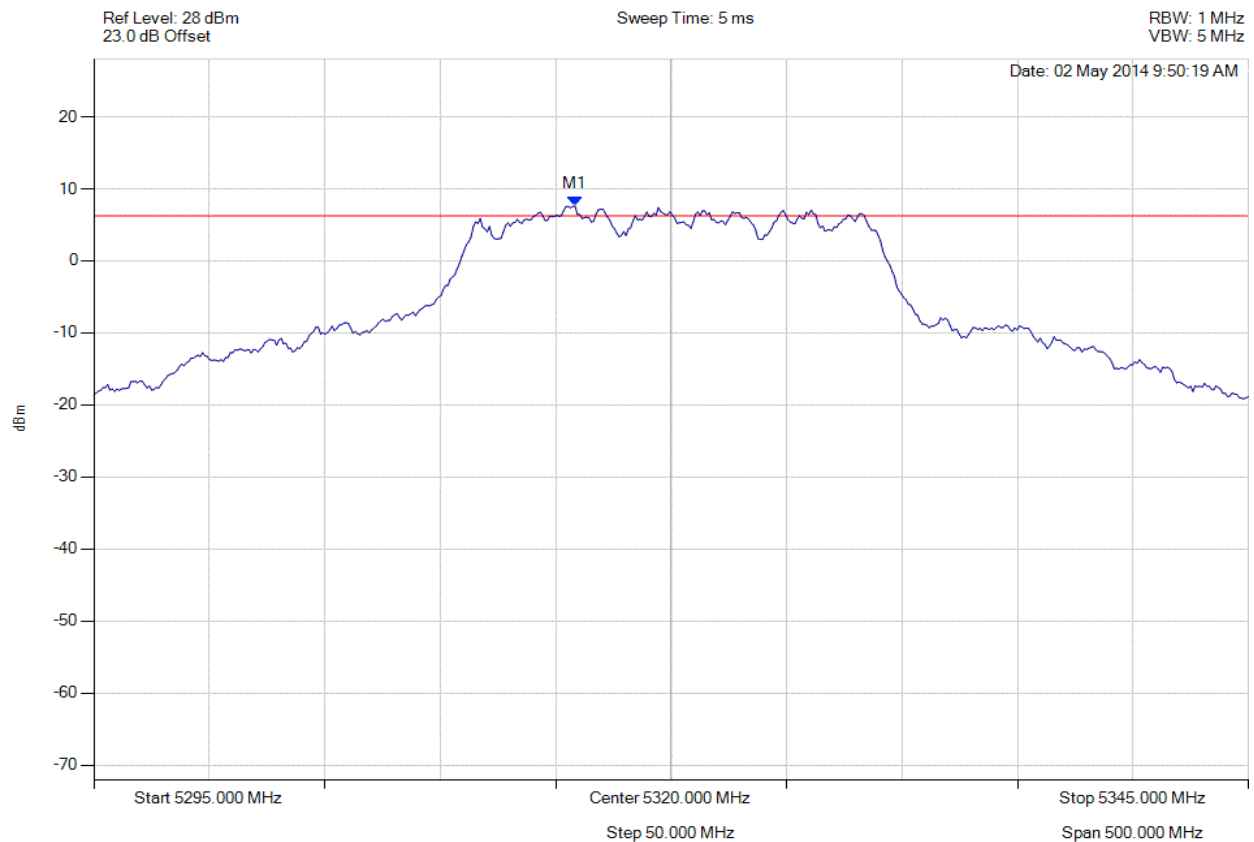

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5315.842 MHz : 7.602 dBm	Limit: ≤ 6.229 dBm Margin: 1.62 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 174 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

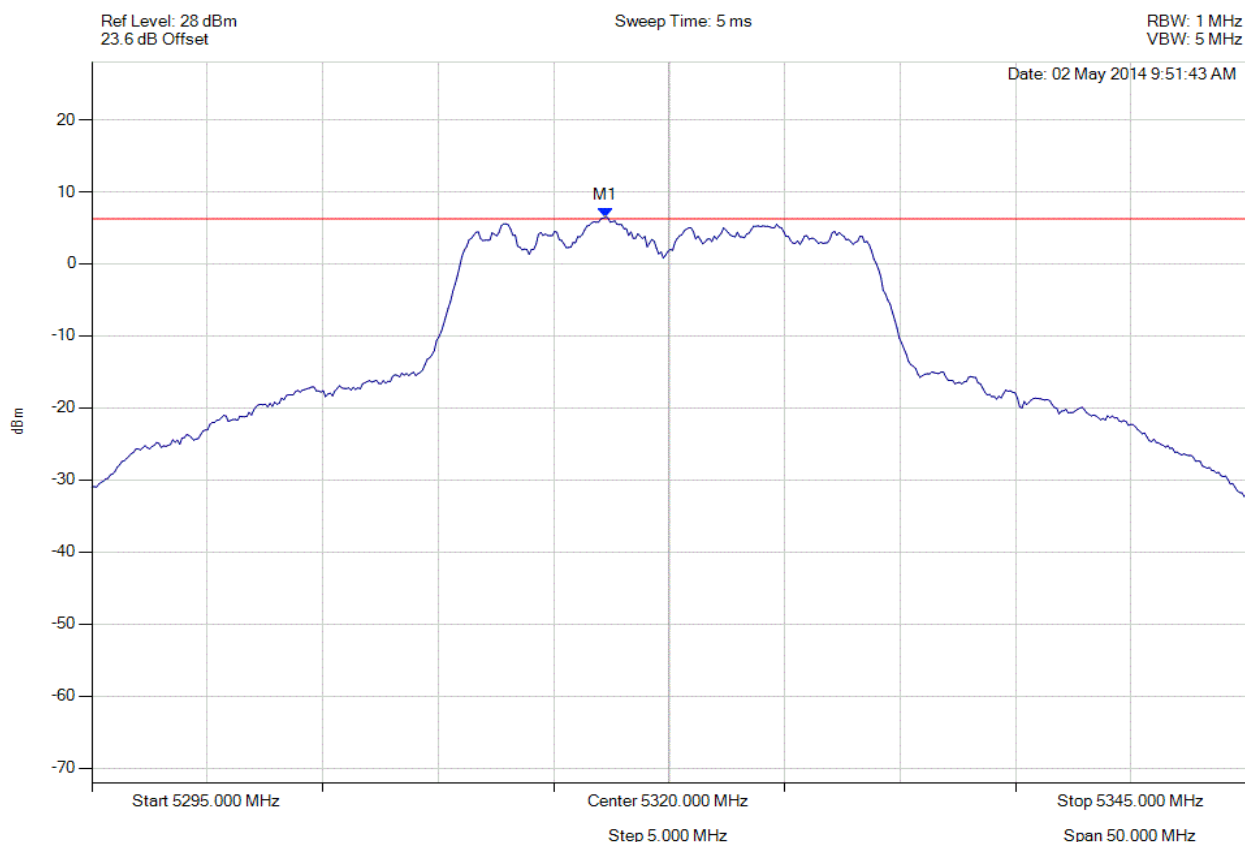

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5317.244 MHz : 6.463 dBm	Limit: ≤ 6.229 dBm Margin: 0.48 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 175 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5320.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

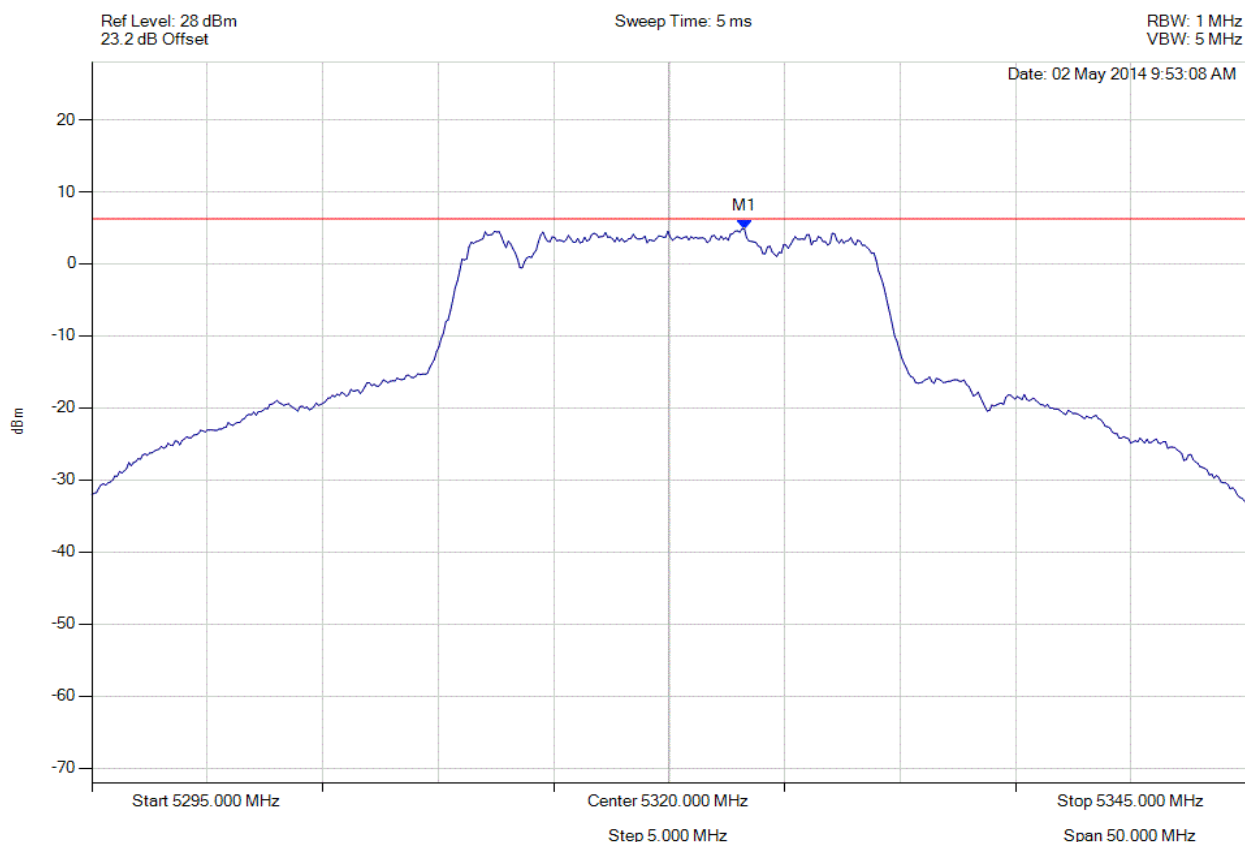

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5323.257 MHz : 4.881 dBm	Limit: ≤ 6.229 dBm Margin: -1.10 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 176 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5320.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

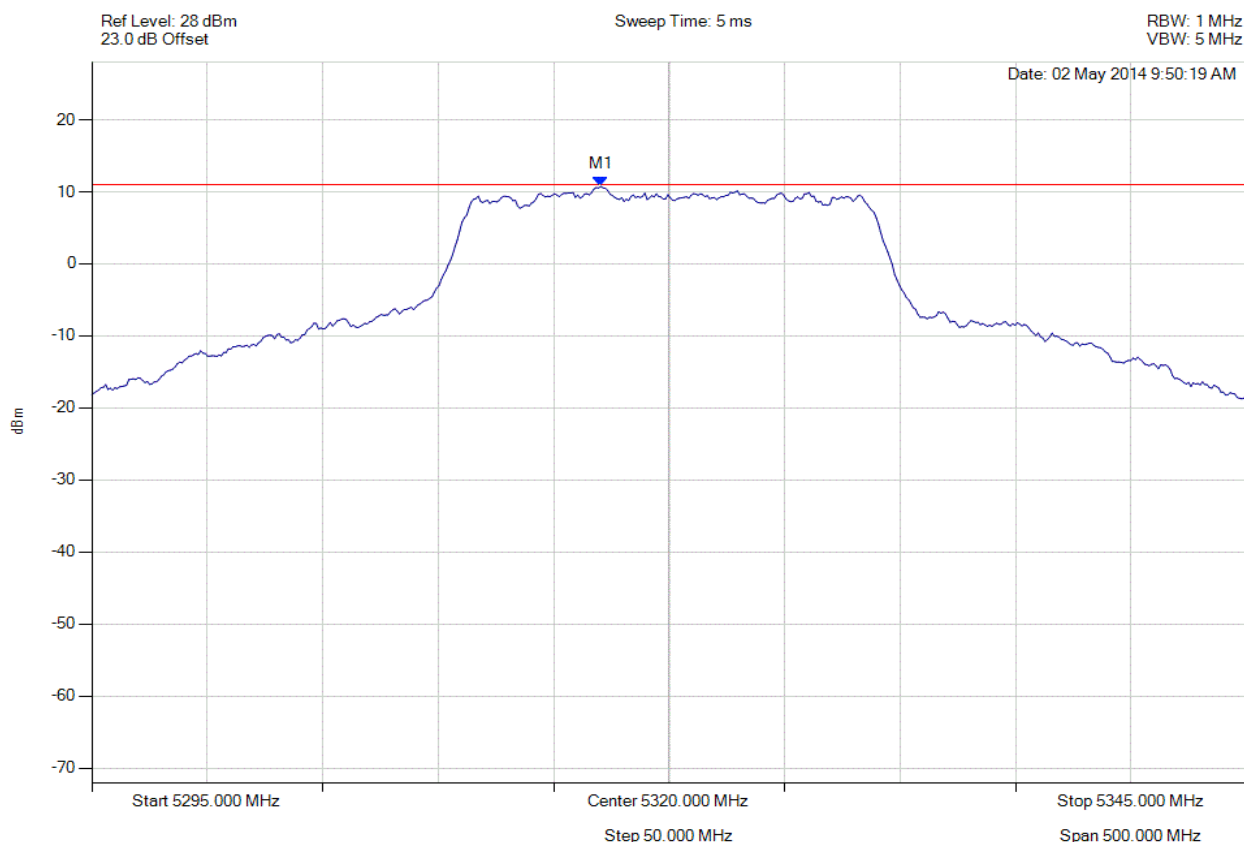

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5317.044 MHz : 10.730 dBm M1 + DCCF : 5317.044 MHz : 11.000 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -0.3 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 177 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

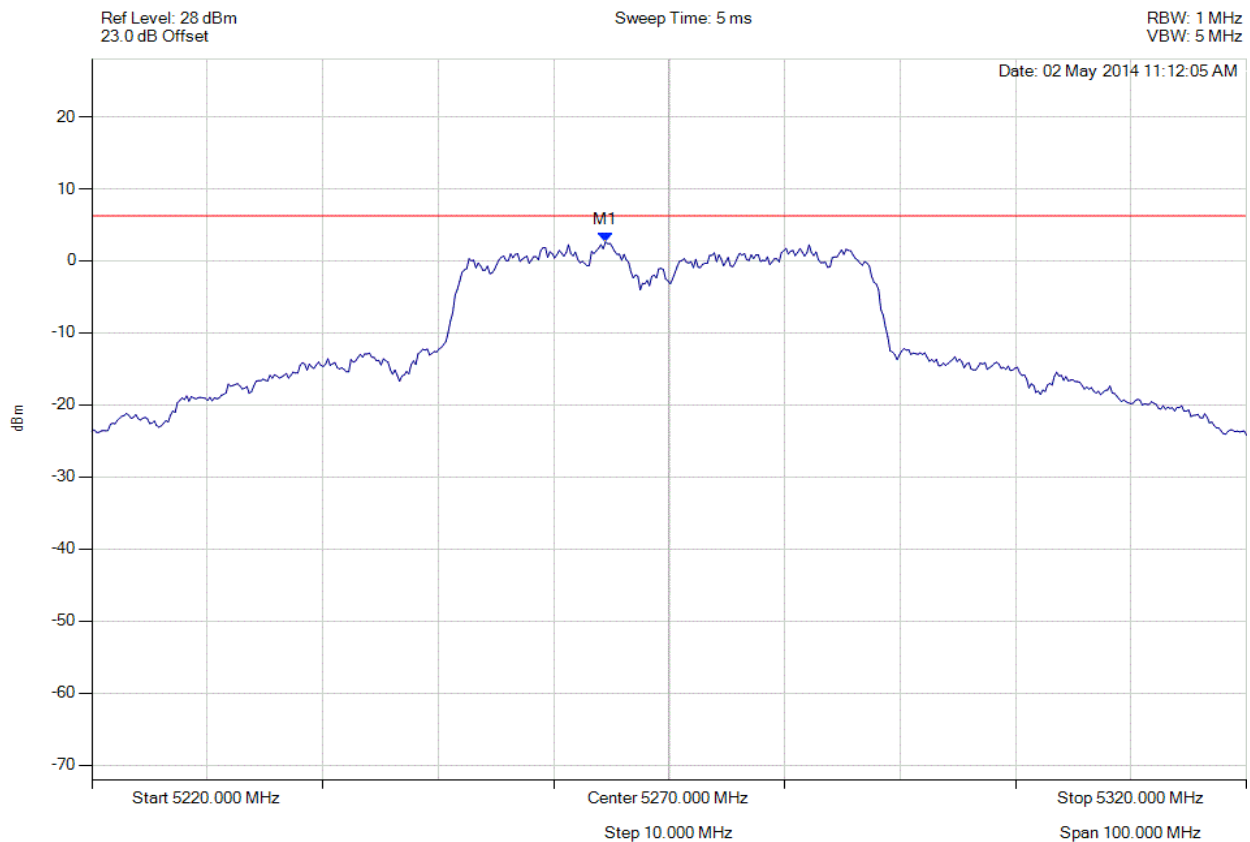

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5264.489 MHz : 2.626 dBm	Limit: ≤ 6.229 dBm Margin: -2.98 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 178 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

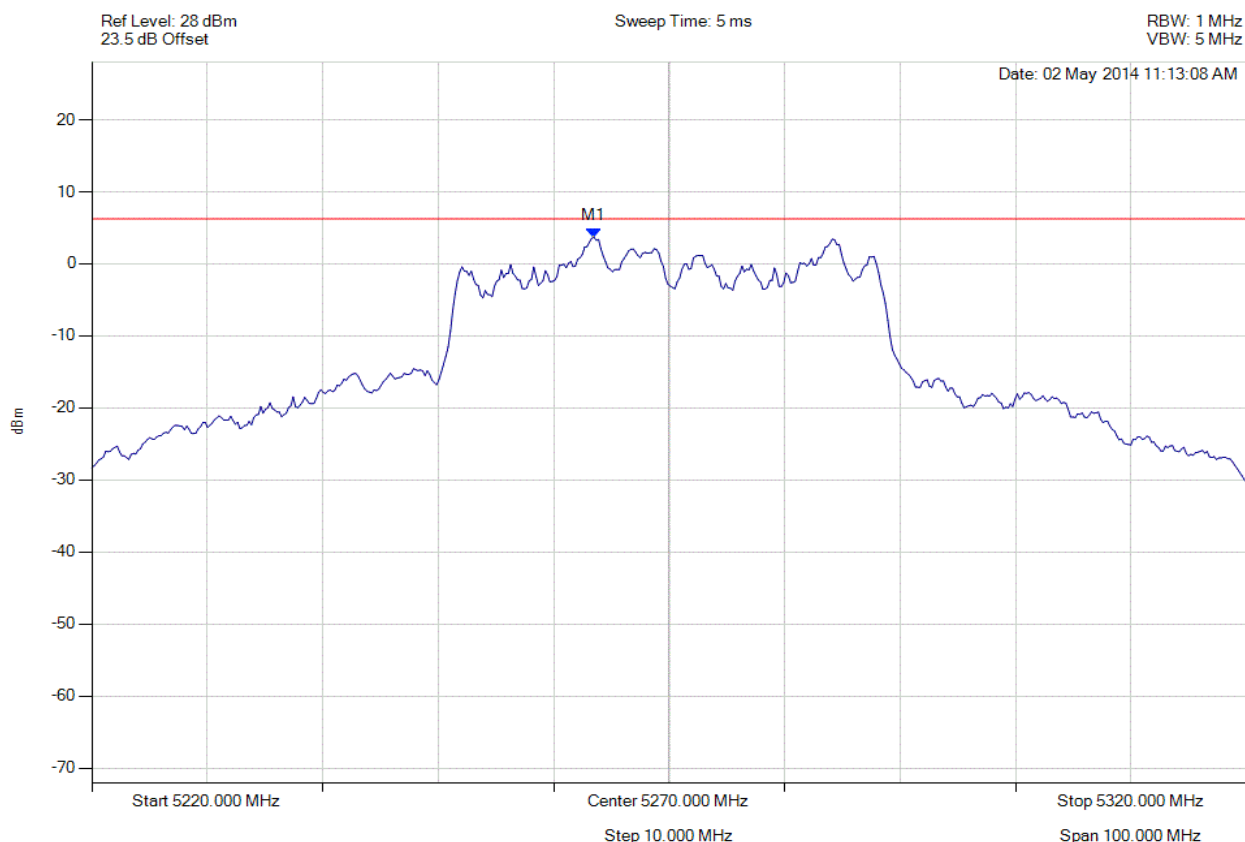

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5263.487 MHz : 3.703 dBm	Limit: ≤ 6.229 dBm Margin: -1.90 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 179 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5270.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

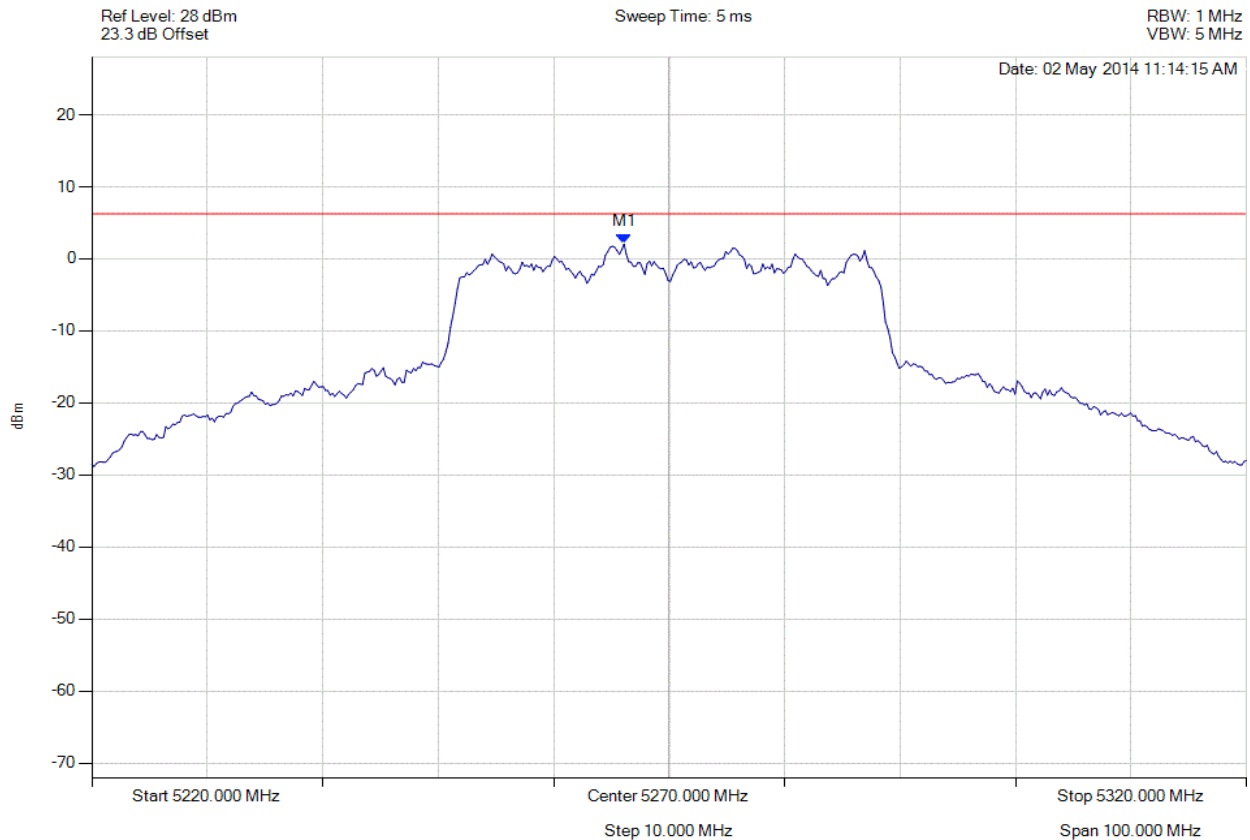

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5266.092 MHz : 2.062 dBm	Limit: ≤ 6.229 dBm Margin: -3.54 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 180 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5270.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

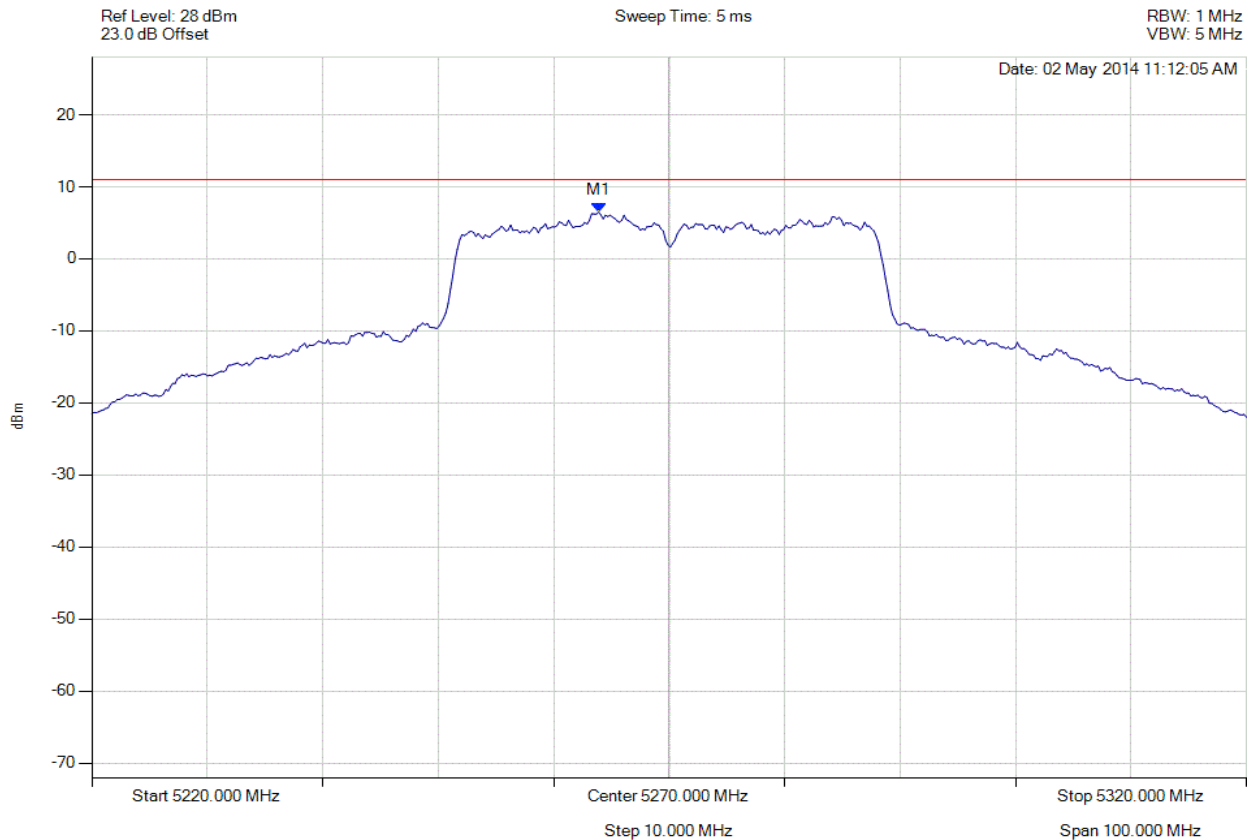

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5263.888 MHz : 6.483 dBm M1 + DCCF : 5263.888 MHz : 7.193 dBm Duty Cycle Correction Factor : +0.71 dB	Limit: ≤ 11.0 dBm Margin: -3.8 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 181 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

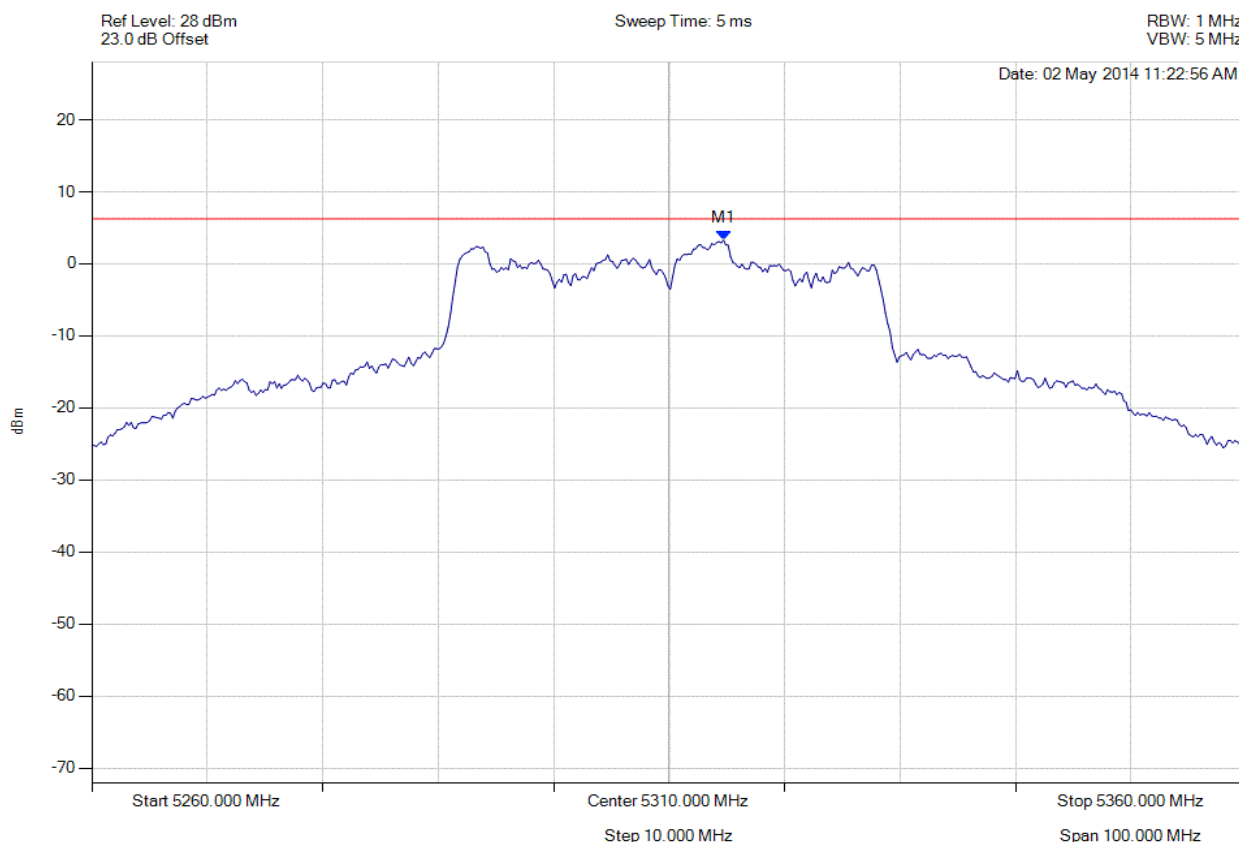

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5314.709 MHz : 3.296 dBm	Limit: ≤ 6.229 dBm Margin: -2.31 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 182 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

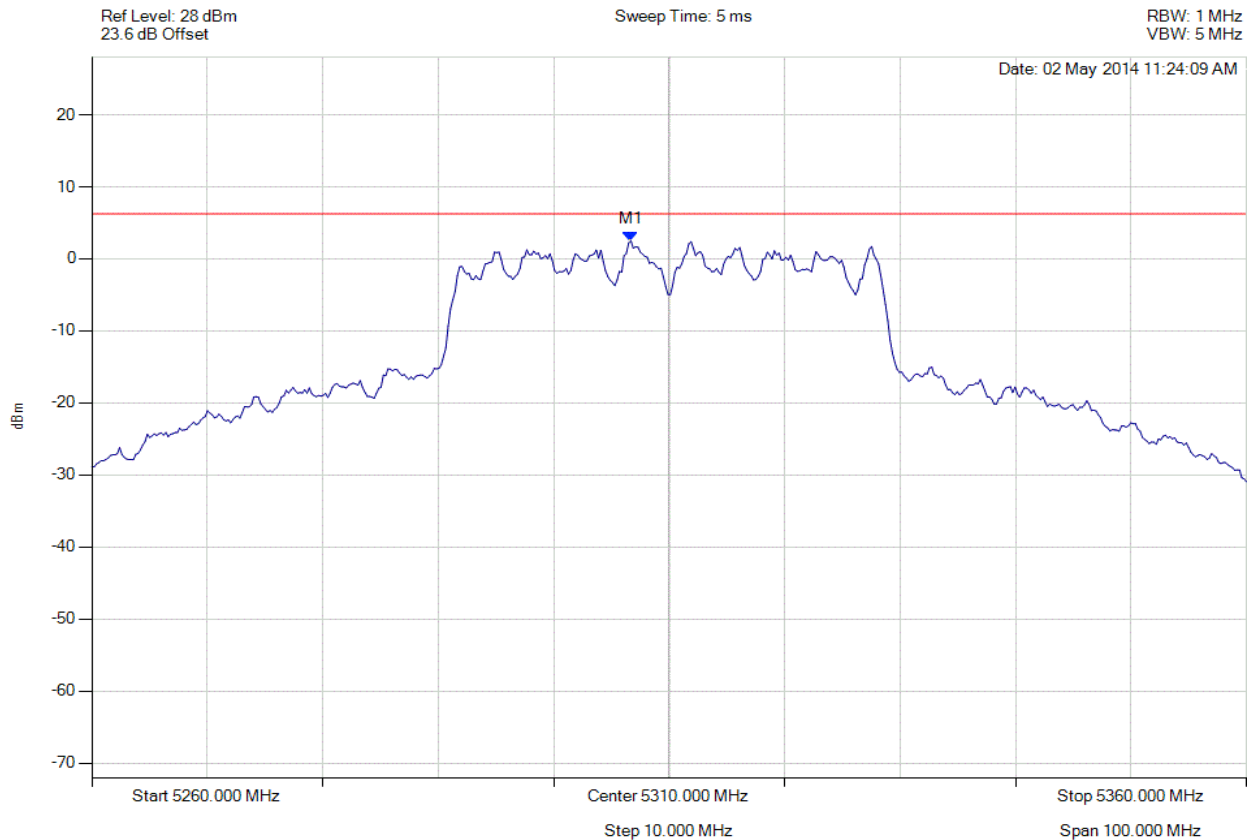

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5306.693 MHz : 2.493 dBm	Limit: ≤ 6.229 dBm Margin: -3.11 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 183 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5310.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

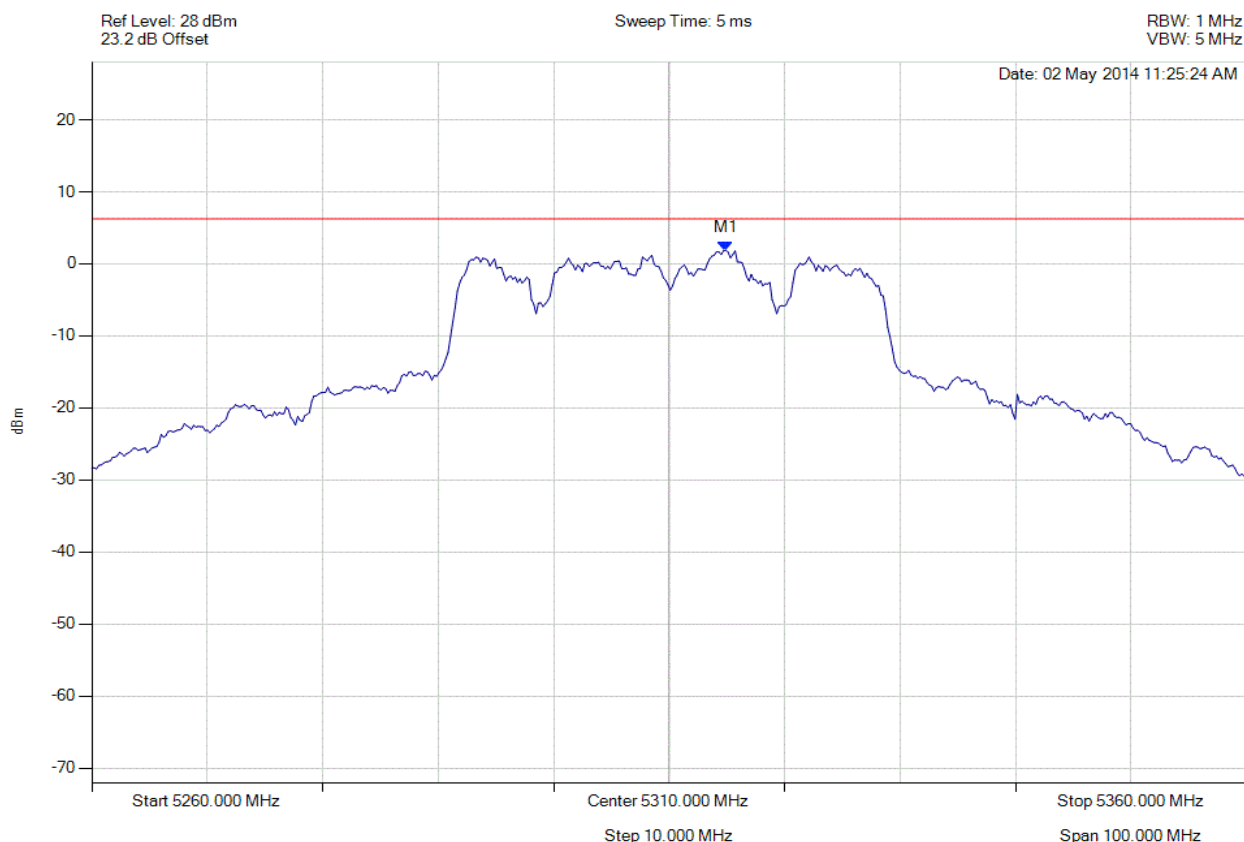

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5314.910 MHz : 1.881 dBm	Limit: ≤ 6.229 dBm Margin: -3.72 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 184 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5310.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

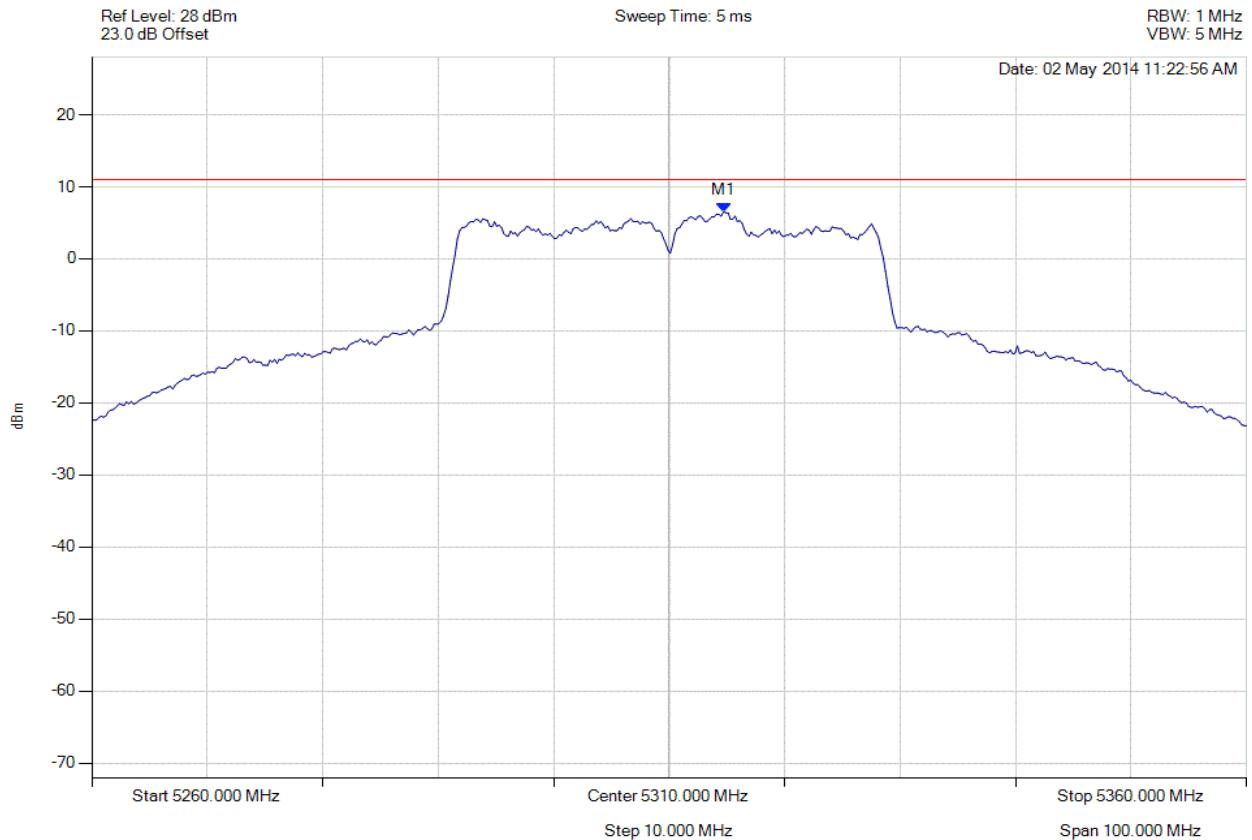

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5314.709 MHz : 6.521 dBm M1 + DCCF : 5314.709 MHz : 7.231 dBm Duty Cycle Correction Factor : +0.71 dB	Limit: ≤ 11.0 dBm Margin: -3.8 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 185 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

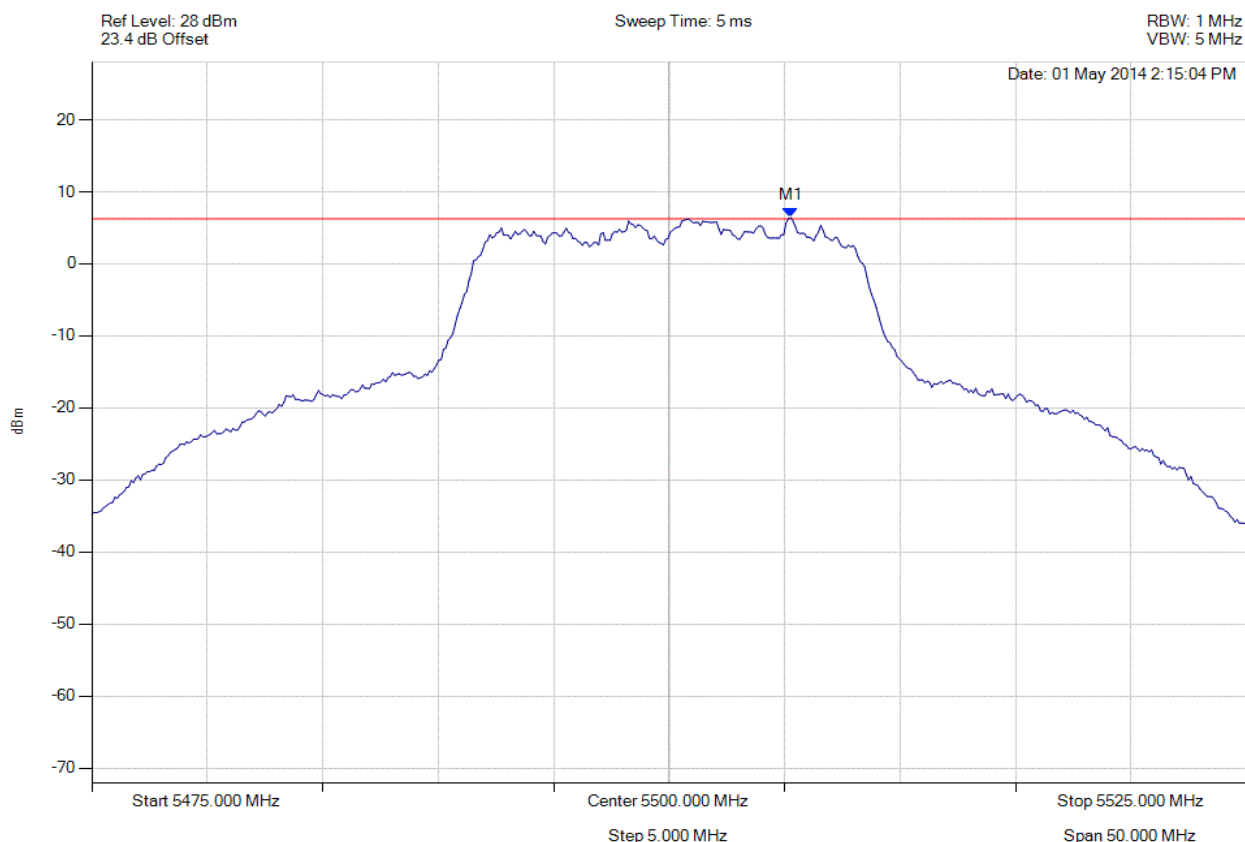

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5505.261 MHz : 6.394 dBm	Limit: ≤ 6.229 dBm Margin: 0.43 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 186 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5500.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

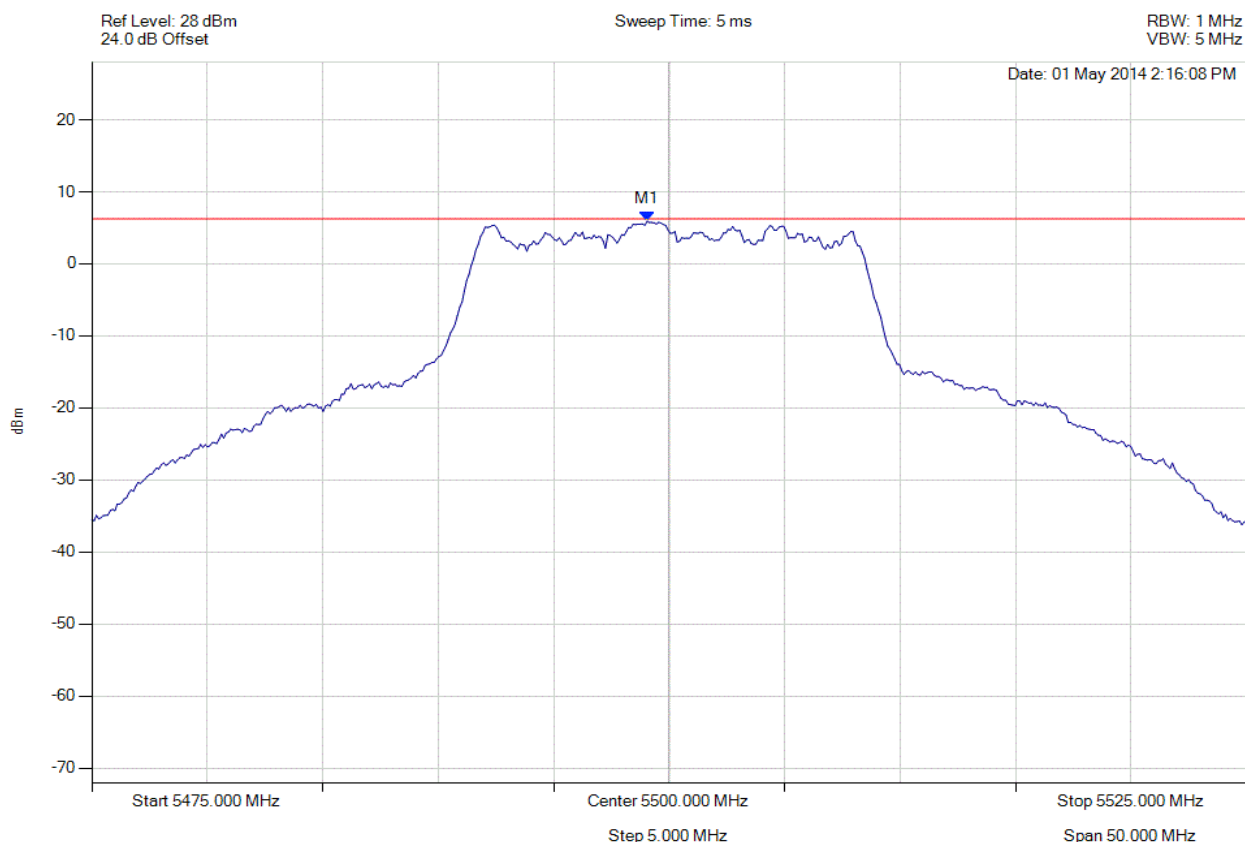

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5499.048 MHz : 5.913 dBm	Limit: ≤ 6.229 dBm Margin: -0.05 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 187 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5500.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

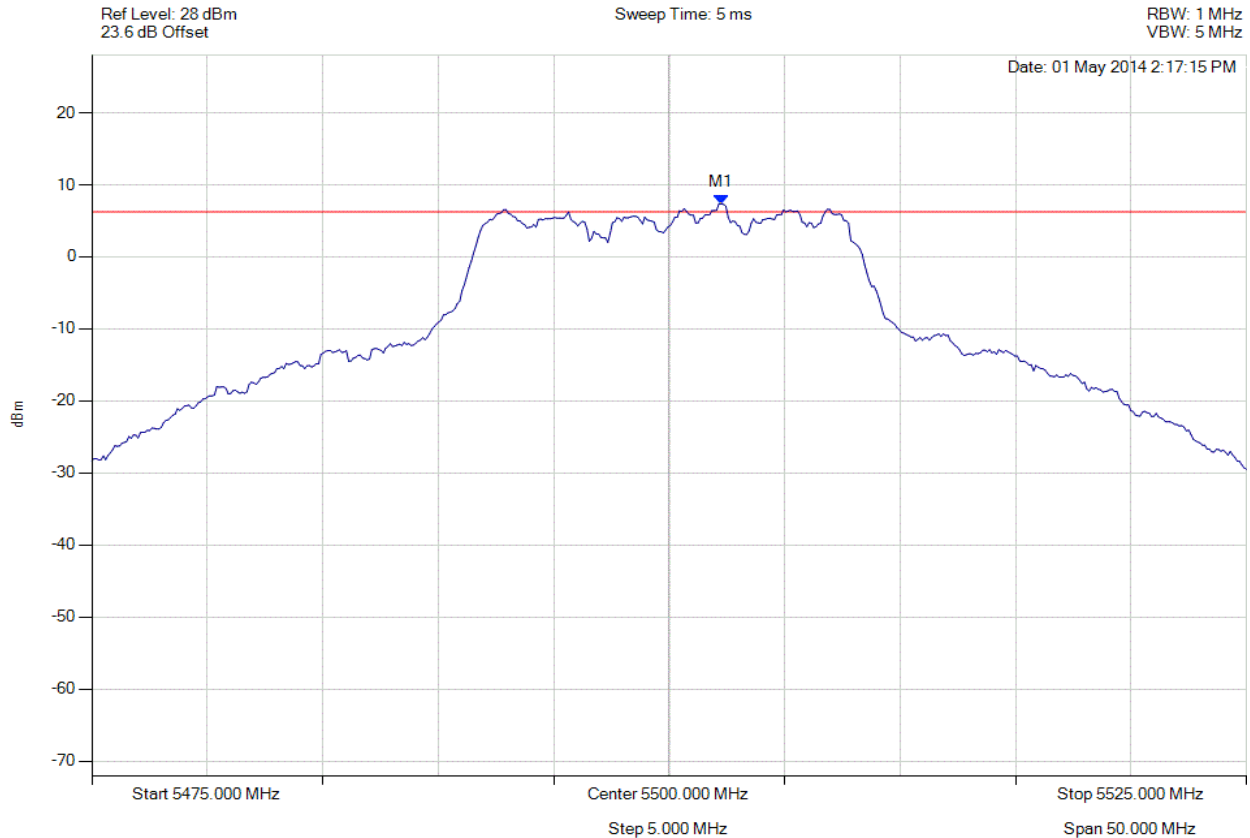

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5502.255 MHz : 7.359 dBm	Limit: ≤ 6.229 dBm Margin: 1.40 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 188 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5500.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

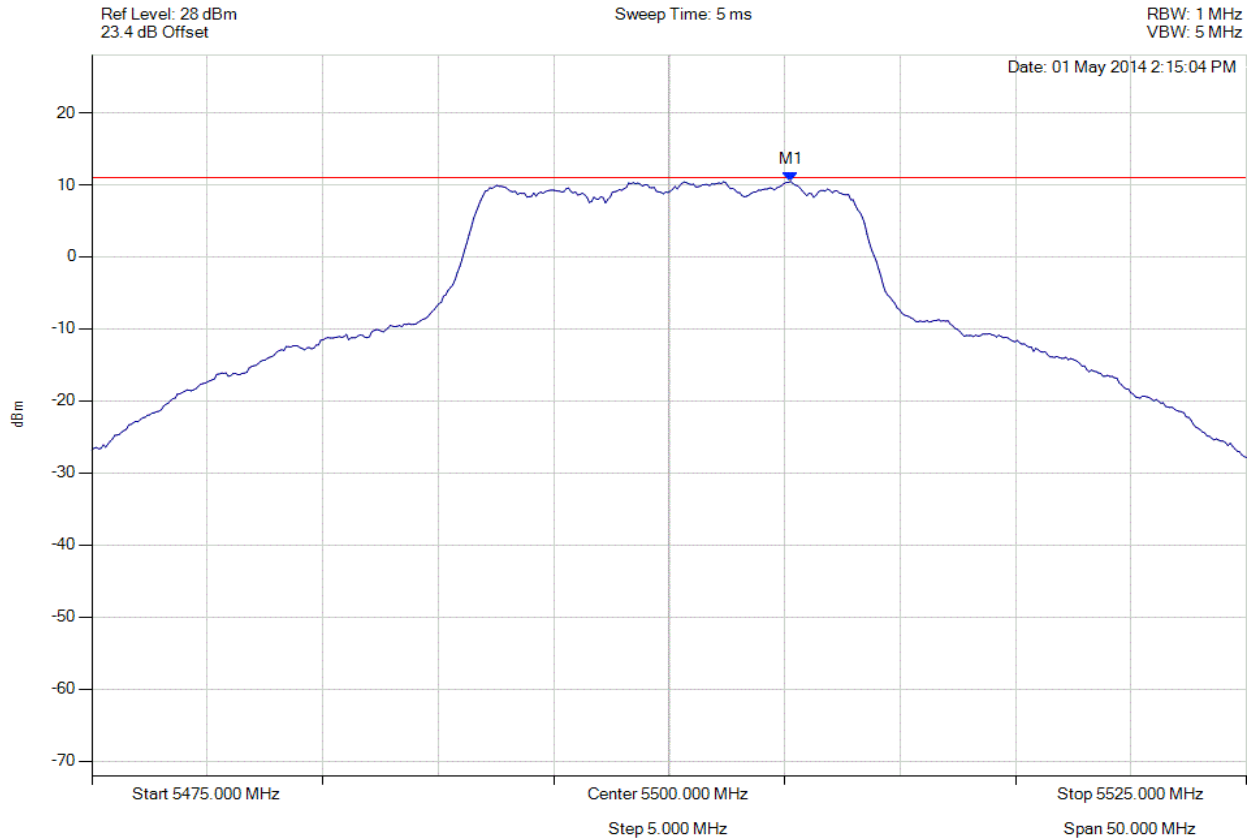

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5505.261 MHz : 10.455 dBm M1 + DCCF : 5505.218 MHz : 10.725 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -0.3 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 189 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5580.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

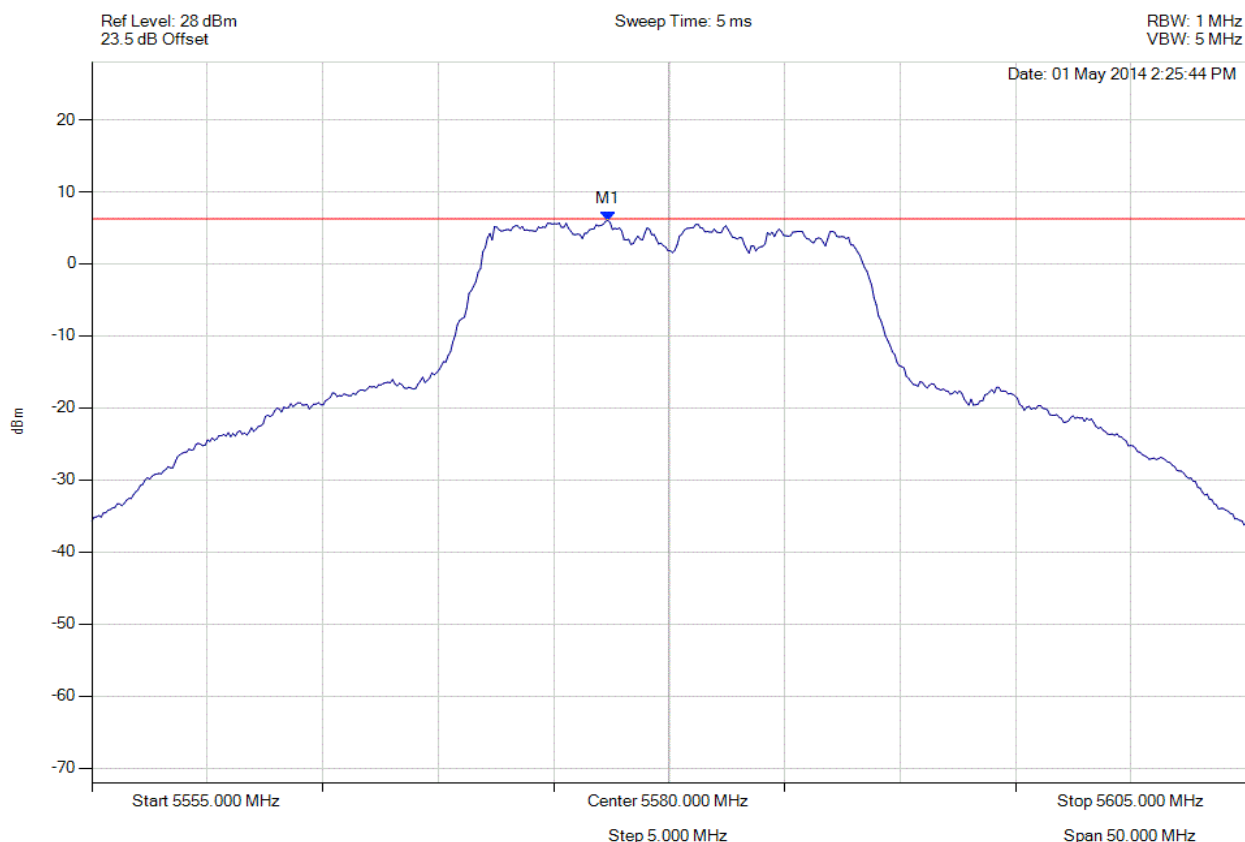

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5577.345 MHz : 6.023 dBm	Limit: ≤ 6.229 dBm Margin: 0.06 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 190 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5580.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

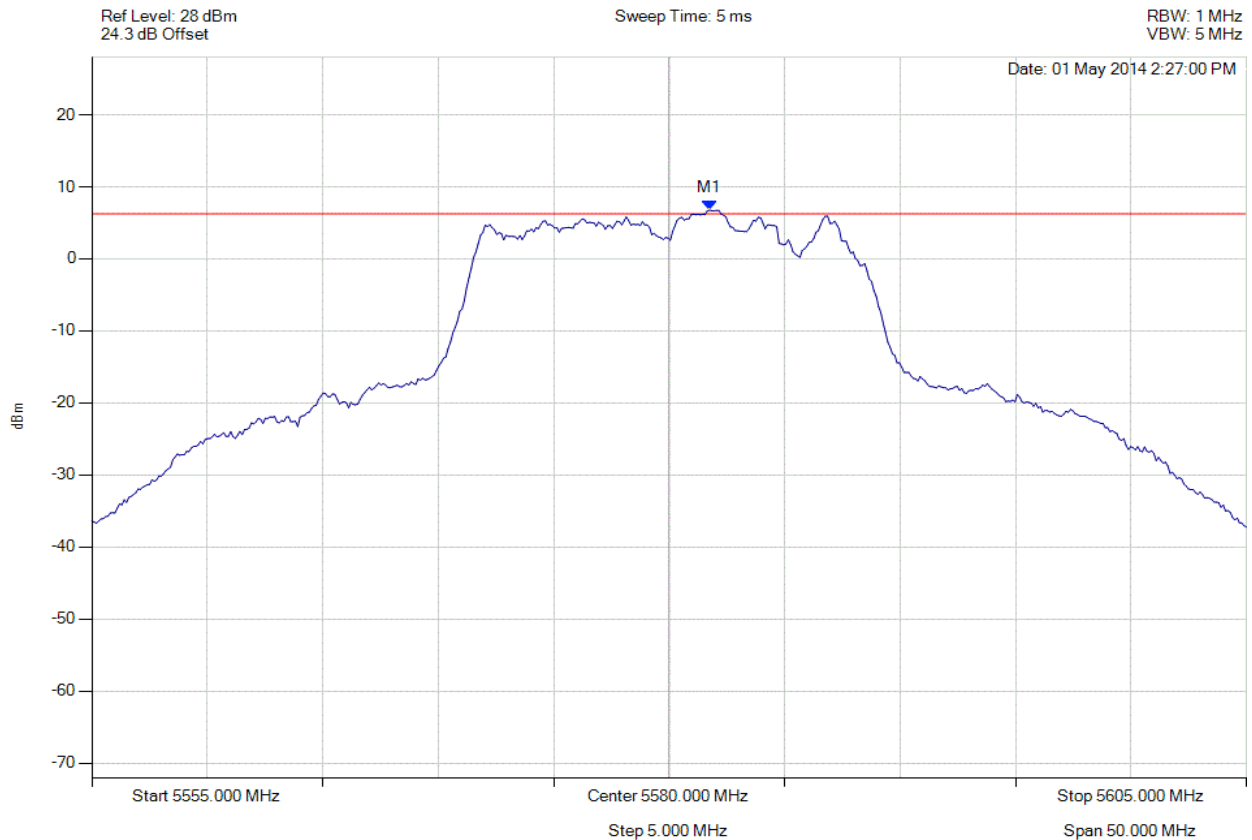

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5581.754 MHz : 6.746 dBm	Limit: ≤ 6.229 dBm Margin: 0.79 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 191 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5580.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

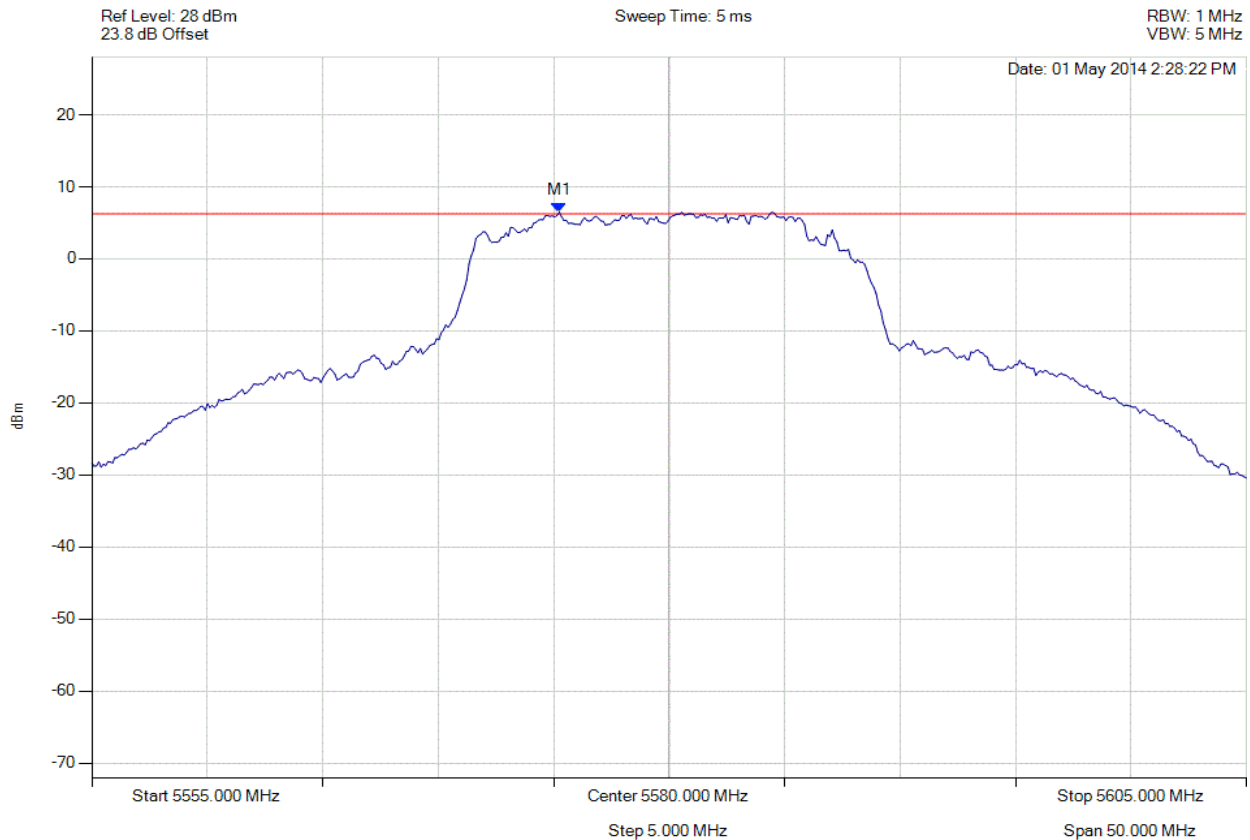

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5575.240 MHz : 6.476 dBm	Limit: ≤ 6.229 dBm Margin: 0.52 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 192 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5580.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

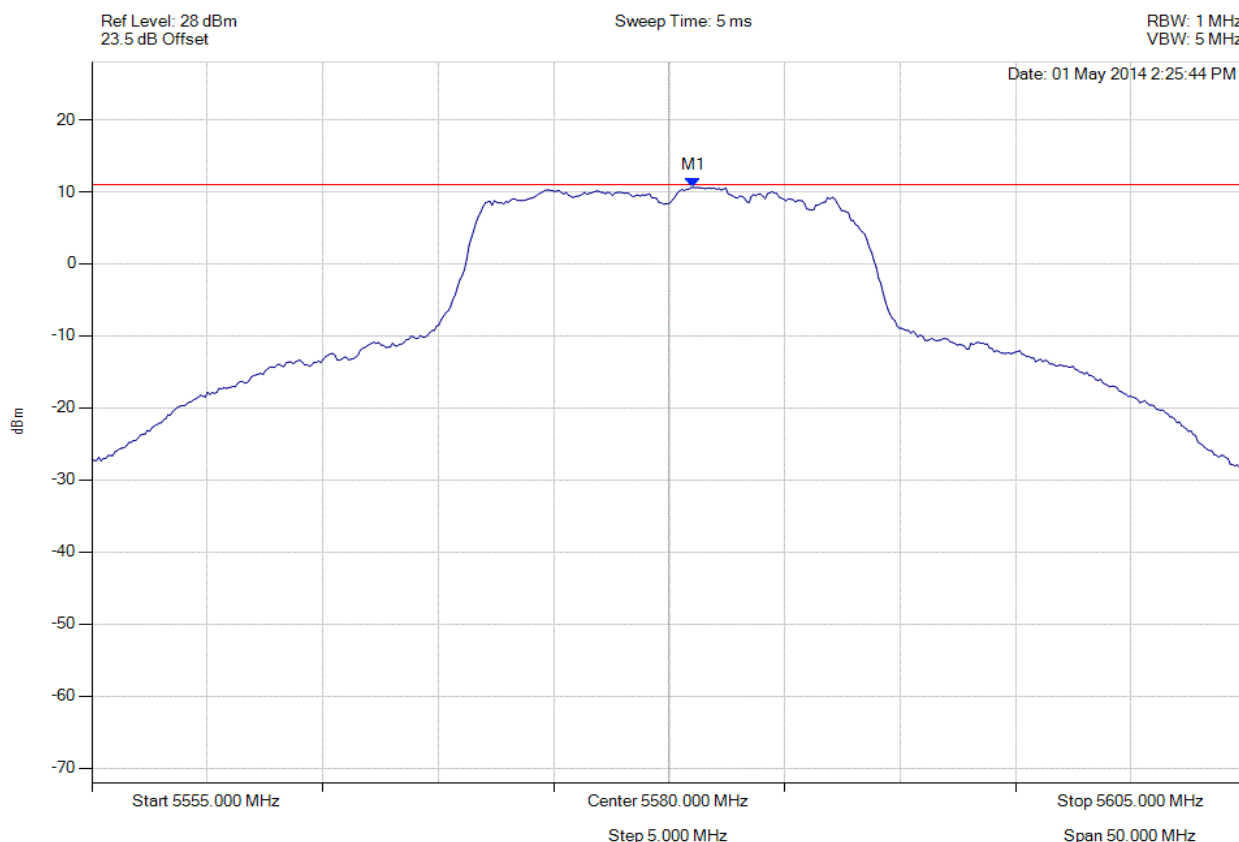

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5581.052 MHz : 10.607 dBm M1 + DCCF : 5581.052 MHz : 10.877 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -0.1 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 193 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5720.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

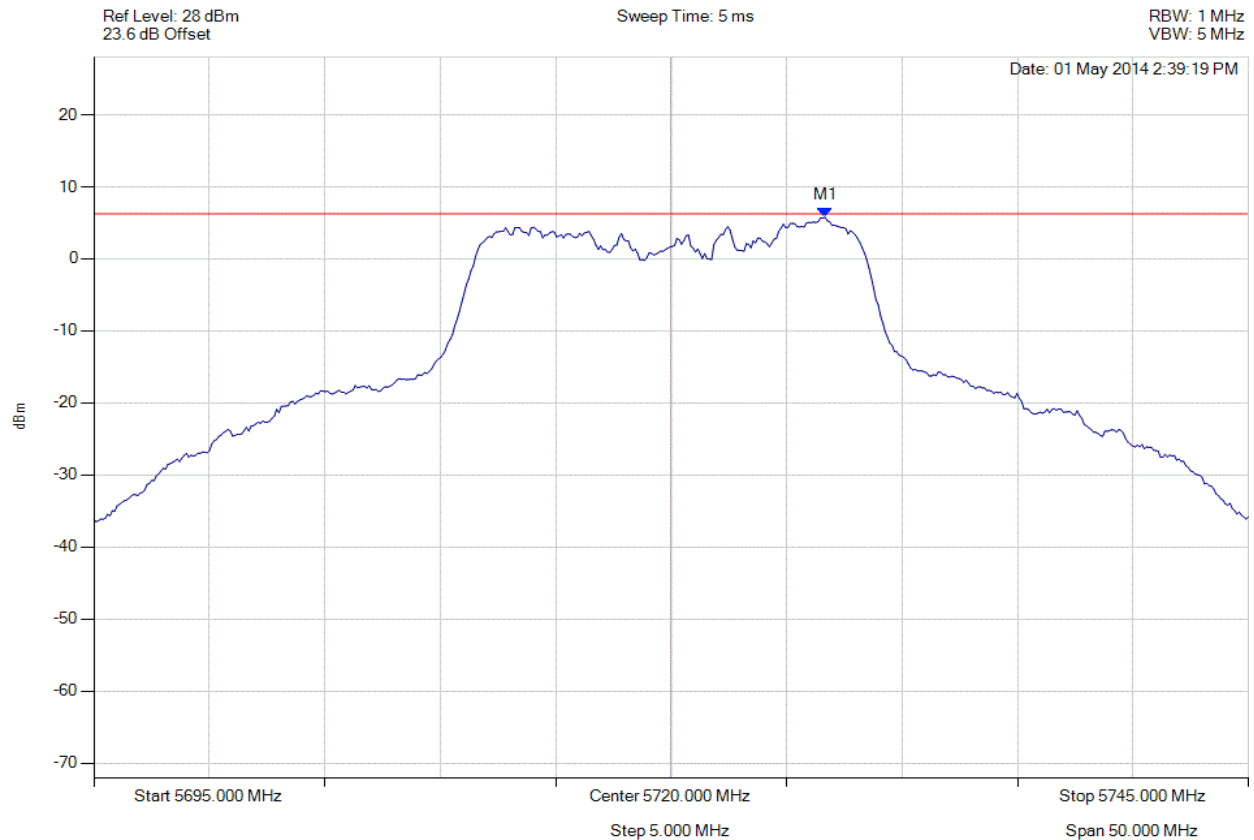

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5726.663 MHz : 5.776 dBm	Limit: ≤ 6.229 dBm Margin: -0.18 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 194 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5720.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

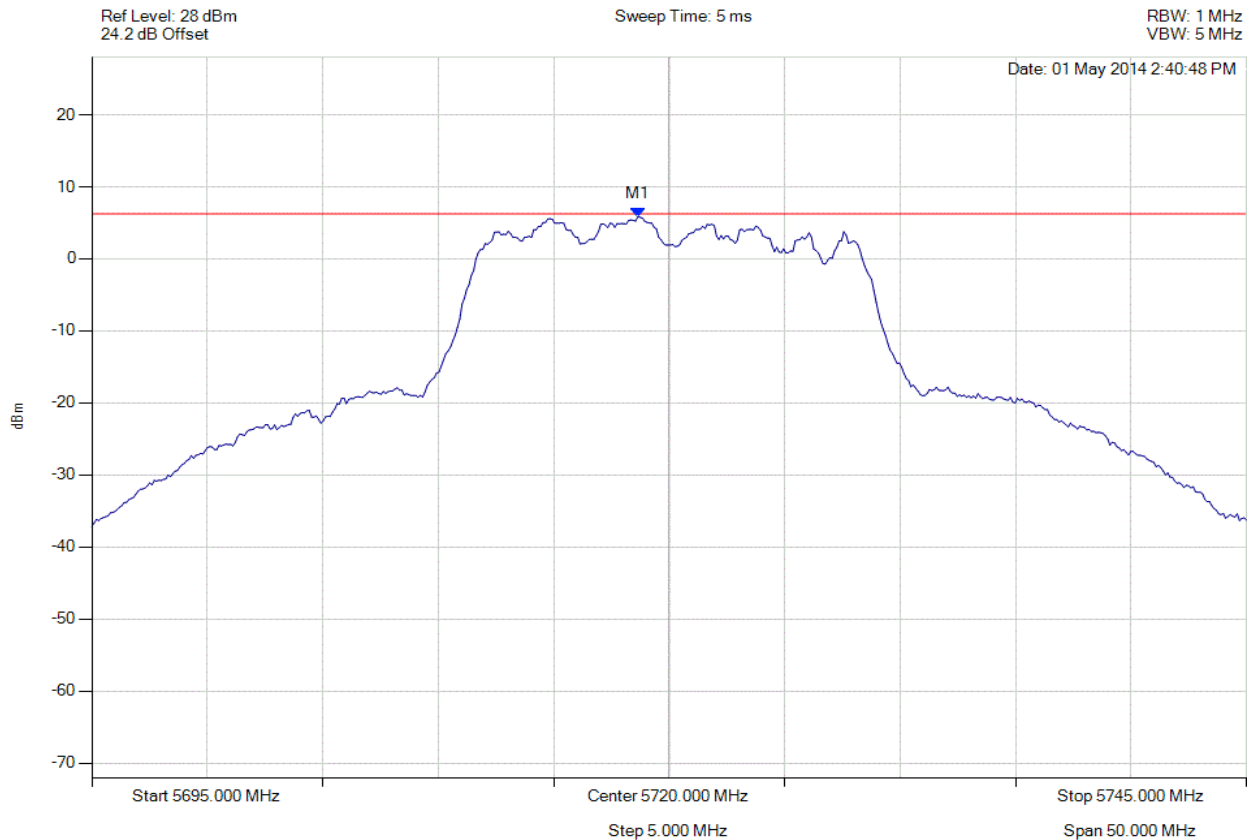

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5718.647 MHz : 5.880 dBm	Limit: ≤ 6.229 dBm Margin: -0.08 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 195 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5720.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

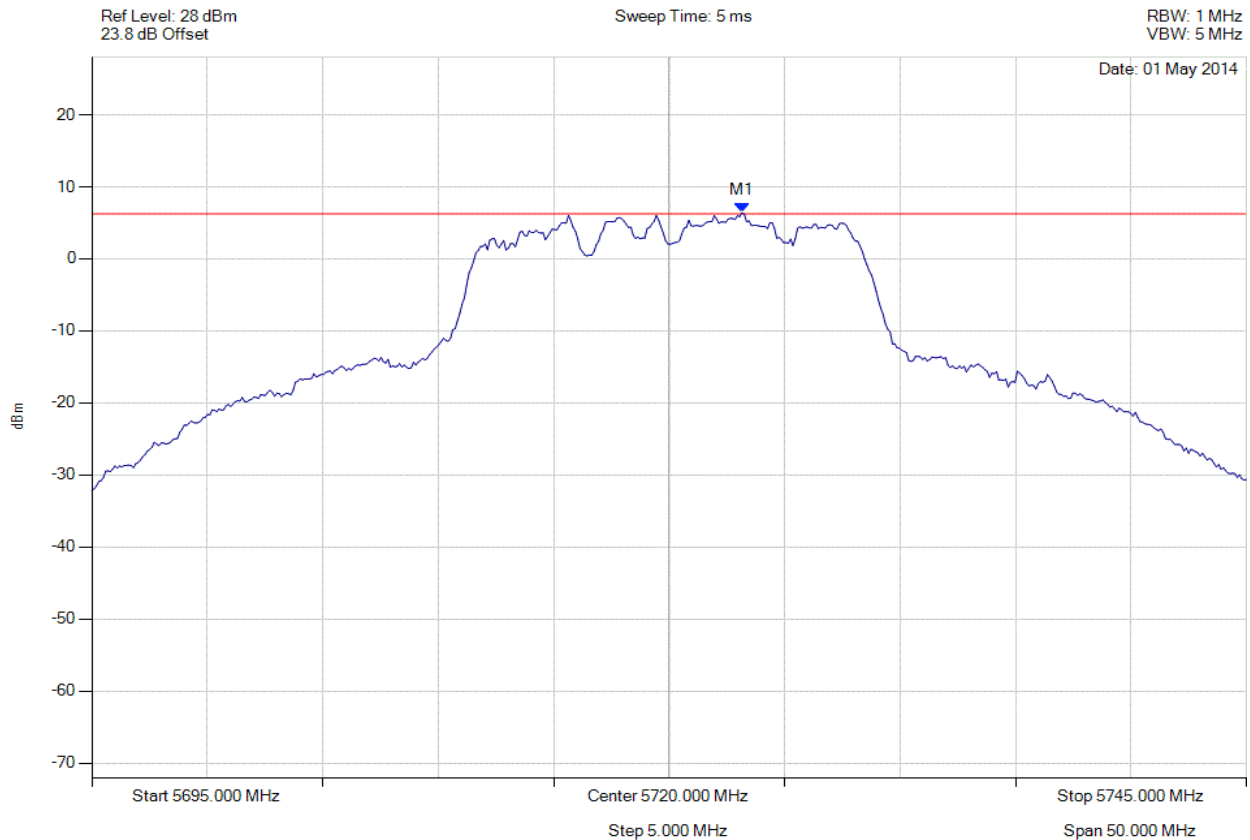

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5723.156 MHz : 6.399 dBm	Limit: ≤ 6.229 dBm Margin: 0.44 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 196 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5720.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

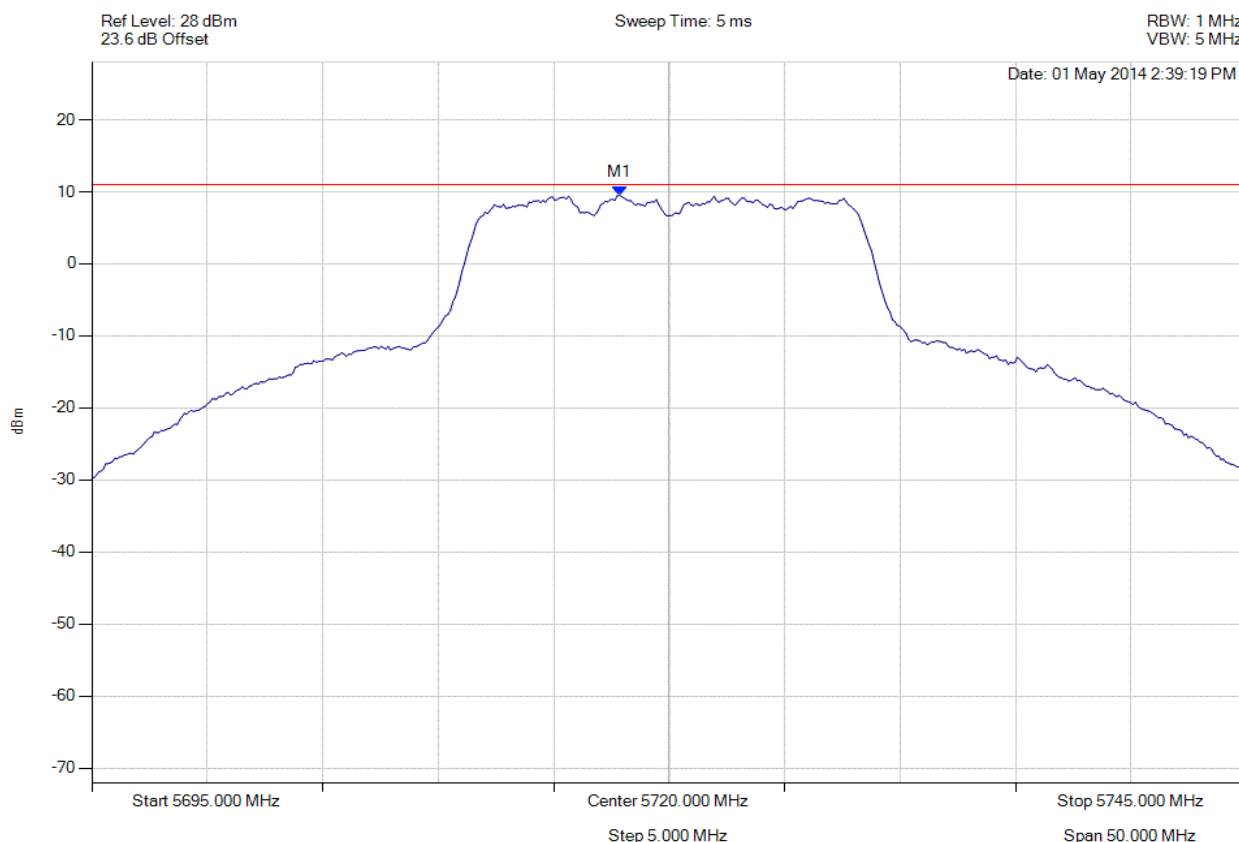

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5717.846 MHz : 9.557 dBm M1 + DCCF : 5717.846 MHz : 9.827 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -1.2 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 197 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

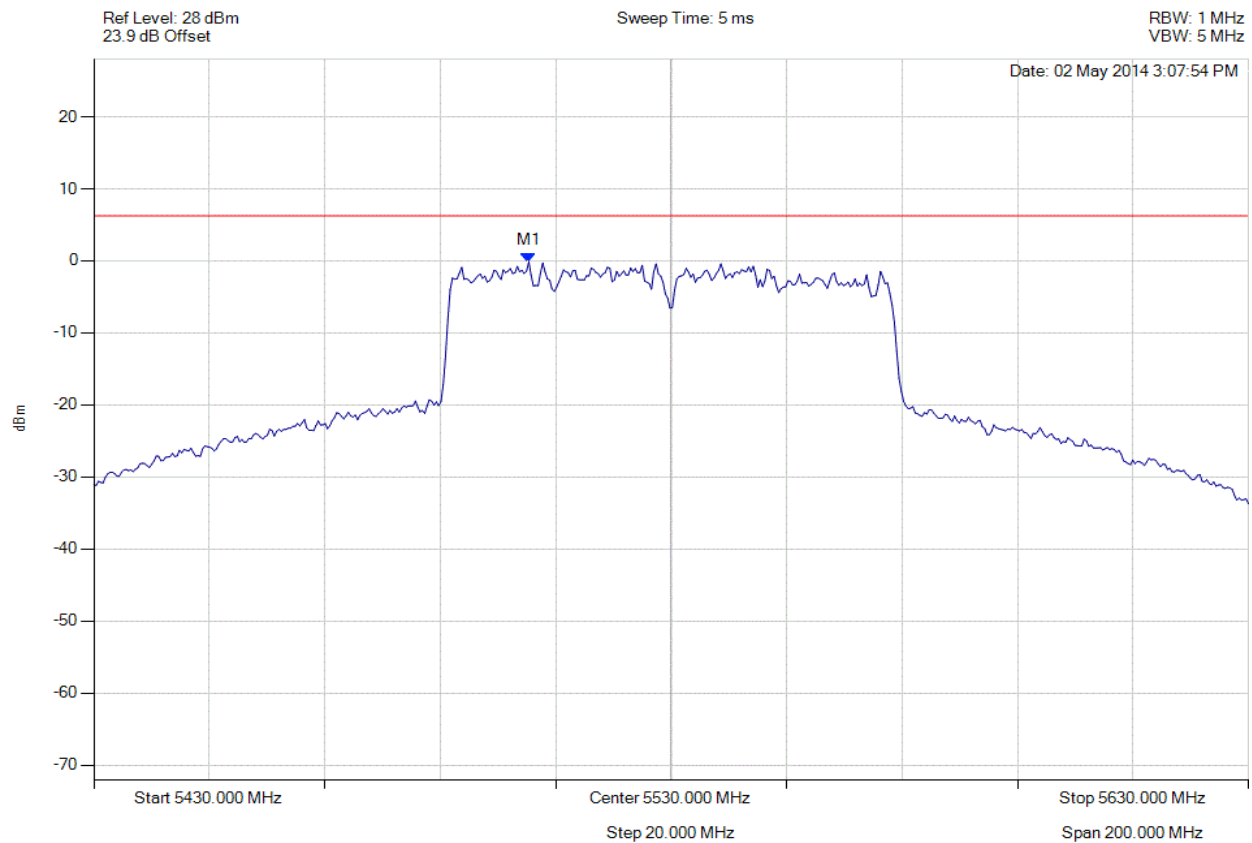

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5505.351 MHz : -0.154 dBm	Limit: ≤ 6.229 dBm Margin: -5.62 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 198 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

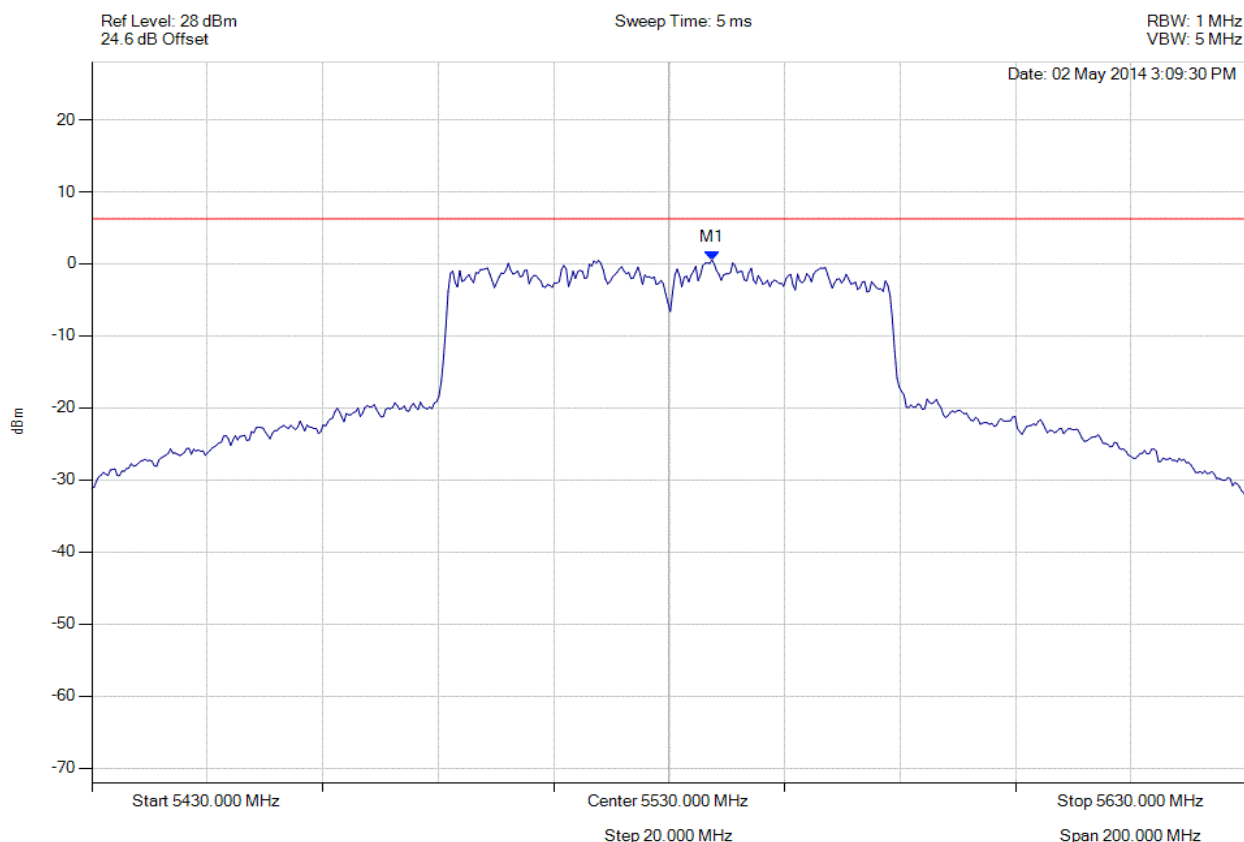

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5537.415 MHz : 0.547 dBm	Limit: ≤ 6.229 dBm Margin: -4.92 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 199 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5530.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

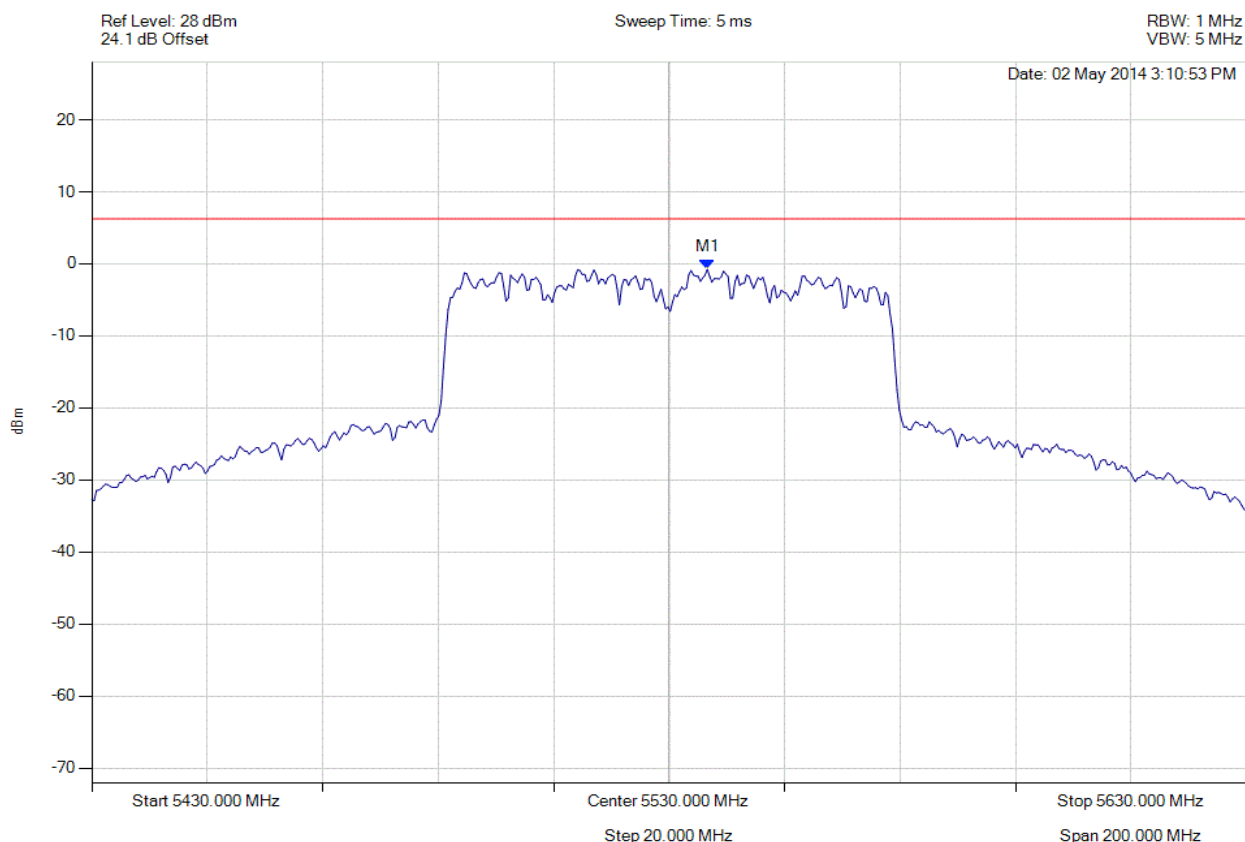

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5536.613 MHz : -0.771 dBm	Limit: ≤ 6.229 dBm Margin: 6.23 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 200 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5530.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

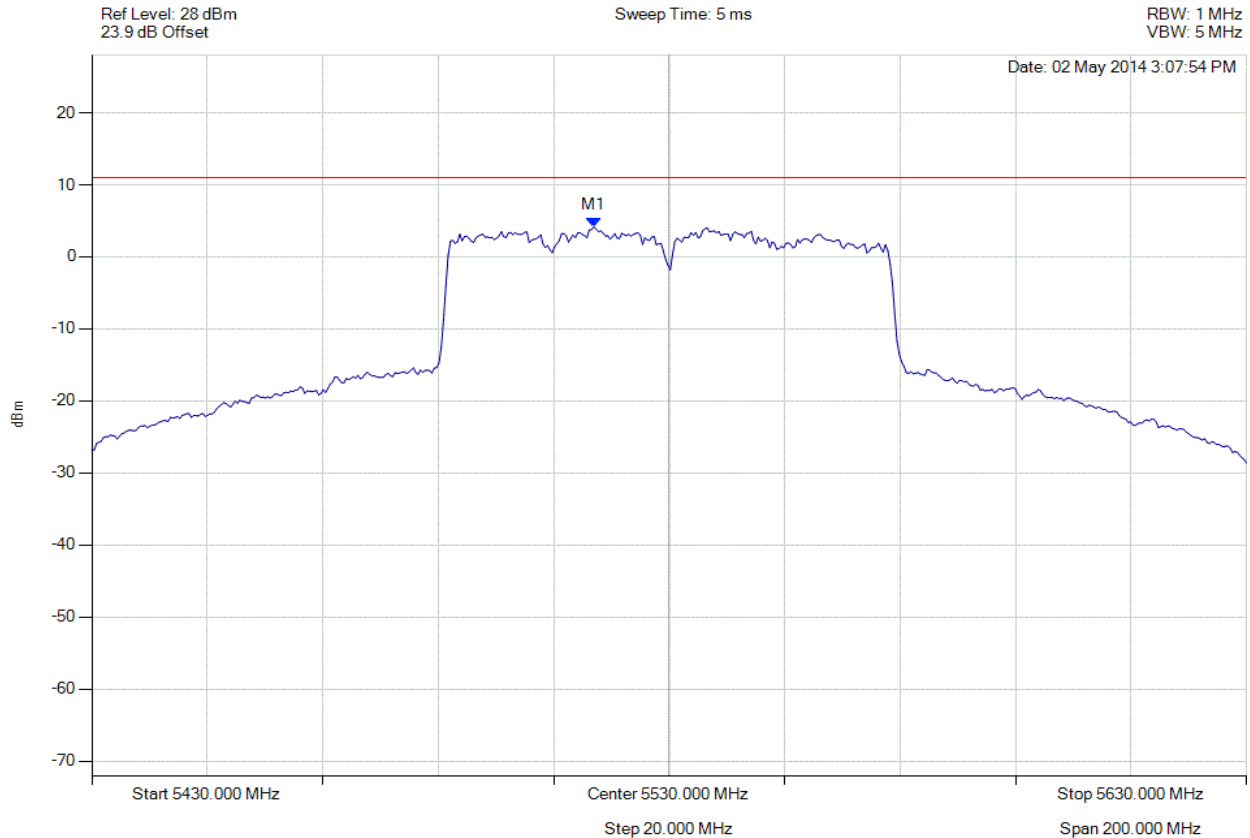

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5516.974 MHz : 4.150 dBm M1 + DCCF : 5516.974 MHz : 4.860 dBm Duty Cycle Correction Factor : +0.71 dB	Limit: ≤ 11.0 dBm Margin: -6.1 dB


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5610.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

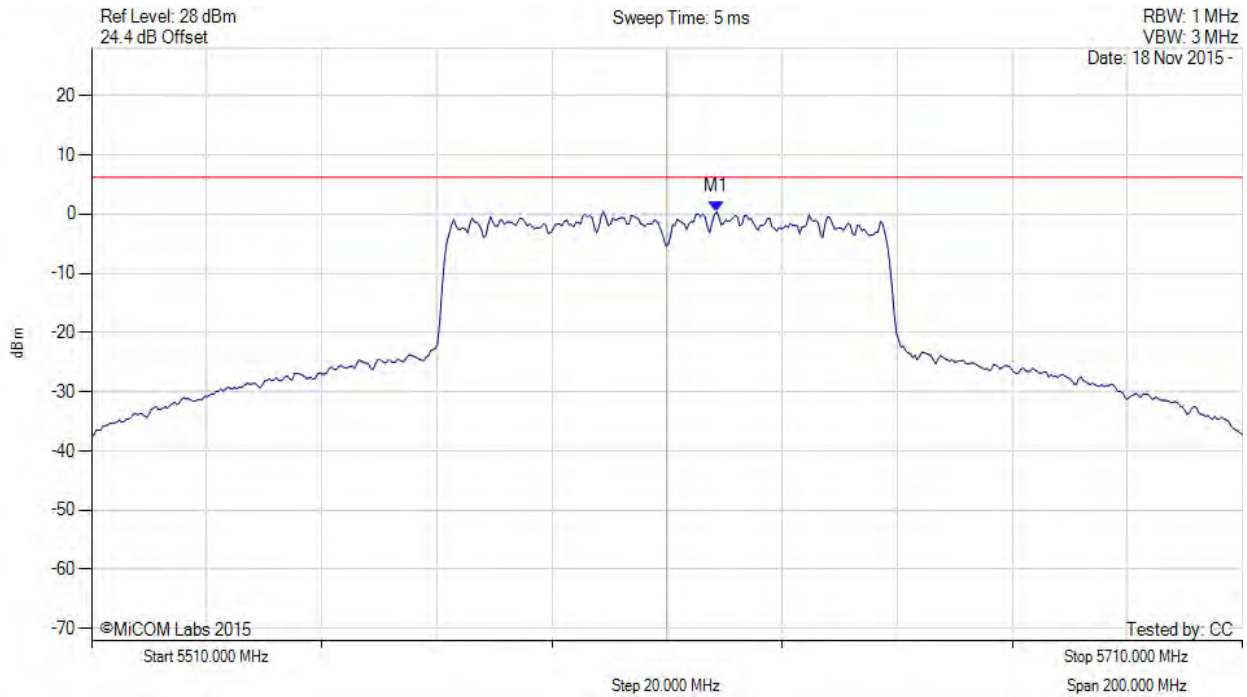

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5618.617 MHz : 0.404 dBm	Limit: ≤ 6.230 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 202 of 404



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5610.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

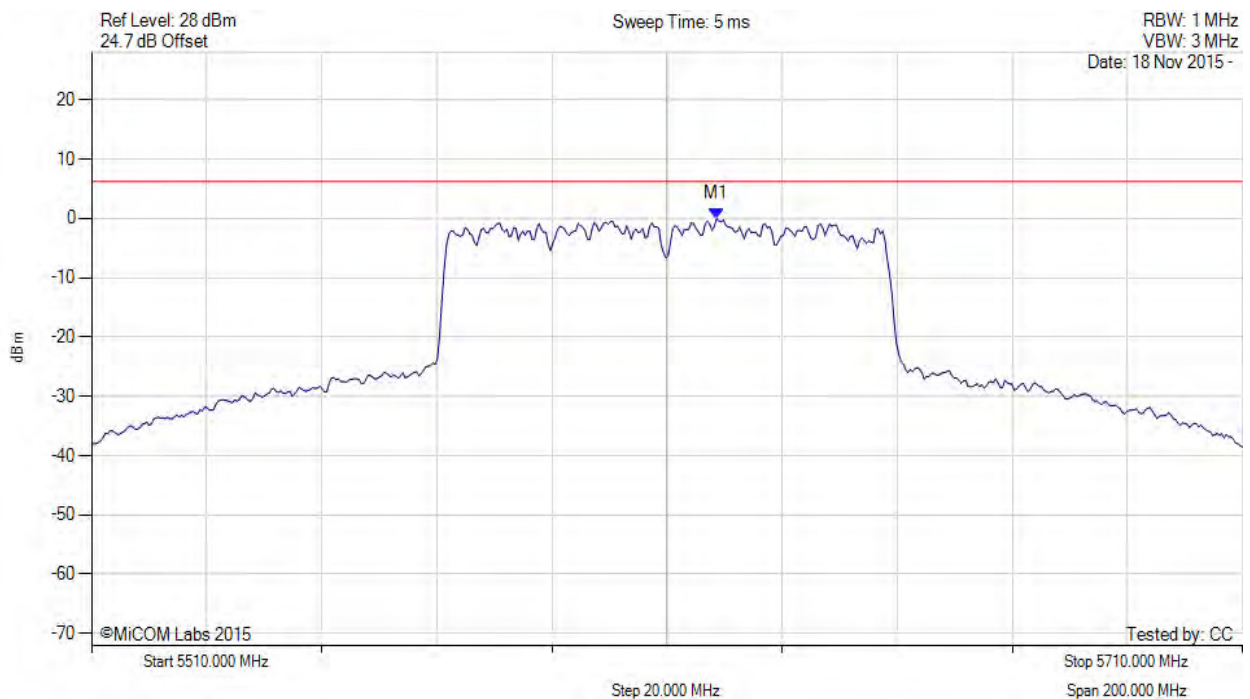

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5618.617 MHz : -0.090 dBm	Channel Frequency: 5610.00 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 203 of 404



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5610.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

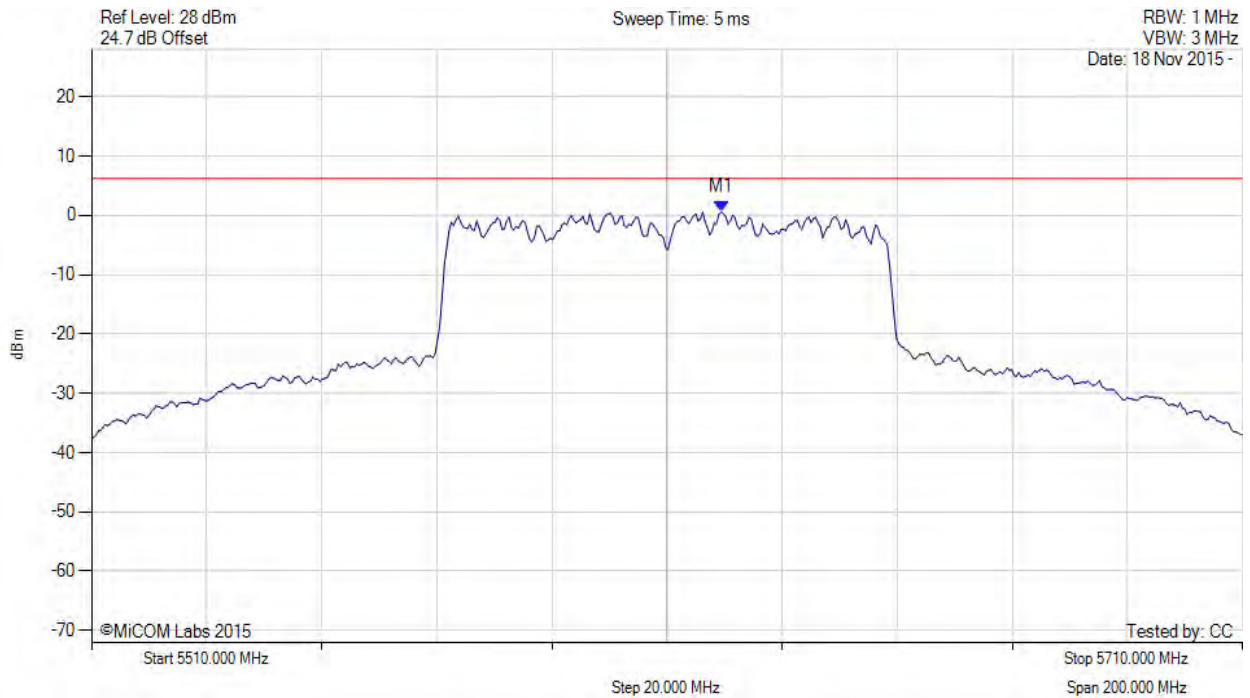

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5619.419 MHz : 0.575 dBm	Limit: ≤ 6.230 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 204 of 404



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5610.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

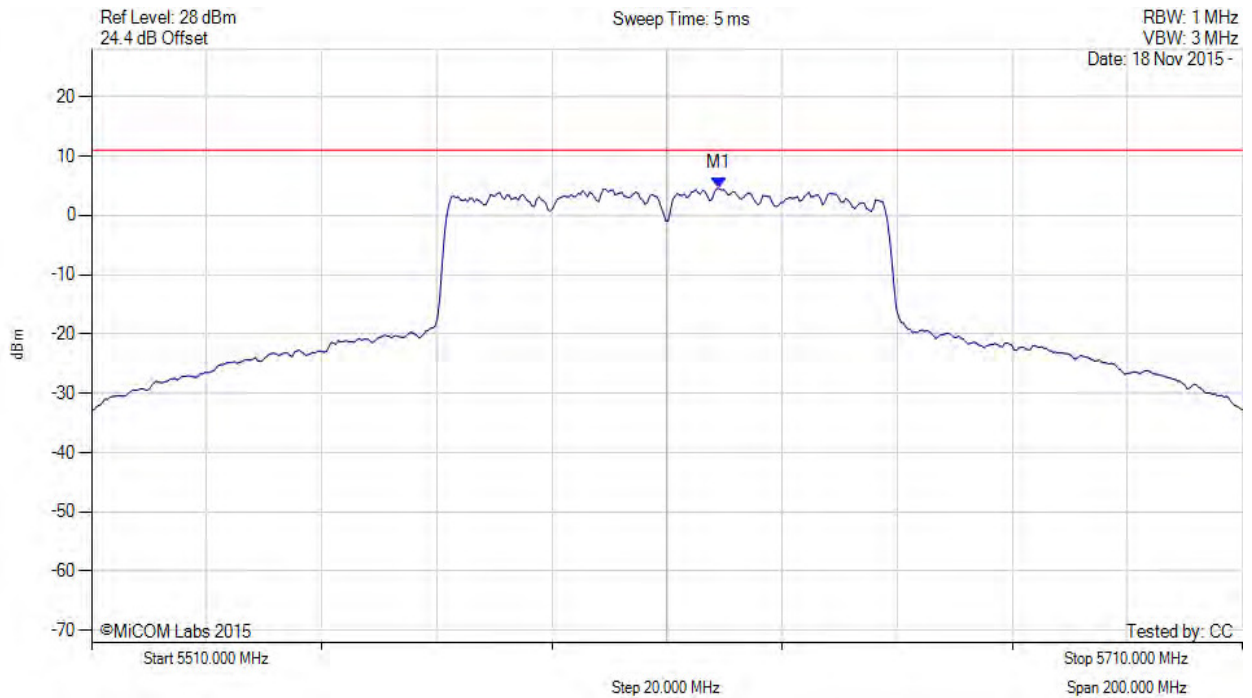

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5619.000 MHz : 4.543 dBm M1 + DCCF : 5619.000 MHz : 5.249 dBm Duty Cycle Correction Factor : +0.71 dB	Limit: ≤ 11.0 dBm Margin: -5.7 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 205 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

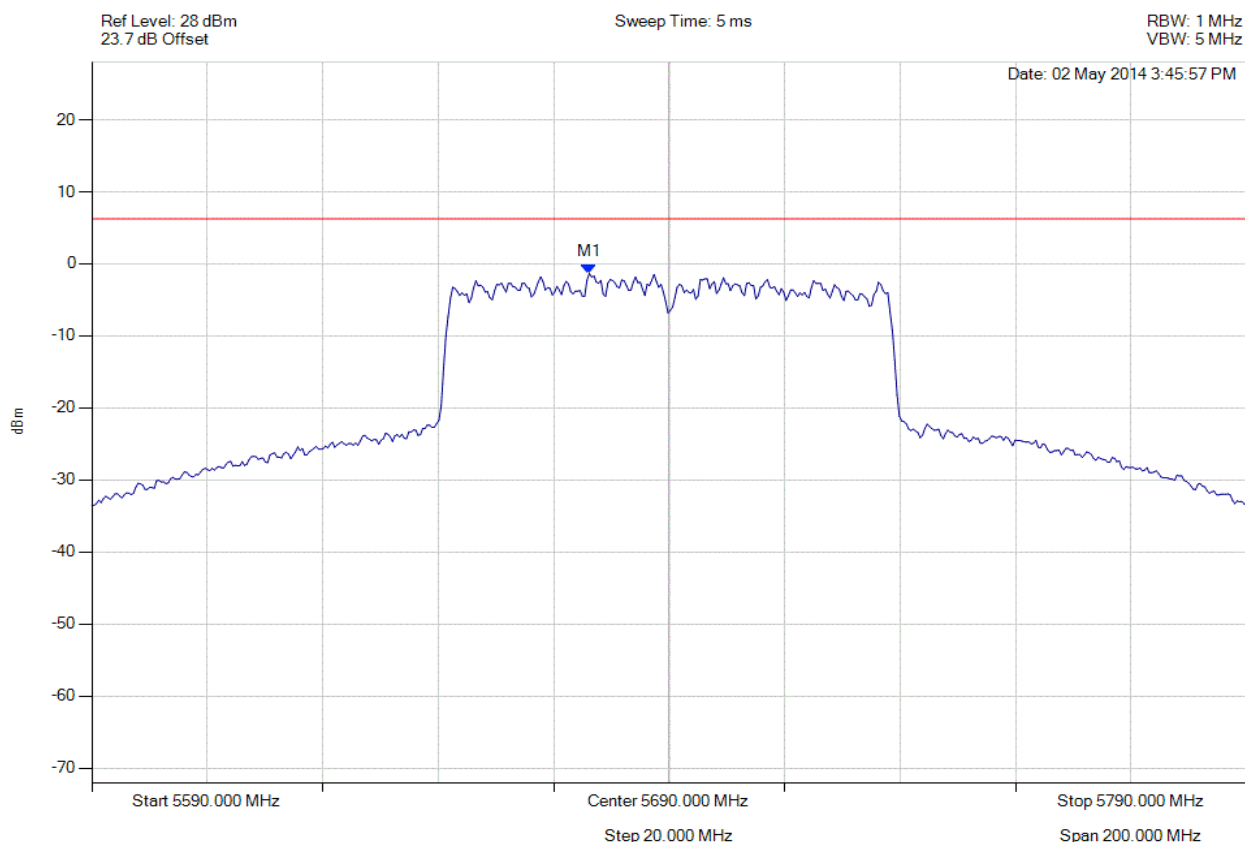

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5676.172 MHz : -1.325 dBm	Limit: ≤ 6.229 dBm Margin: 6.79 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 206 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

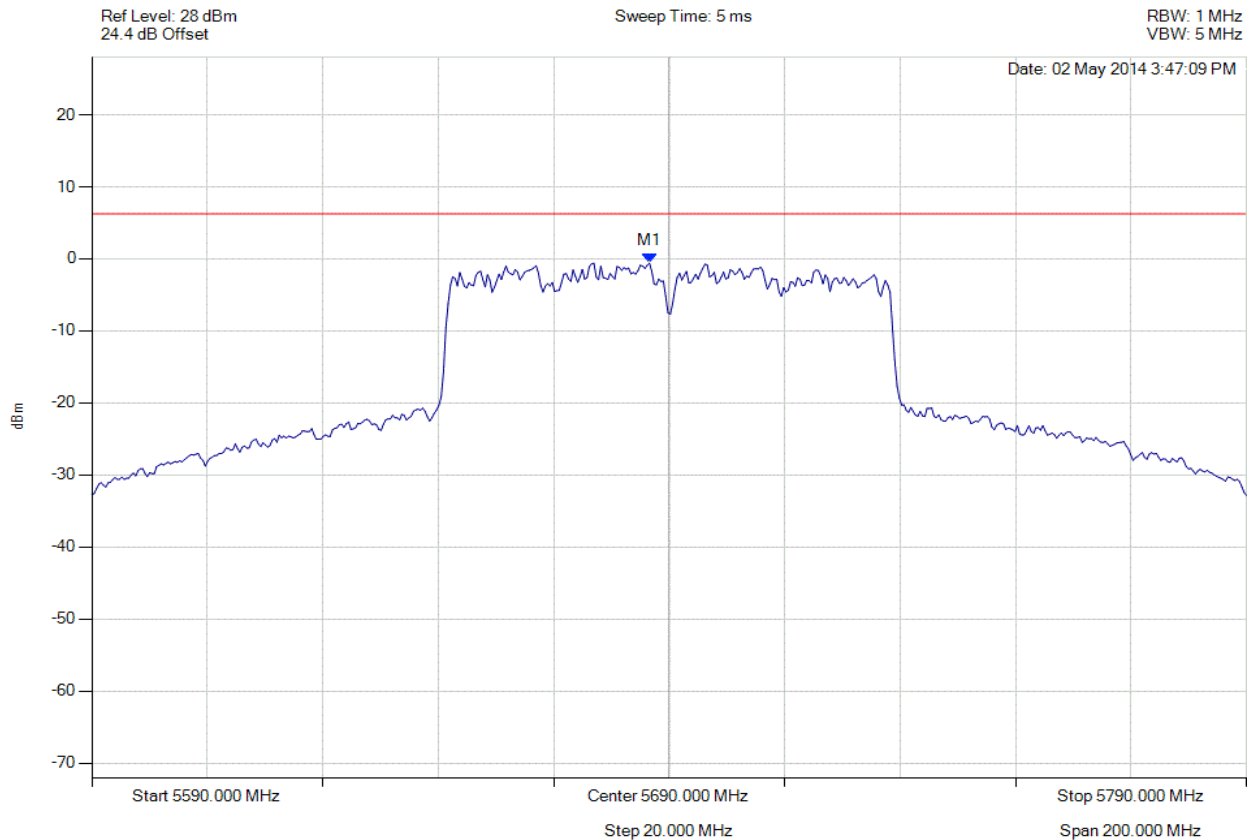

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5686.593 MHz : -0.594 dBm	Limit: ≤ 6.229 dBm Margin: -6.06 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 207 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5690.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

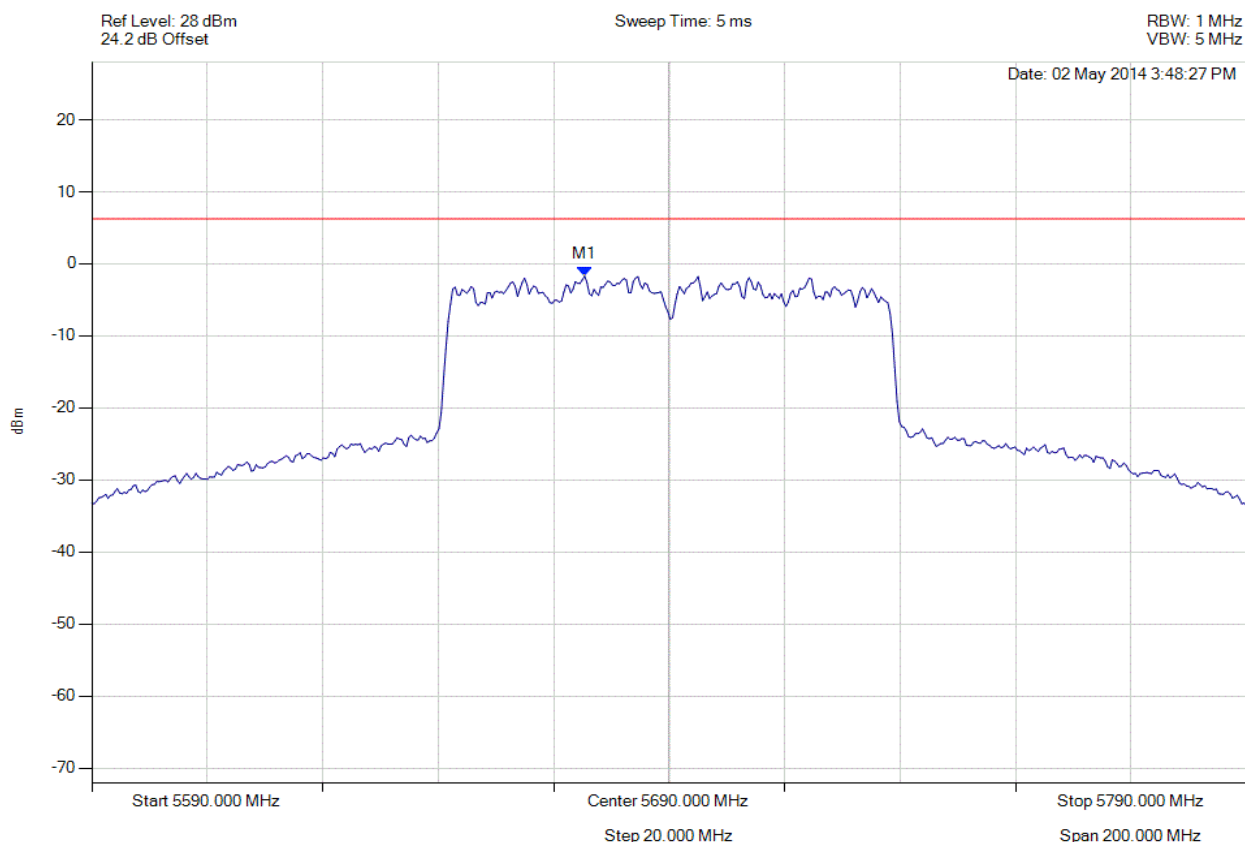

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5675.371 MHz : -1.693 dBm	Limit: ≤ 6.229 dBm Margin: 7.16 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 208 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5690.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

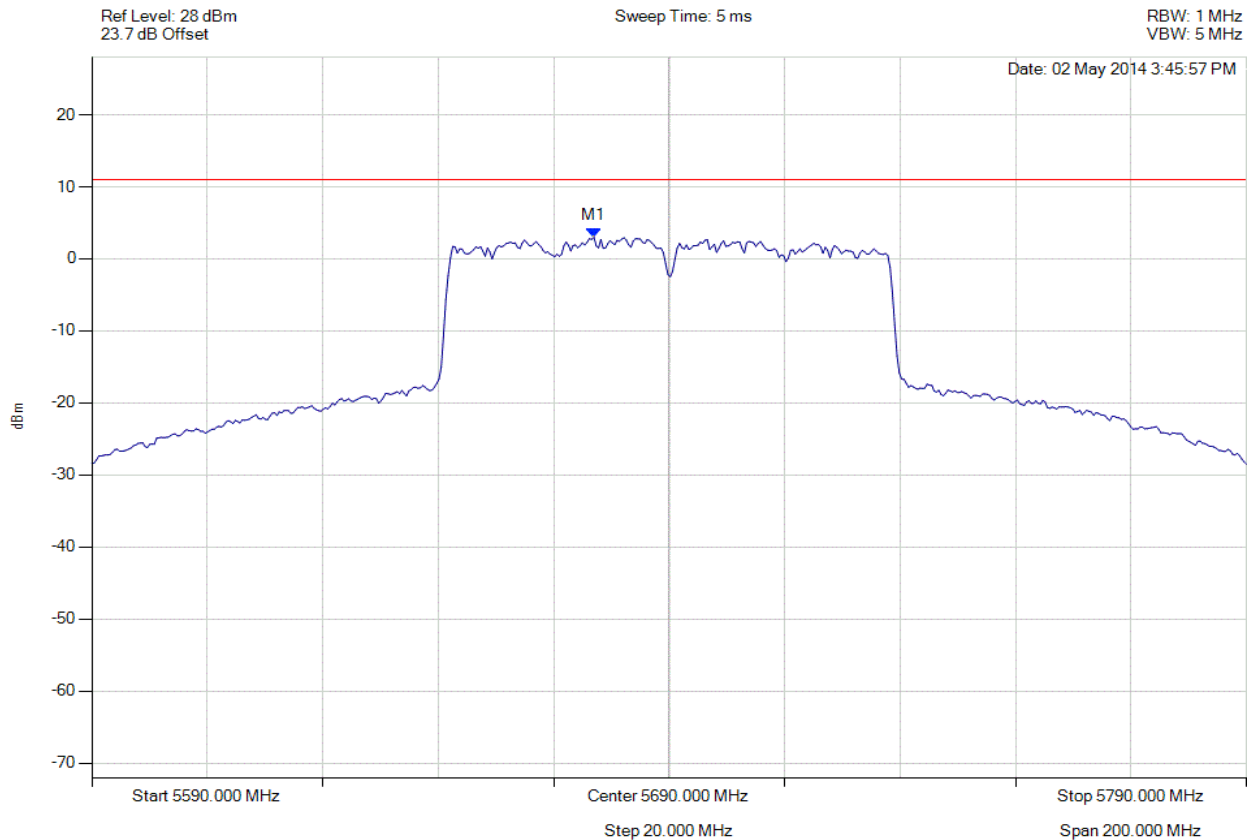

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5676.974 MHz : 2.986 dBm M1 + DCCF : 5676.974 MHz : 3.696 dBm Duty Cycle Correction Factor : +0.71 dB	Limit: ≤ 11.0 dBm Margin: -7.2 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 209 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

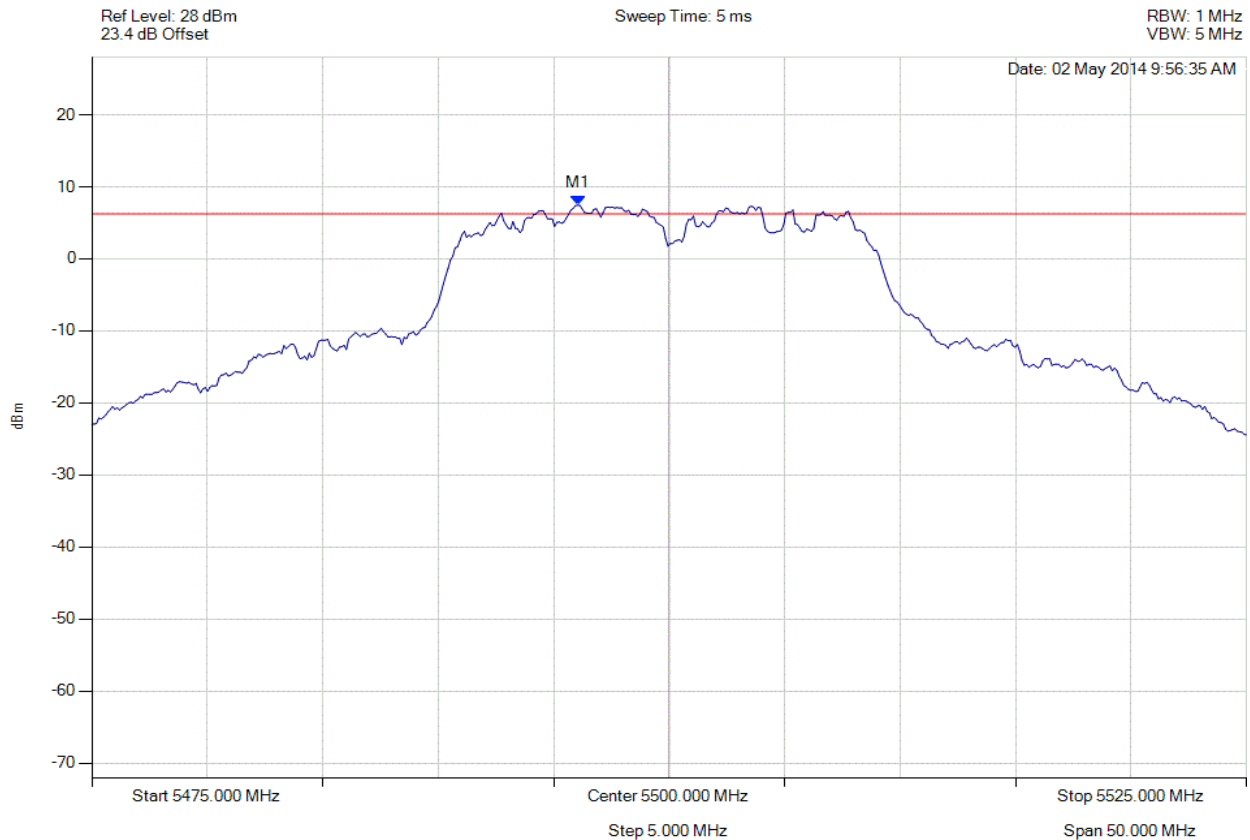

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5496.042 MHz : 7.452 dBm	Limit: ≤ 6.229 dBm Margin: 1.47 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 210 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

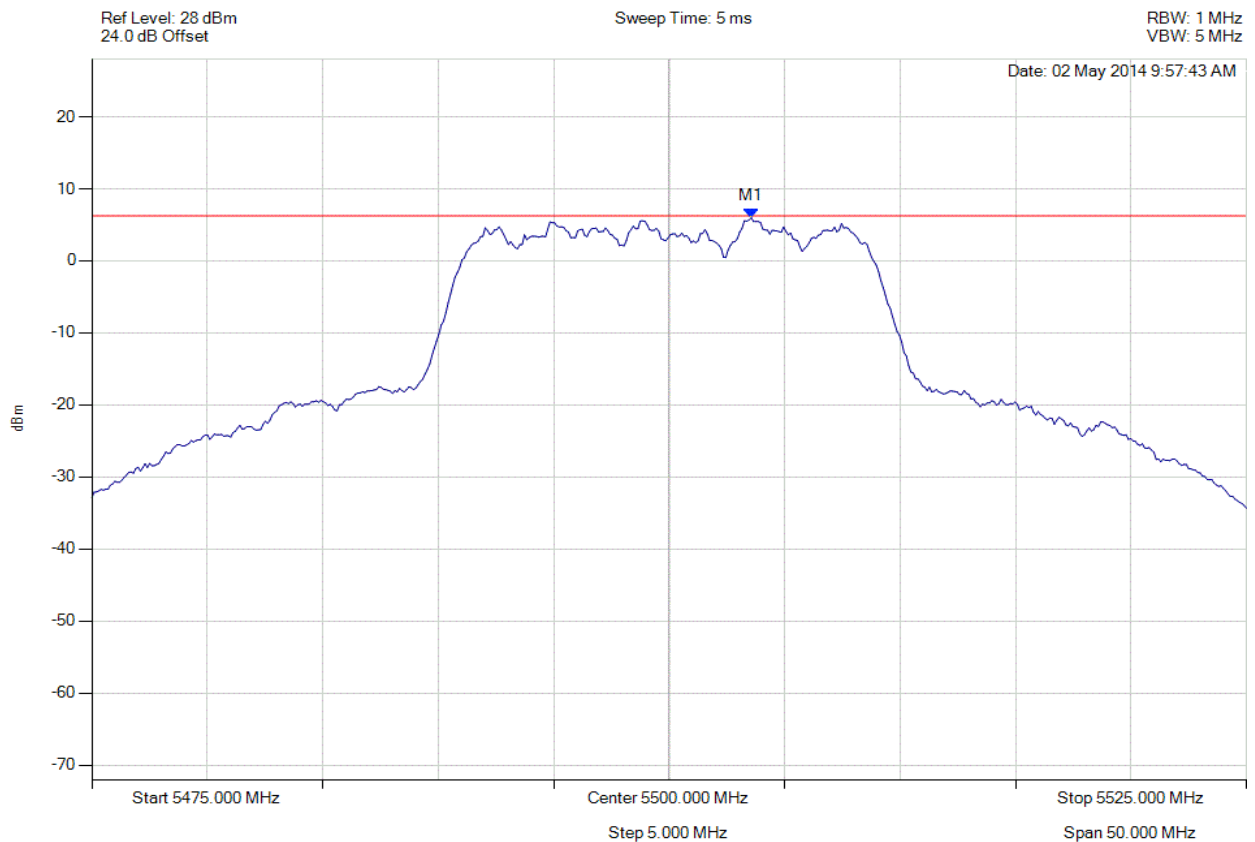

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5503.557 MHz : 5.984 dBm	Limit: ≤ 6.229 dBm Margin: 0.00 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 211 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5500.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

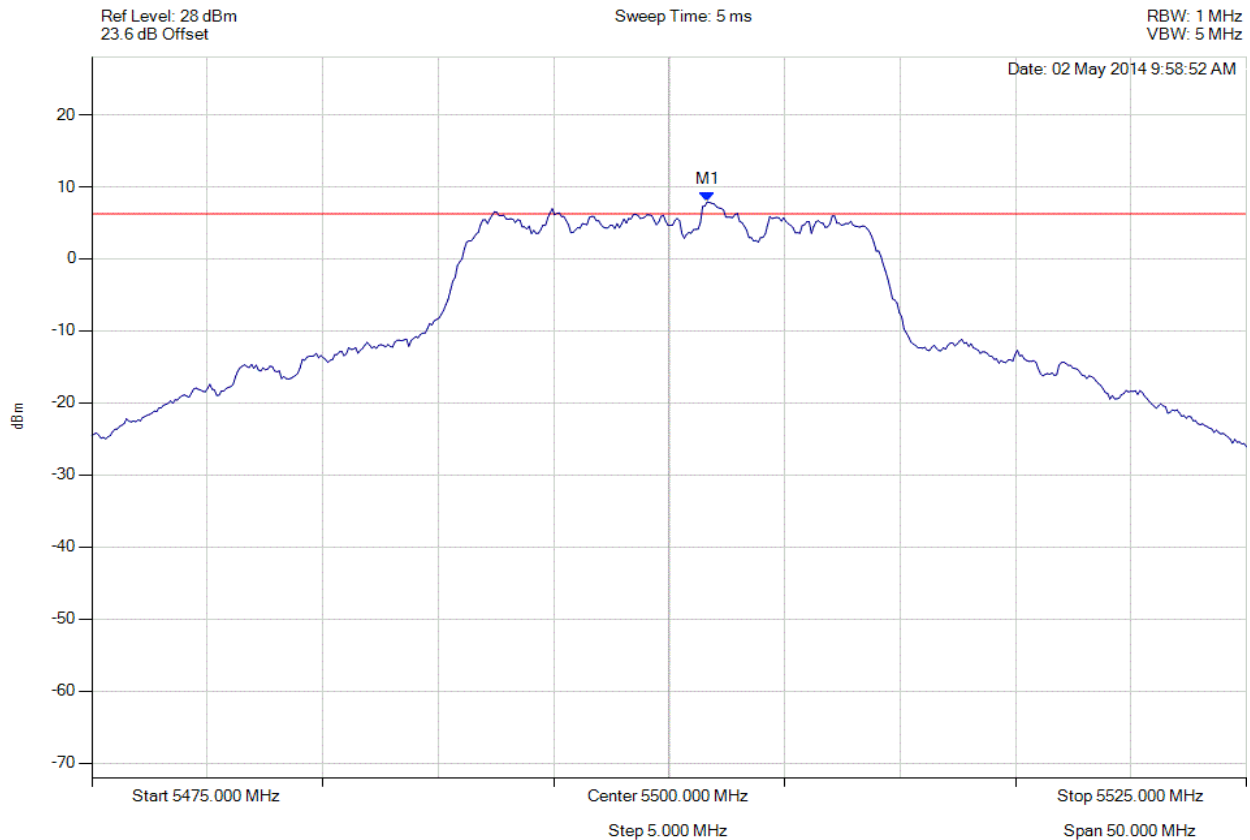

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5501.653 MHz : 7.893 dBm	Limit: ≤ 6.229 dBm Margin: 1.91 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 212 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5500.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

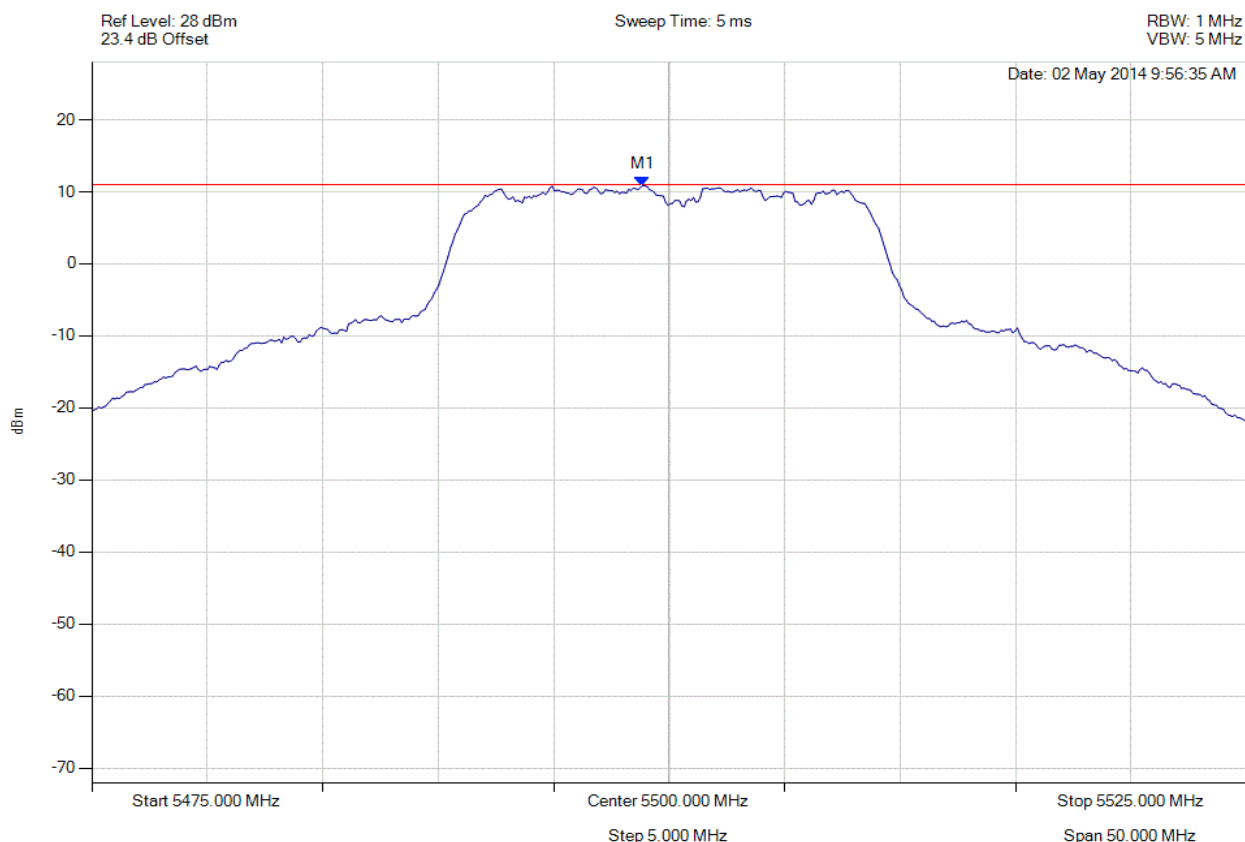

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5498.848 MHz : 10.723 dBm M1 + DCCF : 5498.848 MHz : 10.993 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -0.1 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 213 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

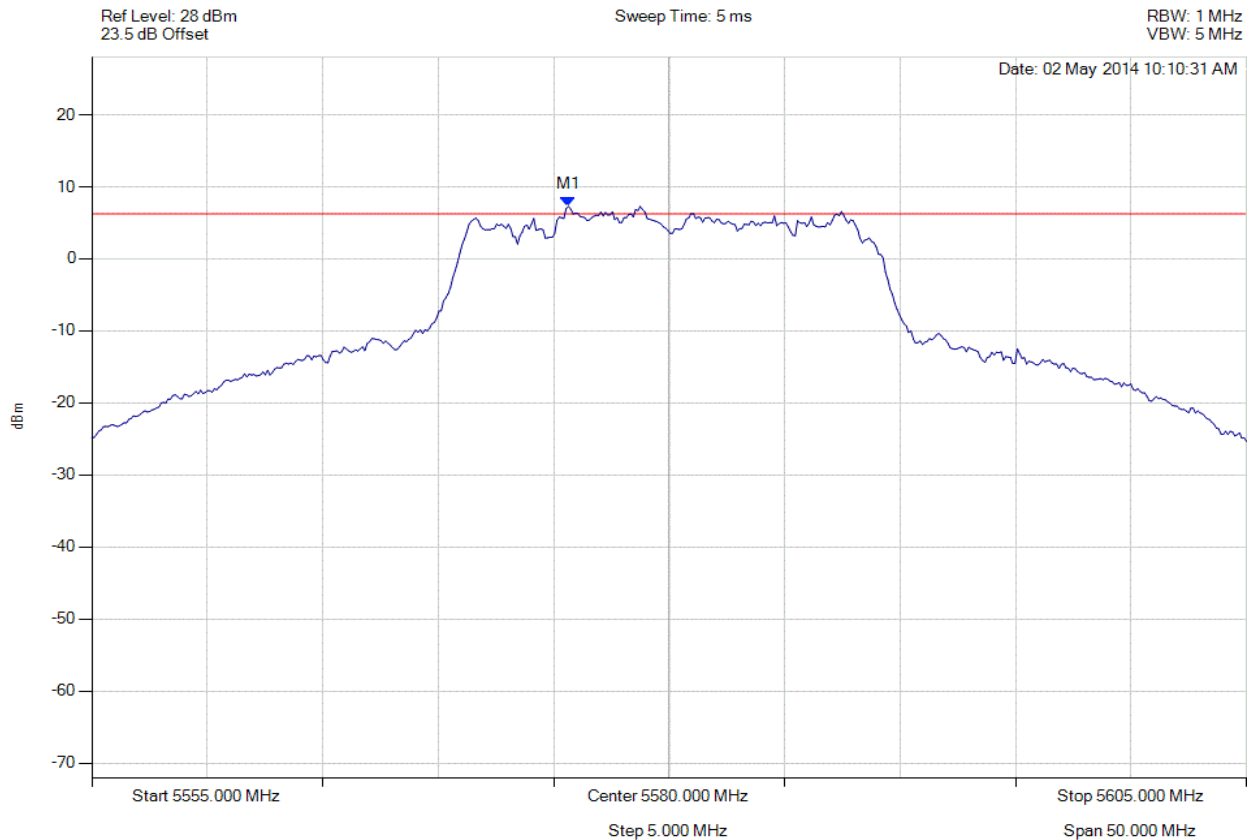

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5575.641 MHz : 7.264 dBm	Limit: ≤ 6.229 dBm Margin: 1.28 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 214 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

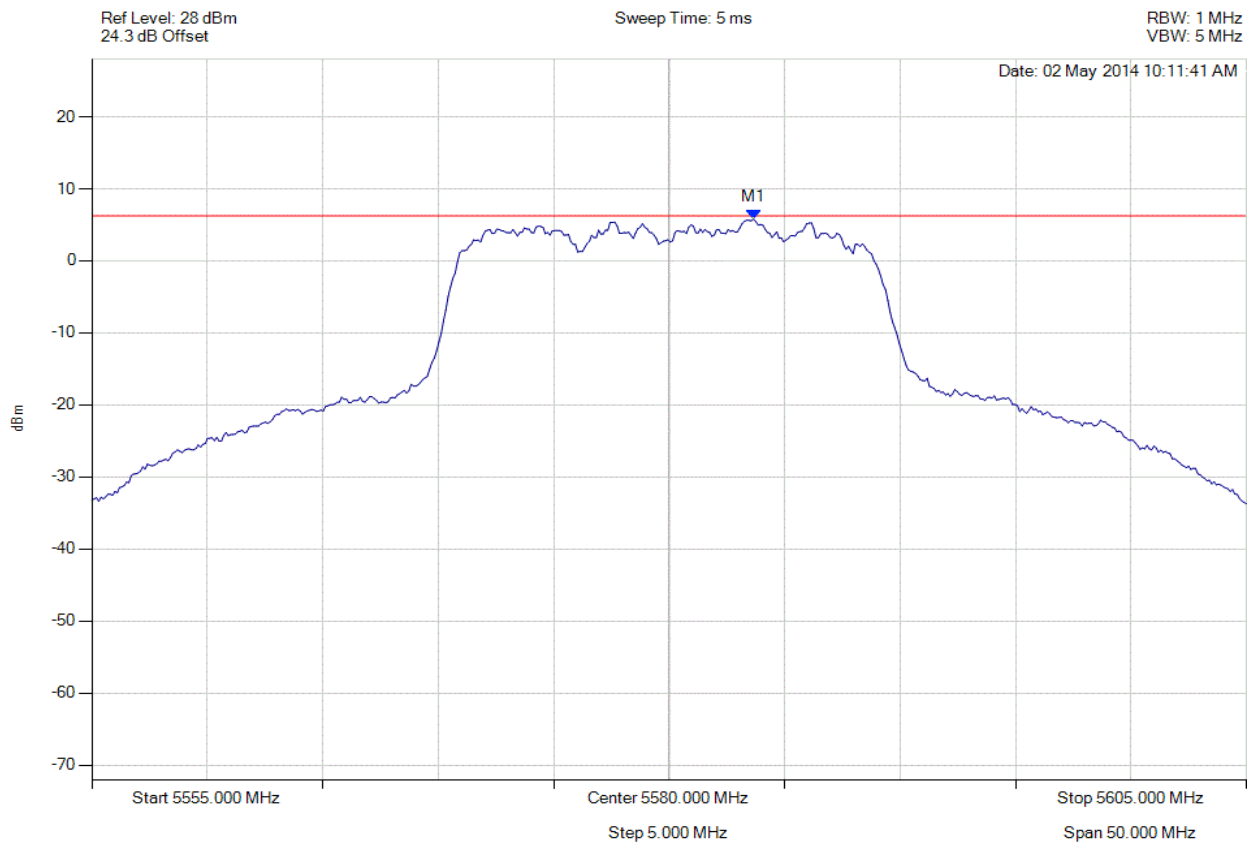

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5583.657 MHz : 5.791 dBm	Limit: ≤ 6.229 dBm Margin: -0.19 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 215 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5580.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

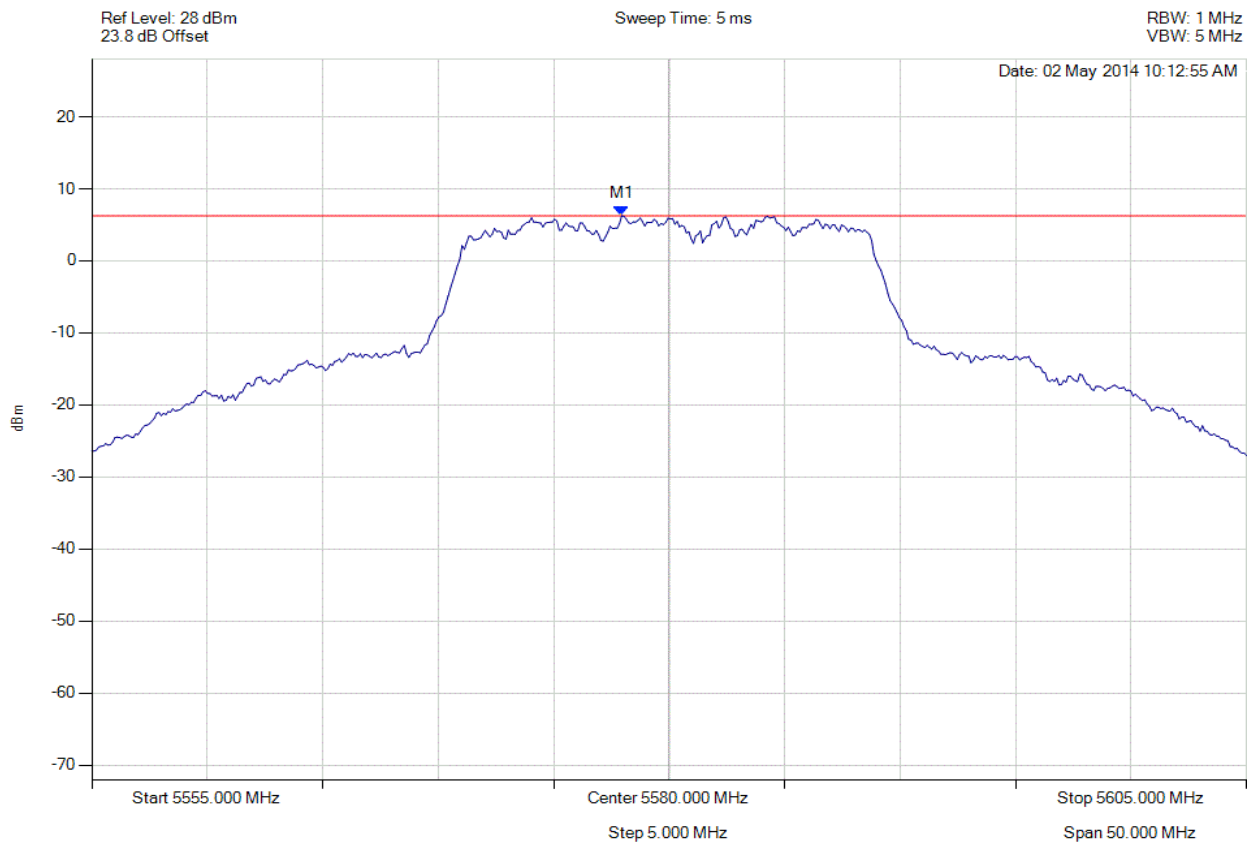

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5577.946 MHz : 6.261 dBm	Limit: ≤ 6.229 dBm Margin: 0.28 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 216 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5580.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

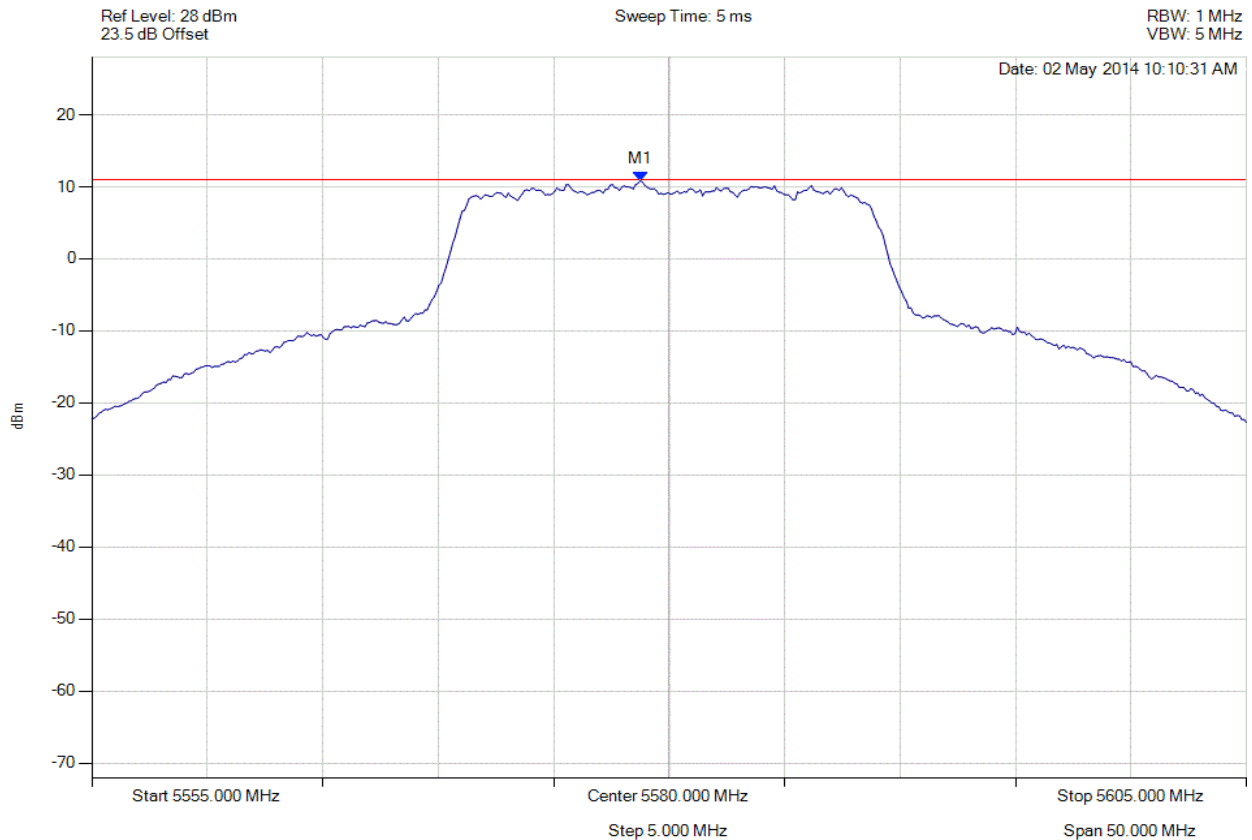

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5578.747 MHz : 10.712 dBm M1 + DCCF : 5578.747 MHz : 10.982 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -0.0 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 217 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

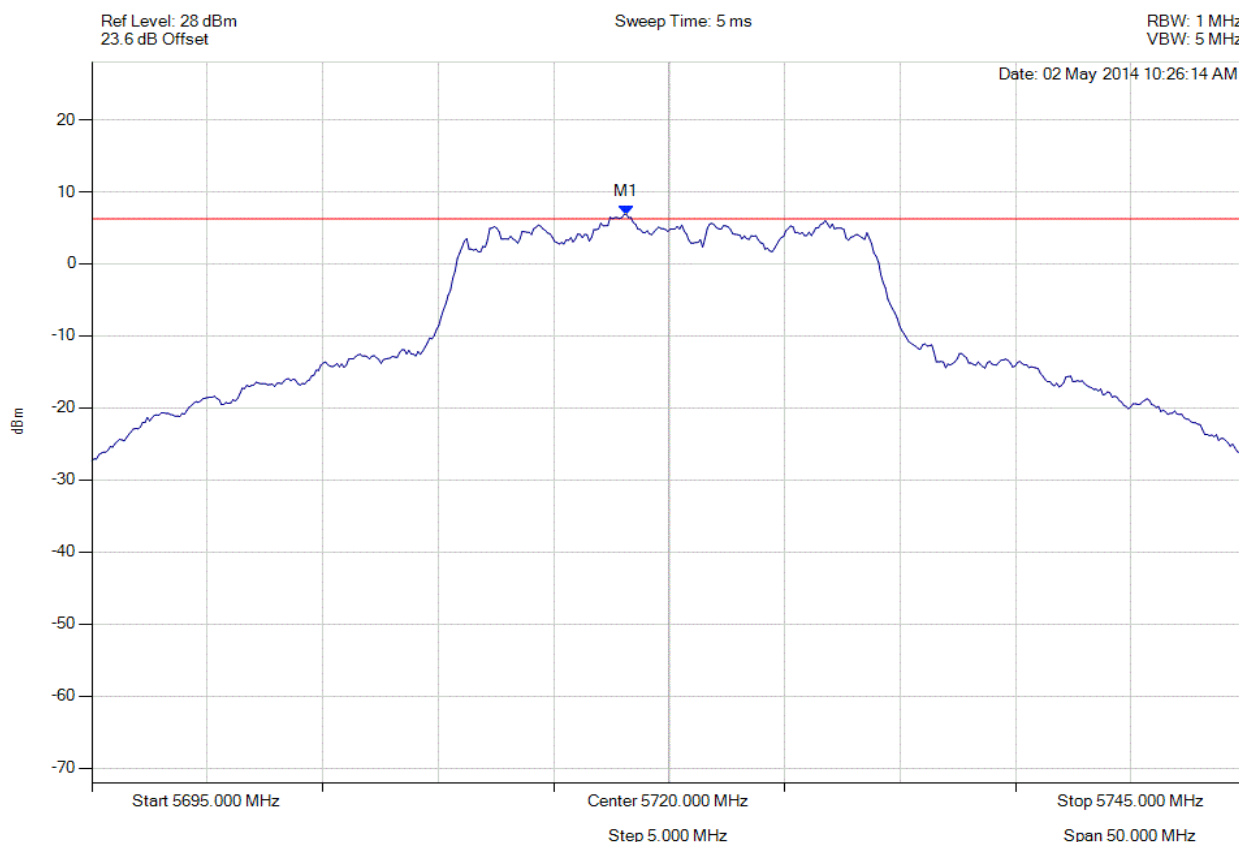

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5718.146 MHz : 6.883 dBm	Limit: ≤ 6.229 dBm Margin: 0.90 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 218 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

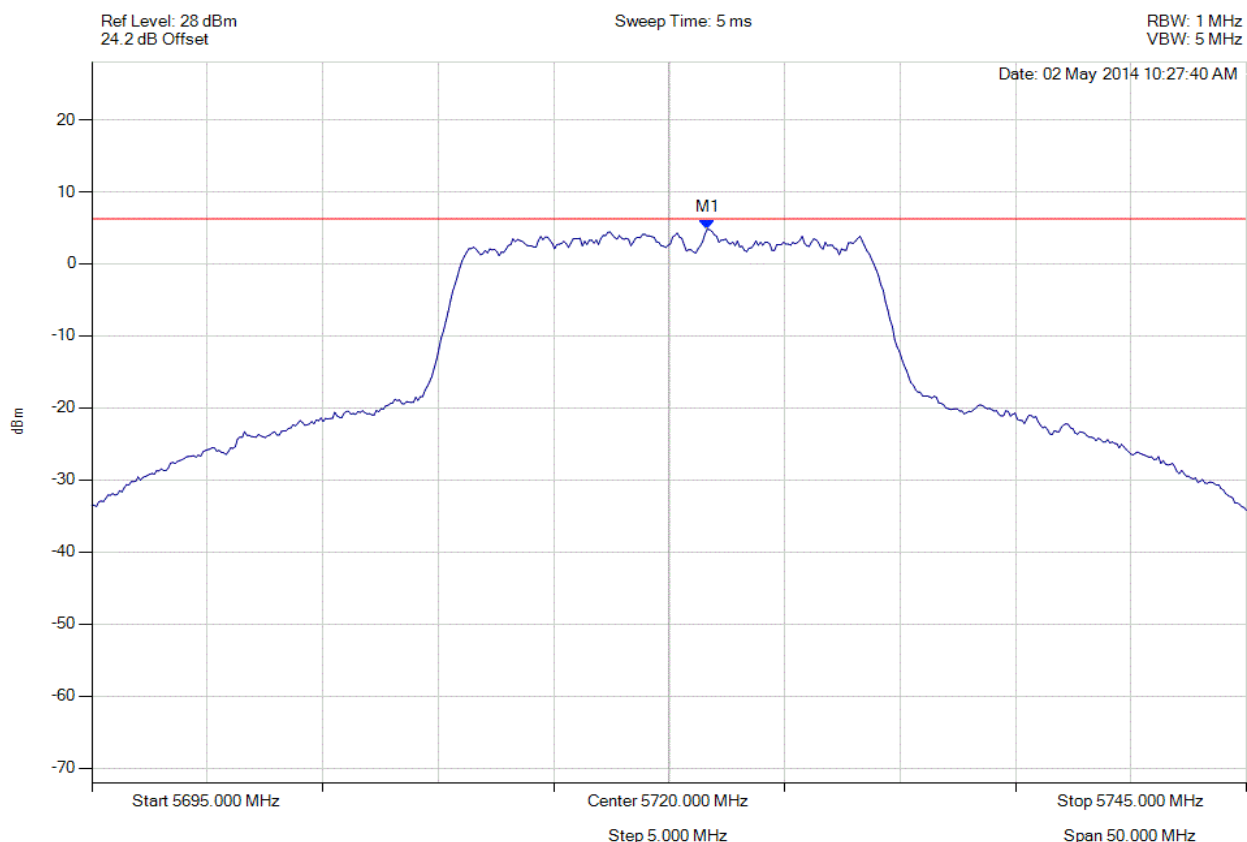

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5721.653 MHz : 4.814 dBm	Limit: ≤ 6.229 dBm Margin: -1.17 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 219 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5720.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

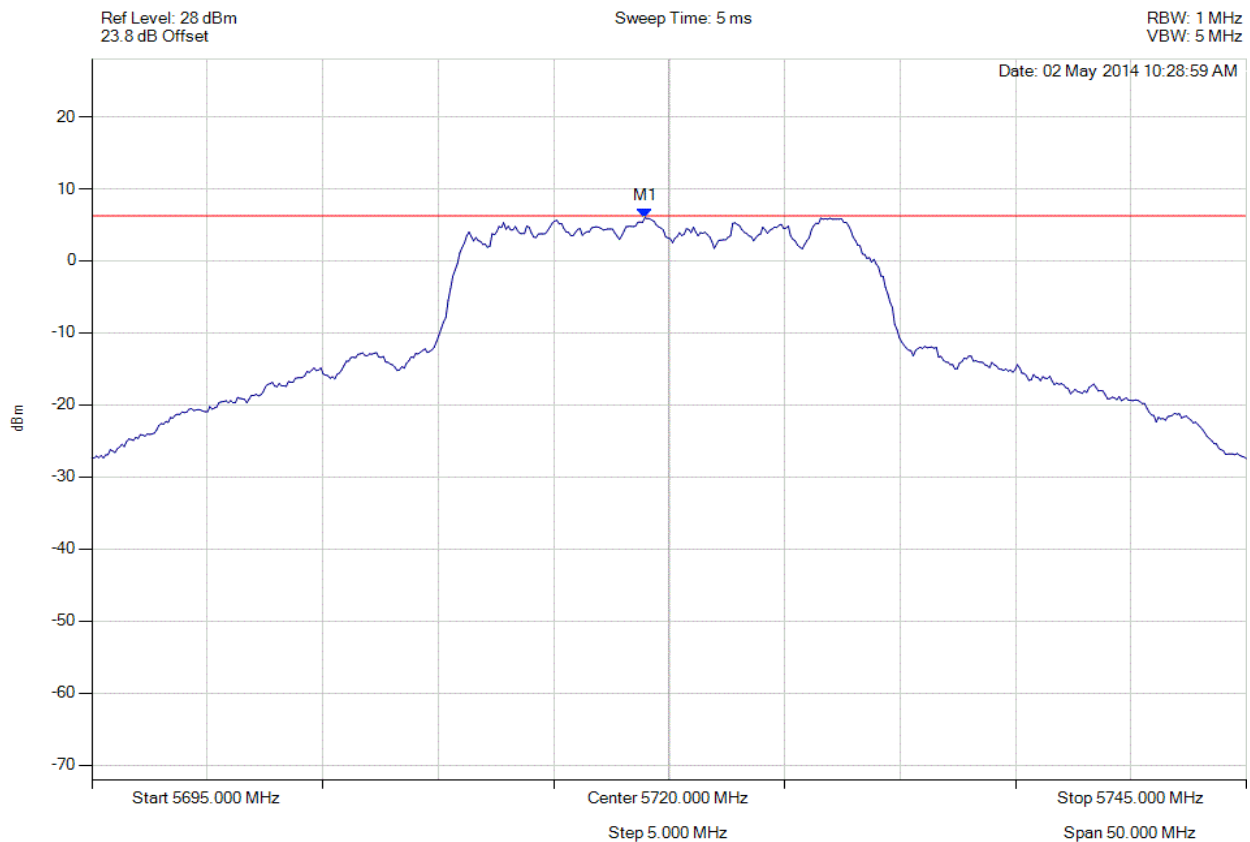

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5718.948 MHz : 5.983 dBm	Limit: ≤ 6.229 dBm Margin: 0.00 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 220 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5720.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

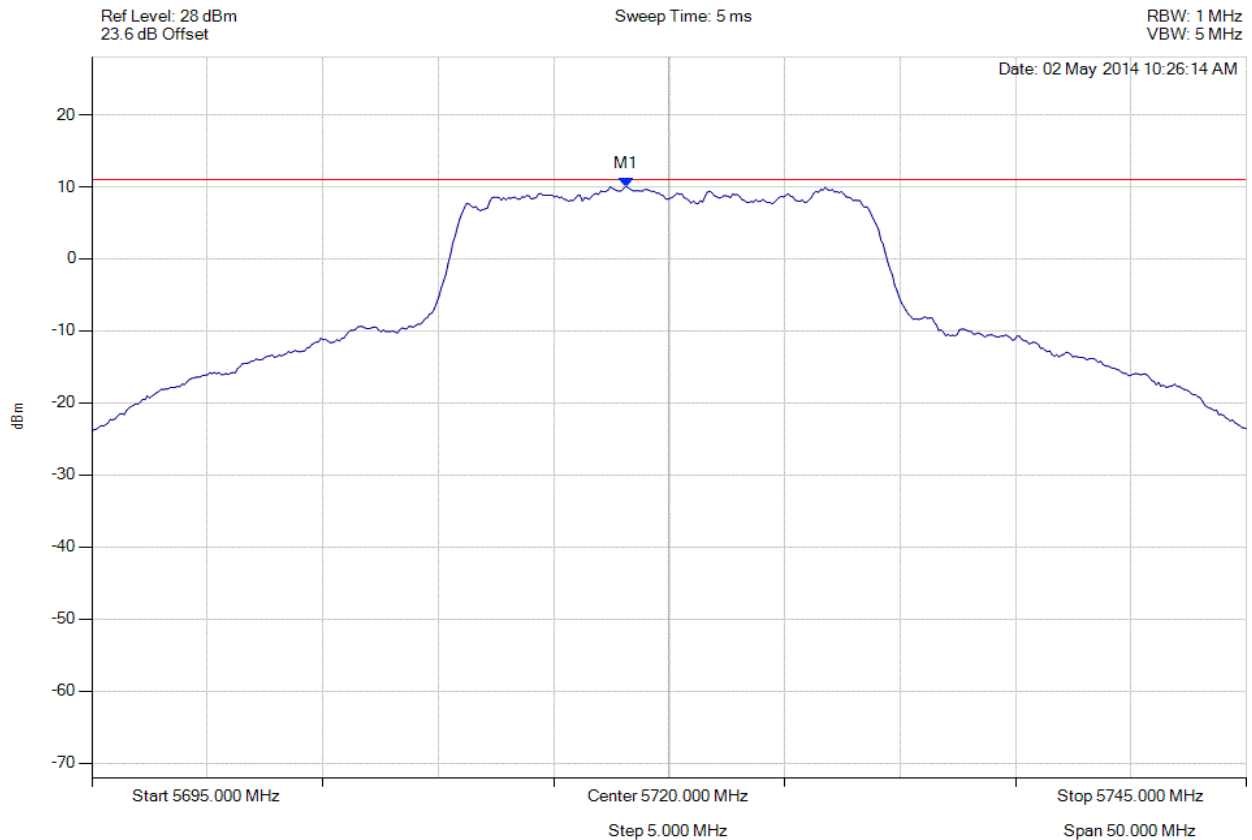

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5718.146 MHz : 10.055 dBm M1 + DCCF : 5718.146 MHz : 10.325 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 11.0 dBm Margin: -0.7 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 221 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

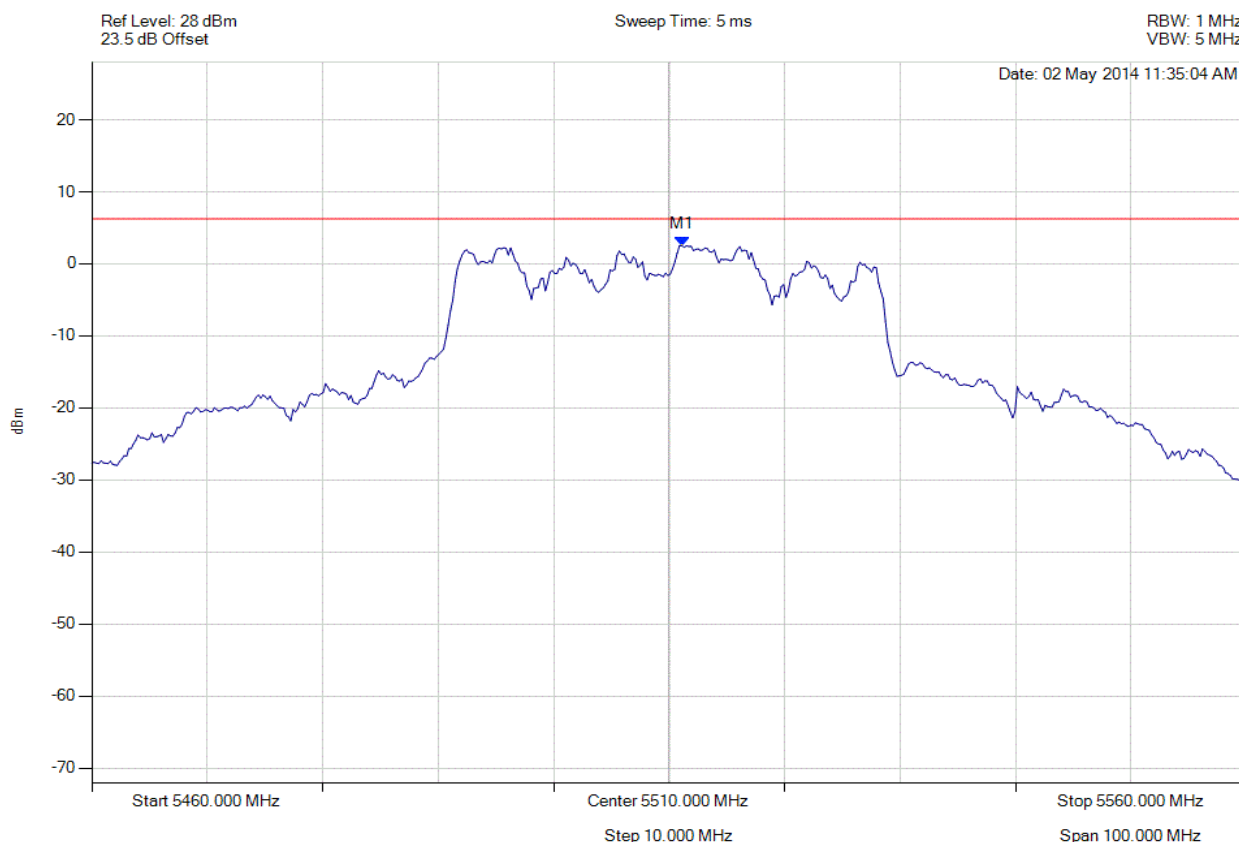

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5511.102 MHz : 2.518 dBm	Limit: ≤ 6.229 dBm Margin: -3.09 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 222 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

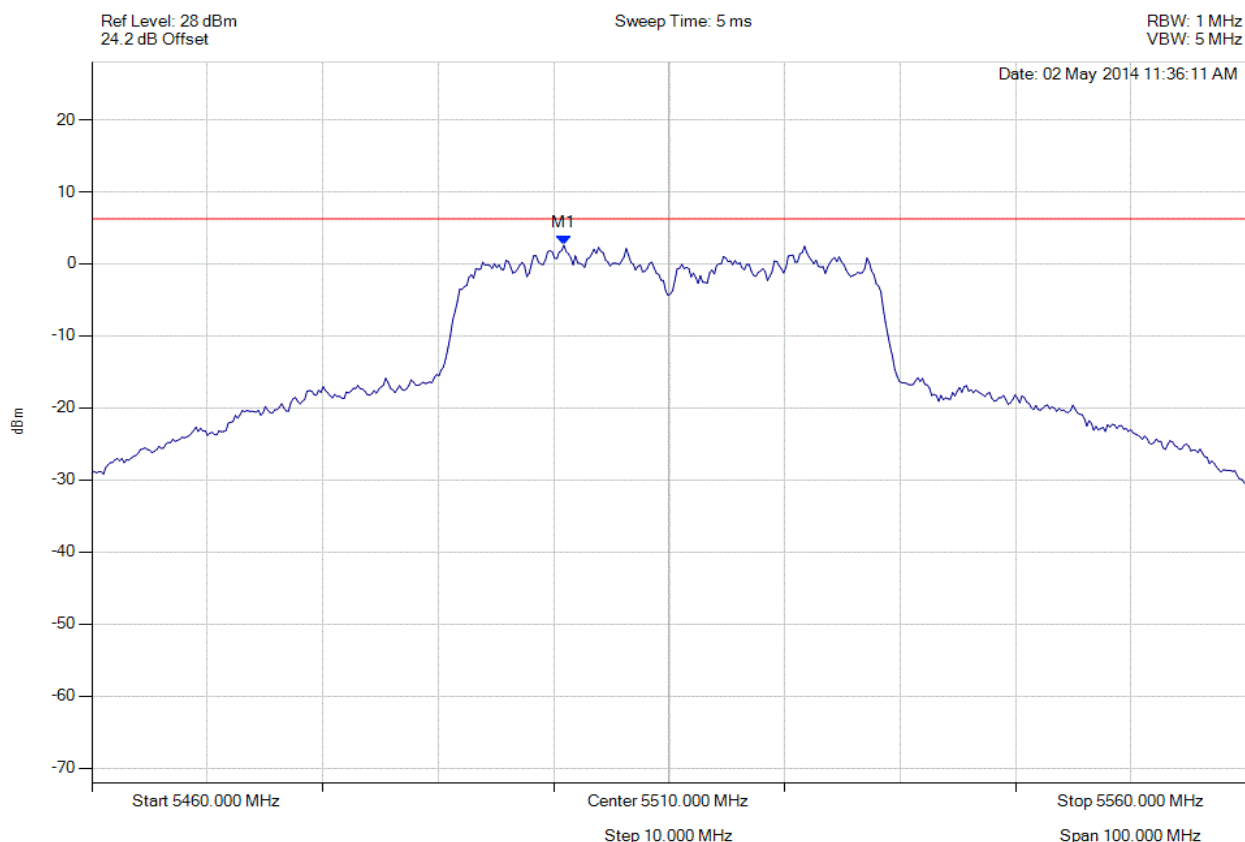

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5500.882 MHz : 2.584 dBm	Limit: ≤ 6.229 dBm Margin: -3.02 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 223 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5510.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

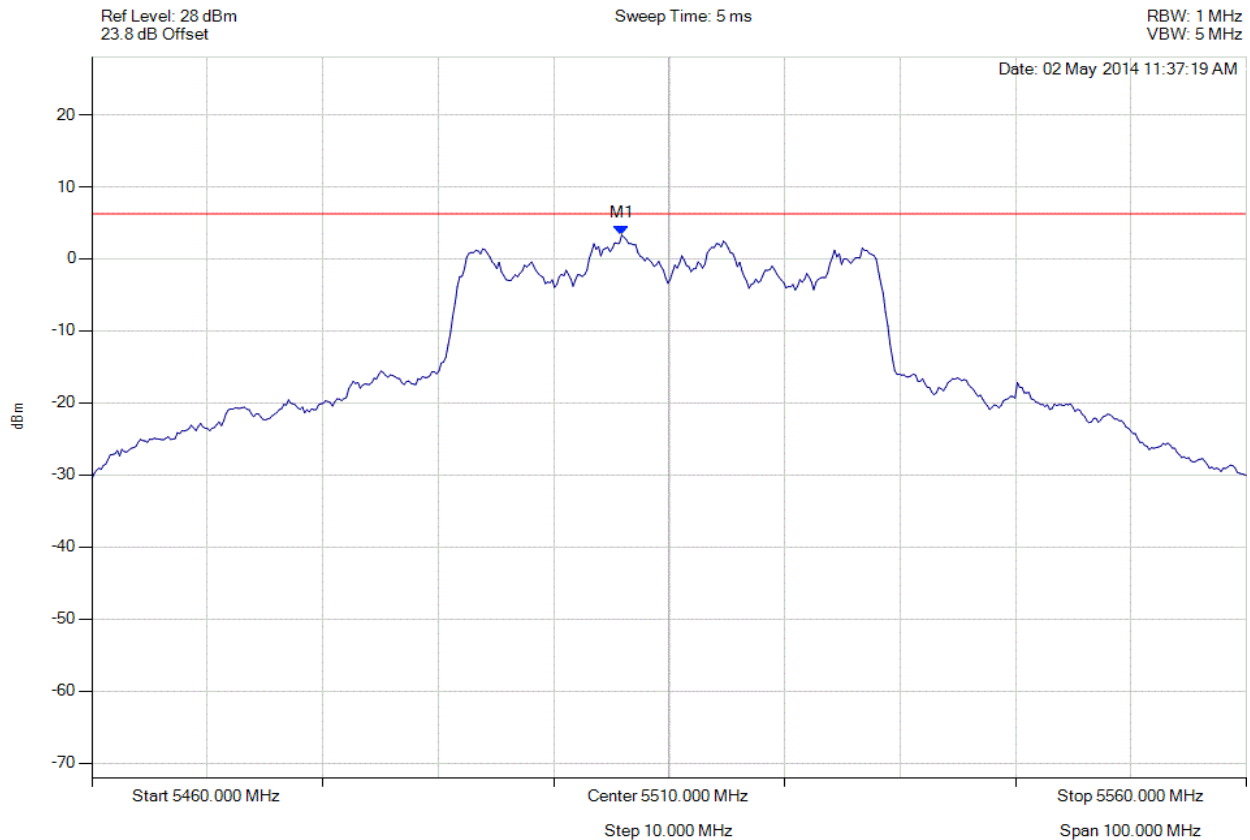

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5505.892 MHz : 3.308 dBm	Limit: ≤ 6.229 dBm Margin: -2.30 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 224 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5510.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

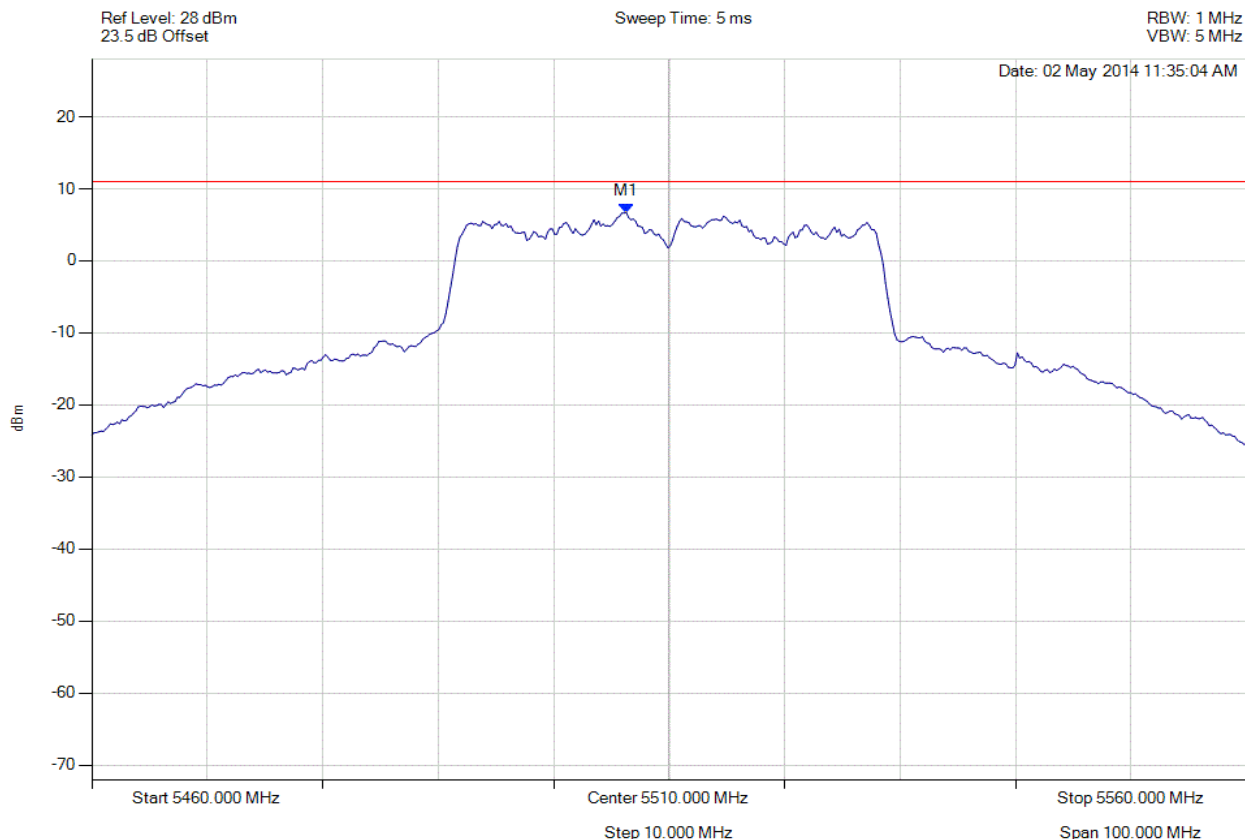

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5506.293 MHz : 6.675 dBm M1 + DCCF : 5506.293 MHz : 7.385 dBm Duty Cycle Correction Factor : +0.71 dB	Limit: ≤ 11.0 dBm Margin: -3.6 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 225 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

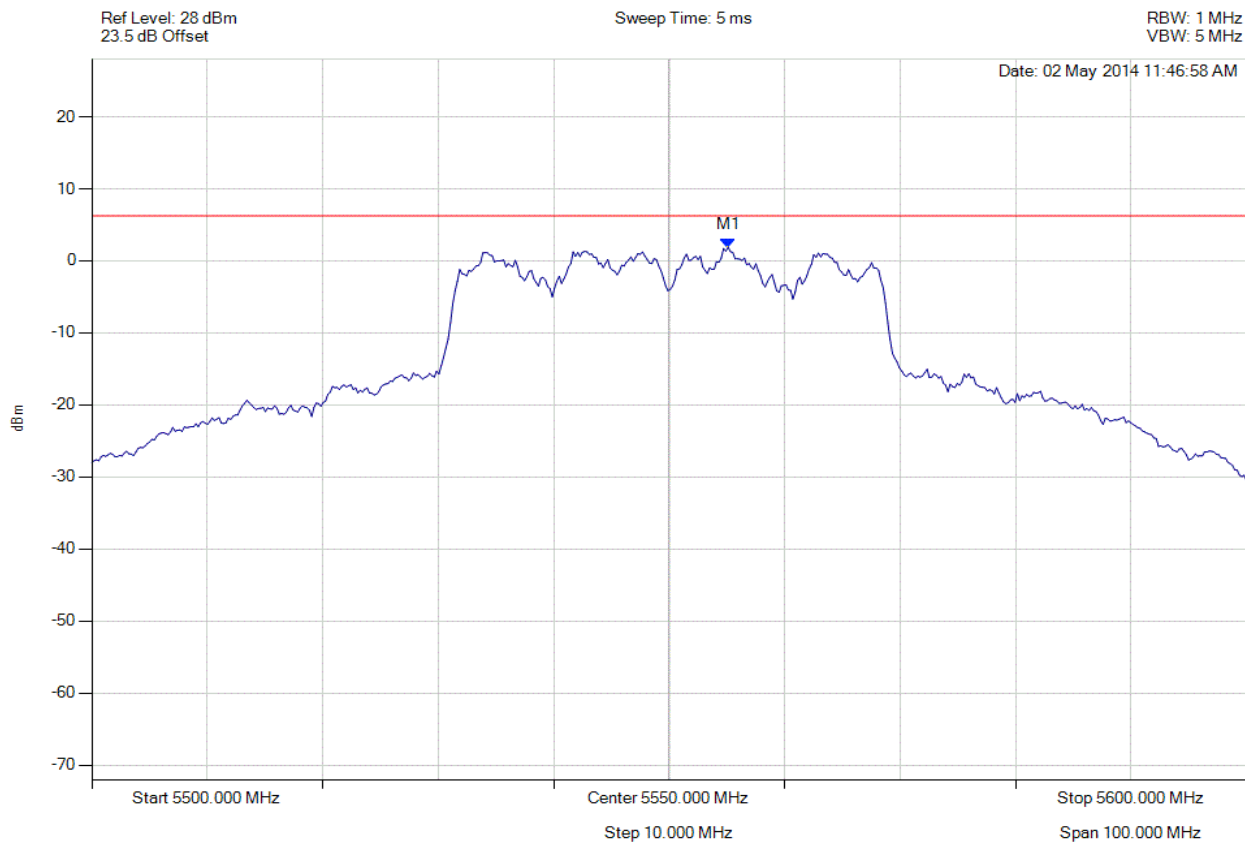

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5555.110 MHz : 1.888 dBm	Limit: ≤ 6.229 dBm Margin: -3.72 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 226 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

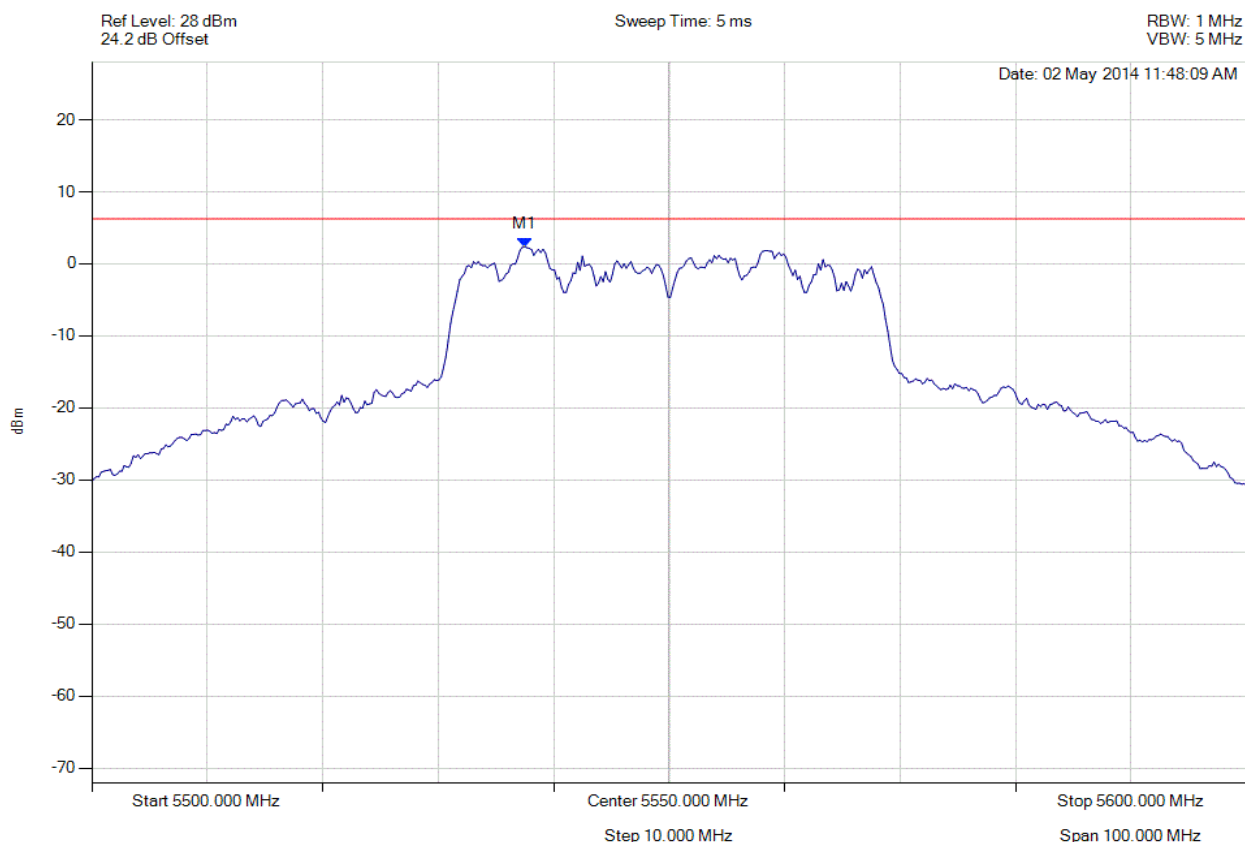

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5537.475 MHz : 2.386 dBm	Limit: ≤ 6.229 dBm Margin: -3.22 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 227 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5550.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

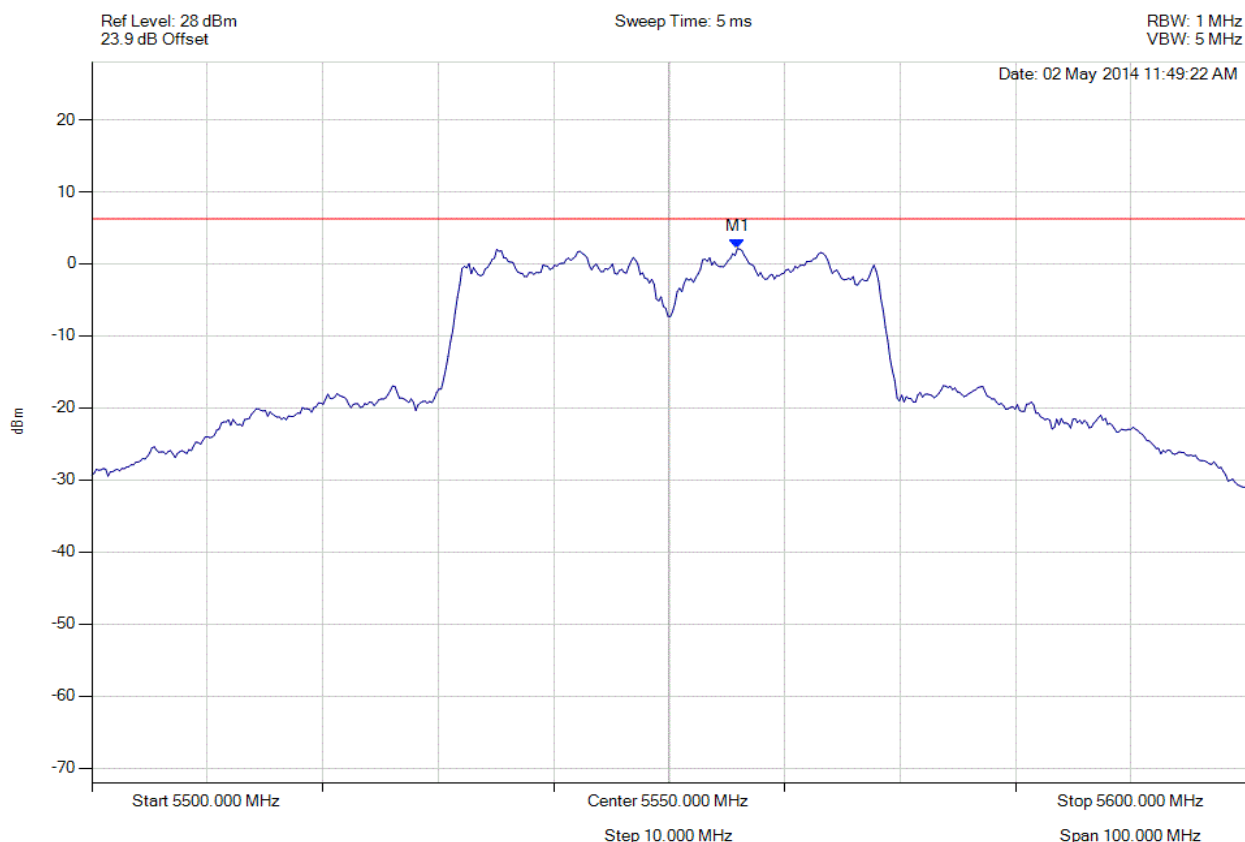

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5555.912 MHz : 2.116 dBm	Limit: ≤ 6.229 dBm Margin: -3.49 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 228 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5550.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

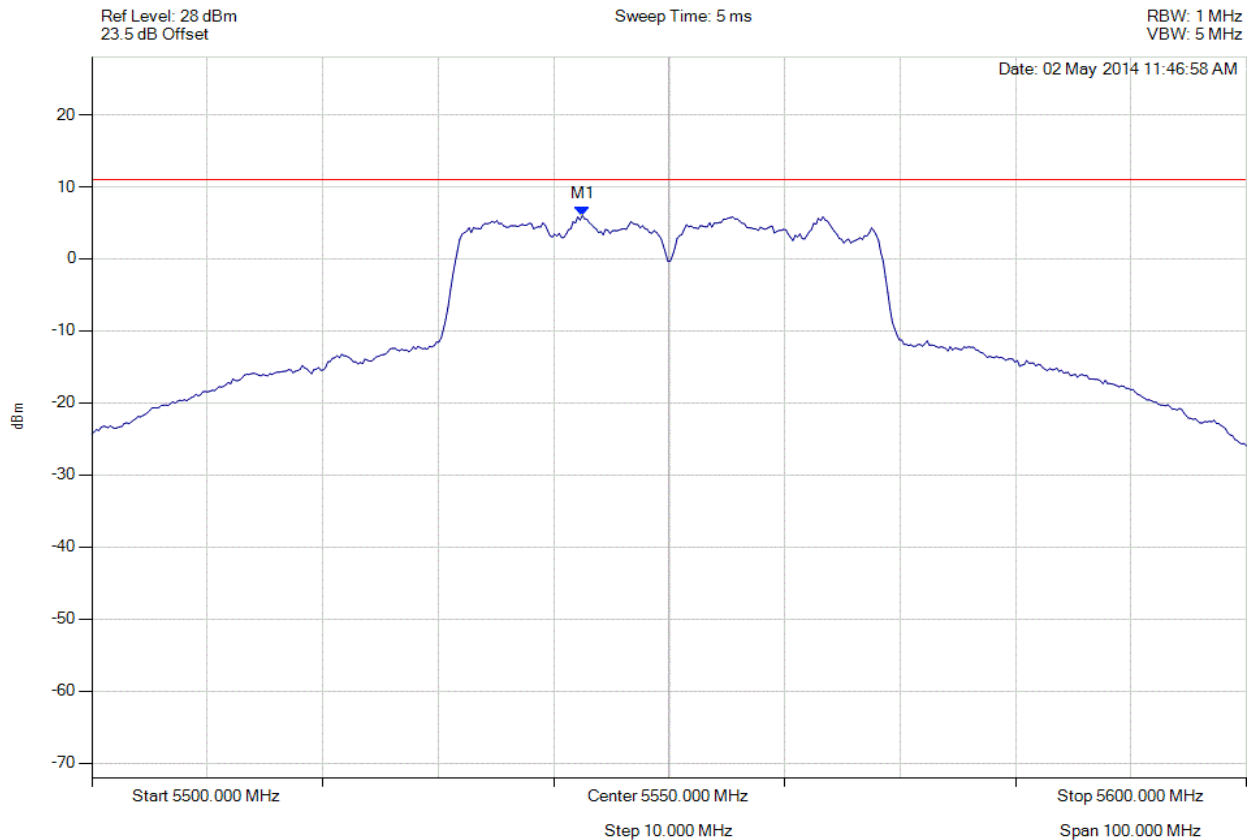

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5542.485 MHz : 6.002 dBm M1 + DCCF : 5542.485 MHz : 6.712 dBm Duty Cycle Correction Factor : +0.71 dB	Limit: ≤ 11.0 dBm Margin: -4.3 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 229 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

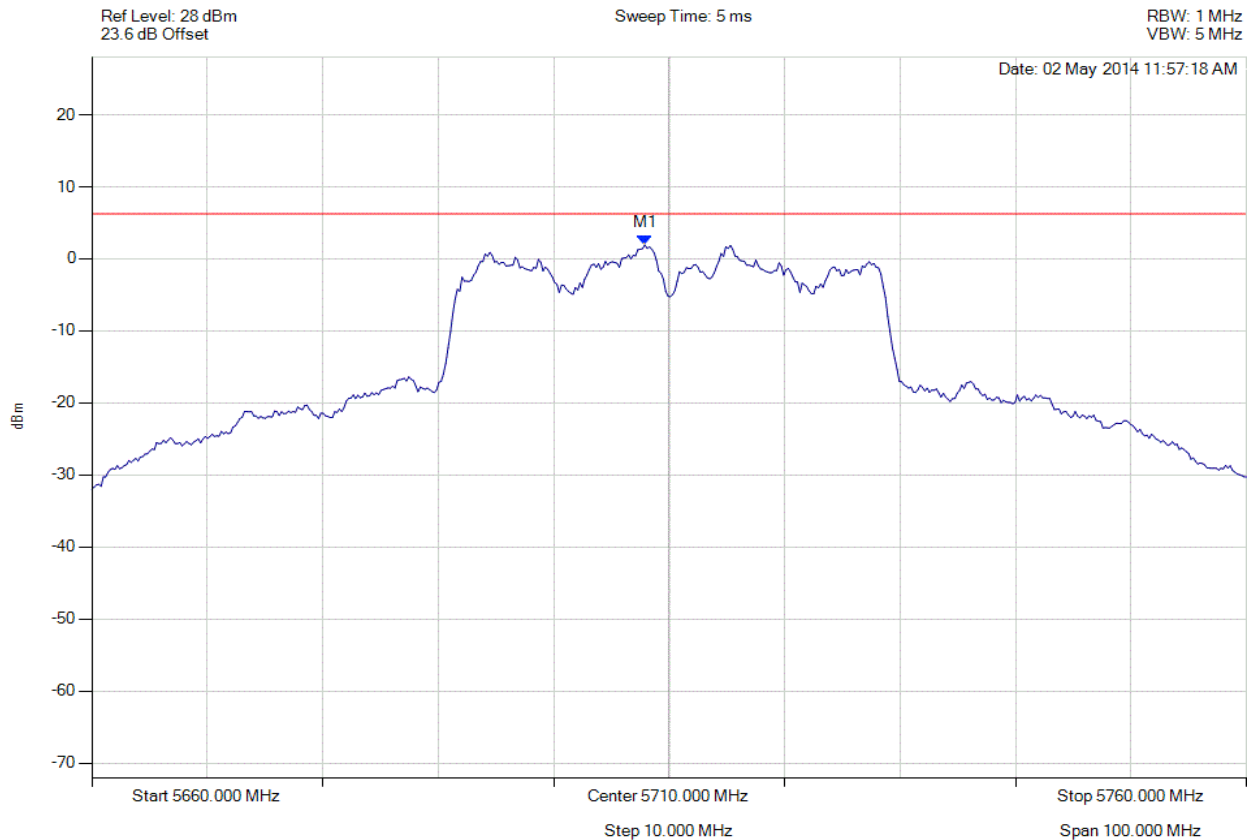

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5707.896 MHz : 1.935 dBm	Limit: ≤ 6.229 dBm Margin: -3.67 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 230 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

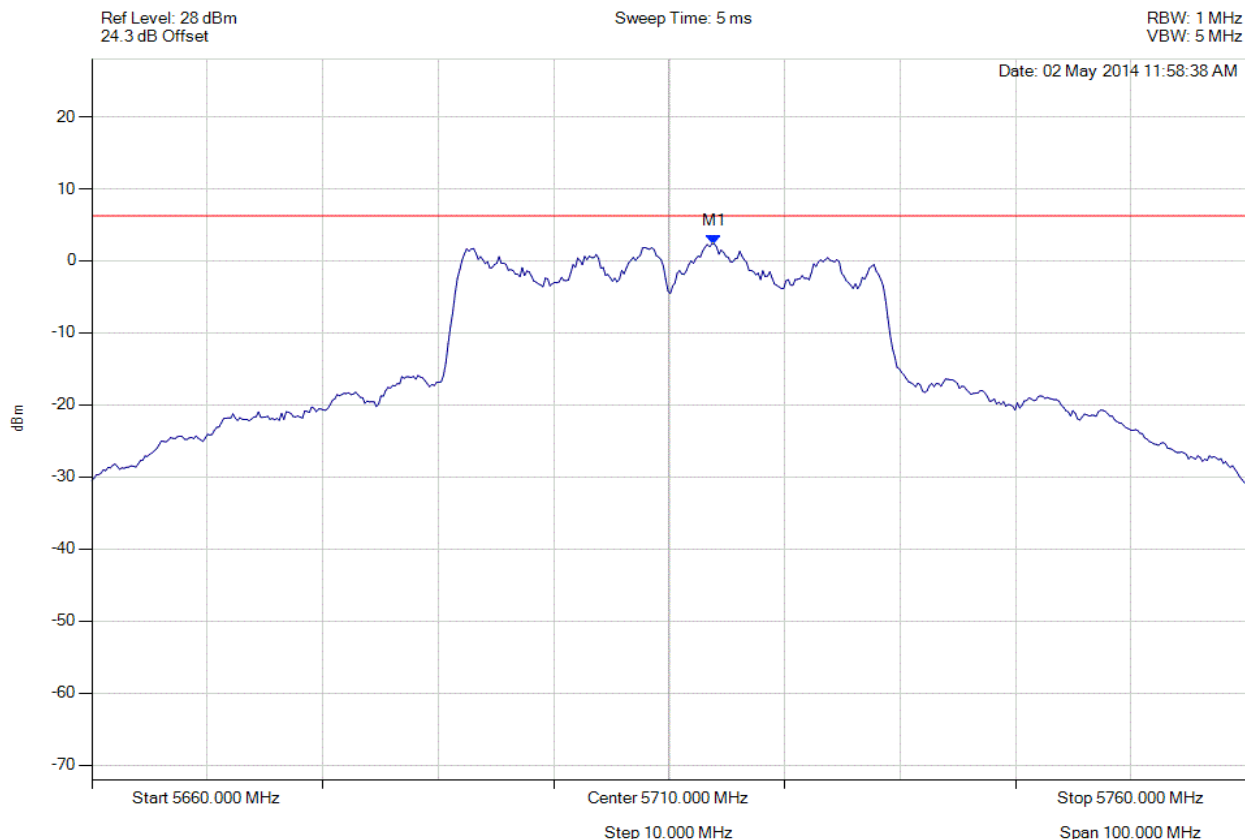

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5713.908 MHz : 2.378 dBm	Limit: ≤ 6.229 dBm Margin: -3.23 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 231 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5710.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

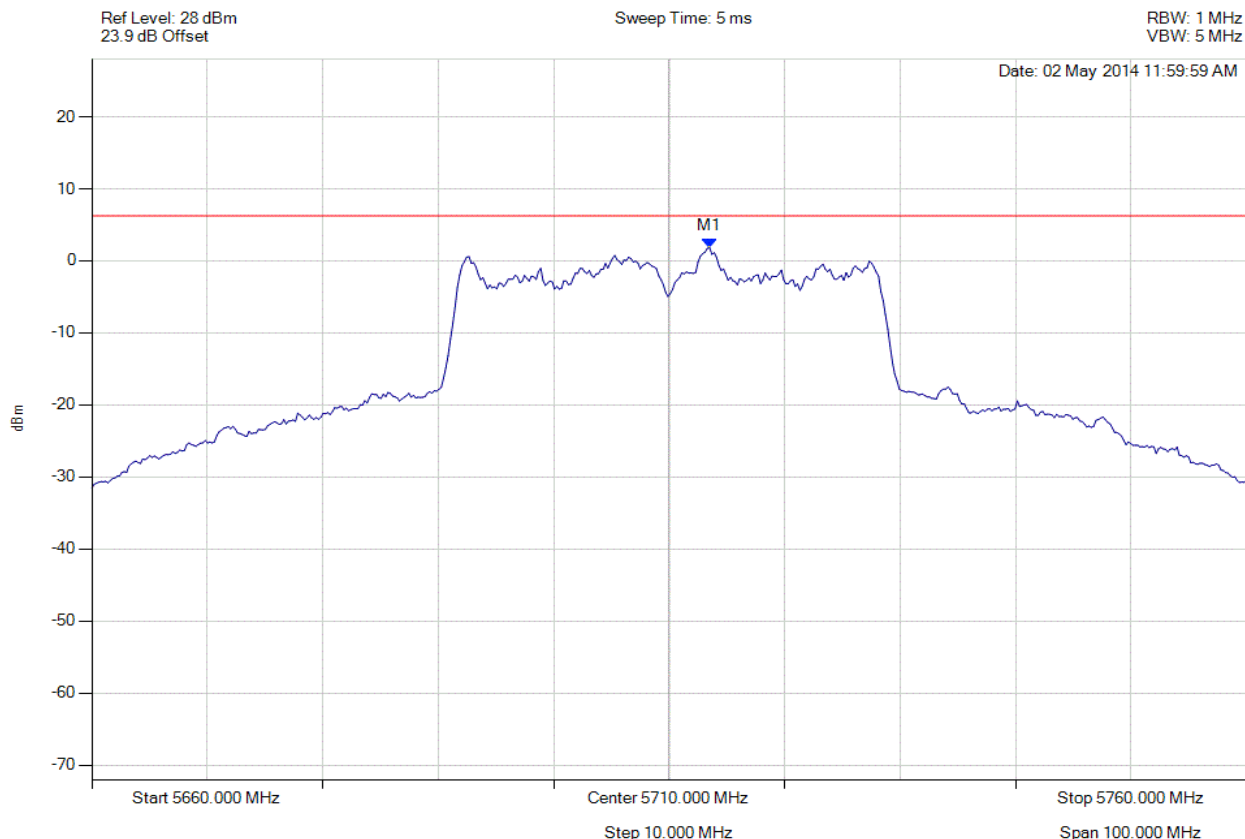

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5713.507 MHz : 1.814 dBm	Limit: ≤ 6.229 dBm Margin: -3.79 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 232 of 404



PEAK POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5710.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

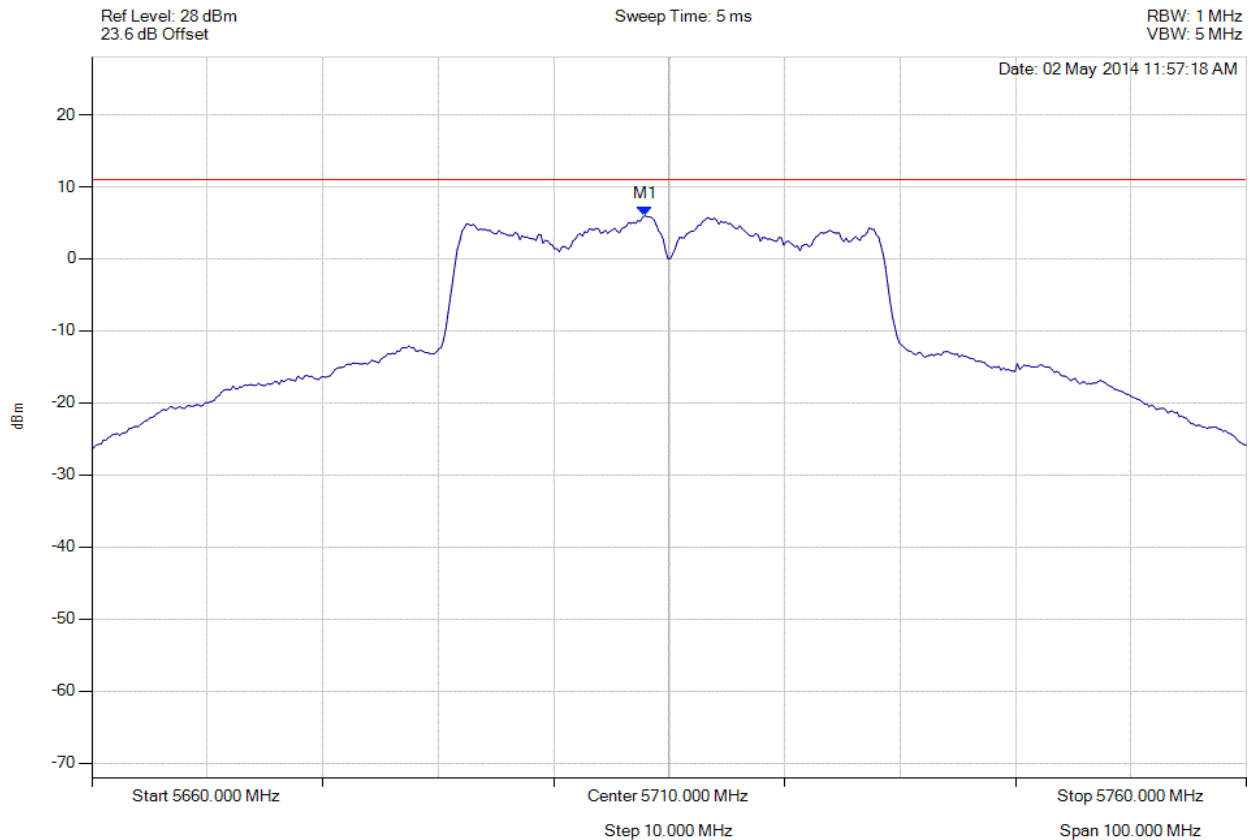

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5707.896 MHz : 6.004 dBm M1 + DCCF : 5707.896 MHz : 6.714 dBm Duty Cycle Correction Factor : +0.71 dB	Limit: ≤ 11.0 dBm Margin: -4.3 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 233 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5745.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

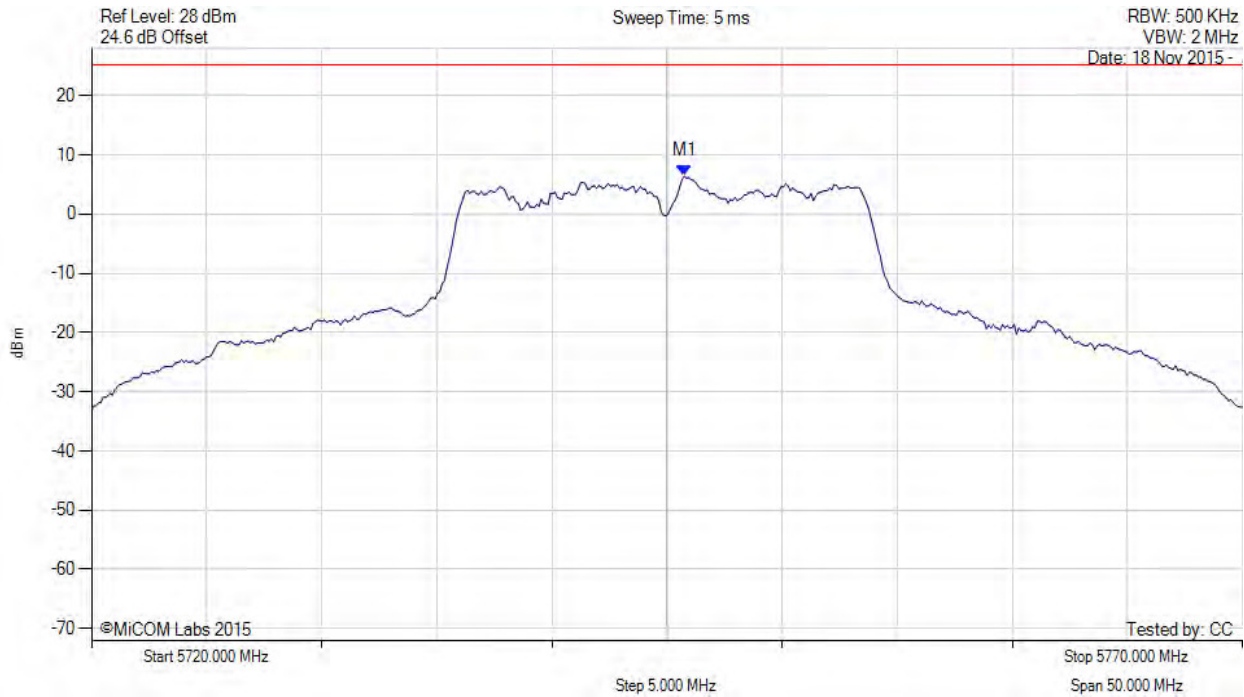

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5745.752 MHz : 6.409 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 234 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5745.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

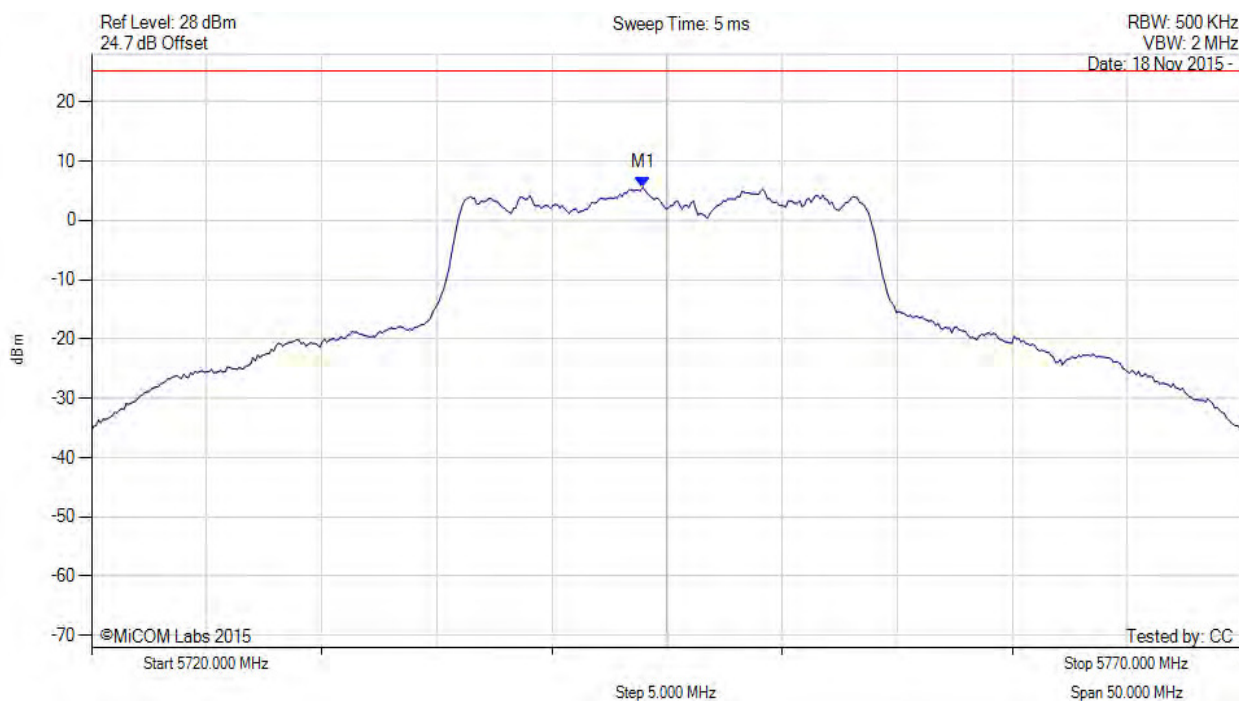

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5743.948 MHz : 5.565 dBm	Limit: ≤ 25.230 dBm


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5745.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

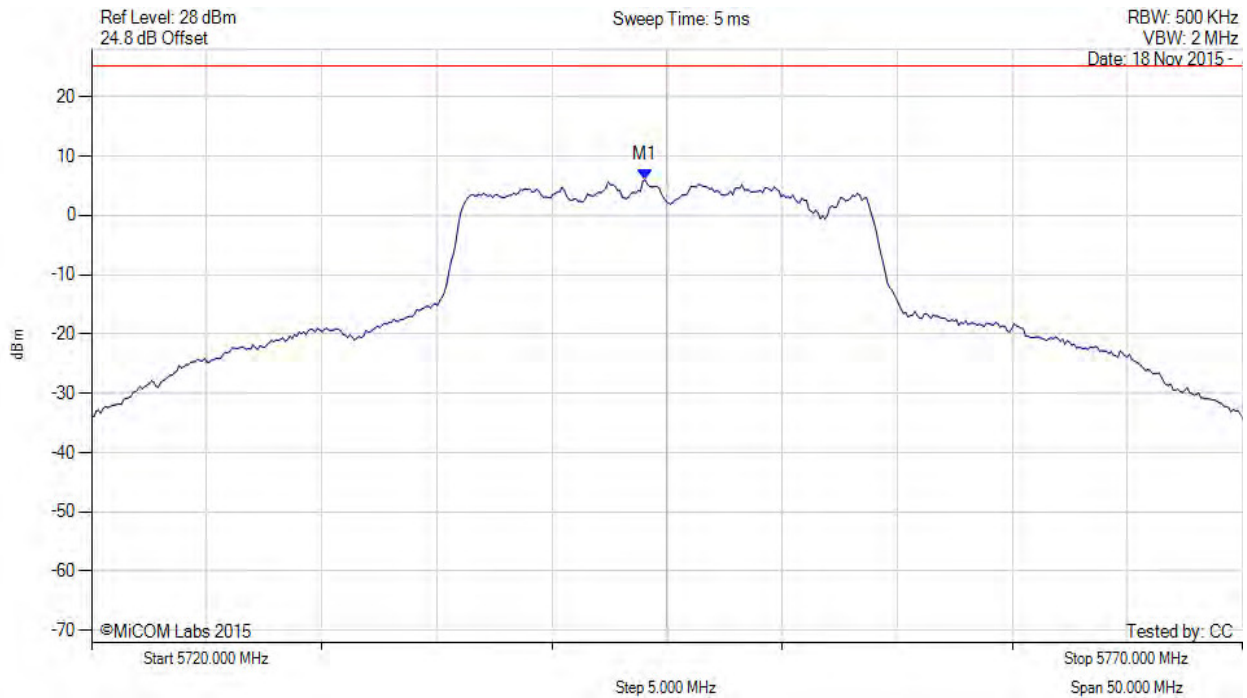

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5744.048 MHz : 5.978 dBm	Limit: ≤ 25.230 dBm


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5745.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

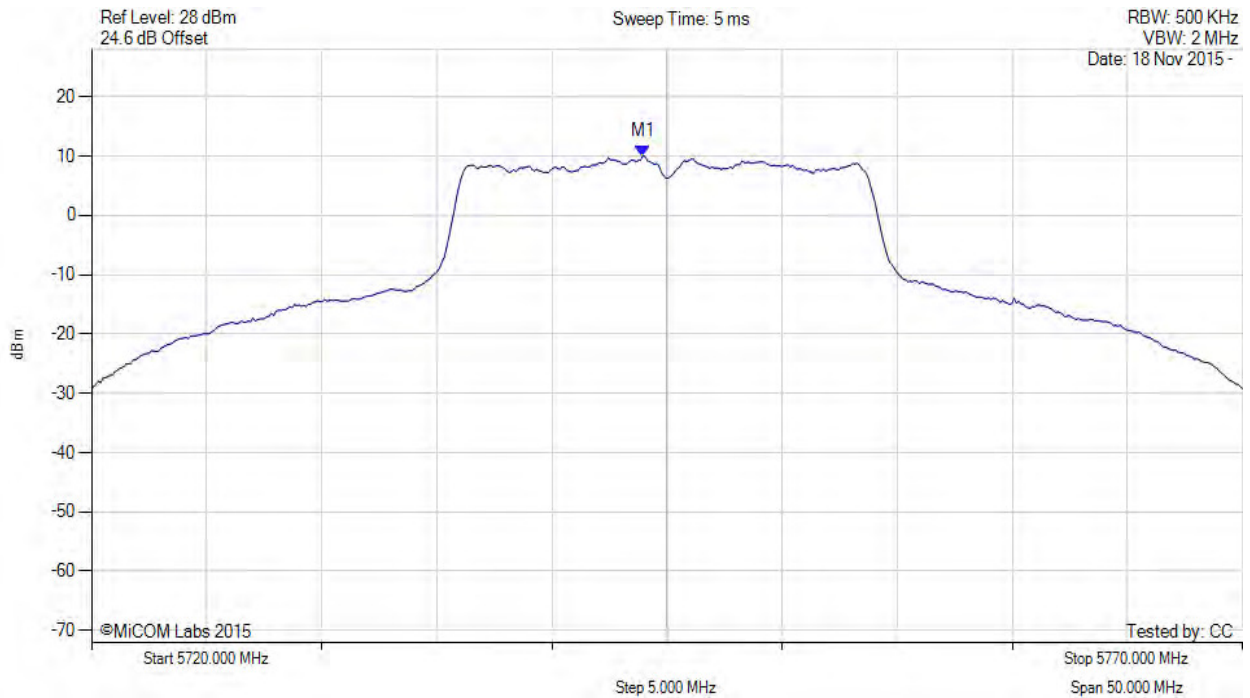

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5743.900 MHz : 10.008 dBm M1 + DCCF : 5743.900 MHz : 10.277 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 30.0 dBm Margin: -19.7 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 237 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5785.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

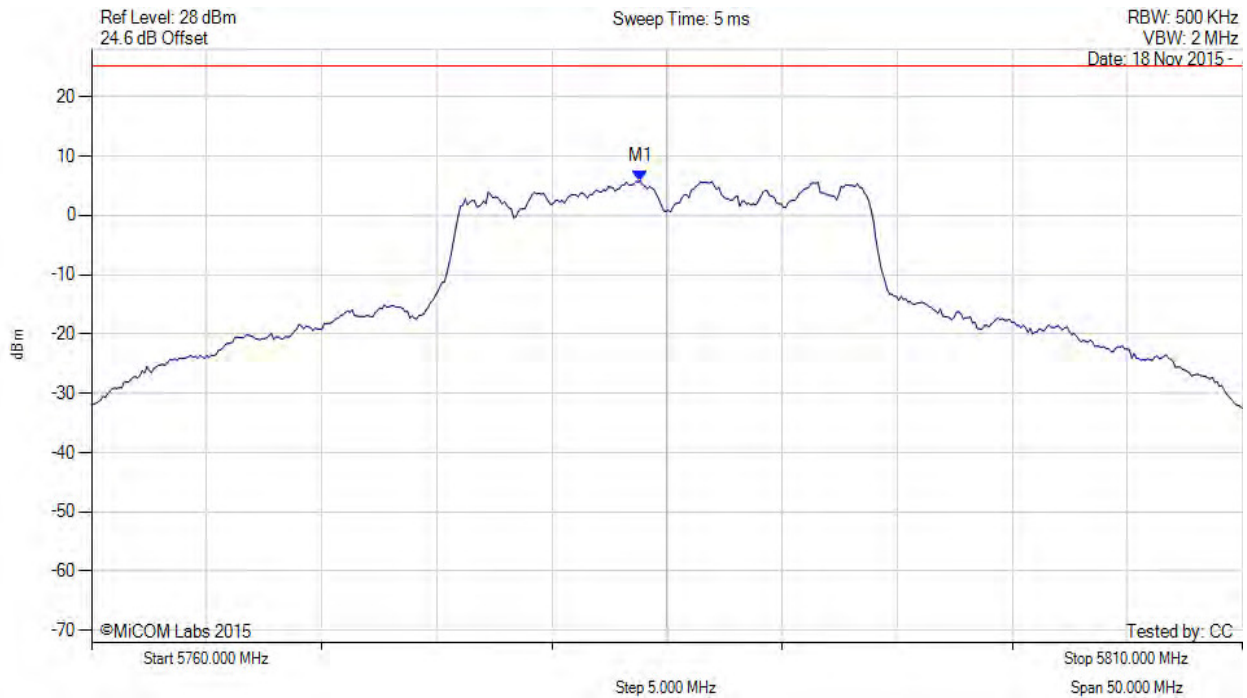

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5783.848 MHz : 5.804 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 238 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5785.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

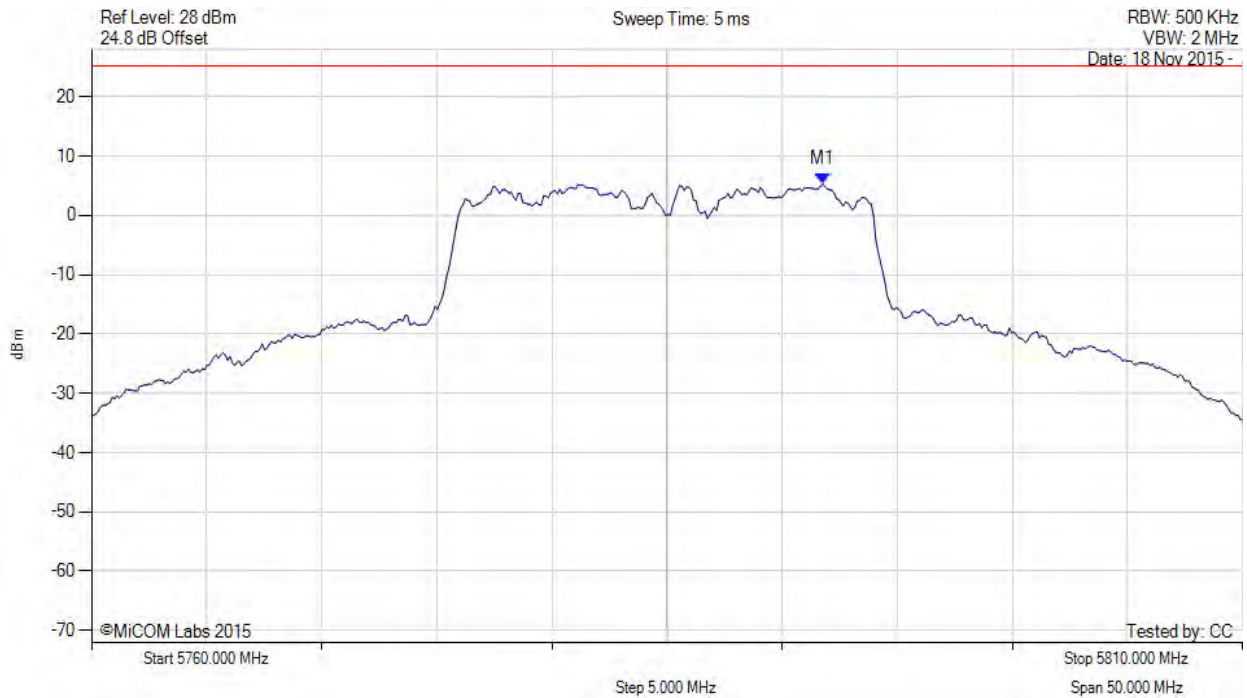

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5791.764 MHz : 5.340 dBm	Channel Frequency: 5785.00 MHz

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 239 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5785.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

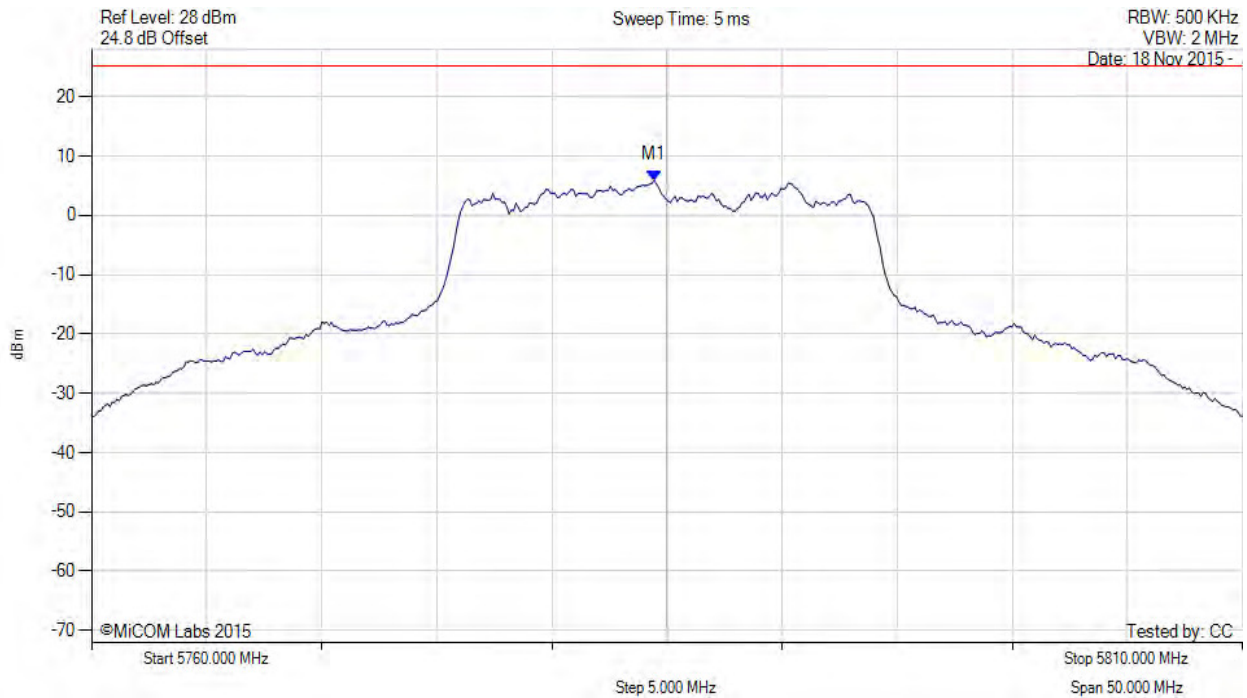

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5784.449 MHz : 5.895 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 240 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5785.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

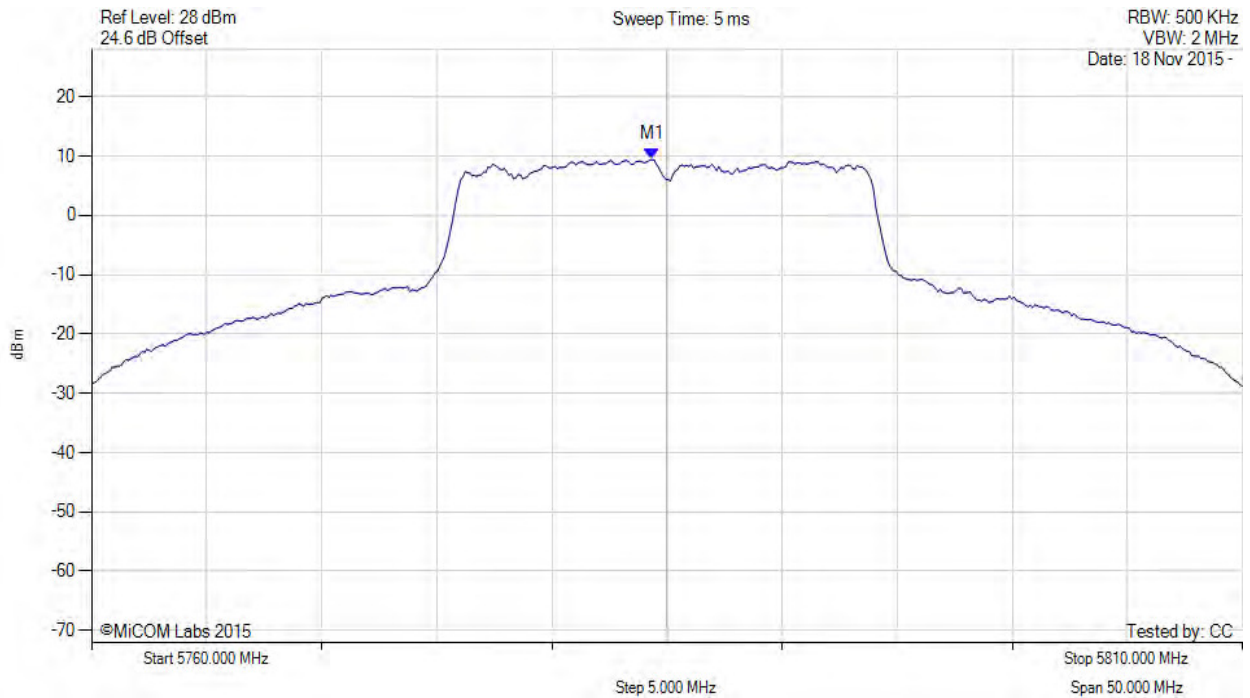

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5784.300 MHz : 9.419 dBm M1 + DCCF : 5784.300 MHz : 9.688 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 30.0 dBm Margin: -20.3 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 241 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5825.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

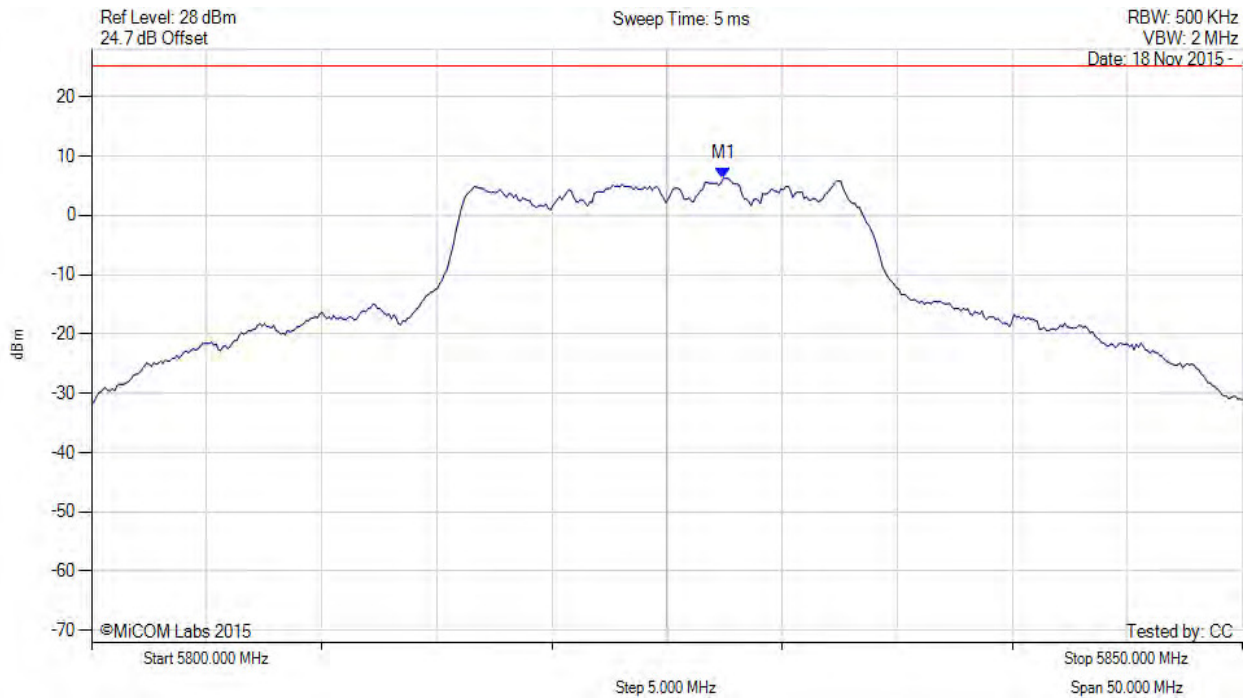

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5827.455 MHz : 6.258 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 242 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5825.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

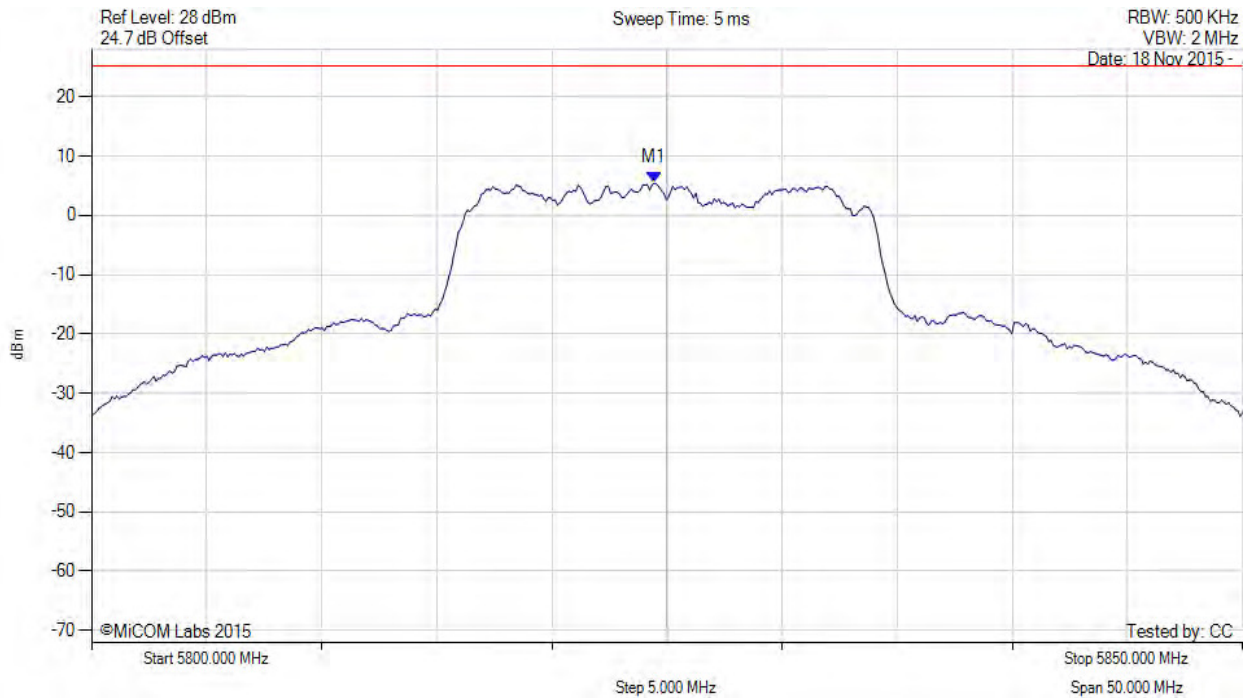

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5824.449 MHz : 5.460 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 243 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5825.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

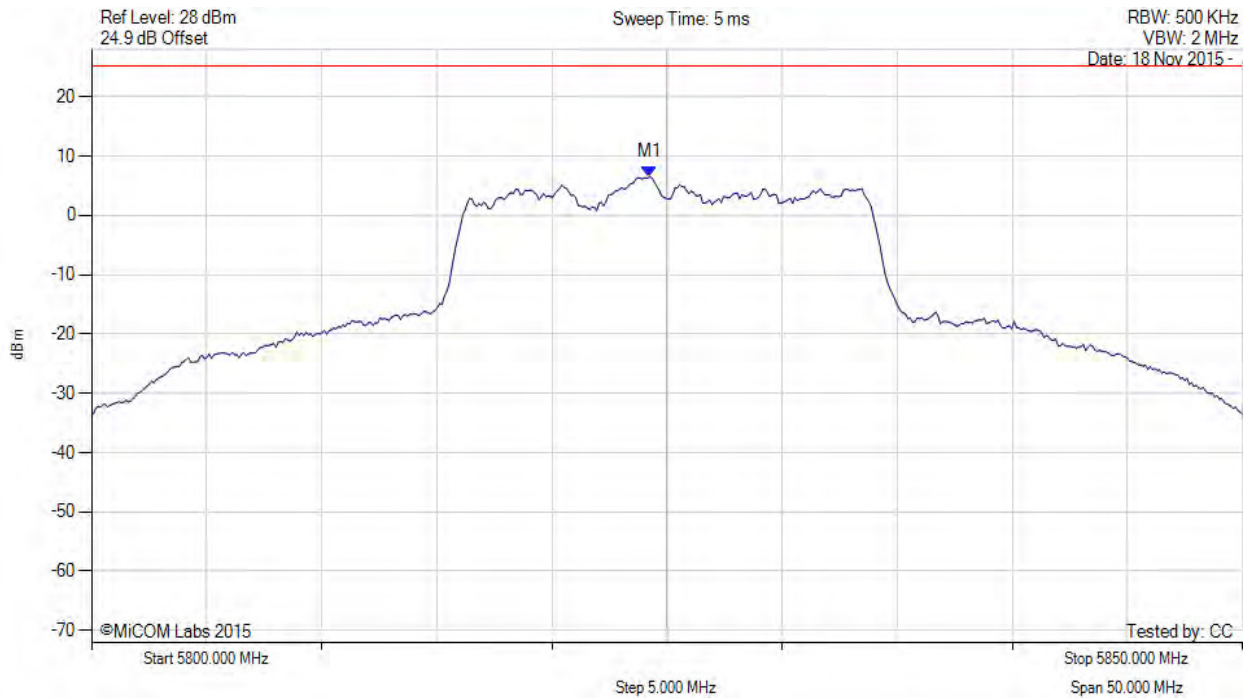

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5824.248 MHz : 6.468 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 244 of 404



POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5825.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

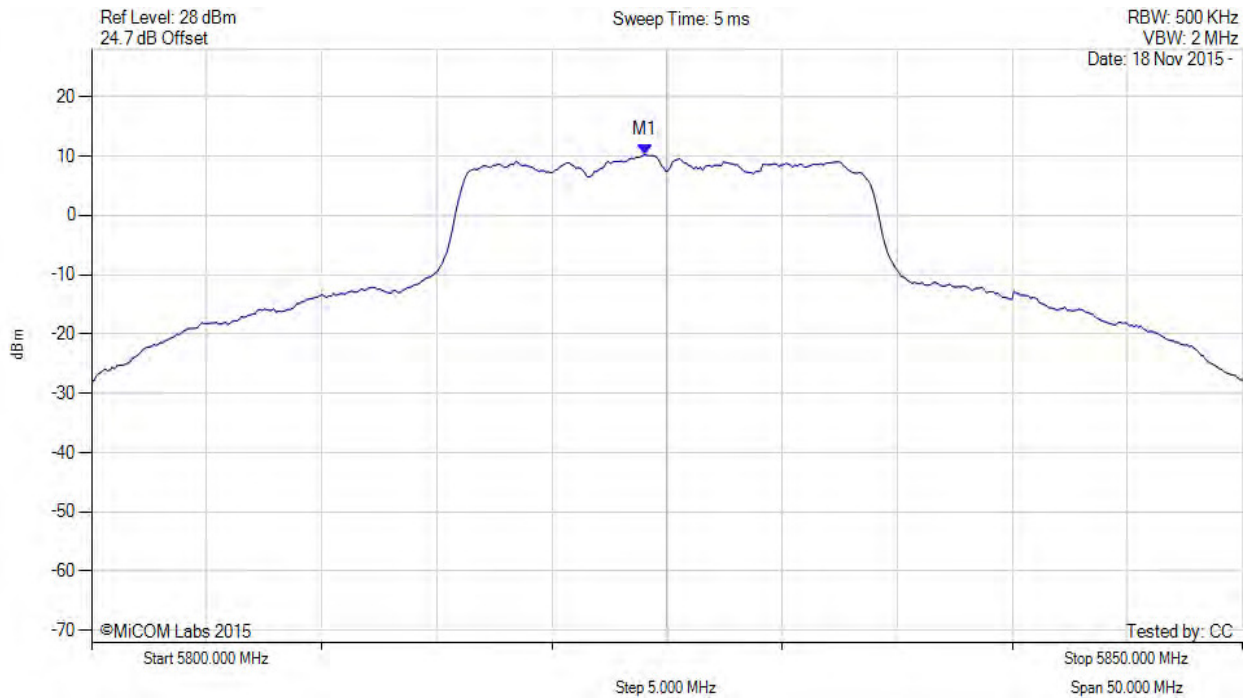

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5824.000 MHz : 10.258 dBm M1 + DCCF : 5824.000 MHz : 10.527 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 30.0 dBm Margin: -19.4 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 245 of 404



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

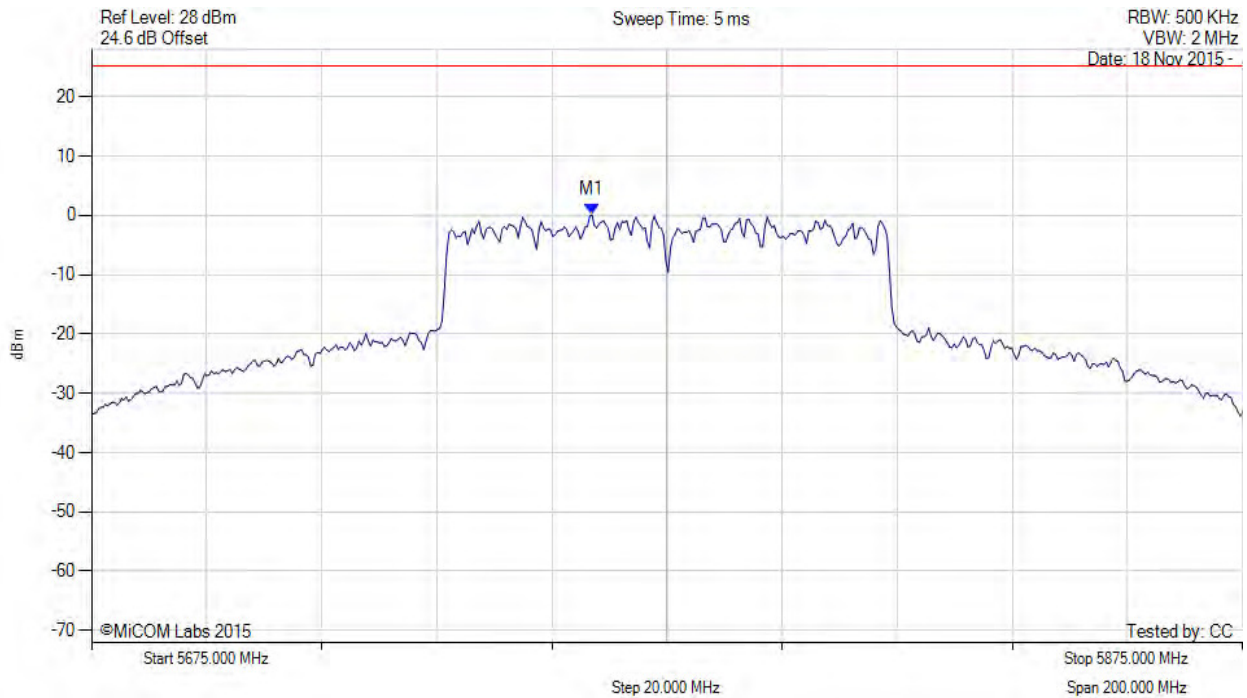

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5761.974 MHz : 0.097 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 246 of 404

POWER SPECTRAL DENSITY



Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

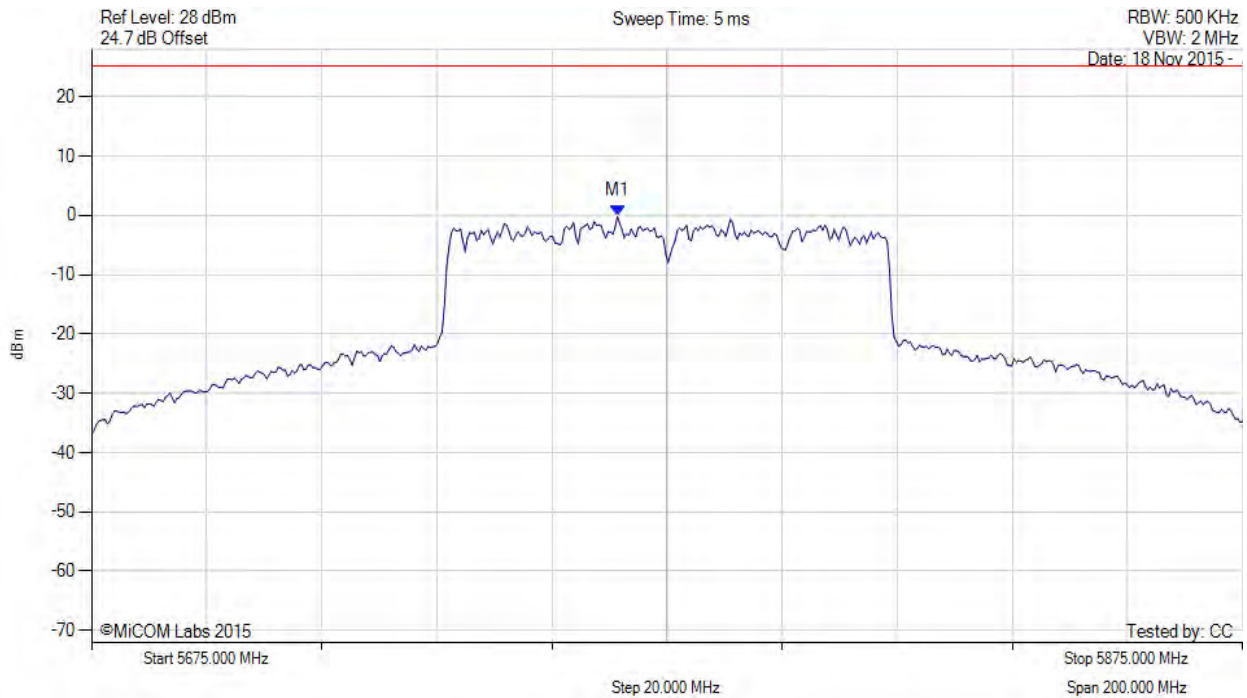

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5766.383 MHz : -0.166 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 247 of 404



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5775.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

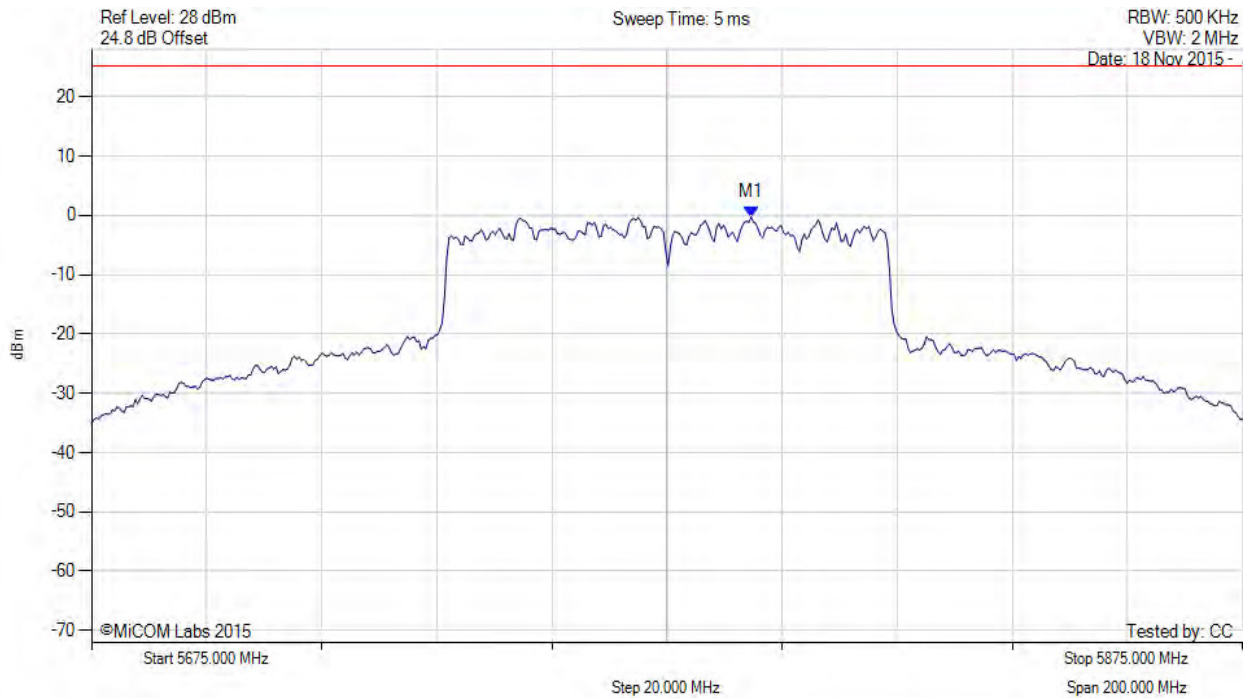

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5789.629 MHz : -0.274 dBm	Limit: $\leq$ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 248 of 404



POWER SPECTRAL DENSITY

Variant: 802.11ac-80, Channel: 5775.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

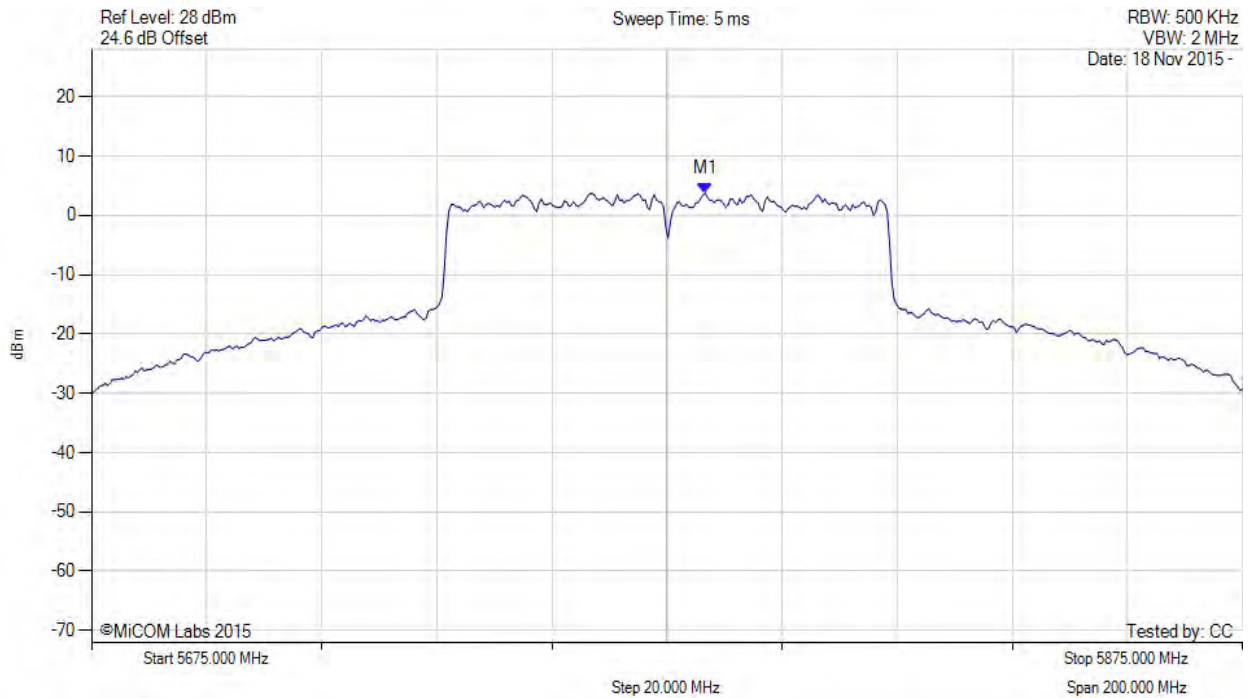

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5781.600 MHz : 3.734 dBm M1 + DCCF : 5781.600 MHz : 4.440 dBm Duty Cycle Correction Factor : +0.71 dB	Limit: ≤ 30.0 dBm Margin: -25.5 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 249 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

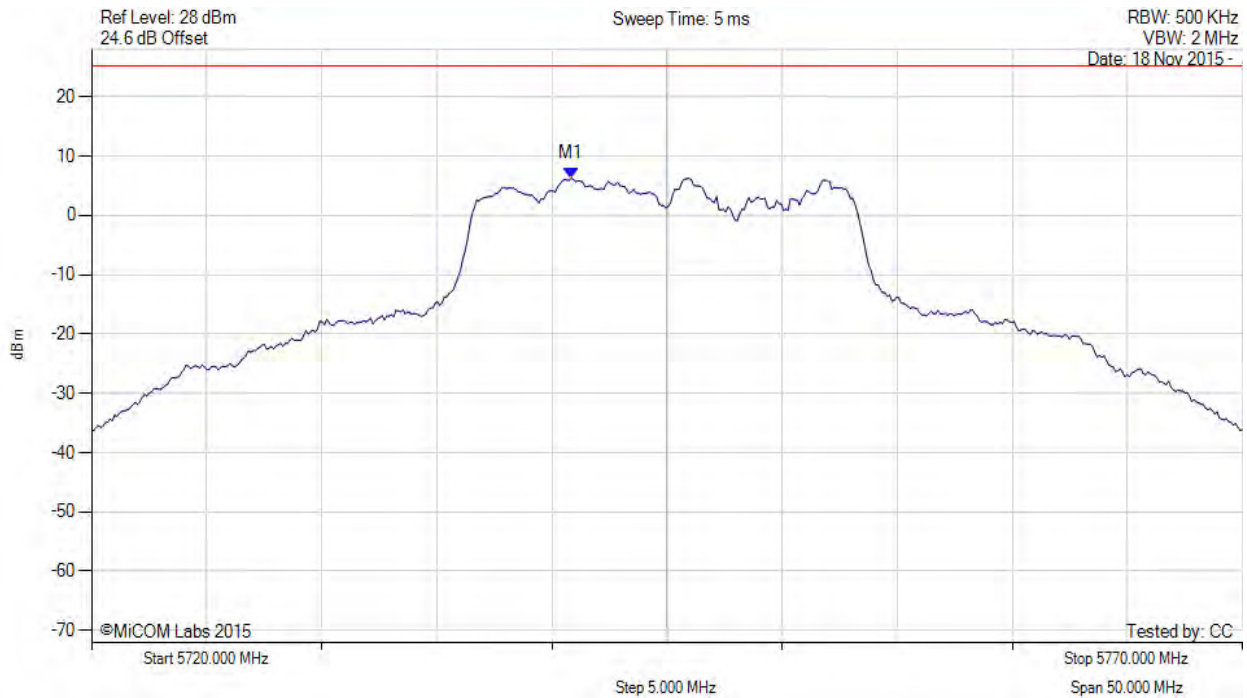

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5740.842 MHz : 6.250 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 250 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

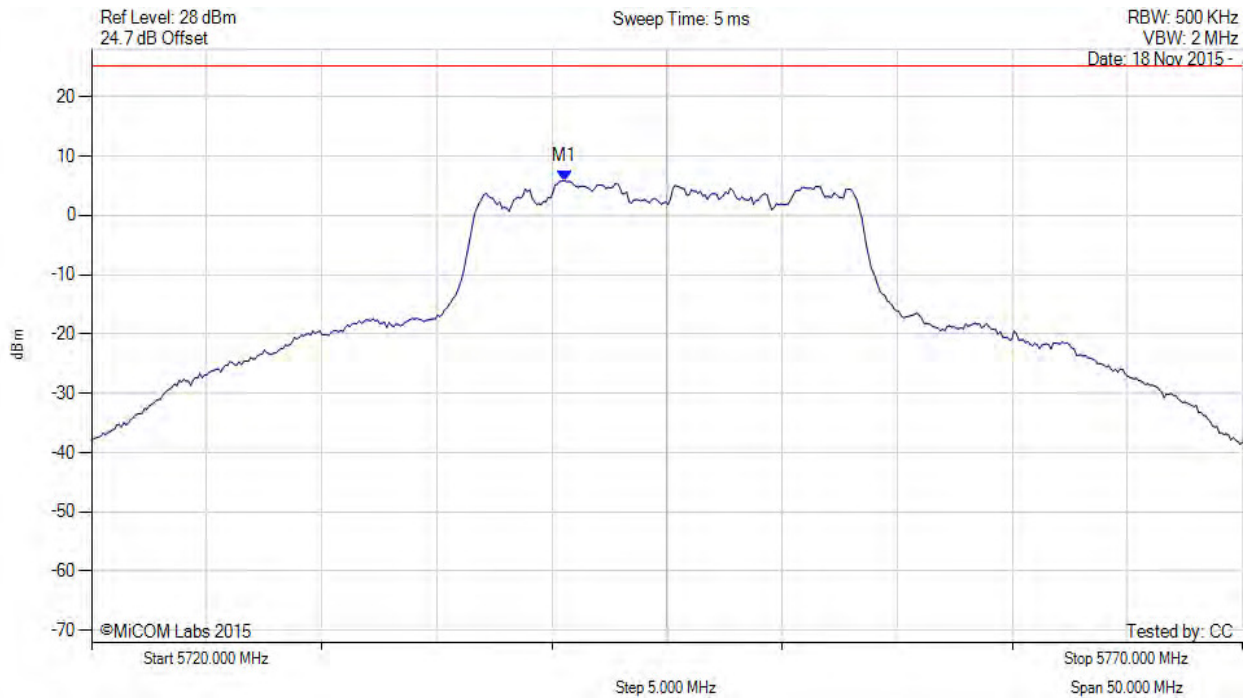

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5740.541 MHz : 5.865 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 251 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5745.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

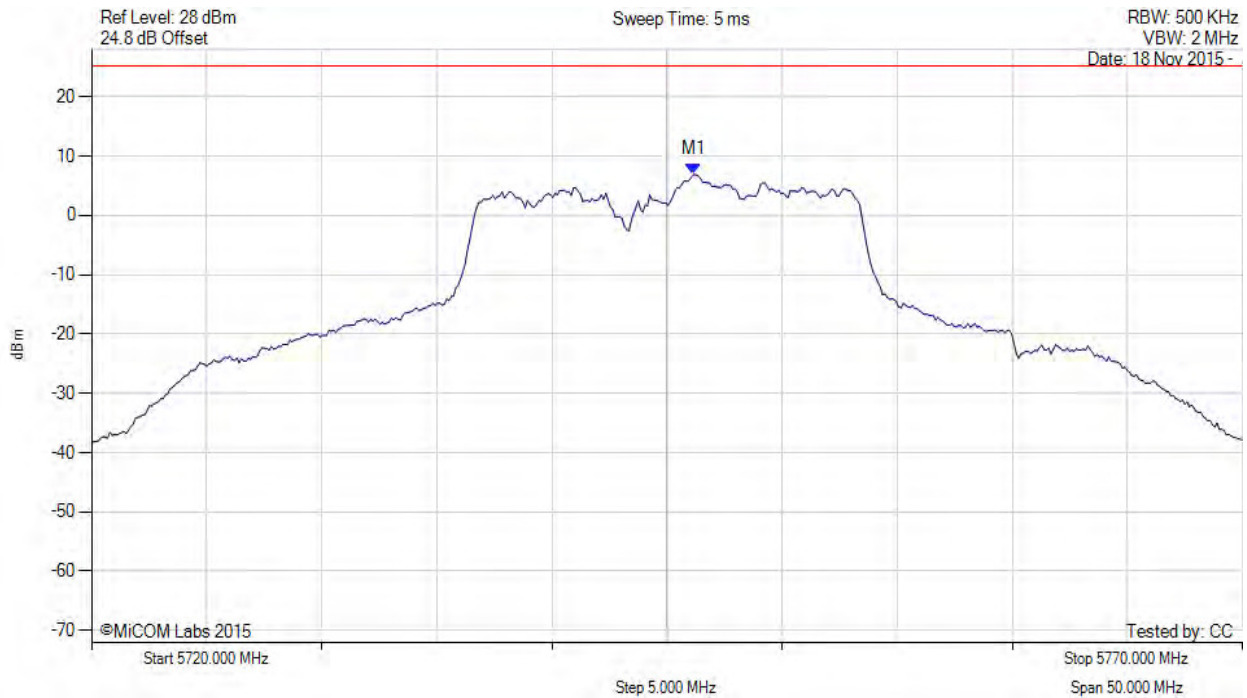

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5746.152 MHz : 6.873 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 252 of 404



POWER SPECTRAL DENSITY


Variant: 802.11n HT-20, Channel: 5745.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

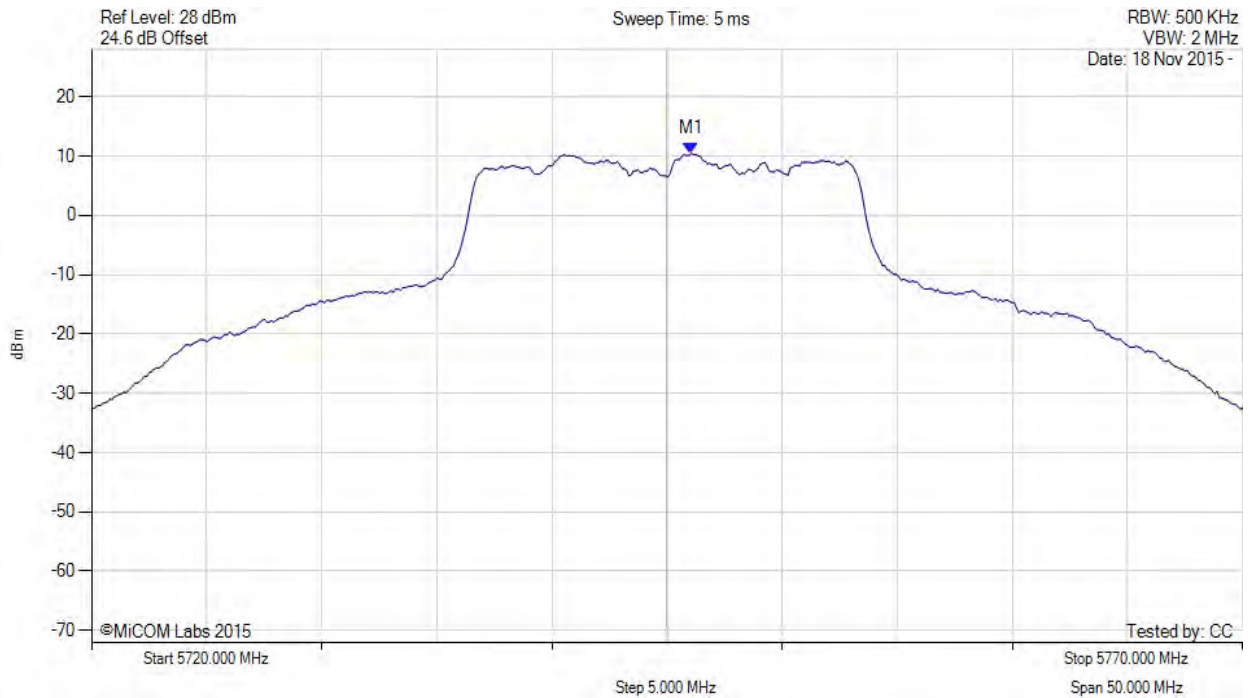

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5746.100 MHz : 10.452 dBm M1 + DCCF : 5746.100 MHz : 10.721 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 30.0 dBm Margin: -19.3 dB


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

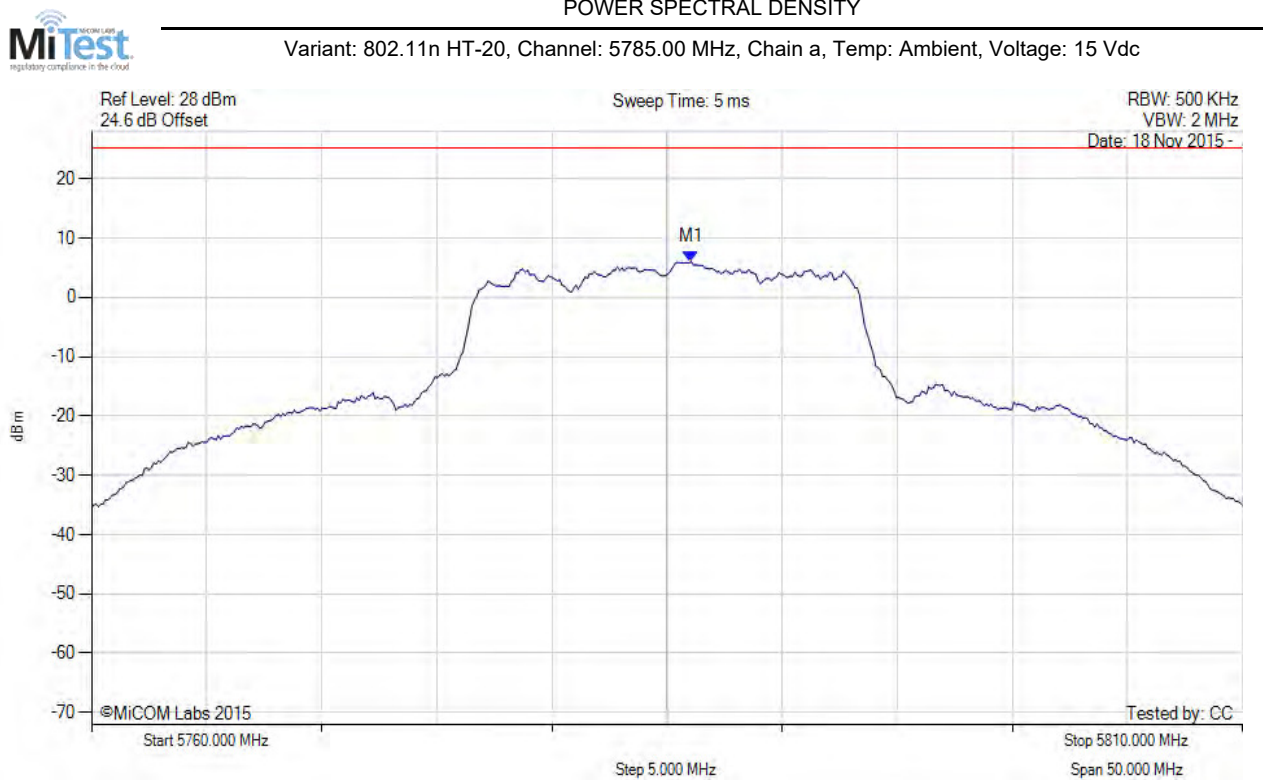

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5786.052 MHz : 6.004 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

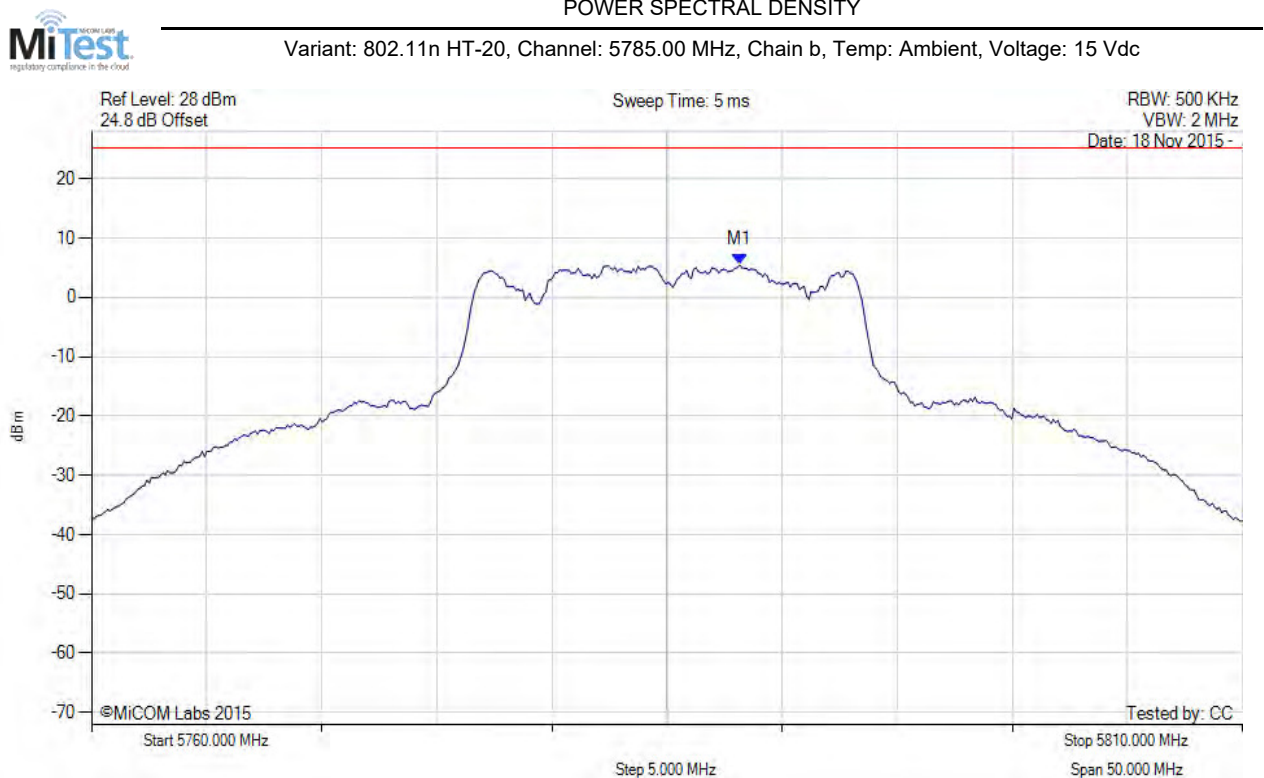

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5788.156 MHz : 5.466 dBm	Channel Frequency: 5785.00 MHz

[back to matrix](#)




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 255 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5785.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

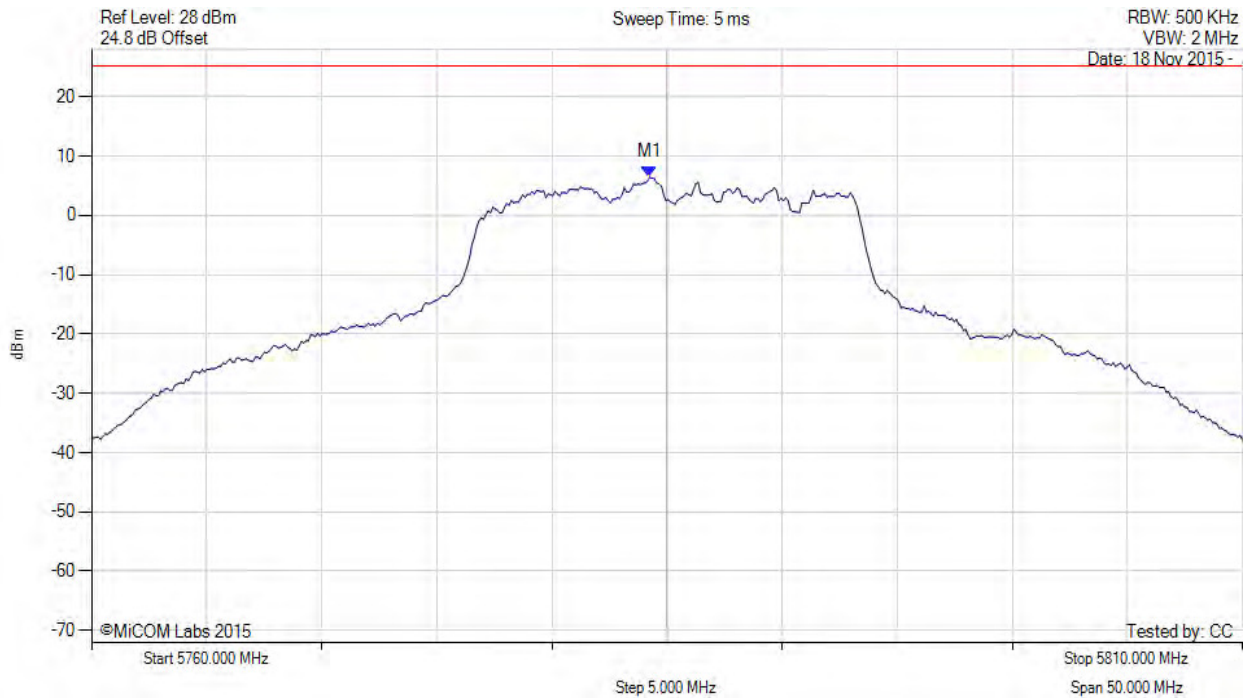

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5784.248 MHz : 6.426 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 256 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5785.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

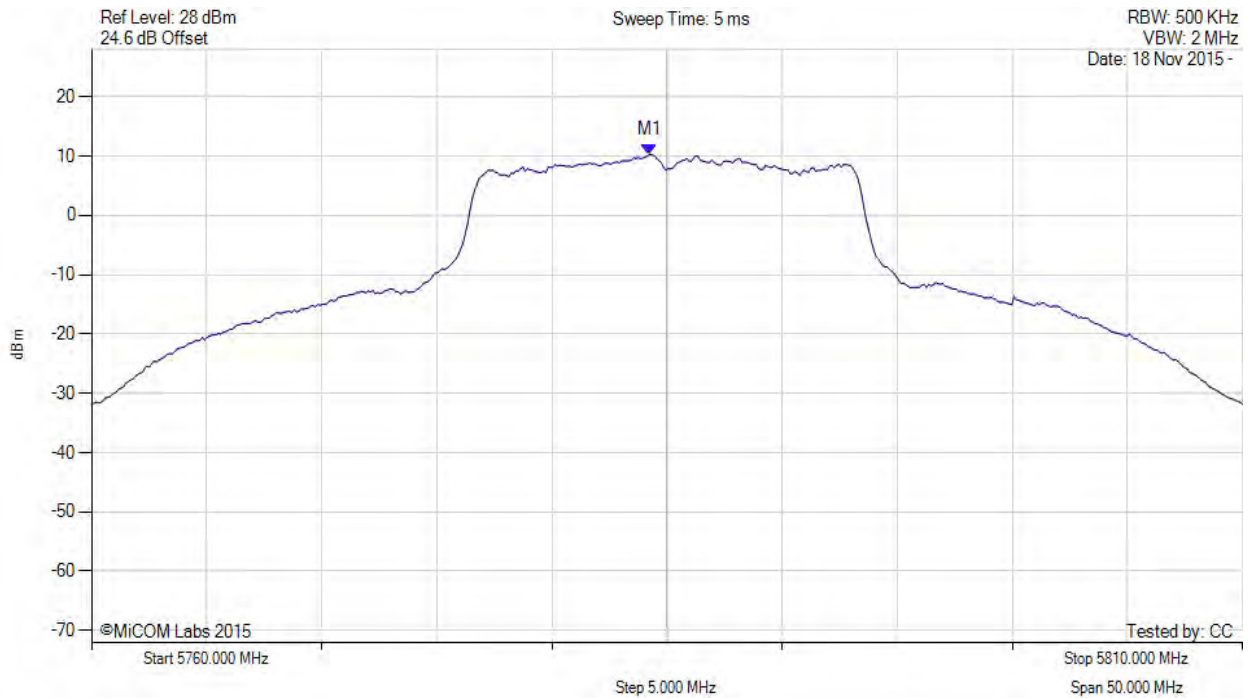

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5784.200 MHz : 10.268 dBm M1 + DCCF : 5784.200 MHz : 10.537 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 30.0 dBm Margin: -19.4 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 257 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

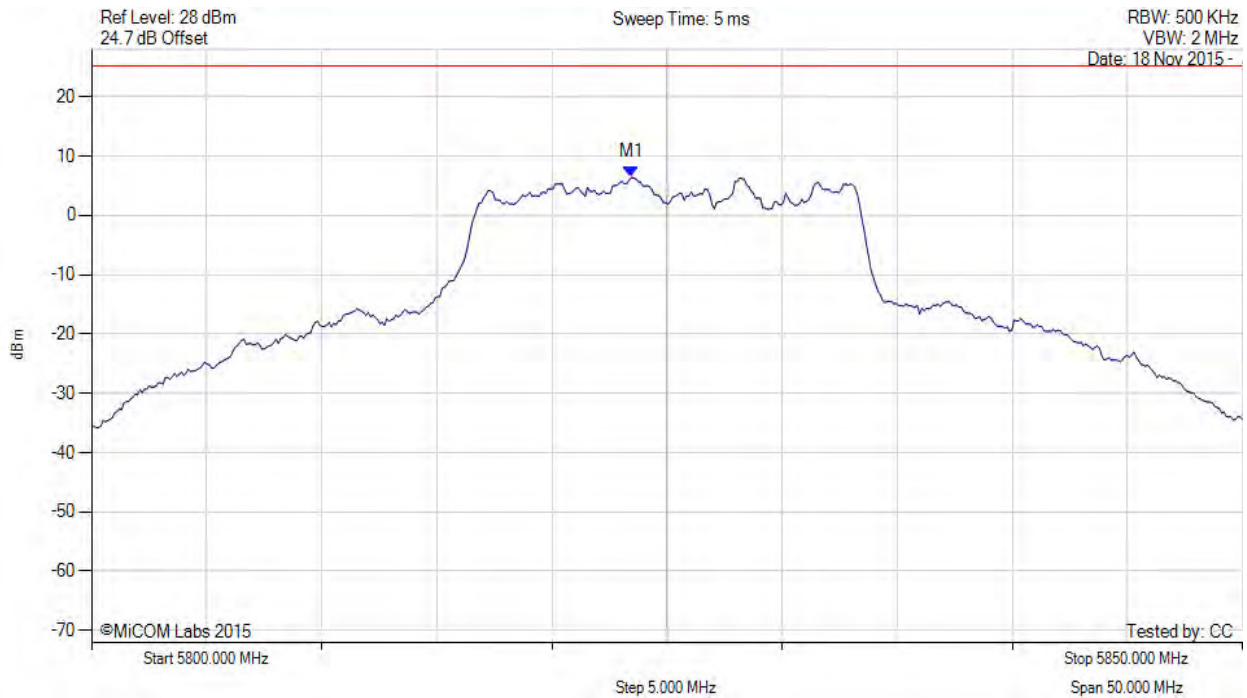

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5823.447 MHz : 6.379 dBm	Limit: ≤ 25.230 dBm


[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

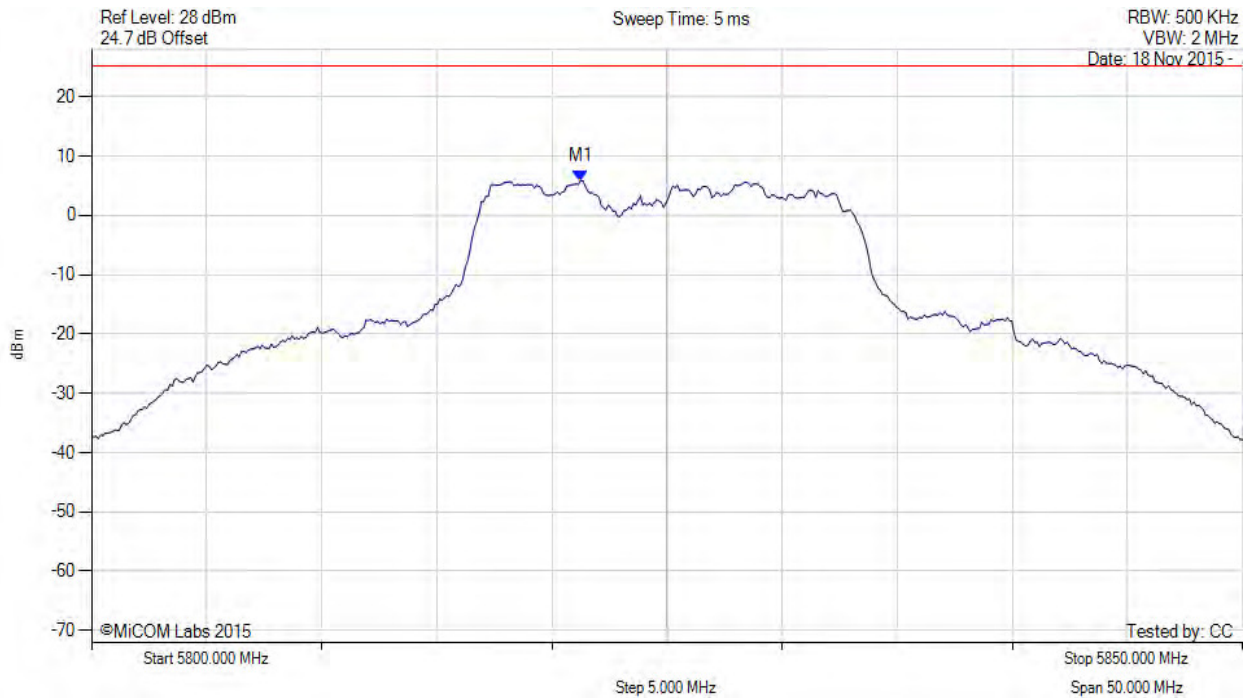

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5821.242 MHz : 5.863 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 259 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5825.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

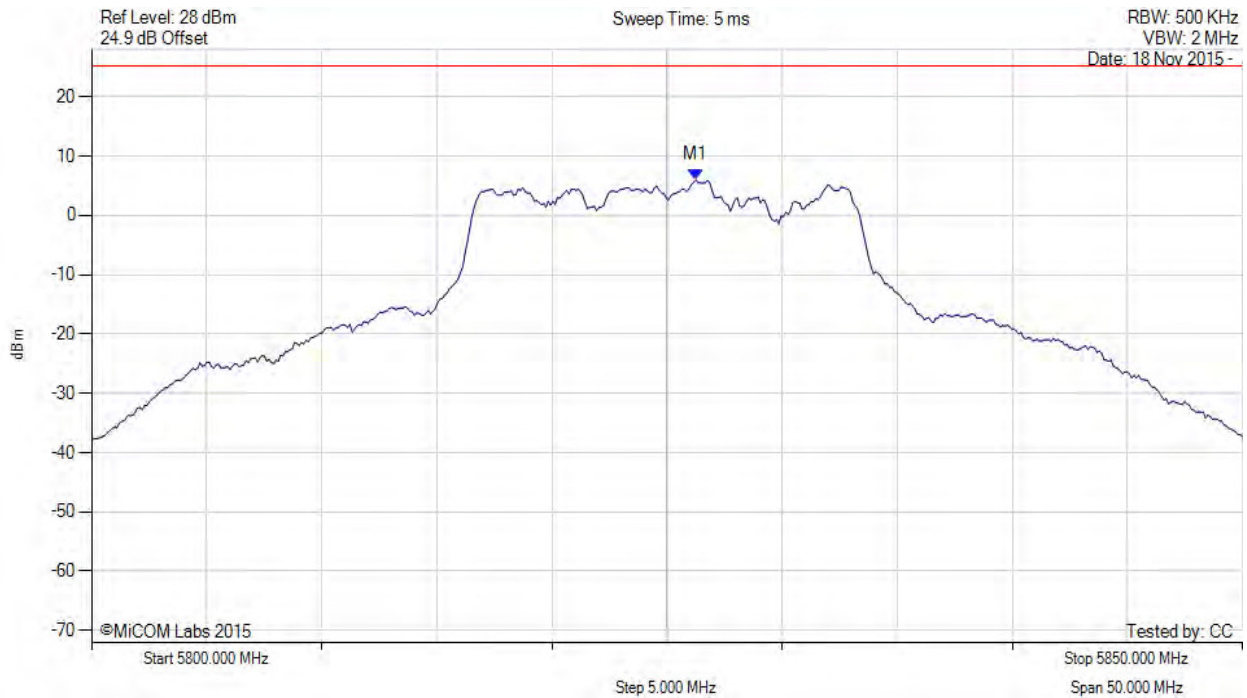

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5826.253 MHz : 5.980 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 260 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-20, Channel: 5825.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

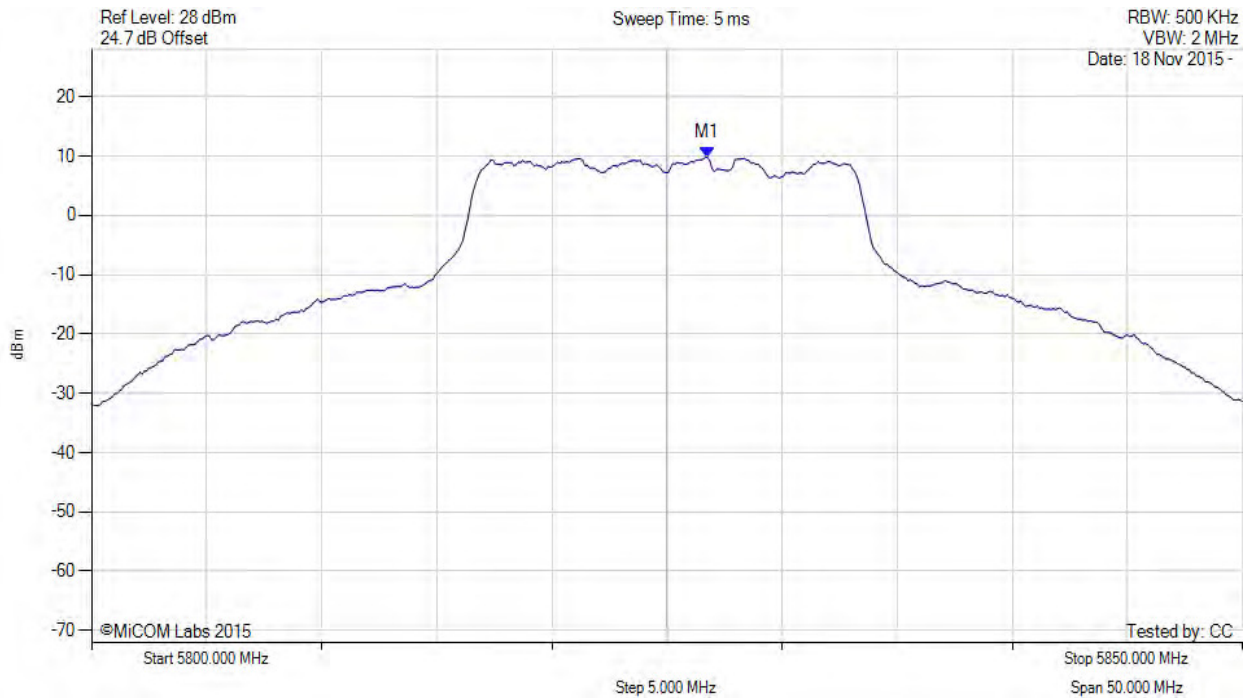

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5826.800 MHz : 9.811 dBm M1 + DCCF : 5826.800 MHz : 10.080 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 30.0 dBm Margin: -19.9 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 261 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

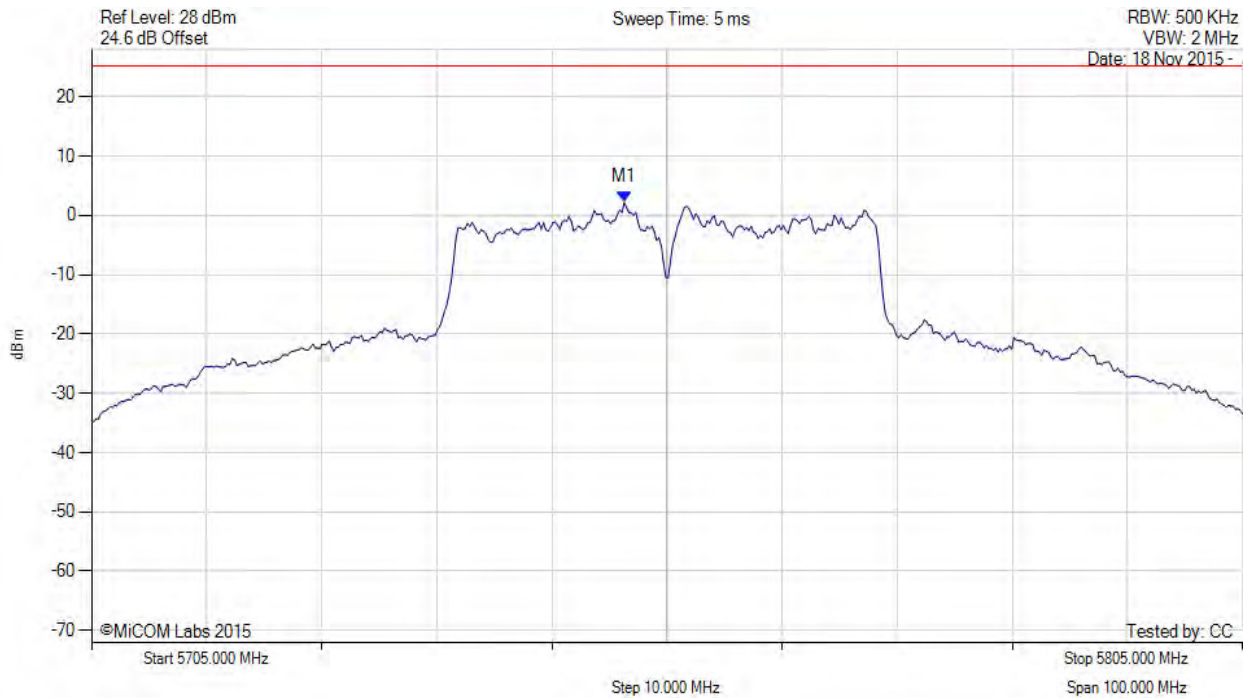

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5751.293 MHz : 2.222 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 262 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

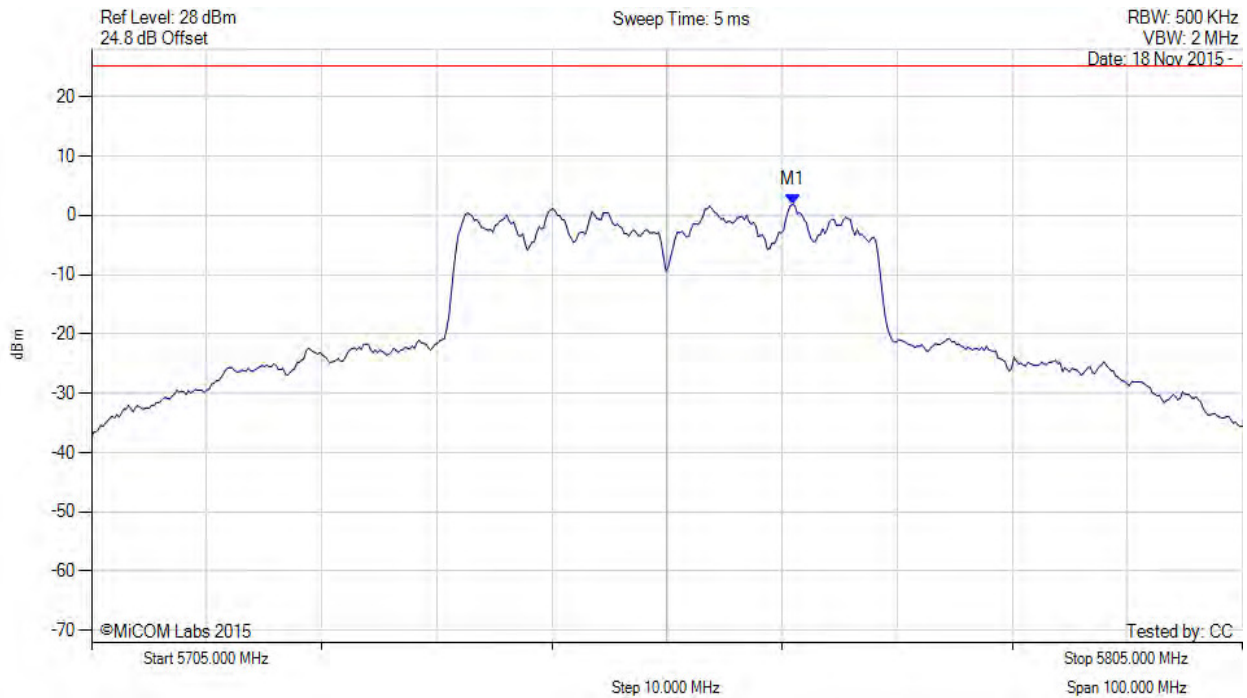

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5765.922 MHz : 1.881 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 263 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5755.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

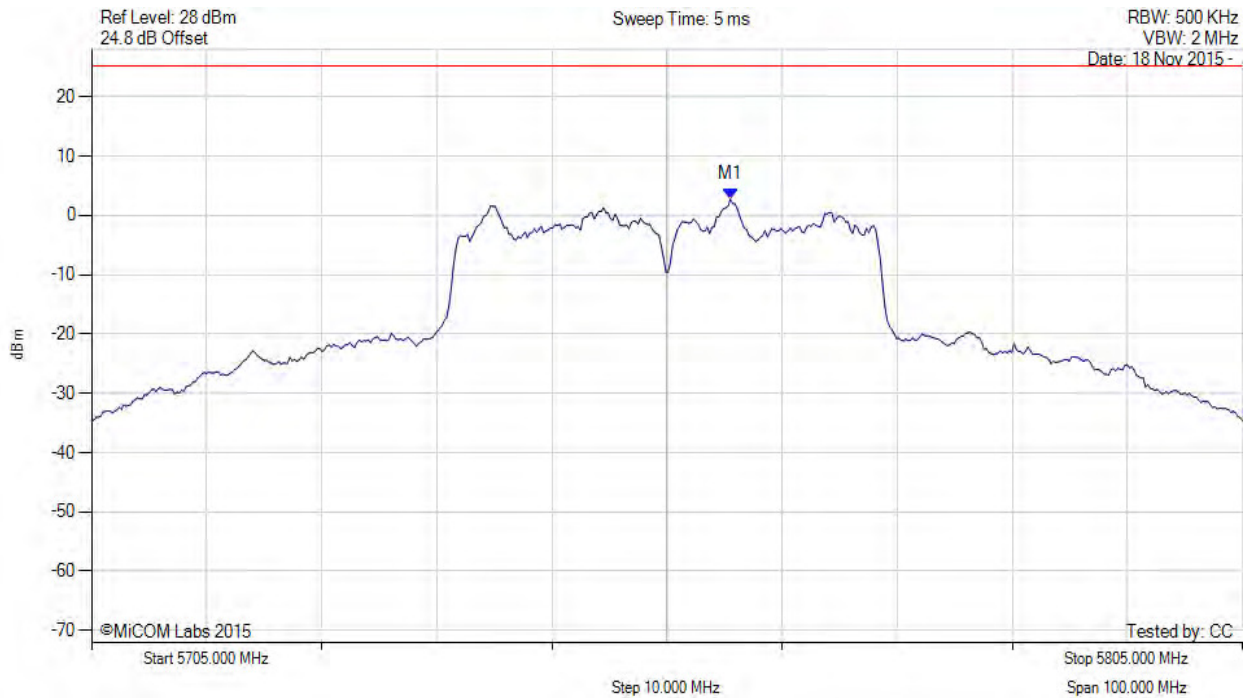

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5760.511 MHz : 2.723 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 264 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5755.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

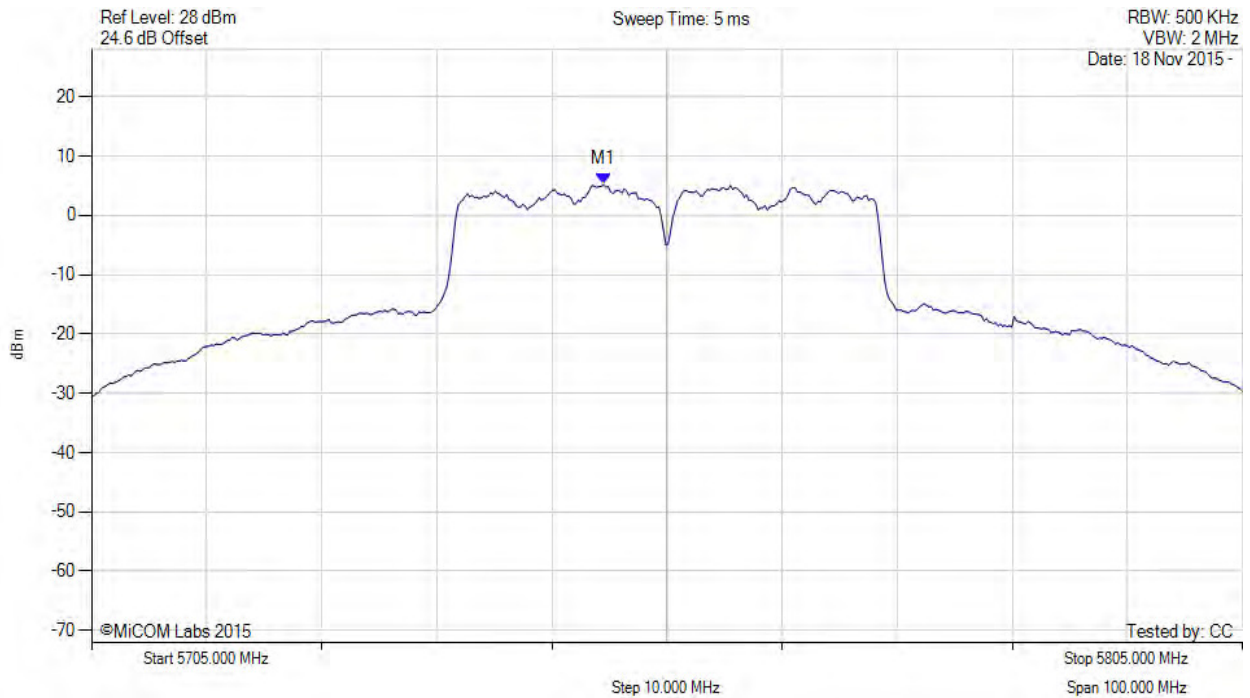

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5749.500 MHz : 5.218 dBm M1 + DCCF : 5749.500 MHz : 5.924 dBm Duty Cycle Correction Factor : +0.71 dB	Limit: ≤ 30.0 dBm Margin: -24.0 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 265 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain a, Temp: Ambient, Voltage: 15 Vdc

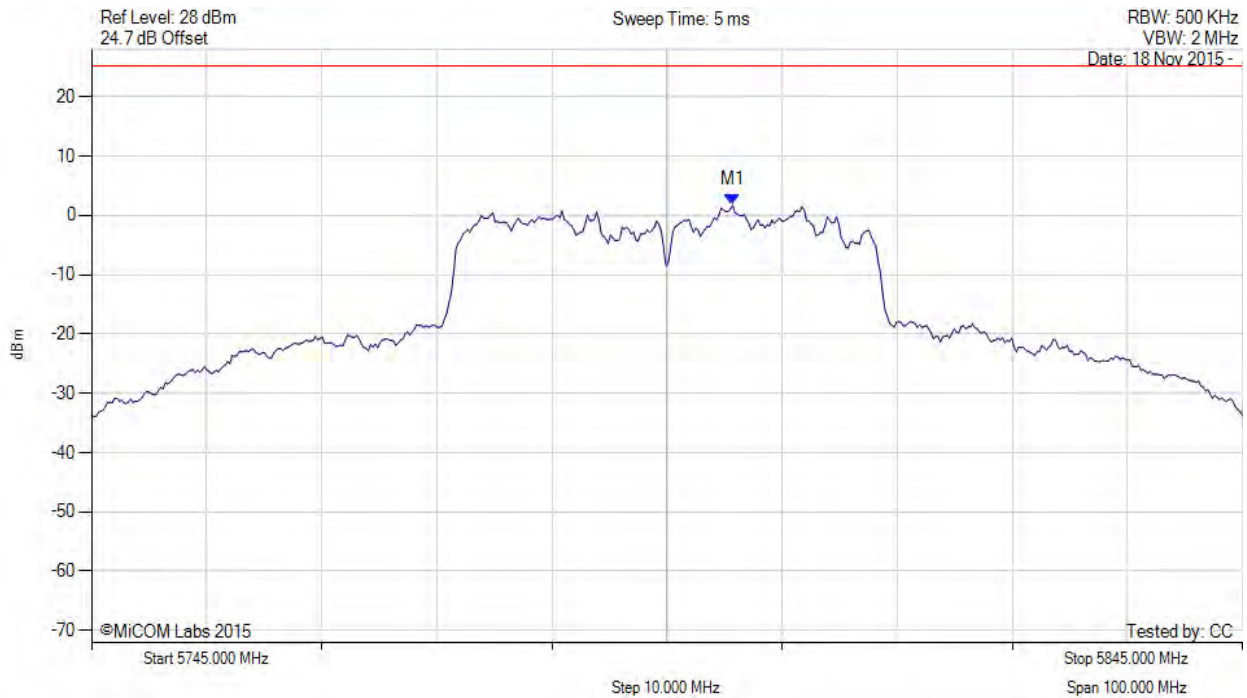

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5800.711 MHz : 1.732 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 266 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain b, Temp: Ambient, Voltage: 15 Vdc

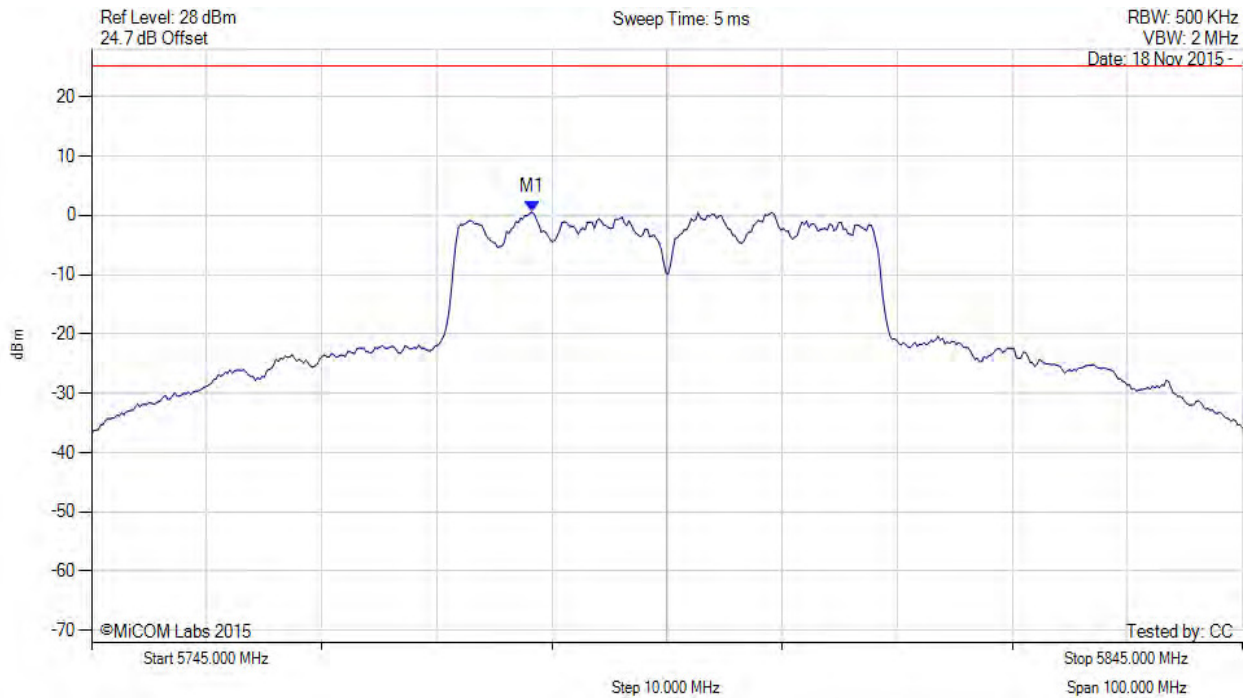

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5783.277 MHz : 0.559 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 267 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5795.00 MHz, Chain c, Temp: Ambient, Voltage: 15 Vdc

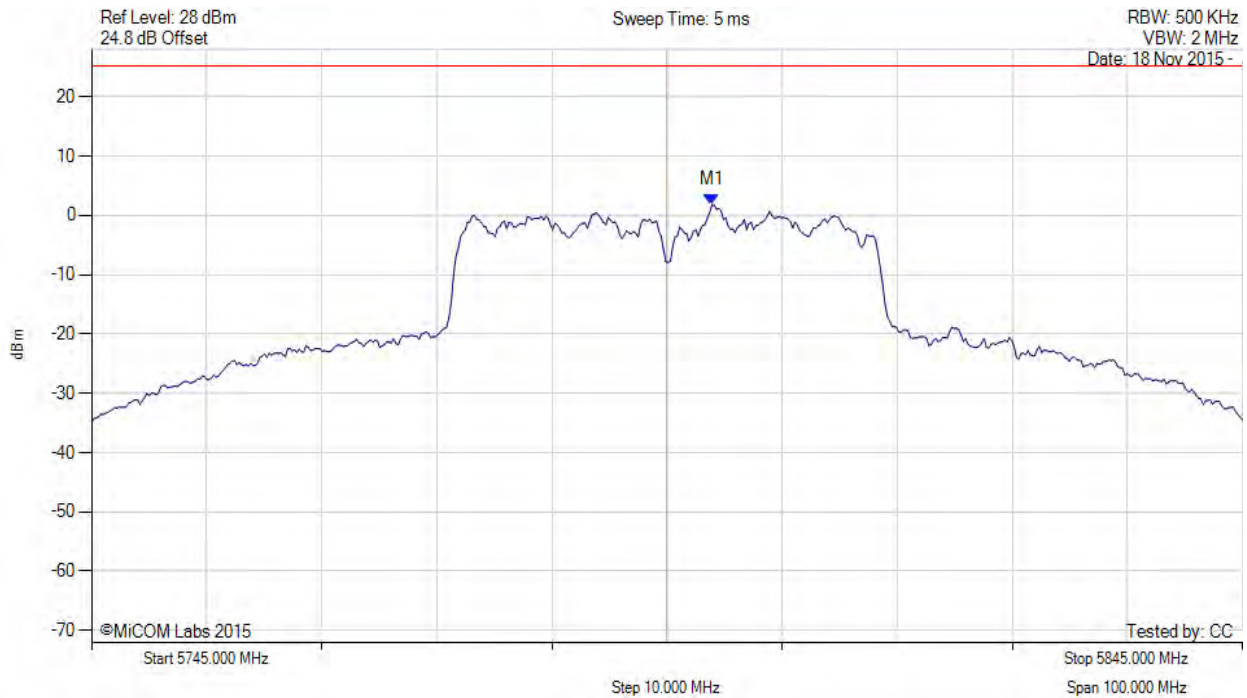

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5798.908 MHz : 1.764 dBm	Limit: ≤ 25.230 dBm

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 268 of 404



POWER SPECTRAL DENSITY

Variant: 802.11n HT-40, Channel: 5795.00 MHz, SUM, Temp: Ambient, Voltage: 15 Vdc

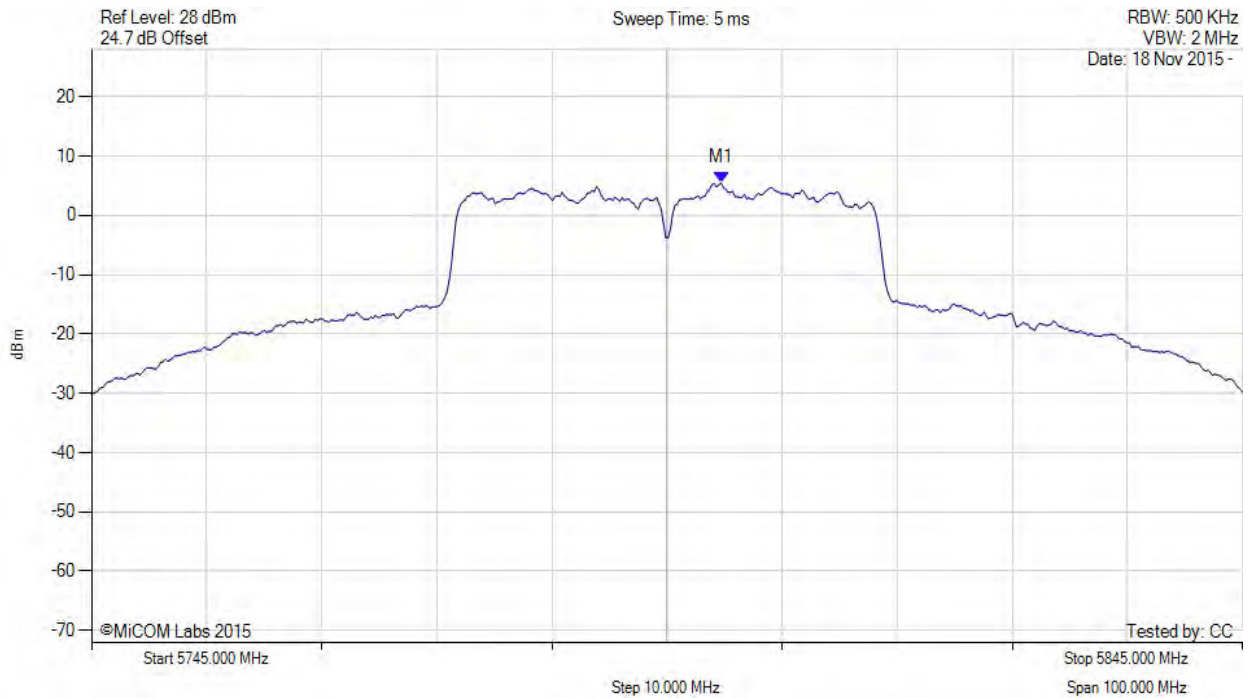

Analyser Setup	Marker:Frequency:Amplitude	Test Results
Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 5799.700 MHz : 5.449 dBm M1 + DCCF : 5799.700 MHz : 6.155 dBm Duty Cycle Correction Factor : +0.71 dB	Limit: ≤ 30.0 dBm Margin: -23.8 dB

[back to matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.407 & IC RSS-247
Serial #: FLUK48-U5 Rev A
Issue Date: 23rd December 2015
Page: 269 of 404

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.