



Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 93 of 250

APPENDIX

A. SUPPORTING INFORMATION

A.1. CONDUCTED TEST PLOTS

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 94 of 250

A.1.1. Power Spectral Density



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

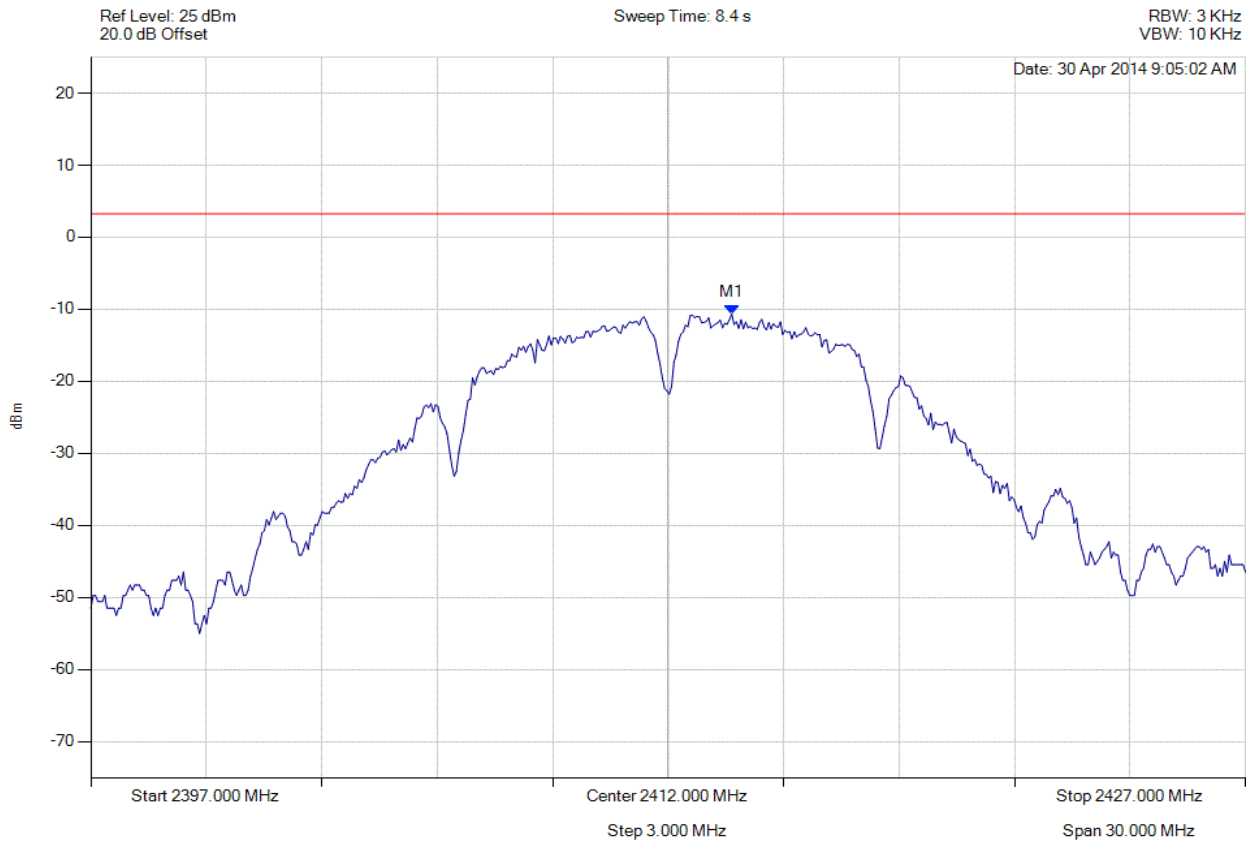

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2413.653 MHz : -10.670 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 95 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

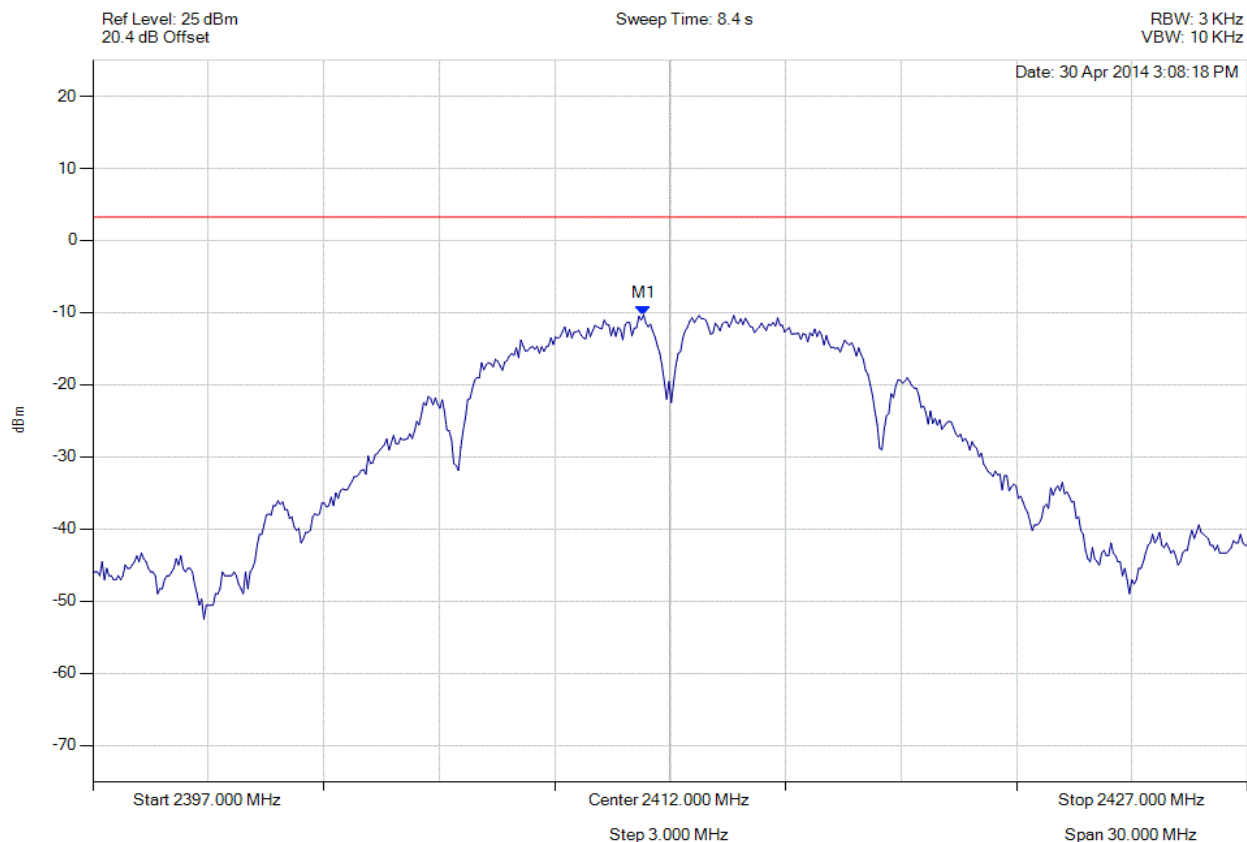

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2411.309 MHz : -10.325 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 96 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

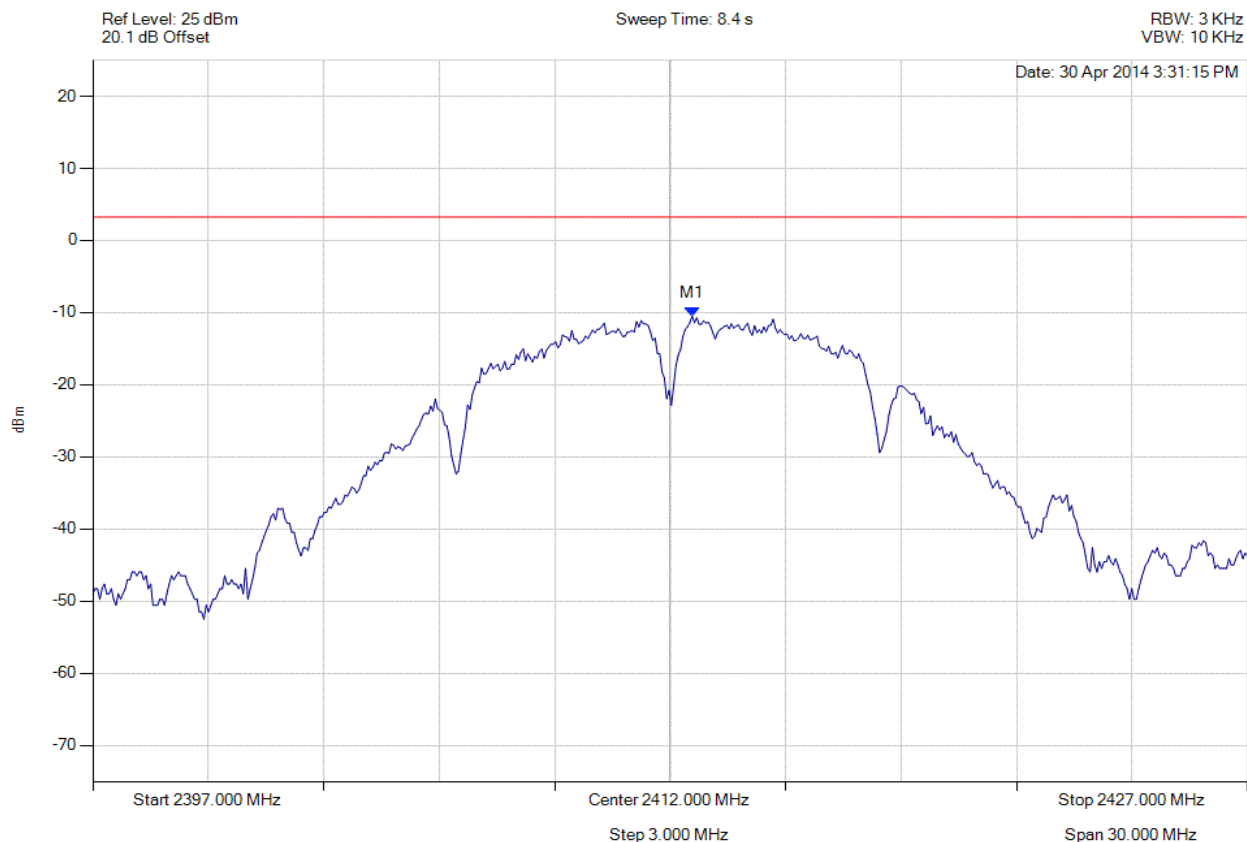

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2412.571 MHz : -10.462 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 97 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2412.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

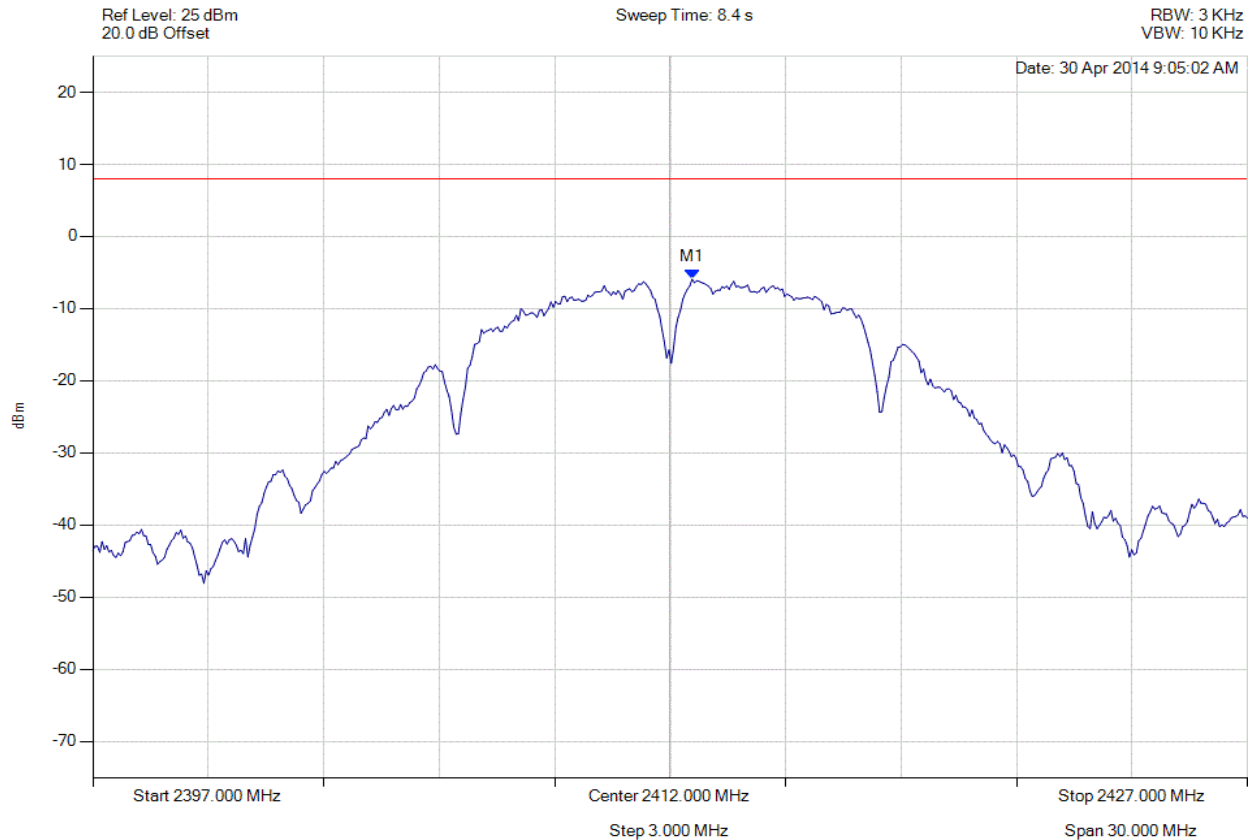

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2412.600 MHz : -5.924 dBm M1 + DCCF : 2412.600 MHz : -5.880 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -13.9 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 98 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

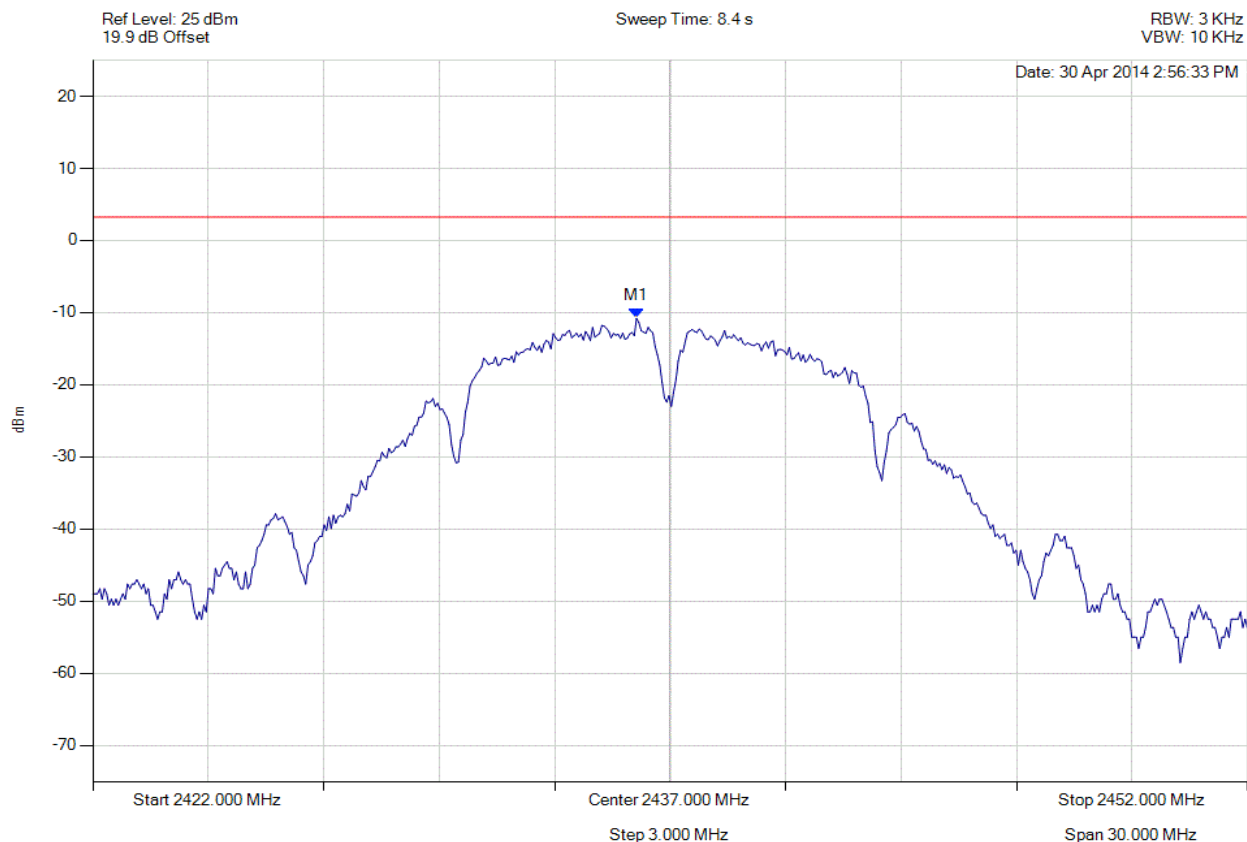

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2436.128 MHz : -10.776 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 99 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

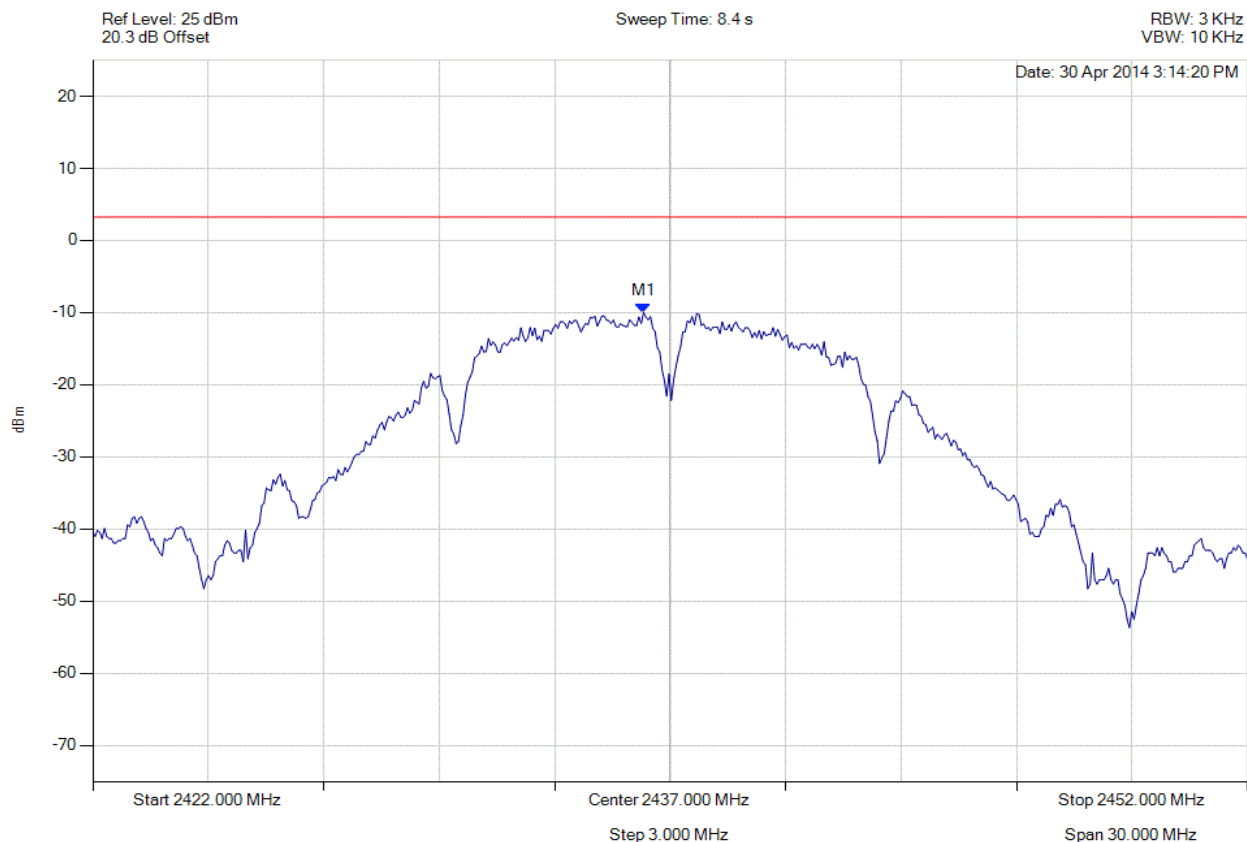

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2436.309 MHz : -10.002 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 100 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

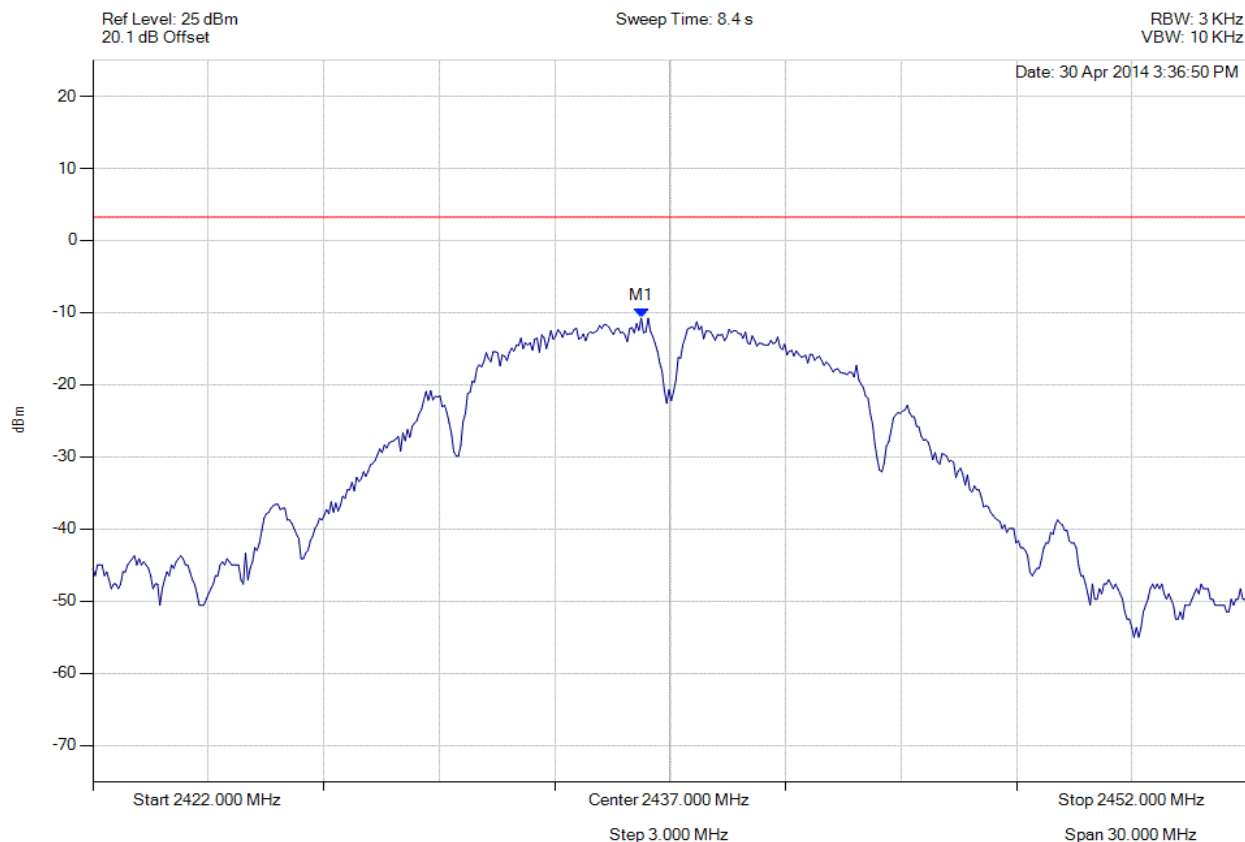

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2436.248 MHz : -10.767 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 101 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2437.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

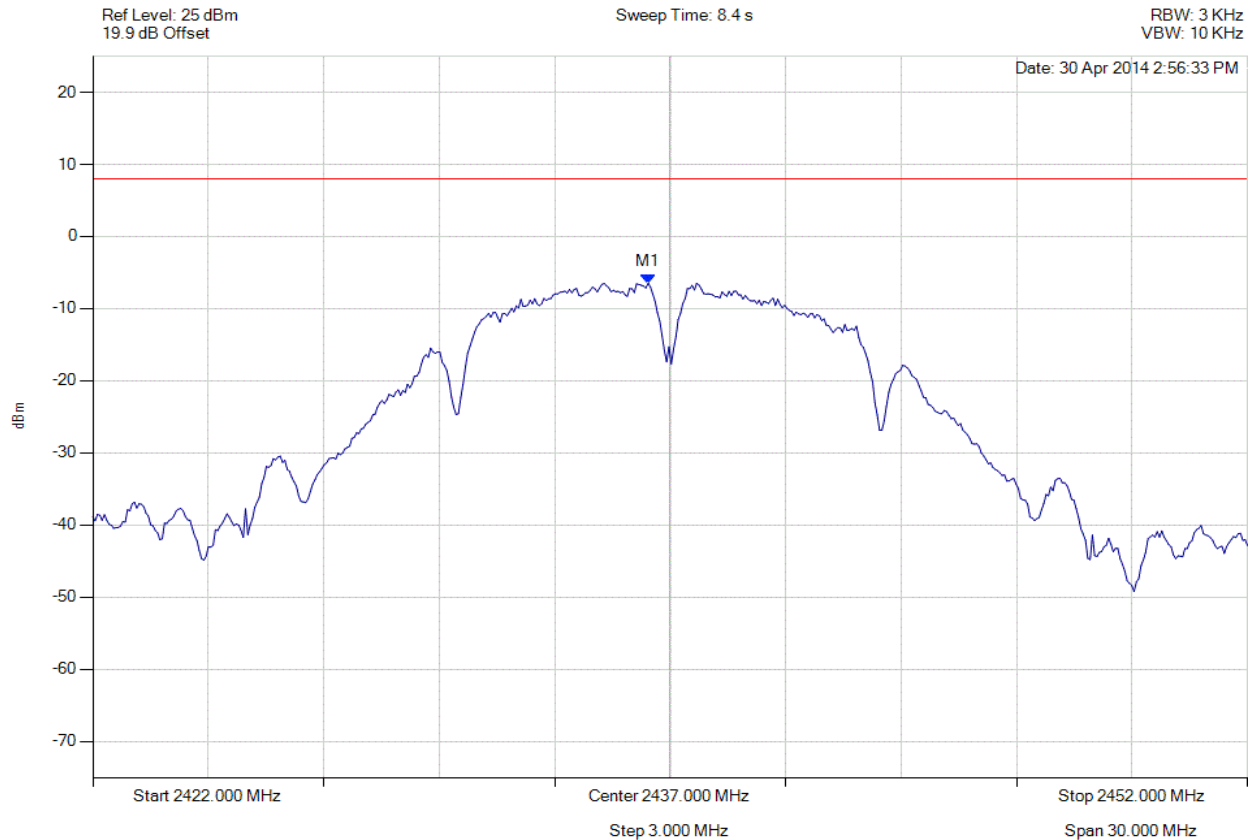

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2436.400 MHz : -6.467 dBm M1 + DCCF : 2436.400 MHz : -6.423 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -14.4 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 102 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

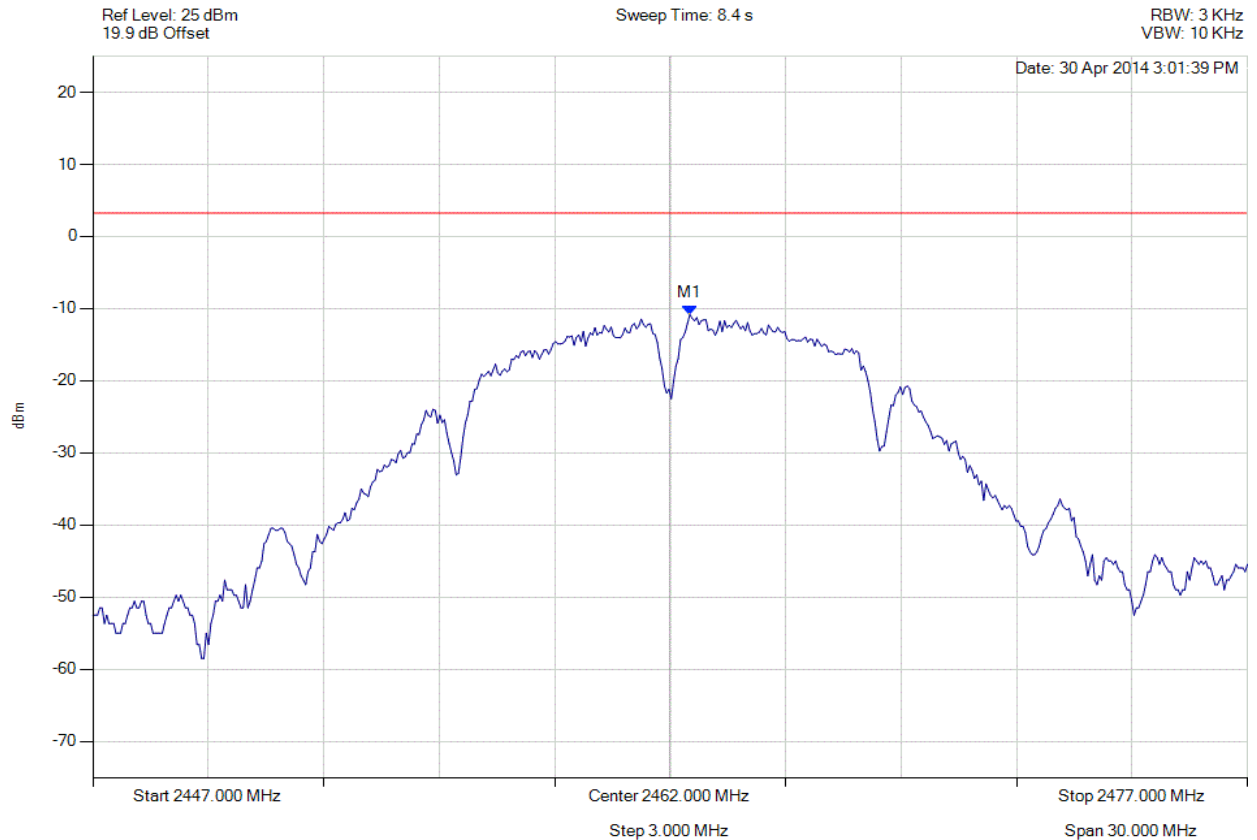

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2462.511 MHz : -10.839 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 103 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

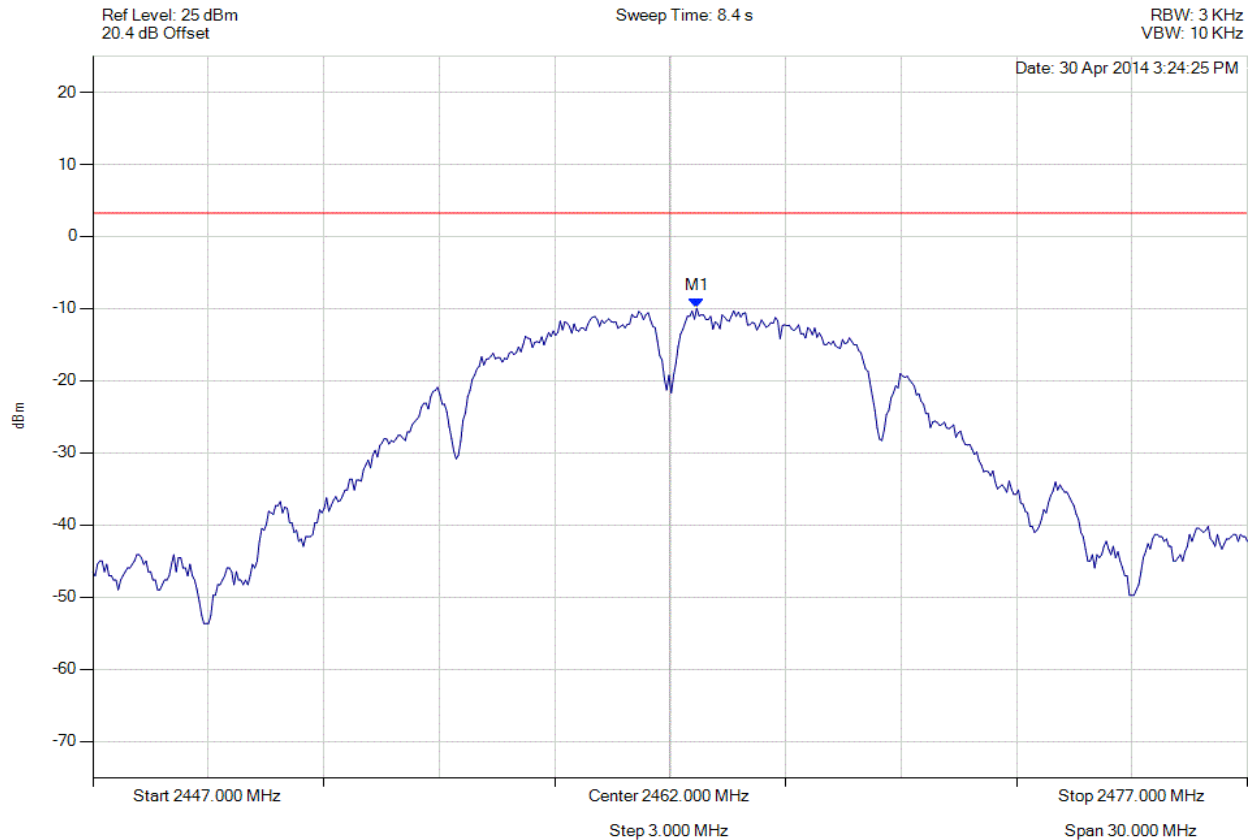

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2462.691 MHz : -9.945 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 104 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

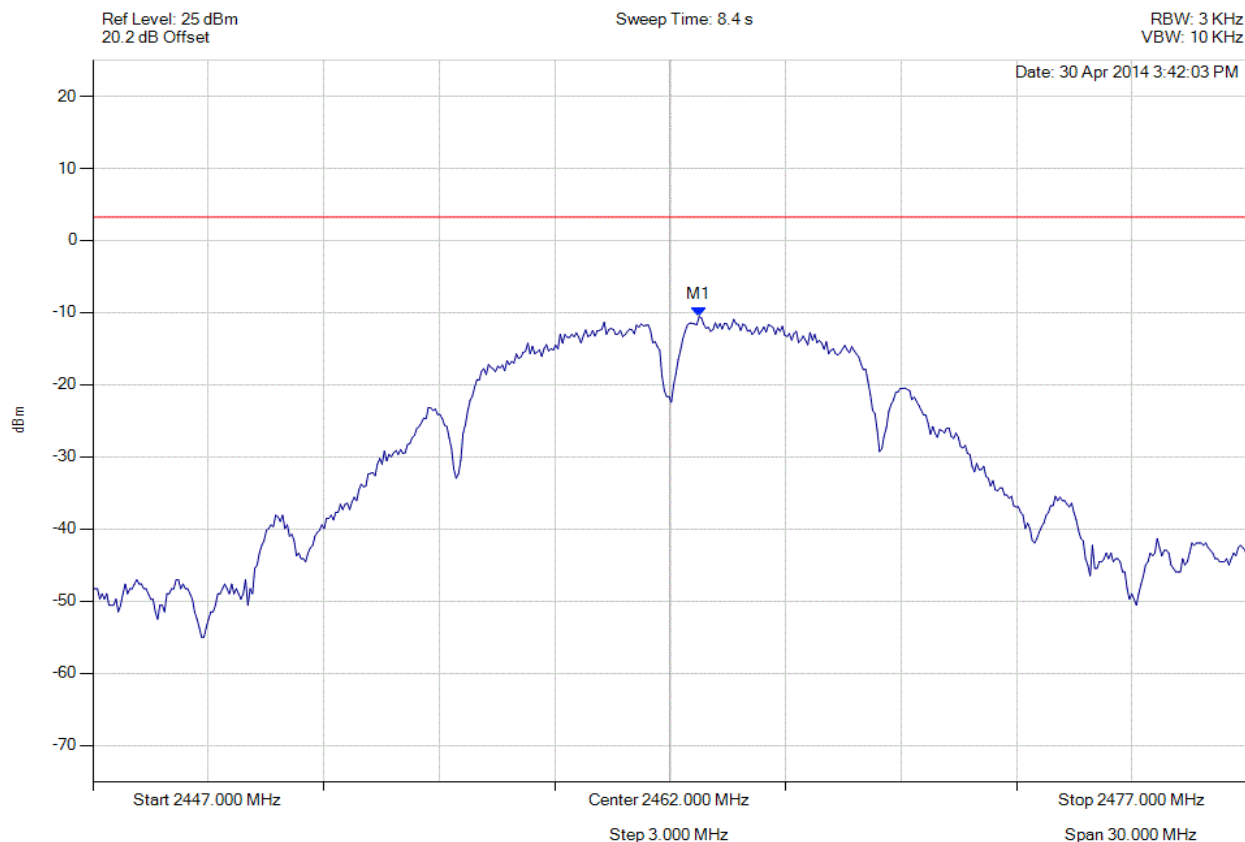

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2462.752 MHz : -10.539 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 105 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11b, Channel: 2462.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

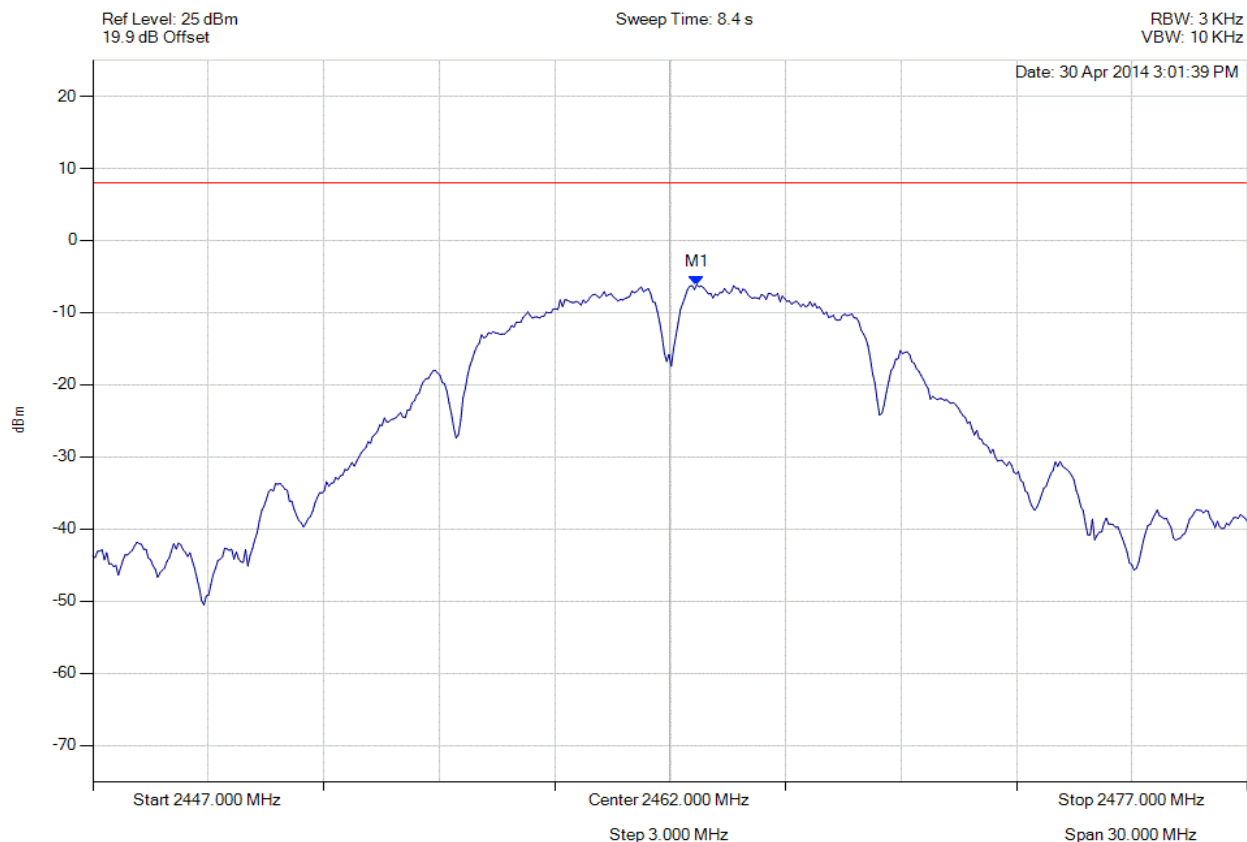

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2462.700 MHz : -6.128 dBm M1 + DCCF : 2462.700 MHz : -6.084 dBm Duty Cycle Correction Factor : +0.04 dB	Limit: ≤ 8.0 dBm Margin: -14.1 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 106 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

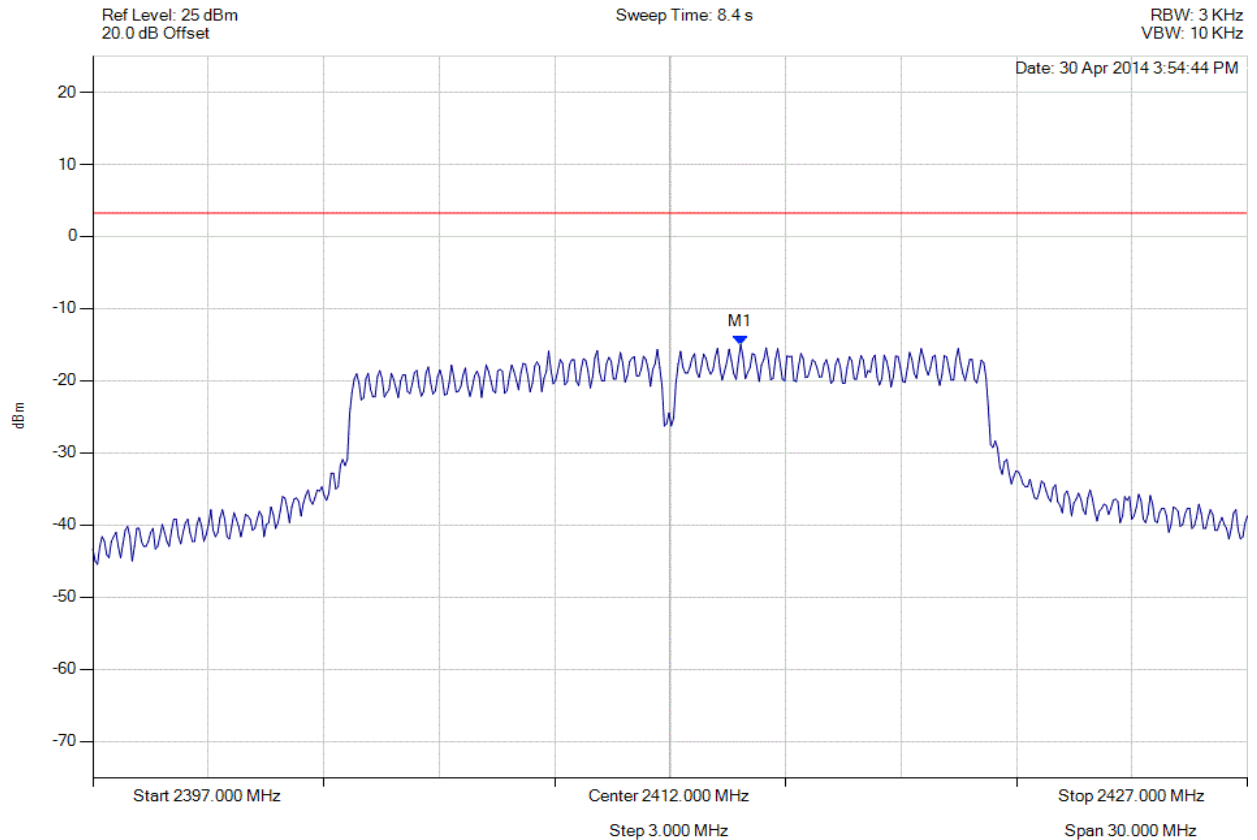

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2413.834 MHz : -14.959 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 107 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

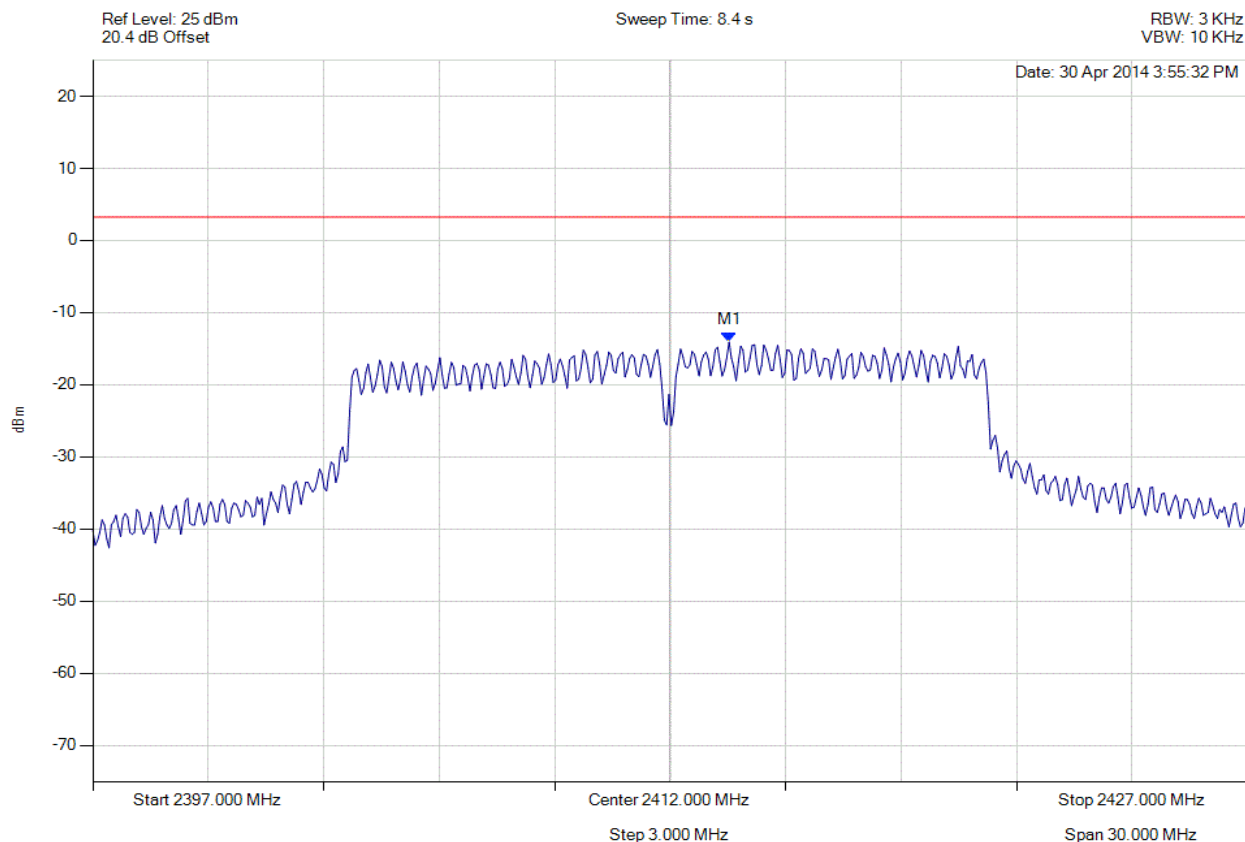

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2413.533 MHz : -14.096 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 108 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

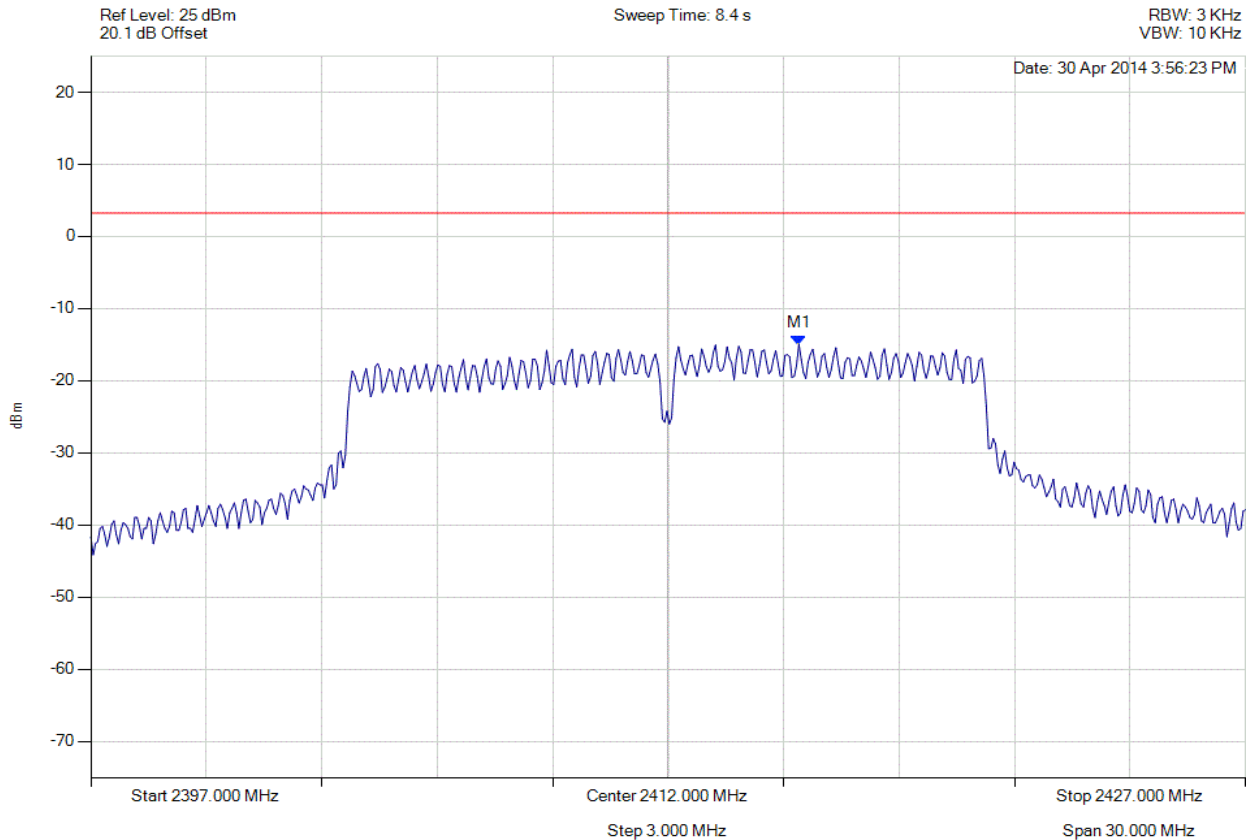

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2415.397 MHz : -14.973 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 109 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2412.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

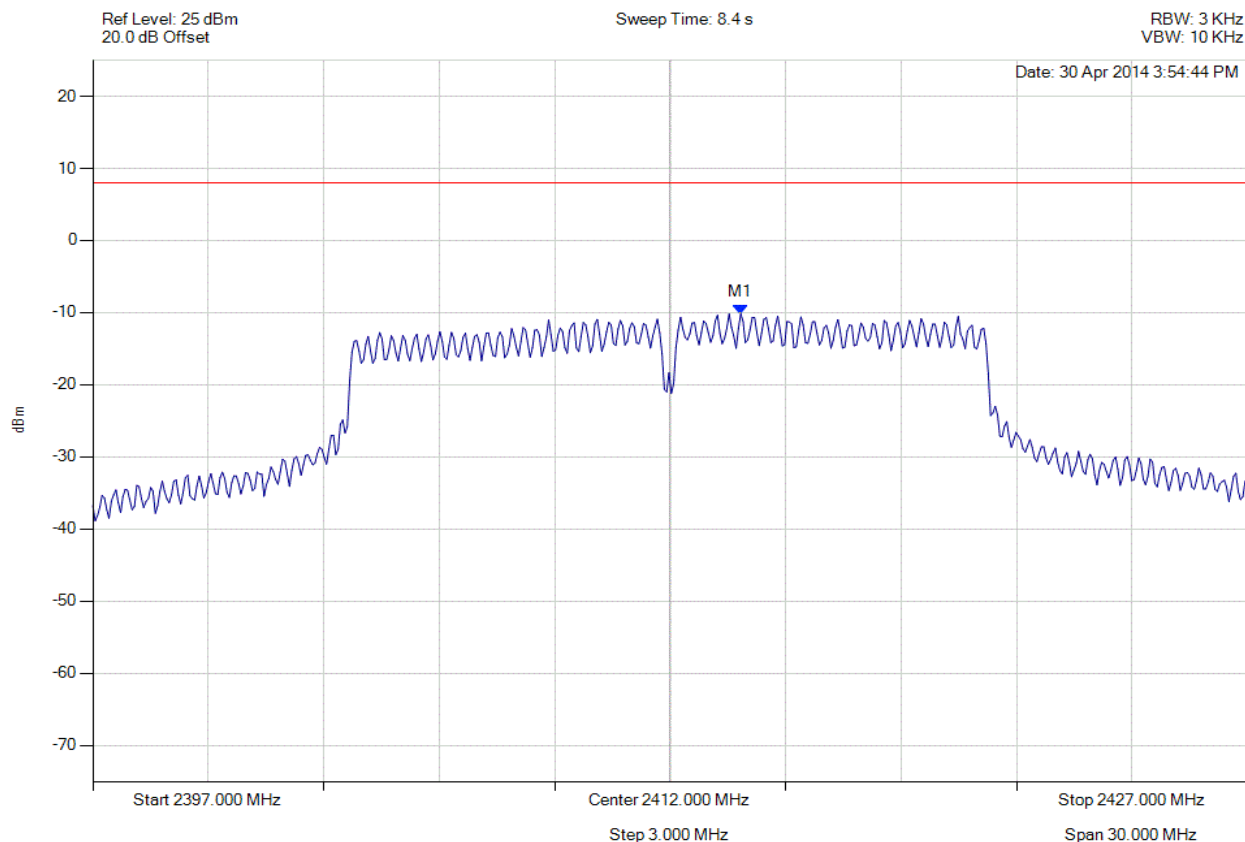

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2413.800 MHz : -10.175 dBm M1 + DCCF : 2413.800 MHz : -9.905 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 8.0 dBm Margin: -17.9 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 110 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

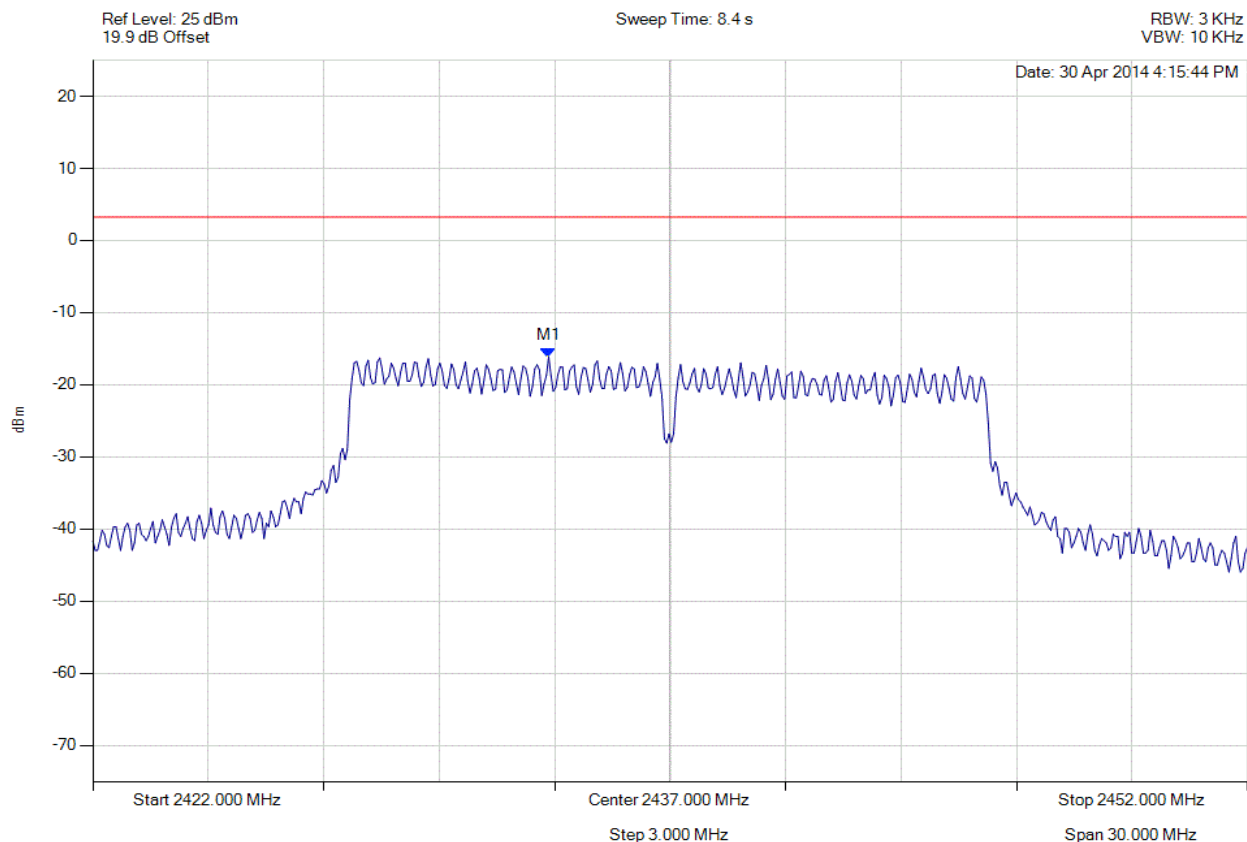

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2433.844 MHz : -16.146 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 111 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

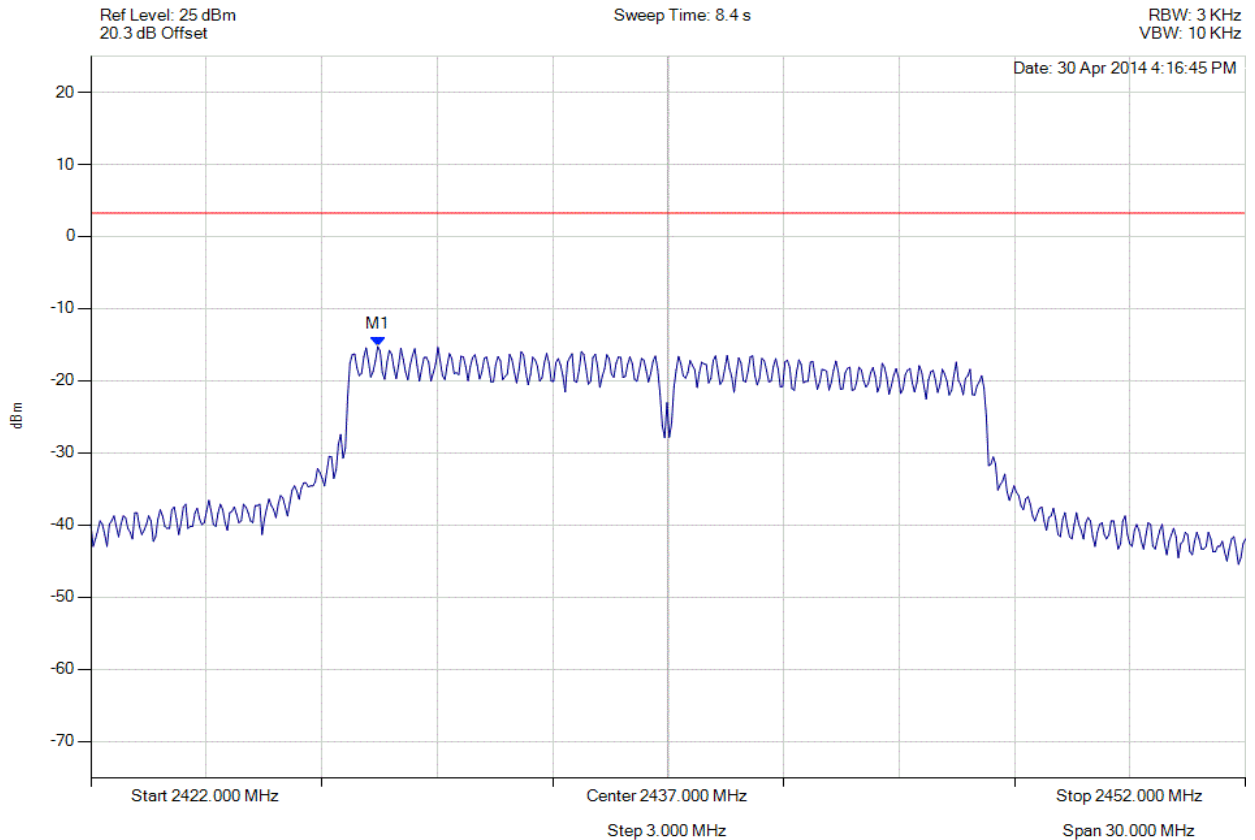

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2429.455 MHz : -15.267 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 112 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

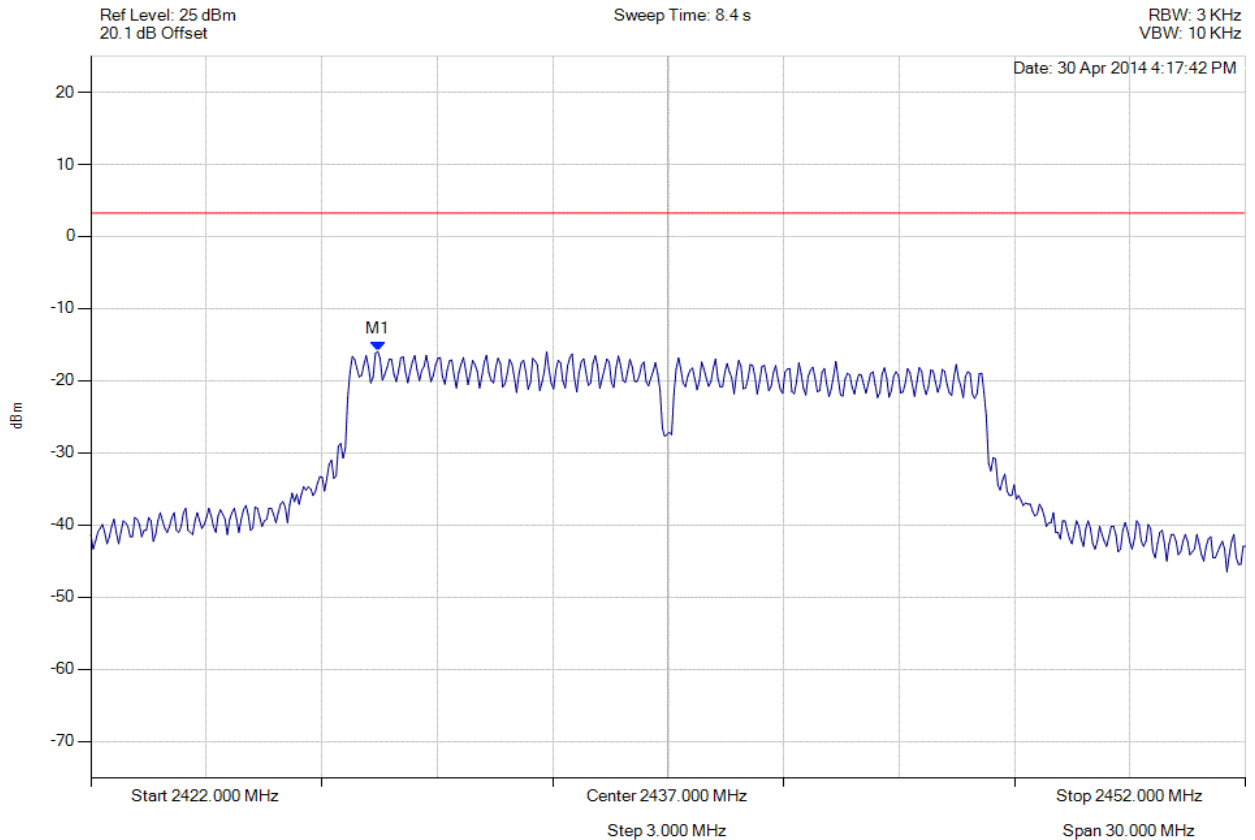

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2429.455 MHz : -15.950 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 113 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2437.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

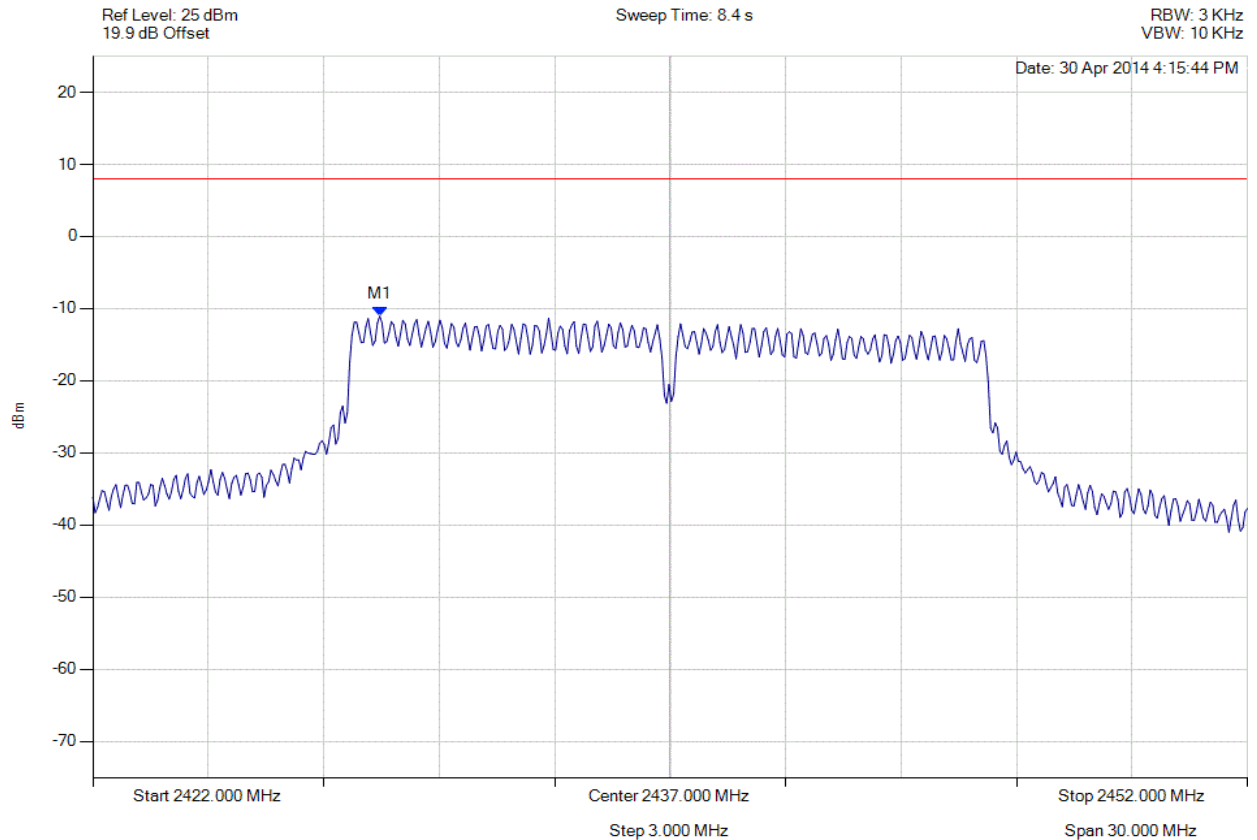

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2429.500 MHz : -11.040 dBm M1 + DCCF : 2429.500 MHz : -10.770 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 8.0 dBm Margin: -18.7 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 114 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

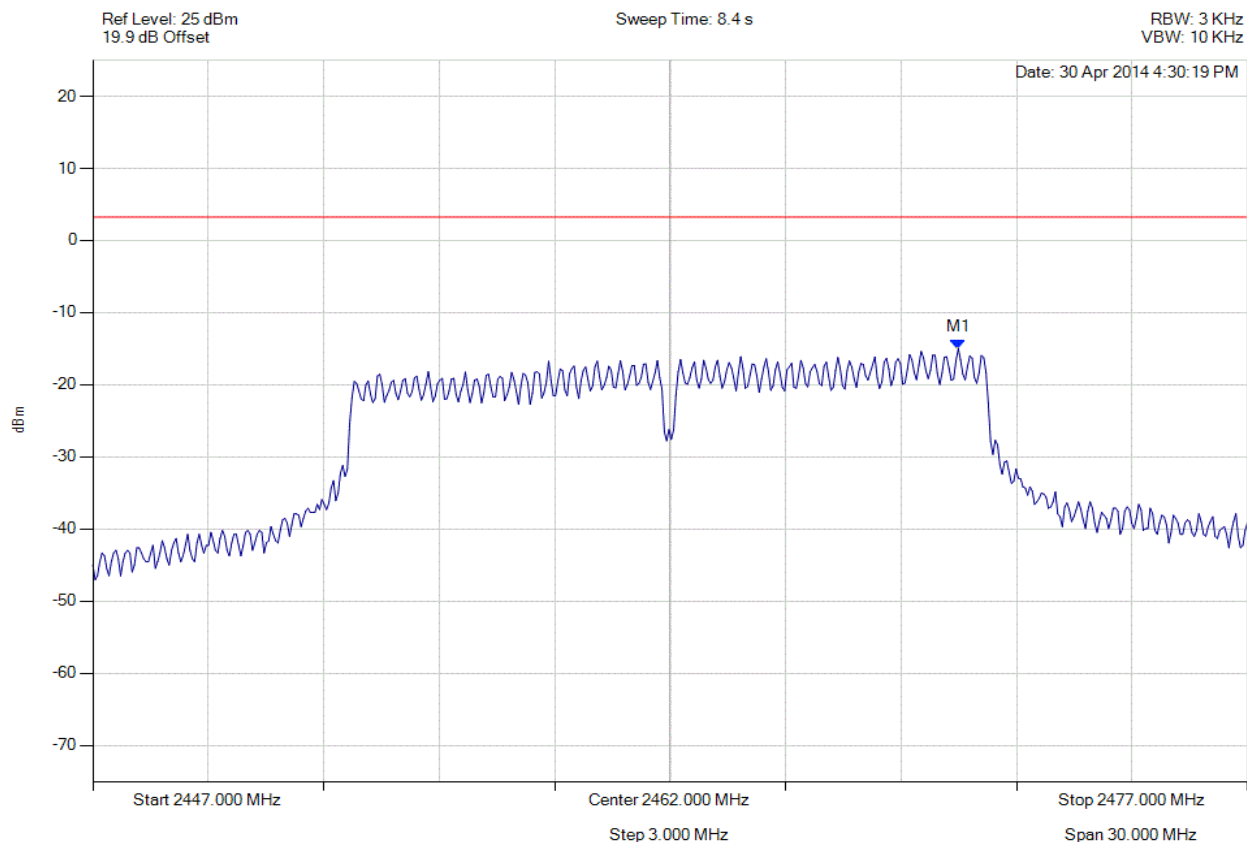

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2469.485 MHz : -15.002 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 115 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

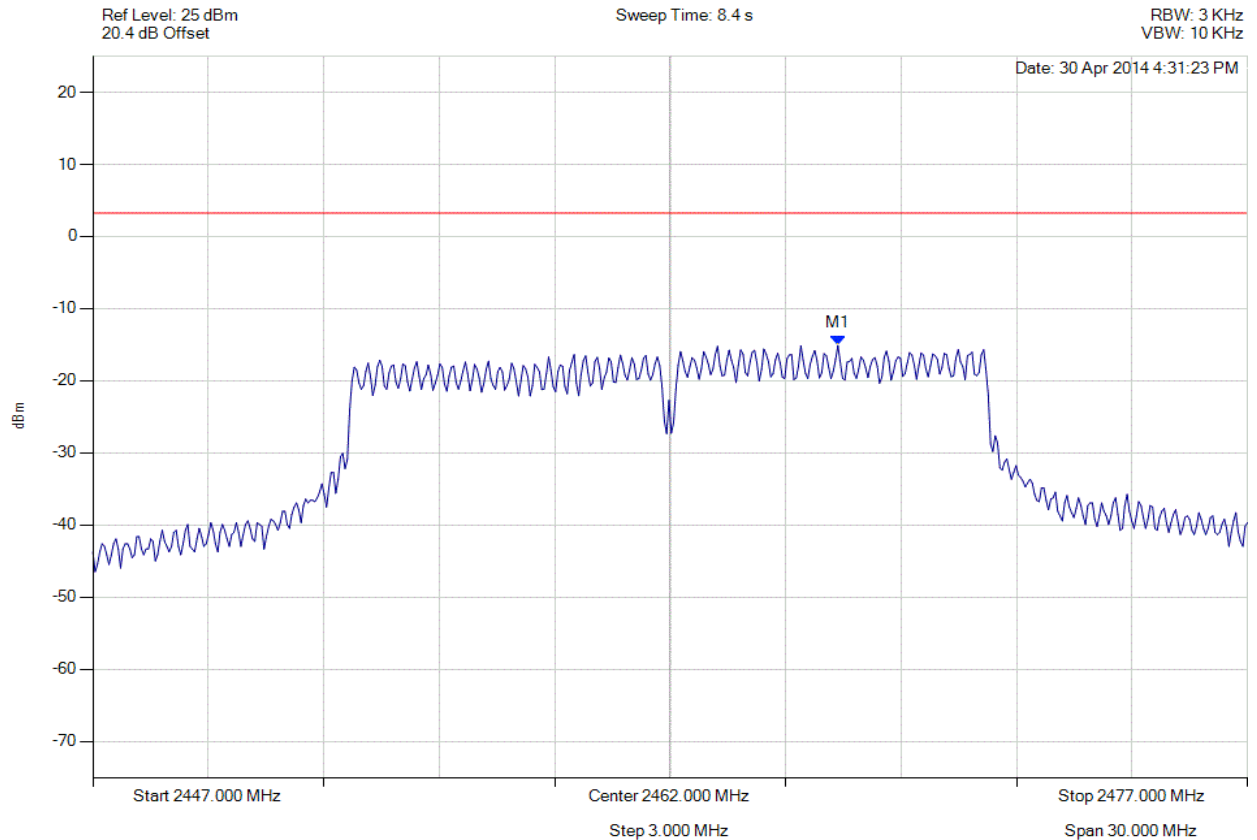

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2466.359 MHz : -15.119 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 116 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

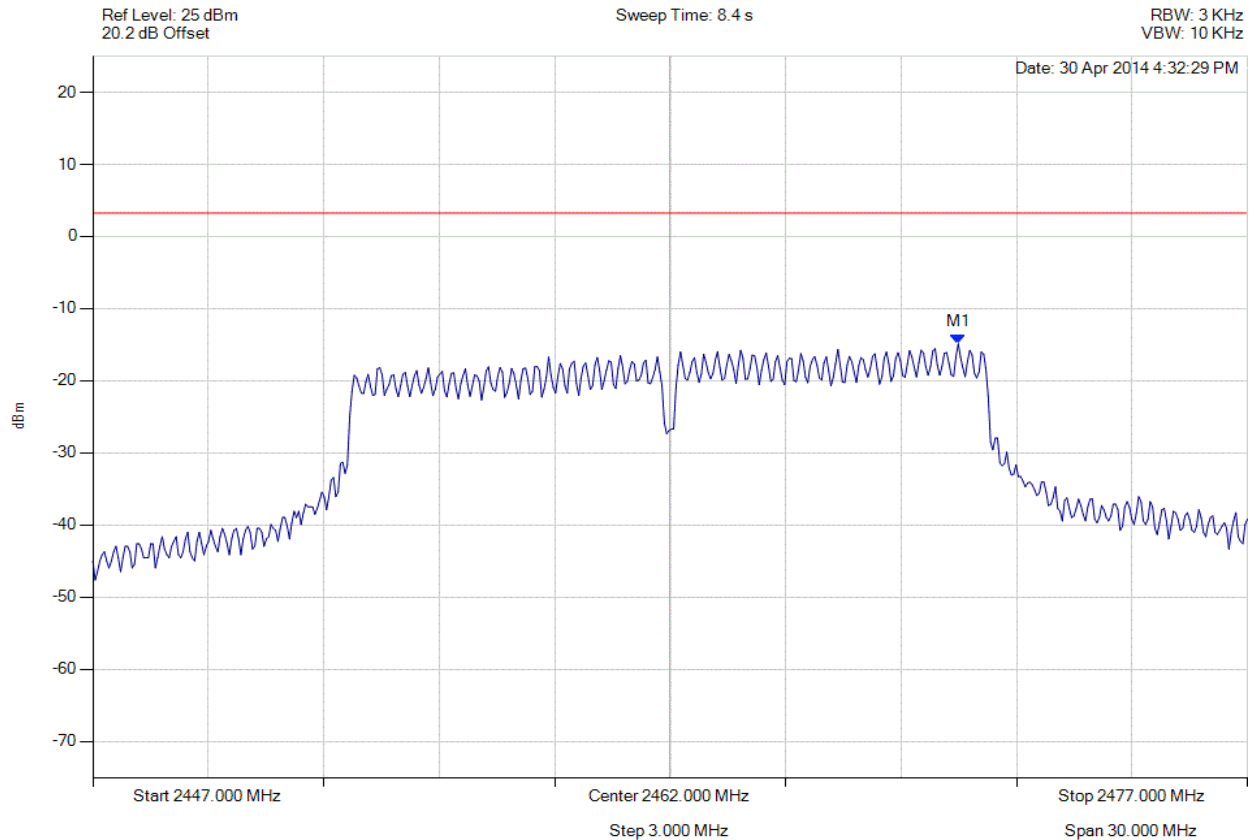

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2469.485 MHz : -14.902 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 117 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11g, Channel: 2462.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

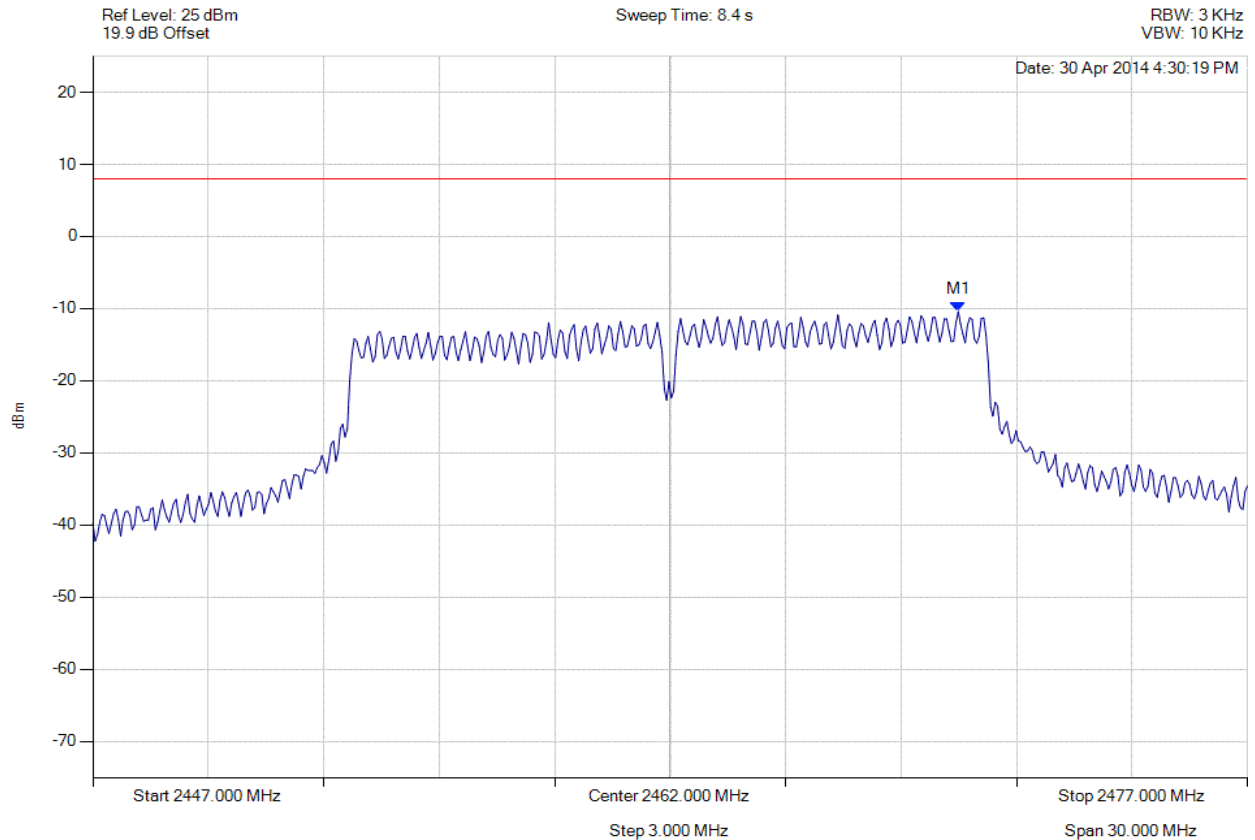

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2469.500 MHz : -10.414 dBm M1 + DCCF : 2469.500 MHz : -10.144 dBm Duty Cycle Correction Factor : +0.27 dB	Limit: ≤ 8.0 dBm Margin: -18.1 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 118 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

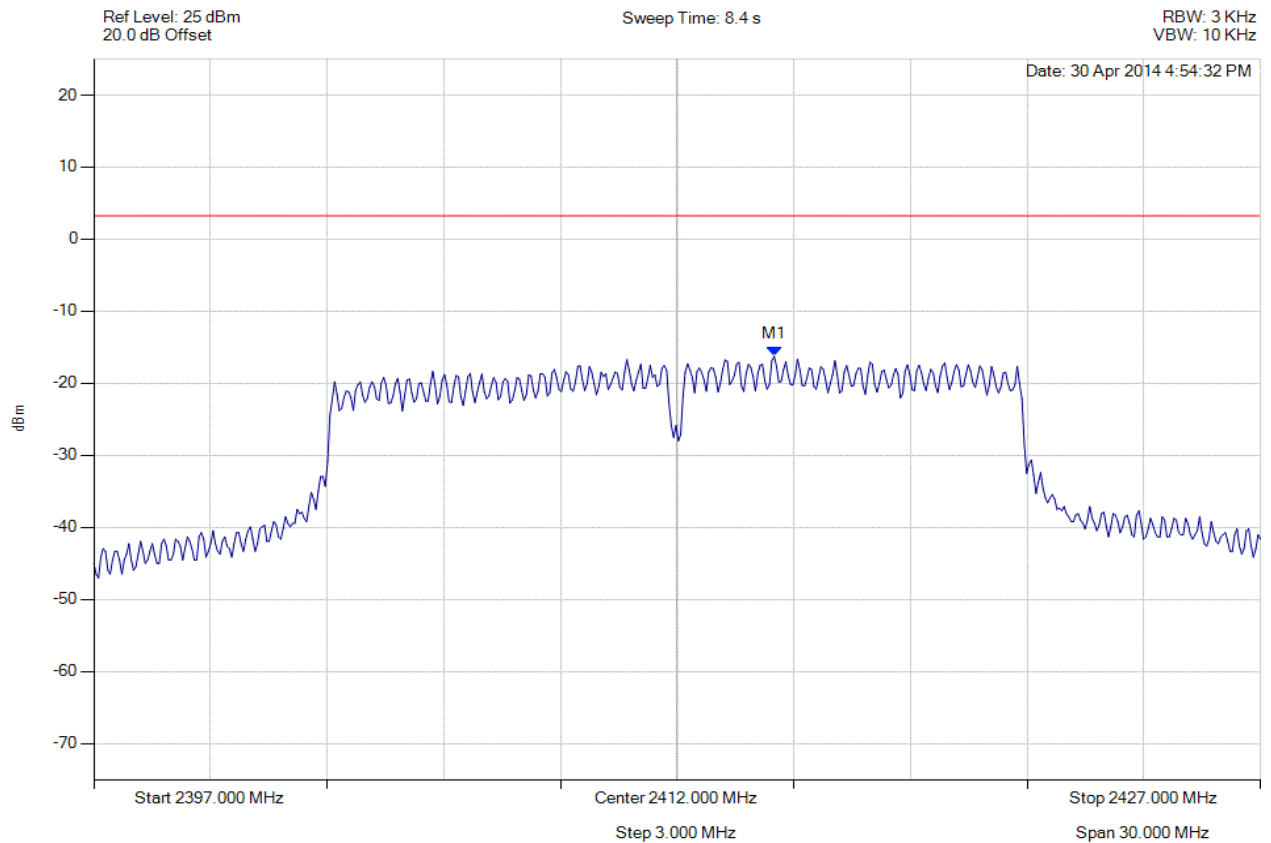

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2414.495 MHz : -16.245 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 119 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

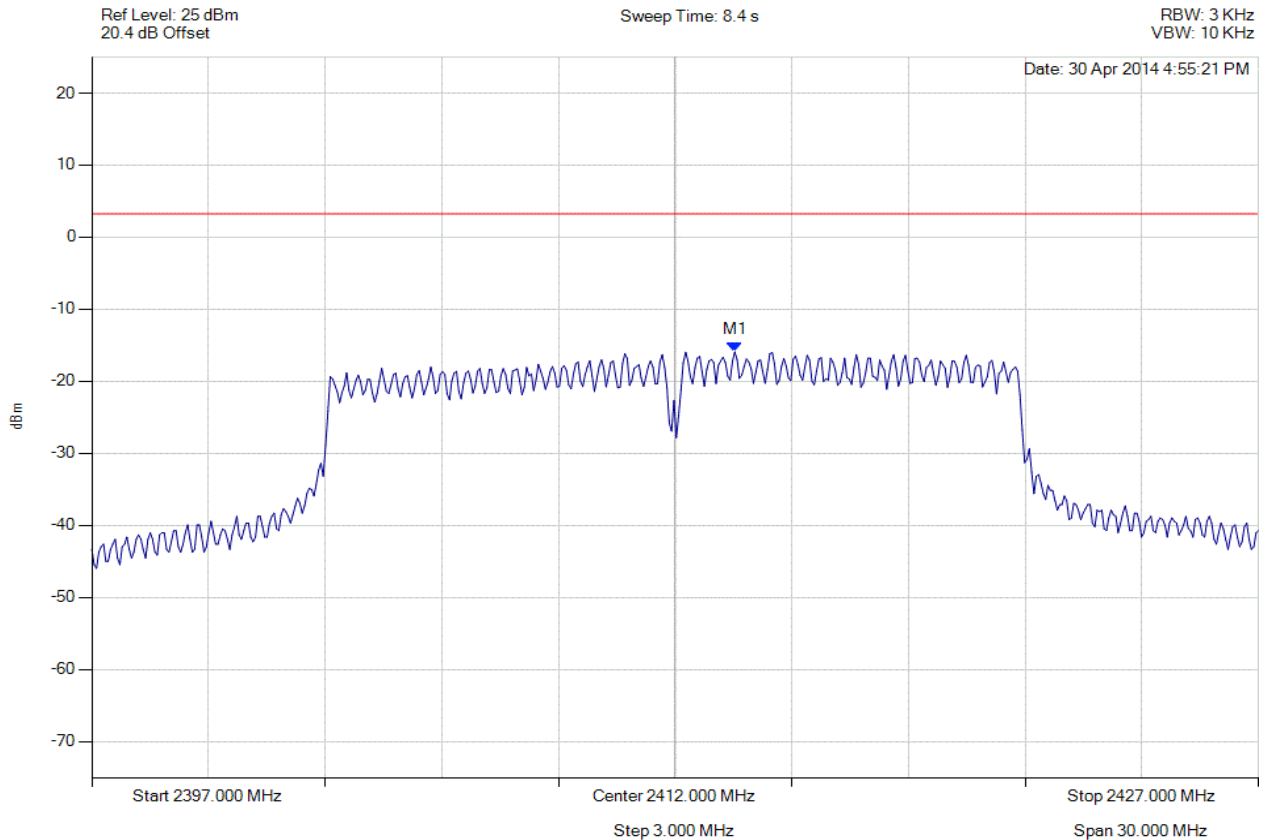

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2413.533 MHz : -15.917 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 120 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

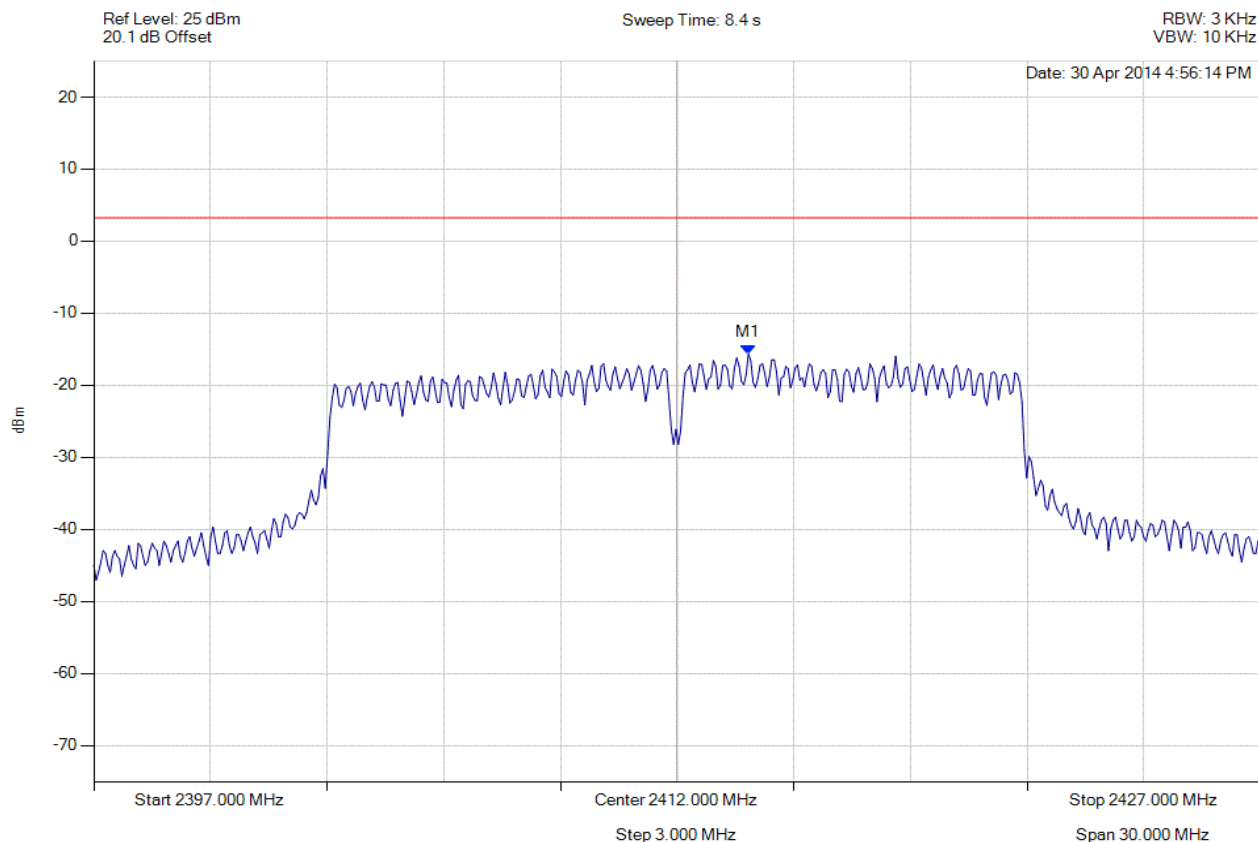

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2413.834 MHz : -15.648 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 121 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2412.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

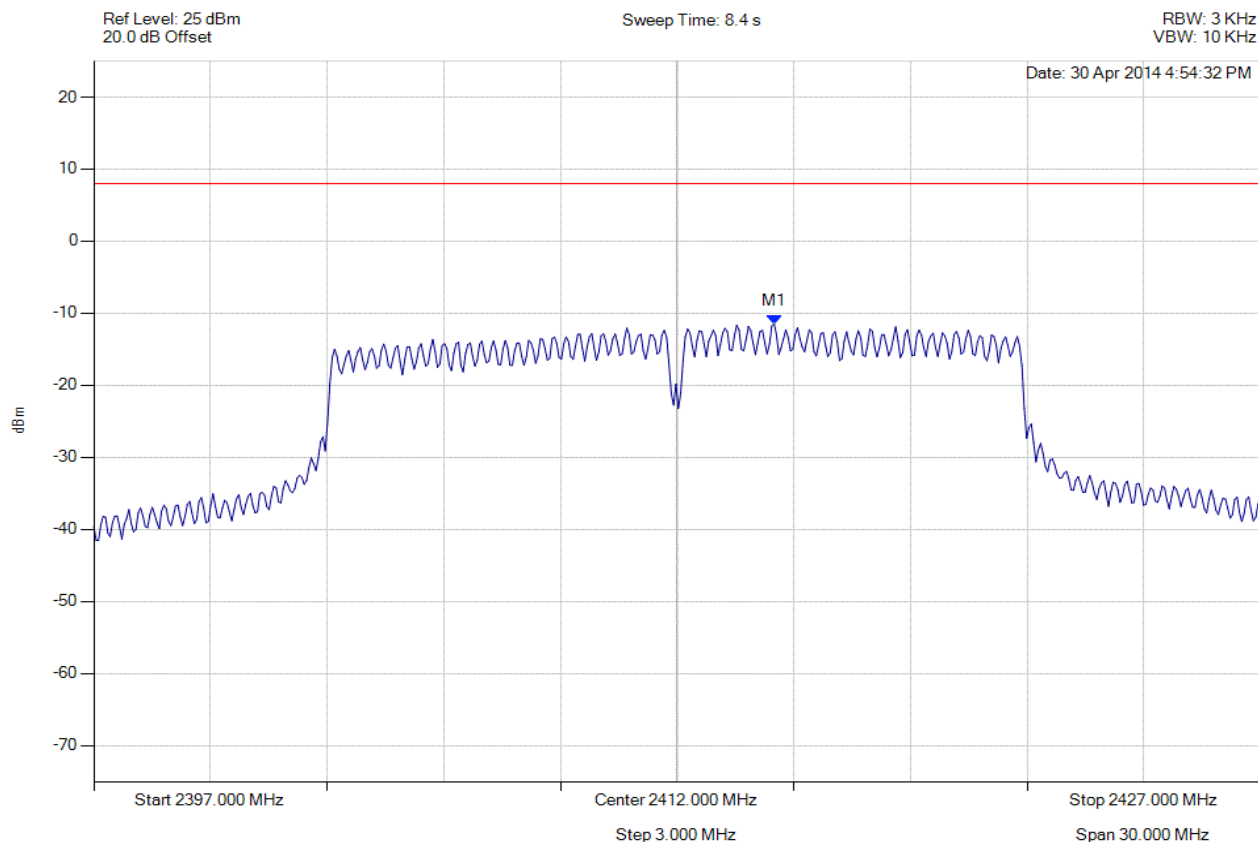

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2414.500 MHz : -11.455 dBm M1 + DCCF : 2414.500 MHz : -11.212 dBm Duty Cycle Correction Factor : +0.24 dB	Limit: ≤ 8.0 dBm Margin: -19.2 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 122 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

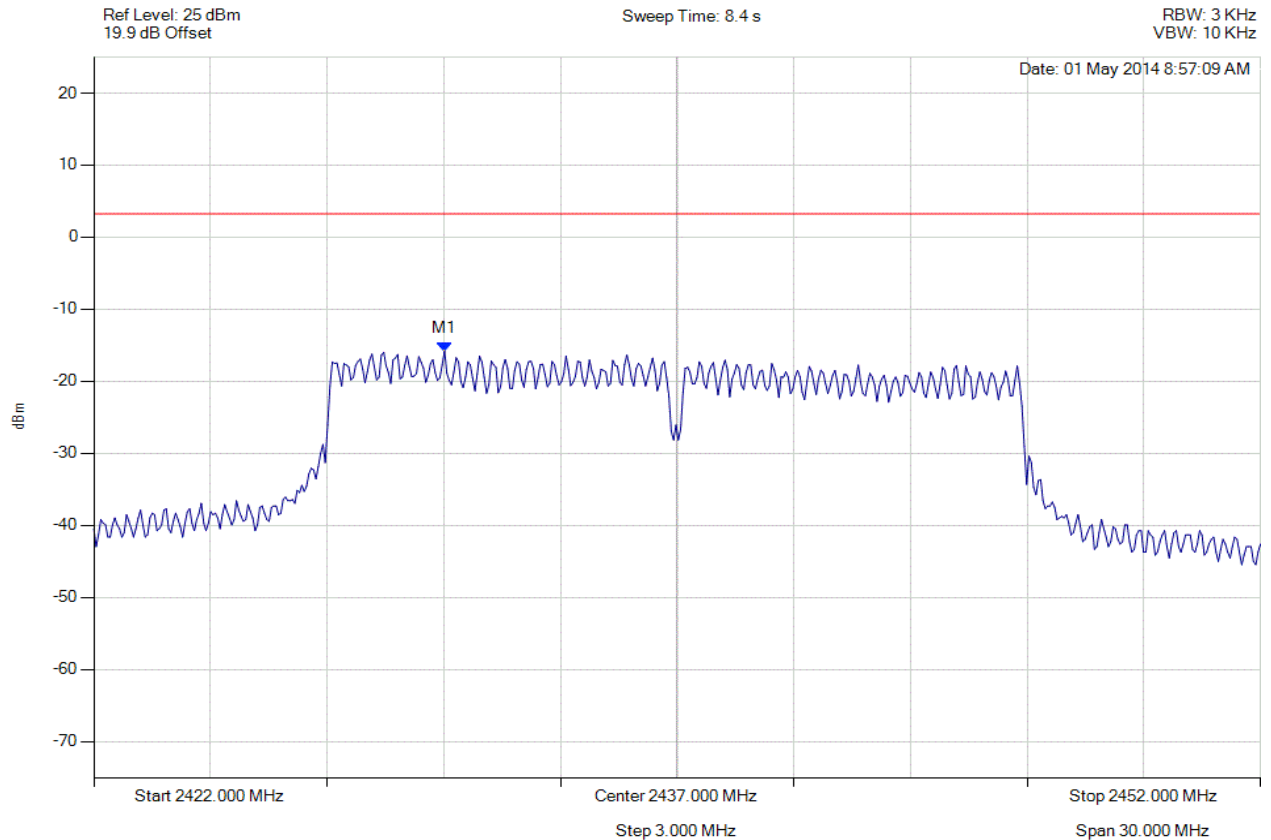

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2431.018 MHz : -15.790 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 123 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

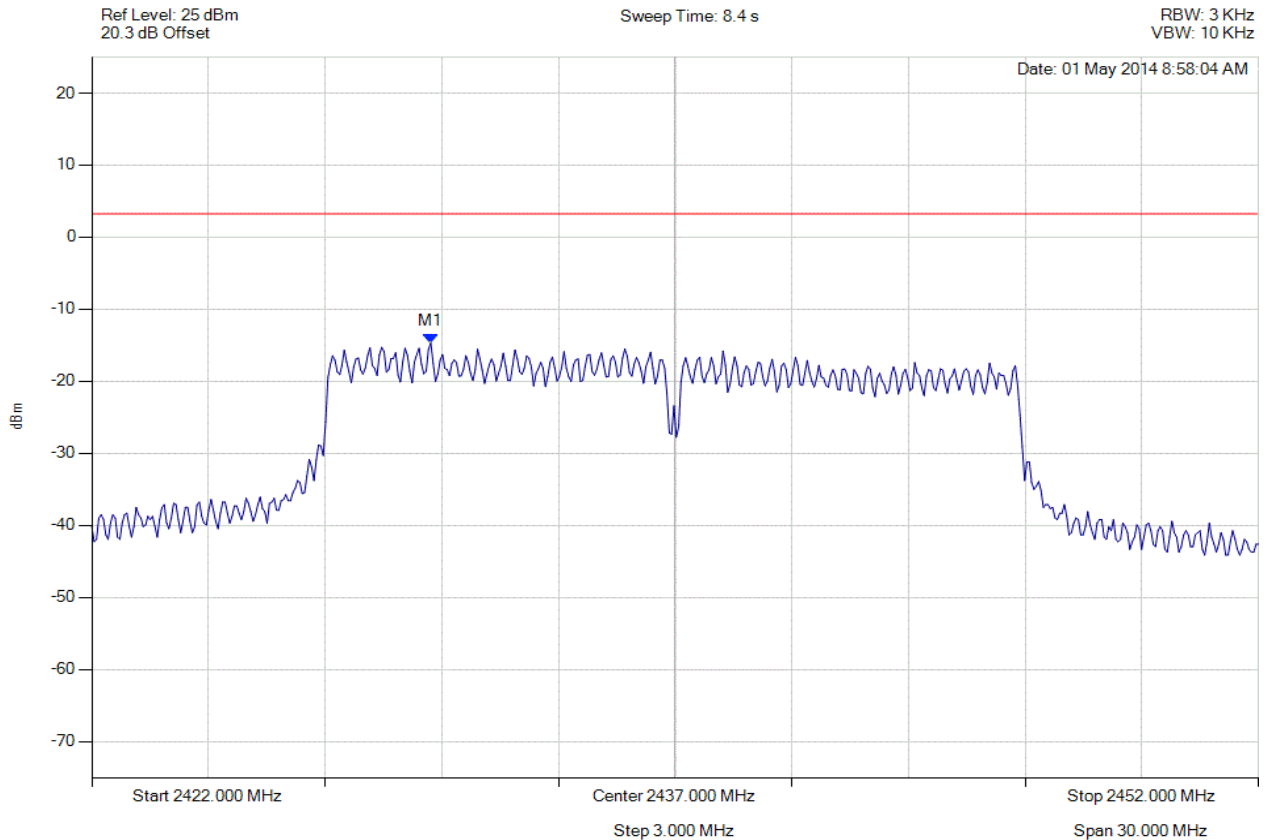

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2430.717 MHz : -14.690 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 124 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

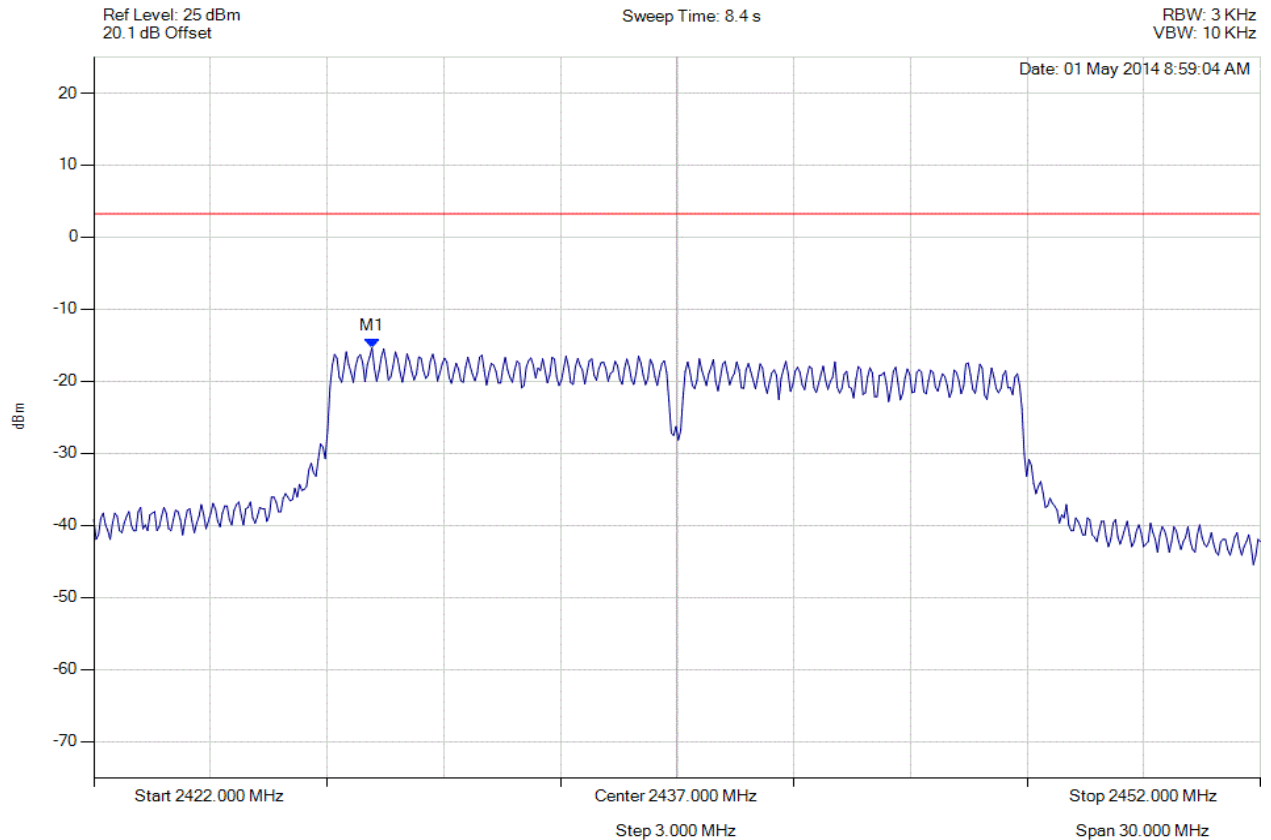

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2429.154 MHz : -15.342 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 125 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2437.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

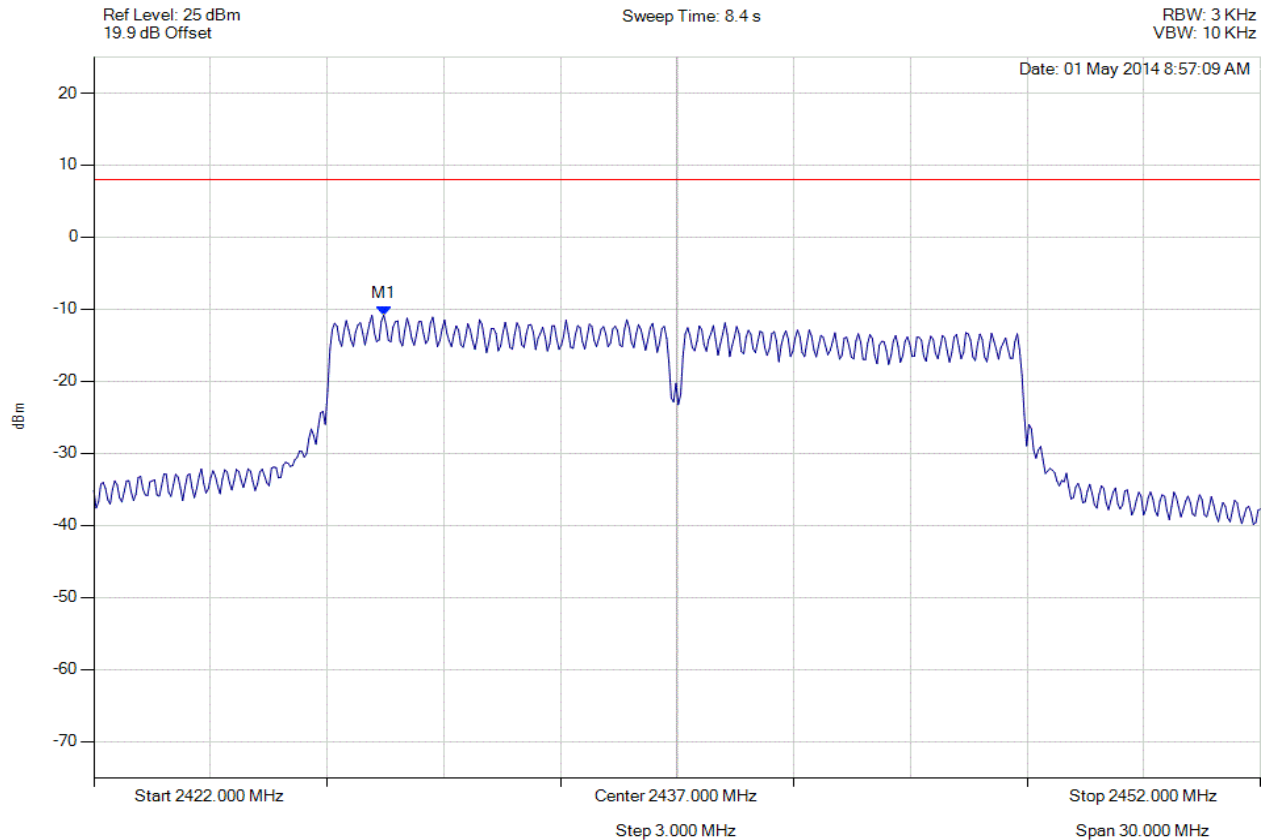

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2429.500 MHz : -10.815 dBm M1 + DCCF : 2429.500 MHz : -10.572 dBm Duty Cycle Correction Factor : +0.24 dB	Limit: ≤ 8.0 dBm Margin: -18.5 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 126 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

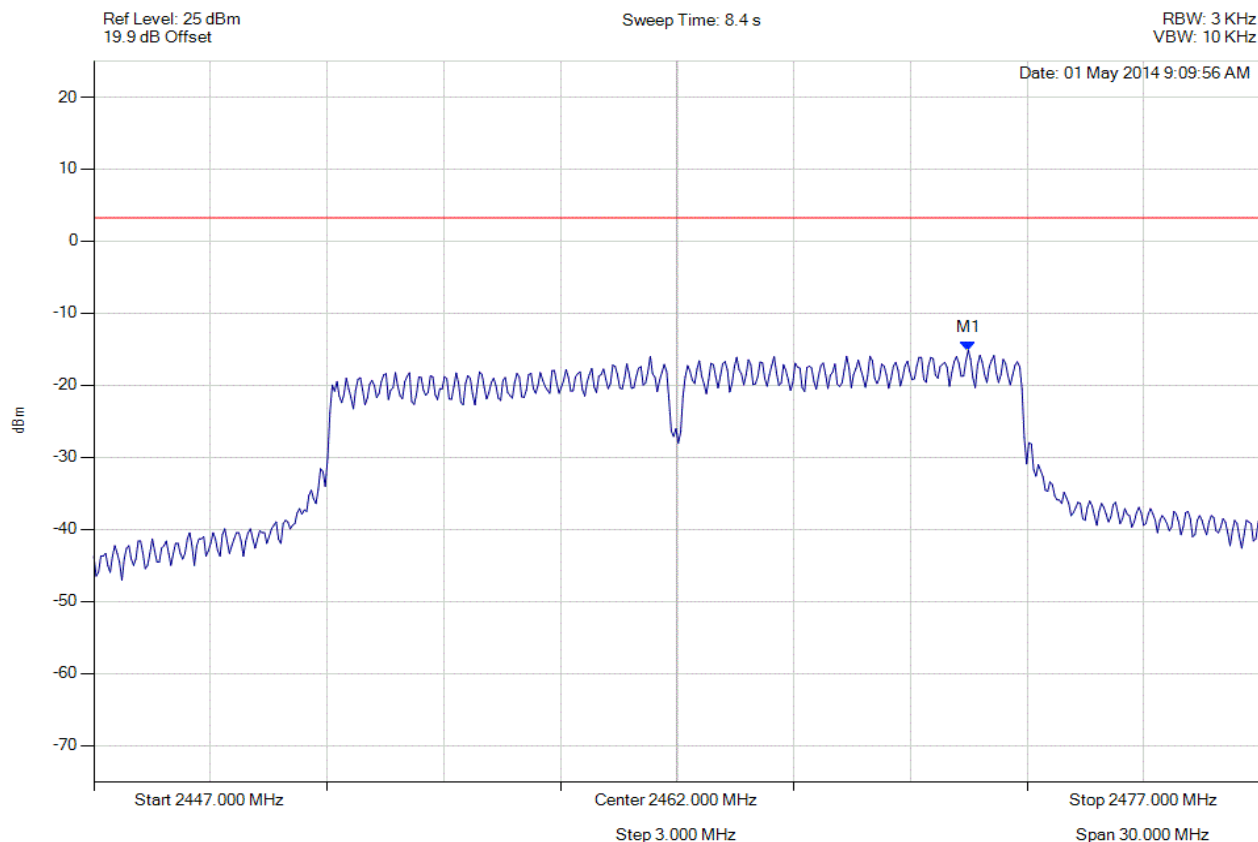

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2469.485 MHz : -15.134 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 127 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

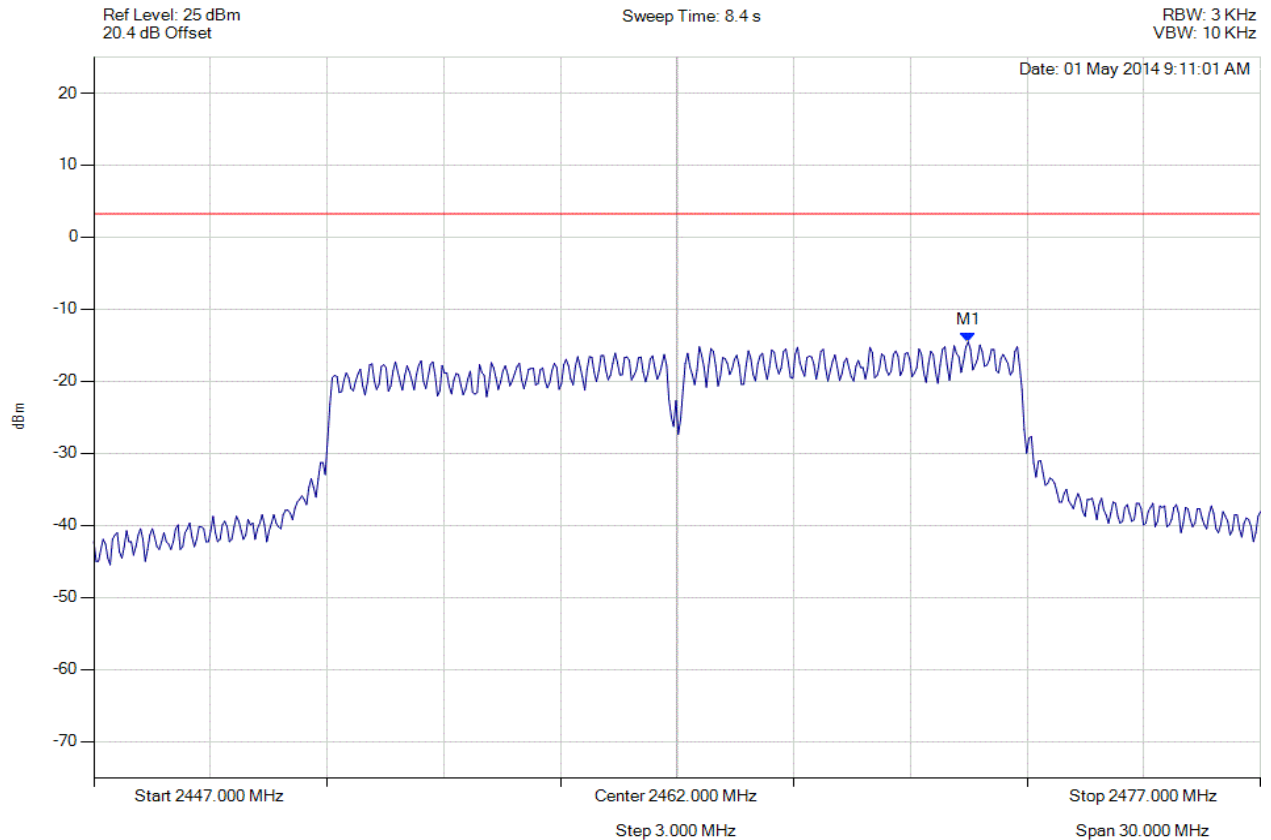

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2469.485 MHz : -14.537 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 128 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

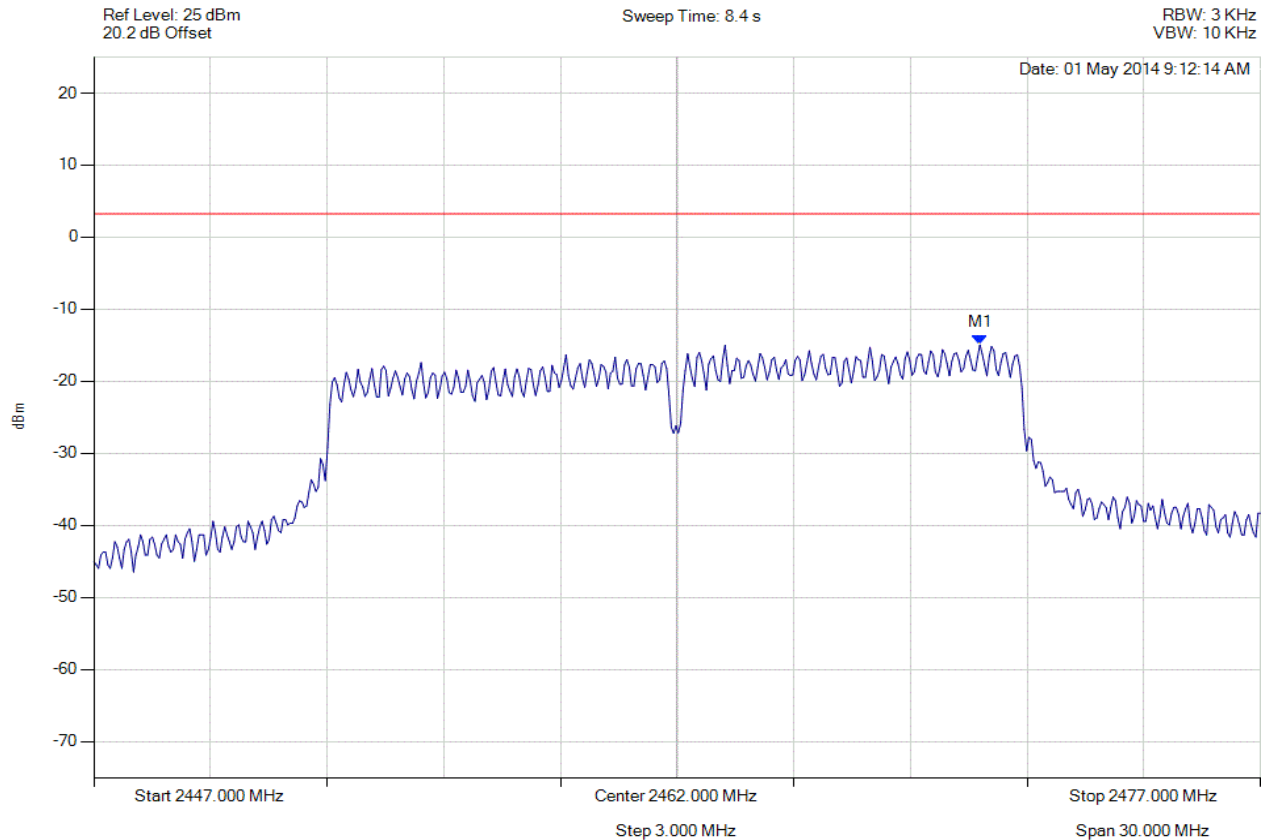

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2469.786 MHz : -14.945 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 129 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-20, Channel: 2462.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

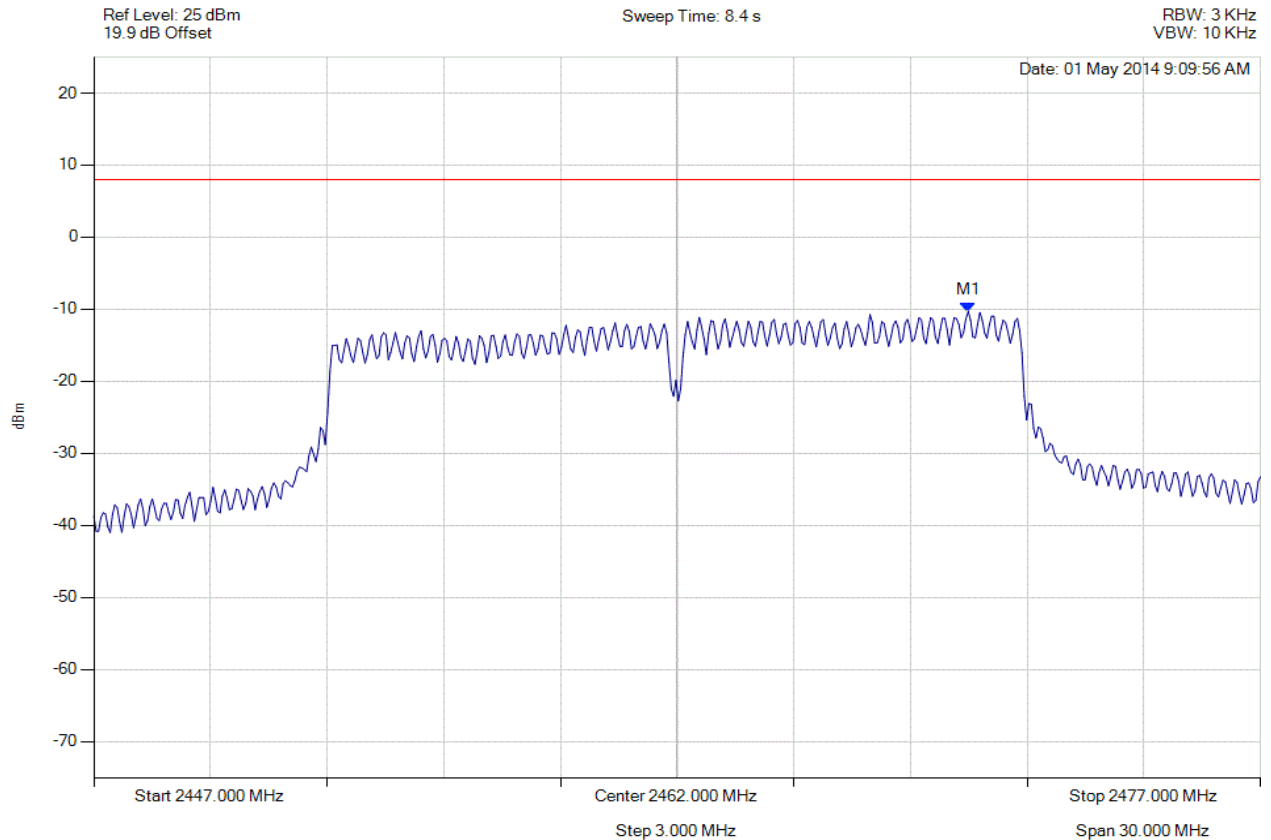

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2469.500 MHz : -10.330 dBm M1 + DCCF : 2469.500 MHz : -10.087 dBm Duty Cycle Correction Factor : +0.24 dB	Limit: ≤ 8.0 dBm Margin: -18.1 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 130 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

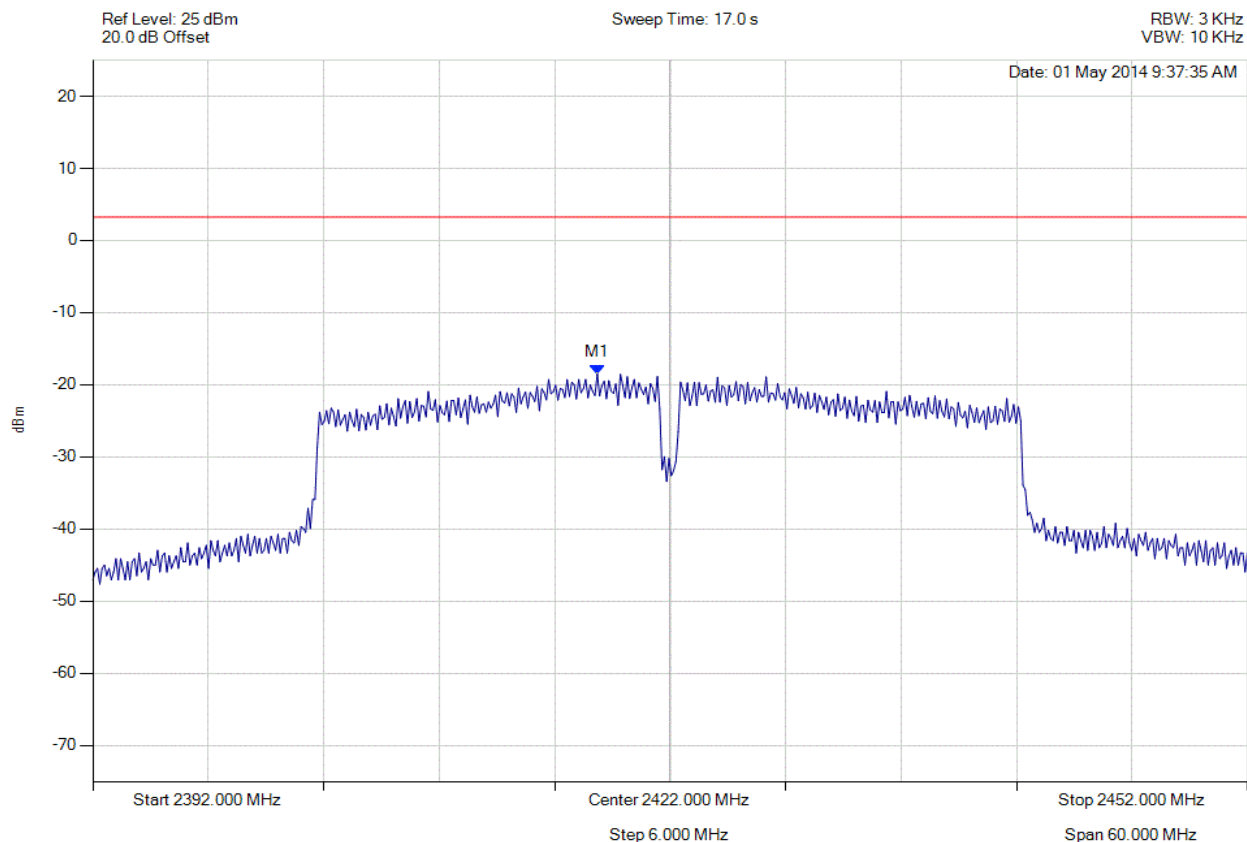

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2418.212 MHz : -18.481 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 131 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

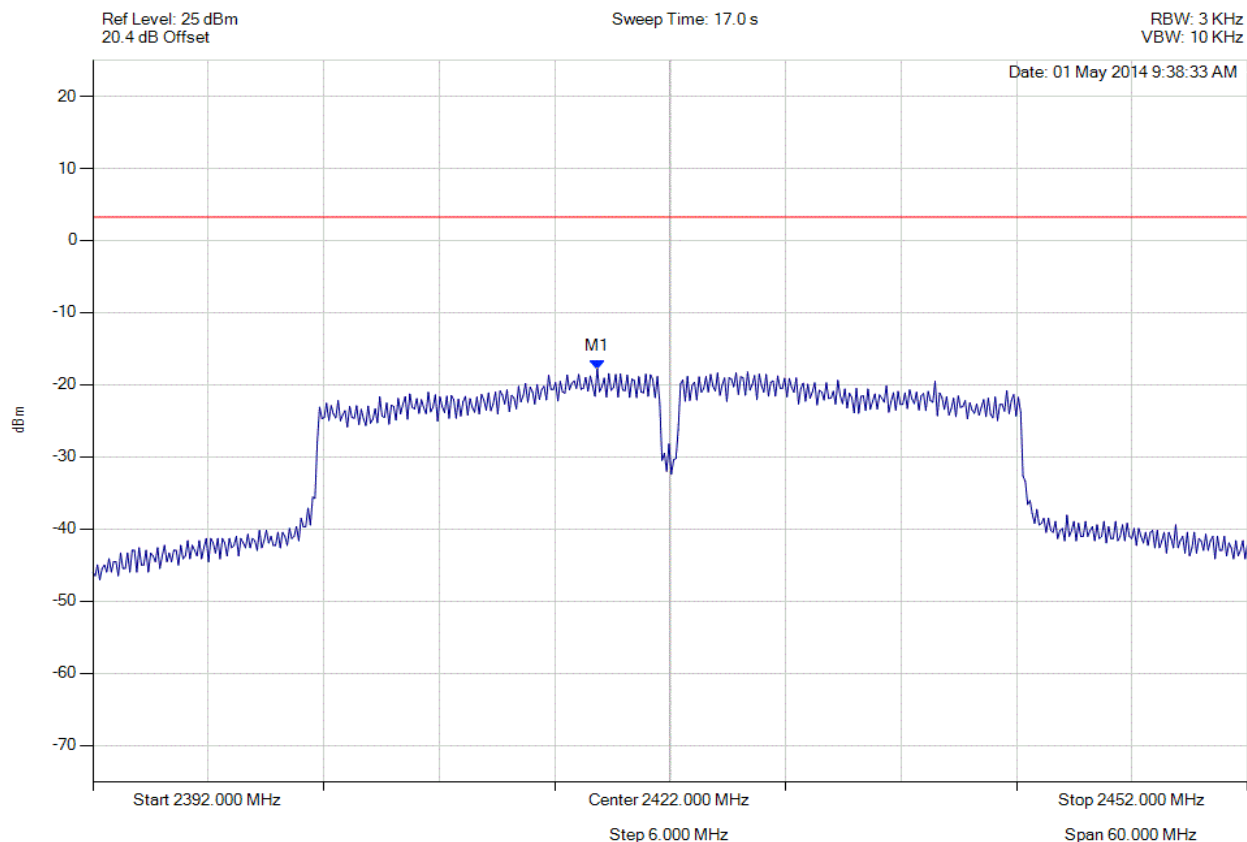

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2418.212 MHz : -17.796 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 132 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

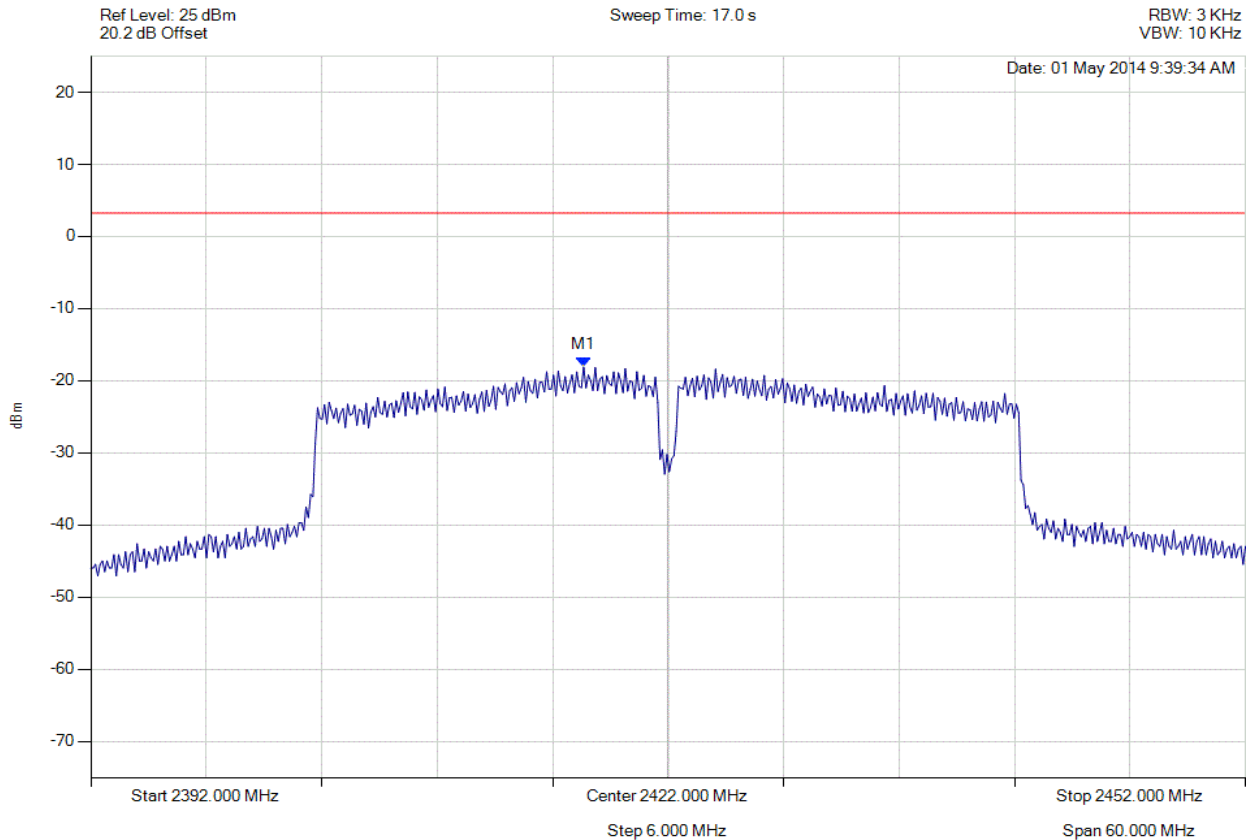

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2417.611 MHz : -18.100 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 133 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2422.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

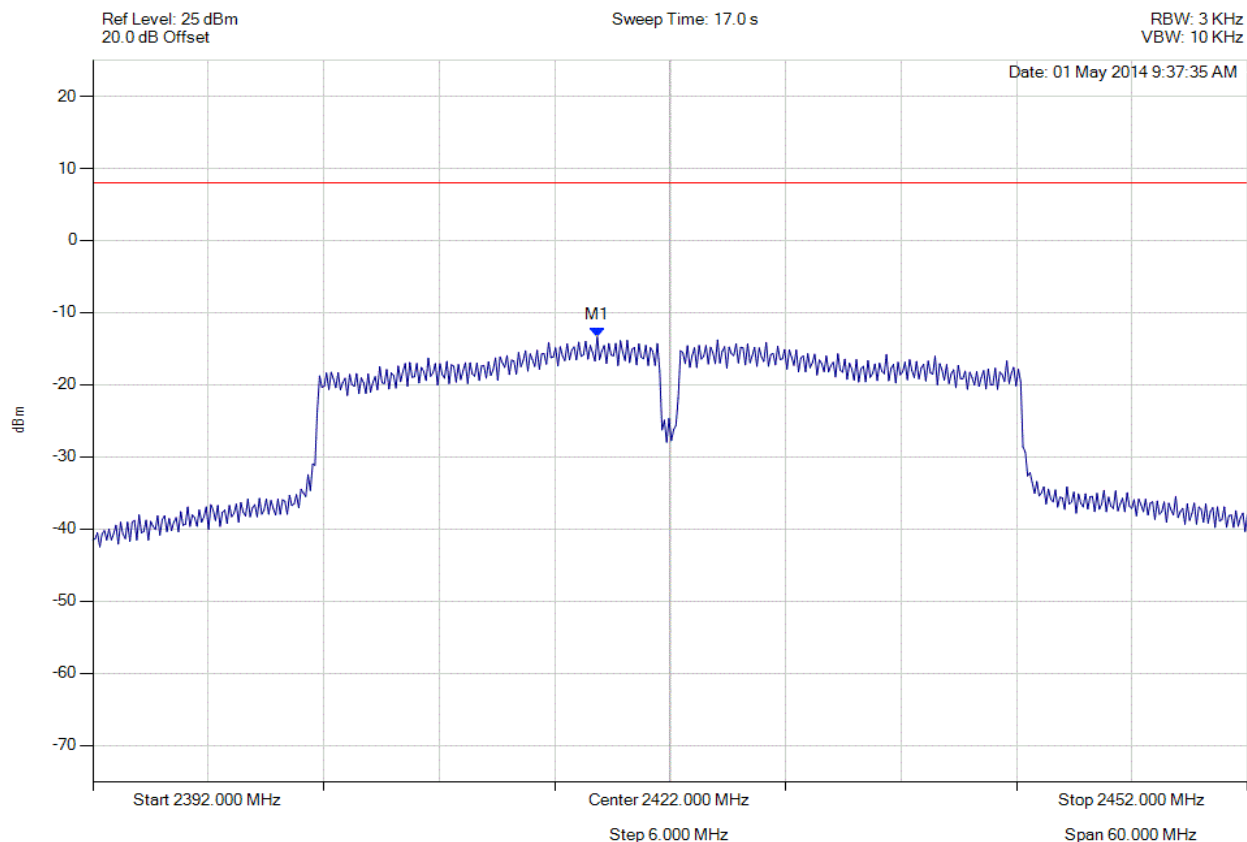

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2418.200 MHz : -13.373 dBm M1 + DCCF : 2418.200 MHz : -12.699 dBm Duty Cycle Correction Factor : +0.67 dB	Limit: ≤ 8.0 dBm Margin: -20.7 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 134 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

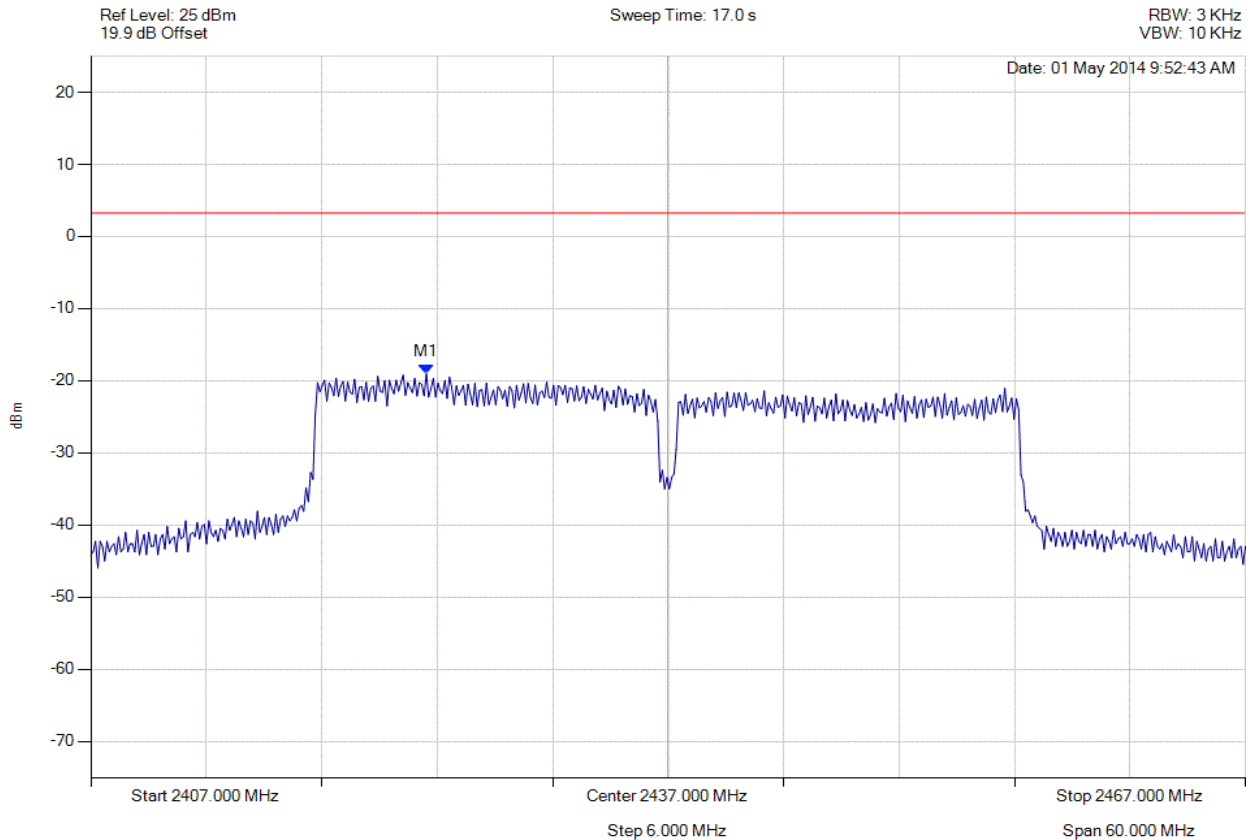

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.435 MHz : -19.016 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 135 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

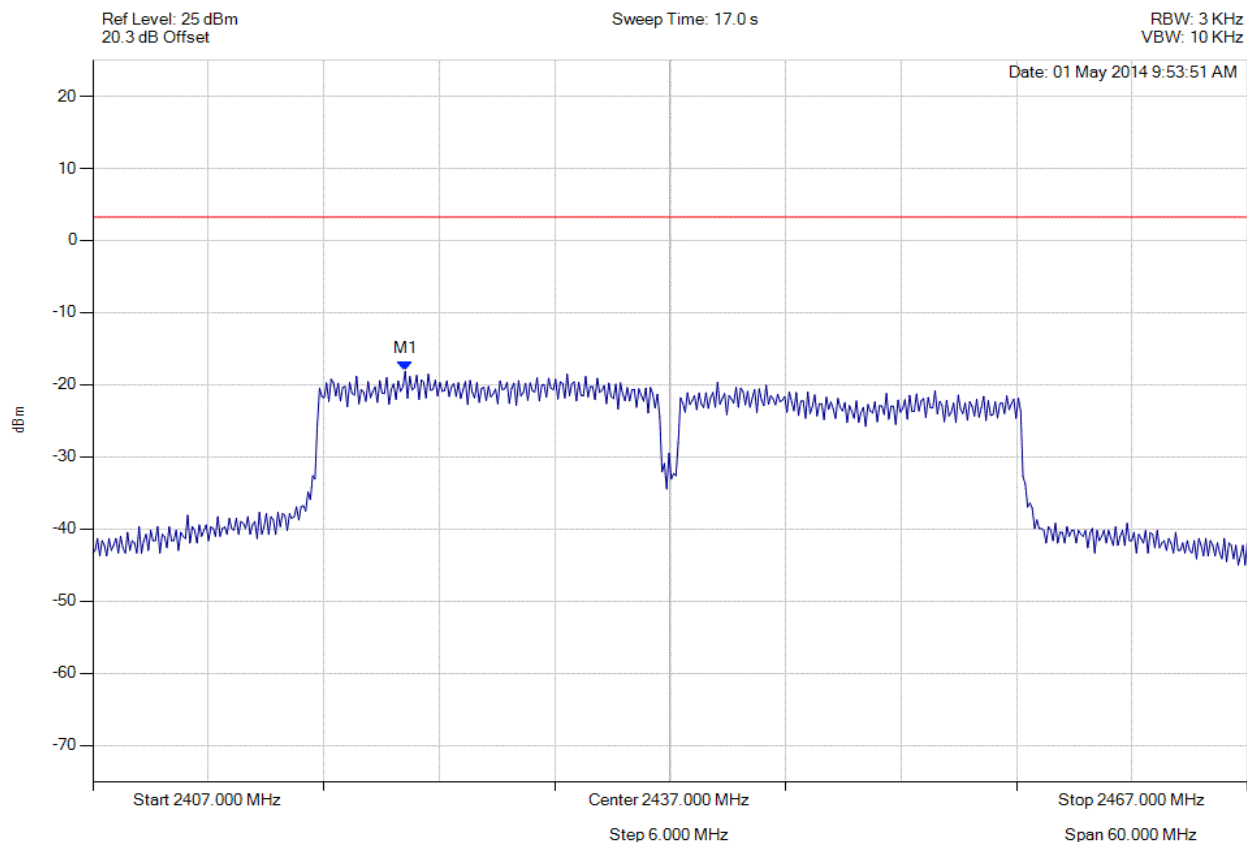

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2423.232 MHz : -18.121 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 136 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

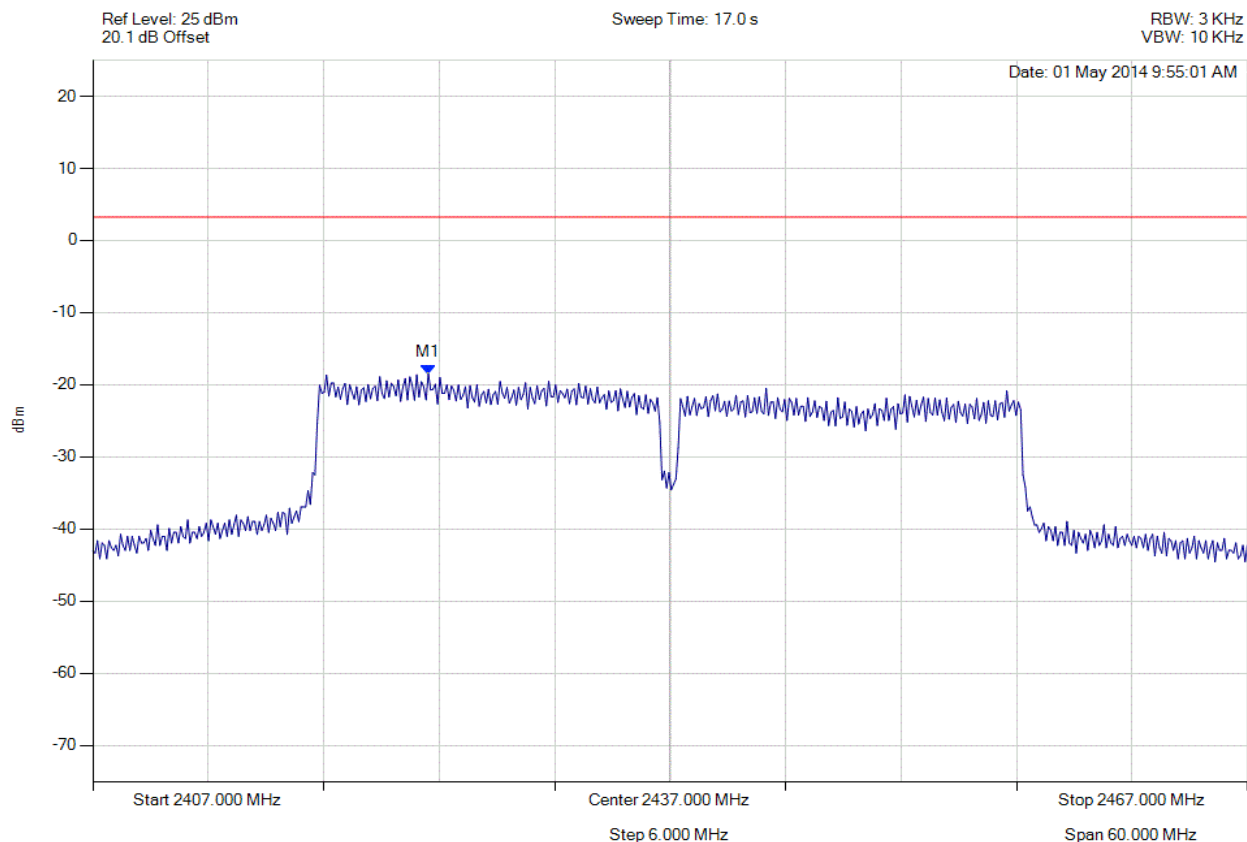

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.435 MHz : -18.481 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 137 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2437.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

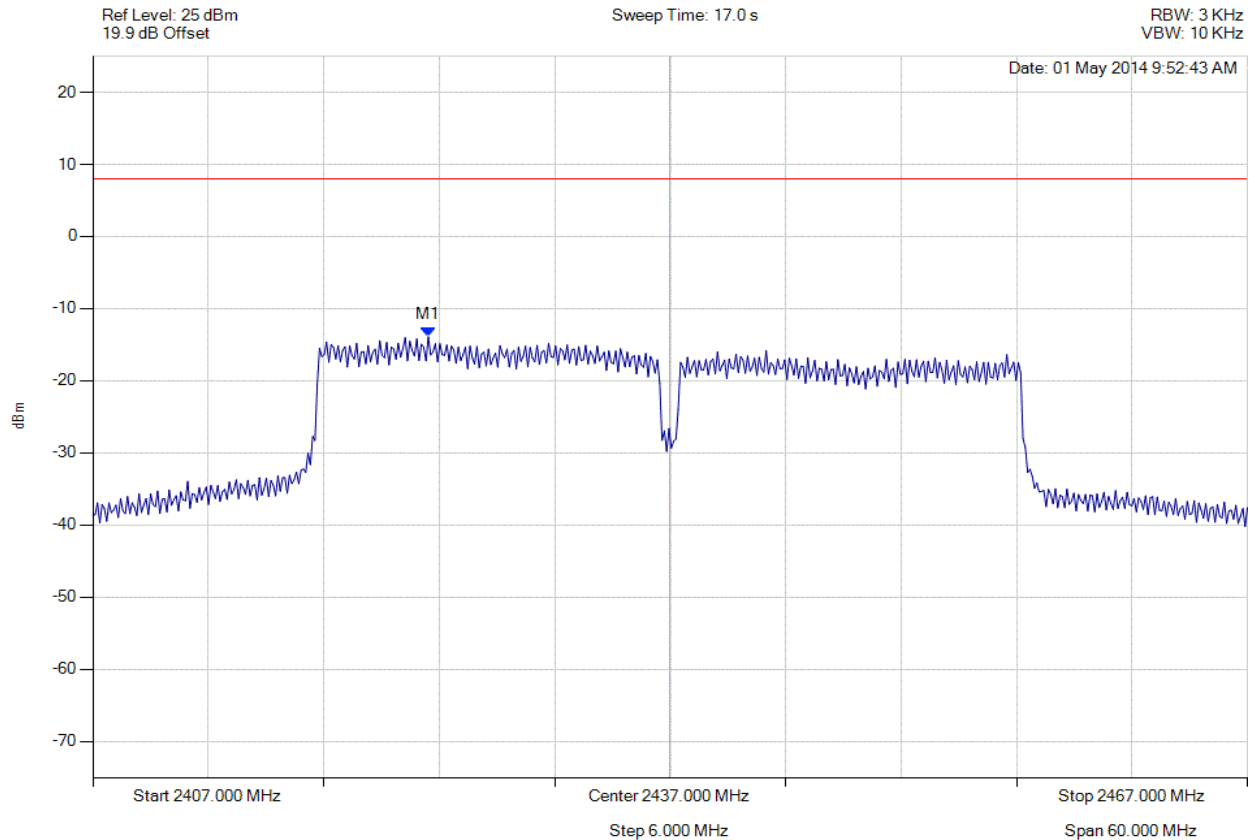

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2424.400 MHz : -13.903 dBm M1 + DCCF : 2424.400 MHz : -13.229 dBm Duty Cycle Correction Factor : +0.67 dB	Limit: ≤ 8.0 dBm Margin: -21.2 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 138 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

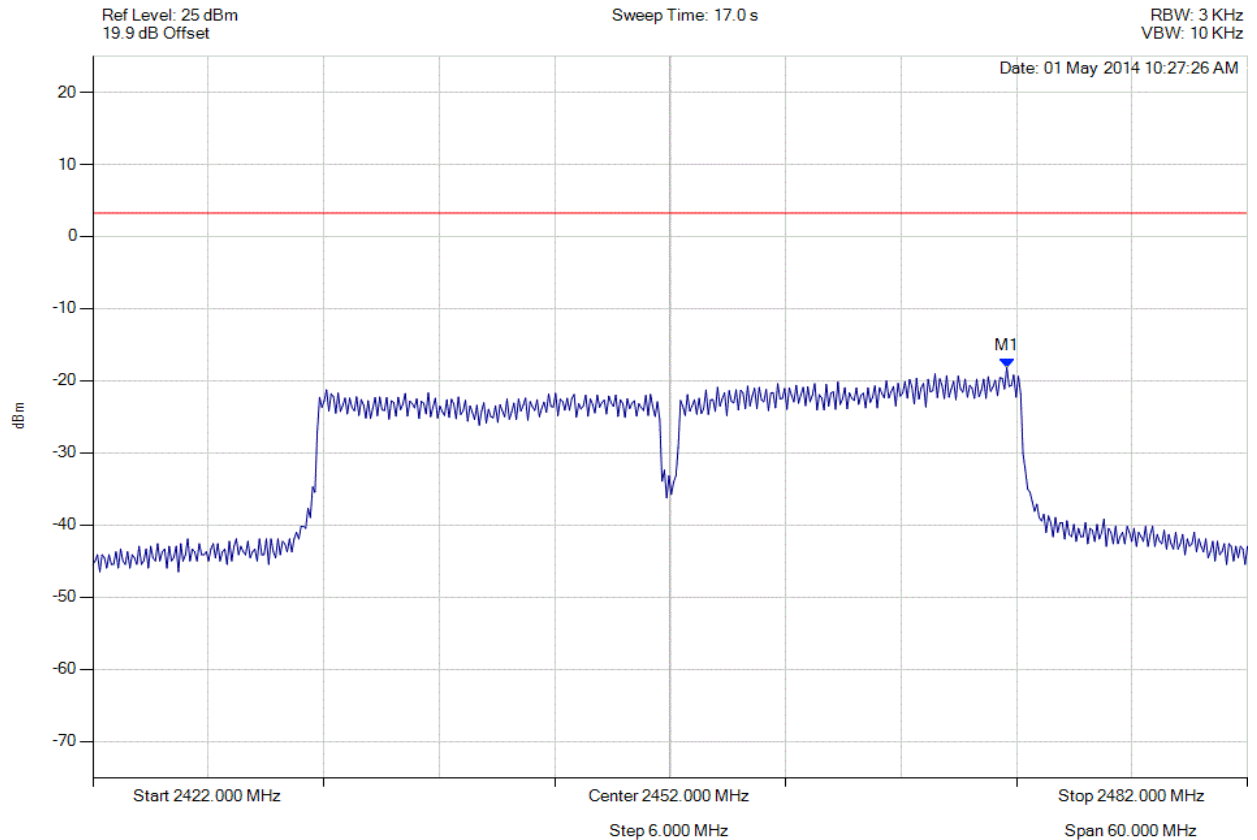

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2469.495 MHz : -18.163 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 139 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

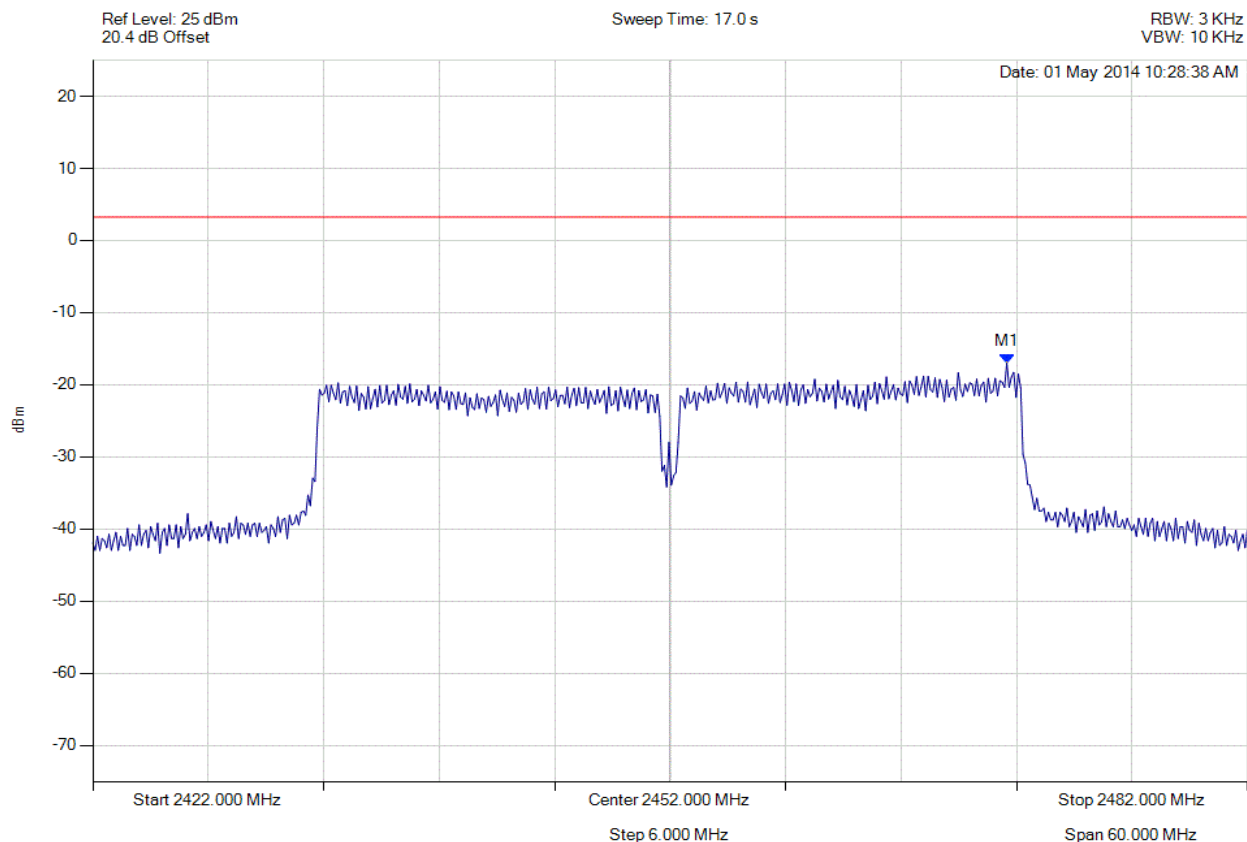

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2469.495 MHz : -16.995 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 140 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

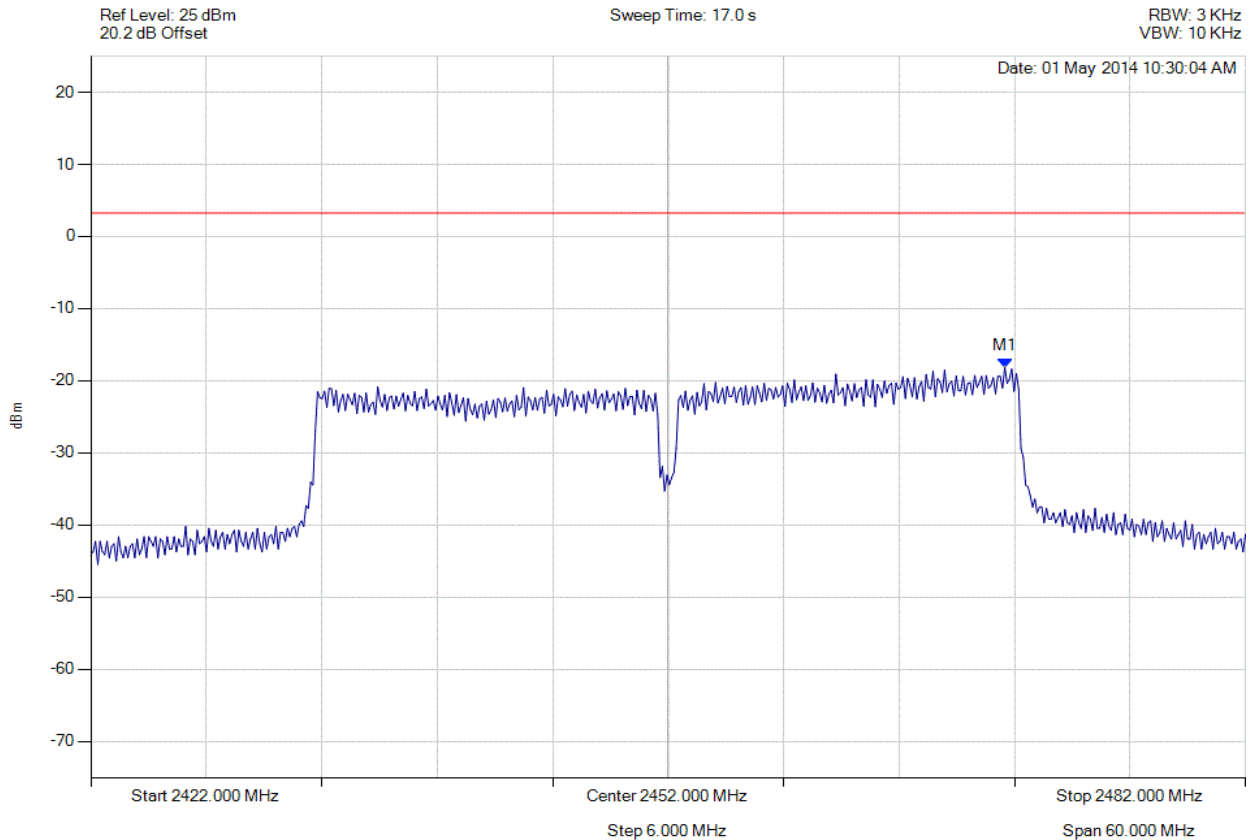

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2469.495 MHz : -18.142 dBm	Limit: ≤ 3.229 dBm

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 141 of 250



POWER SPECTRAL DENSITY - AVERAGE

Variant: 802.11n HT-40, Channel: 2452.00 MHz, SUM, Temp: Ambient, Voltage: 3.3 Vdc

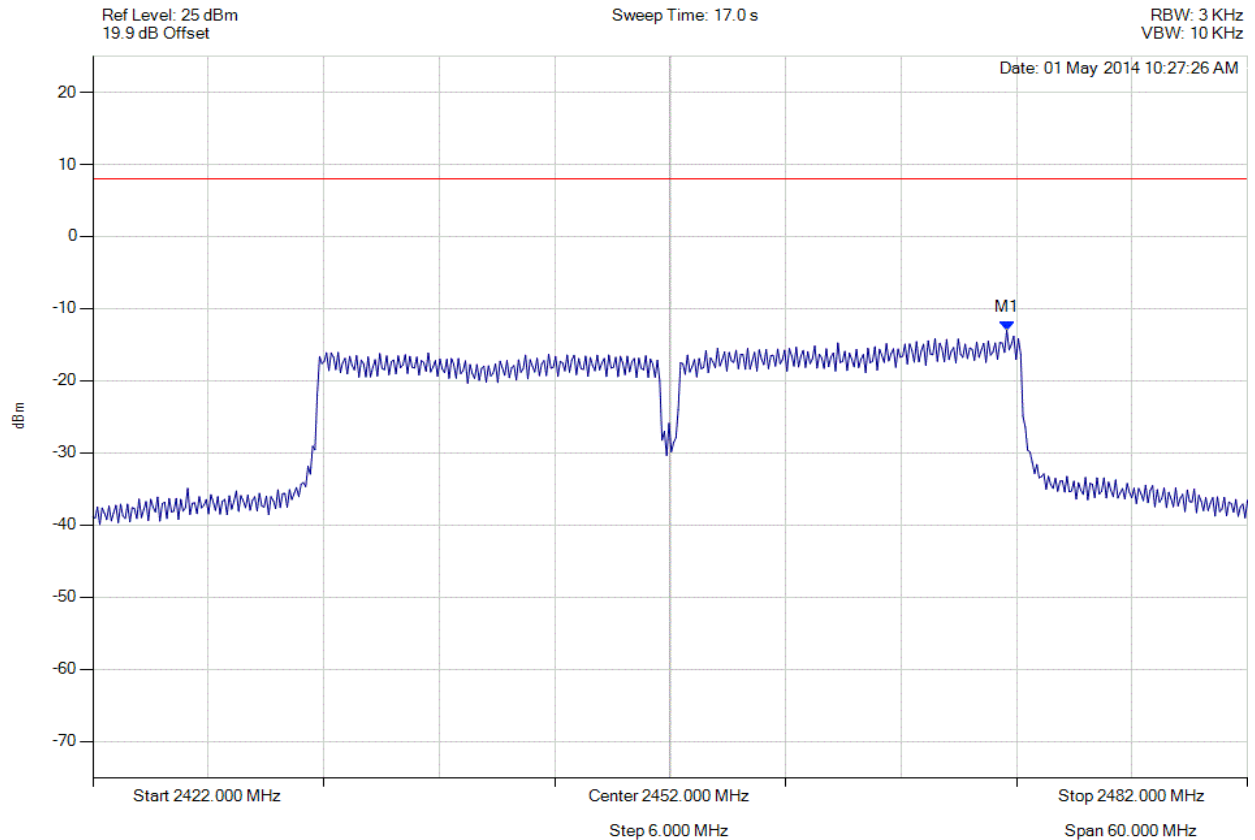

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = AVERAGE Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2469.500 MHz : -12.960 dBm M1 + DCCF : 2469.500 MHz : -12.286 dBm Duty Cycle Correction Factor : +0.67 dB	Limit: ≤ 8.0 dBm Margin: -20.3 dB

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 142 of 250

A.1.2. 6 dB & 99% Bandwidth



6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

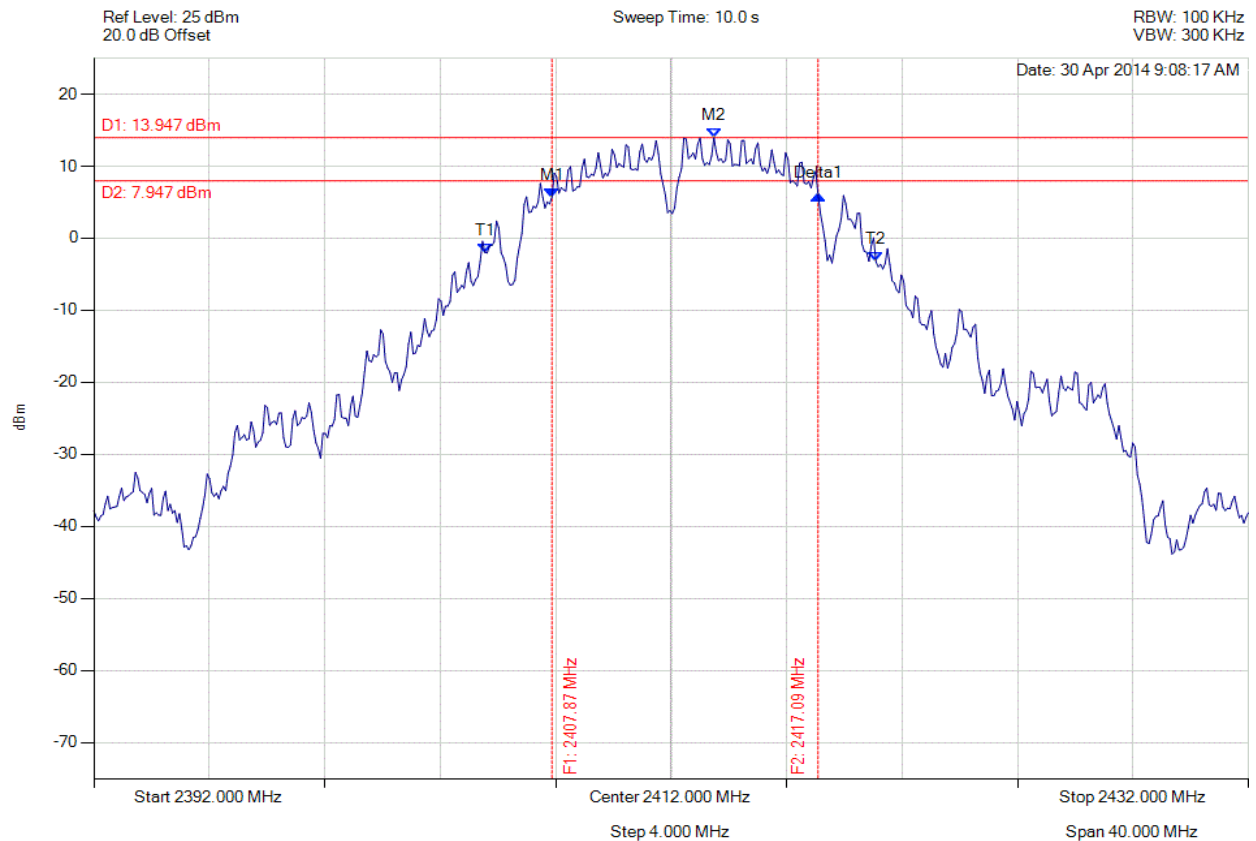

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2407.872 MHz : 5.708 dBm M2 : 2413.483 MHz : 13.947 dBm Delta1 : 9.218 MHz : 0.307 dB T1 : 2405.547 MHz : -1.980 dBm T2 : 2419.094 MHz : -3.255 dBm OBW : 13.547 MHz	Measured 6 dB Bandwidth: 9.218 MHz Limit: ≥ 500.0 kHz Margin: -8.72 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 143 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

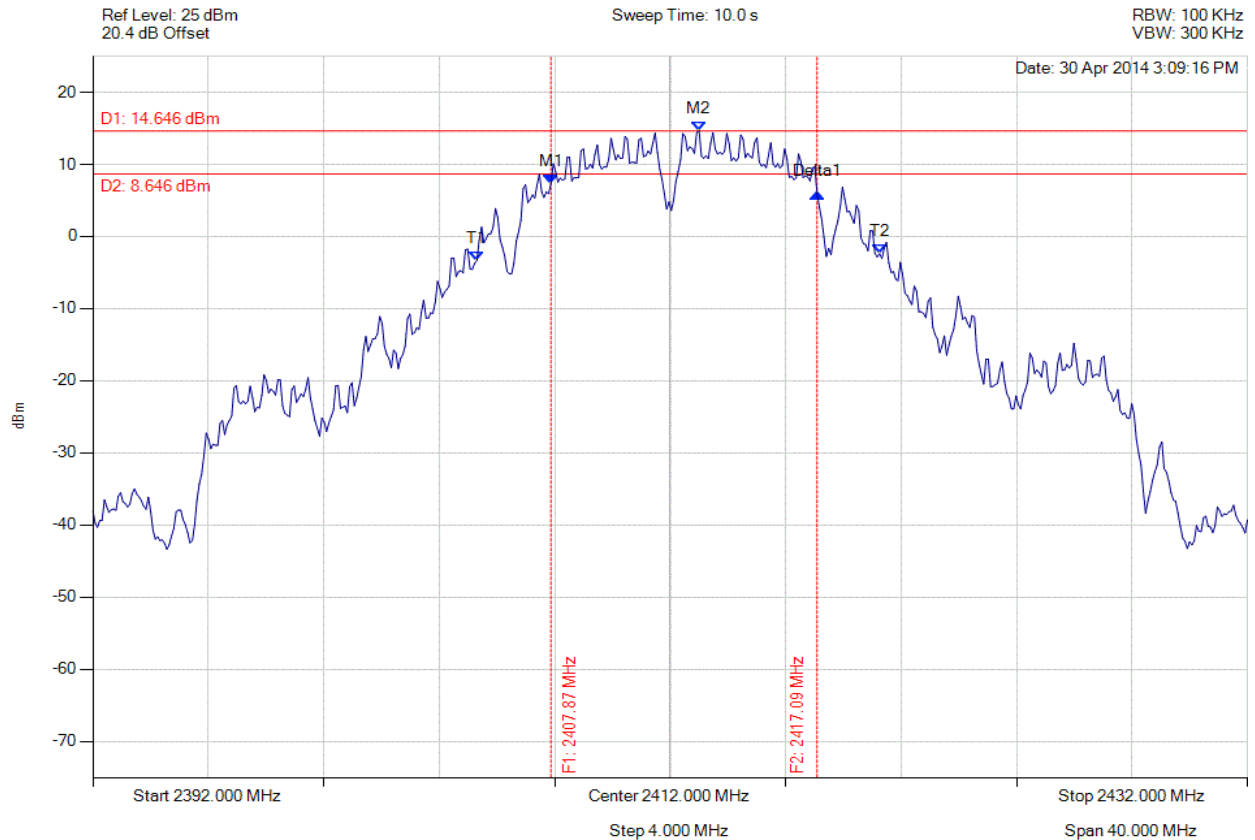

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2407.872 MHz : 7.359 dBm M2 : 2413.002 MHz : 14.646 dBm Delta1 : 9.218 MHz : -1.432 dB T1 : 2405.307 MHz : -3.312 dBm T2 : 2419.255 MHz : -2.384 dBm OBW : 13.948 MHz	Measured 6 dB Bandwidth: 9.218 MHz Limit: ≥ 500.0 kHz Margin: -8.72 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 144 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

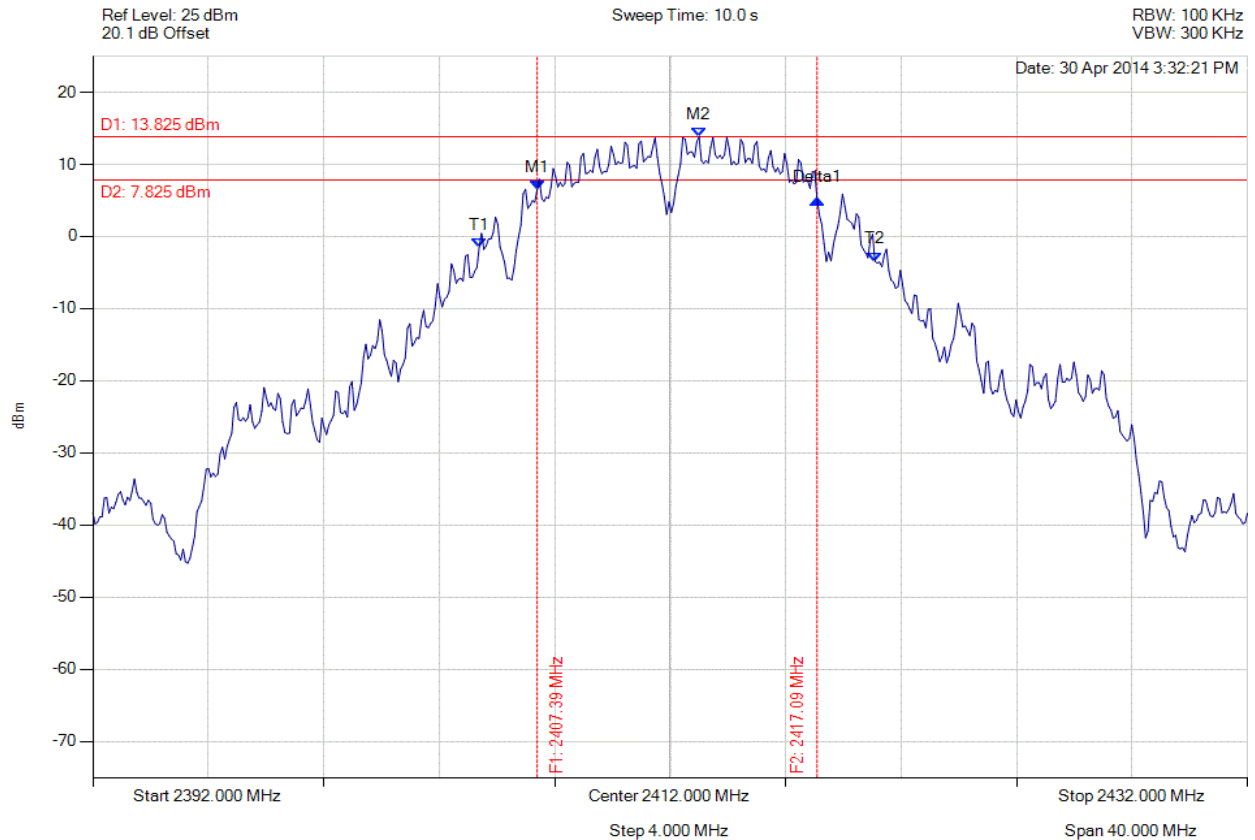

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2407.391 MHz : 6.517 dBm M2 : 2413.002 MHz : 13.825 dBm Delta1 : 9.699 MHz : -1.399 dB T1 : 2405.387 MHz : -1.471 dBm T2 : 2419.094 MHz : -3.452 dBm OBW : 13.707 MHz	Measured 6 dB Bandwidth: 9.699 MHz Limit: ≥ 500.0 kHz Margin: -9.20 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 145 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

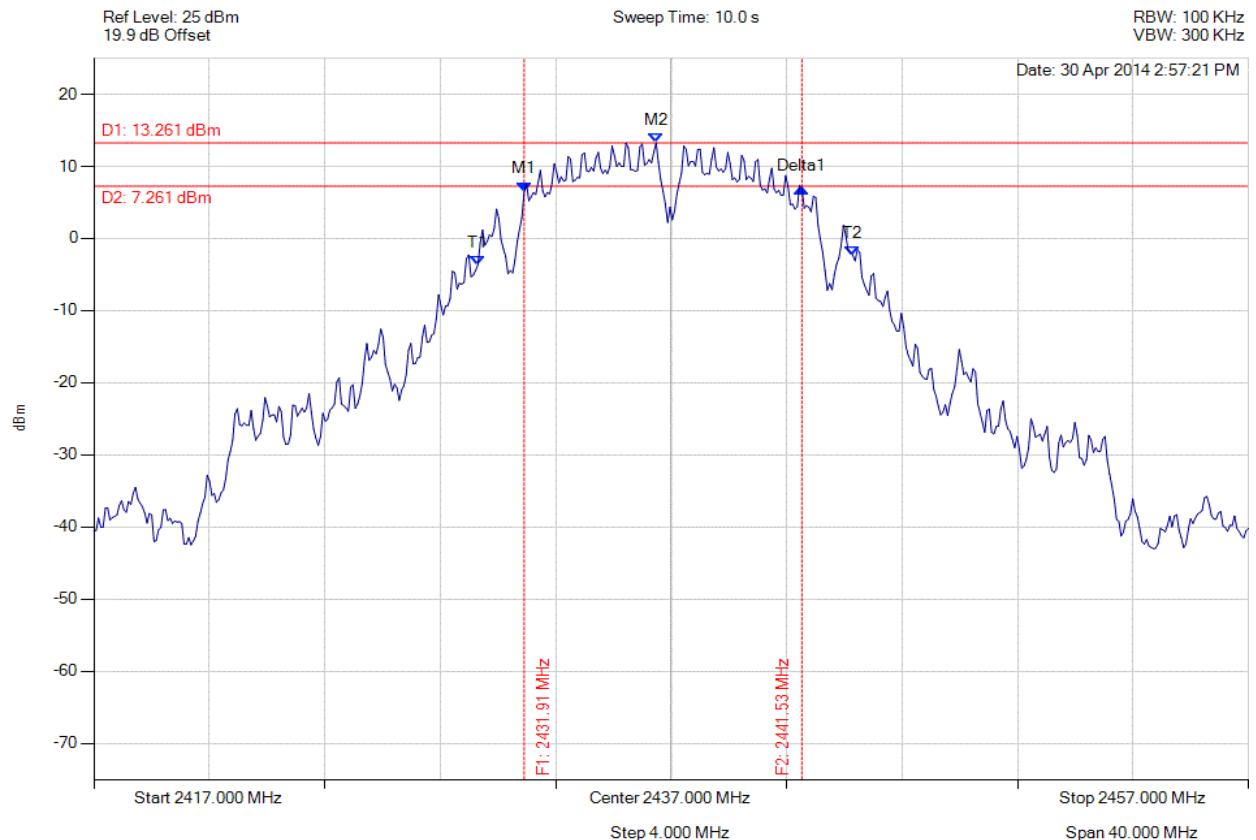

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2431.910 MHz : 6.550 dBm M2 : 2436.479 MHz : 13.261 dBm Delta1 : 9.619 MHz : 0.407 dB T1 : 2430.307 MHz : -3.649 dBm T2 : 2443.293 MHz : -2.358 dBm OBW : 12.986 MHz	Measured 6 dB Bandwidth: 9.619 MHz Limit: ≥ 500.0 kHz Margin: -9.12 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 146 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

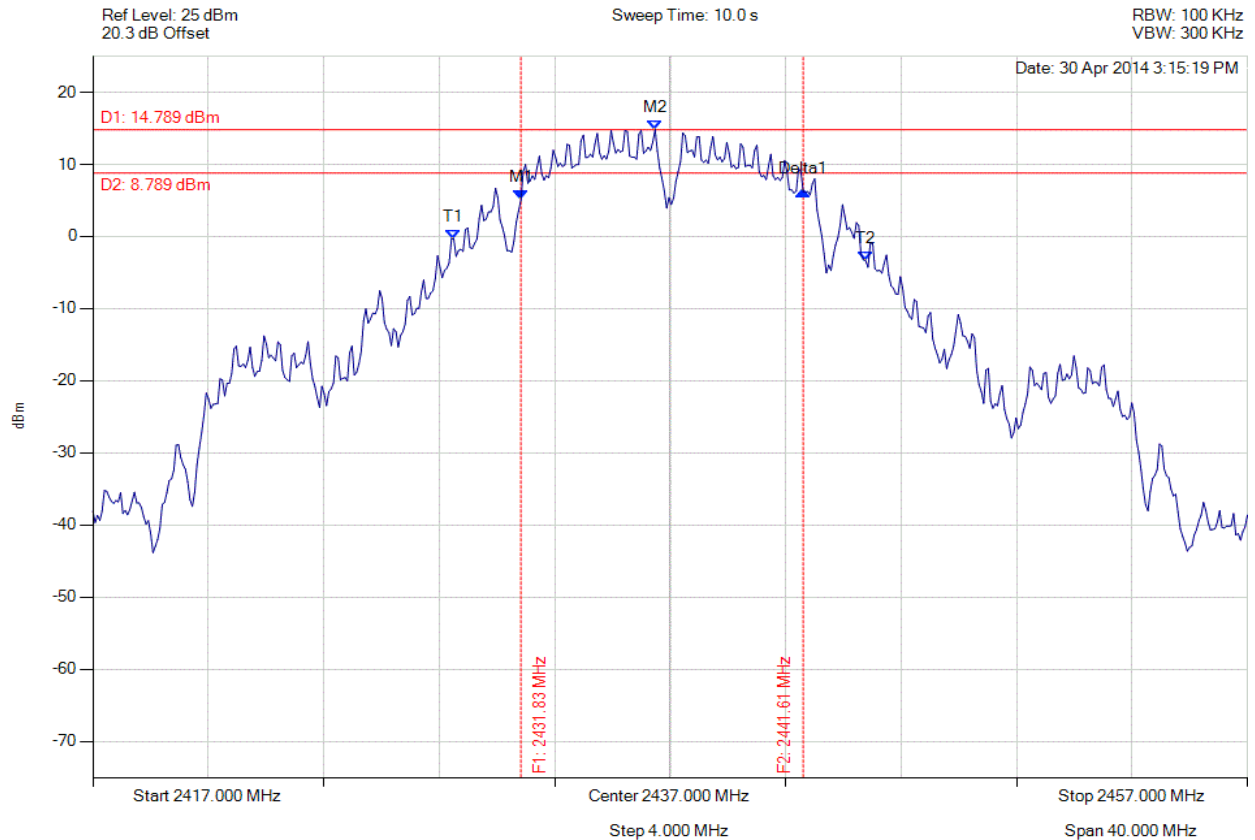

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2431.830 MHz : 5.059 dBm M2 : 2436.479 MHz : 14.789 dBm Delta1 : 9.780 MHz : 1.198 dB T1 : 2429.505 MHz : -0.338 dBm T2 : 2443.774 MHz : -3.367 dBm OBW : 14.269 MHz	Measured 6 dB Bandwidth: 9.780 MHz Limit: ≥ 500.0 kHz Margin: -9.28 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 147 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

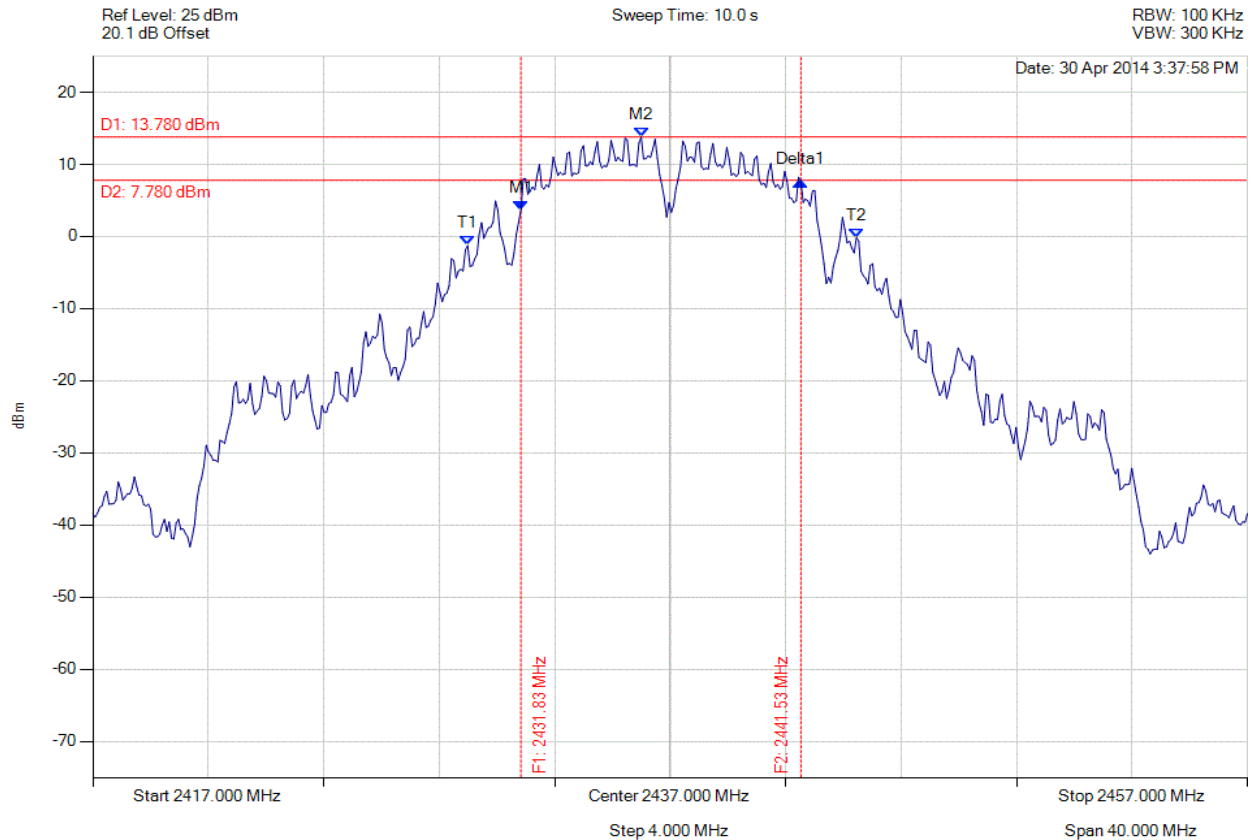

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2431.830 MHz : 3.644 dBm M2 : 2435.998 MHz : 13.780 dBm Delta1 : 9.699 MHz : 4.039 dB T1 : 2429.986 MHz : -1.278 dBm T2 : 2443.453 MHz : -0.157 dBm OBW : 13.467 MHz	Measured 6 dB Bandwidth: 9.699 MHz Limit: ≥ 500.0 kHz Margin: -9.20 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 148 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

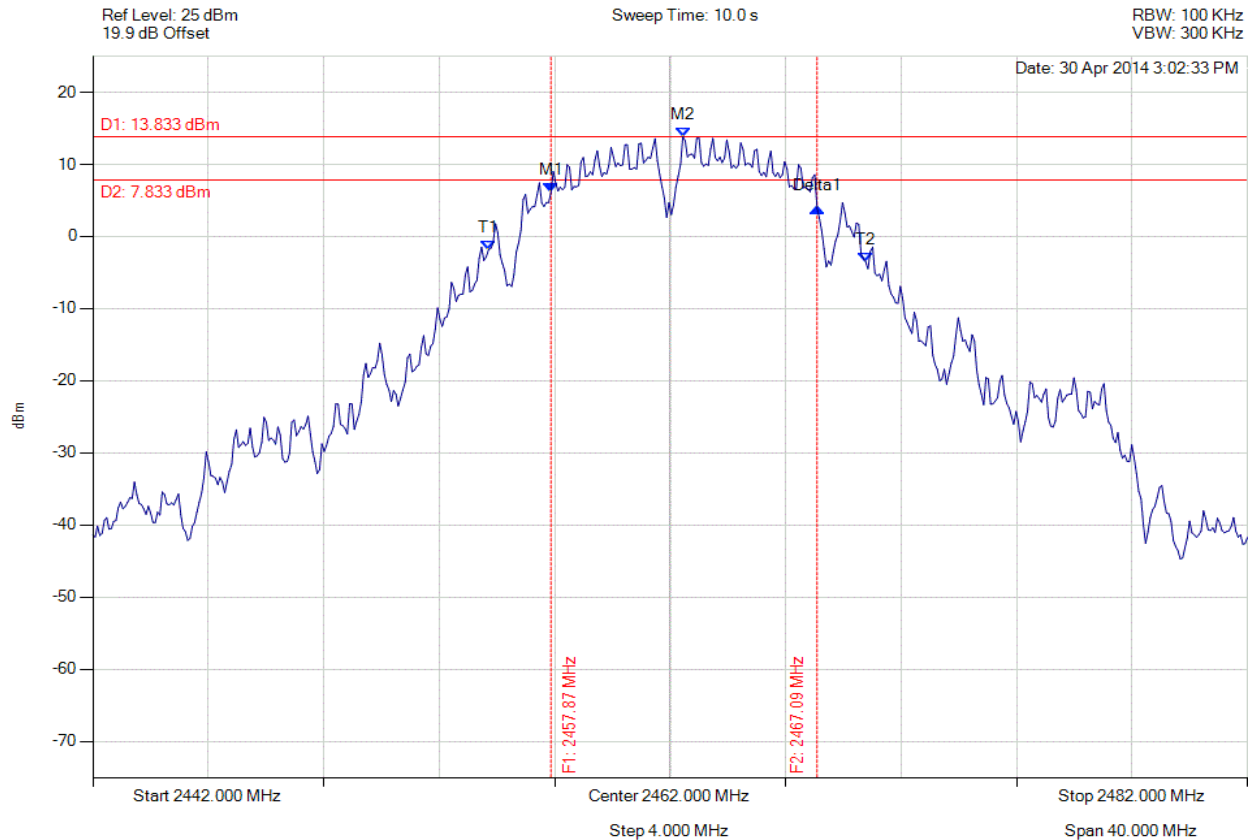

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2457.872 MHz : 6.068 dBm M2 : 2462.441 MHz : 13.833 dBm Delta1 : 9.218 MHz : -2.166 dB T1 : 2455.707 MHz : -1.856 dBm T2 : 2468.774 MHz : -3.519 dBm OBW : 13.066 MHz	Measured 6 dB Bandwidth: 9.218 MHz Limit: ≥ 500.0 kHz Margin: -8.72 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 149 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

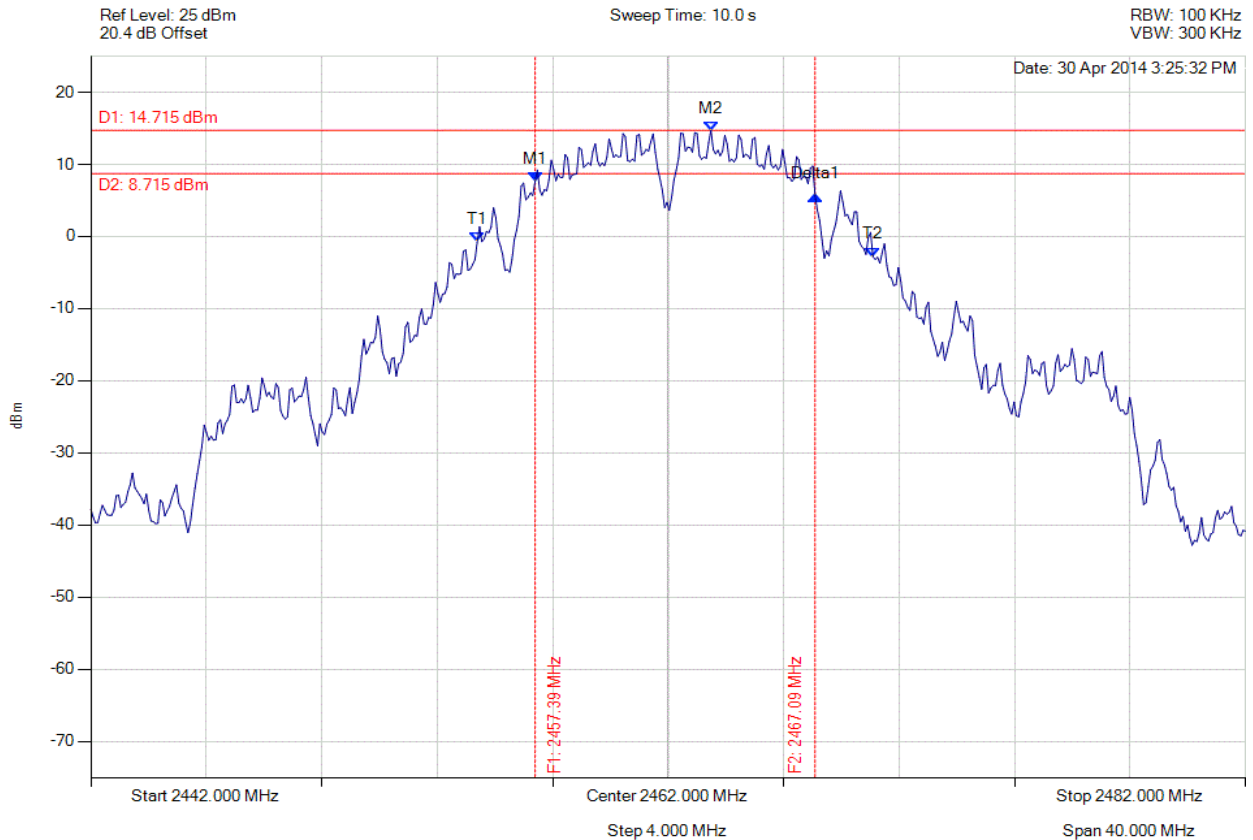

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2457.391 MHz : 7.654 dBm M2 : 2463.483 MHz : 14.715 dBm Delta1 : 9.699 MHz : -1.979 dB T1 : 2455.387 MHz : -0.774 dBm T2 : 2469.094 MHz : -2.781 dBm OBW : 13.707 MHz	Measured 6 dB Bandwidth: 9.699 MHz Limit: ≥ 500.0 kHz Margin: -9.20 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 150 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11b, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

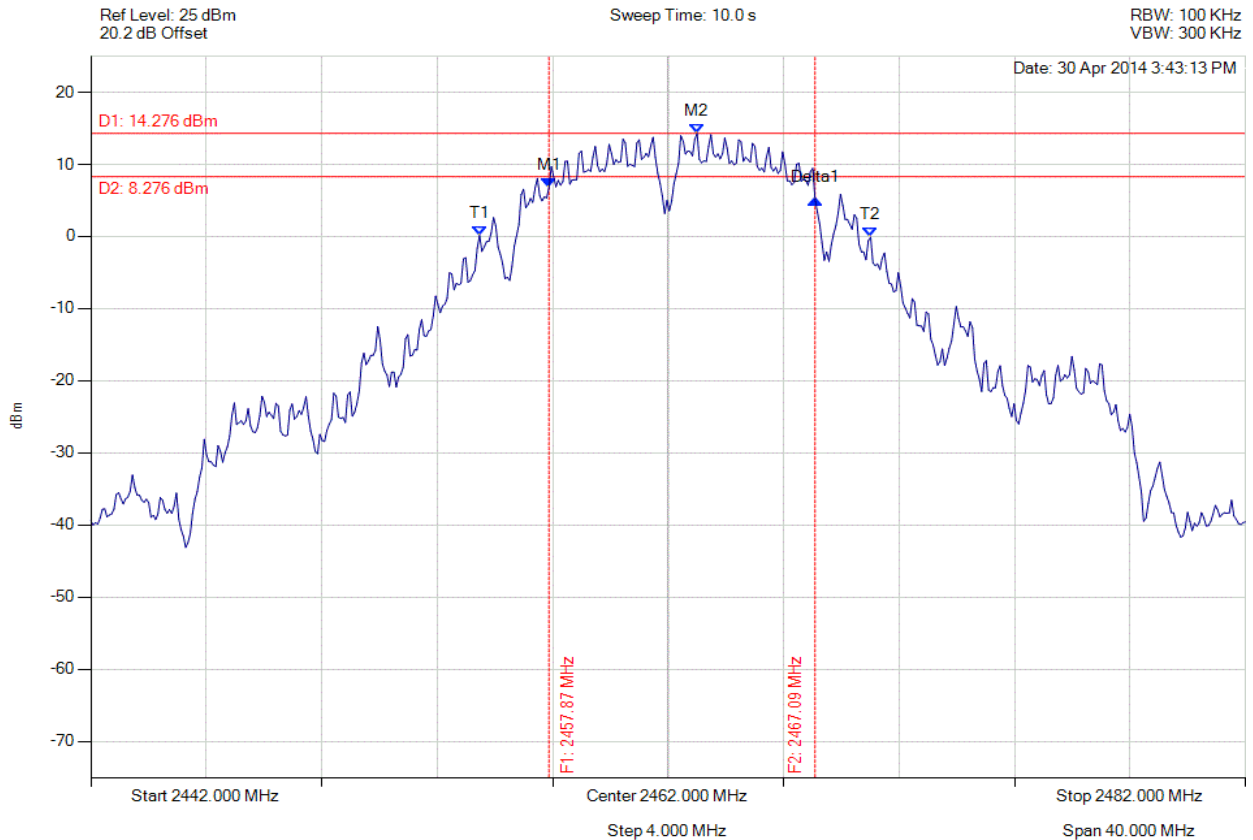

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2457.872 MHz : 6.745 dBm M2 : 2463.002 MHz : 14.276 dBm Delta1 : 9.218 MHz : -1.633 dB T1 : 2455.467 MHz : 0.168 dBm T2 : 2469.014 MHz : -0.090 dBm OBW : 13.547 MHz	Measured 6 dB Bandwidth: 9.218 MHz Limit: ≥ 500.0 kHz Margin: -8.72 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 151 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

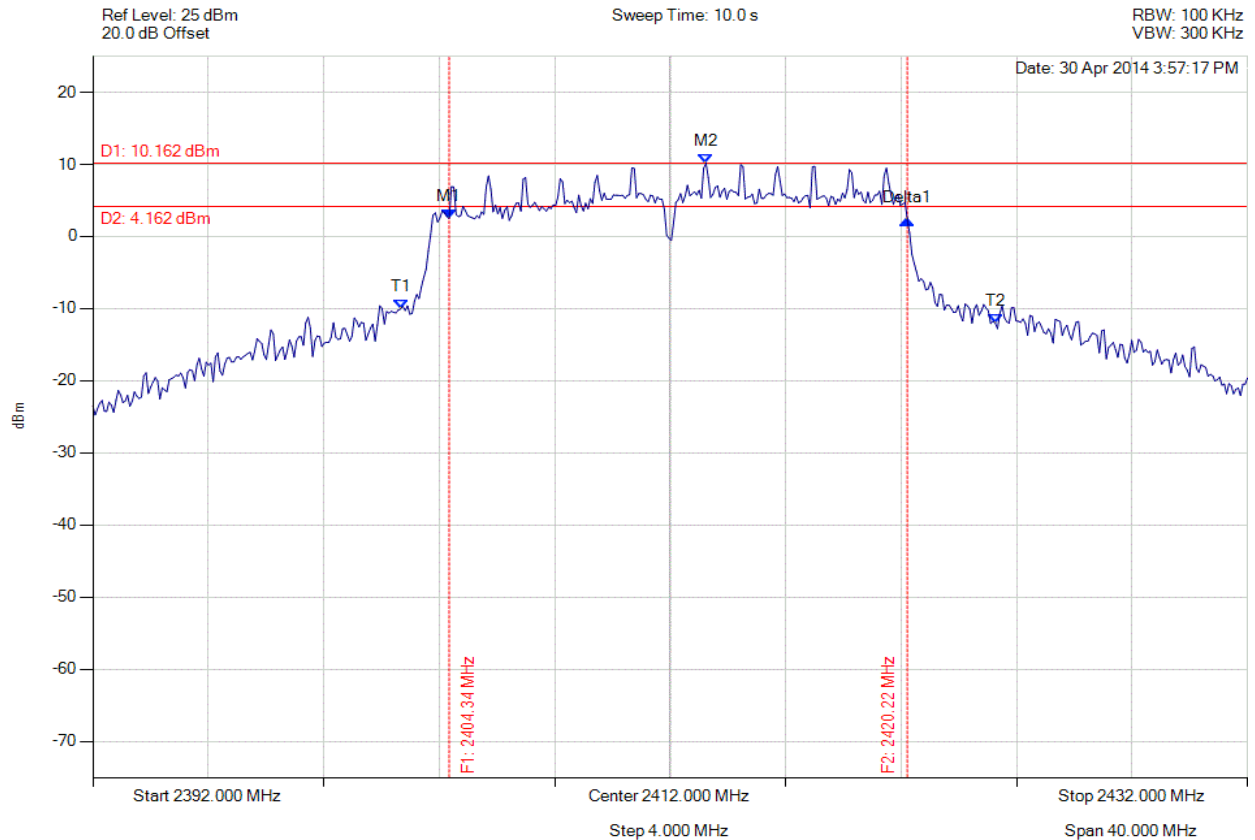

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2404.345 MHz : 2.513 dBm M2 : 2413.242 MHz : 10.162 dBm Delta1 : 15.872 MHz : -0.146 dB T1 : 2402.661 MHz : -10.037 dBm T2 : 2423.263 MHz : -11.984 dBm OBW : 20.601 MHz	Measured 6 dB Bandwidth: 15.872 MHz Limit: ≥500.0 kHz Margin: -15.37 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 152 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

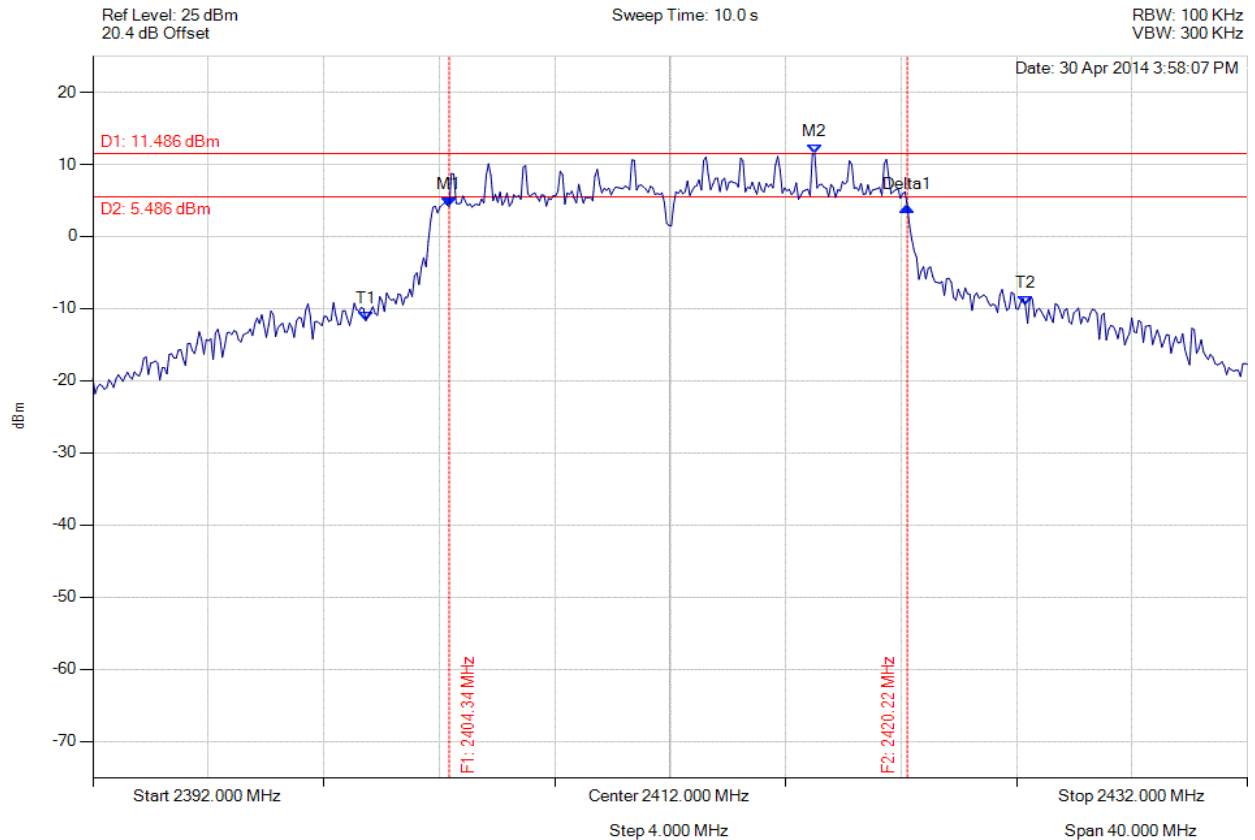

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2404.345 MHz : 4.160 dBm M2 : 2417.010 MHz : 11.486 dBm Delta1 : 15.872 MHz : -0.002 dB T1 : 2401.459 MHz : -11.687 dBm T2 : 2424.305 MHz : -9.543 dBm OBW : 22.846 MHz	Measured 6 dB Bandwidth: 15.872 MHz Limit: ≥ 500.0 kHz Margin: -15.37 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 153 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

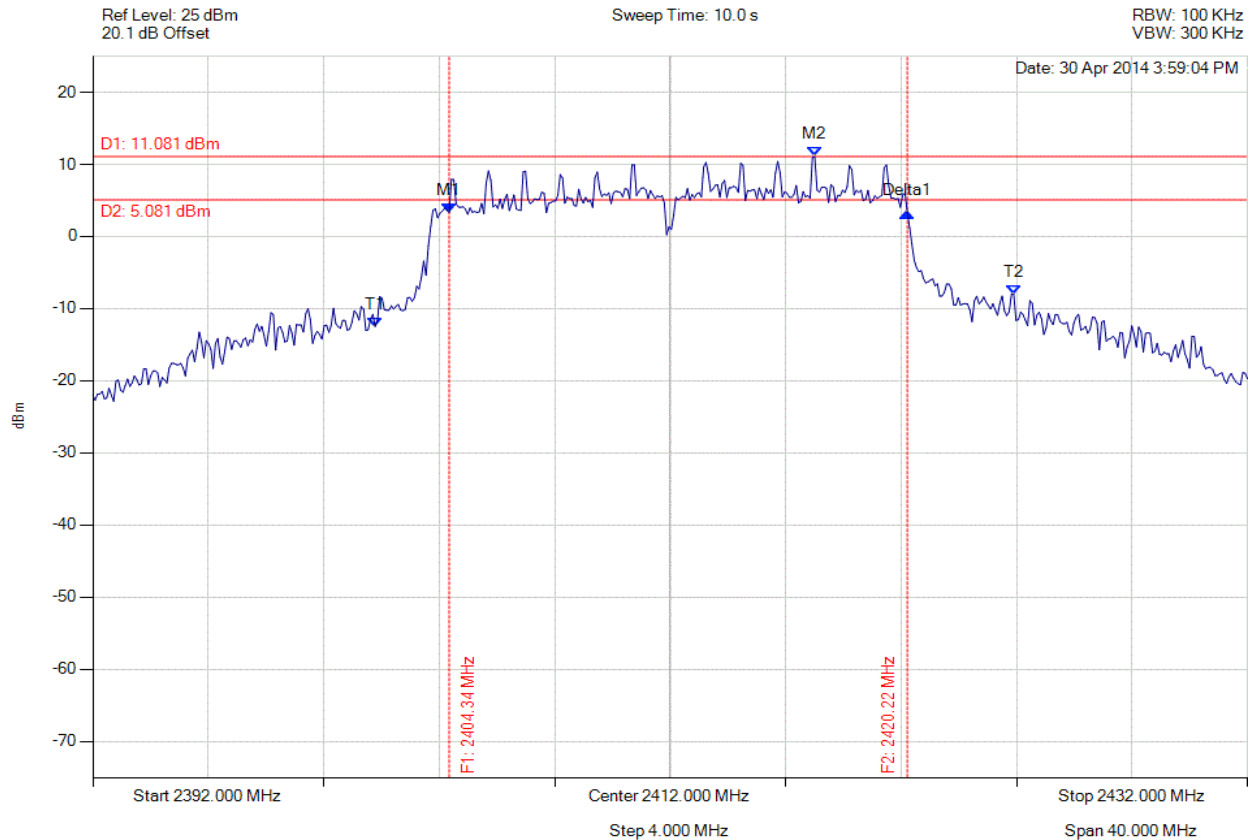

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2404.345 MHz : 3.337 dBm M2 : 2417.010 MHz : 11.081 dBm Delta1 : 15.872 MHz : -0.006 dB T1 : 2401.780 MHz : -12.484 dBm T2 : 2423.904 MHz : -8.016 dBm OBW : 22.124 MHz	Measured 6 dB Bandwidth: 15.872 MHz Limit: ≥ 500.0 kHz Margin: -15.37 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 154 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

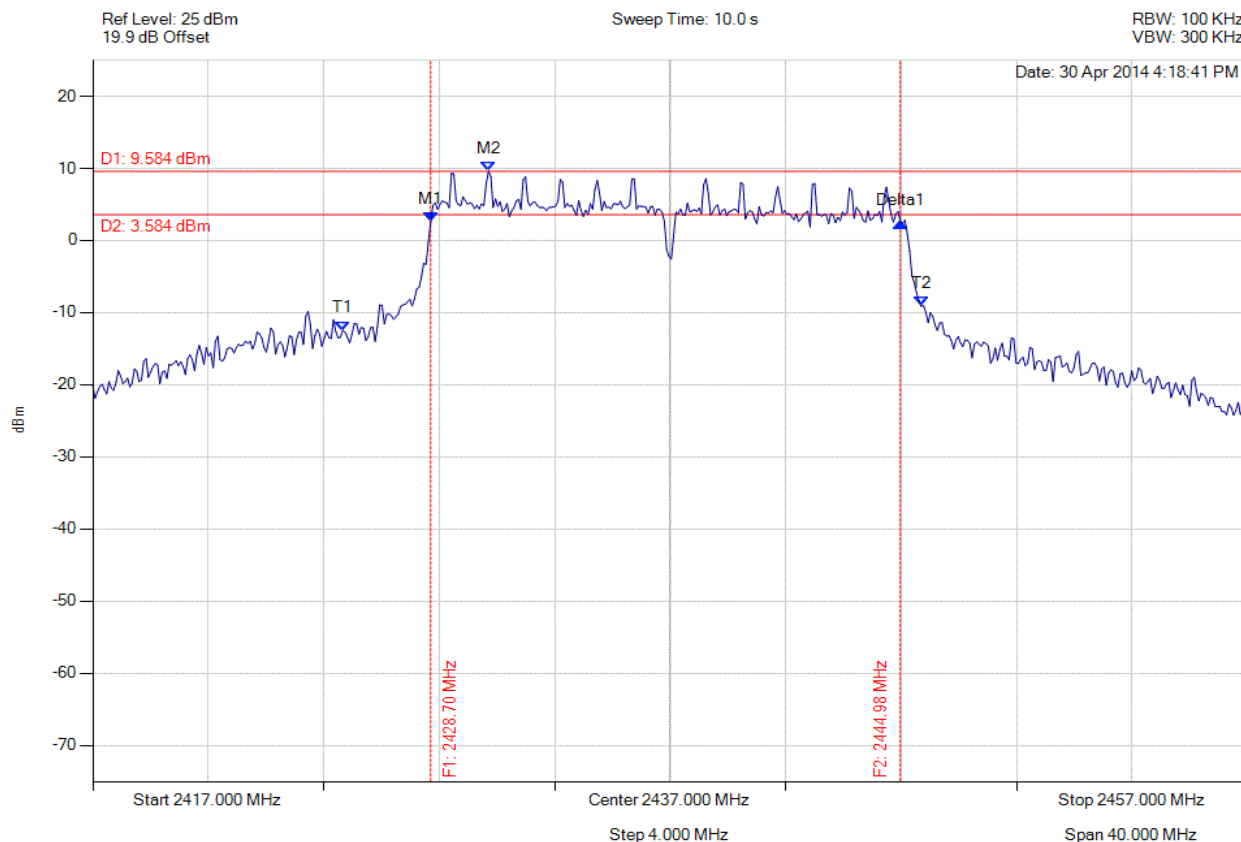

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2428.703 MHz : 2.562 dBm M2 : 2430.707 MHz : 9.584 dBm Delta1 : 16.273 MHz : -0.026 dB T1 : 2425.657 MHz : -12.456 dBm T2 : 2445.697 MHz : -9.110 dBm OBW : 20.040 MHz	Measured 6 dB Bandwidth: 16.273 MHz Limit: ≥ 500.0 kHz Margin: -15.77 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 155 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

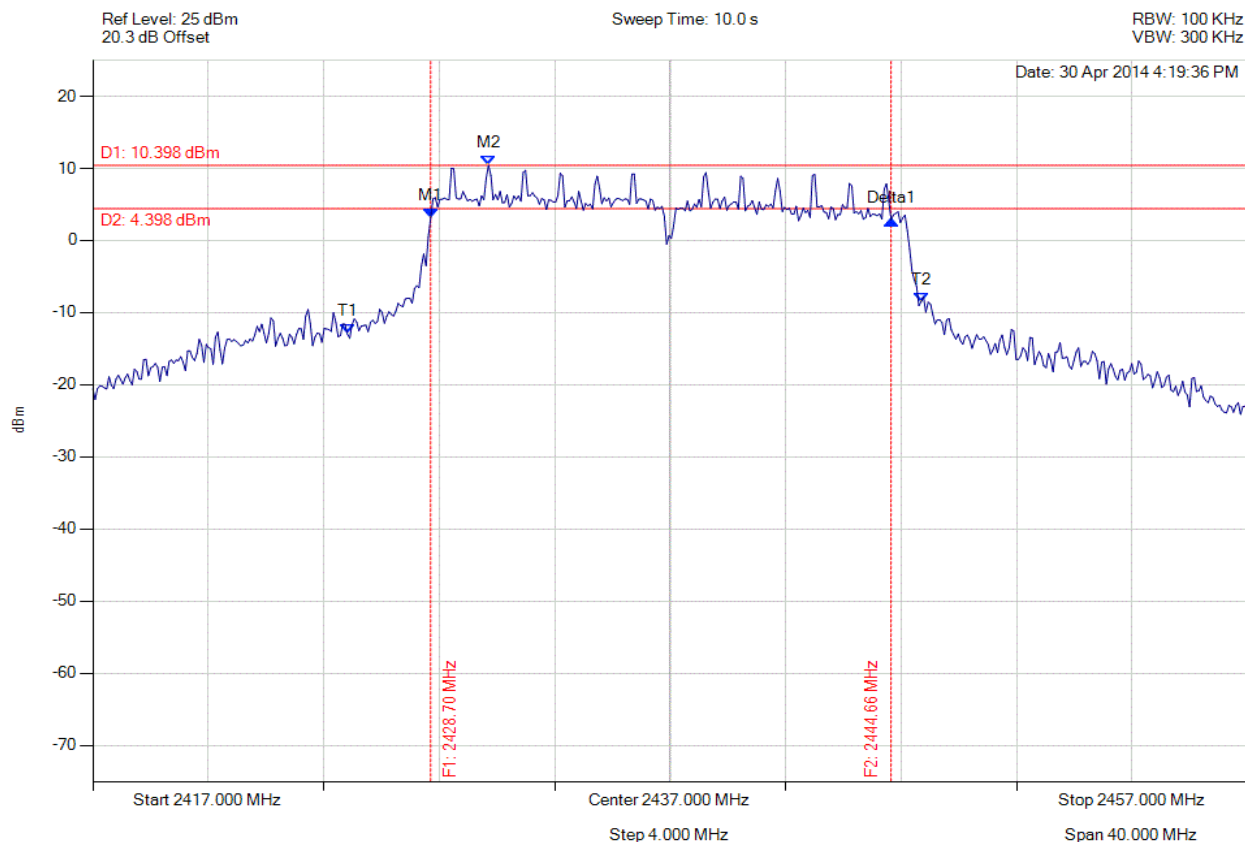

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2428.703 MHz : 3.109 dBm M2 : 2430.707 MHz : 10.398 dBm Delta1 : 15.952 MHz : -0.240 dB T1 : 2425.818 MHz : -12.942 dBm T2 : 2445.697 MHz : -8.475 dBm OBW : 19.880 MHz	Measured 6 dB Bandwidth: 15.952 MHz Limit: ≥ 500.0 kHz Margin: -15.45 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 156 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

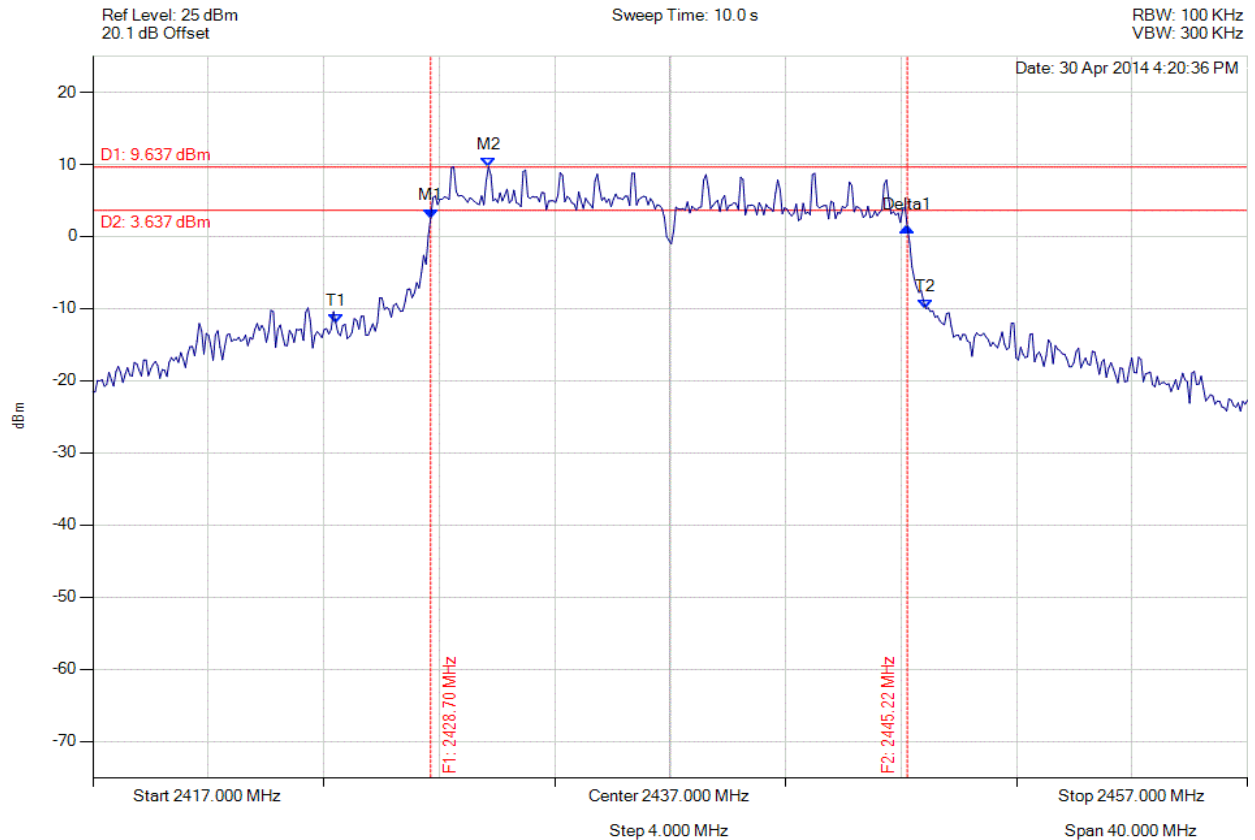

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2428.703 MHz : 2.554 dBm M2 : 2430.707 MHz : 9.637 dBm Delta1 : 16.513 MHz : -1.273 dB T1 : 2425.417 MHz : -12.026 dBm T2 : 2445.858 MHz : -10.007 dBm OBW : 20.441 MHz	Measured 6 dB Bandwidth: 16.513 MHz Limit: ≥ 500.0 kHz Margin: -16.01 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 157 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

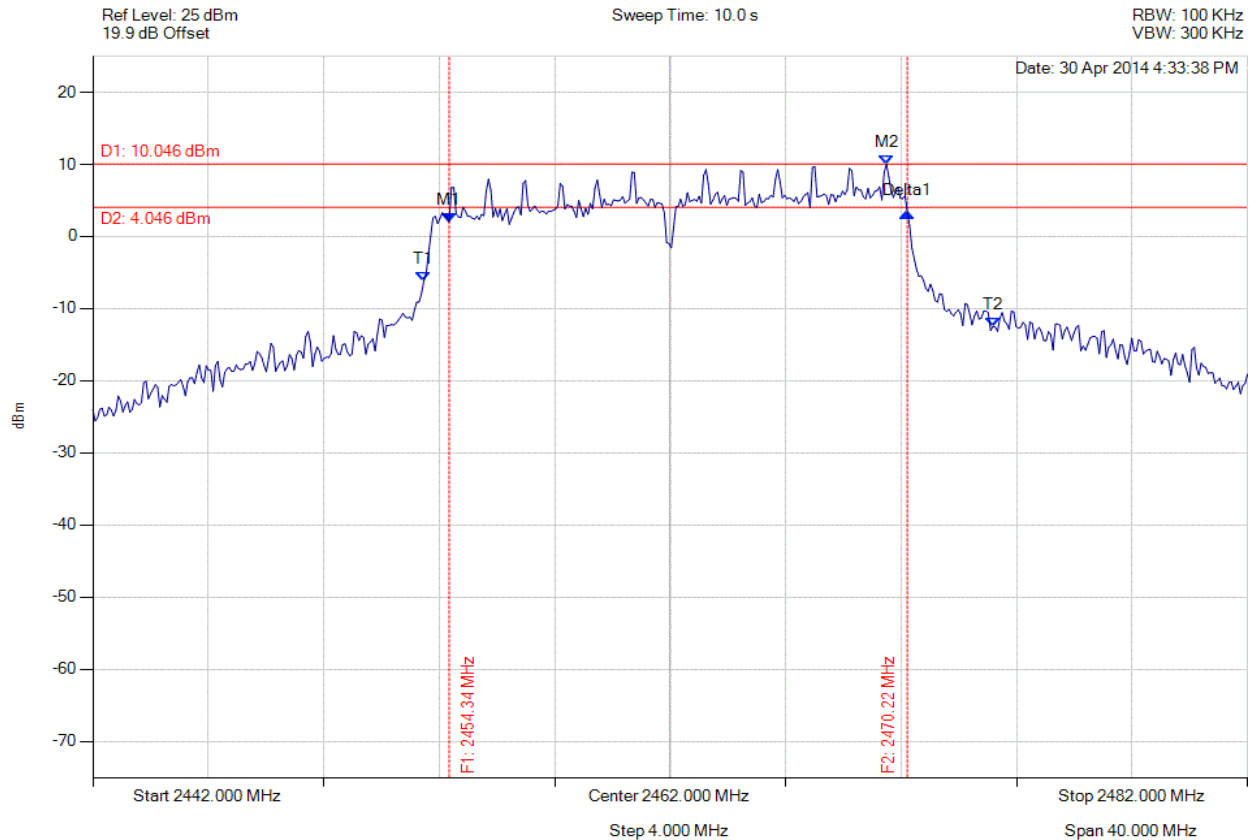

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2454.345 MHz : 2.004 dBm M2 : 2469.495 MHz : 10.046 dBm Delta1 : 15.872 MHz : 1.361 dB T1 : 2453.463 MHz : -6.242 dBm T2 : 2473.182 MHz : -12.514 dBm OBW : 19.719 MHz	Measured 6 dB Bandwidth: 15.872 MHz Limit: ≥ 500.0 kHz Margin: -15.37 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 158 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

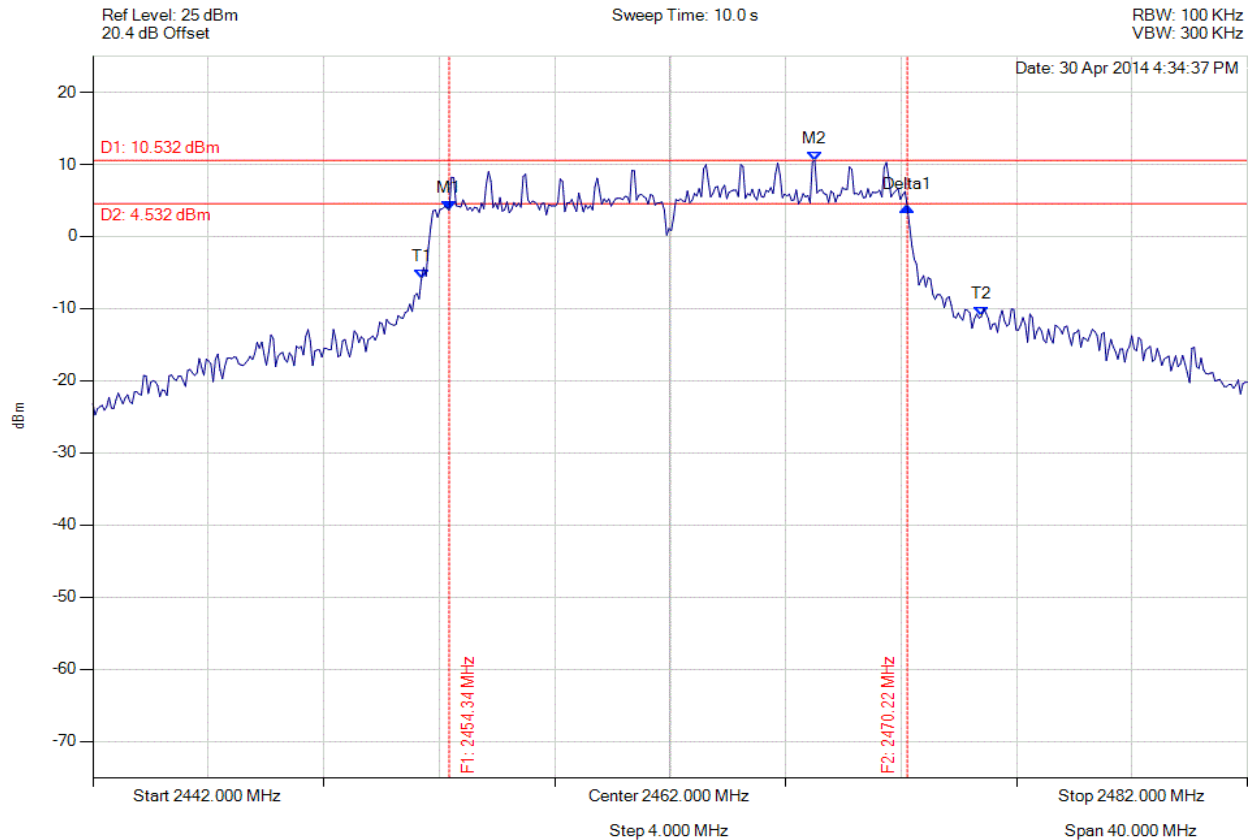

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2454.345 MHz : 3.642 dBm M2 : 2467.010 MHz : 10.532 dBm Delta1 : 15.872 MHz : 0.464 dB T1 : 2453.383 MHz : -5.882 dBm T2 : 2472.782 MHz : -11.099 dBm OBW : 19.399 MHz	Measured 6 dB Bandwidth: 15.872 MHz Limit: ≥ 500.0 kHz Margin: -15.37 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 159 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11g, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

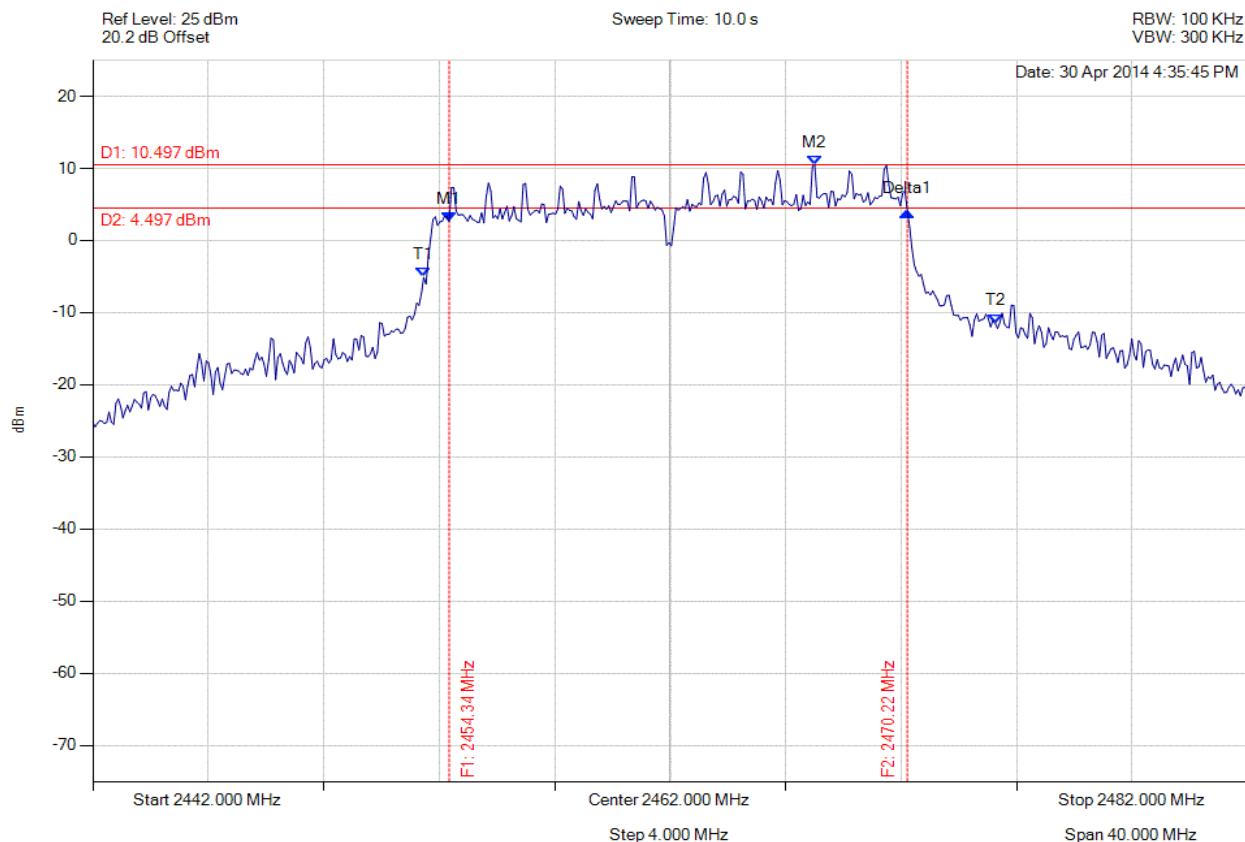

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2454.345 MHz : 2.643 dBm M2 : 2467.010 MHz : 10.497 dBm Delta1 : 15.872 MHz : 1.403 dB T1 : 2453.463 MHz : -5.114 dBm T2 : 2473.263 MHz : -11.465 dBm OBW : 19.800 MHz	Measured 6 dB Bandwidth: 15.872 MHz Limit: ≥500.0 kHz Margin: -15.37 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 160 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

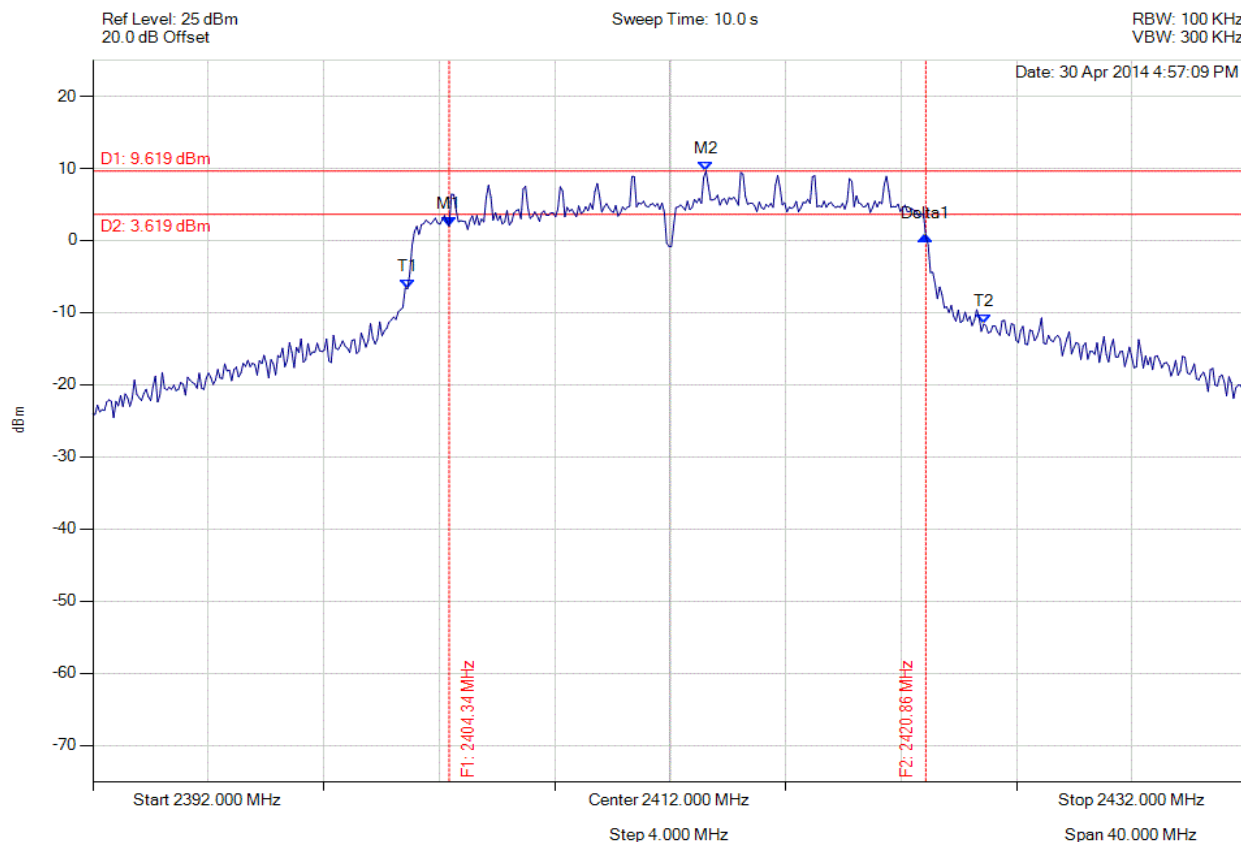

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2404.345 MHz : 1.960 dBm M2 : 2413.242 MHz : 9.619 dBm Delta1 : 16.513 MHz : -1.379 dB T1 : 2402.902 MHz : -6.698 dBm T2 : 2422.862 MHz : -11.583 dBm OBW : 19.960 MHz	Measured 6 dB Bandwidth: 16.513 MHz Limit: ≥ 500.0 kHz Margin: -16.01 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 161 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

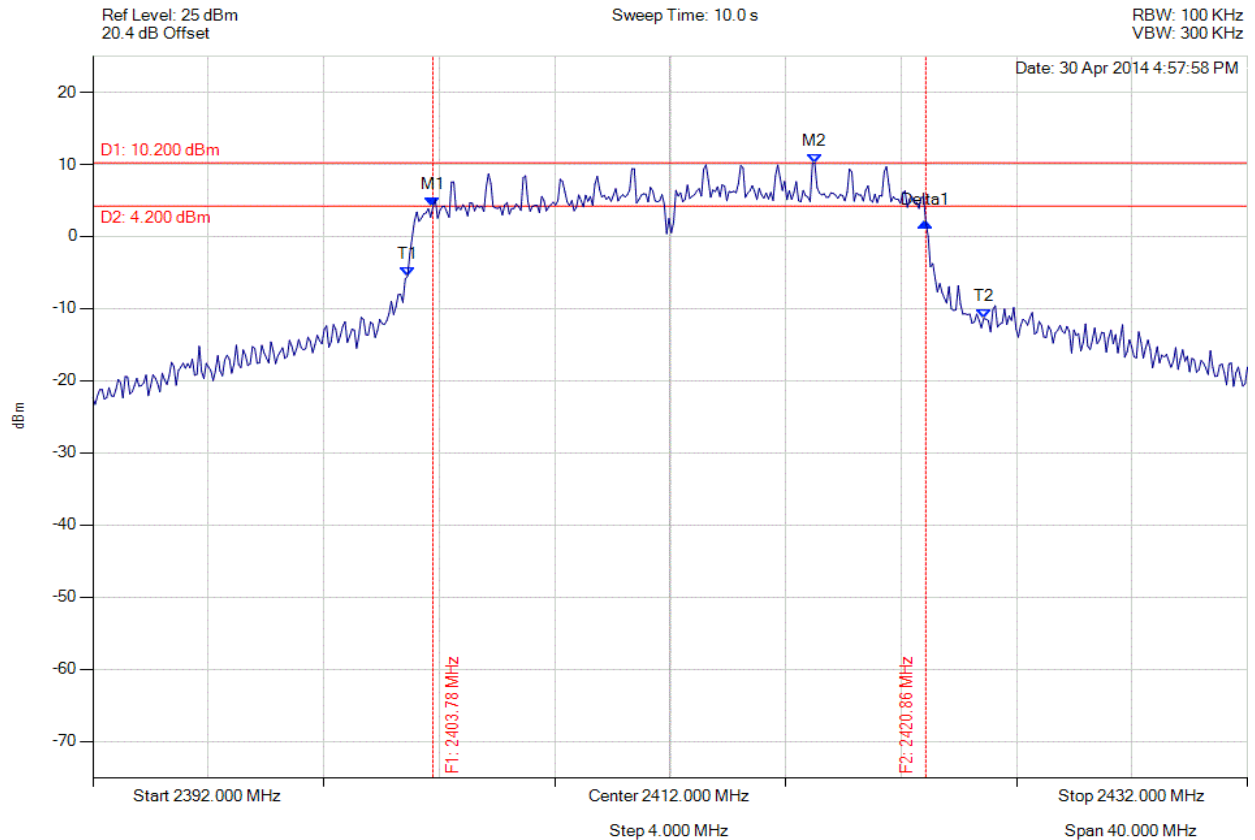

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2403.784 MHz : 4.130 dBm M2 : 2417.010 MHz : 10.200 dBm Delta1 : 17.074 MHz : -2.119 dB T1 : 2402.902 MHz : -5.537 dBm T2 : 2422.862 MHz : -11.363 dBm OBW : 19.960 MHz	Measured 6 dB Bandwidth: 17.074 MHz Limit: ≥ 500.0 kHz Margin: -16.57 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 162 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2412.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

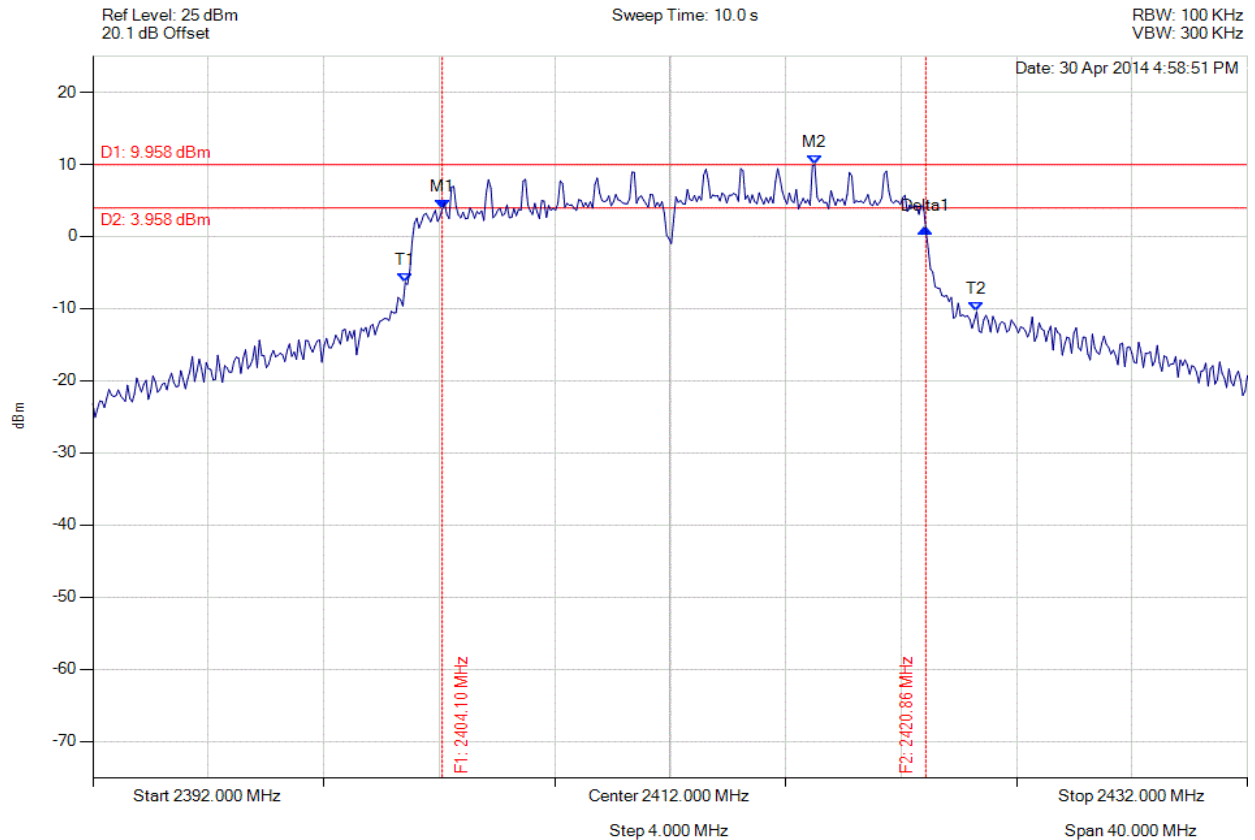

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2404.104 MHz : 3.800 dBm M2 : 2417.010 MHz : 9.958 dBm Delta1 : 16.754 MHz : -2.739 dB T1 : 2402.822 MHz : -6.393 dBm T2 : 2422.621 MHz : -10.420 dBm OBW : 19.800 MHz	Measured 6 dB Bandwidth: 16.754 MHz Limit: ≥ 500.0 kHz Margin: -16.25 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 163 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

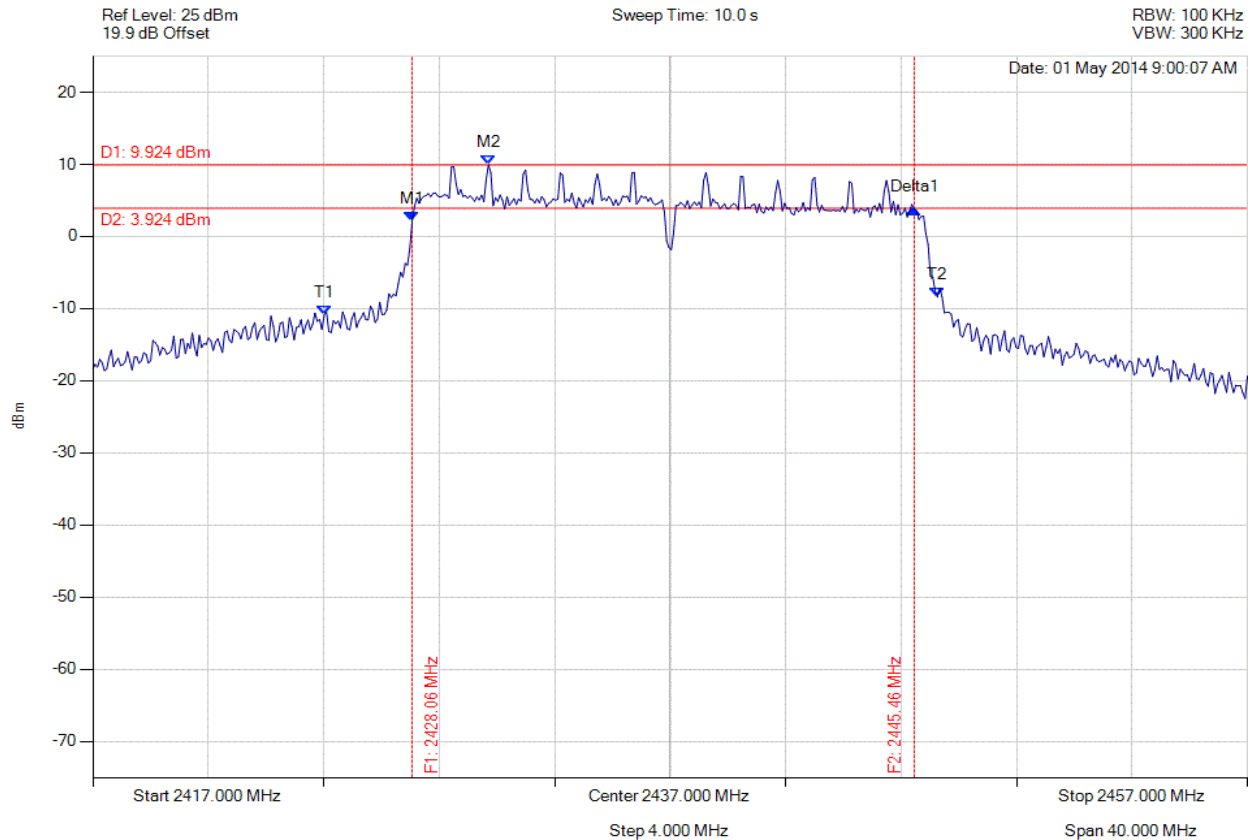

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2428.062 MHz : 2.090 dBm M2 : 2430.707 MHz : 9.924 dBm Delta1 : 17.395 MHz : 1.672 dB T1 : 2425.016 MHz : -10.853 dBm T2 : 2446.259 MHz : -8.388 dBm OBW : 21.242 MHz	Measured 6 dB Bandwidth: 17.395 MHz Limit: ≥ 500.0 kHz Margin: -16.90 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 164 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

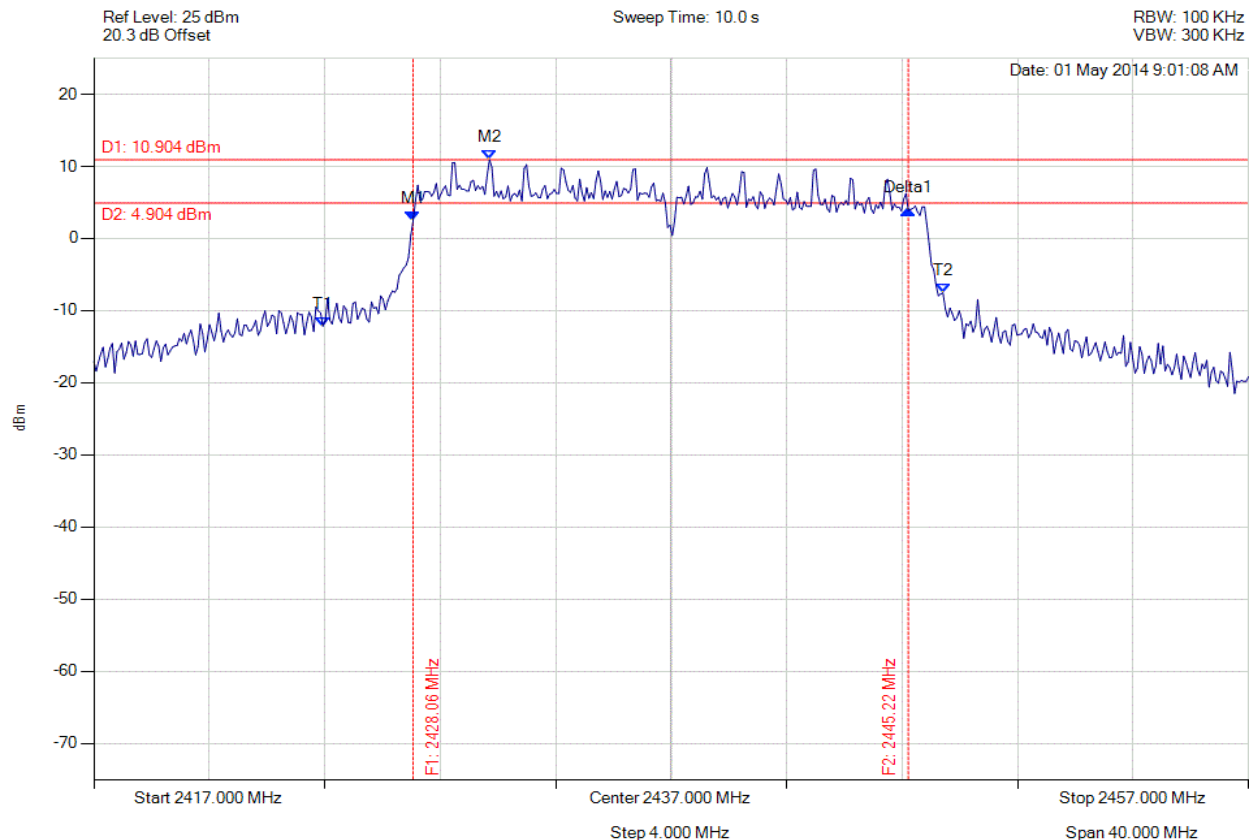

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2428.062 MHz : 2.456 dBm M2 : 2430.707 MHz : 10.904 dBm Delta1 : 17.154 MHz : 1.440 dB T1 : 2424.936 MHz : -12.148 dBm T2 : 2446.419 MHz : -7.546 dBm OBW : 21.483 MHz	Measured 6 dB Bandwidth: 17.154 MHz Limit: ≥ 500.0 kHz Margin: -16.65 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 165 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

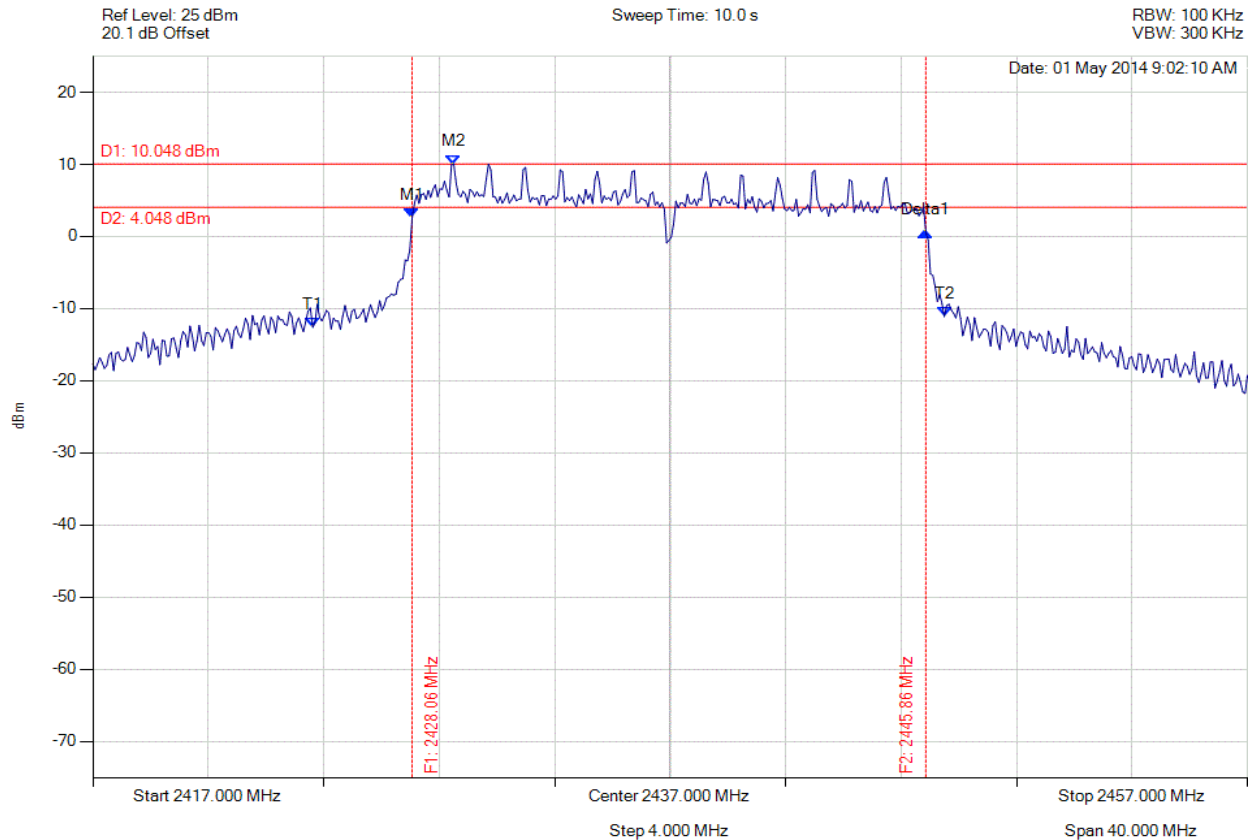

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2428.062 MHz : 2.572 dBm M2 : 2429.505 MHz : 10.048 dBm Delta1 : 17.796 MHz : -1.918 dB T1 : 2424.615 MHz : -12.590 dBm T2 : 2446.499 MHz : -11.103 dBm OBW : 21.884 MHz	Measured 6 dB Bandwidth: 17.796 MHz Limit: ≥ 500.0 kHz Margin: -17.30 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 166 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

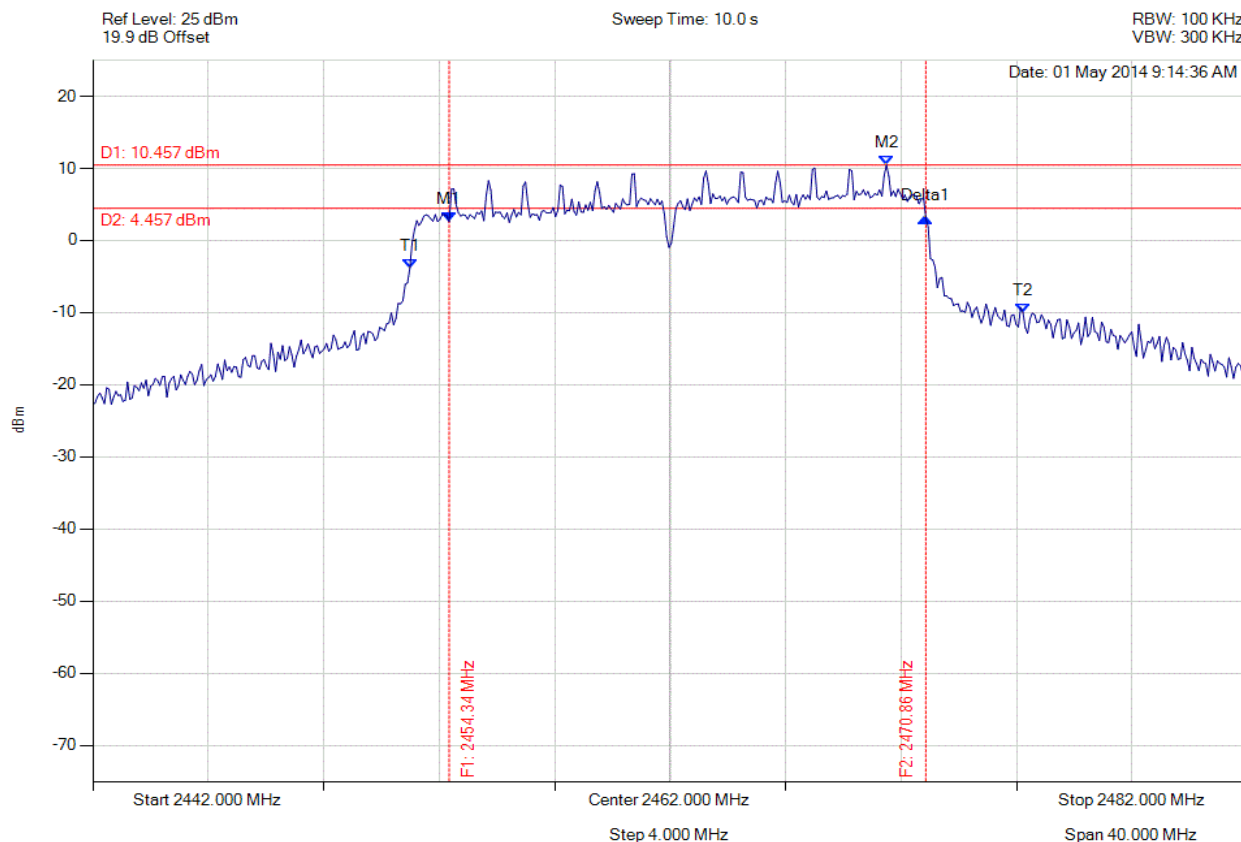

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2454.345 MHz : 2.584 dBm M2 : 2469.495 MHz : 10.457 dBm Delta1 : 16.513 MHz : 0.527 dB T1 : 2452.982 MHz : -3.826 dBm T2 : 2474.224 MHz : -9.995 dBm OBW : 21.242 MHz	Measured 6 dB Bandwidth: 16.513 MHz Limit: ≥ 500.0 kHz Margin: -16.01 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 167 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

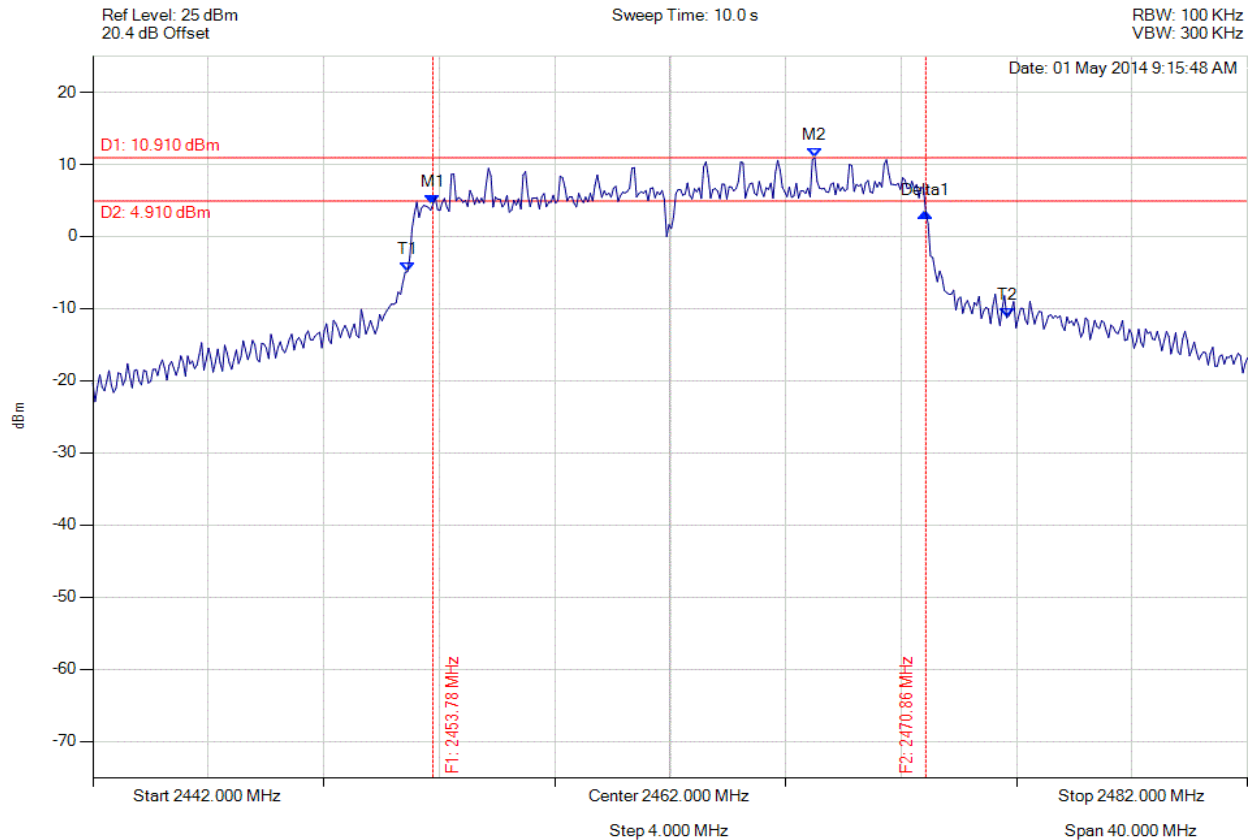

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2453.784 MHz : 4.473 dBm M2 : 2467.010 MHz : 10.910 dBm Delta1 : 17.074 MHz : -1.153 dB T1 : 2452.902 MHz : -4.894 dBm T2 : 2473.663 MHz : -11.270 dBm OBW : 20.762 MHz	Measured 6 dB Bandwidth: 17.074 MHz Limit: ≥ 500.0 kHz Margin: -16.57 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 168 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-20, Channel: 2462.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

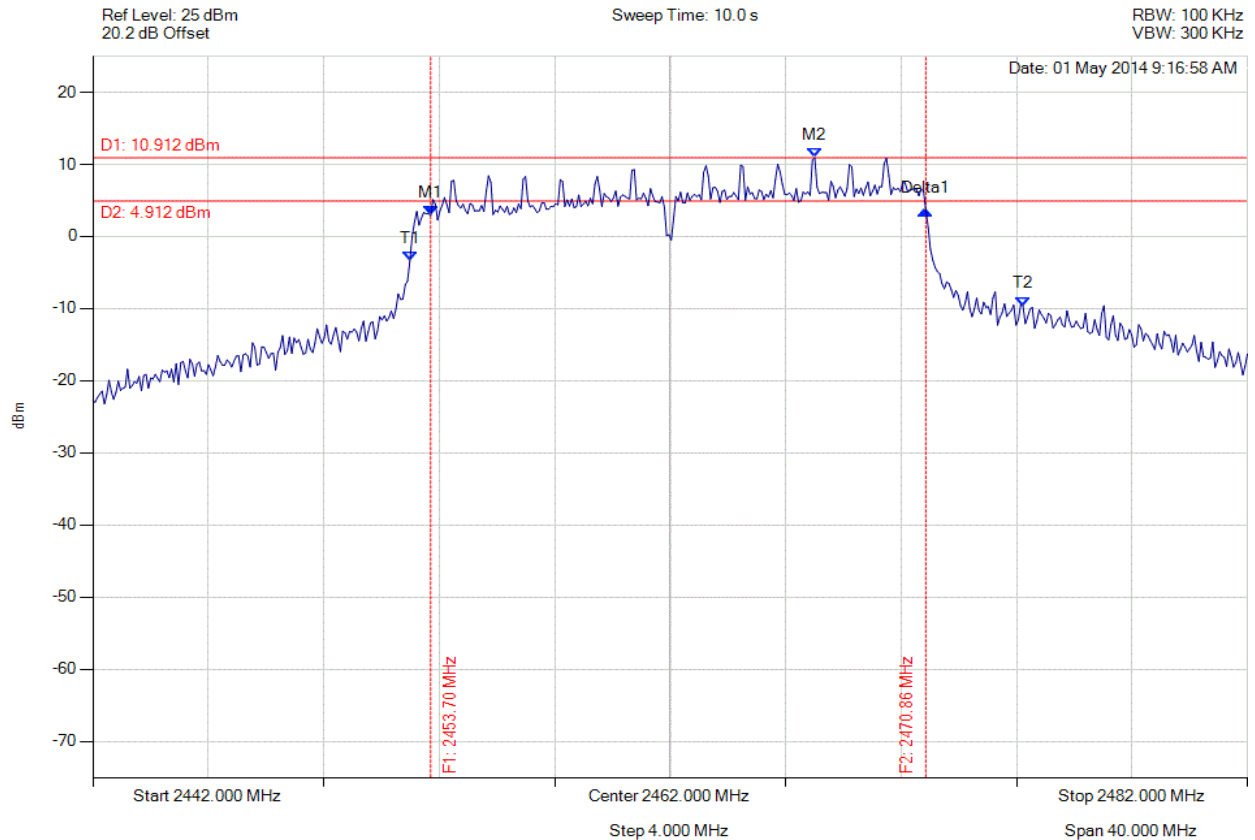

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2453.703 MHz : 2.899 dBm M2 : 2467.010 MHz : 10.912 dBm Delta1 : 17.154 MHz : 0.732 dB T1 : 2452.982 MHz : -3.377 dBm T2 : 2474.224 MHz : -9.622 dBm OBW : 21.242 MHz	Measured 6 dB Bandwidth: 17.154 MHz Limit: ≥ 500.0 kHz Margin: -16.65 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 169 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

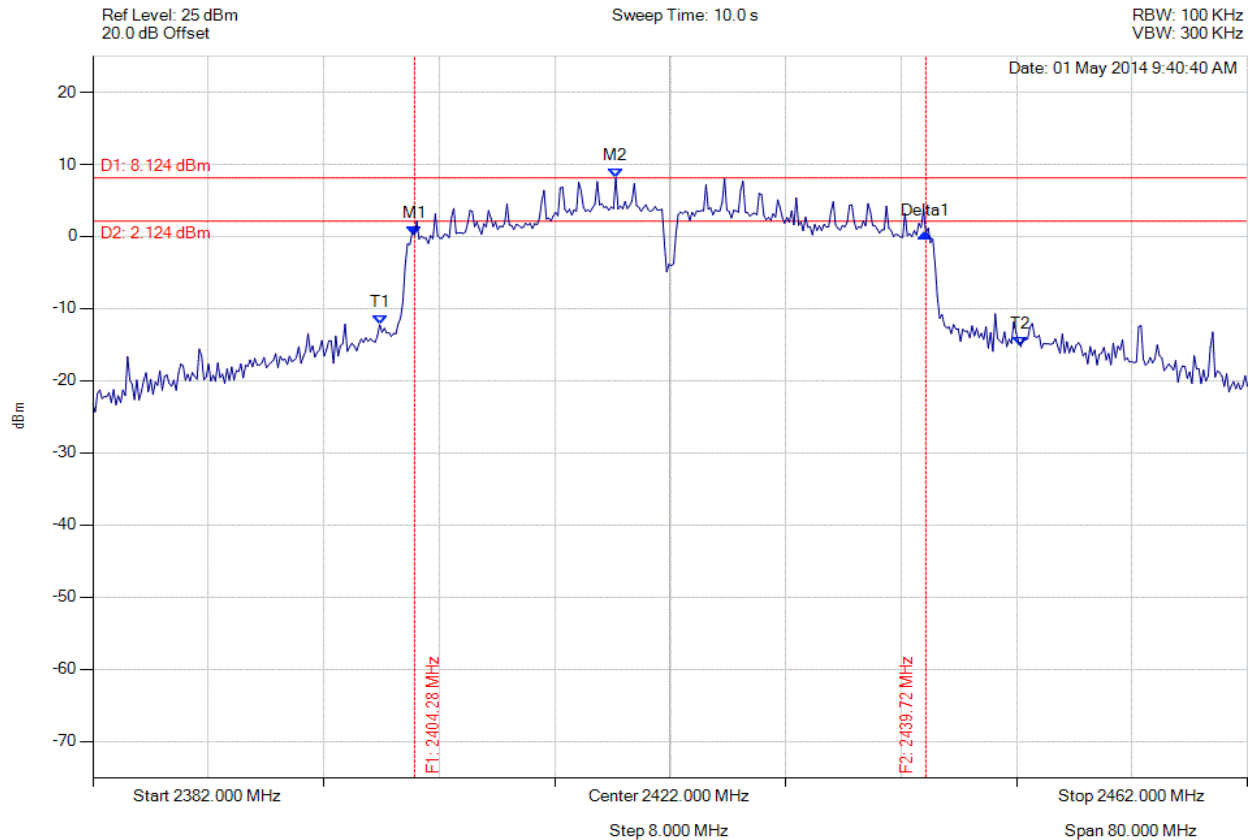

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2404.285 MHz : 0.188 dBm M2 : 2418.232 MHz : 8.124 dBm Delta1 : 35.431 MHz : 0.289 dB T1 : 2401.880 MHz : -12.240 dBm T2 : 2446.289 MHz : -15.268 dBm OBW : 44.409 MHz	Measured 6 dB Bandwidth: 35.431 MHz Limit: ≥ 500.0 kHz Margin: -34.93 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 170 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

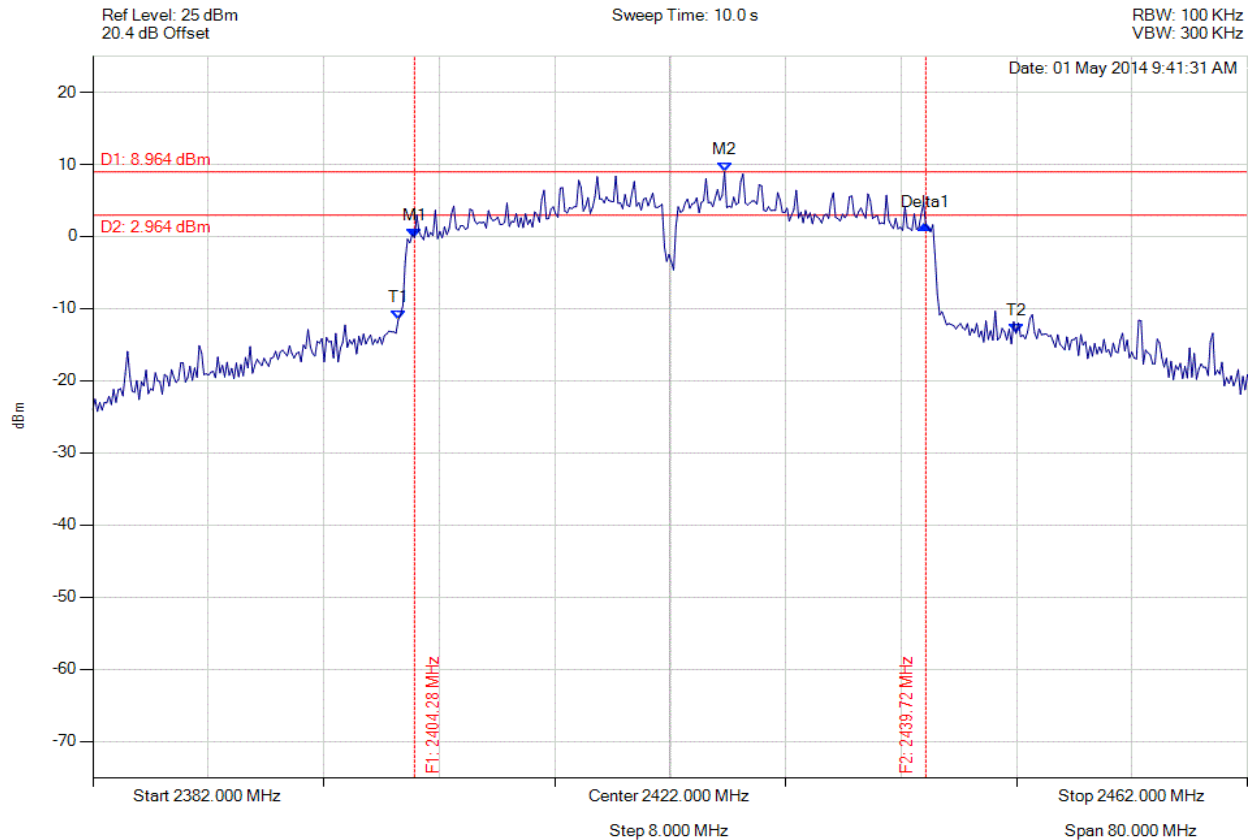

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2404.285 MHz : -0.159 dBm M2 : 2425.768 MHz : 8.964 dBm Delta1 : 35.431 MHz : 1.721 dB T1 : 2403.162 MHz : -11.559 dBm T2 : 2445.968 MHz : -13.440 dBm OBW : 42.806 MHz	Measured 6 dB Bandwidth: 35.431 MHz Limit: ≥ 500.0 kHz Margin: -34.93 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 171 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 2422.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

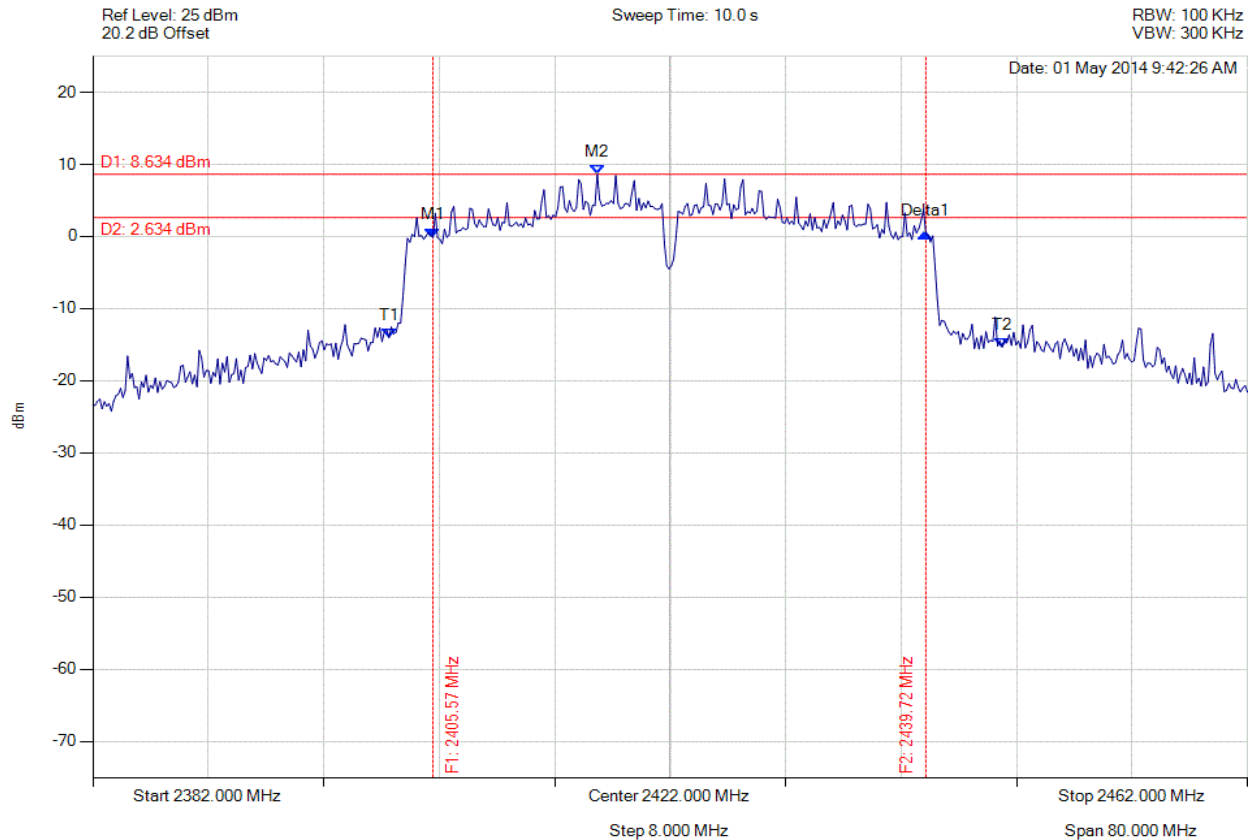

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2405.567 MHz : -0.121 dBm M2 : 2416.950 MHz : 8.634 dBm Delta1 : 34.148 MHz : 0.574 dB T1 : 2402.521 MHz : -14.042 dBm T2 : 2445.006 MHz : -15.350 dBm OBW : 42.485 MHz	Measured 6 dB Bandwidth: 34.148 MHz Limit: ≥ 500.0 kHz Margin: -33.65 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 172 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

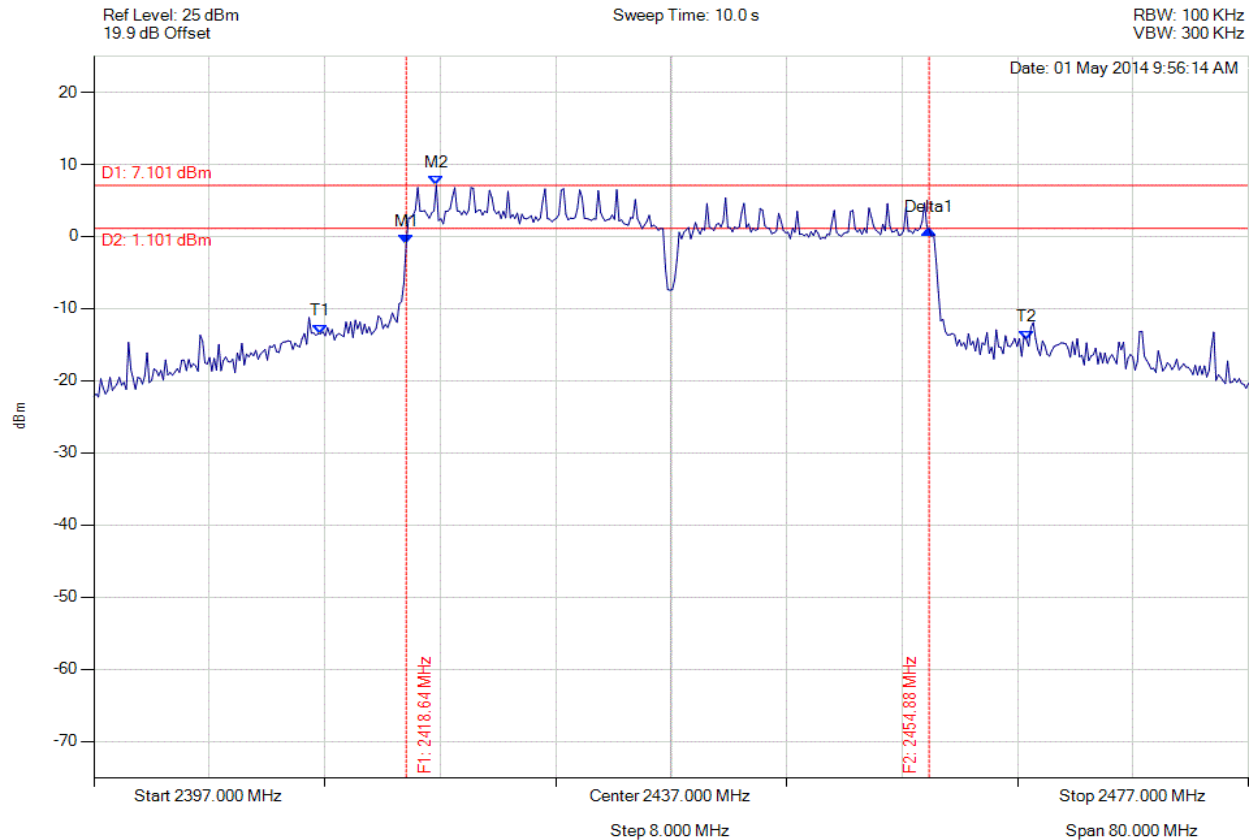

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2418.643 MHz : -1.030 dBm M2 : 2420.727 MHz : 7.101 dBm Delta1 : 36.232 MHz : 1.952 dB T1 : 2412.711 MHz : -13.462 dBm T2 : 2461.609 MHz : -14.296 dBm OBW : 48.898 MHz	Measured 6 dB Bandwidth: 36.232 MHz Limit: ≥ 500.0 kHz Margin: -35.73 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 173 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

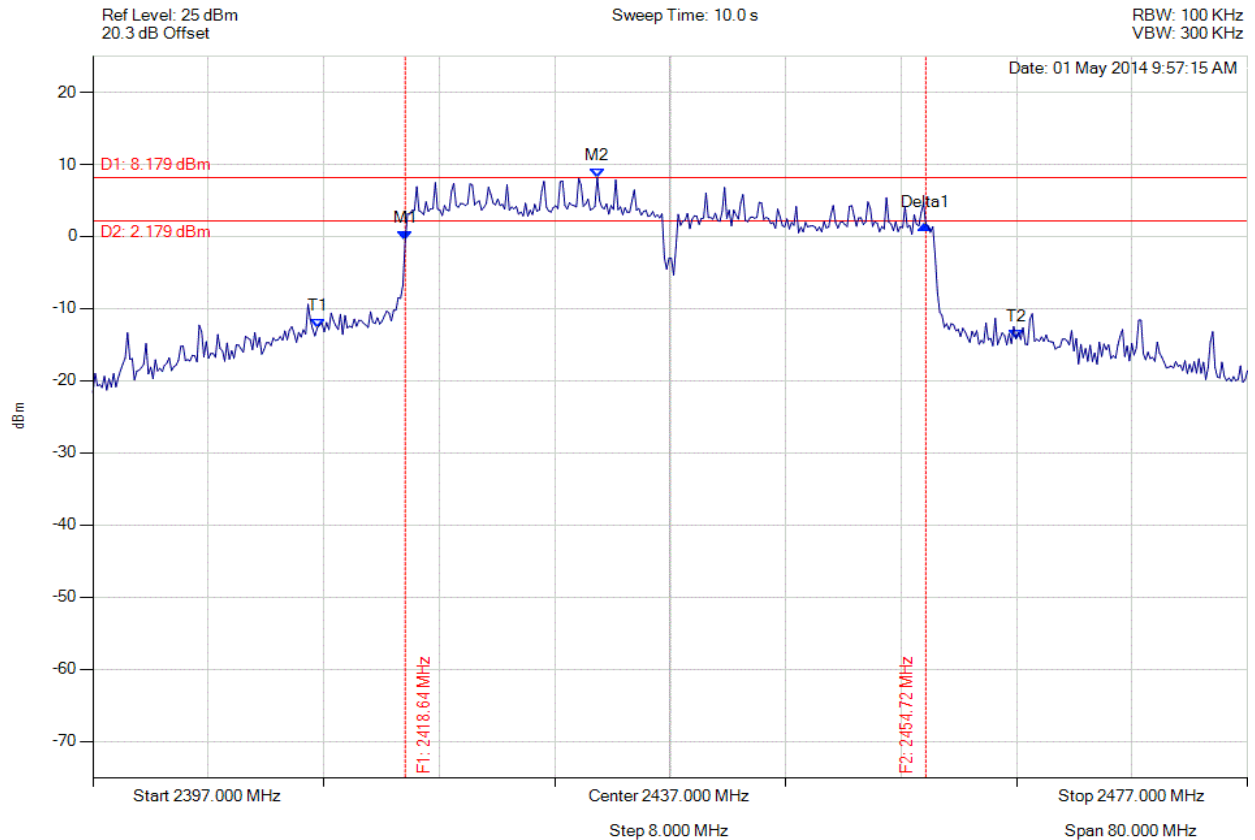

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2418.643 MHz : -0.550 dBm M2 : 2431.950 MHz : 8.179 dBm Delta1 : 36.072 MHz : 2.217 dB T1 : 2412.551 MHz : -12.673 dBm T2 : 2460.968 MHz : -14.184 dBm OBW : 48.417 MHz	Measured 6 dB Bandwidth: 36.072 MHz Limit: ≥ 500.0 kHz Margin: -35.57 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 174 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 2437.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

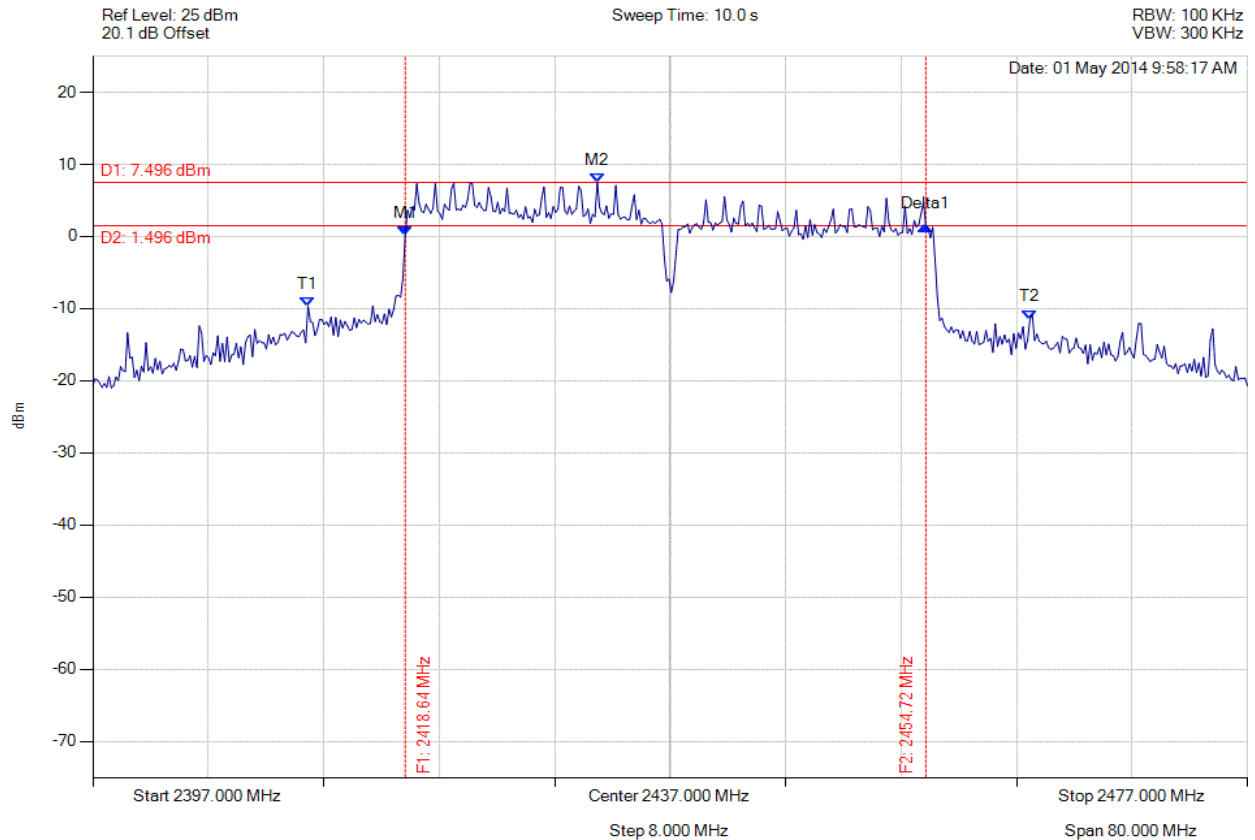

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2418.643 MHz : 0.070 dBm M2 : 2431.950 MHz : 7.496 dBm Delta1 : 36.072 MHz : 1.397 dB T1 : 2411.910 MHz : -9.671 dBm T2 : 2461.930 MHz : -11.453 dBm OBW : 50.020 MHz	Measured 6 dB Bandwidth: 36.072 MHz Limit: ≥500.0 kHz Margin: -35.57 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 175 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain a, Temp: Ambient, Voltage: 3.3 Vdc

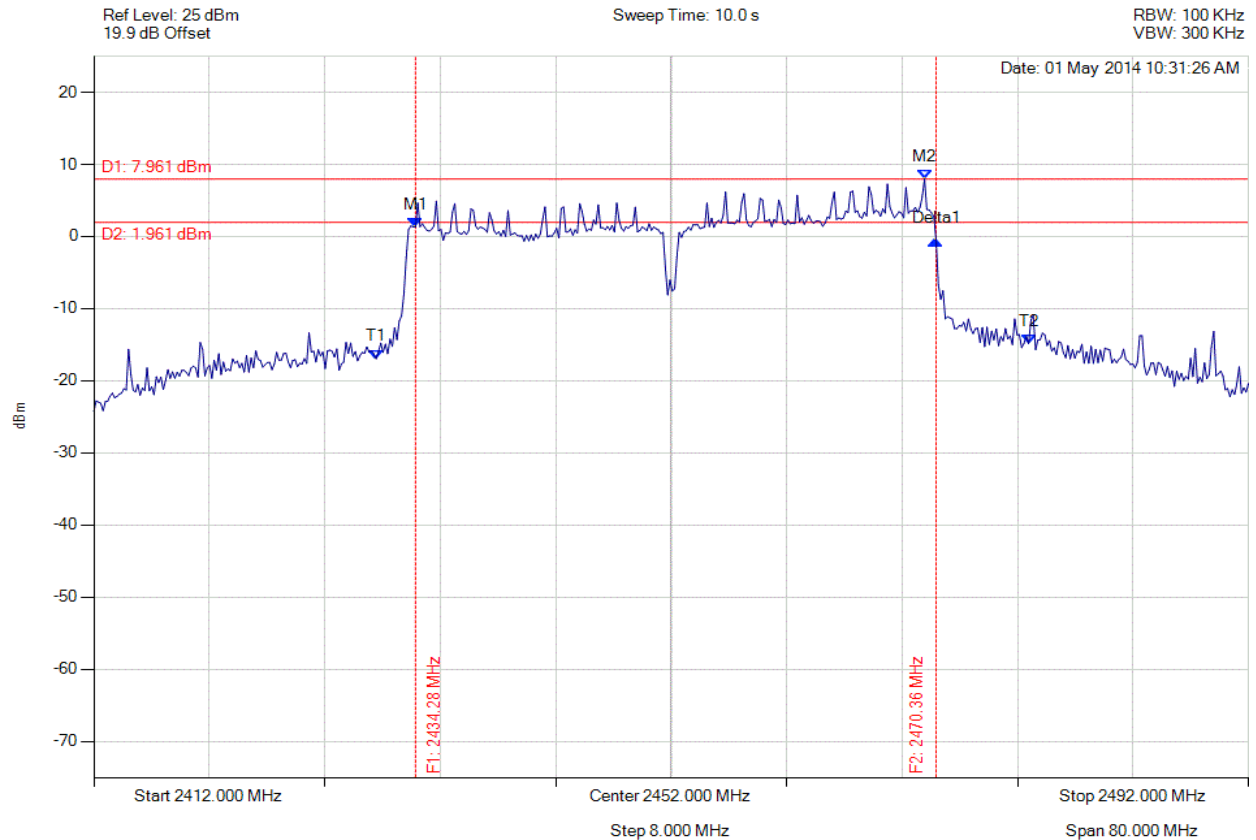

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2434.285 MHz : 1.313 dBm M2 : 2469.555 MHz : 7.961 dBm Delta1 : 36.072 MHz : -1.790 dB T1 : 2431.559 MHz : -16.958 dBm T2 : 2476.770 MHz : -14.874 dBm OBW : 45.210 MHz	Measured 6 dB Bandwidth: 36.072 MHz Limit: ≥ 500.0 kHz Margin: -35.57 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 176 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain b, Temp: Ambient, Voltage: 3.3 Vdc

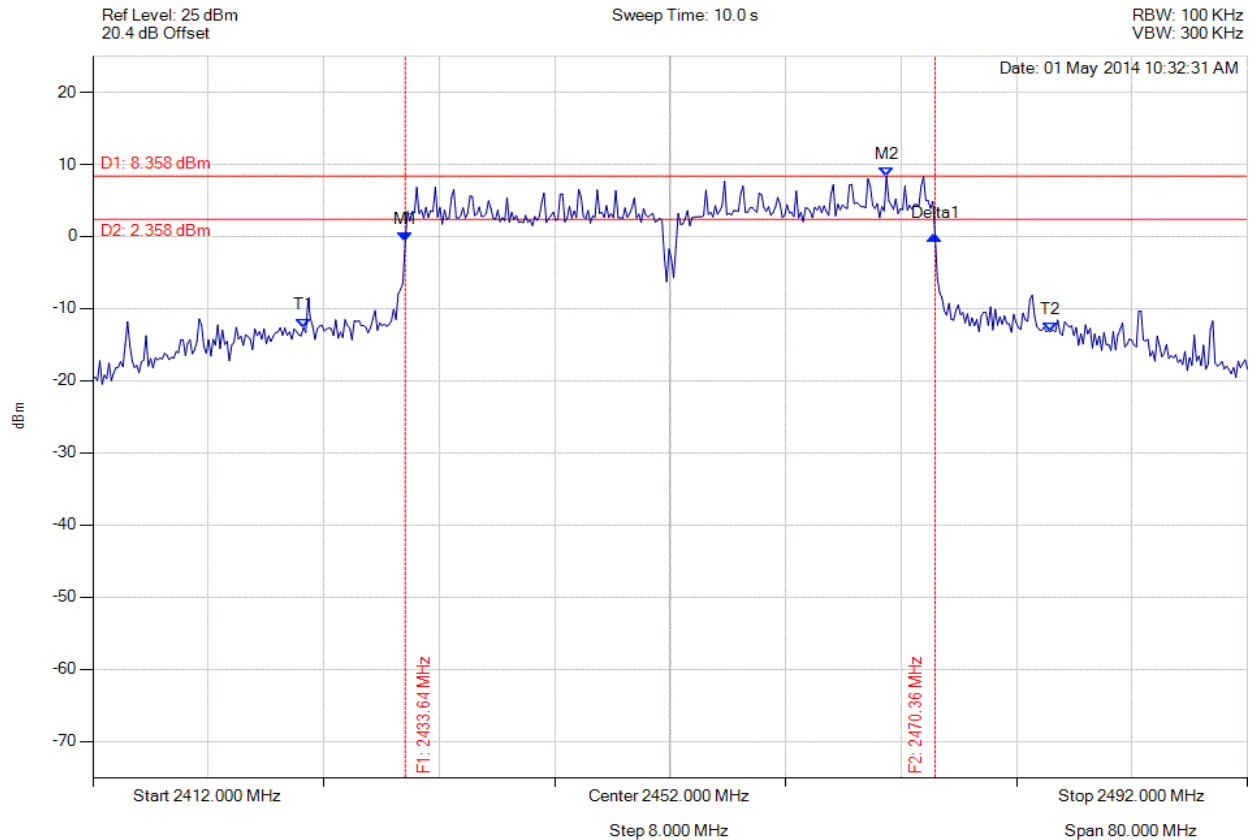

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2433.643 MHz : -0.731 dBm M2 : 2466.990 MHz : 8.358 dBm Delta1 : 36.713 MHz : 0.901 dB T1 : 2426.589 MHz : -12.620 dBm T2 : 2478.373 MHz : -13.208 dBm OBW : 51.784 MHz	Measured 6 dB Bandwidth: 36.713 MHz Limit: ≥ 500.0 kHz Margin: -36.21 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: NetScout Systems BCM43460
To: FCC 47 CFR Part 15.247 & IC RSS-247
Serial #: FLUK48-U2 Rev A
Issue Date: 23rd December 2015
Page: 177 of 250



6 dB & 99% BANDWIDTH

Variant: 802.11n HT-40, Channel: 2452.00 MHz, Chain c, Temp: Ambient, Voltage: 3.3 Vdc

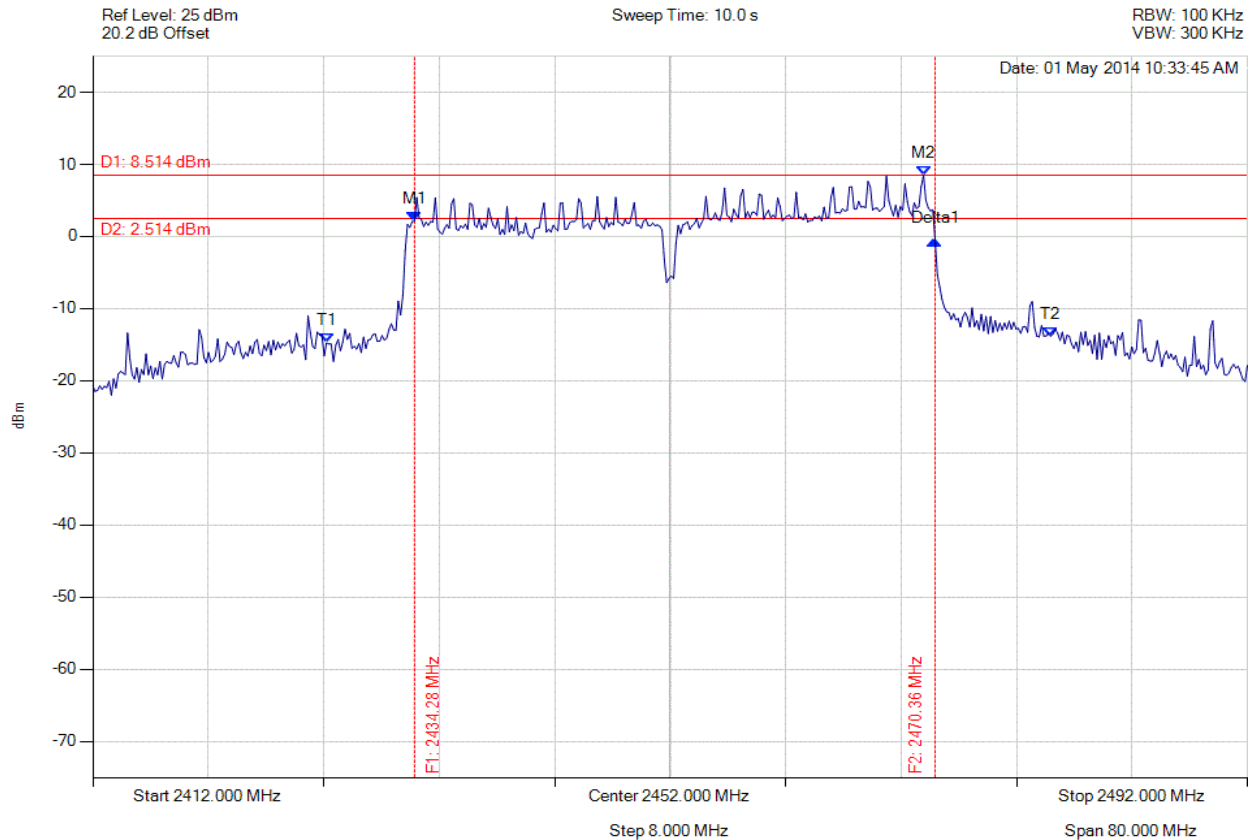

Analyser Setup	Marker : Frequency : Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 2434.285 MHz : 2.159 dBm M2 : 2469.555 MHz : 8.514 dBm Delta1 : 36.072 MHz : -2.624 dB T1 : 2428.192 MHz : -14.764 dBm T2 : 2478.373 MHz : -13.822 dBm OBW : 50.180 MHz	Measured 6 dB Bandwidth: 36.072 MHz Limit: ≥ 500.0 kHz Margin: -35.57 MHz

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.