
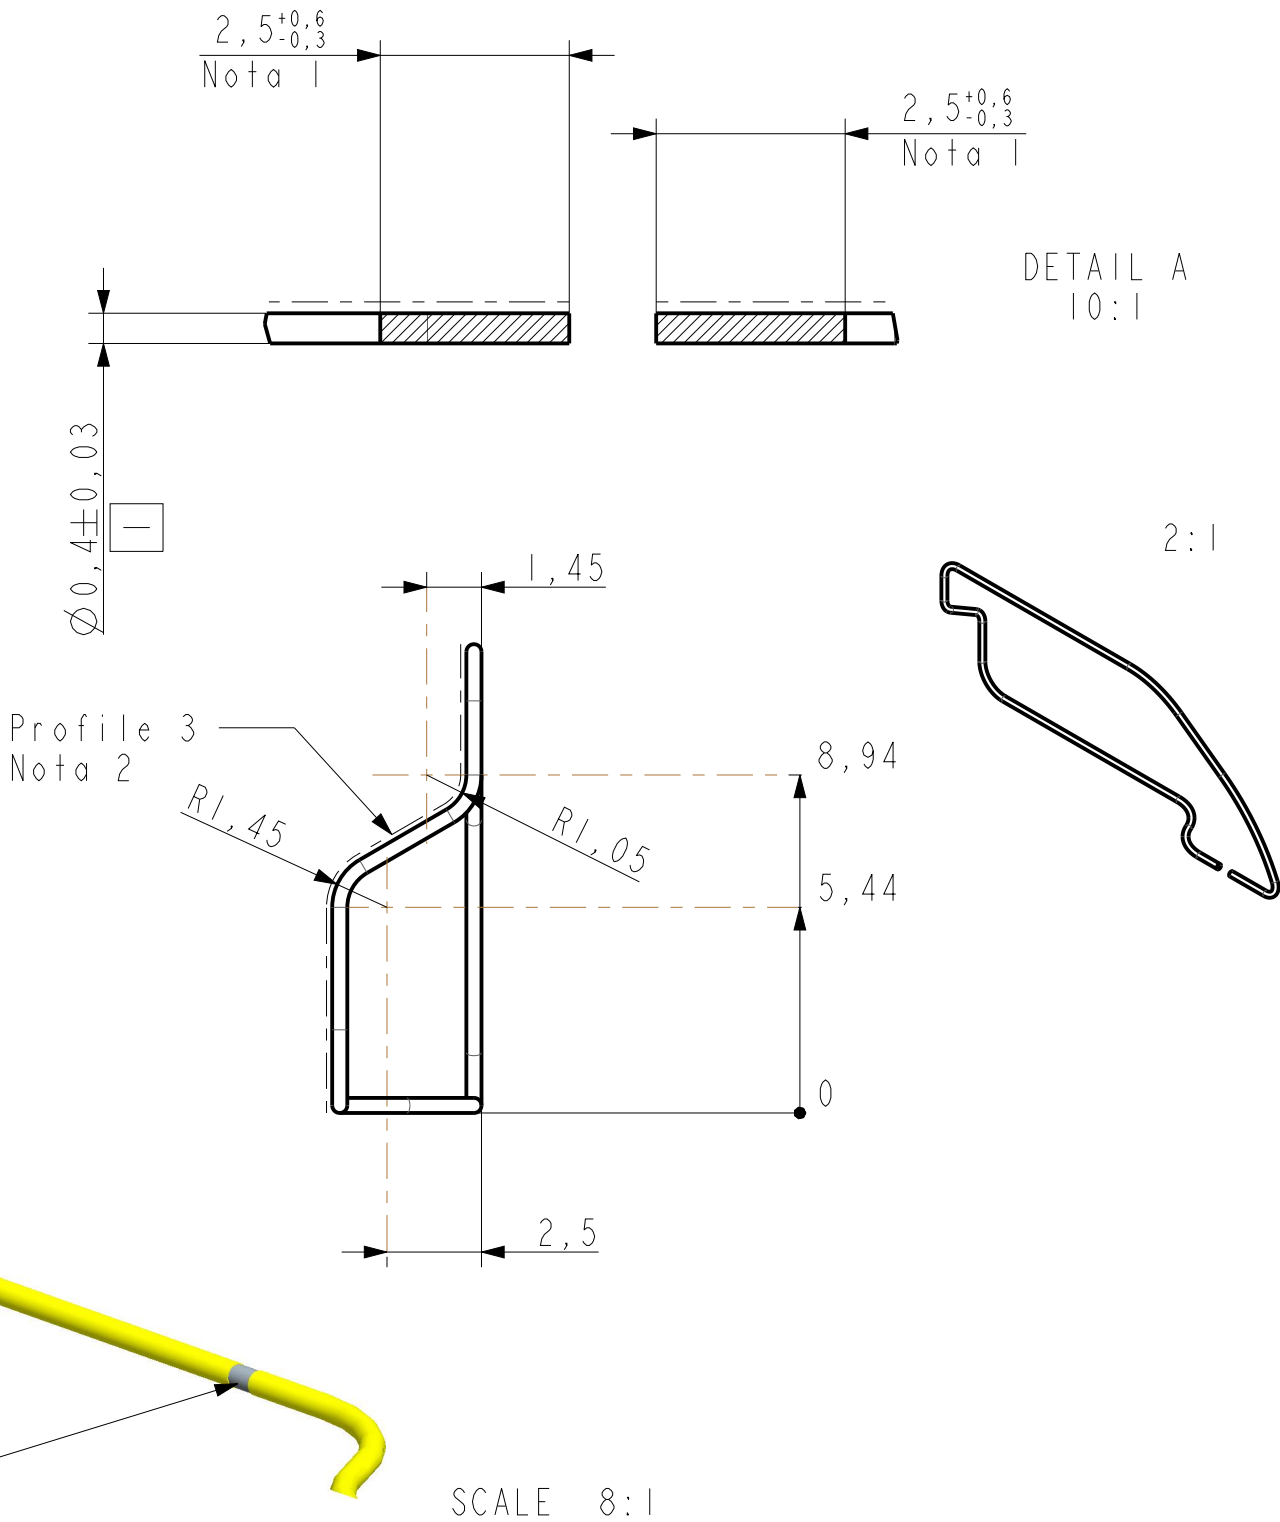


Electronic copy of the original approved and signed document

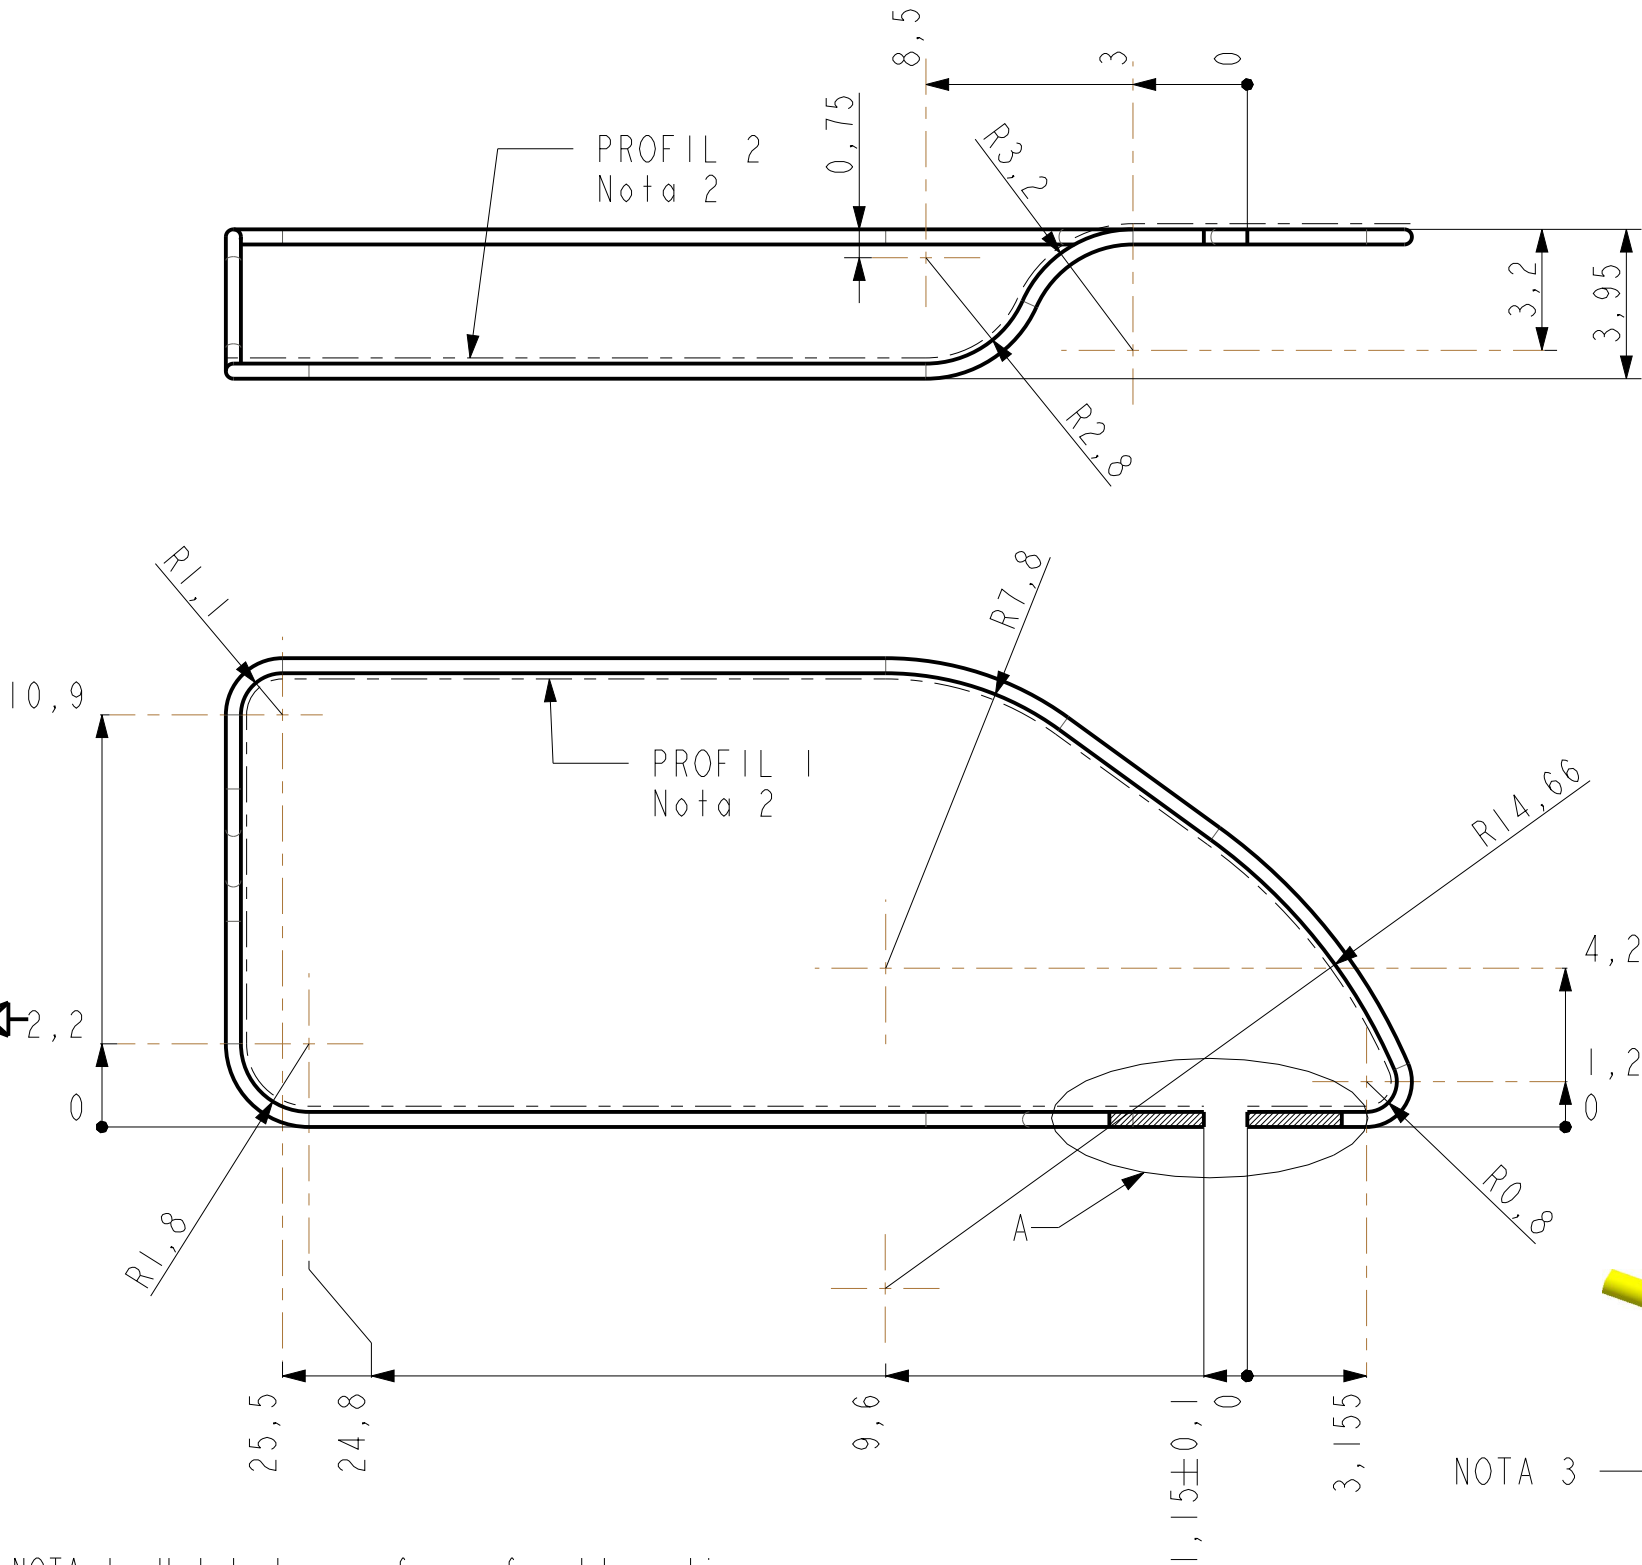

NOTA 1: Hatched area free of gold coating.

Gold plating: plate per ASTM B488-01, Type I, Code C, Class 5.0.
thickness 5 microns minimum, 11 microns maximum.
The hatched areas (2,5 mm and 2,5 mm unplated areas) must be free
of gold plating and any deposit used for surface preparation such as
nickel strikes.

NOTA 2: Dimensional control of the antenna profil 1, profil 2 and profil 3 will be
realized after final molding in the header.

NOTA 3: Scratches in the plating allowed
except where the continuity of the
plating around the circumference is no
maintaining.

This document is SORIN's property. It can not be copied or forwarded without prior agreement of SORIN group.						
A 25/10/12 AM018826	B	C	D	E	F	G
MATERIAL : Inox following SMCS711			REMARKS : For dimension modified, the text must be : Bold, Italic and in Red Color. ex: 2.66±0.05			
OVERALL TOLERANCES : ± 0.1			ANGLES : ± 2°			
CARDIAC RHYTHM MANAGEMENT			BIG ANTENNA DF4			
SORINGROUP AT THE HEART OF MEDICAL TECHNOLOGY			Mechanical Studies and Development (MSD)			
PREPARED BY: LUCAS DATE	CHECKED BY: ABHAMON DATE	APPROVED BY: BOUTAUD DATE	Scale 5:1 A3	G730		A 1/1