



74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
TEL: +82-31-645-6300 FAX: +82-31-645-6401

FCC WLAN REPORT

FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Address:
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue:

February 17, 2015

Test Site/Location:

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil,
Majang-myeon, Icheon-si, Gyeonggi-do, Korea

Report No.: HCT-R-1502-F016-1

HCT FRN: 0005866421

FCC ID : ZNFH326G

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

FCC Model(s): LG-H326g

Additional Model(s): LGH326g, H326g, LG-H326G, LGH326G, H326G, LG-H320mb, LGH320mb, H320mb, LG-H320MB, LGH320MB, H320MB, LG-H320AR, LGH320AR, H320AR

EUT Type: Cellular/PCS GSM/WCDMA Phone with WLAN and Bluetooth

Max. RF Output Power: Wi-Fi 802.11b(22.20 dBm) / Wi-Fi 802.11g (21.93 dBm)
/ Wi-Fi 802.11n_20 MHz (20.84 dBm) / Wi-Fi 802.11n_40 MHz (20.70 dBm)

Frequency Range: 2412 MHz - 2462 MHz (2.4 GHz Band)
2422 MHz - 2452 MHz (2.4 GHz Band)_40 MHz BW

Modulation type CCK/DSSS/OFDM

FCC Classification: Digital Transmission System(DTS)

FCC Rule Part(s): Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report prepared by
: Kyung Soo Kang
Test Engineer of RF Team

Approved by
: Sang Jun Lee
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1502-F016	February 06, 2015	- First Approval Report
HCT-R-1502-F016-1	February 17, 2015	- Retest the 6 dB Bandwidth, Conducted Power and PSD for HT40

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	7
7. SUMMARY TEST OF RESULTS	8
8. TEST RESULT	9
8.1 DUTY CYCLE.....	9
8.2 6dB BANDWIDTH (802.11b/g/n)	11
8.3 OUTPUT POWER (802.11b/g/n)	15
8.4 POWER SPECTRAL DENSITY (802.11b/g/n).....	28
8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	32
8.6 RADIATED MEASUREMENT.....	46
8.6.1 RADIATED SPURIOUS EMISSIONS.....	46
8.6.2 RADIATED RESTRICTED BAND EDGES	61
8.7 POWERLINE CONDUCTED EMISSIONS	64
9. LIST OF TEST EQUIPMENT	69
9.1 LIST OF TEST EQUIPMENT(Conducted Test)	69
9.2 LIST OF TEST EQUIPMENT(Radiated Test).....	70

1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFH326G
EUT Type: Cellular/PCS GSM/WCDMA Phone with WLAN and Bluetooth
Model name(s): LG-H326g
Additional Model(s): LGH326g, H326g, LG-H326G, LGH326G, H326G, LG-H320mb, LGH320mb, H320mb, LG-H320MB, LGH320MB, H320MB, LG-H320AR, LGH320AR, H320AR
Date(s) of Tests: January 23, 2015 ~ February 17, 2015
Place of Tests: HCT Co., Ltd.
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
(IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

FCC Model Name	LG-H326g	
Additional Model(s):	LGH326g, H326g, LG-H326G, LGH326G, H326G, LG-H320mb, LGH320mb, H320mb, LG-H320MB, LGH320MB, H320MB, LG-H320AR, LGH320AR, H320AR	
EUT Type	Cellular/PCS GSM/WCDMA Phone with WLAN and Bluetooth	
Power Supply	DC 3.8 V	
Battery type	Li-ion Battery(Standard)	
Frequency Range	TX: 2412 MHz ~ 2462 MHz, 2422 MHz - 2452 MHz_40 MHz BW RX: 2412 MHz ~ 2462 MHz, 2422 MHz - 2452 MHz_40 MHz BW	
Max. RF Output Power	Peak	Wi-Fi 802.11b(22.20 dBm) / Wi-Fi 802.11g (21.93 dBm) / Wi-Fi 802.11n_20 MHz (20.84 dBm) / Wi-Fi 802.11n_40 MHz (20.70dBm)
	Average	Wi-Fi 802.11b(16.04dBm) / Wi-Fi 802.11g (13.39 dBm) / Wi-Fi 802.11n_20 MHz (12.45 dBm) / Wi-Fi 802.11n_40 MHz (12.37 dBm)
Modulation Type	DSSS/CCK(802.11b), OFDM(802.11g, 802.11n)	
Antenna Specification	Manufacturer: IM-TECH Antenna type: FPCB Antenna Peak Gain : -2.71 dBi	

3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v03r02 dated June 05, 2014 entitled "Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) Operating Under §15.247" were used in the measurement.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

Conducted Antenna Terminal

See Section from 9.1 to 9.2.(KDB 558074)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated February 28, 2014 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

7. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.7		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.6.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.6.2		PASS

8. TEST RESULT


8.1 DUTY CYCLE

▣ TEST PROCEDURE

According to KDB 558074)6)b), issued 06/05/2014)

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

▣ TEST CONFIGURATION

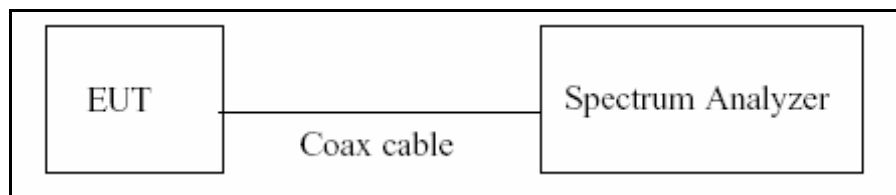

▣ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074(issued 06/05/2014)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ($\geq$ RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

Duty Cycle Factor

Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
b	1 Mbps	12.160	12.300	0.98861789	0.050
	2 Mbps	6.160	6.300	0.97777778	0.098
	5.5 Mbps	2.365	2.478	0.95439871	0.203
	11 Mbps	1.278	1.386	0.92207792	0.352
g	6 Mbs	2.011	2.132	0.94324578	0.254
	9 Mbs	1.341	1.461	0.91786448	0.372
	12 Mbs	1.020	1.131	0.90185676	0.449
	18 Mbs	0.684	0.795	0.86037736	0.653
	24 Mbs	0.522	0.633	0.82464455	0.837
	36 Mbs	0.355	0.464	0.76508621	1.163
	48 Mbs	0.271	0.380	0.71315789	1.468
	54 Mbs	0.243	0.352	0.69034091	1.609
n_20 MHz BW	6.5 Mbs	1.880	1.995	0.94235589	0.258
	13 Mbs	0.955	1.070	0.89252336	0.494
	19.5 Mbs	0.653	0.763	0.85583224	0.676
	26 Mbs	0.497	0.607	0.81878089	0.868
	39 Mbs	0.346	0.457	0.75711160	1.208
	52 Mbs	0.266	0.375	0.70933333	1.491
	58.5 Mbs	0.242	0.351	0.68945869	1.615
	65 Mbs	0.222	0.331	0.67069486	1.735
n_40 MHz BW	13.5 Mbps	0.920	1.035	0.88888889	0.512
	27 Mbps	0.482	0.592	0.81418919	0.893
	40.5 Mbps	0.334	0.442	0.75565611	1.217
	54 Mbps	0.259	0.367	0.70572207	1.514
	81 Mbps	0.187	0.294	0.63605442	1.965
	108 Mbps	0.147	0.255	0.57647059	2.392
	121.5 Mbps	0.135	0.243	0.55555556	2.553
	135 Mbps	0.127	0.235	0.54042553	2.673

Note : Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$. where, Duty Cycle = $T_{\text{on}} / T_{\text{total}}$


8.2 6dB BANDWIDTH (802.11b/g/n)

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

▣ TEST CONFIGURATION



▣ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Page 5 in KDB 558074, issued 06/05/2014)

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

TEST RESULTS

Conducted 6dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	9.13	0.500	Pass
2437	6	9.13	0.500	Pass
2462	11	9.58	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	16.41	0.500	Pass
2437	6	16.40	0.500	Pass
2462	11	16.40	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11n_20 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	17.63	0.500	Pass
2437	6	17.64	0.500	Pass
2462	11	17.62	0.500	Pass


Conducted 6dB Bandwidth Measurements for 802.11n_40 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2422	3	36.02	0.500	Pass
2437	6	35.84	0.500	Pass
2452	9	36.04	0.500	Pass


Note : In order to simplify the report, attached plots were only the most wide 6 dB BW channel.

RESULT PLOTS


6dB Bandwidth plot (802.11b-CH 11)

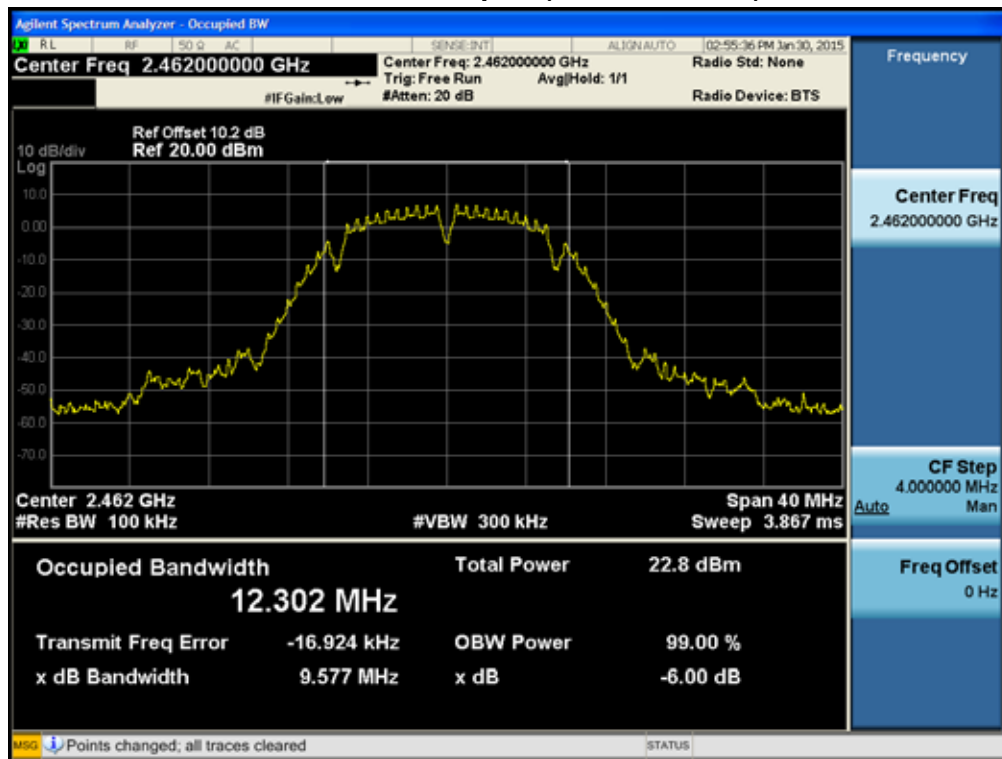


6dB Bandwidth plot (802.11g-CH 1)

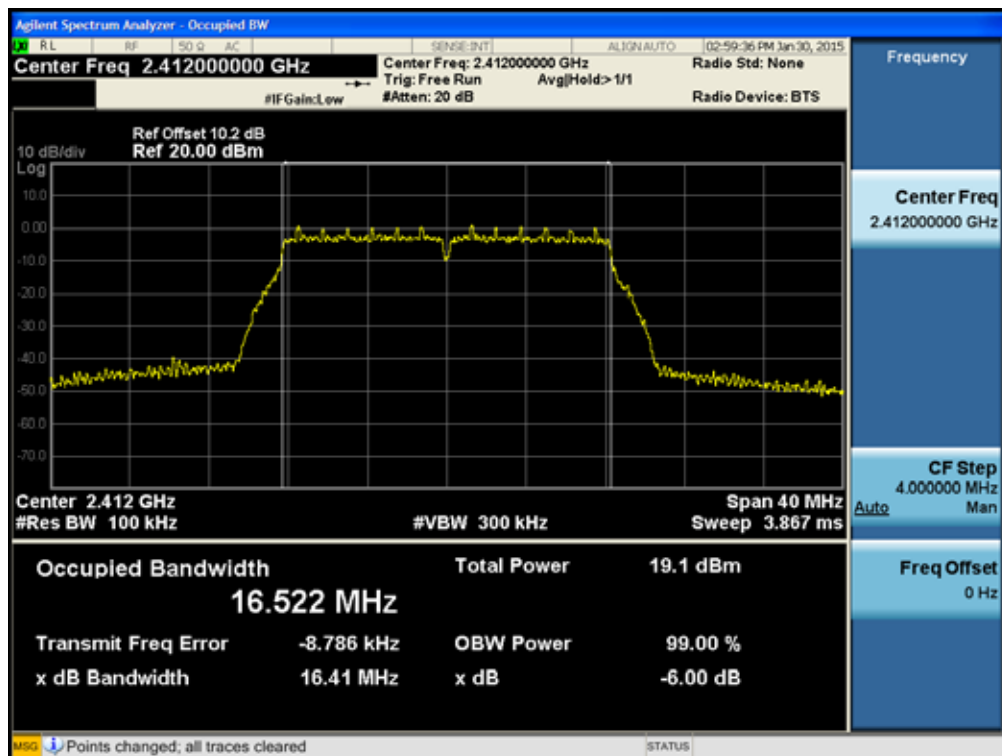

6dB Bandwidth plot (802.11n-CH 6) _20 MHz BW

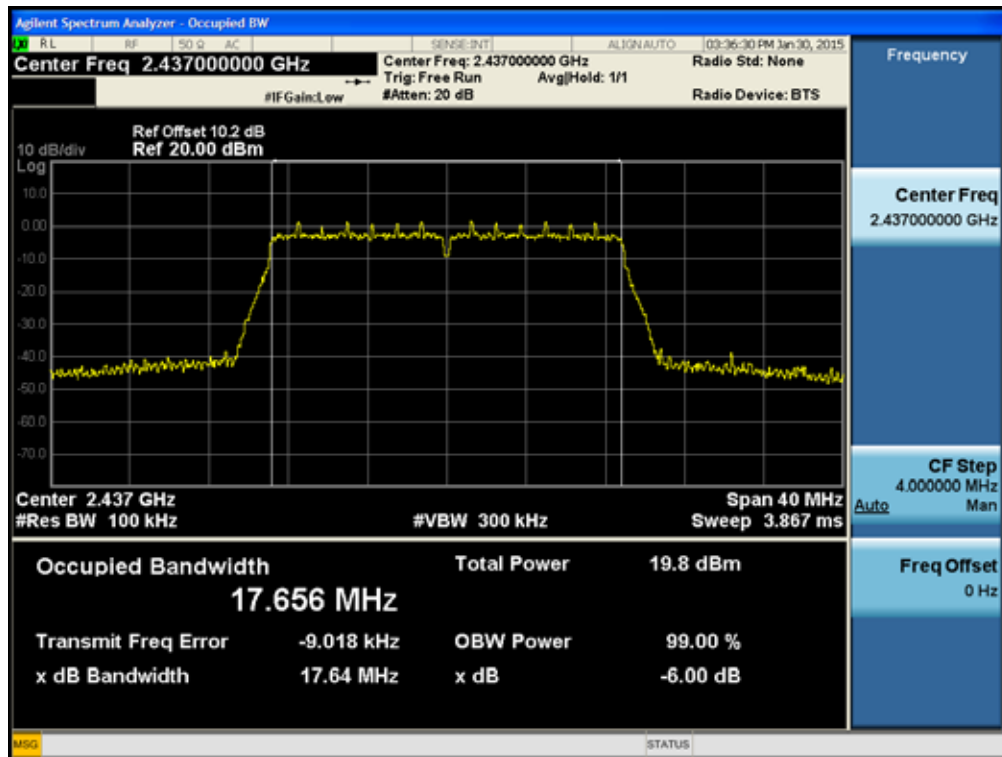

6dB Bandwidth plot (802.11n-CH 6) _40 MHz BW

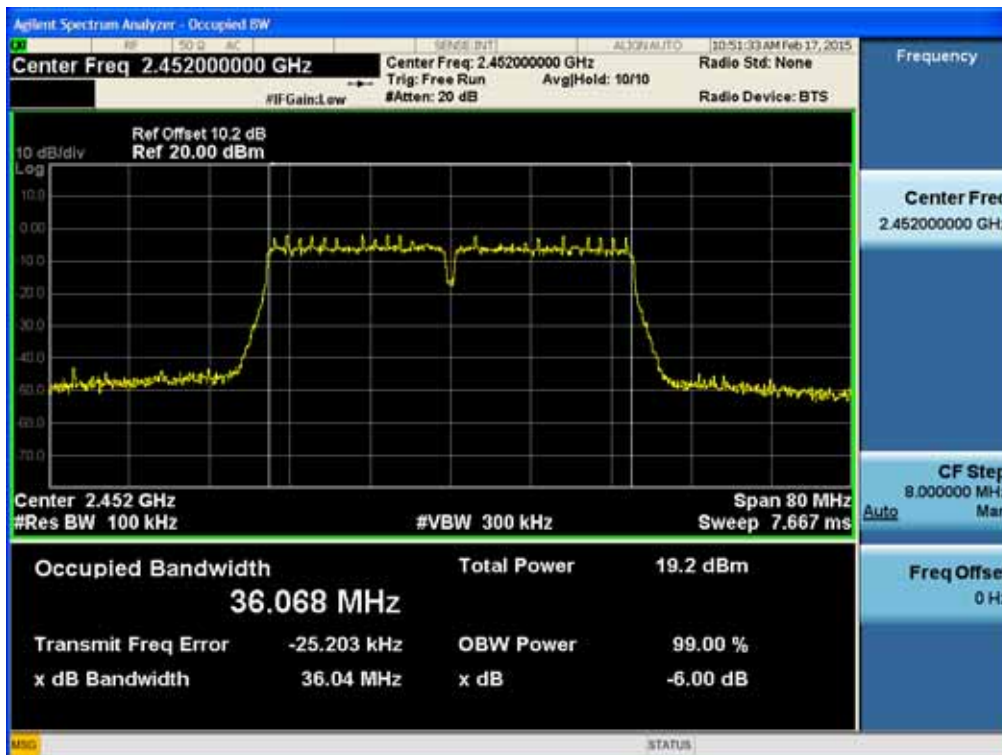


8.3 OUTPUT POWER (802.11b/g/n)

Test Requirements and limit, §15.247(b)(3)

The transmitter output is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

▣ TEST CONFIGURATION(20 MHz BW)



▣ TEST PROCEDURE(20 MHz BW)

- Peak Power (Procedure 9.1.2 in KDB 558074, issued 06/05/2014)
 1. Measure the peak power of the transmitter.
- Average Power (Procedure 9.2.3.1 in KDB 558074, issued 06/05/2014)
 1. Measure the duty cycle.
 2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.


Note :

1. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band.

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.21
	2437	10.24
	2462	10.24

(Actual value of loss for the attenuator and cable combination)

▣ TEST CONFIGURATION(40 MHz BW)**▣ TEST PROCEDURE(40 MHz BW)**

Power sensor(N9121A) is supported only implemented a VBW of 30 MHz. So in case of 40 MHz power measurement, we used the integrated band power method.

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function.

The Spectrum Analyzer is set to

- Peak Power (Integrated Band Power Method)

RBW = 1 MHz

VBW $\geq 3 \times$ RBW

SPAN $\geq 1.5 \times$ DTS bandwidth

Detector Mode = Peak

Sweep = auto couple

Trace Mode = max hold

Allow trace to fully stabilize.

Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector).

- Average Power (Procedure 9.2.2.4 in KDB 558074, issued 06/05/2014)

Measure the duty cycle

Set span to at least 1.5 times the OBW

RBW = 1-5 % of the OBW, not to exceed 1 MHz.

VBW $\geq 3 \times$ RBW.

Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS(i.e., power averaging)

Do not use sweep triggering. Allow the sweep to "free run".

Trace average at least 100 traces in power averaging(RMS) mode.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.

Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

■ Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Output Power = 10 dBm + 20 dB + 0.8 dB + 0.2 dB = 31.0 dBm

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band and

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	20.21
	2437	20.24
	2462	20.24

(Actual value of loss for the attenuator and cable combination)

▣ TEST RESULTS-Peak

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1	17.34	30
		2	17.70	30
		5.5	19.10	30
		11	20.95	30
2437	6	1	18.51	30
		2	18.85	30
		5.5	20.29	30
		11	22.20	30
2462	11	1	17.95	30
		2	18.29	30
		5.5	19.73	30
		11	21.55	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6	19.82	30
		9	19.84	30
		12	19.97	30
		18	19.95	30
		24	20.59	30
		36	20.51	30
		48	20.41	30
		54	20.41	30
2437	6	6	21.24	30
		9	21.33	30
		12	21.39	30
		18	21.37	30
		24	21.93	30
		36	21.61	30
		48	21.69	30
		54	21.72	30
2462	11	6	20.61	30
		9	20.64	30
		12	20.73	30
		18	20.75	30
		24	21.23	30
		36	20.94	30
		48	21.12	30
		54	21.09	30

Conducted Output Power Measurements (802.11n Mode) _20 MHz BW

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6.5	19.09	30
		13	19.21	30
		19.5	19.18	30
		26	19.44	30
		39	19.48	30
		52	19.63	30
		58.5	19.65	30
		65	19.43	30
2437	6	6.5	20.35	30
		13	20.37	30
		19.5	20.35	30
		26	20.68	30
		39	20.72	30
		52	20.82	30
		58.5	20.84	30
		65	20.65	30
2462	11	6.5	19.38	30
		13	19.50	30
		19.5	19.49	30
		26	19.97	30
		39	19.94	30
		52	19.69	30
		58.5	19.80	30
		65	19.77	30

Conducted Output Power Measurements (802.11n Mode) _40 MHz BW

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2422	3	13.5 Mbps	19.87	30
		27 Mbps	19.96	30
		40.5 Mbps	19.77	30
		54 Mbps	20.28	30
		81 Mbps	20.17	30
		108 Mbps	20.24	30
		121.5 Mbps	20.29	30
		135 Mbps	20.28	30
2437	6	13.5 Mbps	20.20	30
		27 Mbps	20.26	30
		40.5 Mbps	19.90	30
		54 Mbps	20.34	30
		81 Mbps	20.39	30
		108 Mbps	20.56	30
		121.5 Mbps	20.55	30
		135 Mbps	20.52	30
2452	9	13.5 Mbps	20.25	30
		27 Mbps	20.35	30
		40.5 Mbps	20.33	30
		54 Mbps	20.66	30
		81 Mbps	20.64	30
		108 Mbps	20.70	30
		121.5 Mbps	20.64	30
		135 Mbps	20.57	30

TEST RESULTS-Average

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1	14.73	0.050	14.78	30
		2	14.80	0.098	14.90	30
		5.5	14.66	0.203	14.86	30
		11	14.42	0.352	14.78	30
2437	6	1	15.86	0.050	15.91	30
		2	15.93	0.098	16.02	30
		5.5	15.84	0.203	16.04	30
		11	15.64	0.352	16.00	30
2462	11	1	15.23	0.050	15.28	30
		2	15.30	0.098	15.40	30
		5.5	15.14	0.203	15.34	30
		11	15.00	0.352	15.35	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6	11.69	0.254	11.94	30
		9	11.58	0.372	11.95	30
		12	11.51	0.449	11.96	30
		18	11.36	0.653	12.01	30
		24	11.17	0.837	12.01	30
		36	10.89	1.163	12.05	30
		48	10.42	1.468	11.89	30
		54	10.29	1.609	11.90	30
2437	6	6	13.05	0.254	13.30	30
		9	13.01	0.372	13.38	30
		12	12.90	0.449	13.34	30
		18	12.72	0.653	13.37	30
		24	12.55	0.837	13.39	30
		36	12.00	1.163	13.16	30
		48	11.71	1.468	13.18	30
		54	11.61	1.609	13.22	30
2462	11	6	12.48	0.254	12.73	30
		9	12.34	0.372	12.71	30
		12	12.26	0.449	12.71	30
		18	12.14	0.653	12.79	30
		24	11.86	0.837	12.70	30
		36	11.36	1.163	12.52	30
		48	11.12	1.468	12.59	30
		54	11.00	1.609	12.61	30

Conducted Output Power Measurements (802.11n Mode)_ 20 MHz BW

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6.5	10.89	0.258	11.14	30
		13	10.66	0.494	11.16	30
		19.5	10.56	0.676	11.24	30
		26	10.40	0.868	11.27	30
		39	9.89	1.208	11.09	30
		52	9.61	1.491	11.11	30
		58.5	9.60	1.615	11.22	30
		65	9.27	1.735	11.00	30
2437	6	6.5	12.14	0.258	12.39	30
		13	11.89	0.494	12.38	30
		19.5	11.77	0.676	12.45	30
		26	11.32	0.868	12.19	30
		39	11.10	1.208	12.31	30
		52	10.81	1.491	12.30	30
		58.5	10.77	1.615	12.39	30
		65	10.43	1.735	12.17	30
2462	11	6.5	11.18	0.258	11.44	30
		13	11.00	0.494	11.50	30
		19.5	10.85	0.676	11.53	30
		26	10.71	0.868	11.58	30
		39	10.36	1.208	11.57	30
		52	9.71	1.491	11.20	30
		58.5	9.68	1.615	11.30	30
		65	9.59	1.735	11.32	30

Conducted Output Power Measurements (802.11n Mode) _40 MHz BW

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2422	3	13.5 Mbps	11.35	0.512	11.86	30
		27 Mbps	10.98	0.893	11.88	30
		40.5 Mbps	10.49	1.217	11.70	30
		54 Mbps	10.26	1.514	11.77	30
		81 Mbps	9.81	1.965	11.77	30
		108 Mbps	9.45	2.392	11.84	30
		121.5 Mbps	9.32	2.553	11.87	30
		135 Mbps	9.18	2.673	11.86	30
2437	6	13.5 Mbps	11.63	0.512	12.14	30
		27 Mbps	11.23	0.893	12.12	30
		40.5 Mbps	10.94	1.217	12.16	30
		54 Mbps	10.41	1.514	11.92	30
		81 Mbps	9.97	1.965	11.93	30
		108 Mbps	9.67	2.392	12.06	30
		121.5 Mbps	9.54	2.553	12.10	30
		135 Mbps	9.44	2.673	12.11	30
2452	9	13.5 Mbps	11.76	0.512	12.27	30
		27 Mbps	11.41	0.893	12.30	30
		40.5 Mbps	11.10	1.217	12.31	30
		54 Mbps	10.85	1.514	12.37	30
		81 Mbps	10.17	1.965	12.13	30
		108 Mbps	9.85	2.392	12.24	30
		121.5 Mbps	9.67	2.553	12.22	30
		135 Mbps	9.54	2.673	12.21	30

RESULT PLOTS-Peak

40 MHz BW

(2422 MHz ~2452 MHz)

Conducted Output Power (802.11n-CH 9) 108Mbps



▣ RESULT PLOTS-Average

40 MHz BW

(2422 MHz ~2452 MHz)

Conducted Output Power (802.11n-CH 9) 54 Mbps




8.4 POWER SPECTRAL DENSITY (802.11b/g/n)

Test Requirements and limit, §15.247(e)

The peak power spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

▣ TEST CONFIGURATION



▣ TEST PROCEDURE

We tested according to Procedure 10.2 in KDB 558074, issued 06/05/2014

The spectrum analyzer is set to :

Set analyzer center frequency to DTS channel center frequency.

Span = 1.5 times the DTS channel bandwidth.

RBW = 3 kHz ≤ RBW ≤ 100 kHz.

VBW ≥ 3 x RBW.

Sweep = auto couple

Detector = peak

Trace Mode = max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

▣ Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea)

Output Power = -5 dBm + 10 dB + 0.8 dB = 5.8 dBm

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band.

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.21
	2437	10.24
	2462	10.24

(Actual value of loss for the attenuator and cable combination)

TEST RESULTS


Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result		
			PSD (dBm)	Limit (dBm)	Pass/Fail
2412	1	802.11b	-7.969	8	Pass
2437	6		-6.117	8	Pass
2462	11		-7.586	8	Pass
2412	1	802.11g	-13.062	8	Pass
2437	6		-12.717	8	Pass
2462	11		-13.265	8	Pass
2412	1	802.11n (20 MHz BW)	-15.001	8	Pass
2437	6		-14.235	8	Pass
2462	11		-14.065	8	Pass
2422	3	802.11n (40 MHz BW)	-17.941	8	Pass
2437	6		-16.976	8	Pass
2452	9		-16.646	8	Pass


Note : In order to simplify the report, attached plots were only the highest PSD channel.

RESULT PLOTS


Power Spectral Density (802.11b-CH 6)

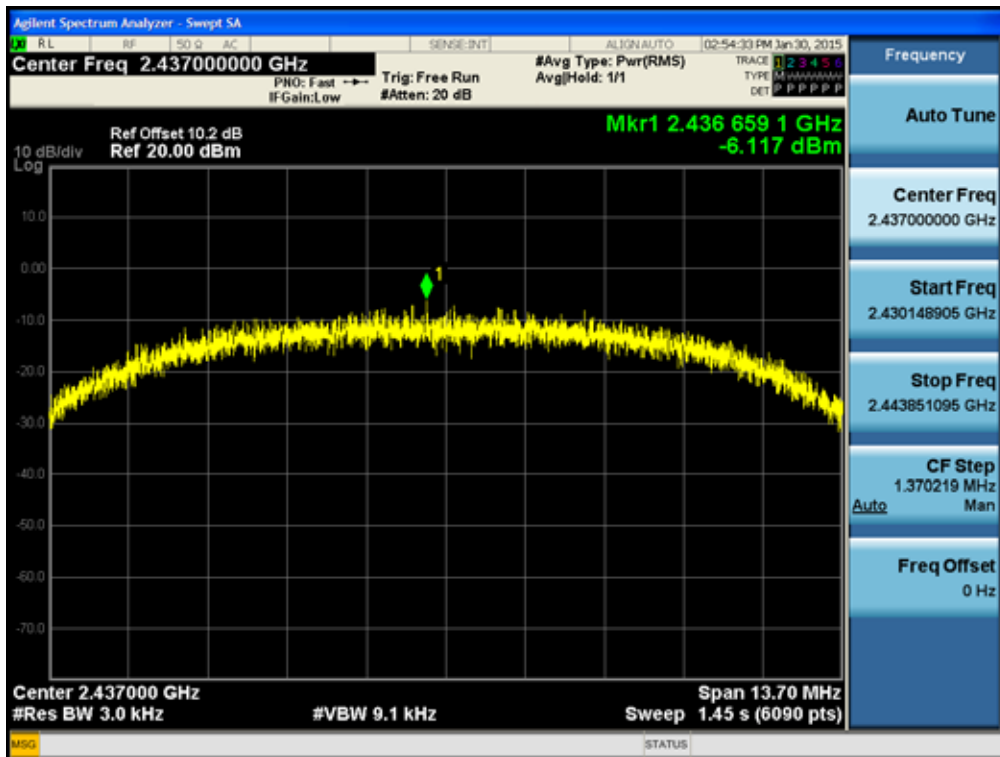


Power Spectral Density (802.11g-CH 6)

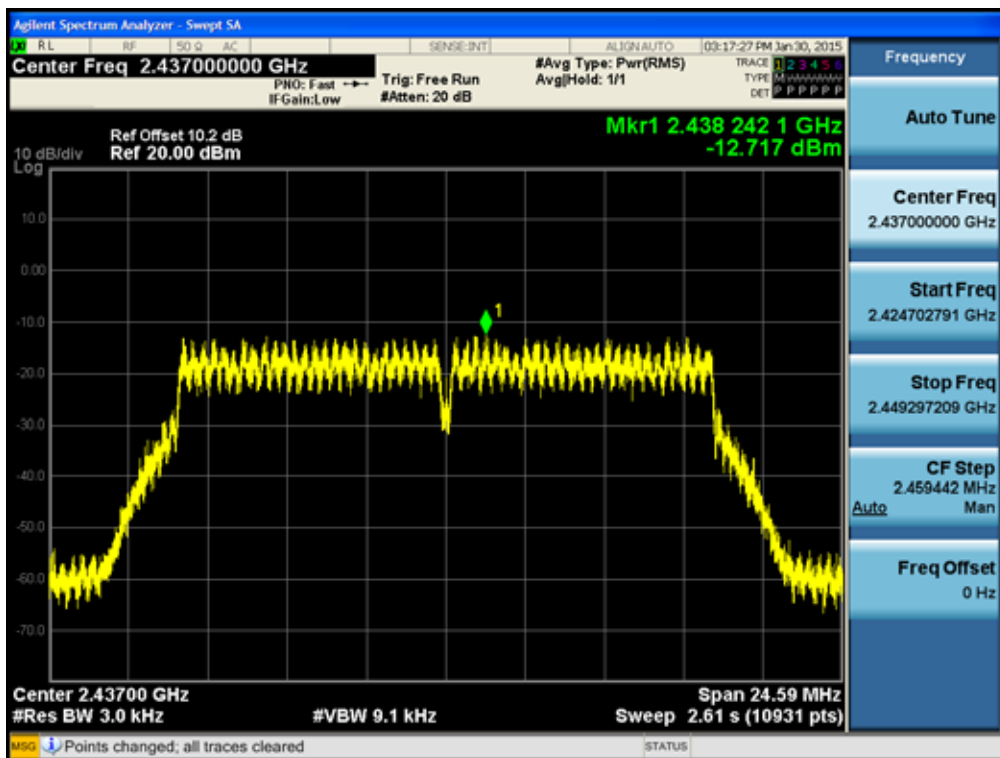

Power Spectral Density (802.11n-CH 11) _ 20 MHz BW)

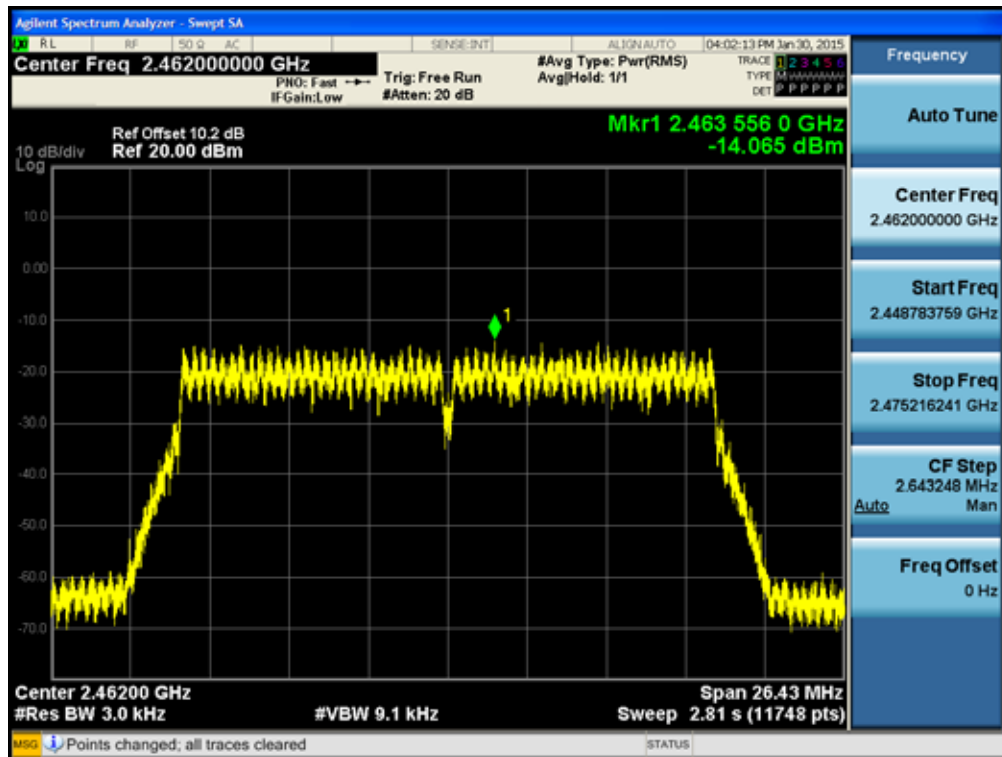

Power Spectral Density (802.11n-CH 9) _ 40 MHz BW)

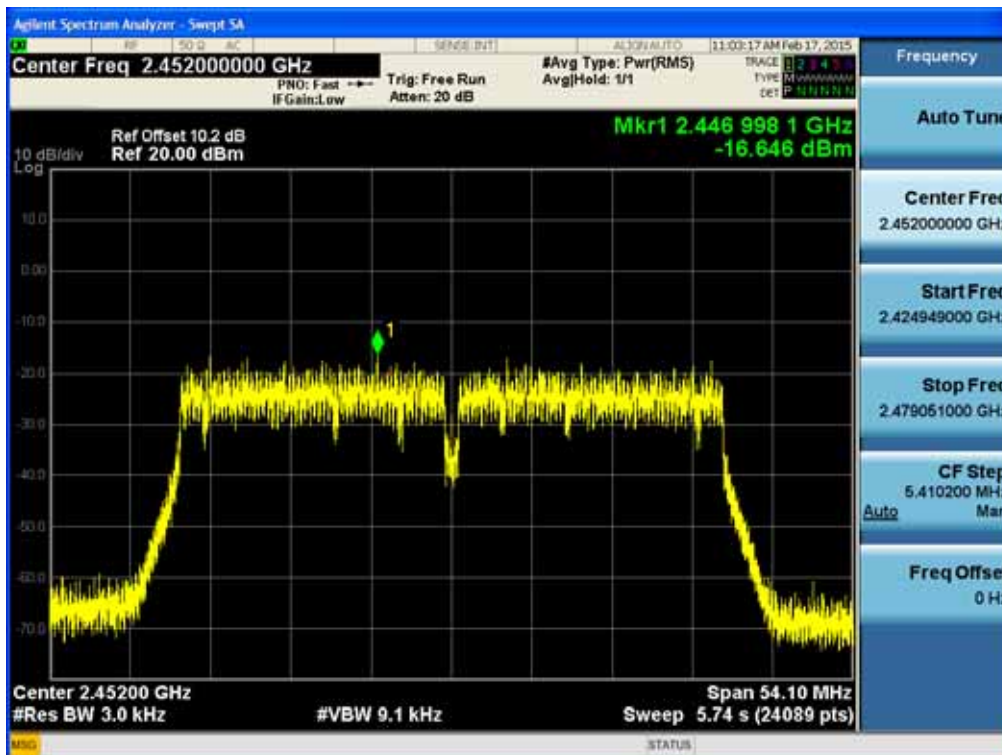


8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit : 20 dBc

▣ TEST CONFIGURATION



▣ TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. (Procedure 11.0 in KDB 558074, issued 06/05/2014)

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Set span to encompass the spectrum to be examined

Detector = Peak

Trace Mode = max hold

Sweep time = auto couple

Ensure that the number of measurement points $\geq$ Span/RBW

Allow trace to fully stabilize.

Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 10th harmonic range with the transmitter set to the lowest, middle, and highest channels.

Note :

1. The band edge results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band. Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.21
	2437	10.24
	2462	10.24

(Actual value of loss for the attenuator and cable combination)

4. In case of conducted spurious emissions test, please check factors blow table.
5. In order to simplify the report, attached plots were only the worst case channel.

FACTORS FOR FREQUENCY

Freq(MHz)	Factor(dB)
30	9.95
100	10.01
200	10.03
300	10.04
400	10.05
500	10.04
600	10.03
700	10.09
800	10.10
900	10.08
1000	10.11
2000	10.25
2400*	10.19
2500*	10.26
3000	10.27
4000	10.22
5000	10.48
5700*	10.42
5800*	10.48
6000	10.48
7000	10.57
8000	10.45


9000	10.50
10000	10.64
11000	10.69
12000	10.75
13000	10.92
14000	11.90
15000	11.00
16000	11.03
17000	10.93
18000	10.96
19000	10.85
20000	12.11
21000	11.17
22000	10.99
23000	11.12
24000	11.10
25000	11.42

Note : 1. '**' is fundamental frequency range.


2. Factor = Cable loss + Attenuator loss

RESULT PLOTS


BandEdge (802.11b-CH1)

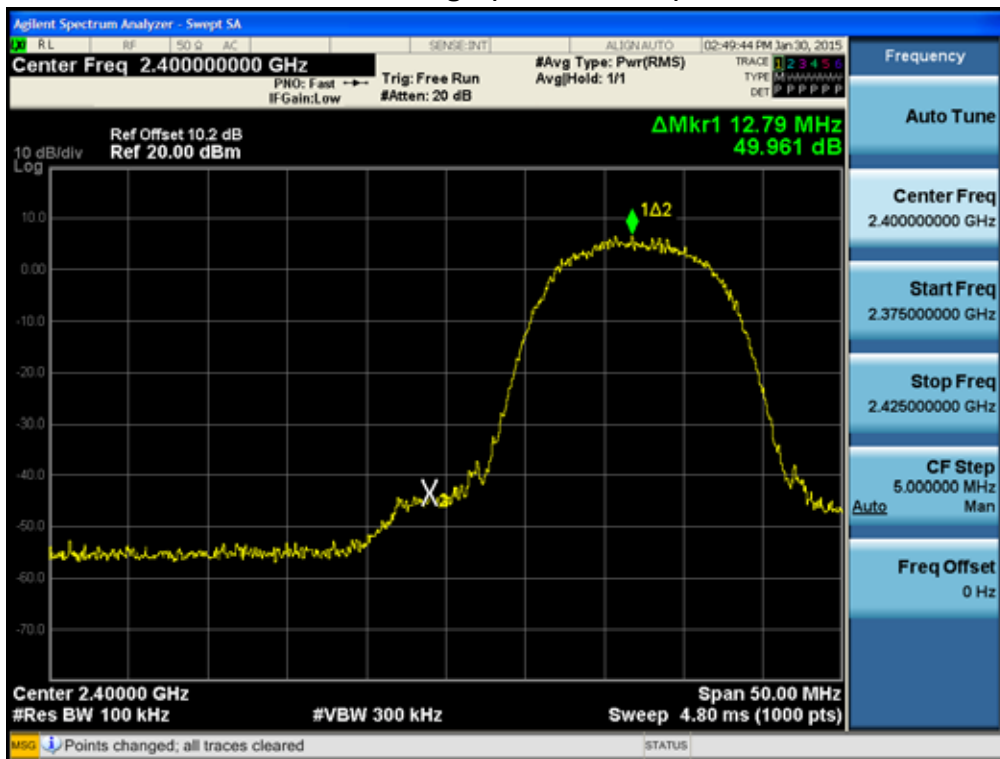


BandEdge (802.11b-CH11)

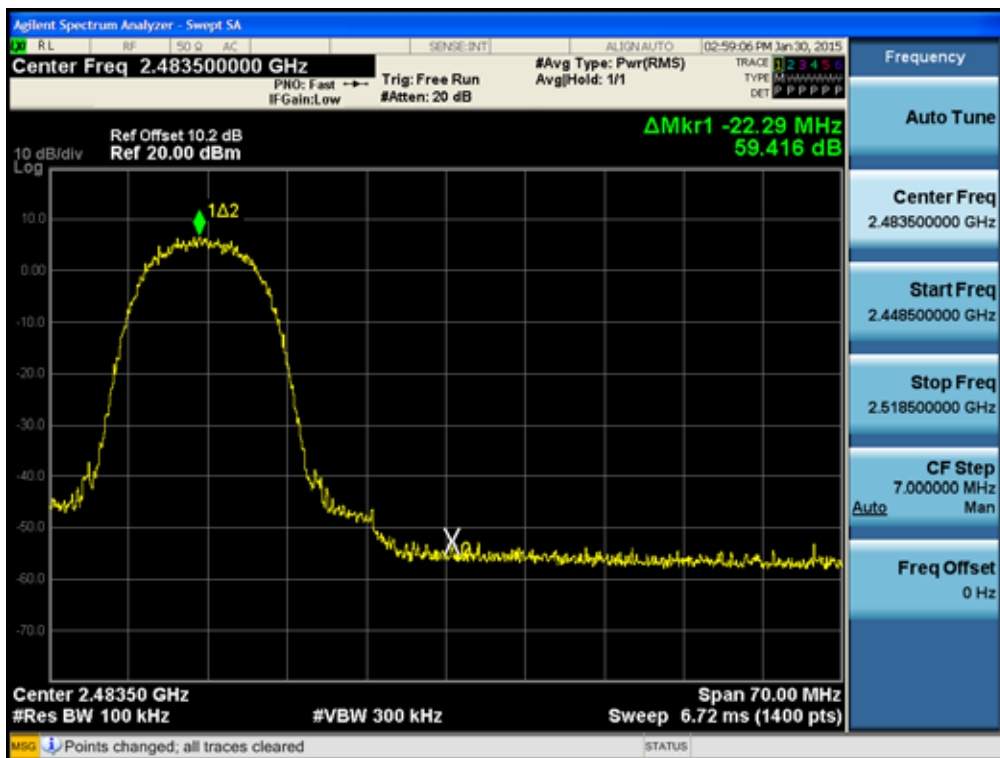


BandEdge (802.11g-CH1)

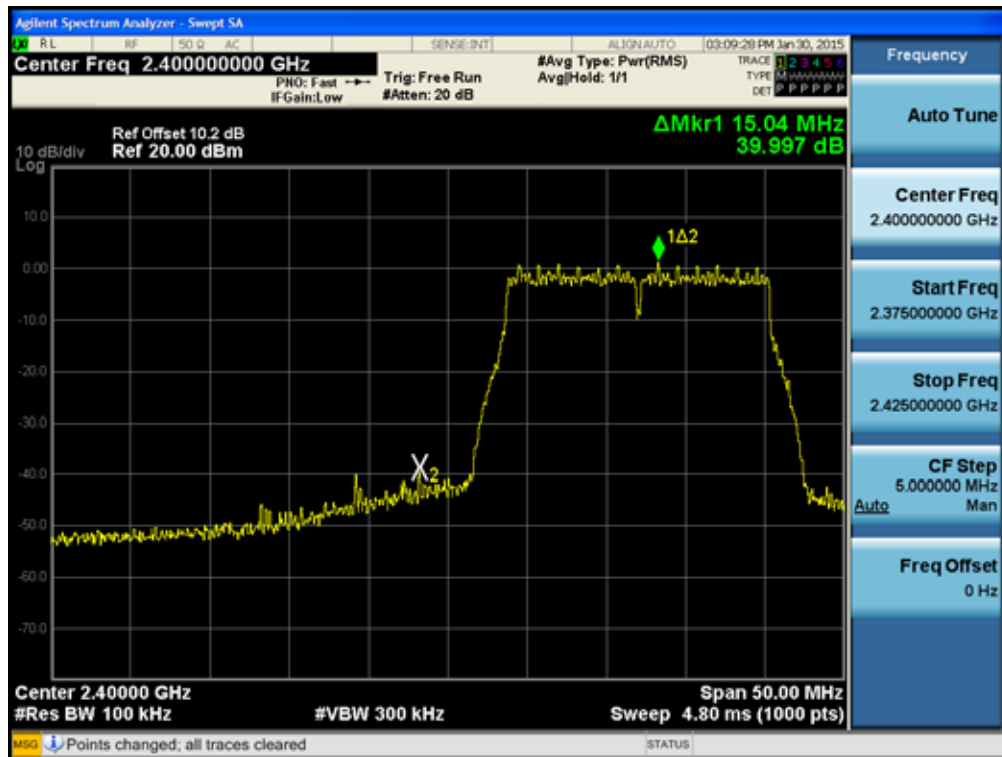


BandEdge (802.11g-CH11)

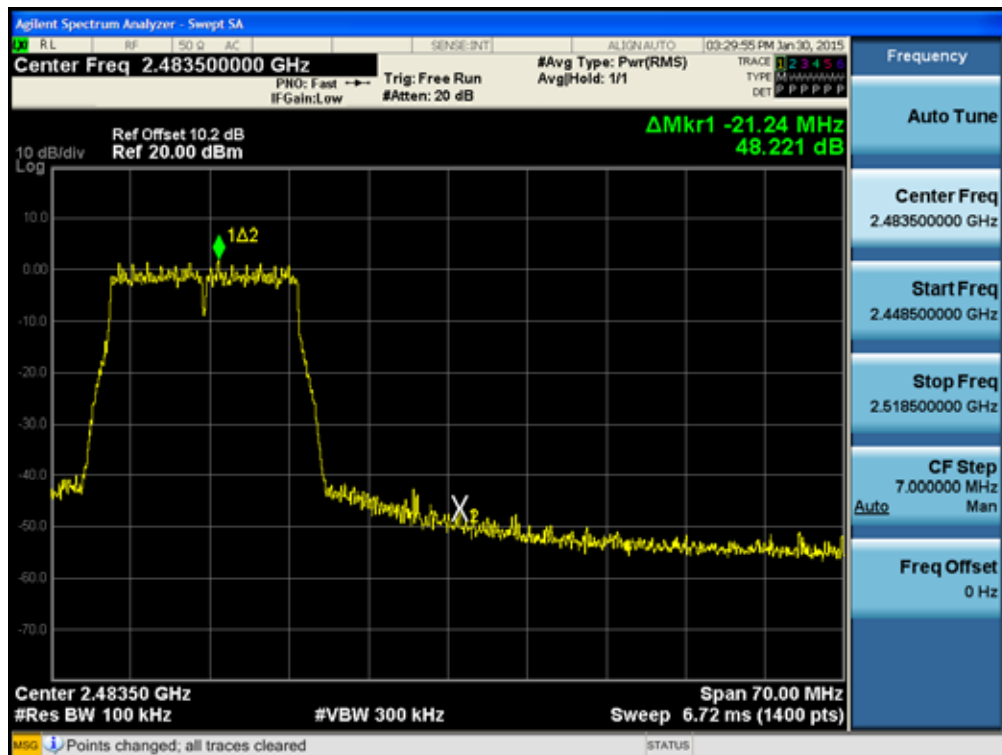


Band Edge (802.11n-CH1) _ 20 MHz BW

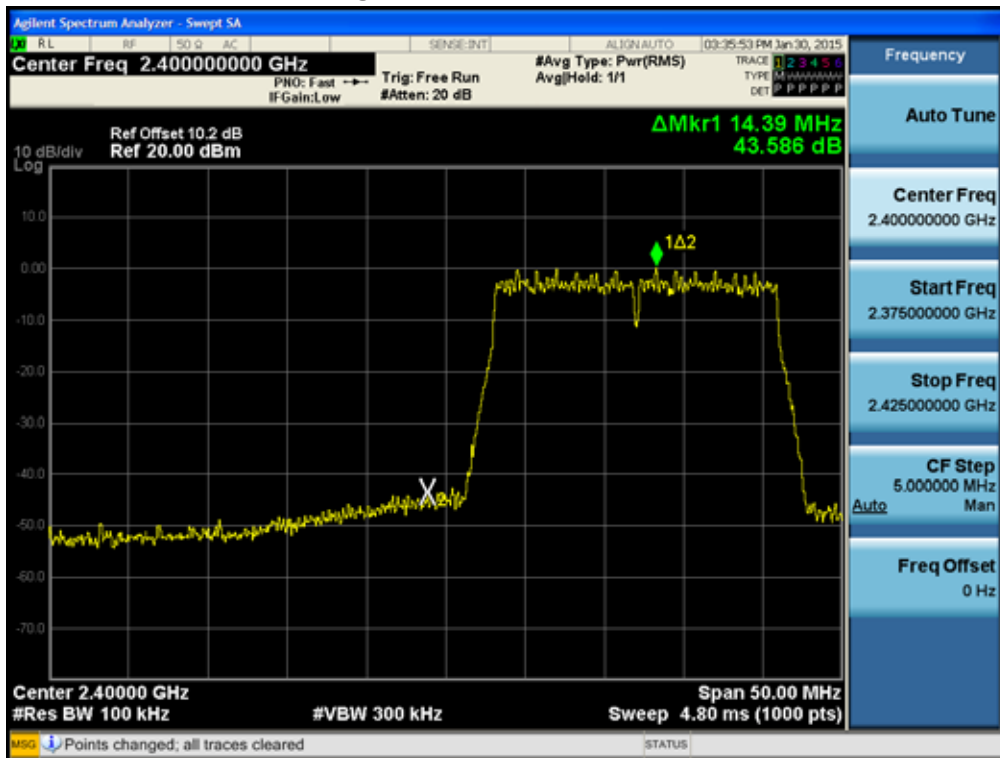


Band Edge (802.11n-CH11) _ 20 MHz BW

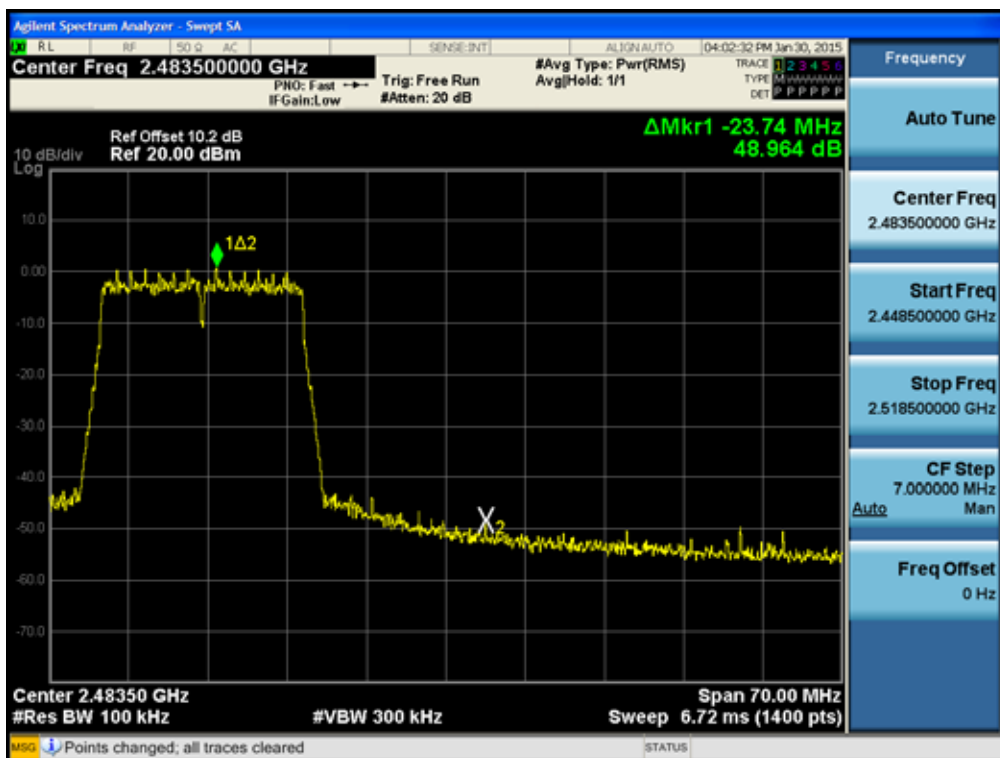

Band Edge (802.11n-CH1) _ 40 MHz BW

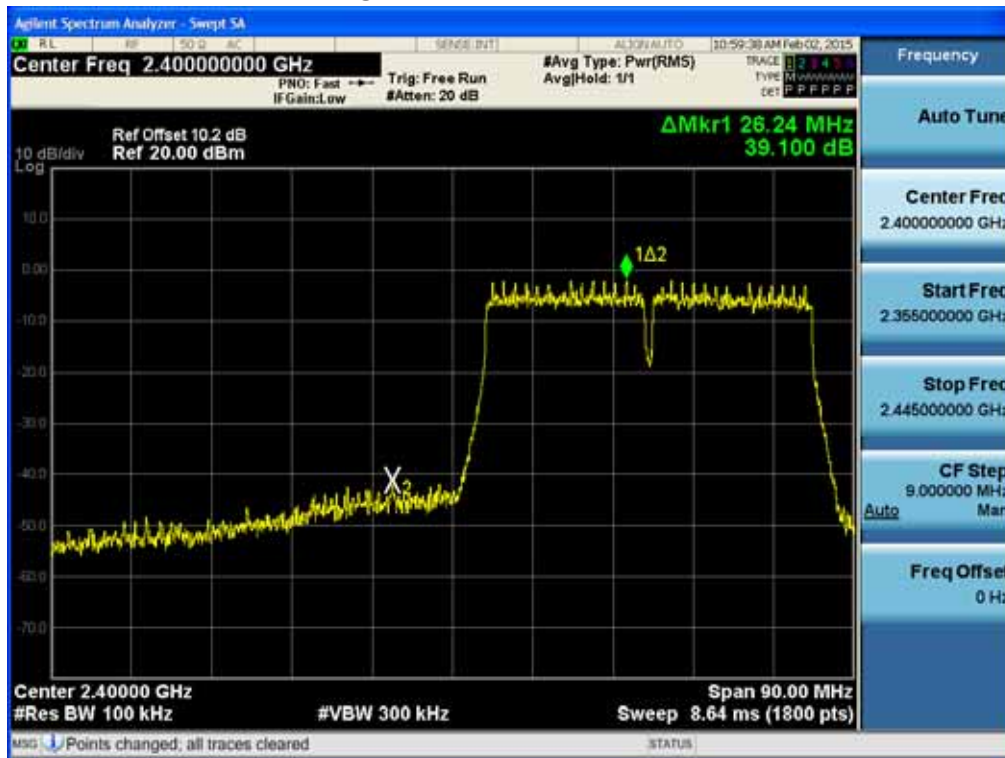


Band Edge (802.11n-CH11) _ 40 MHz BW

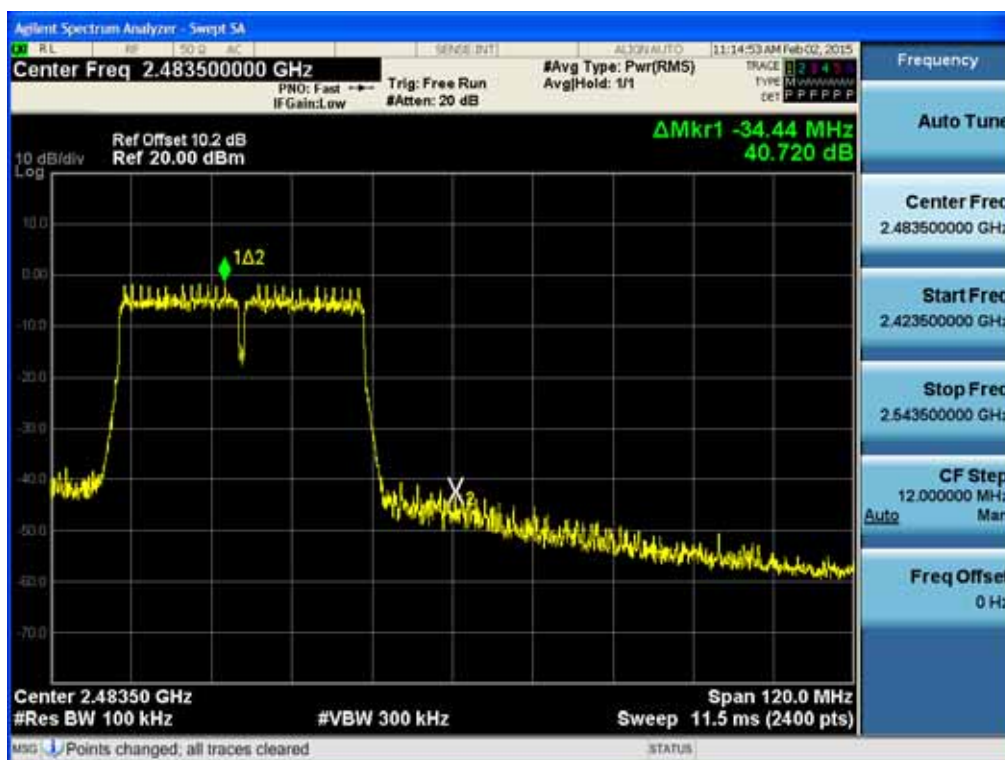


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

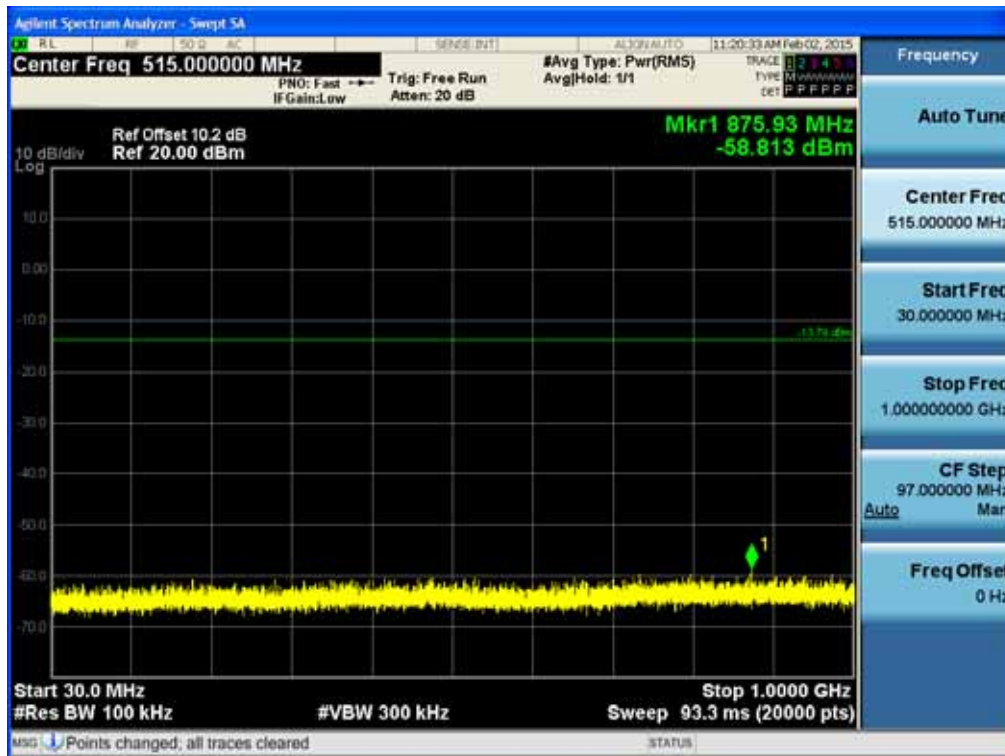


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

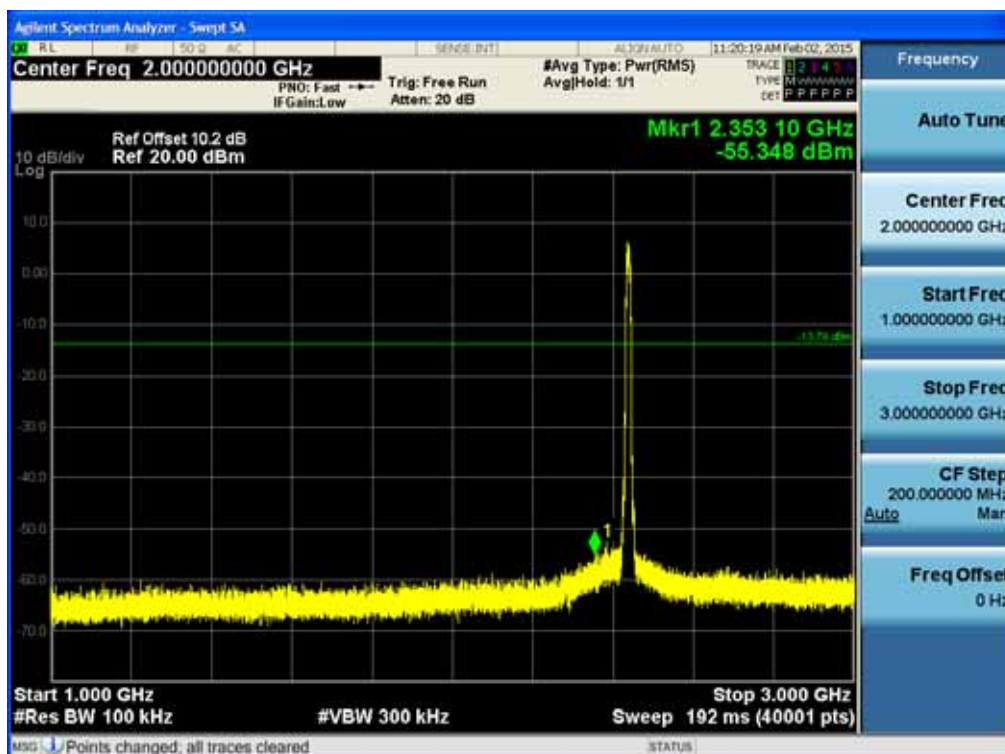


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

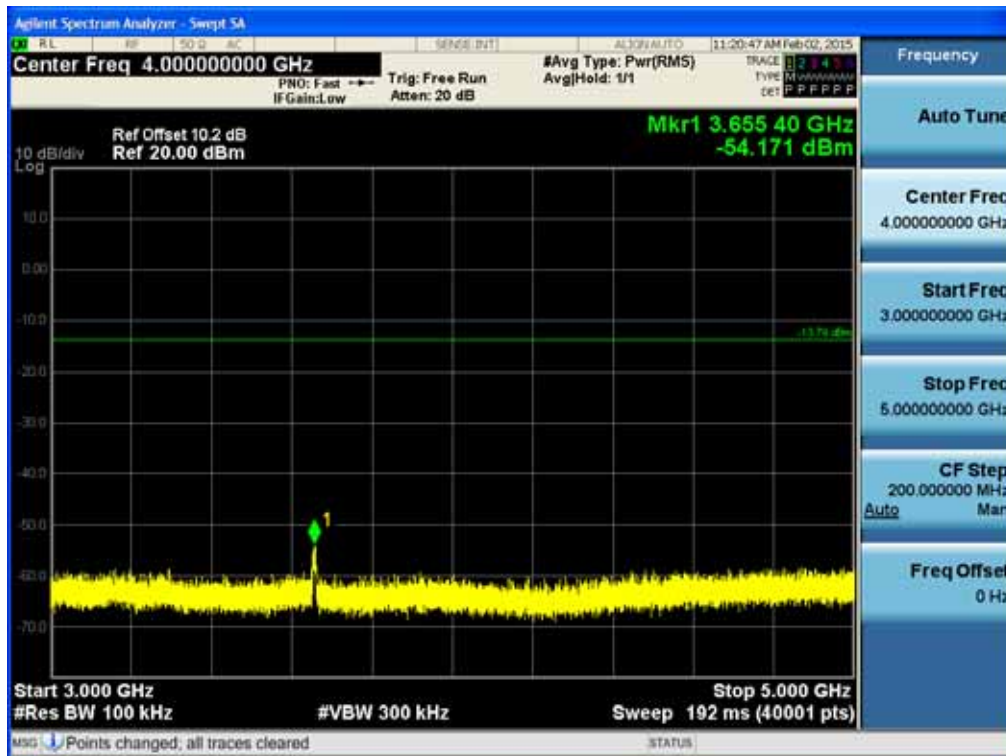


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

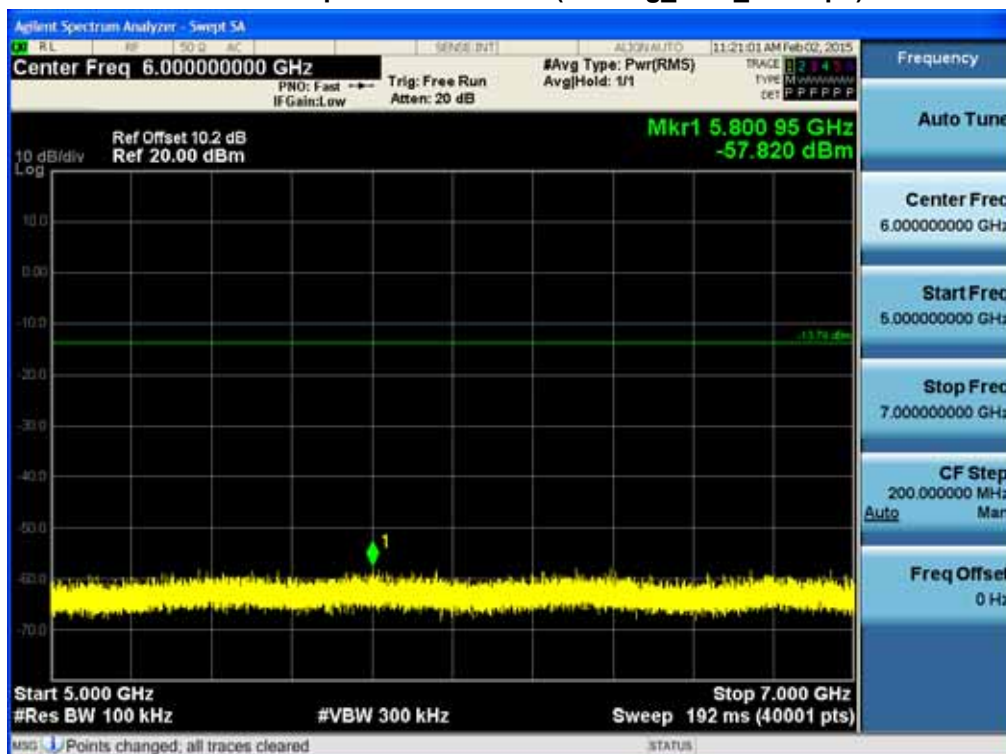


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

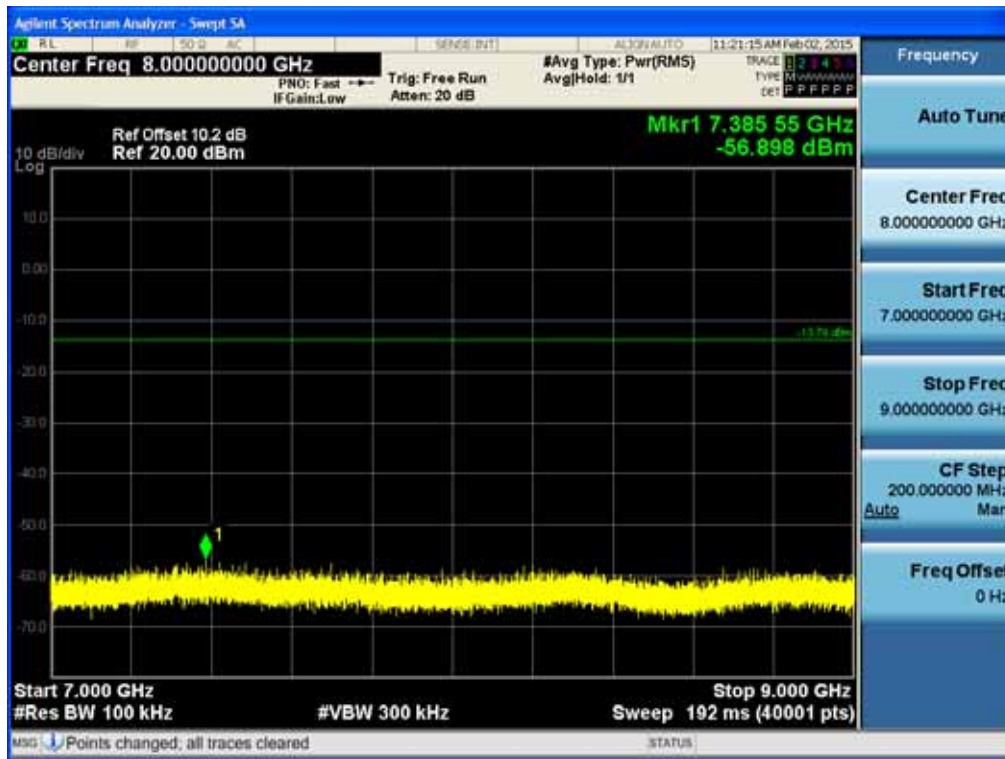


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

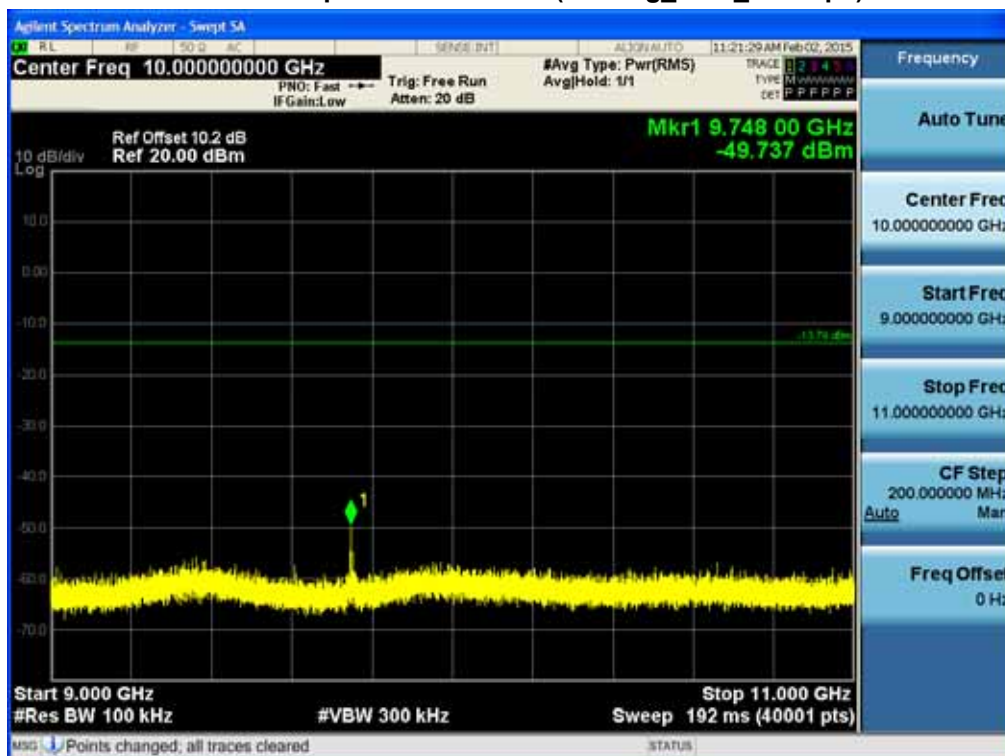


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

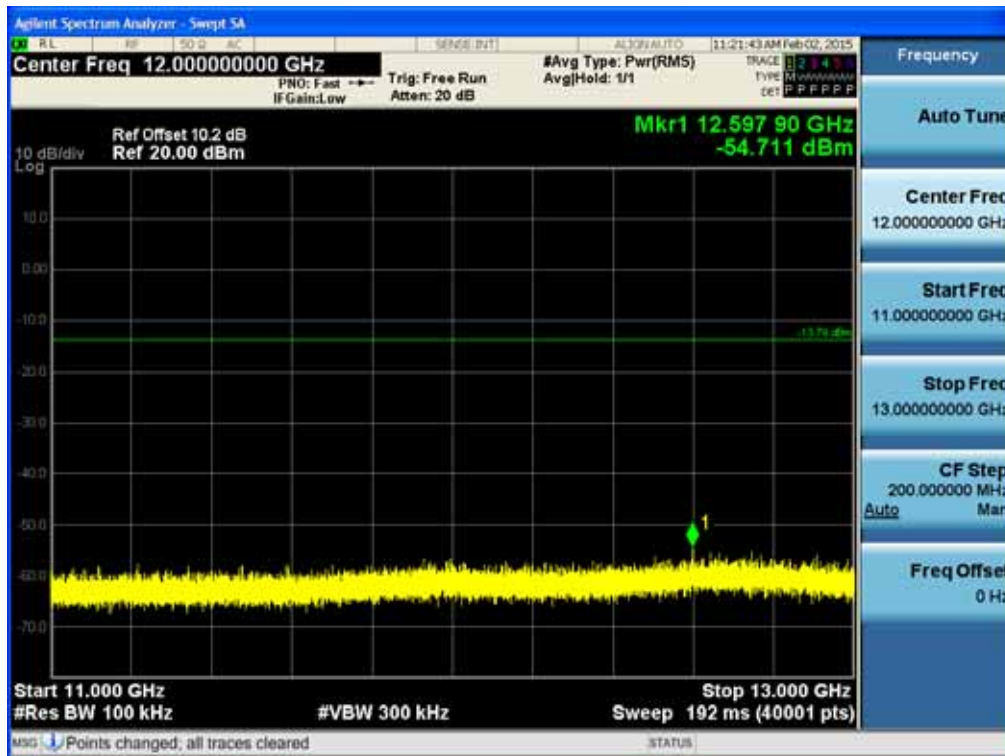


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

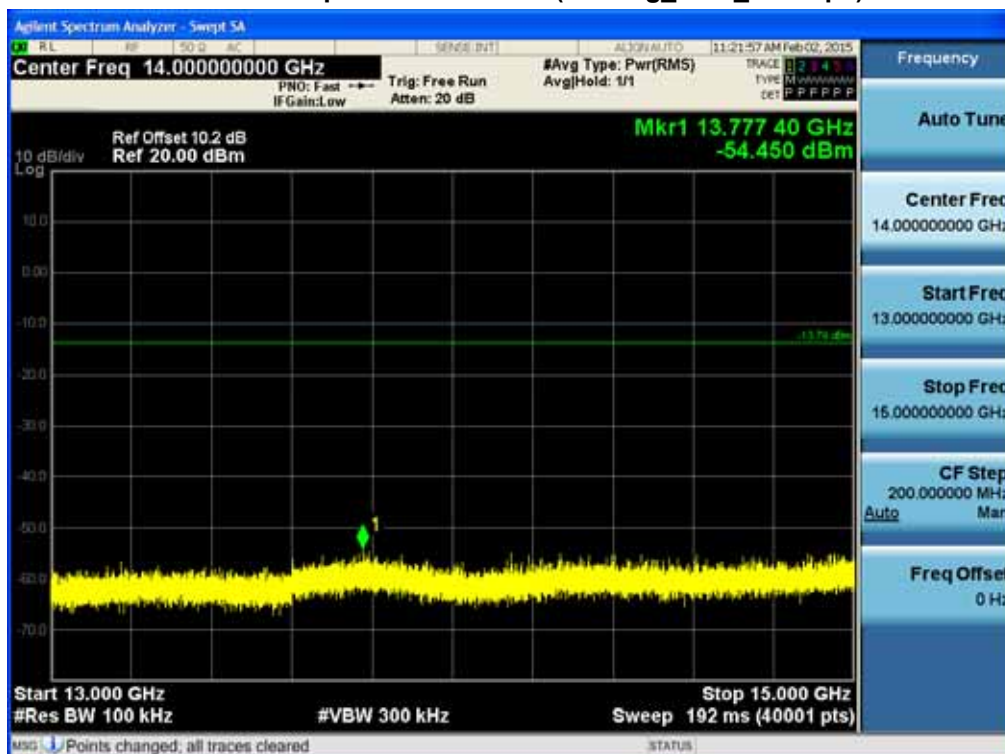


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

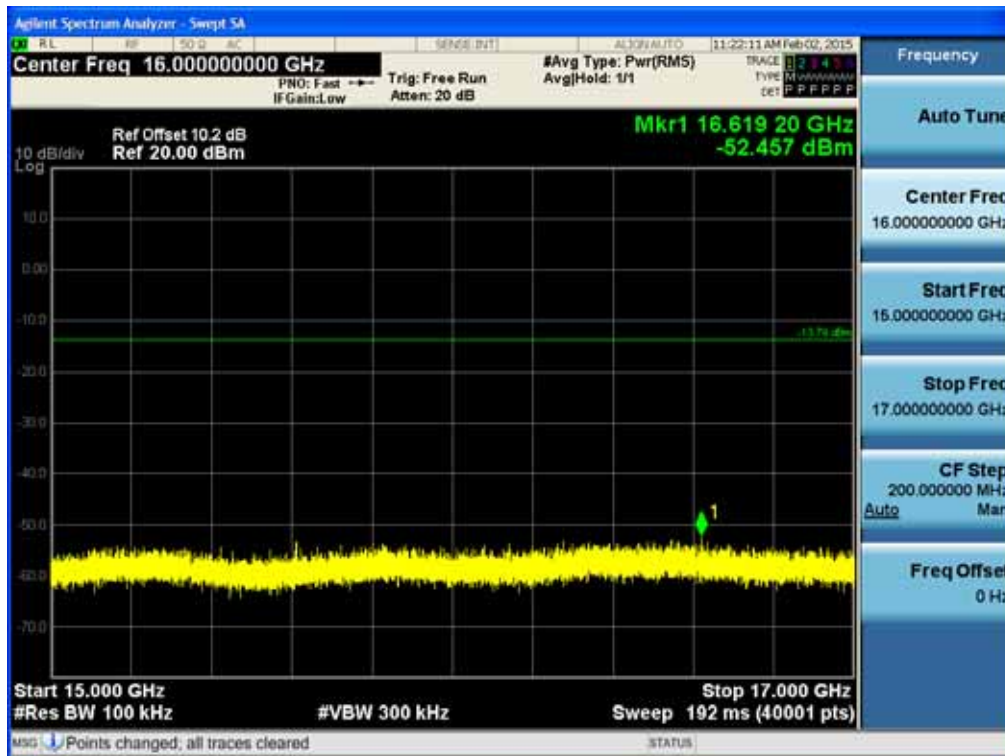


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

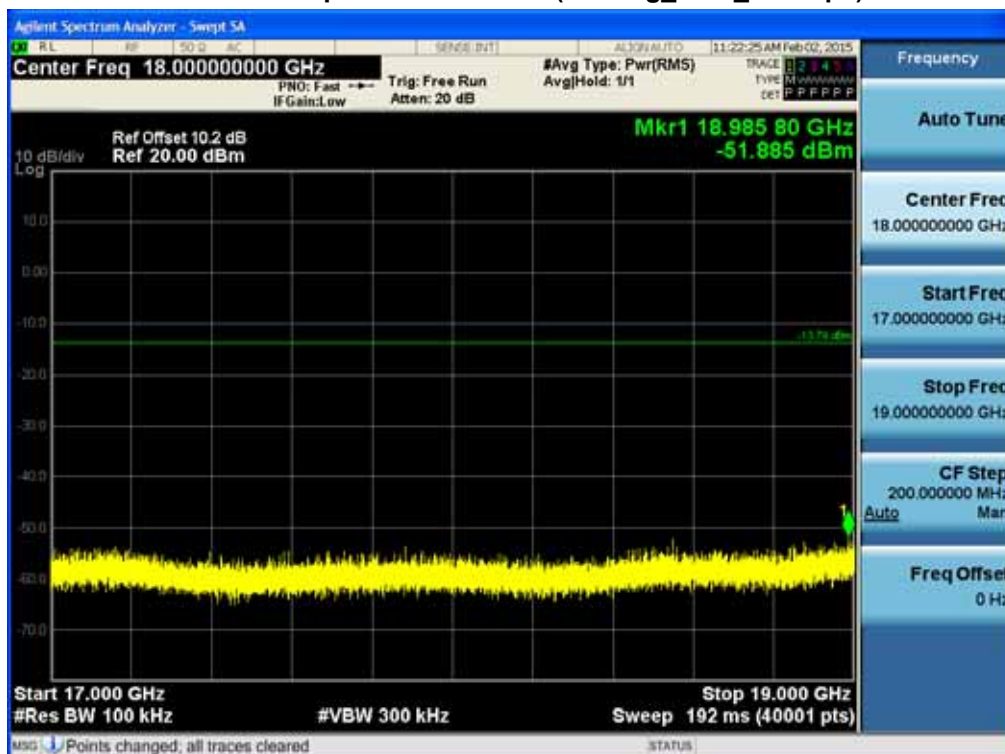


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

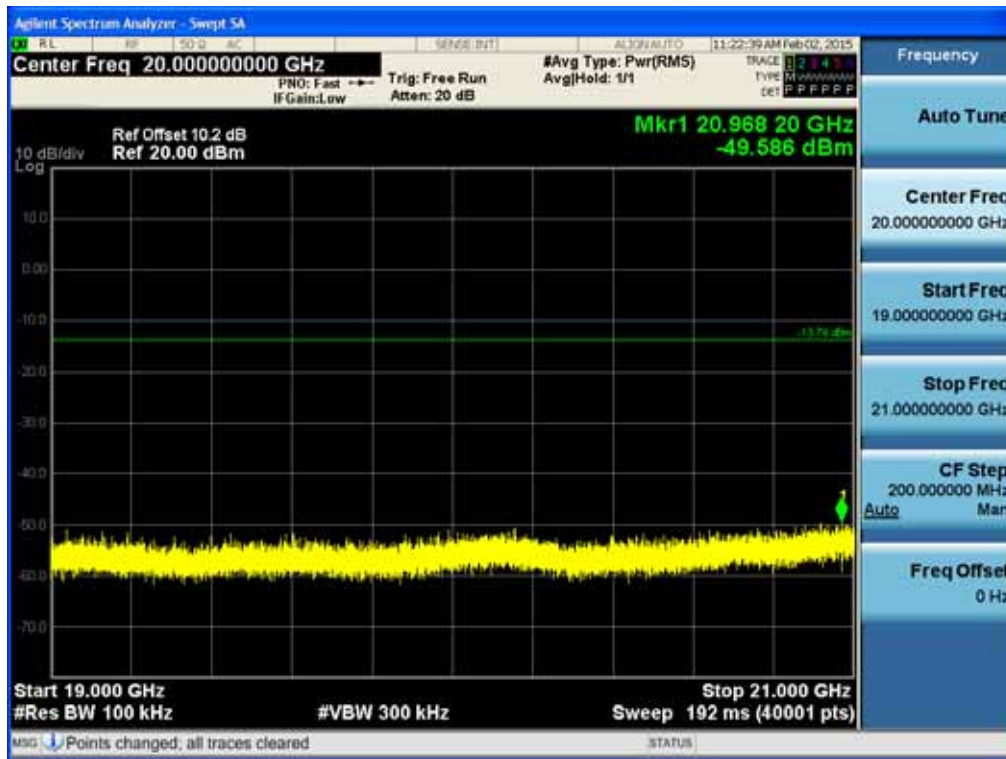

21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

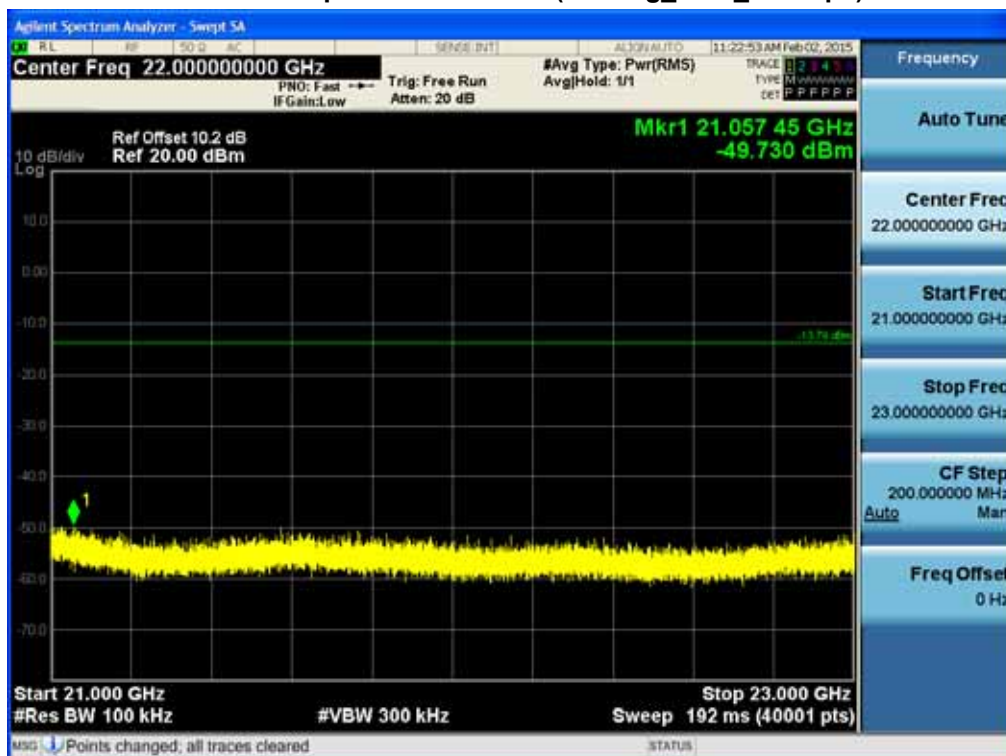

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)




8.6 RADIATED MEASUREMENT.**8.6.1 RADIATED SPURIOUS EMISSIONS.****Test Requirements and limit, §15.205, §15.209**


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

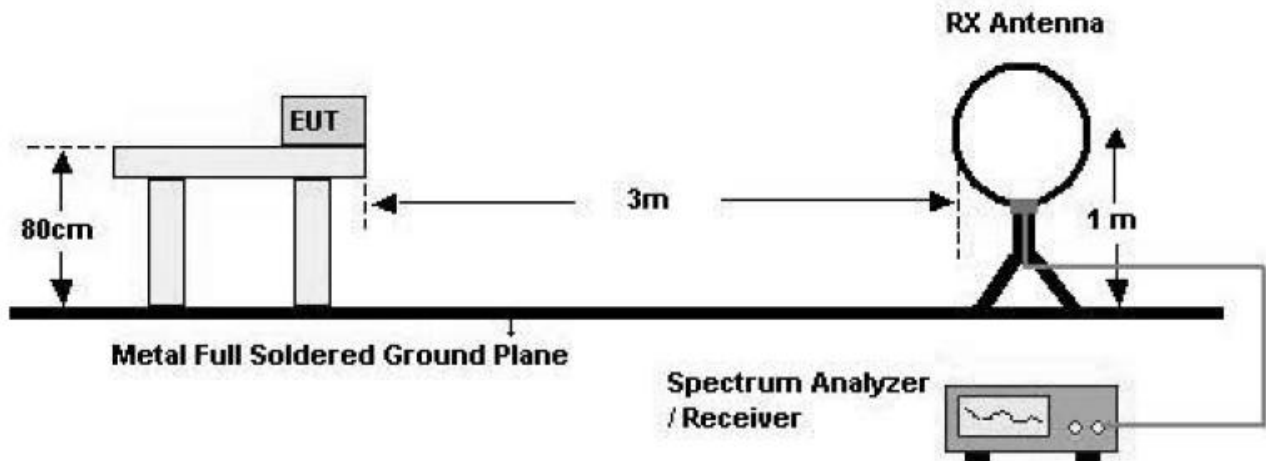

30 MHz - 1 GHz

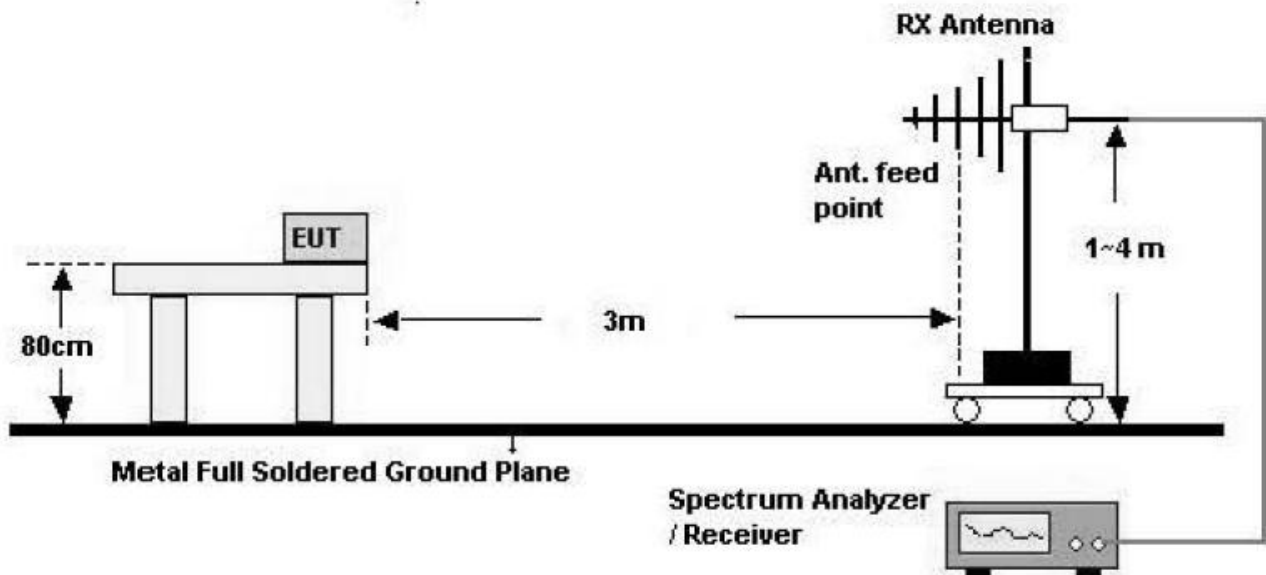

Above 1 GHz

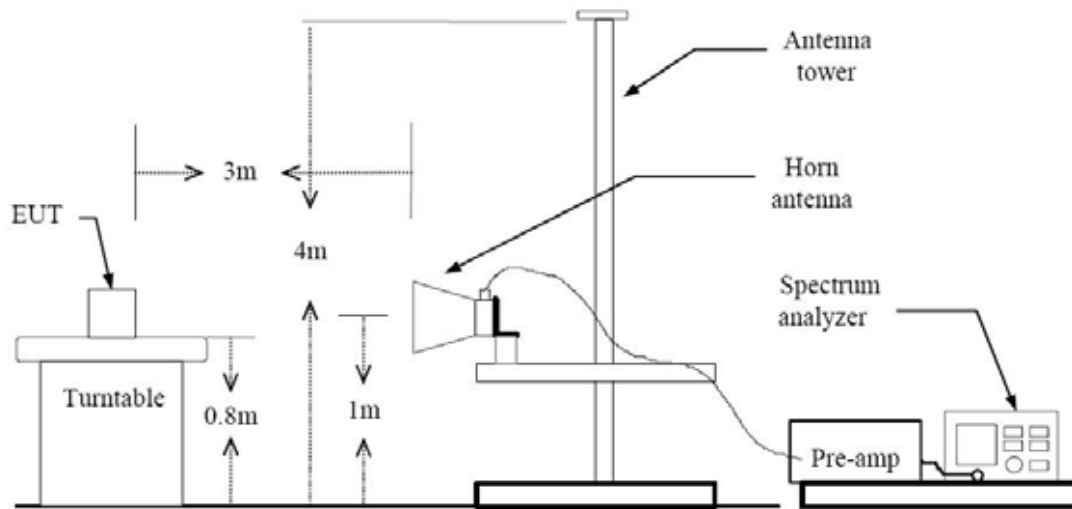

TEST PROCEDURE USED

Method 12.1 in KDB 558074, issued 06/05/2014

Spectrum Setting

- Peak

Peak emission levels are measured by setting the instrument as follows:

RBW = cf. Table 1.

VBW $\geq 3 \times$ RBW.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes.

(Note that the required measurement time may be longer for low duty cycle applications).

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

- Average

Set RBW = 1 MHz

Set VBW $\geq 1/T$. (at least 100 times less than the resolution bandwidth, but no less than 10 Hz.)

Select spectrum analyzer linear display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Note :

1. We are performed the RSE and radiated band edge using standard radiated method.
2. The actual setting value of VBW for 802.11 b/g/n

Mode	Worst Data rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle (%)	VBW(1/T) (Hz)	The actual setting value of VBW (Hz)
b	1	12.160	12.300	98.86	82	1000
g	6	2.011	2.132	94.32	497	1000
n_20 MHz BW	6.5	1.880	1.995	94.24	532	1000
n_40 MHz BW	13	0.920	1.035	88.89	1087	3000

TEST RESULTS**9 kHz – 30MHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
4. Limit line = specific Limits (dB μ V) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Above 1 GHz

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412
 Channel No.: 01 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	52.13	-1.98	V	50.15	73.98	23.83	PK
4824	45.52	-1.98	V	43.54	53.98	10.44	AV
7236	46.28	7.60	V	53.88	73.98	20.10	PK
7236	32.29	7.60	V	39.89	53.98	14.09	AV
4824	51.78	-1.98	H	49.80	73.98	24.18	PK
4824	44.98	-1.98	H	43.00	53.98	10.98	AV
7236	45.89	7.60	H	53.49	73.98	20.49	PK
7236	32.20	7.60	H	39.80	53.98	14.18	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412
 Channel No.: 01 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	53.84	-1.98	V	51.86	73.98	22.12	PK
4824	39.46	-1.98	V	37.48	53.98	16.50	AV
7236	46.33	7.60	V	53.93	73.98	20.05	PK
7236	32.32	7.60	V	39.92	53.98	14.06	AV
4824	53.19	-1.98	H	51.21	73.98	22.77	PK
4824	38.93	-1.98	H	36.95	53.98	17.03	AV
7236	46.21	7.60	H	53.81	73.98	20.17	PK
7236	32.14	7.60	H	39.74	53.98	14.24	AV

Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency: 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	53.58	-1.98	V	51.60	73.98	22.38	PK
4824	38.47	-1.98	V	36.49	53.98	17.49	AV
7236	47.20	7.60	V	54.80	73.98	19.18	PK
7236	32.53	7.60	V	40.13	53.98	13.85	AV
4824	53.03	-1.98	H	51.05	73.98	22.93	PK
4824	37.95	-1.98	H	35.97	53.98	18.01	AV
7236	46.35	7.60	H	53.95	73.98	20.03	PK
7236	32.47	7.60	H	40.07	53.98	13.91	AV

Operation Mode: 802.11 n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency: 2422
 Channel No. 03 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4844	51.58	-2.12	V	49.46	73.98	24.52	PK
4844	37.87	-2.12	V	35.75	53.98	18.23	AV
7266	45.44	7.44	V	52.88	73.98	21.10	PK
7266	32.78	7.44	V	40.22	53.98	13.76	AV
4844	51.22	-2.12	H	49.10	73.98	24.88	PK
4844	37.34	-2.12	H	35.22	53.98	18.76	AV
7266	45.22	7.44	H	52.66	73.98	21.32	PK
7266	32.78	7.44	H	40.22	53.98	13.76	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if

no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	52.82	-1.92	V	50.90	73.98	23.08	PK
4874	43.99	-1.92	V	42.07	53.98	11.91	AV
7311	46.77	7.38	V	54.15	73.98	19.83	PK
7311	32.98	7.38	V	40.36	53.98	13.62	AV
4874	52.29	-1.92	H	50.37	73.98	23.61	PK
4874	43.45	-1.92	H	41.53	53.98	12.45	AV
7311	46.59	7.38	H	53.97	73.98	20.01	PK
7311	32.79	7.38	H	40.17	53.98	13.81	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	53.36	-1.92	V	51.44	73.98	22.54	PK
4874	39.20	-1.92	V	37.28	53.98	16.70	AV
7311	46.92	7.38	V	54.30	73.98	19.68	PK
7311	32.96	7.38	V	40.34	53.98	13.64	AV
4874	52.82	-1.92	H	50.90	73.98	23.08	PK
4874	38.64	-1.92	H	36.72	53.98	17.26	AV
7311	46.77	7.38	H	54.15	73.98	19.83	PK
7311	32.94	7.38	H	40.32	53.98	13.66	AV

Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	52.55	-1.92	V	50.63	73.98	23.35	PK
4874	38.69	-1.92	V	36.77	53.98	17.21	AV
7311	47.00	7.38	V	54.38	73.98	19.60	PK
7311	33.04	7.38	V	40.42	53.98	13.56	AV
4874	52.17	-1.92	H	50.25	73.98	23.73	PK
4874	38.11	-1.92	H	36.19	53.98	17.79	AV
7311	46.84	7.38	H	54.22	73.98	19.76	PK
7311	33.02	7.38	H	40.40	53.98	13.58	AV

Operation Mode: 802.11 n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	51.68	-1.92	V	49.76	73.98	24.22	PK
4874	38.14	-1.92	V	36.22	53.98	17.76	AV
7311	47.44	7.38	V	54.82	73.98	19.16	PK
7311	33.74	7.38	V	41.12	53.98	12.86	AV
4874	51.37	-1.92	H	49.45	73.98	24.53	PK
4874	37.51	-1.92	H	35.59	53.98	18.39	AV
7311	47.20	7.38	H	54.58	73.98	19.40	PK
7311	33.64	7.38	H	41.02	53.98	12.96	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if

no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: 802.11 b

Transfer Rate: 1 Mbps

Operating Frequency: 2462

Channel No.: 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	50.34	-1.93	V	48.41	73.98	25.57	PK
4924	40.10	-1.93	V	38.17	53.98	15.81	AV
7386	46.20	7.28	V	53.48	73.98	20.50	PK
7386	32.17	7.28	V	39.45	53.98	14.53	AV
4924	50.15	-1.93	H	48.22	73.98	25.76	PK
4924	39.58	-1.93	H	37.65	53.98	16.33	AV
7386	46.07	7.28	H	53.35	73.98	20.63	PK
7386	32.08	7.28	H	39.36	53.98	14.62	AV

Operation Mode: 802.11 g

Transfer Rate: 6 Mbps

Operating Frequency: 2462

Channel No.: 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	51.42	-1.93	V	49.49	73.98	24.49	PK
4924	36.79	-1.93	V	34.86	53.98	19.12	AV
7386	46.30	7.28	V	53.58	73.98	20.40	PK
7386	32.19	7.28	V	39.47	53.98	14.51	AV
4924	51.16	-1.93	H	49.23	73.98	24.75	PK
4924	36.20	-1.93	H	34.27	53.98	19.71	AV
7386	46.14	7.28	H	53.42	73.98	20.56	PK
7386	32.08	7.28	H	39.36	53.98	14.62	AV

Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	51.12	-1.93	V	49.19	73.98	24.79	PK
4924	36.31	-1.93	V	34.38	53.98	19.60	AV
7386	47.41	7.28	V	54.69	73.98	19.29	PK
7386	32.10	7.28	V	39.38	53.98	14.60	AV
4924	50.83	-1.93	H	48.90	73.98	25.08	PK
4924	35.73	-1.93	H	33.80	53.98	20.18	AV
7386	46.23	7.28	H	53.51	73.98	20.47	PK
7386	32.08	7.28	H	39.36	53.98	14.62	AV

Operation Mode: 802.11 n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency: 2452
 Channel No.: 09 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4904	50.41	-1.95	V	48.46	73.98	25.52	PK
4904	37.16	-1.95	V	35.21	53.98	18.77	AV
7356	46.26	7.23	V	53.49	73.98	20.49	PK
7356	33.12	7.23	V	40.35	53.98	13.63	AV
4904	50.08	-1.95	H	48.13	73.98	25.85	PK
4904	37.76	-1.95	H	35.81	53.98	18.17	AV
7356	46.18	7.23	H	53.41	73.98	20.57	PK
7356	33.05	7.23	H	40.28	53.98	13.70	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

8.6.2 RADIATED RESTRICTED BAND EDGES

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	29.92	31.47	H	61.39	73.98	12.59	PK
2390.0	16.05	31.47	H	47.52	53.98	6.46	AV
2390.0	30.04	31.47	V	61.51	73.98	12.47	PK
2390.0	16.18	31.47	V	47.65	53.98	6.33	AV
2483.5	37.81	31.46	H	69.27	73.98	4.71	PK
2483.5	16.15	31.46	H	47.61	53.98	6.37	AV
2483.5	38.03	31.46	V	69.49	73.98	4.49	PK
2483.5	16.24	31.46	V	47.70	53.98	6.28	AV

Operation Mode: 802.11b
Transfer Rate: 1 Mbps
Operating Frequency: 2412 MHz, 2462 MHz
Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	26.38	31.47	H	57.85	73.98	16.13	PK
2390.0	13.70	31.47	H	45.17	53.98	8.81	AV
2390.0	26.50	31.47	V	57.97	73.98	16.01	PK
2390.0	13.75	31.47	V	45.22	53.98	8.76	AV
2483.5	26.01	31.46	H	57.47	73.98	16.51	PK
2483.5	13.81	31.46	H	45.27	53.98	8.71	AV
2483.5	26.33	31.46	V	57.79	73.98	16.19	PK
2483.5	13.90	31.46	V	45.36	53.98	8.62	AV

Operation Mode: 802.11n_20 MHz
Transfer Rate: 6.5 Mbps
Operating Frequency: 2412 MHz, 2462 MHz
Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	30.53	31.47	H	62.00	73.98	11.98	PK
2390.0	15.98	31.47	H	47.45	53.98	6.53	AV
2390.0	30.67	31.47	V	62.14	73.98	11.84	PK
2390.0	16.09	31.47	V	47.56	53.98	6.42	AV
2483.5	35.63	31.46	H	67.09	73.98	6.89	PK
2483.5	15.02	31.46	H	46.48	53.98	7.50	AV
2483.5	35.92	31.46	V	67.38	73.98	6.60	PK
2483.5	15.33	31.46	V	46.79	53.98	7.19	AV

Operation Mode: 802.11n_40 MHz
 Transfer Rate: 13.5 Mbps
 Operating Frequency: 2422 MHz, 2452 MHz
 Channel No. 03 Ch, 09 Ch

Frequency [MHz]	Reading dBuV	AN.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	39.40	31.47	H	70.87	73.98	3.11	PK
2390.0	18.75	31.47	H	50.22	53.98	3.76	AV
2390.0	39.46	31.47	V	70.93	73.98	3.05	PK
2390.0	18.80	31.47	V	50.27	53.98	3.71	AV
2483.5	37.57	31.46	H	69.03	73.98	4.95	PK
2483.5	18.30	31.46	H	49.76	53.98	4.22	AV
2483.5	37.85	31.46	V	69.31	73.98	4.67	PK
2483.5	18.43	31.46	V	49.89	53.98	4.09	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss
2. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

8.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. We are performed the AC Power Line Conducted Emission test for 24 Mbps, Ch.6 and 802.11g
Because 802.11g mode is worst case.

RESULT PLOTS

Conducted Emissions (Line 1)

EMI Auto Test(2)


1 / 2

HCT TEST Report

Common Information

EUT: LG-H326g
Manufacturer: LG
Test Site: SHIELD ROOM
Operating Conditions: WLAN MODE
Operator Name: KS KANG

FCC CLASS B

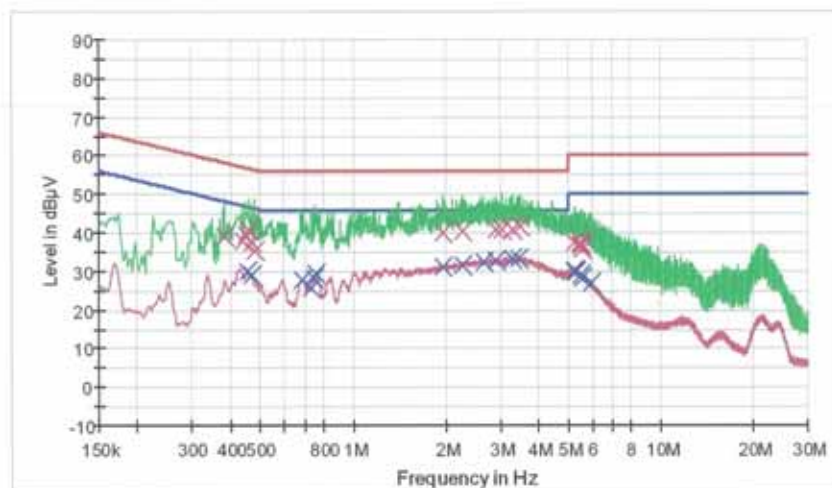

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK
— Preview Result 2-AVG X Final Result 1-QPK X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.382000	39.3	9.000	Off	N	9.7	18.9	58.2
0.438000	38.1	9.000	Off	N	9.7	19.0	57.1
0.450000	39.5	9.000	Off	N	9.7	17.4	56.9
0.460000	40.8	9.000	Off	N	9.7	15.9	56.7
0.470000	37.6	9.000	Off	N	9.7	18.9	56.5
0.480000	35.3	9.000	Off	N	9.7	21.0	56.3
1.962000	39.9	9.000	Off	N	9.8	16.1	56.0
2.258000	40.2	9.000	Off	N	9.8	15.8	56.0
2.920000	40.9	9.000	Off	N	9.8	15.1	56.0
3.040000	40.8	9.000	Off	N	9.8	15.2	56.0
3.308000	41.0	9.000	Off	N	9.8	15.0	56.0
3.492000	41.5	9.000	Off	N	9.8	14.5	56.0
5.244000	37.6	9.000	Off	N	9.9	22.4	60.0
5.472000	37.4	9.000	Off	N	9.9	22.6	60.0
5.494000	36.5	9.000	Off	N	9.9	23.5	60.0
5.500000	36.9	9.000	Off	N	9.9	23.1	60.0

2/3/2015

1:31:13

EMI Auto Test(2)

2 / 2

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
5.510000	36.6	9.000	Off	N	9.9	23.4	60.0
5.576000	36.0	9.000	Off	N	9.9	24.0	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.456000	30.1	9.000	Off	N	9.7	16.7	46.8
0.470000	29.3	9.000	Off	N	9.7	17.2	46.5
0.686000	27.9	9.000	Off	N	9.7	18.1	46.0
0.730000	25.8	9.000	Off	N	9.7	20.2	46.0
0.748000	28.3	9.000	Off	N	9.7	17.7	46.0
0.760000	29.4	9.000	Off	N	9.7	16.6	46.0
1.962000	31.4	9.000	Off	N	9.8	14.6	46.0
2.258000	31.6	9.000	Off	N	9.8	14.4	46.0
2.656000	32.4	9.000	Off	N	9.8	13.6	46.0
2.920000	32.7	9.000	Off	N	9.8	13.3	46.0
3.308000	33.4	9.000	Off	N	9.8	12.6	46.0
3.440000	33.2	9.000	Off	N	9.8	12.8	46.0
5.232000	30.1	9.000	Off	N	9.9	19.9	50.0
5.244000	29.8	9.000	Off	N	9.9	20.2	50.0
5.318000	29.9	9.000	Off	N	9.9	20.1	50.0
5.494000	28.9	9.000	Off	N	9.9	21.1	50.0
5.576000	28.4	9.000	Off	N	9.9	21.6	50.0
5.930000	26.8	9.000	Off	N	9.9	23.2	50.0

2/3/2015

1:31:13

Conducted Emissions (Line 2)

EMI Auto Test(2)


1 / 2

HCT TEST Report

Common Information

EUT: LG-H326g
Manufacturer: LG
Test Site: SHIELD ROOM
Operating Conditions: WLAN MODE
Operator Name: KS KANG

FCC CLASS B

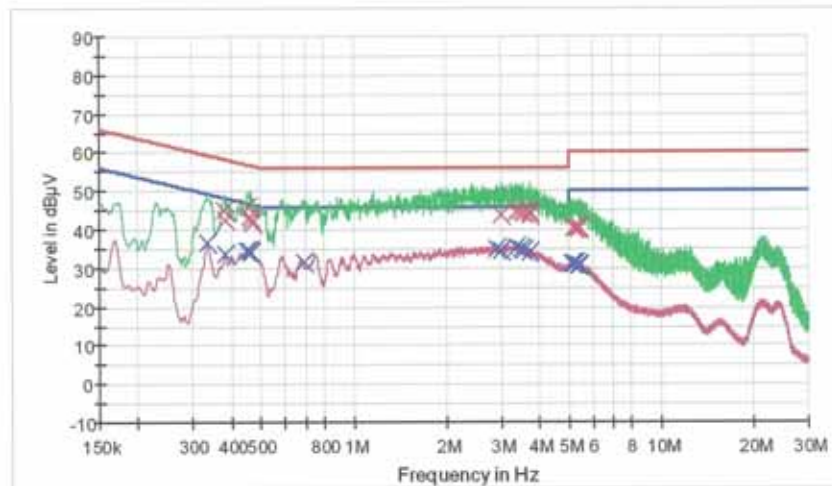

— FCC CLASS B_OP — FCC CLASS B_AV — Preview Result 1-PK
— Preview Result 2-AVG X Final Result 1-QPK X Final Result 2-QAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.380000	45.1	9.000	Off	L1	9.7	13.2	58.3
0.384000	42.6	9.000	Off	L1	9.7	15.6	58.2
0.454000	45.8	9.000	Off	L1	9.7	11.0	56.8
0.460000	43.5	9.000	Off	L1	9.7	13.2	56.7
0.464000	42.4	9.000	Off	L1	9.7	14.2	56.6
0.472000	41.8	9.000	Off	L1	9.7	14.7	56.5
3.006000	43.9	9.000	Off	L1	9.8	12.1	56.0
3.392000	44.6	9.000	Off	L1	9.8	11.4	56.0
3.492000	44.6	9.000	Off	L1	9.8	11.4	56.0
3.568000	44.3	9.000	Off	L1	9.8	11.7	56.0
3.732000	44.5	9.000	Off	L1	9.8	11.5	56.0
3.752000	43.9	9.000	Off	L1	9.9	12.1	56.0
5.164000	40.3	9.000	Off	L1	9.9	19.8	60.0
5.188000	40.3	9.000	Off	L1	9.9	19.7	60.0
5.222000	40.3	9.000	Off	L1	9.9	19.7	60.0
5.256000	40.4	9.000	Off	L1	9.9	19.6	60.0

2/3/2015

1:41:31

EMI Auto Test(2)

2 / 2

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
5.350000	40.6	9.000	Off	L1	9.9	19.4	60.0
5.434000	40.3	9.000	Off	L1	9.9	19.7	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.334000	36.6	9.000	Off	L1	9.7	12.8	49.4
0.384000	33.5	9.000	Off	L1	9.7	14.7	48.2
0.452000	34.7	9.000	Off	L1	9.7	12.1	46.8
0.458000	34.5	9.000	Off	L1	9.7	12.2	46.7
0.464000	34.1	9.000	Off	L1	9.7	12.5	46.6
0.688000	31.5	9.000	Off	L1	9.7	14.5	46.8
2.914000	35.0	9.000	Off	L1	9.8	11.0	46.0
3.006000	34.6	9.000	Off	L1	9.8	11.4	46.0
3.392000	35.2	9.000	Off	L1	9.8	10.8	46.0
3.492000	34.8	9.000	Off	L1	9.8	11.2	46.0
3.568000	34.6	9.000	Off	L1	9.8	11.4	46.0
3.750000	34.1	9.000	Off	L1	9.9	11.9	46.0
5.158000	31.0	9.000	Off	L1	9.9	19.0	50.0
5.186000	31.2	9.000	Off	L1	9.9	18.8	50.0
5.222000	31.2	9.000	Off	L1	9.9	18.8	50.0
5.350000	30.9	9.000	Off	L1	9.9	19.1	50.0
5.430000	30.8	9.000	Off	L1	9.9	19.2	50.0
5.436000	30.8	9.000	Off	L1	9.9	19.2	50.0

2/3/2015

1:41:31

9. LIST OF TEST EQUIPMENT

9.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216/ LISN	01/13/2015	Annual	100073
Agilent	E4440A/ Spectrum Analyzer	04/09/2014	Annual	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	05/23/2014	Annual	MY51110063
Agilent	N1911A/Power Meter	01/15/2015	Annual	MY45100523
Agilent	N1921A /POWER SENSOR	07/09/2014	Annual	MY45241059
Agilent	87300B/Directional Coupler	12/08/2014	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/28/2014	Annual	MY51360708
ITECH	IT6720 / DC POWER SUPPLY	11/04/2014	Annual	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	04/11/2014	Annual	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	100422
Agilent	8493C / Attenuator(10 dB)	07/21/2014	Annual	76649

9.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	10/10/2014	Biennial	3368
Rohde & Schwarz	ESCI / EMI TEST RECEIVER	01/13/2015	Annual	100584
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	09/04/2014	Annual	10094
CERNEX	CBL18265035 / POWER AMP	07/23/2014	Annual	22966
CERNEX	CBL26405040 / POWER AMP	04/04/2014	Annual	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	07/05/2013	Biennial	1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	07/05/2013	Biennial	BBHA9170541
Rohde & Schwarz	FSP / Spectrum Analyzer	10/13/2014	Annual	836650/016
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	06/23/2014	Annual	8
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	04/09/2014	Annual	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	04/04/2014	Annual	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	06/17/2014	Annual	1
TESCOM	TC-3000C / BLUETOOTH TESTER	04/11/2014	Annual	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	100422
Rohde & Schwarz	LOOP ANTENNA	09/03/2014	Biennial	1513-175
CERNEX	CBL06185030 / POWER AMP	07/21/2014	Annual	22965
CERNEX	CBLU1183540 / POWER AMP	07/21/2014	Annual	22964