

Table 14-11 LTE1900-FDD2 #1 Head

LTE1900-FDD2 #1 Head								
Ambient Temperature: 22.5			Liquid Temperature: 22.3					
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			19100	18900	18700	19100		
20MHz QPSK1RB	Left Cheek	Tune-up	24.00	24.00	24.00	Scaling factor*		
		Measured Power [dBm]	23.69	23.60	23.58	1.07	1.10	1.10
		1g SAR	0.643			0.69		
	Left Tilt	10g SAR	0.404			0.43		
		Deviation	-0.19			-0.19		
		1g SAR	0.35			0.38		
	Right Cheek	10g SAR	0.224			0.24		
		Deviation	0.02			0.02		
		1g SAR	0.468			0.50		
	Right Tilt	10g SAR	0.201			0.22		
		Deviation	0.08			0.08		
		1g SAR	0.318			0.34		
TRUE	Left Cheek	10g SAR	0.201			0.22		
		Deviation	0.04			0.04		
		Tune-up	23.00	23.00	23.00	Scaling factor*		
	Left Tilt	Measured Power [dBm]	22.56	22.59	22.59	1.11	1.10	1.10
		1g SAR				0.514		0.56
		10g SAR				0.323		0.36
	Right Cheek	Deviation				0.06		0.06
		1g SAR				0.249		0.27
		10g SAR				0.162		0.18
	Right Tilt	Deviation				0.02		0.02
		1g SAR				0.372		0.41
		10g SAR				0.248		0.27
		Deviation				0.02		0.02

Table 14-12 LTE1900-FDD2 #1 Body

LTE1900-FDD2 #1 Body								
Ambient Temperature: 22.5			Liquid Temperature: 22.3					
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			19100	18900	18700	19100		

Table 14-13 LTE850-FDD5 #1 Head

LTE850-FDD5 #1 Head						
Ambient Temperature: 22.5			Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]
			20600	20525	20450	
10MHz QPSK1RB	Left Cheek	Tune-up	25.50	25.50	25.50	Scaling factor*
		Measured Power [dBm]	24.74	24.68	24.82	1.19 1.21 1.17
		1g SAR			0.478	0.56
	Left Tilt	10g SAR			0.375	0.44
		Deviation			0.05	0.05
		1g SAR			0.327	0.38
	Right Cheek	10g SAR			0.261	0.31
		Deviation			0.01	0.01
		1g SAR			0.498	0.58
	Right Tilt	10g SAR			0.384	0.45
		Deviation			-0.06	-0.06
		1g SAR			0.341	0.40
TRUE	Left Cheek	10g SAR			0.277	0.32
		Deviation			-0.07	-0.07
	Left Tilt	1g SAR			0.327	0.38
		10g SAR			0.261	0.31
		Deviation			0.01	0.01
	Right Cheek	1g SAR			0.384	0.45
		10g SAR			-0.06	-0.06
		Deviation			0.01	0.01
10MHz QPSK50%RB	Left Cheek	Tune-up	24.50	24.50	24.50	Scaling factor*
		Measured Power [dBm]	23.74	23.69	23.82	1.19 1.21 1.17
		1g SAR			0.35	0.41
	Left Tilt	10g SAR			0.282	0.33
		Deviation			-0.02	-0.02
		1g SAR			0.236	0.28
	Right Cheek	10g SAR			0.189	0.22
		Deviation			0.04	0.04
		1g SAR			0.382	0.45
	Right Tilt	10g SAR			0.295	0.35
		Deviation			0.02	0.02
		1g SAR			0.243	0.28
	Left Cheek	10g SAR			0.198	0.23
		Deviation			0.01	0.01

Table 14-14 LTE850-FDD5 #1 Body

LTE850-FDD5 #1 Body							
Ambient Temperature: 22.5			Measured SAR [W/kg]			Liquid Temperature: 22.3	
Mode	Device orientation	SAR measurement	20600	20525	20450	Reported SAR [W/kg]	
			M	I	M	M	
10MHz QPSK1RB	Tune-up		25.50	25.50	25.50	Scaling factor*	
	Measured Power [dBm]		24.74	24.68	24.82	1.19 1.21 1.17	
	Front	1a SAR			0.585	0.68	
		10a SAR			0.466	0.55	
		Deviation			0.09	0.09	
	Rear	1a SAR	0.691	0.695	0.729	0.82 0.84 0.85	
		10a SAR	0.541	0.545	0.562	0.64 0.66 0.66	
		Deviation	0.06	0.04	-0.02	0.06 0.04 -0.02	
	Left edge	1a SAR			0.499	0.58	
		10a SAR			0.35	0.41	
		Deviation			0.19	0.19	
	Right edge	1a SAR			0.543	0.64	
		10a SAR			0.38	0.44	
		Deviation			0.06	0.06	
	Bottom edge	1a SAR			0.053	0.06	
		10a SAR			0.032	0.04	
		Deviation			-0.01	-0.01	
Mode			Measured SAR [W/kg]			Reported SAR [W/kg]	
10MHz QPSK50%RB	Device orientation	SAR measurement	20600	20525	20450	20600 20525 20450	
			M	M	M		
	Tune-up		24.50	24.50	24.50	Scaling factor*	
	Measured Power [dBm]		23.74	23.69	23.82	1.19 1.21 1.17	
	Front	1a SAR			0.456	0.53	
		10a SAR			0.363	0.42	
		Deviation			0.08	0.08	
	Rear	1a SAR			0.563	0.66	
		10a SAR			0.434	0.51	
		Deviation			0.12	0.12	
	Left edge	1a SAR			0.387	0.45	
		10a SAR			0.27	0.32	
		Deviation			0.03	0.03	
	Right edge	1a SAR			0.421	0.49	
		10a SAR			0.296	0.35	
		Deviation			0.01	0.01	
	Bottom edge	1a SAR			0.037	0.04	
		10a SAR			0.025	0.03	
		Deviation			0.08	0.08	

Table 14-15 LTE2500-FDD7 #1 Head

LTE2500-FDD7 #1 Head						
Ambient Temperature: 22.5			Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]
			21350	21100	20850	21350
20MHz QPSK1RB	Left Cheek	1g SAR	■	■	■	■
		10g SAR				0.10
		Deviation	0.04			0.06
	Left Tilt	1g SAR	■			0.04
		10g SAR	■			0.03
		Deviation	0.01			0.02
	Right Cheek	1g SAR	■			0.01
		10g SAR	■			0.27
		Deviation	0.05			0.14
	Right Tilt	1g SAR	■			0.05
		10g SAR	■			0.03
		Deviation	-0.06			-0.06
TRUE	Device orientation	1g SAR	■	■	■	■
		10g SAR	■	■	■	■
		Deviation	■	■	■	■
	Left Cheek	1g SAR	■	■	■	■
		10g SAR	■	■	■	■
		Deviation	■	■	■	■
	Left Tilt	1g SAR	■	■	■	■
		10g SAR	■	■	■	■
		Deviation	■	■	■	■
	Right Cheek	1g SAR	■	■	■	■
		10g SAR	■	■	■	■
		Deviation	■	■	■	■
	Right Tilt	1g SAR	■	■	■	■
		10g SAR	■	■	■	■
		Deviation	■	■	■	■

Table 14-16 LTE2500-FDD7 #1 Body

LTE2500-FDD7 #1 Body							
Ambient Temperature: 22.5			Liquid Temperature: 22.3				
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]	
			21350 M	21100 M	20850 M		
20MHz QPSK1RB	Tune-up		24.00	24.00	24.00	Scaling factor*	
	Measured Power [dBm]		23.38	23.24	23.05	1.15 1.19 1.24	
	Front	1a SAR	0.632			0.73	
		10a SAR	0.364			0.42	
		Deviation	0.12			0.12	
	Rear	1a SAR	1.08	1.05	0.979	1.25 1.25 1.22	
		10a SAR	0.574	0.562	0.536	0.66 0.67 0.67	
		Deviation	0.08	-0.11	0.09	0.08 -0.11 0.09	
	Left edge	1a SAR	0.149			0.17	
		10a SAR	0.092			0.11	
		Deviation	-0.11			-0.11	
	Right edge	1a SAR	0.151			0.17	
		10a SAR	0.093			0.11	
		Deviation	0.09			0.09	
	Bottom edge	1a SAR	0.795	0.816	0.725	0.92 0.97 0.90	
		10a SAR	0.438	0.45	0.4	0.51 0.54 0.50	
		Deviation	0.12	0.05	-0.16	0.12 0.05 -0.16	
20MHz QPSK50%RB	Mode	Device orientation	Measured SAR [W/kg]			Reported SAR [W/kg]	
			21350 M	21100 H	20850 M	21350 21100 20850	
	Tune-up		23.00	23.00	23.00	Scaling factor*	
	Measured Power [dBm]		22.15	22.26	22.41	1.22 1.19 1.15	
	Front	1a SAR			0.455		
		10a SAR			0.264		
		Deviation			0.1		
	Rear	1a SAR	0.66	0.68	0.73	0.80 0.81 0.84	
		10a SAR	0.398	0.395	0.403	0.48 0.47 0.46	
		Deviation	0.03	0.02	0.05	0.03 0.02 0.05	
	Left edge	1a SAR			0.133		
		10a SAR			0.08		
		Deviation			0.02		
	Right edge	1a SAR			0.105		
		10a SAR			0.065		
		Deviation			0.13		
	Bottom edge	1a SAR			0.594		
		10a SAR			0.324		
		Deviation			0.09		
20MHz QPSK100%RB	Mode	Device orientation	Measured SAR [W/kg]			Reported SAR [W/kg]	
			21350 M	21100 H	20850 M	21350 21100 20850	
	Tune-up		23.00	23.00	23.00	Scaling factor*	
	Measured Power [dBm]		22.06	22.24	22.25	1.24 1.19 1.19	
	Rear	1a SAR			0.718		
		10a SAR			0.321		
		Deviation			0.02		
20MHz QPSK100%RB	Bottom edge	1a SAR			0.583		
		10a SAR			0.316		
		Deviation			0.14		

Table 14-17 LTE700-FDD17 #1 Head

LTE700-FDD17 #1 Head									
Ambient Temperature: 22.5			Liquid Temperature: 22.3						
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			23800	23790	23780	23800			
10MHz QPSK1RB	Tune-up		25.00	25.00	25.00	Scaling factor*			
	Measured Power [dBm]		24.30	24.49	24.46	1.18	1.12	1.13	
	Left Cheek	1g SAR		0.23			0.26		
		10g SAR		0.187			0.21		
		Deviation		0.06			0.06		
	Left Tilt	1g SAR		0.151			0.17		
		10g SAR		0.125			0.14		
		Deviation		0.01			0.01		
	Right Cheek	1g SAR		0.244			0.27		
		10g SAR		0.195			0.22		
		Deviation		0.11			0.11		
	Right Tilt	1g SAR		0.157			0.18		
		10g SAR		0.101			0.11		
		Deviation		-0.04			-0.04		
TRUE	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			23800	23790	23780	23800	23790	23780	
	L		I	I	I	L	I	I	
	Tune-up		24.00	24.00	24.00	Scaling factor*			
	Measured Power [dBm]		23.12	23.17	23.25	1.22	1.21	1.19	
	Left Cheek	1g SAR			0.179			0.21	
		10g SAR			0.145			0.17	
		Deviation			-0.02			-0.02	
	Left Tilt	1g SAR			0.115			0.14	
		10g SAR			0.095			0.11	
		Deviation			-0.01			-0.01	
	Right Cheek	1g SAR			0.182			0.22	
		10g SAR			0.147			0.17	
		Deviation			-0.07			-0.07	
	Right Tilt	1g SAR			0.048			0.06	
		10g SAR			0.039			0.05	
		Deviation			0.03			0.03	

Table 14-18 LTE700-FDD17 #1 Body

LTE700-FDD17 #1 Body									
Ambient Temperature: 22.5			Liquid Temperature: 22.3						
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			23800	23790	23780	23800			
			■	■	■	■			
		Tune-up	25.00	25.00	25.00	Scaling factor*			
10MHz QPSK1RB	Front	Measured Power [dBm]	24.30	24.49	24.46	1.18	1.12	1.13	
		1g SAR		0.358			0.40		
		10g SAR		0.289			0.32		
	Rear	Deviation		0.09			0.09		
		1g SAR		0.464			0.52		
		10g SAR		0.367			0.41		
	Left edge	Deviation		0.08			0.08		
		1g SAR		0.329			0.37		
		10g SAR		0.239			0.27		
	Right edge	Deviation		-0.01			-0.01		
		1g SAR		0.416			0.47		
		10g SAR		0.303			0.34		
	Bottom edge	Deviation		0.07			0.07		
		1g SAR		0.042			0.05		
		10g SAR		0.025			0.03		
		Deviation		-0.12			-0.12		
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			23800	23790	23780	23800	23790	23780	
			■	■	■				
		Tune-up	24.00	24.00	24.00	Scaling factor*			
10MHz QPSK50%RB	Front	Measured Power [dBm]	23.12	23.17	23.25	1.22	1.21	1.19	
		1g SAR			0.268			0.32	
		10g SAR			0.217			0.26	
	Rear	Deviation			0.06			0.06	
		1g SAR			0.368			0.44	
		10g SAR			0.294			0.35	
	Left edge	Deviation			-0.09			-0.09	
		1g SAR			0.281			0.33	
		10g SAR			0.205			0.24	
	Right edge	Deviation			0.05			0.05	
		1g SAR			0.342			0.41	
		10g SAR			0.248			0.29	
	Bottom edge	Deviation			0.02			0.02	
		1g SAR			0.028			0.03	
		10g SAR			0.019			0.02	
		Deviation			-0.05			-0.05	

Table 14-19 LTE1700-FDD66 #1 Head

Ambient Temperature:		LTE1700-FDD66 #1 Head			Liquid Temperature:	
Mode	Device orientation	SAR measurement	Measured SAR W/kal			Reported SAR W/kal
			132572	132322	132072	
LTE1700-FDD66 #1 QPSK1RB	Tune-up	24.00	24.00	24.00		Scaling factor*
	Measured Power dBm	22.88	23.16	23.14	1.29	1.21
	Left Cheek	1g SAR	0.248			0.30
		10g SAR	0.173			0.21
		Deviation	0.06			0.06
	Left Tilt	1g SAR	0.126			0.15
		10g SAR	0.089			0.11
		Deviation	0.15			0.15
	Right Cheek	1g SAR	0.351			0.43
		10g SAR	0.236			0.29
		Deviation	0.05			0.05
LTE1700-FDD66 #1 QPSK50%RB	Right Tilt	1g SAR	0.106			0.13
		10g SAR	0.077			0.09
		Deviation	0.09			0.09
	TRUE	Device orientation	Measured SAR W/kal			Reported SAR W/kal
		SAR measurement	132572	132322	132072	M
			M	M	H	M
	Tune-up	22.70	22.70	22.70		Scaling factor*
	Measured Power dBm	22.13	22.32	22.26	1.14	1.09
	Left Cheek	1g SAR	0.195			0.21
		10g SAR	0.135			0.15
		Deviation	0.1			0.10
	Left Tilt	1g SAR	0.105			0.11
		10g SAR	0.074			0.08
		Deviation	-0.04			-0.04
	Right Cheek	1g SAR	0.269			0.29
		10g SAR	0.18			0.20
		Deviation	0.02			0.02
	Right Tilt	1g SAR	0.083			0.09
		10g SAR	0.06			0.07
		Deviation	-0.09			-0.09

Table 14-20 LTE1700-FDD66 #1 Body

Ambient Temperature: 22.5		LTE1700-FDD66 #1 Body			Liquid Temperature: 22.3			
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			132572	132322	132072			
LTE1700- FDD66 #1 QPSK1RB	Tune-up		24.00	24.00	24.00	Scaling factor*		
	Measured Power [dBm]		22.88	23.16	23.14	1.29	1.21	1.22
	Front	1a SAR	0.602				0.73	
		10a SAR	0.354				0.43	
		Deviation	0.09				0.09	
	Rear	1a SAR	0.716	0.78	0.663	0.93	0.95	0.81
		10a SAR	0.392	0.423	0.35	0.51	0.51	0.43
		Deviation	-0.08	0.07	-0.11	-0.08	0.07	-0.11
	Left edge	1a SAR	0.178				0.22	
		10a SAR	0.114				0.14	
		Deviation	0.05				0.05	
	Right edge	1a SAR	0.168				0.20	
		10a SAR	0.119				0.14	
		Deviation	-0.04				-0.04	
	Bottom edge	1a SAR	0.845	0.929	0.795	1.09	1.13	0.97
		10a SAR	0.447	0.511	0.419	0.58	0.62	0.51
		Deviation	-0.06	0.01	-0.03	-0.06	0.01	-0.03
Mode	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			132572	132322	132072	132572	132322	132072
LTE1700- FDD66 #1 QPSK50%RB	Front	M		M	H			
		Tune-up		22.70	22.70	22.70	Scaling factor*	
		Measured Power [dBm]	22.13	22.32	22.26	1.14	1.09	1.11
	Rear	1a SAR	0.451				0.49	
		10a SAR	0.265				0.29	
		Deviation	-0.07				-0.07	
	Left edge	1a SAR	0.621				0.68	
		10a SAR	0.336				0.37	
		Deviation	-0.06				-0.06	
	Right edge	1a SAR	0.142				0.15	
		10a SAR	0.091				0.10	
		Deviation	0.09				0.09	
	Bottom edge	1a SAR	0.136				0.15	
		10a SAR	0.089				0.10	
		Deviation	-0.04				-0.04	

14.2 Full SAR

Test Band	Channel	Frequency	Tune-Up	Measured Power	Test Position	Measured 10g SAR	Measured 1g SAR	Reported 10g SAR	Reported 1g SAR	Power Drift	Figure
GSM850	128	824.2 MHz	30	29.31	Right Cheek	0.498	0.641	0.58	0.75	0.03	Fig A.1
GSM850	128	824.2 MHz	30	29.31	Rear	0.665	0.867	0.78	1.02	-0.07	Fig A.2
PCS1900	810	1909.8 MHz	27	26.42	Left Cheek	0.371	0.595	0.42	0.68	0.07	Fig A.3
PCS1900	810	1909.8 MHz	27	26.42	Front	0.348	0.607	0.40	0.69	-0.03	Fig A.4
WCDMA1900-BII	9400	1880 MHz	24	23.72	Left Cheek	0.421	0.666	0.45	0.71	0.05	Fig A.5
WCDMA1900-BII	9262	1852.4 MHz	24	23.61	Bottom edge	0.447	0.834	0.49	0.91	-0.17	Fig A.6
WCDMA1700-BIV	1513	1752.6 MHz	24	23.51	Right Cheek	0.202	0.304	0.23	0.34	0.15	Fig A.7
WCDMA1700-BIV	1513	1752.6 MHz	24	23.51	Bottom edge	0.501	0.921	0.56	1.03	-0.03	Fig A.8
WCDMA850-BV	4233	846.6 MHz	25.5	24.90	Right Cheek	0.429	0.56	0.49	0.64	0.02	Fig A.9
WCDMA850-BV	4233	846.6 MHz	25.5	24.90	Rear	0.61	0.795	0.70	0.91	0.11	Fig A.10
LTE1900-FDD2	19100	1900 MHz	24	23.69	Left Cheek	0.404	0.643	0.43	0.69	-0.19	Fig A.11
LTE1900-FDD2	19100	1900 MHz	24	23.69	Front	0.352	0.6	0.38	0.64	-0.08	Fig A.12
LTE850-FDD5	20450	829 MHz	25.5	24.82	Right Cheek	0.384	0.498	0.45	0.58	-0.06	Fig A.13
LTE850-FDD5	20450	829 MHz	25.5	24.82	Rear	0.562	0.729	0.66	0.85	-0.02	Fig A.14
LTE2500-FDD7	21350	2560 MHz	24	23.38	Right Cheek	0.122	0.234	0.14	0.27	0.05	Fig A.15
LTE2500-FDD7	21100	2535 MHz	24	23.24	Rear	0.562	1.05	0.67	1.25	-0.11	Fig A.16
LTE700-FDD17	23790	710 MHz	25	24.49	Right Cheek	0.195	0.244	0.22	0.27	0.11	Fig A.17
LTE700-FDD17	23790	710 MHz	25	24.49	Rear	0.367	0.464	0.41	0.52	0.08	Fig A.18
LTE1700-FDD66	132322	1745 MHz	24	23.16	Right Cheek	0.236	0.351	0.29	0.43	0.05	Fig A.19
LTE1700-FDD66	132322	1745 MHz	24	23.16	Bottom edge	0.511	0.929	0.62	1.13	0.01	Fig A.20

14.3 WLAN Evaluation

According to the KDB248227 D01, SAR is measured for 802.11b DSSS using the initial test position procedure.

Note1: When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest estimated 1-g SAR conditions determined by area scans, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg.

Note2: For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

Note3: According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

Table 14-21 WLAN2450 #1

WLAN2450 #1								
Ambient Temperature: 22.5				Liquid Temperature: 22.3				
Rate	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			11	6	1			
			2462 MHz	2437 MHz	2412 MHz			
802.11b 1Mbps	Tune up		14	15	15	Scaling factor*		
	Slot Average Power [dBm]		13.98	14.97	14.42	1.00	1.01	1.14
	Left Cheek	1g Fast SAR		0.846			0.85	
		10g SAR		0.387			0.39	
		Deviation		0.04			0.04	
	Left Tilt	1g Fast SAR		0.438			0.44	
		10g SAR		0.205			0.21	
		Deviation		-0.01			-0.01	
	Right Cheek	1g Fast SAR		0.352			0.35	
		10g SAR		0.186			0.19	
		Deviation		-0.01			-0.01	
	Right Tilt	1g Fast SAR		0.251			0.25	
		10g SAR		0.131			0.13	
		Deviation		0.05			0.05	

Table 14-22 WLAN2450 #1 Head Full SAR

WLAN2450 #1 Head Full SAR								
Ambient Temperature: 22.5				Liquid Temperature: 22.3				
Rate	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]		
			11	6	1			
			2462 MHz	2437 MHz	2412 MHz			
802.11b 1Mbps	Tune up		14	15	15	Scaling factor*		
	Slot Average Power [dBm]		13.98	14.97	14.42	1.00	1.01	1.14
	Left Cheek	1g Full SAR		0.878	0.753		0.88	0.86
		10g SAR		0.392	0.392		0.39	0.45
		Deviation		0.04	-0.06		0.04	-0.06
	Left Tilt	1g Full SAR		0.682			0.69	
		10g SAR		0.32			0.32	
		Deviation		-0.01			-0.01	

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below							
Frequency		Test Position	Actual duty factor	maximum duty factor	Reported SAR(1g)(W/kg)	Scaled reported SAR(1g)(W/kg)	Figure
MHz	Ch.						
2437	6	Left Cheek	99.27%	100%	0.88	0.89	Fig.A.21

Table 14-23 WLAN2450 #1 Body Fast SAR


WLAN2450 #1 Body Fast SAR									
Ambient Temperature: 22.5					Liquid Temperature: 22.3				
Rate	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			11	6	1	11	6	1	
802.11b 1Mbps	Tune up		14	15	15	Scaling factor*			
	Slot Average Power [dBm]		13.98	14.97	14.42	1.00	1.01	1.14	
	Front	1g Fast SAR		0.035			0.04		
		10g SAR		0.018			0.02		
		Deviation		-0.08			-0.08		
	Rear	1g Fast SAR		0.12			0.12		
		10g SAR		0.064			0.06		
		Deviation		-0.09			-0.09		
	Top edge	1g Fast SAR		0.055			0.06		
		10g SAR		0.028			0.03		
		Deviation		-0.17			-0.17		
	Right edge	1g Fast SAR		0.093			0.09		
		10g SAR		0.049			0.05		
		Deviation		0.14			0.14		

Table 14-24 WLAN2450 #1 Body Full SAR

WLAN2450 #1 Body Full SAR									
Ambient Temperature: 22.5					Liquid Temperature: 22.3				
Rate	Device orientation	SAR measurement	Measured SAR [W/kg]			Reported SAR [W/kg]			
			11	6	1	11	6	1	
802.11b 1Mbps	Tune up		14	15	15	Scaling factor*			
	Slot Average Power [dBm]		13.98	14.97	14.42	1.00	1.01	1.14	
	Front	1g Full SAR							
		10g SAR							
		Deviation							
	Rear	1g Full SAR		0.118			0.12		
		10g SAR		0.062			0.06		
		Deviation		-0.09			-0.09		

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below							
Frequency		Test Position	Actual duty factor	maximum duty factor	Reported SAR(1g)(W/kg)	Scaled reported SAR(1g)(W/kg)	Figure
MHz	Ch.						
2437	6	Rear	99.27%	100%	0.12	0.12	Fig.A.22

SAR is not required for OFDM because the 802.11b adjusted SAR ≤ 1.2 W/kg.

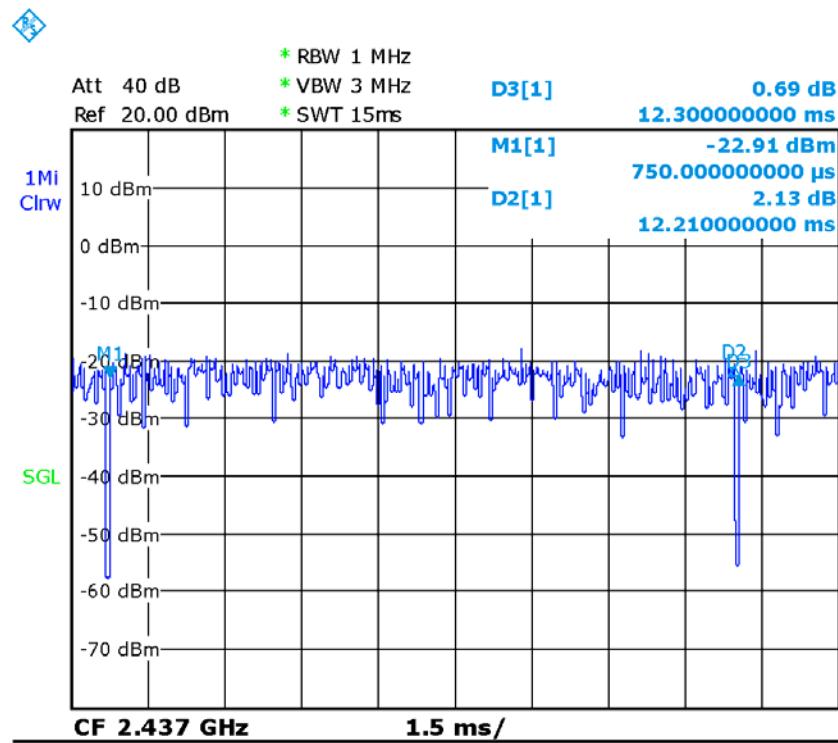

Picture 14.1 Duty factor plot

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Mode	CH	Freq	Test Position	Original SAR (W/kg)	First Repeated SAR(W/kg)	The Ratio
GSM850	128	824. 2MHz	Rear	0. 867	0. 861	1. 01
WCDMA1900	9262	1852. 4MHz	Bottom	0. 834	0. 829	1. 01
WCDMA1700	1513	1752. 6MHz	Bottom	0. 921	0. 919	1. 00
LTE Band7	21100	2535MHz	Rear	1. 05	1. 02	1. 03
LTE Band66	132322	1745MHz	Bottom	0. 929	0. 921	1. 01
WLAN 2. 4G	6	2437MHz	Left Cheek	0. 878	0. 873	1. 01

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	N	1	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					9.55	9.43	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$					19.1	18.9	

16.2 Measurement Uncertainty for Normal SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞

	(target)									
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
	Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						10.7	10.6	257
	Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$						21.4	21.1	

16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z- Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞

19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						10.4	10.3	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						20.8	20.6	

16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
-----	-------------------	------	-------------------	-----------------------	------	------------	-------------	----------------------	-----------------------	-------------------

Measurement system

1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z- Approximation	B	14.0	R	$\sqrt{3}$	1	1	8.1	8.1	∞

Test sample related

15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
----	-------------------------	---	-----	---	---	---	---	-----	-----	----

16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						13.5	13.4	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						27.0	26.8	

17 MAIN TEST INSTRUMENTS

Table 17.1: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	January 24, 2018	One year
02	Power meter	NRVD	102196	March 02,2017	One year
03	Power sensor	NRV-Z5	100596		
04	Signal Generator	E4438C	MY49071430	January 2,2018	One Year
05	Amplifier	60S1G4	0331848	No Calibration Requested	
06	BTS	E5515C	MY50263375	January 23, 2018	One year
07	BTS	CMW500	149646	October 31, 2017	One year
08	E-field Probe	SPEAG EX3DV4	7464	September 12,2017	One year
09	DAE	SPEAG DAE4	1525	October 2, 2017	One year
10	Dipole Validation Kit	SPEAG D750V3	1017	July 19, 2017	One year
11	Dipole Validation Kit	SPEAG D835V2	4d069	July 19, 2017	One year
12	Dipole Validation Kit	SPEAG D1750V2	1003	July 21, 2017	One year
13	Dipole Validation Kit	SPEAG D1900V2	5d101	July 26, 2017	One year
14	Dipole Validation Kit	SPEAG D2450V2	853	July 21, 2017	One year
15	Dipole Validation Kit	SPEAG D2600V2	1012	July 21, 2017	One year

END OF REPORT BODY

ANNEX A Graph Results

GSM850_CH128 Right Cheek

Date: 2/2/2018

Electronics: DAE4 Sn1525

Medium: Head 835 MHz

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.15$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: GSM850 824.2 MHz Duty Cycle: 1:2

Probe: EX3DV4 – SN7464 ConvF(10.28,10.28,10.28)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.831 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.196 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.804 W/kg

SAR(1 g) = 0.641 W/kg; SAR(10 g) = 0.498 W/kg

Maximum value of SAR (measured) = 0.694 W/kg

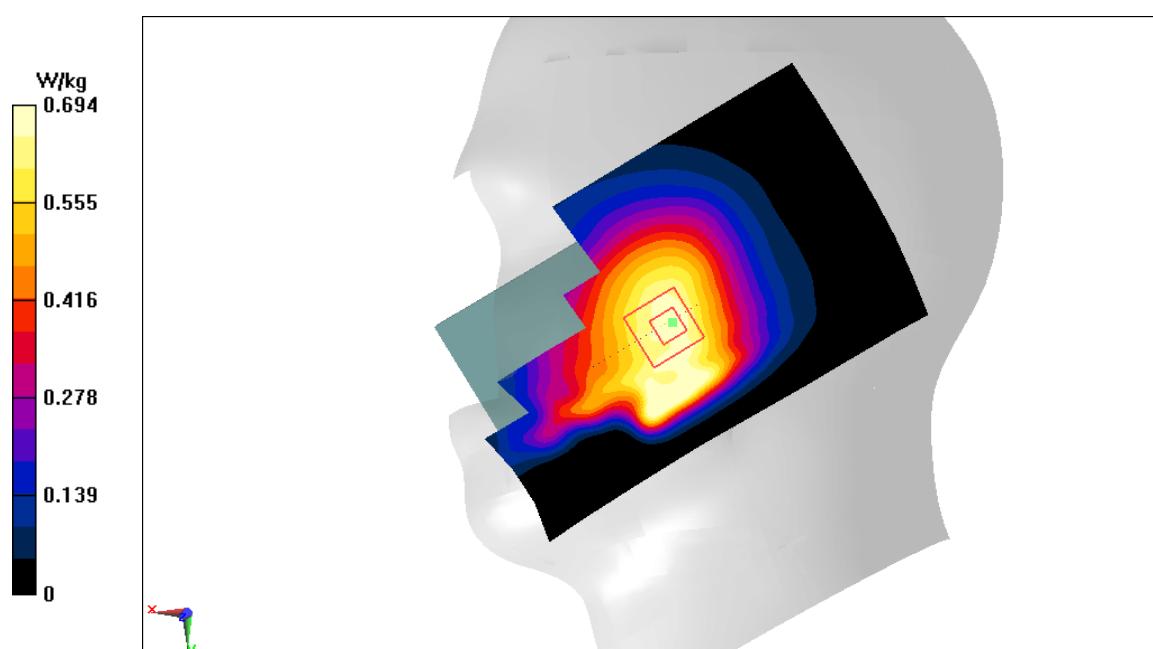


Fig A.1

GSM850_CH128 Rear

Date: 2/2/2018

Electronics: DAE4 Sn1525

Medium: Head 835 MHz

Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.958$ mho/m; $\epsilon_r = 55.95$; $\rho = 1000$ kg/m 3

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: GSM850 824.2 MHz Duty Cycle: 1:2

Probe: EX3DV4 – SN7464 ConvF(10.21,10.21,10.21)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.24 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 29.98 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.867 W/kg; SAR(10 g) = 0.665 W/kg

Maximum value of SAR (measured) = 0.948 W/kg

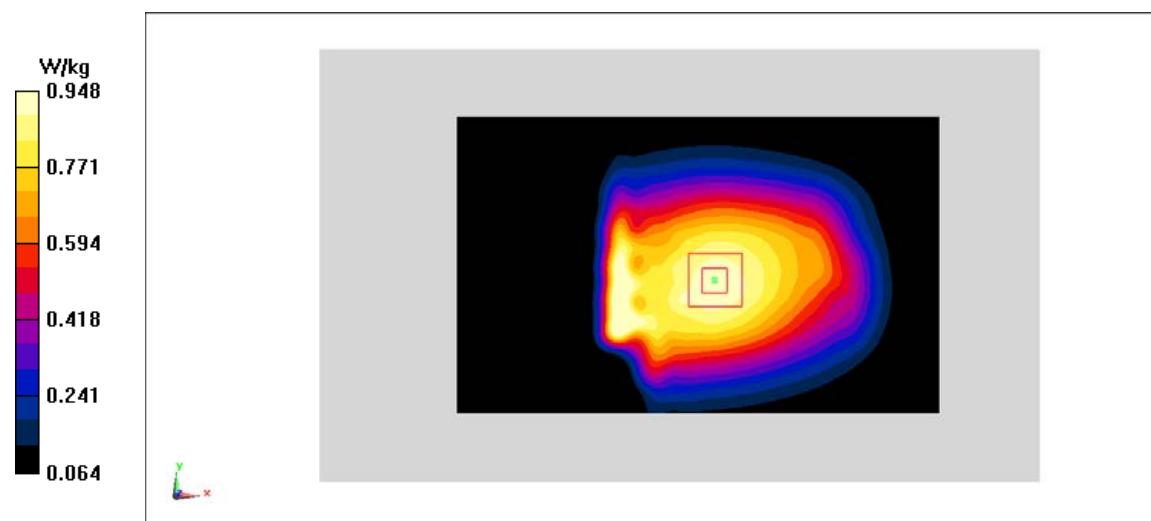


Fig A.2

PCS1900_CH810 Left Cheek

Date: 2/4/2018

Electronics: DAE4 Sn1525

Medium: Head 1900 MHz

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.404$ mho/m; $\epsilon_r = 39.59$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: PCS1900 1909.8 MHz Duty Cycle: 1:2

Probe: EX3DV4 – SN7464 ConvF(9.39,9.39,9.39)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.865 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.752 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.93 W/kg

SAR(1 g) = 0.595 W/kg; SAR(10 g) = 0.371 W/kg

Maximum value of SAR (measured) = 0.707 W/kg

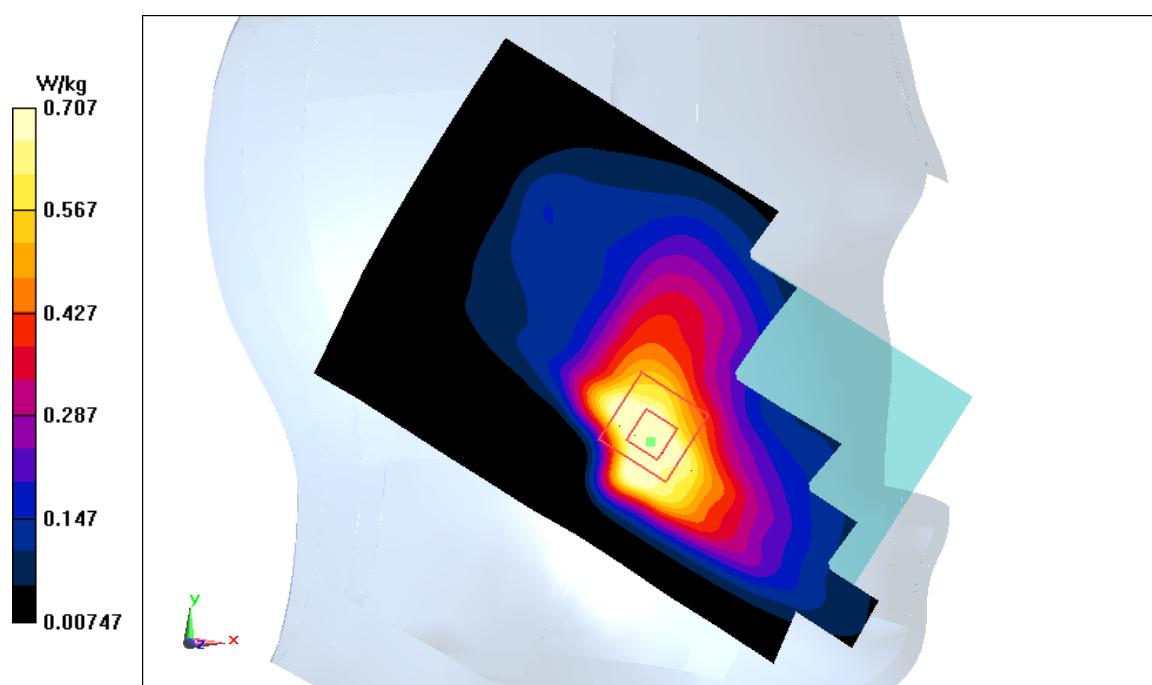**Fig A.3**

PCS1900_CH810 Front

Date: 2/4/2018

Electronics: DAE4 Sn1525

Medium: Head 1900 MHz

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.556$ mho/m; $\epsilon_r = 53.41$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: PCS1900 1909.8 MHz Duty Cycle: 1:2

Probe: EX3DV4 – SN7464 ConvF(8.32,8.32,8.32)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.729 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.97 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.607 W/kg; SAR(10 g) = 0.348 W/kg

Maximum value of SAR (measured) = 0.712 W/kg

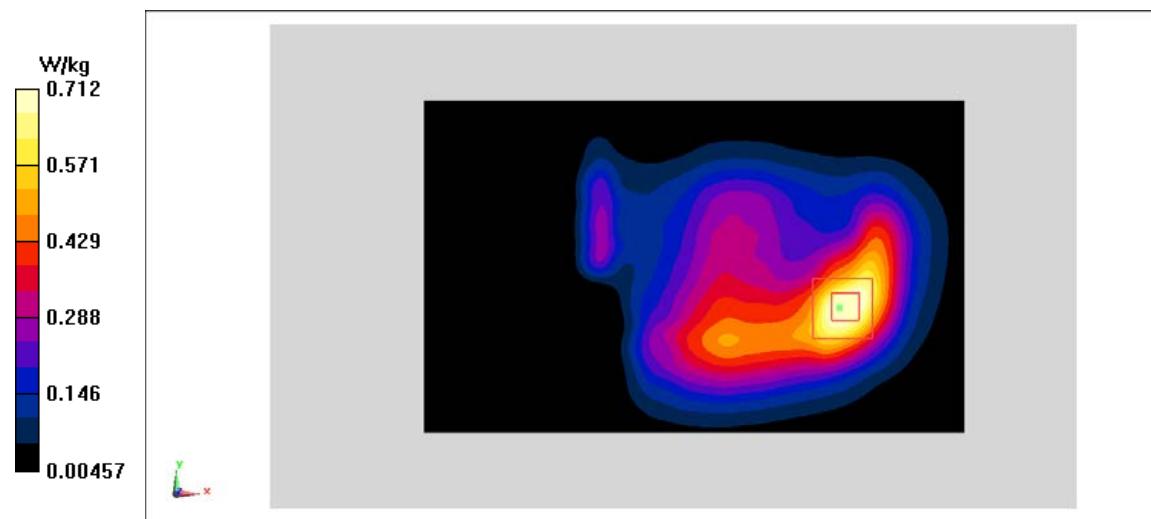**Fig A.4**

WCDMA1900-BII_CH9400 Left Cheek

Date: 2/4/2018

Electronics: DAE4 Sn1525

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.376$ mho/m; $\epsilon_r = 39.62$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA1900-BII 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(9.39,9.39,9.39)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.836 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.657 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.666 W/kg; SAR(10 g) = 0.421 W/kg

Maximum value of SAR (measured) = 0.784 W/kg

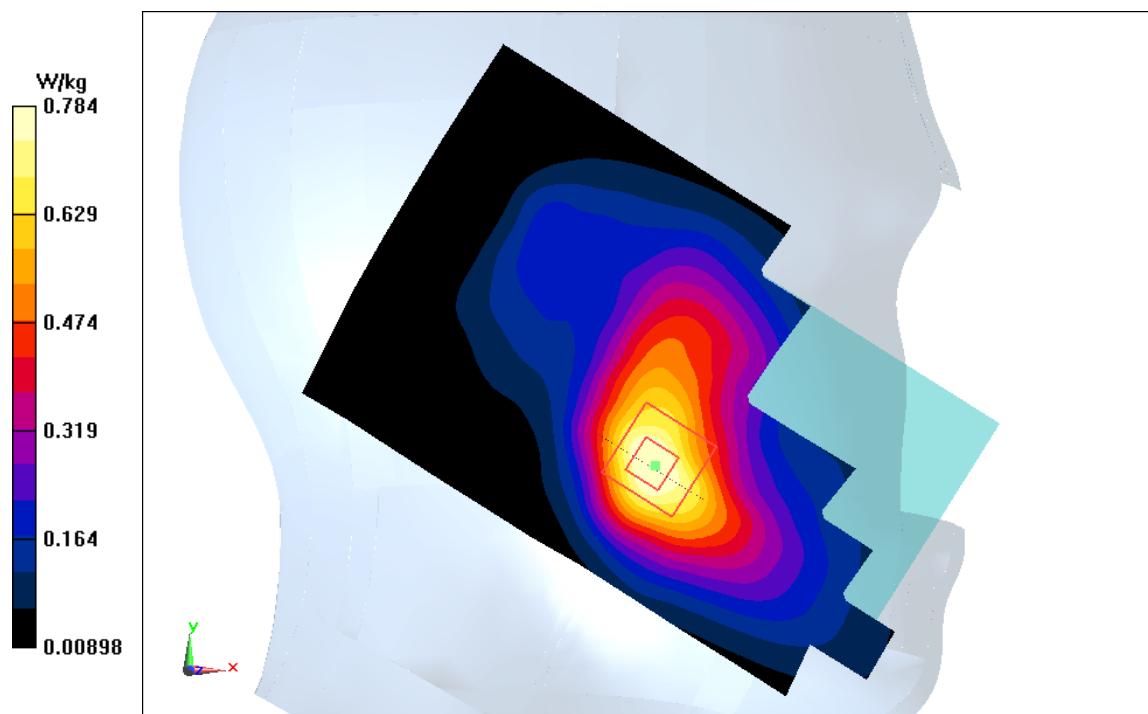**Fig A.5**

WCDMA1900-BII_CH9262 Bottom edge

Date: 2/4/2018

Electronics: DAE4 Sn1525

Medium: Head 1900 MHz

Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 53.48$; $\rho = 1000$ kg/m 3

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA1900-BII 1852.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(8.32,8.32,8.32)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.16 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.52 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.834 W/kg; SAR(10 g) = 0.447 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

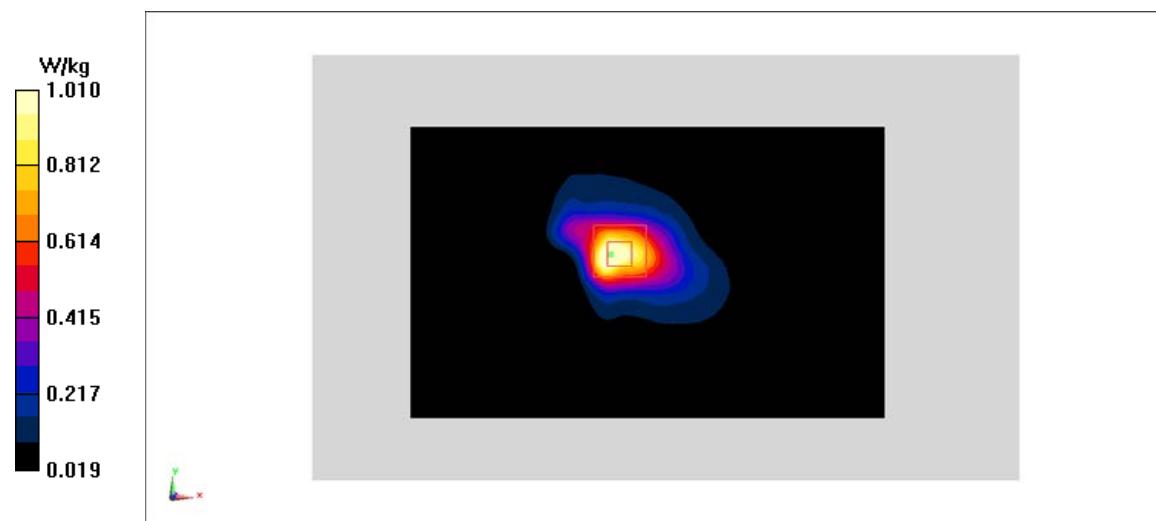


Fig A.6

WCDMA1700-BIV_CH1513 Right Cheek

Date: 2/3/2018

Electronics: DAE4 Sn1525

Medium: Head 1750 MHz

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.349$ mho/m; $\epsilon_r = 39.66$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA1700-BIV 1752.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(8.70,8.70,8.70)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.357 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.445 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.422 W/kg

SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.344 W/kg

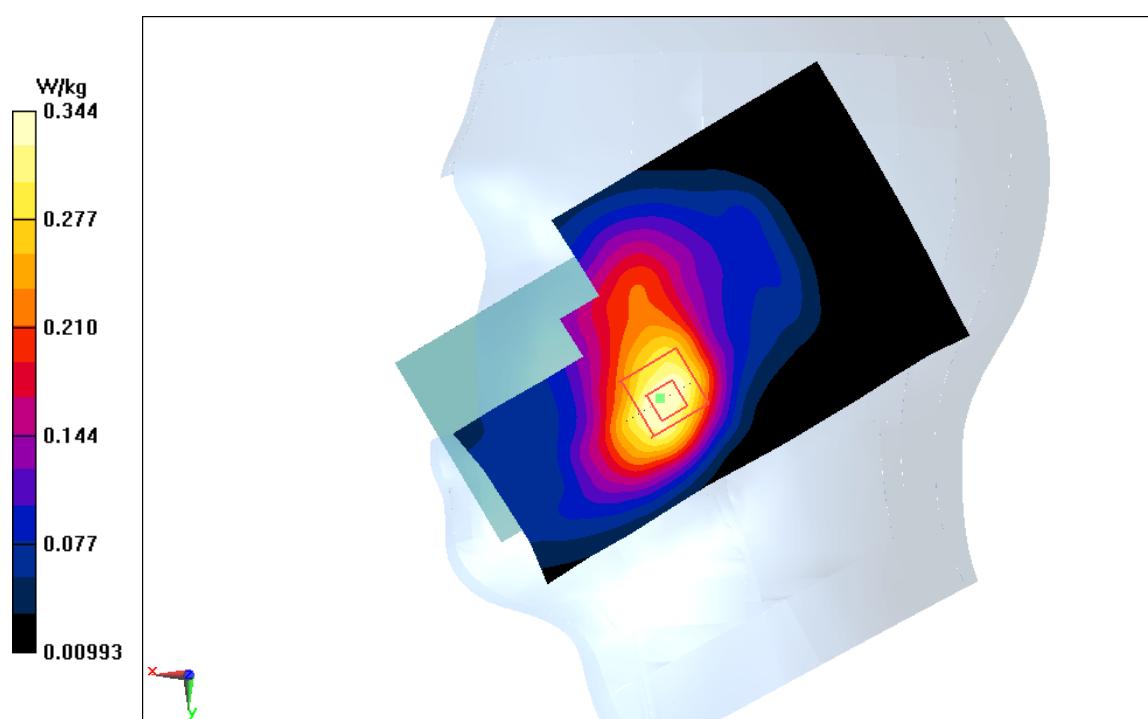**Fig A.7**

WCDMA1700-BIV_CH1513 Bottom edge

Date: 2/3/2018

Electronics: DAE4 Sn1525

Medium: Head 1750 MHz

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.517$ mho/m; $\epsilon_r = 52.44$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA1700-BIV 1752.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(8.60,8.60,8.60)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.16 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.12 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.921 W/kg; SAR(10 g) = 0.501 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

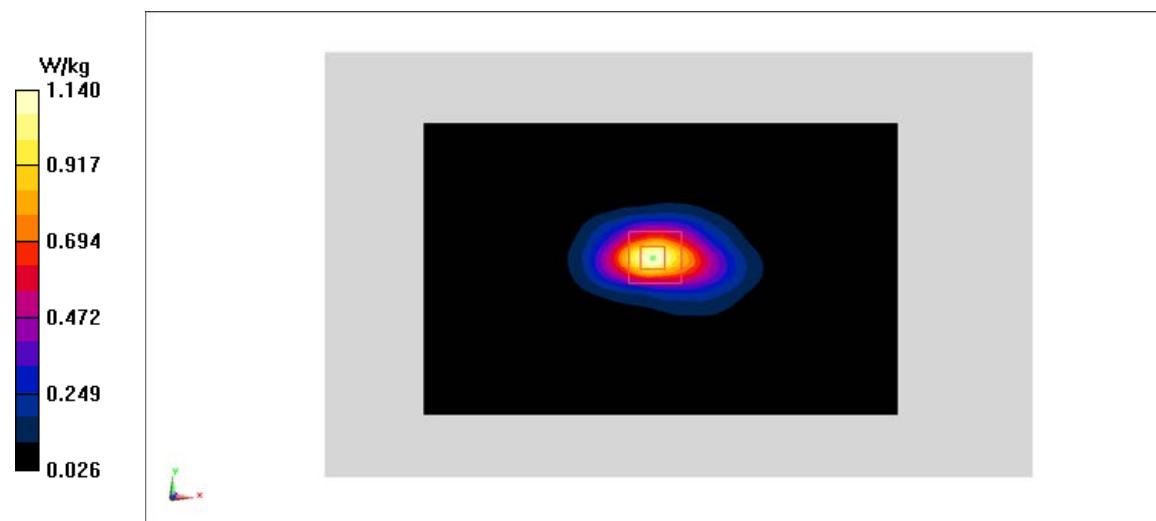**Fig A.8**

WCDMA850-BV_CH4233 Right Cheek

Date: 2/2/2018

Electronics: DAE4 Sn1525

Medium: Head 835 MHz

Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.916$ mho/m; $\epsilon_r = 41.13$; $\rho = 1000$ kg/m 3

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA850-BV 846.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(10.28,10.28,10.28)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.597 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.073 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.715 W/kg

SAR(1 g) = 0.56 W/kg; SAR(10 g) = 0.429 W/kg

Maximum value of SAR (measured) = 0.617 W/kg

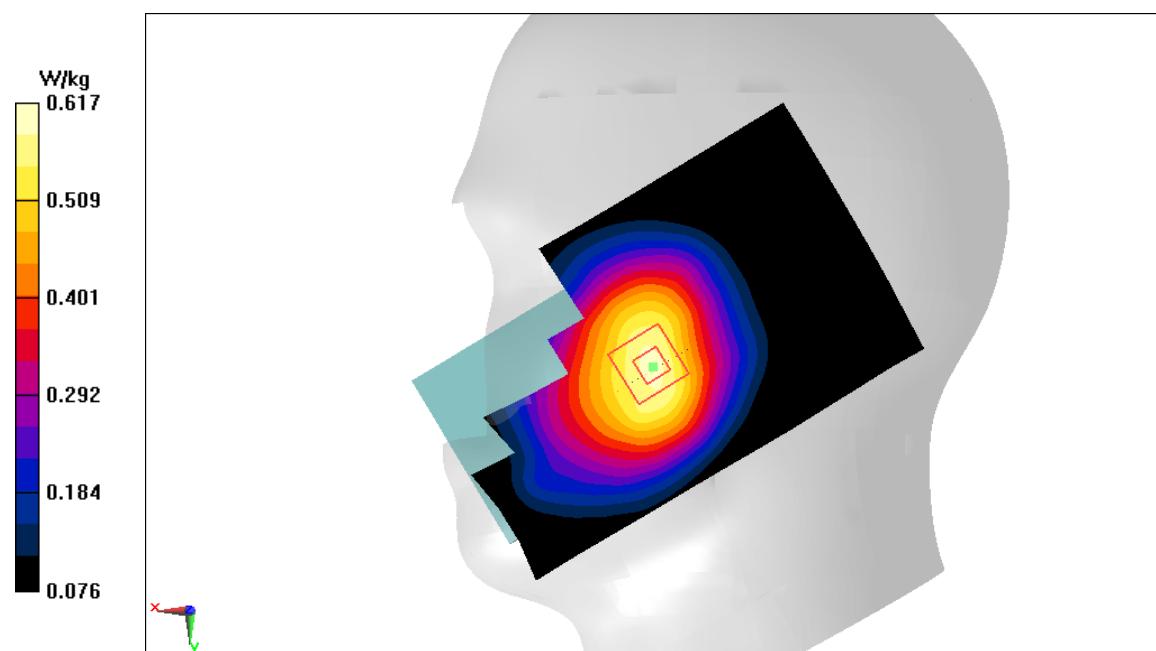


Fig A.9

WCDMA850-BV_CH4233 Rear

Date: 2/2/2018

Electronics: DAE4 Sn1525

Medium: Head 835 MHz

Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.979$ mho/m; $\epsilon_r = 55.93$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA850-BV 846.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(10.21,10.21,10.21)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.872 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.65 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.996 W/kg

SAR(1 g) = 0.795 W/kg; SAR(10 g) = 0.61 W/kg

Maximum value of SAR (measured) = 0.869 W/kg

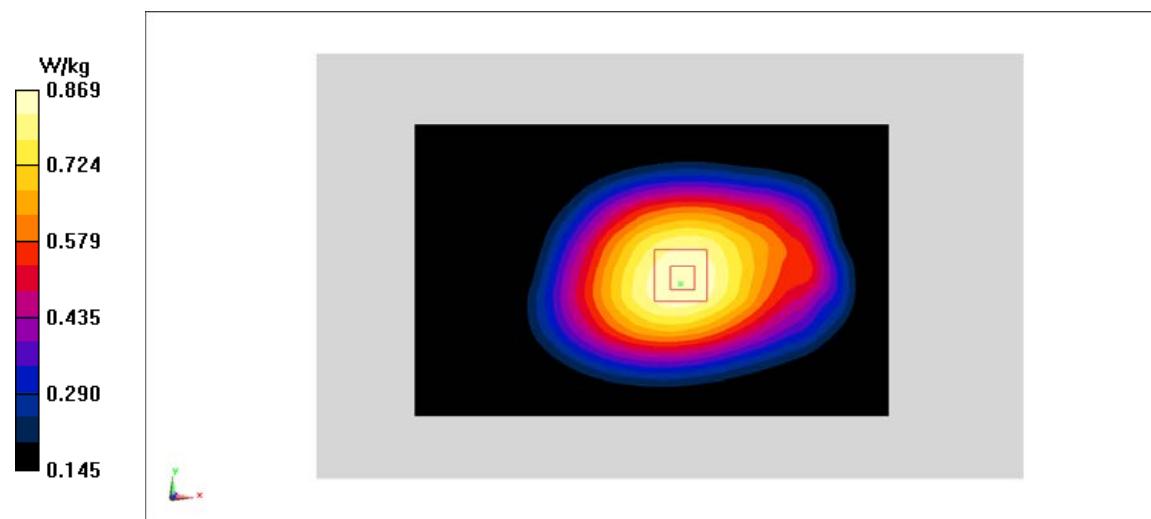


Fig A.10

LTE1900-FDD2_CH19100 Left Cheek

Date: 2/4/2018

Electronics: DAE4 Sn1525

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.395$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE1900-FDD2 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(9.39,9.39,9.39)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.783 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.984 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.997 W/kg

SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.404 W/kg

Maximum value of SAR (measured) = 0.752 W/kg

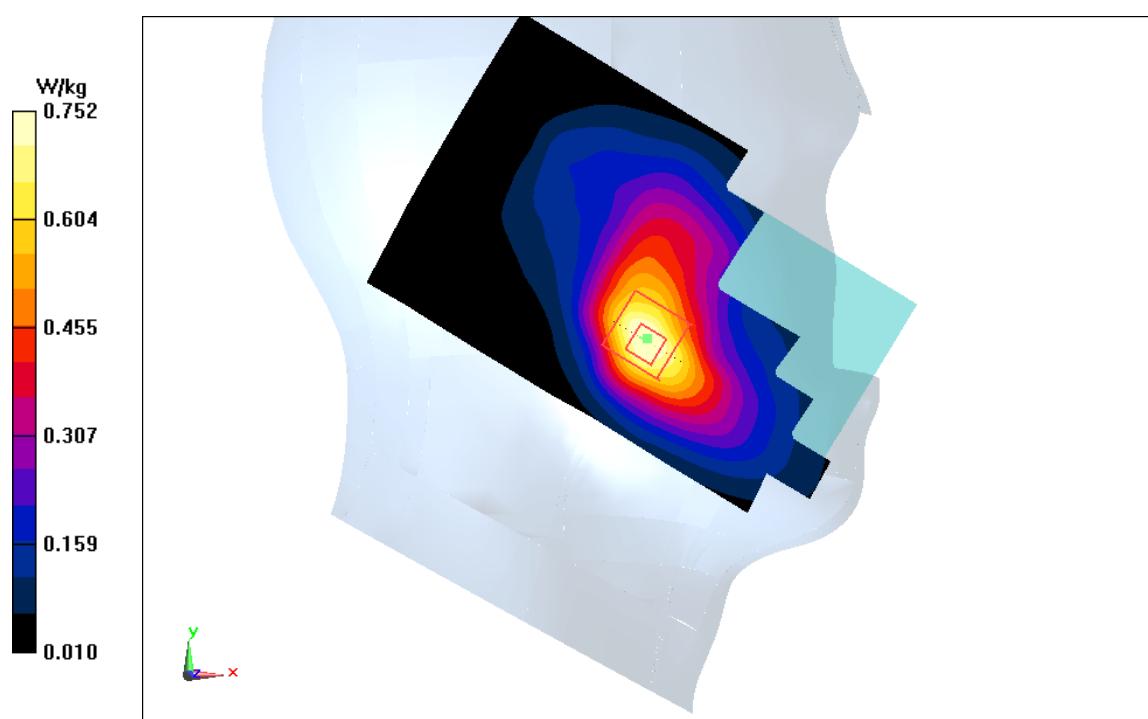


Fig A.11

LTE1900-FDD2_CH19100 Front

Date: 2/4/2018

Electronics: DAE4 Sn1525

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.546$ mho/m; $\epsilon_r = 53.42$; $\rho = 1000$ kg/m 3

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE1900-FDD2 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(8.32,8.32,8.32)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.72 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.595 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1 W/kg

SAR(1 g) = 0.6 W/kg; SAR(10 g) = 0.352 W/kg

Maximum value of SAR (measured) = 0.721 W/kg

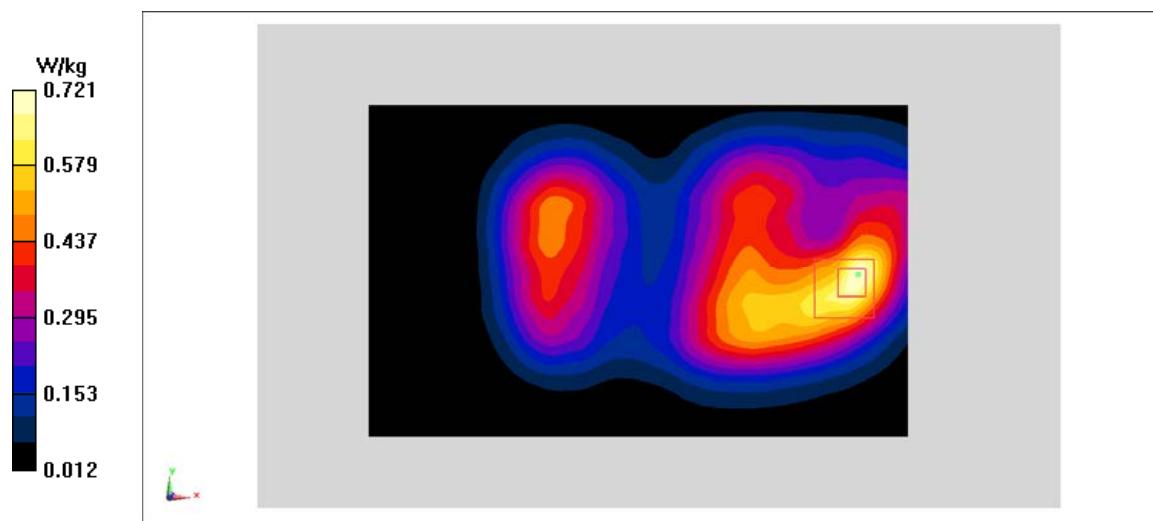


Fig A.12

LTE850-FDD5_CH20450 Right Cheek

Date: 2/2/2018

Electronics: DAE4 Sn1525

Medium: Head 835 MHz

Medium parameters used: $f = 829$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.15$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE850-FDD5 829 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(10.28,10.28,10.28)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.524 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.164 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.628 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.384 W/kg

Maximum value of SAR (measured) = 0.546 W/kg

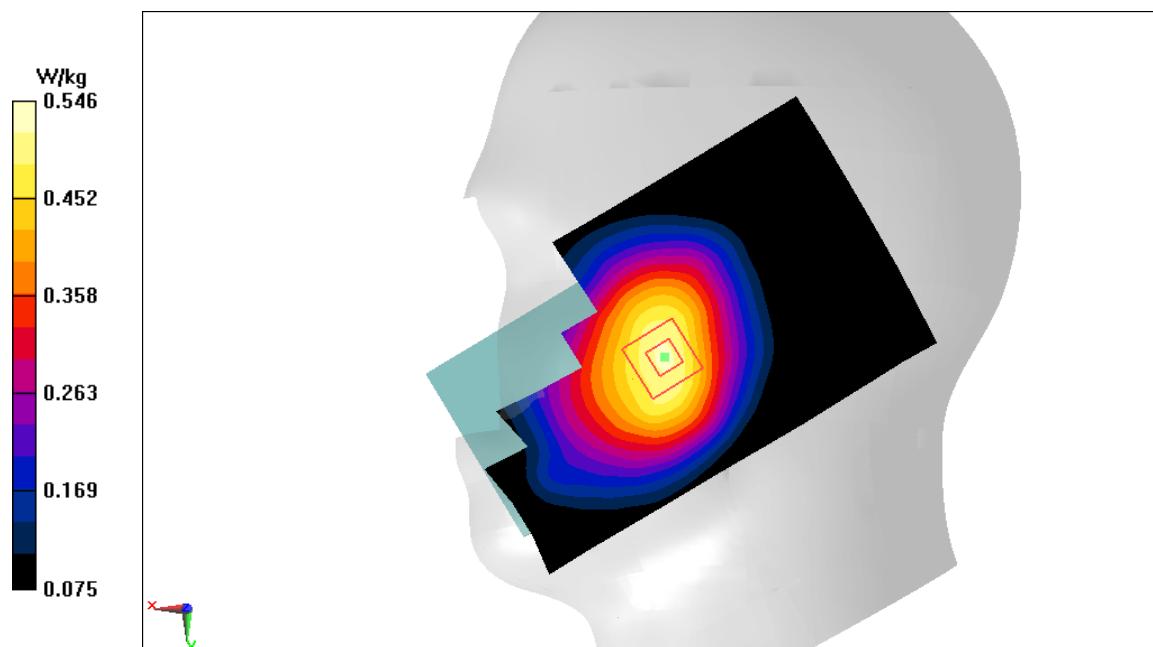**Fig A.13**

LTE850-FDD5_CH20450 Rear

Date: 2/2/2018

Electronics: DAE4 Sn1525

Medium: Head 835 MHz

Medium parameters used: $f = 829$ MHz; $\sigma = 0.962$ mho/m; $\epsilon_r = 55.95$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE850-FDD5 829 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(10.21,10.21,10.21)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.797 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.67 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.906 W/kg

SAR(1 g) = 0.729 W/kg; SAR(10 g) = 0.562 W/kg

Maximum value of SAR (measured) = 0.796 W/kg

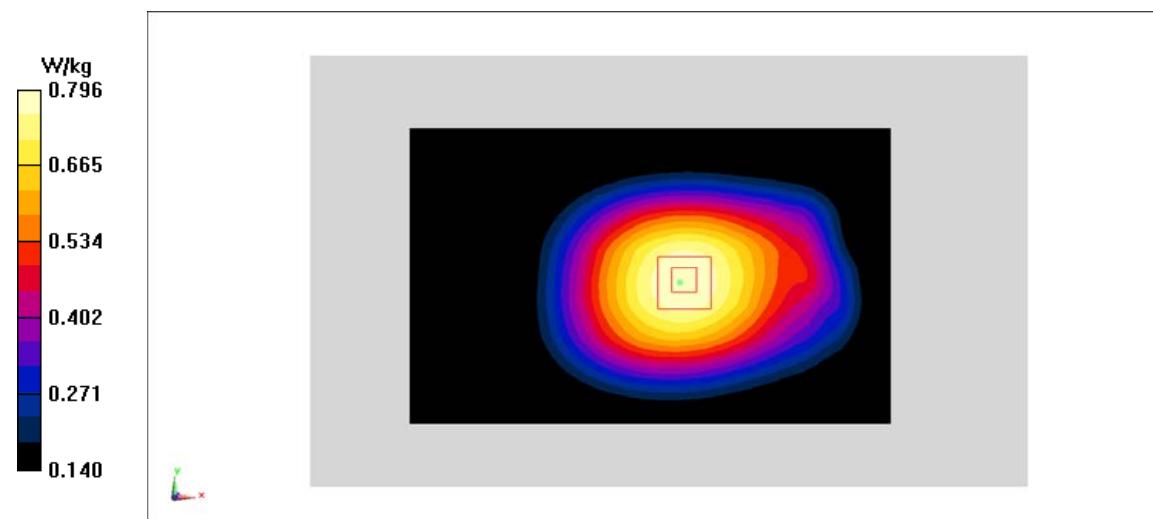


Fig A.14

LTE2500-FDD7_CH21350 Right Cheek

Date: 2/6/2018

Electronics: DAE4 Sn1525

Medium: Head 2600 MHz

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.944$ mho/m; $\epsilon_r = 39.79$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE2500-FDD7 2560 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(7.76,7.76,7.76)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.283 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.66 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.438 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.298 W/kg

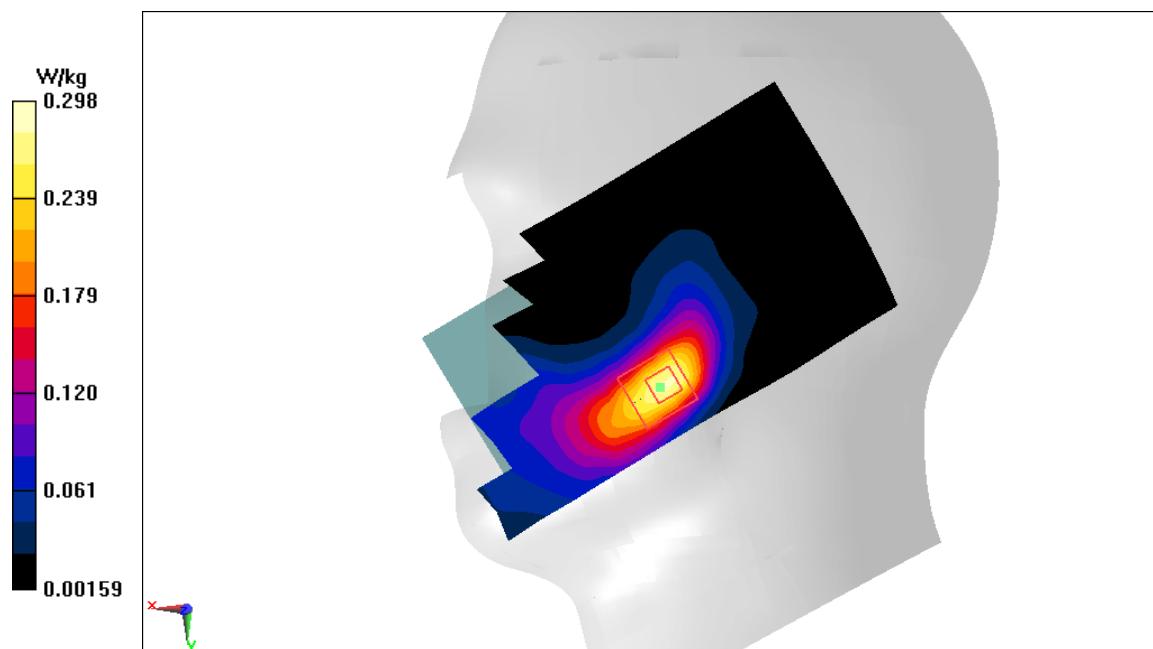


Fig A.15

LTE2500-FDD7_CH21100 Rear

Date: 2/6/2018

Electronics: DAE4 Sn1525

Medium: Head 2600 MHz

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.059$ mho/m; $\epsilon_r = 53.63$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE2500-FDD7 2535 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(7.84,7.84,7.84)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.27 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.434 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.562 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

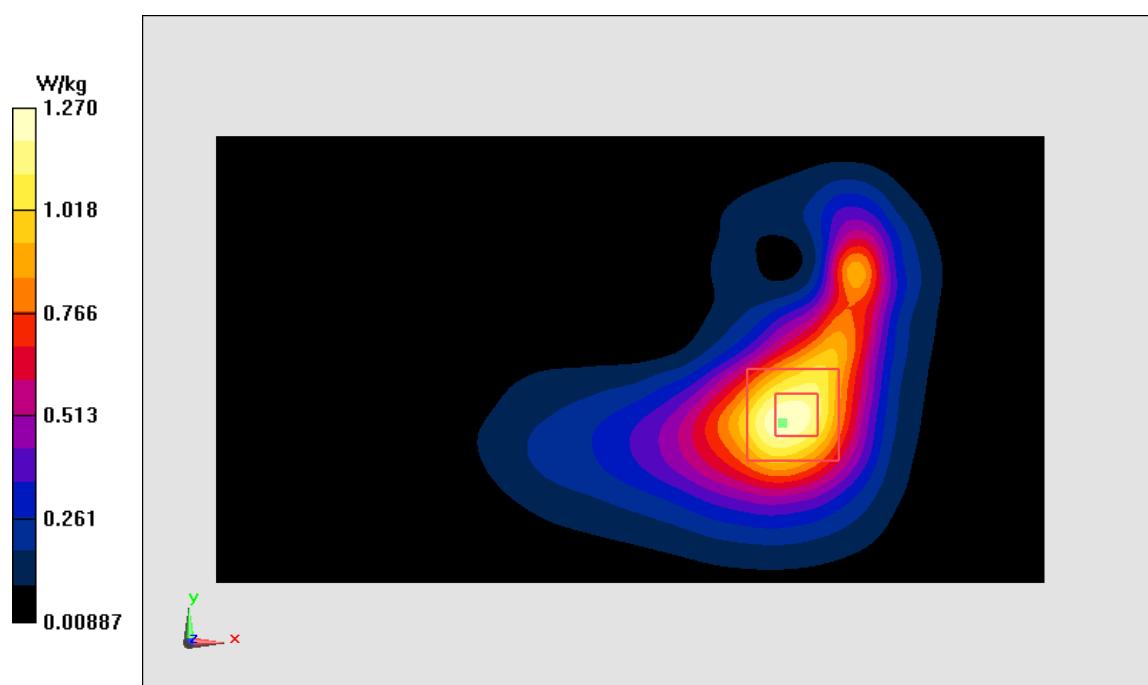**Fig A.16**

LTE700-FDD17_CH23790 Right Cheek

Date: 2/1/2018

Electronics: DAE4 Sn1525

Medium: Head 750 MHz

Medium parameters used: $f = 710$ MHz; $\sigma = 0.865$ mho/m; $\epsilon_r = 42.44$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE700-FDD17 710 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(10.57,10.57,10.57)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.272 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.423 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.308 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.264 W/kg

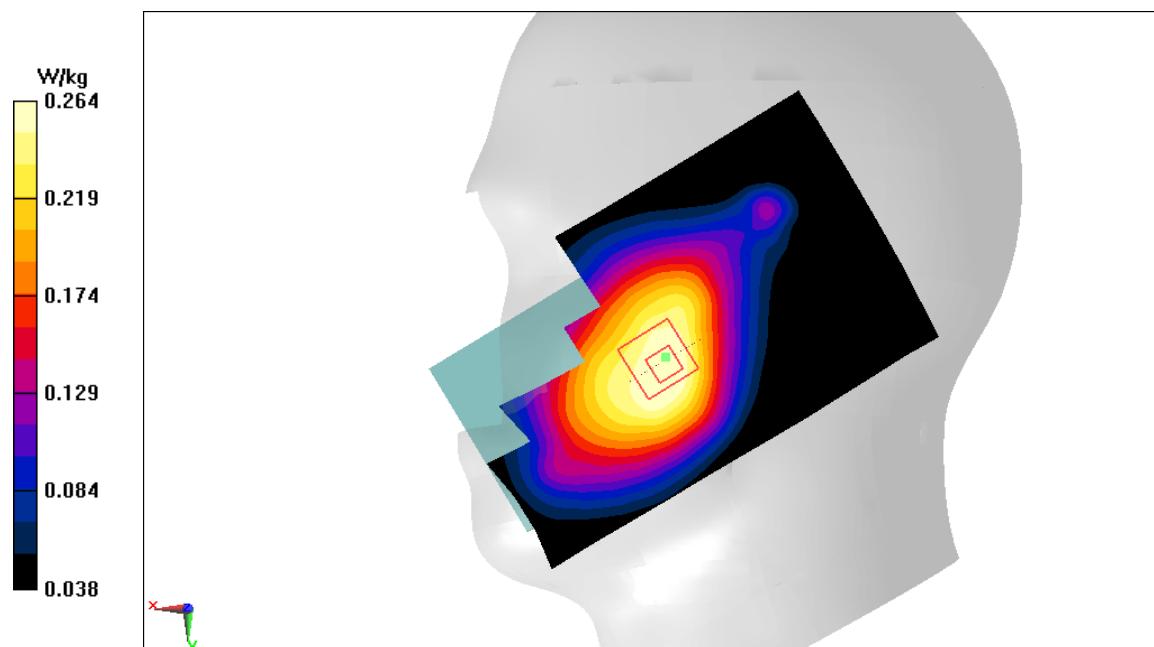**Fig A.17**

LTE700-FDD17_CH23790 Rear

Date: 2/1/2018

Electronics: DAE4 Sn1525

Medium: Head 750 MHz

Medium parameters used: $f = 710$ MHz; $\sigma = 0.934$ mho/m; $\epsilon_r = 56.49$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE700-FDD17 710 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(10.63,10.63,10.63)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.504 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.24 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.367 W/kg

Maximum value of SAR (measured) = 0.502 W/kg

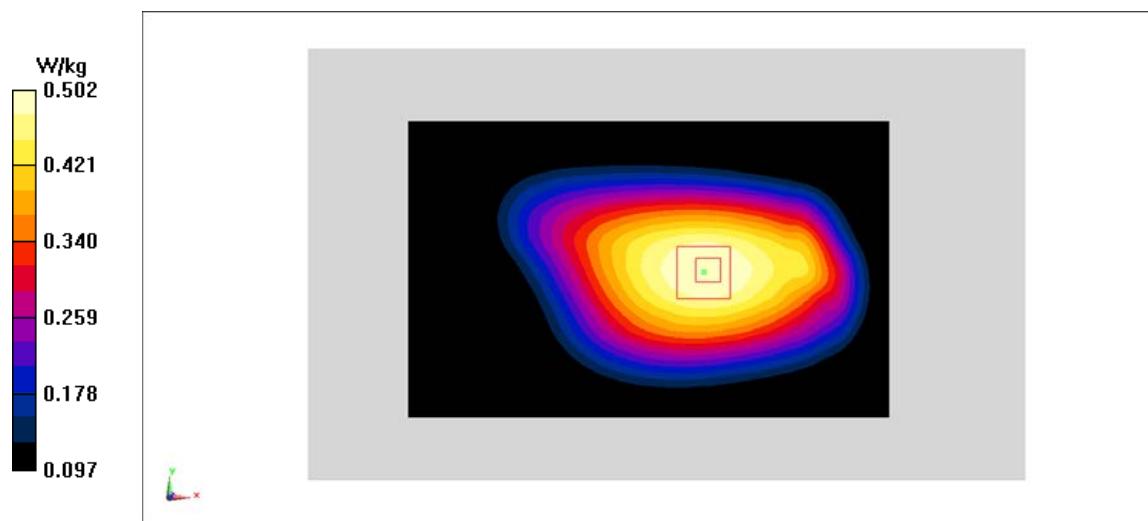**Fig A.18**

LTE1700-FDD66_CH132322 Right Cheek

Date: 2/3/2018

Electronics: DAE4 Sn1525

Medium: Head 1750 MHz

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.343$ mho/m; $\epsilon_r = 39.66$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE1700-FDD66 1745 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(8.70,8.70,8.70)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.424 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.568 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.49 W/kg

SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 0.396 W/kg

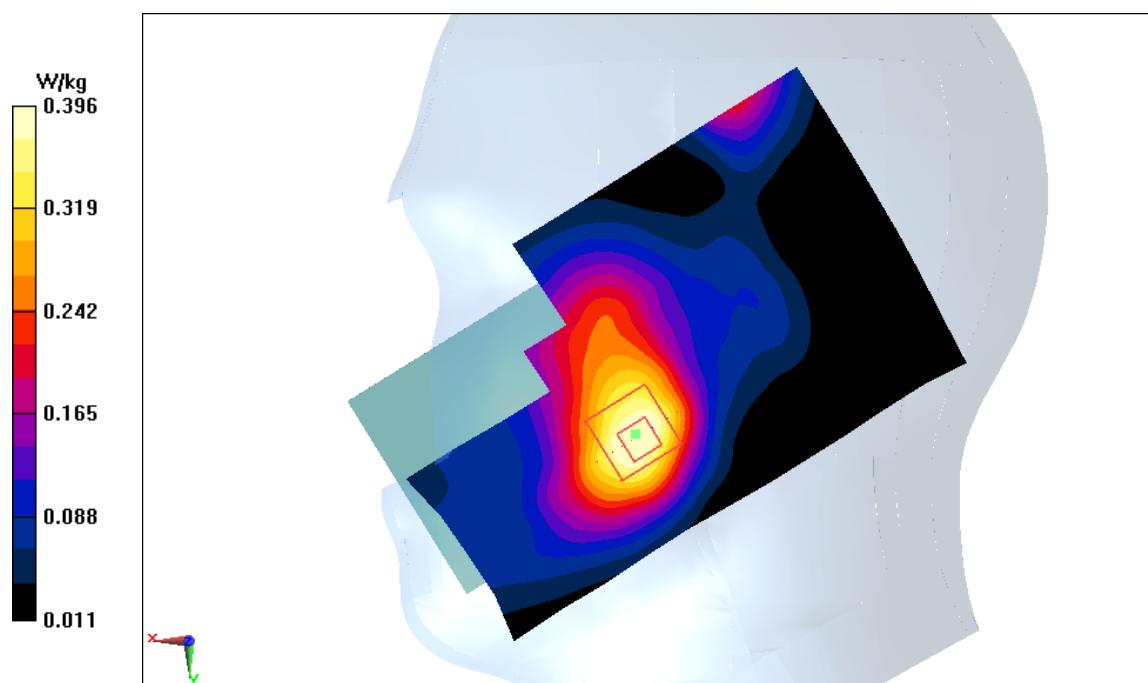**Fig A.19**

LTE1700-FDD66_CH132322 Bottom edge

Date: 2/3/2018

Electronics: DAE4 Sn1525

Medium: Head 1750 MHz

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.506$ mho/m; $\epsilon_r = 52.49$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE1700-FDD66 1745 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(8.60,8.60,8.60)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.78 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.929 W/kg; SAR(10 g) = 0.511 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

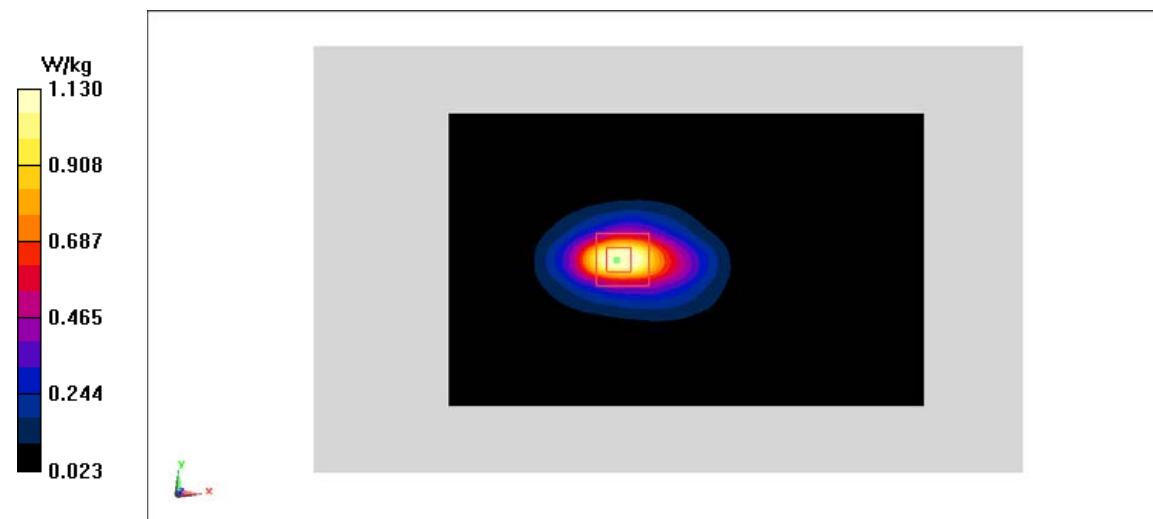


Fig A.20

WLAN2450_CH6 Left Cheek

Date: 2/5/2018

Electronics: DAE4 Sn1525

Medium: Head 2450 MHz

Medium parameters used: $f = 2437$; $\sigma = 1.757$ mho/m; $\epsilon_r = 39.22$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WLAN2450 2437 Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(7.89,7.89,7.89)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.19 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 0.878 W/kg; SAR(10 g) = 0.392 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

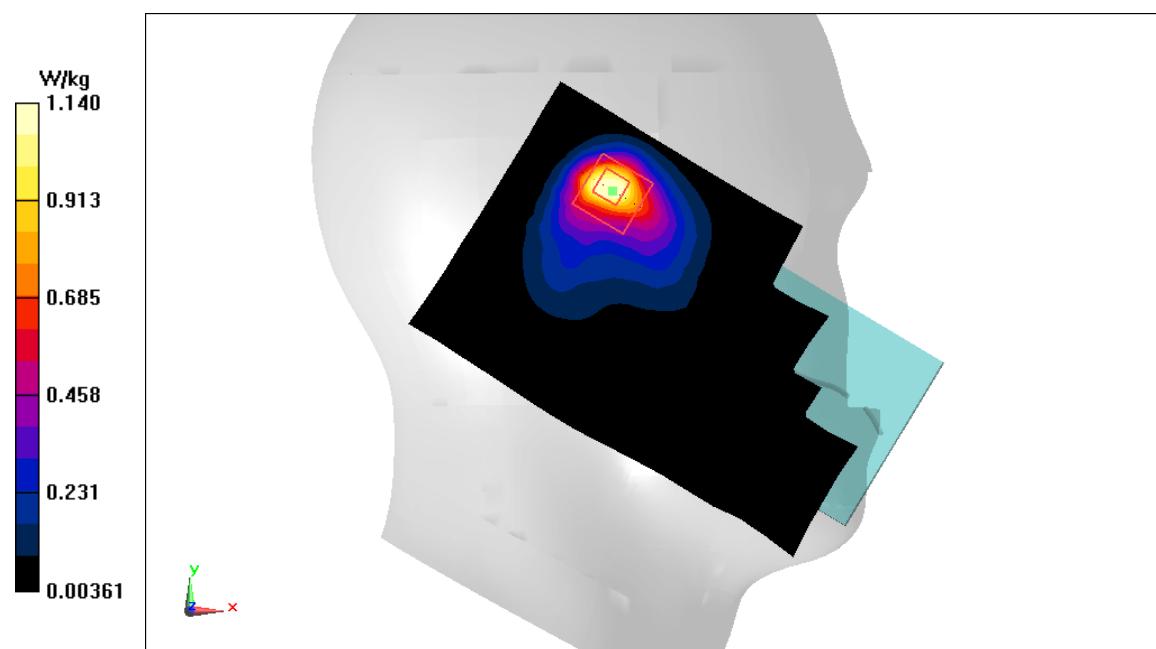


Fig A.21

WLAN2450_CH6 Rear

Date: 2/5/2018

Electronics: DAE4 Sn1525

Medium: Head 2450 MHz

Medium parameters used: $f = 2437$; $\sigma = 1.948$ mho/m; $\epsilon_r = 53.12$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WLAN2450 2437 Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(8.09,8.09,8.09)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.151 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.111 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.148 W/kg

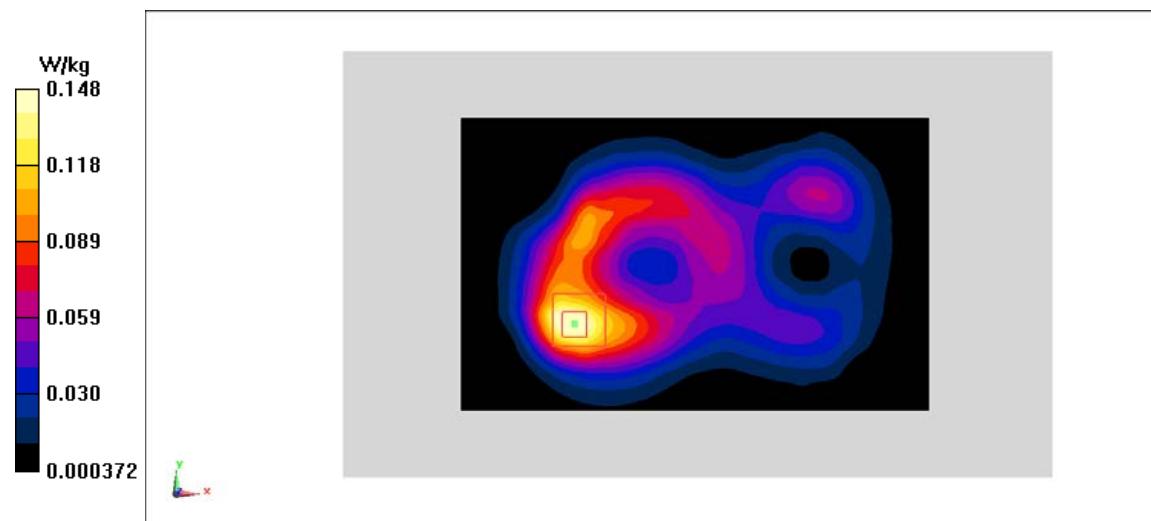


Fig A.22

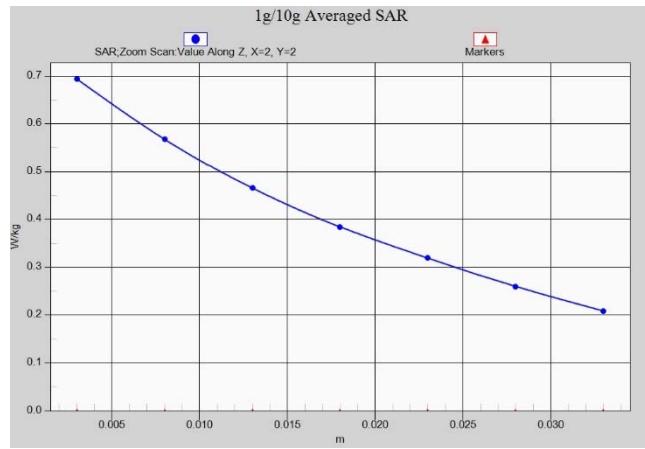


Fig.A.1- 1 Z-Scan at power reference point (GSM850)

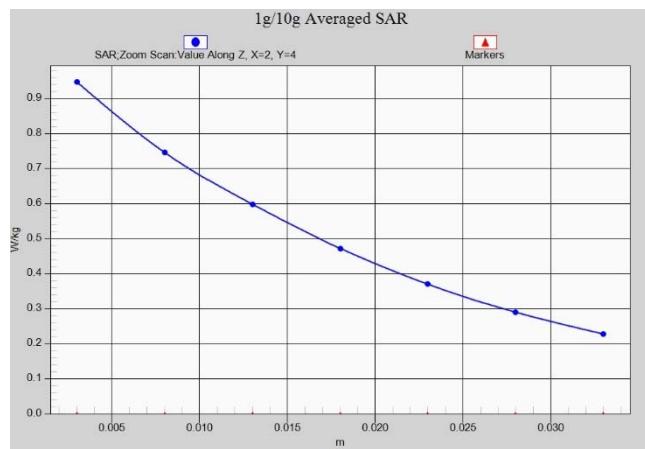


Fig.A.1- 2 Z-Scan at power reference point (GSM850)

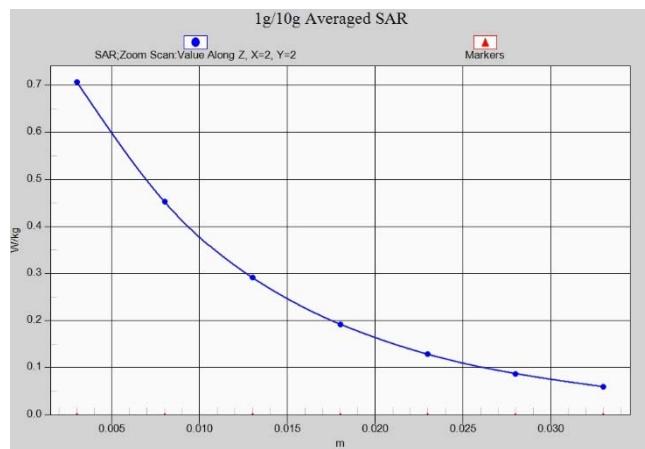


Fig.A.1- 3 Z-Scan at power reference point (PCS1900)

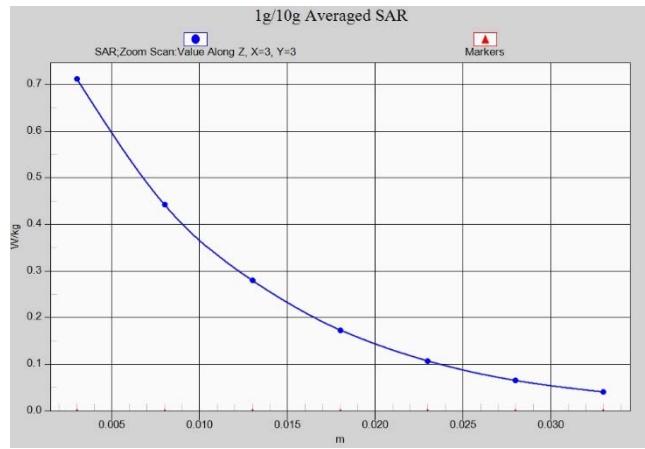


Fig.A.1- 4 Z-Scan at power reference point (PCS1900)

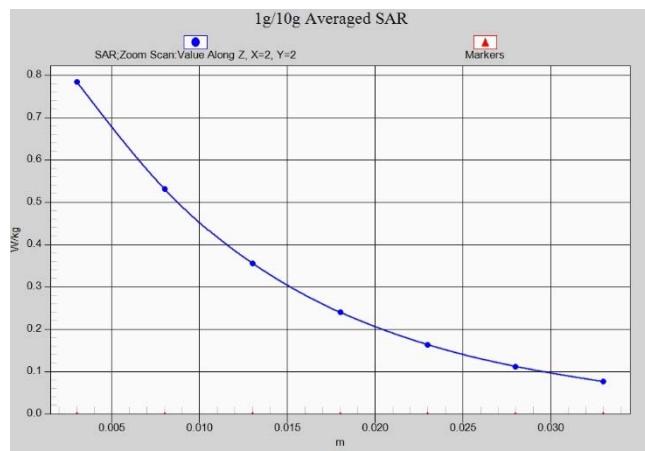


Fig.A.1- 5 Z-Scan at power reference point (W1900)

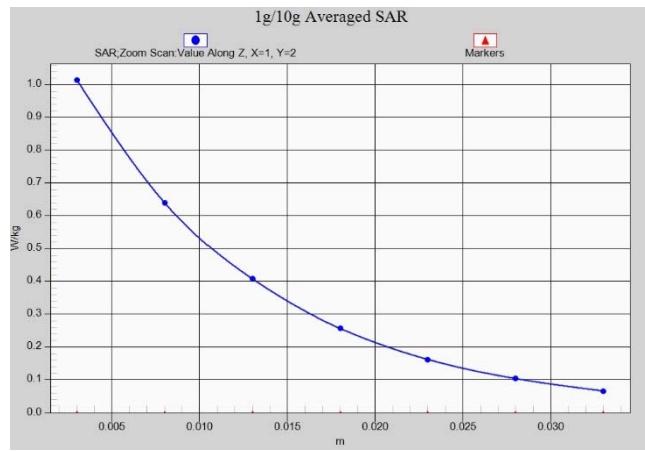


Fig.A.1- 6 Z-Scan at power reference point (W1900)

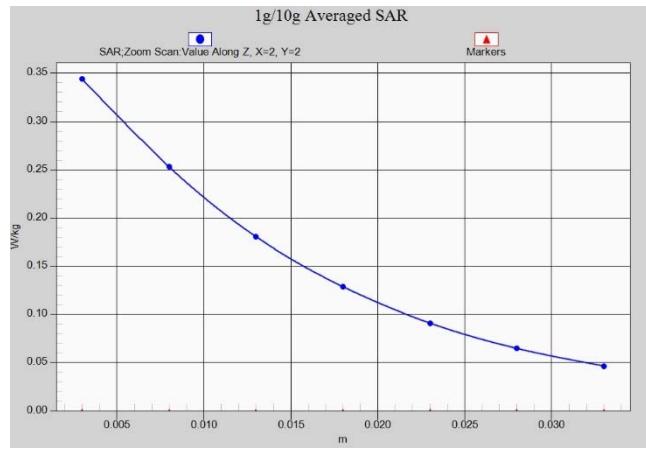


Fig.A.1- 7 Z-Scan at power reference point (W1700)

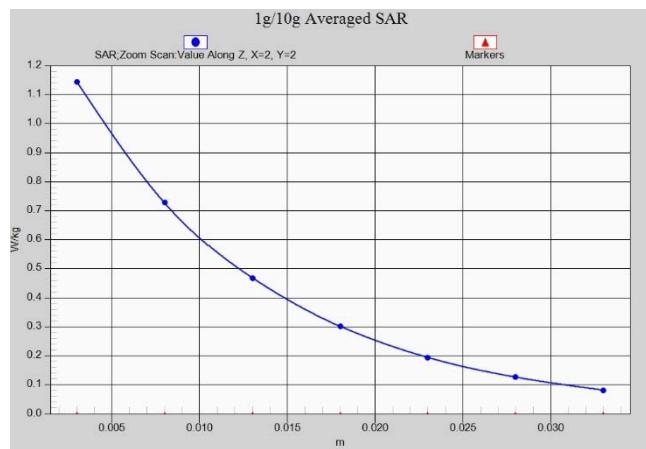


Fig.A.1- 8 Z-Scan at power reference point (W1700)

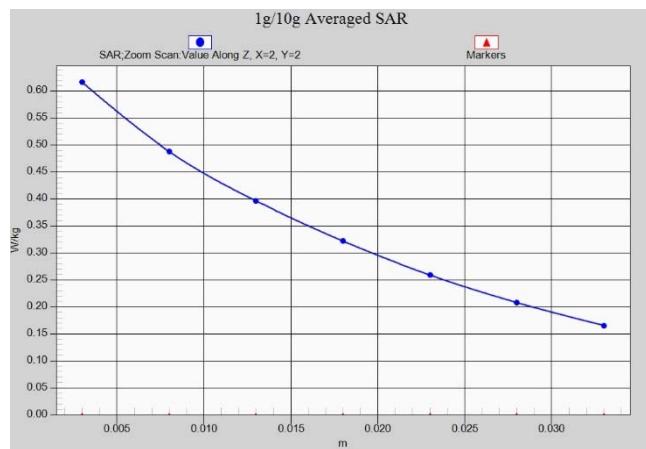


Fig.A.1- 9 Z-Scan at power reference point (W850)

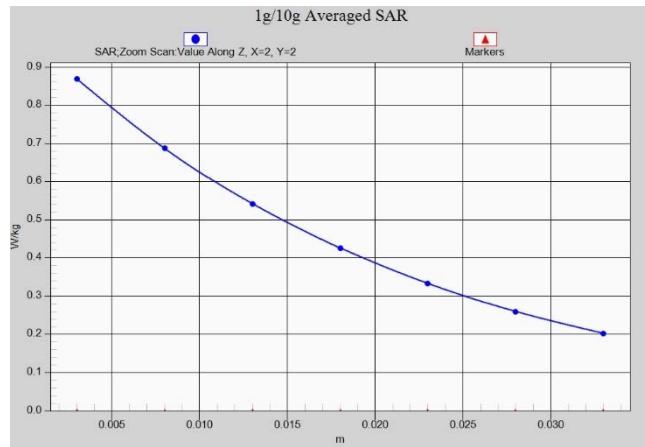


Fig.A.1- 10 Z-Scan at power reference point (W850)

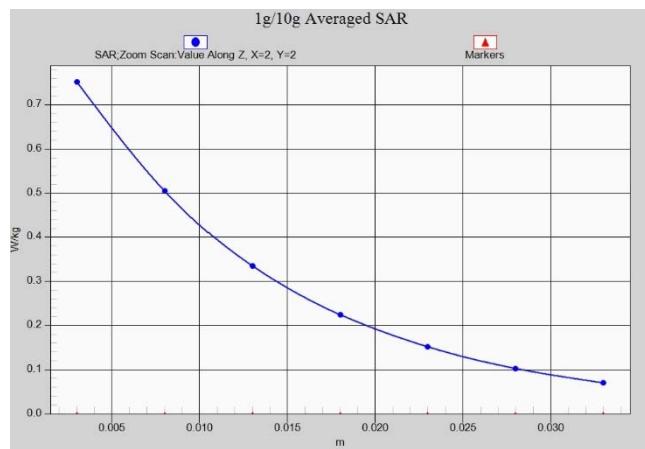


Fig.A.1- 11 Z-Scan at power reference point (LTE band2)

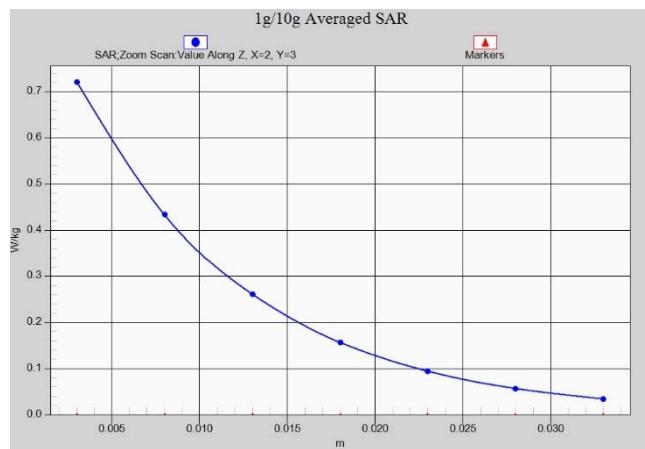


Fig.A.1- 12 Z-Scan at power reference point (LTE band2)

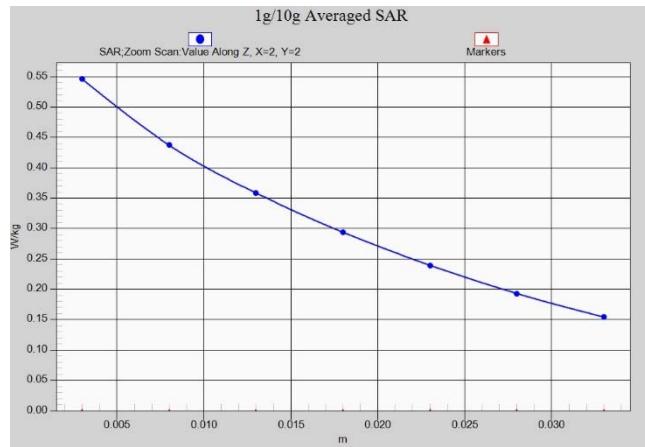


Fig.A.1- 13 Z-Scan at power reference point (LTE band5)

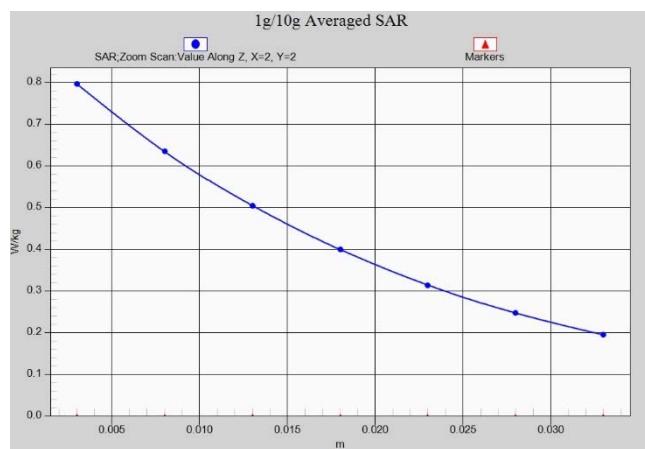


Fig.A.1- 14 Z-Scan at power reference point (LTE band5)

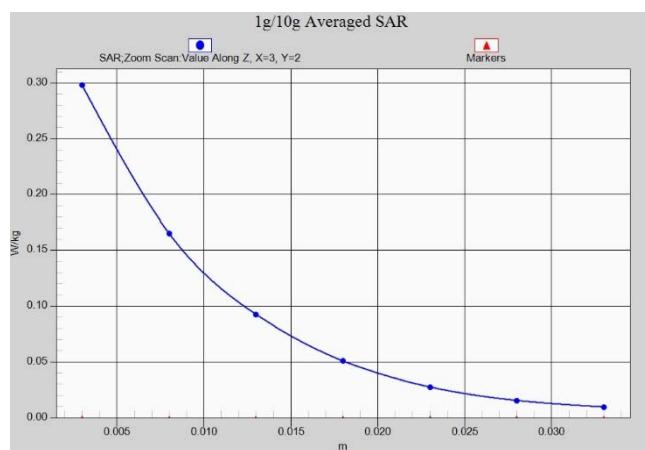


Fig.A.1- 15 Z-Scan at power reference point (LTE band7)

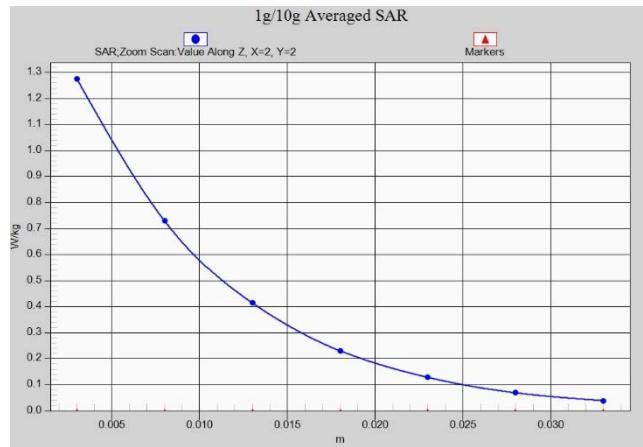


Fig.A.1- 16 Z-Scan at power reference point (LTE band7)

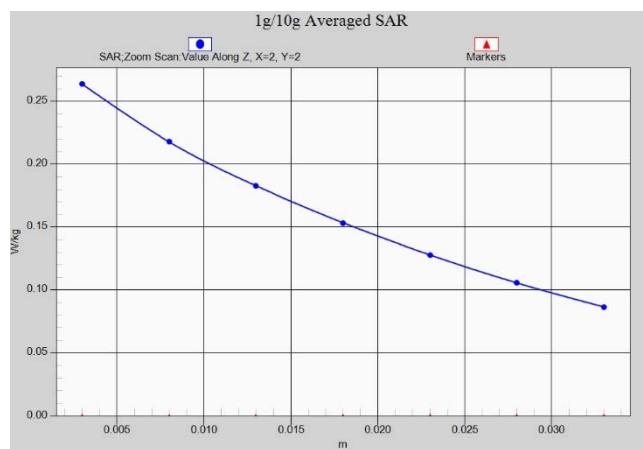


Fig.A.1- 17 Z-Scan at power reference point (LTE band17)

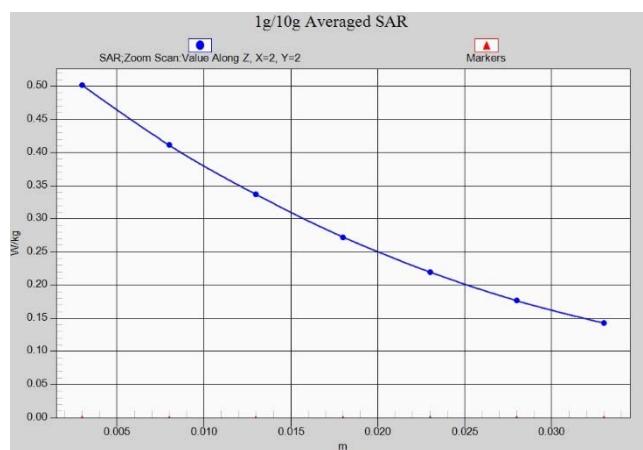


Fig.A.1- 18 Z-Scan at power reference point (LTE band17)

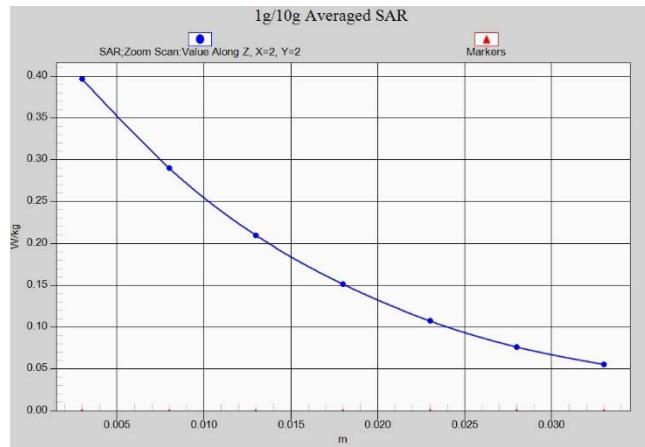


Fig.A.1- 19 Z-Scan at power reference point (LTE band66)

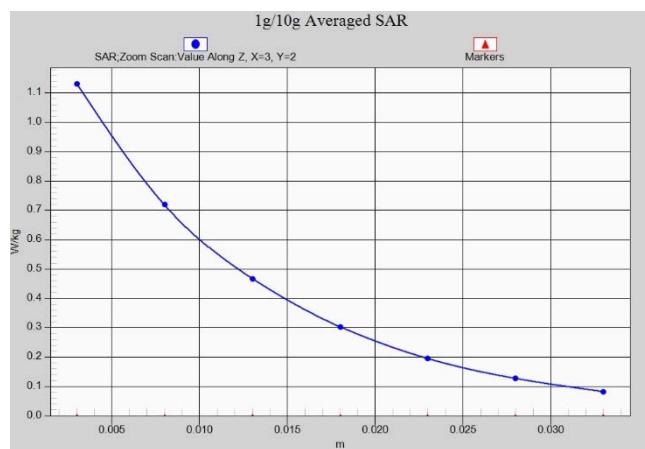


Fig.A.1- 20 Z-Scan at power reference point (LTE band66)

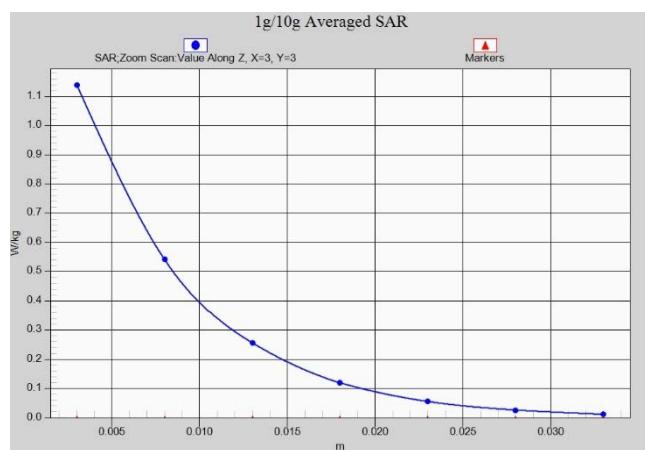


Fig.A.1- 21 Z-Scan at power reference point (Wifi2450)

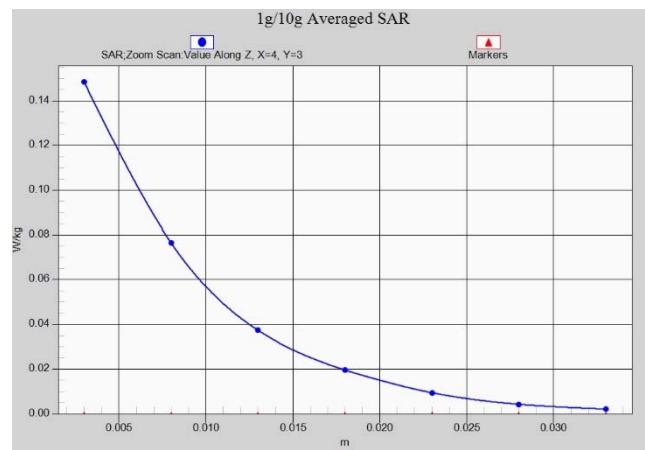


Fig.A.1- 22 Z-Scan at power reference point (Wifi2450)

ANNEX B System Verification Results

750 MHz

Date: 2/1/2018

Electronics: DAE4 Sn1525

Medium: Head 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 42.39$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 750 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(10.57,10.57,10.57)

System Validation /Area Scan (81x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Reference Value = 57.79 V/m; Power Drift = -0.05

Fast SAR: SAR(1 g) = 2.12 W/kg; SAR(10 g) = 1.36 W/kg

Maximum value of SAR (interpolated) = 2.7 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 57.79 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 2.06 W/kg; SAR(10 g) = 1.33 W/kg

Maximum value of SAR (measured) = 2.84 W/kg

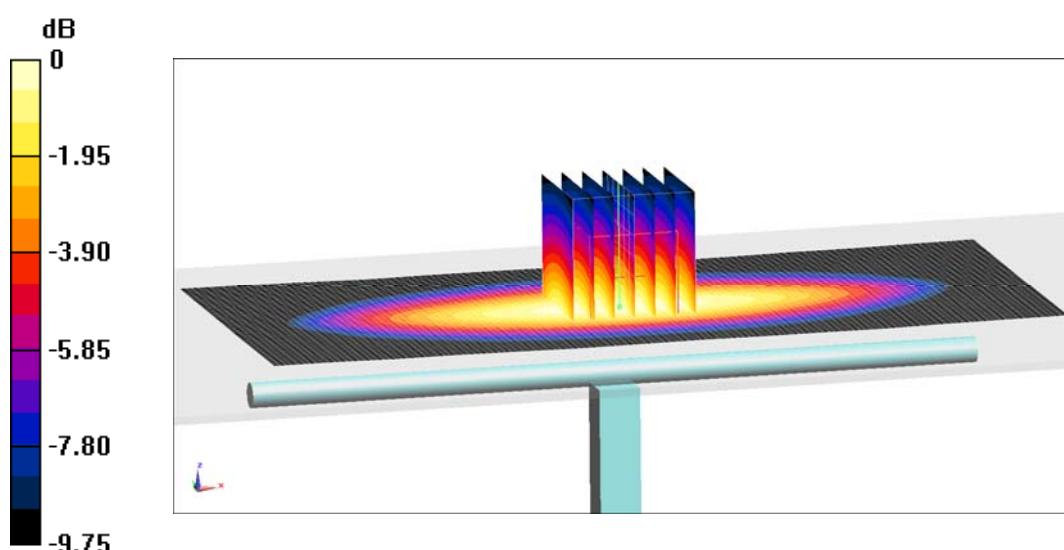

0 dB = 2.84 W/kg = 4.53 dB W/kg

Fig.B.1 validation 750 MHz 250mW

750 MHz

Date: 2/1/2018

Electronics: DAE4 Sn1525

Medium: Body 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.972 \text{ mho/m}$; $\epsilon_r = 56.44$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 750 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(10.63,10.63,10.63)

System Validation /Area Scan (81x191x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 58.42 V/m; Power Drift = -0.05

Fast SAR: SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.41 W/kg

Maximum value of SAR (interpolated) = 3.24 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.42 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.39 W/kg

SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.43 W/kg

Maximum value of SAR (measured) = 2.97 W/kg

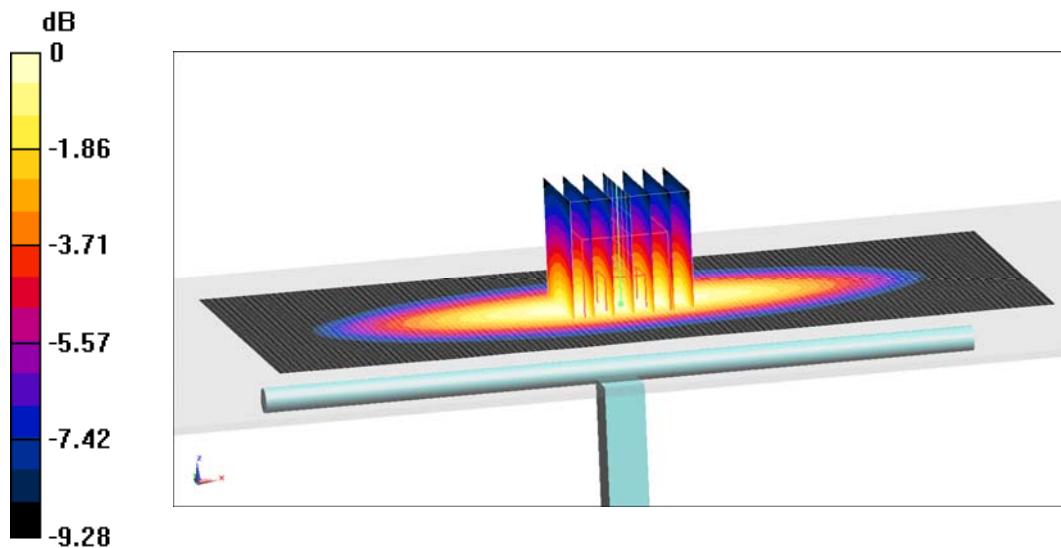

0 dB = 2.97 W/kg = 4.73 dB W/kg

Fig.B.2 validation 750 MHz 250mW

835 MHz

Date: 2/2/2018

Electronics: DAE4 Sn1525

Medium: Head 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.905$ mho/m; $\epsilon_r = 41.14$; $\rho = 1000$ kg/m 3

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(10.28,10.28,10.28)

System Validation /Area Scan (81x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Reference Value = 63.9 V/m; Power Drift = -0.02

Fast SAR: SAR(1 g) = 2.33 W/kg; SAR(10 g) = 1.52 W/kg

Maximum value of SAR (interpolated) = 3.72 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 63.9 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 4.13 W/kg

SAR(1 g) = 2.3 W/kg; SAR(10 g) = 1.49 W/kg

Maximum value of SAR (measured) = 3.56 W/kg

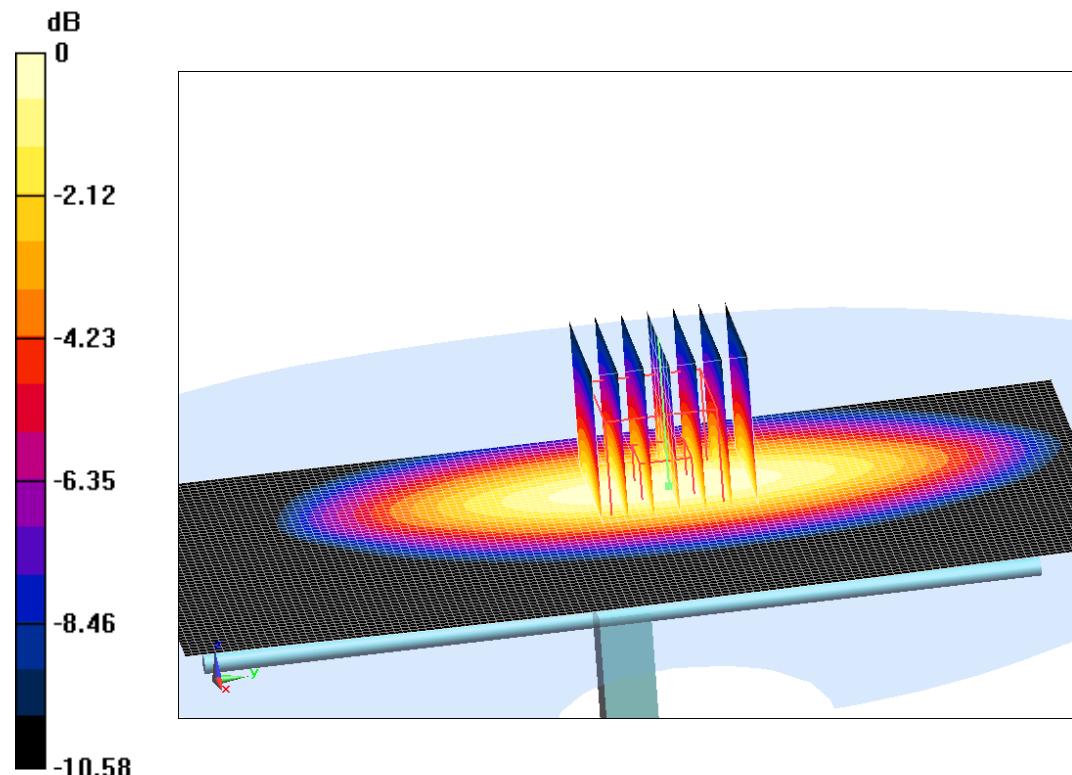

0 dB = 3.56 W/kg = 5.51 dB W/kg

Fig.B.3 validation 835 MHz 250mW

835 MHz

Date: 2/2/2018

Electronics: DAE4 Sn1525

Medium: Body 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.968 \text{ mho/m}$; $\epsilon_r = 55.94$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(10.21,10.21,10.21)

System Validation /Area Scan (81x191x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 60.48 V/m; Power Drift = 0.06

Fast SAR: SAR(1 g) = 2.36 W/kg; SAR(10 g) = 1.54 W/kg

Maximum value of SAR (interpolated) = 3.59 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 60.48 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 3.69 W/kg

SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.51 W/kg

Maximum value of SAR (measured) = 3.21 W/kg

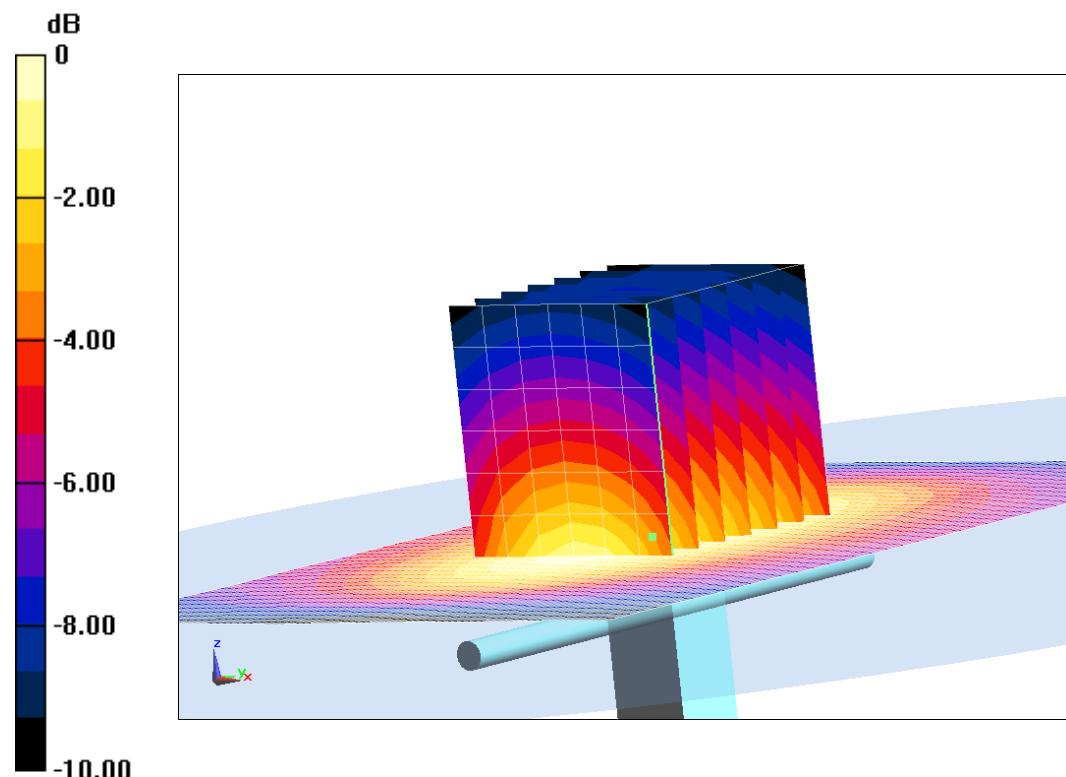

0 dB = 3.21 W/kg = 5.07 dB W/kg

Fig.B.4 validation 835 MHz 250mW

1750 MHz

Date: 2/3/2018

Electronics: DAE4 Sn1525

Medium: Head 1750 MHz

Medium parameters used: $f = 1750 \text{ MHz}$; $\sigma = 1.346 \text{ mho/m}$; $\epsilon_r = 39.66$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 1750 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(8.70,8.70,8.70)

System Validation /Area Scan (81x191x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 107.29 V/m; Power Drift = -0.07

Fast SAR: SAR(1 g) = 9.07 W/kg; SAR(10 g) = 4.85 W/kg

Maximum value of SAR (interpolated) = 14.9 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 107.29 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 17.83 W/kg

SAR(1 g) = 9.21 W/kg; SAR(10 g) = 4.94 W/kg

Maximum value of SAR (measured) = 14.41 W/kg

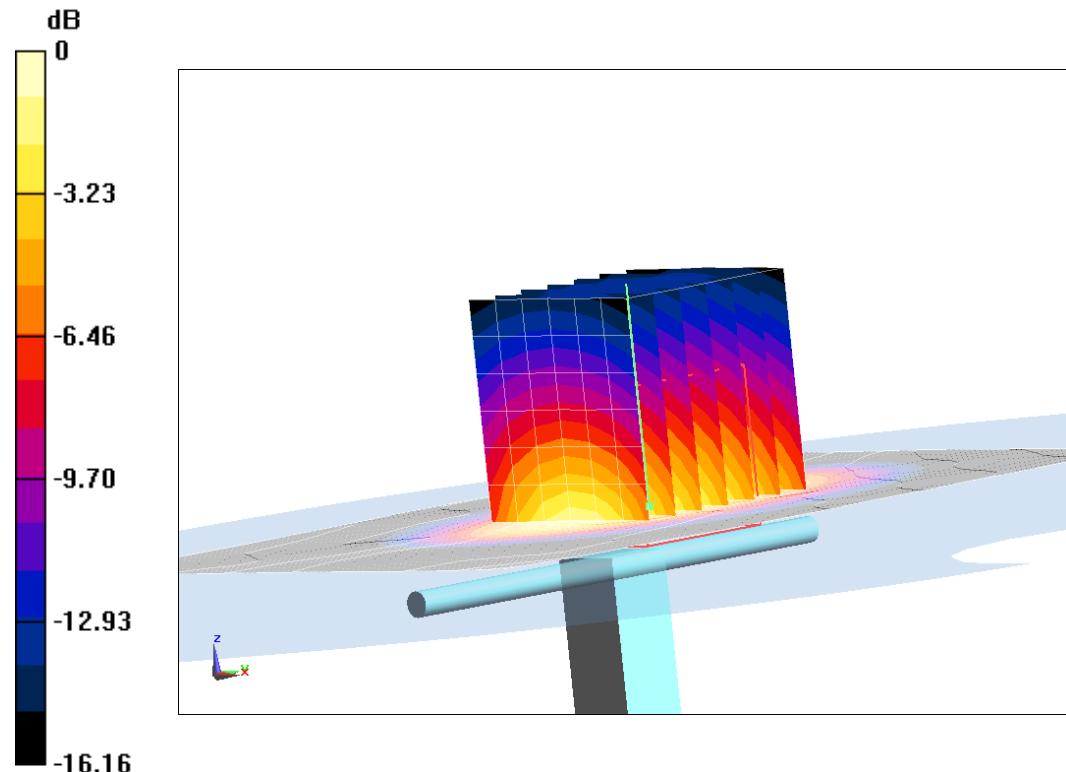

0 dB = 14.41 W/kg = 11.59 dB W/kg

Fig.B.5 validation 1750 MHz 250mW

1750 MHz

Date: 2/3/2018

Electronics: DAE4 Sn1525

Medium: Body 1750 MHz

Medium parameters used: $f = 1750 \text{ MHz}$; $\sigma = 1.514 \text{ mho/m}$; $\epsilon_r = 52.44$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 1750 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(8.60,8.60,8.60)

System Validation /Area Scan (81x191x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 97.5 V/m; Power Drift = 0.03

Fast SAR: SAR(1 g) = 9.17 W/kg; SAR(10 g) = 4.97 W/kg

Maximum value of SAR (interpolated) = 16.31 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 97.5 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 16.62 W/kg

SAR(1 g) = 9.13 W/kg; SAR(10 g) = 4.93 W/kg

Maximum value of SAR (measured) = 13.15 W/kg

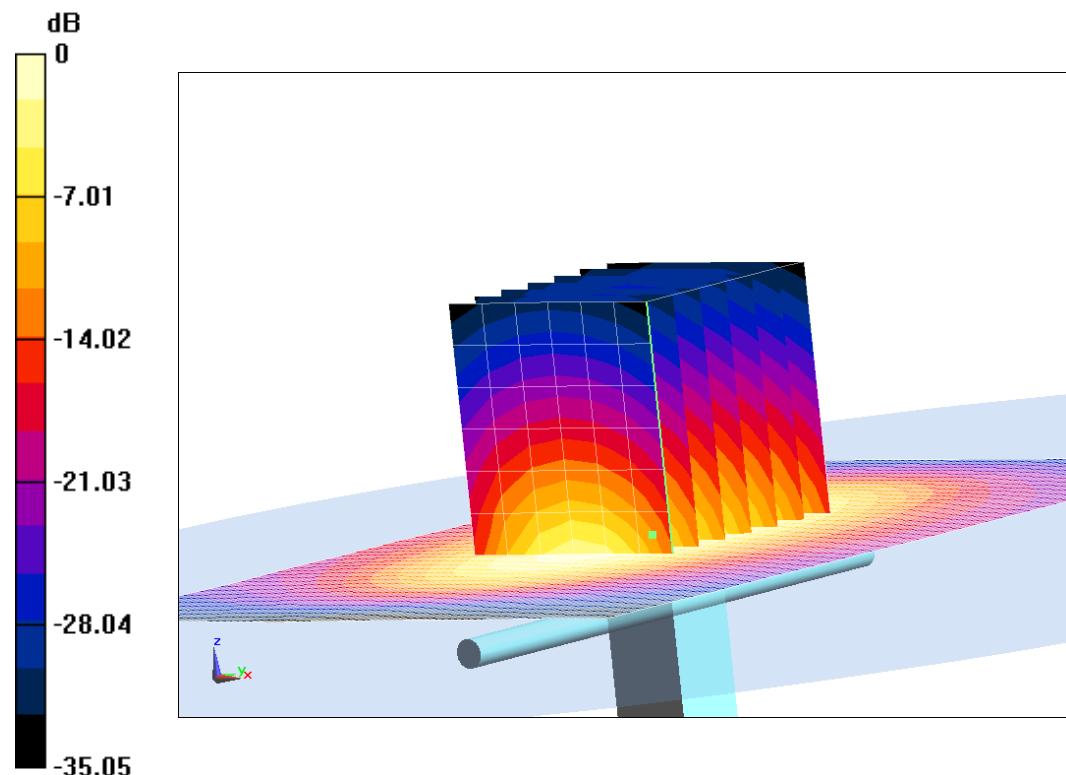

0 dB = 13.15 W/kg = 11.19 dB W/kg

Fig.B.6 validation 1750 MHz 250mW

1900 MHz

Date: 2/4/2018

Electronics: DAE4 Sn1525

Medium: Head 1900 MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.395 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(9.39,9.39,9.39)

System Validation /Area Scan (81x191x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 104.36 V/m; Power Drift = -0.01

Fast SAR: SAR(1 g) = 10.09 W/kg; SAR(10 g) = 5.19 W/kg

Maximum value of SAR (interpolated) = 14.97 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 104.36 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 18.31 W/kg

SAR(1 g) = 9.97 W/kg; SAR(10 g) = 5.17 W/kg

Maximum value of SAR (measured) = 15.09 W/kg

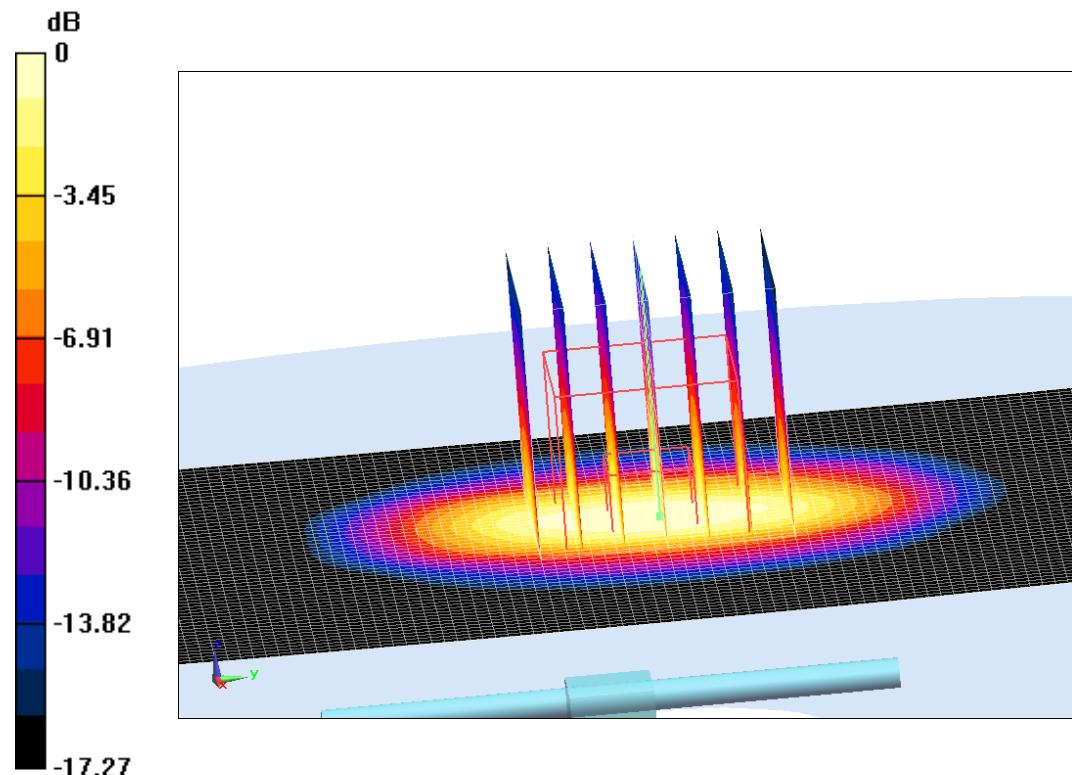

0 dB = 15.09 W/kg = 11.79 dB W/kg

Fig.B.7 validation 1900 MHz 250mW

1900 MHz

Date: 2/4/2018

Electronics: DAE4 Sn1525

Medium: Body 1900 MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.546 \text{ mho/m}$; $\epsilon_r = 53.42$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(8.32,8.32,8.32)

System Validation /Area Scan (81x191x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 103.08 V/m; Power Drift = 0.01

Fast SAR: SAR(1 g) = 10.01 W/kg; SAR(10 g) = 5.34 W/kg

Maximum value of SAR (interpolated) = 17.4 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 103.08 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 17.35 W/kg

SAR(1 g) = 10.22 W/kg; SAR(10 g) = 5.36 W/kg

Maximum value of SAR (measured) = 14.44 W/kg

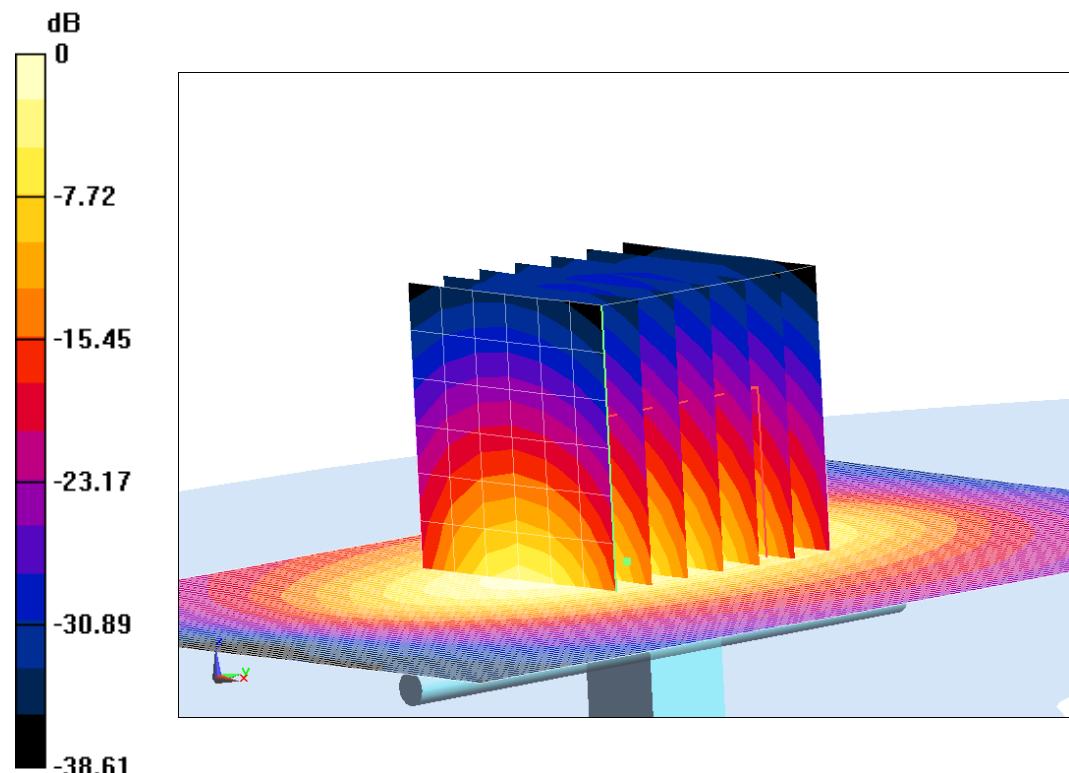

0 dB = 14.44 W/kg = 11.6 dB W/kg

Fig.B.8 validation 1900 MHz 250mW

2450 MHz

Date: 2/5/2018

Electronics: DAE4 Sn1525

Medium: Head 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.769$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 2450 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(7.89,7.89,7.89)

System Validation /Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 112.03 V/m; Power Drift = -0.07

Fast SAR: SAR(1 g) = 12.87 W/kg; SAR(10 g) = 6.06 W/kg

Maximum value of SAR (interpolated) = 21.73 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 112.03 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 26.86 W/kg

SAR(1 g) = 13.23 W/kg; SAR(10 g) = 6.16 W/kg

Maximum value of SAR (measured) = 21.07 W/kg

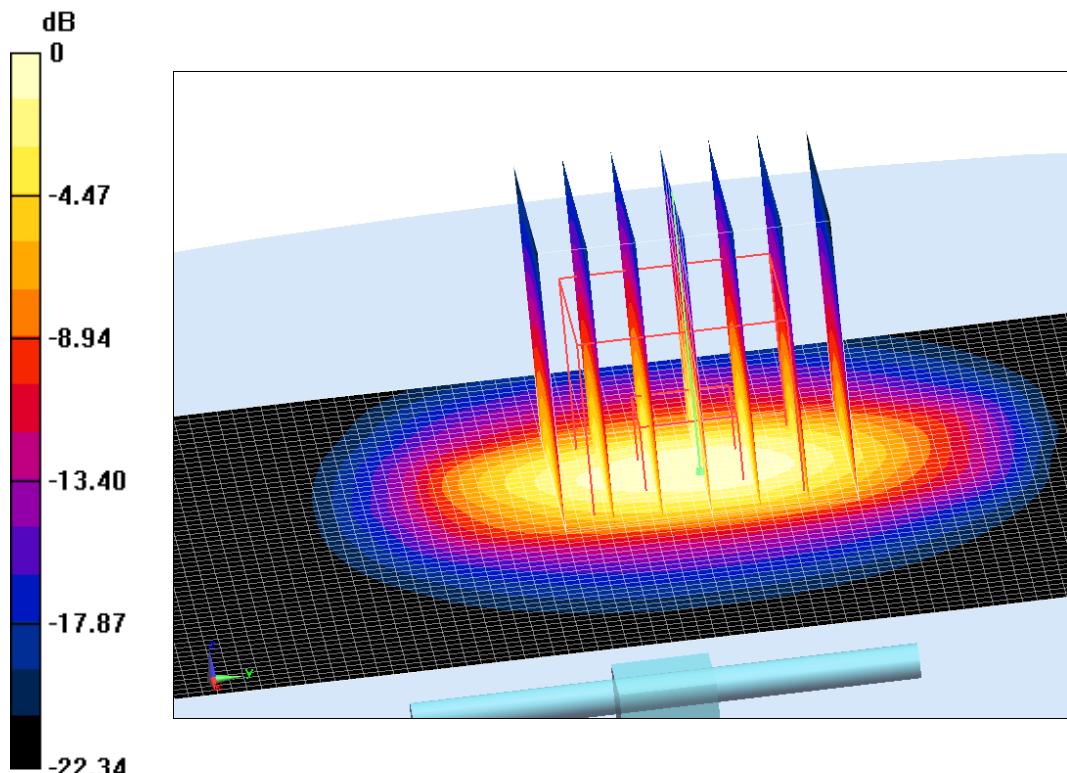

0 dB = 21.07 W/kg = 13.24 dB W/kg

Fig.B.9 validation 2450 MHz 250mW

2450 MHz

Date: 2/5/2018

Electronics: DAE4 Sn1525

Medium: Body 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 2450 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(8.09,8.09,8.09)

System Validation /Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 104.65 V/m; Power Drift = 0.08

Fast SAR: SAR(1 g) = 12.6 W/kg; SAR(10 g) = 6.01 W/kg

Maximum value of SAR (interpolated) = 25.06 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.65 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 25.82 W/kg

SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.95 W/kg

Maximum value of SAR (measured) = 20.13 W/kg

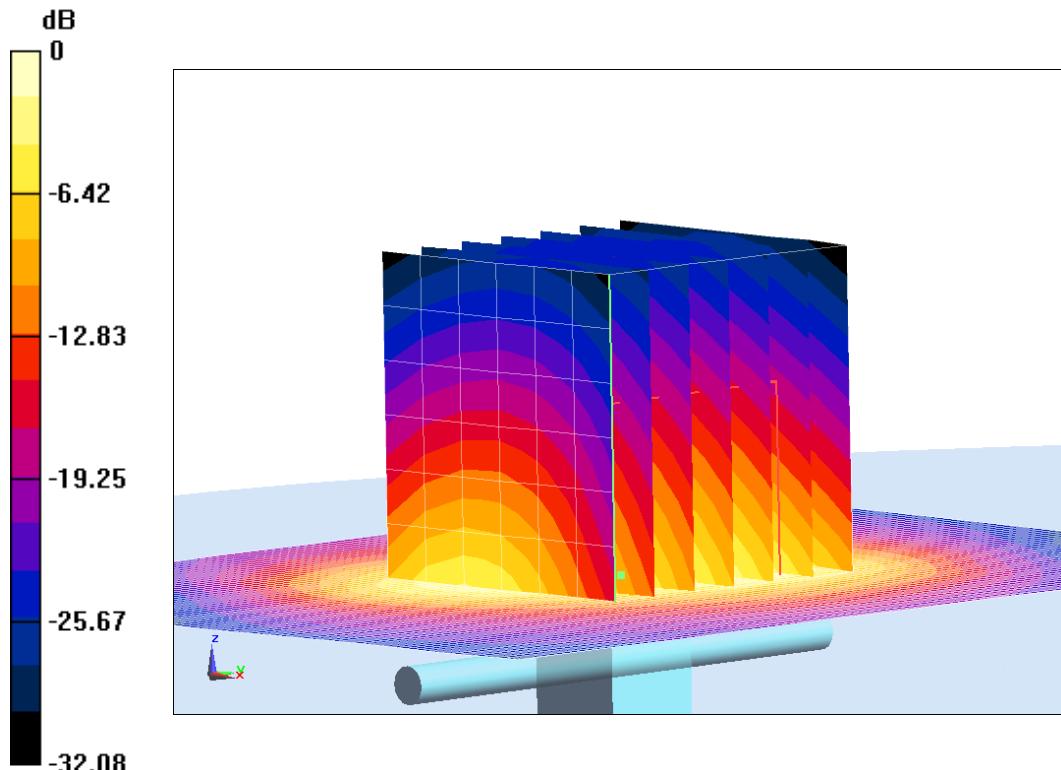

0 dB = 20.13 W/kg = 13.04 dB W/kg

Fig.B.10 validation 2450 MHz 250mW

2600 MHz

Date: 2/6/2018

Electronics: DAE4 Sn1525

Medium: Head 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.982$ mho/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 2600 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(7.76,7.76,7.76)

System Validation /Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 114.46 V/m; Power Drift = -0.06

Fast SAR: SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.36 W/kg

Maximum value of SAR (interpolated) = 24.39 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 114.46 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 32.9 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.55 W/kg

Maximum value of SAR (measured) = 25.2 W/kg

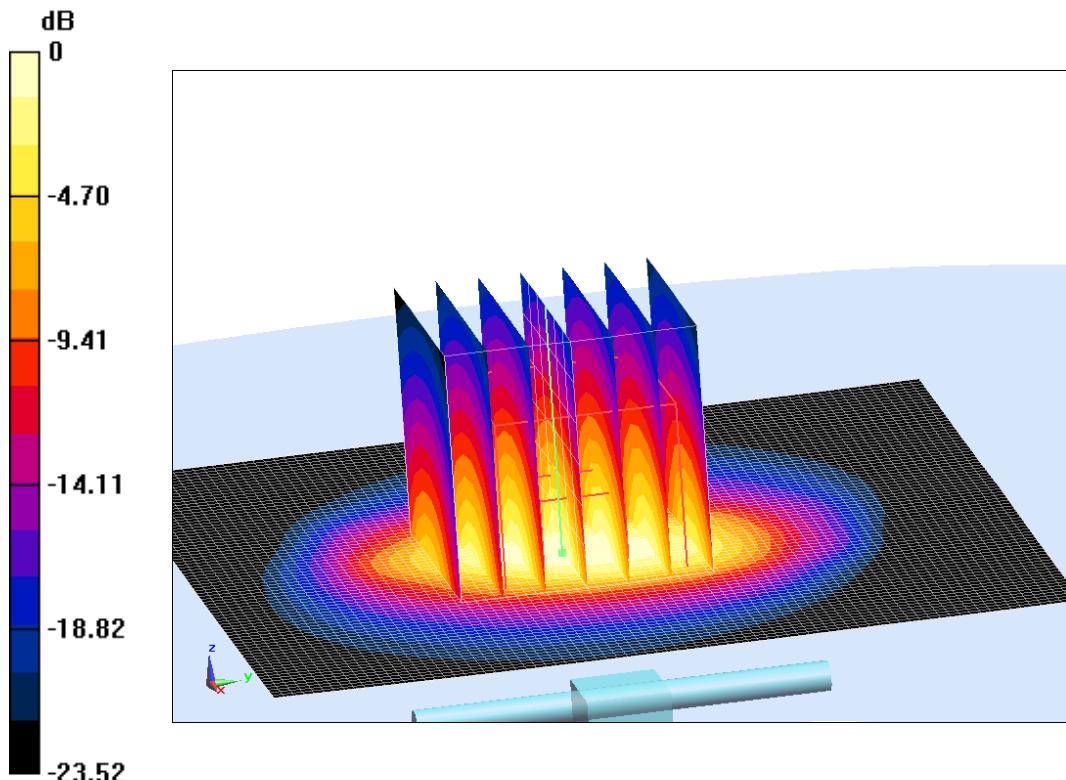

0 dB = 25.2 W/kg = 14.01 dB W/kg

Fig.B.11 validation 2600 MHz 250mW

2600 MHz

Date: 2/6/2018

Electronics: DAE4 Sn1525

Medium: Body 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.121$ mho/m; $\epsilon_r = 53.55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 2600 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7464 ConvF(7.84,7.84,7.84)

System Validation /Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 107.4 V/m; Power Drift = -0.07

Fast SAR: SAR(1 g) = 13.67 W/kg; SAR(10 g) = 6.14 W/kg

Maximum value of SAR (interpolated) = 30.3 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.4 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 30.33 W/kg

SAR(1 g) = 13.78 W/kg; SAR(10 g) = 6.14 W/kg

Maximum value of SAR (measured) = 23.71 W/kg

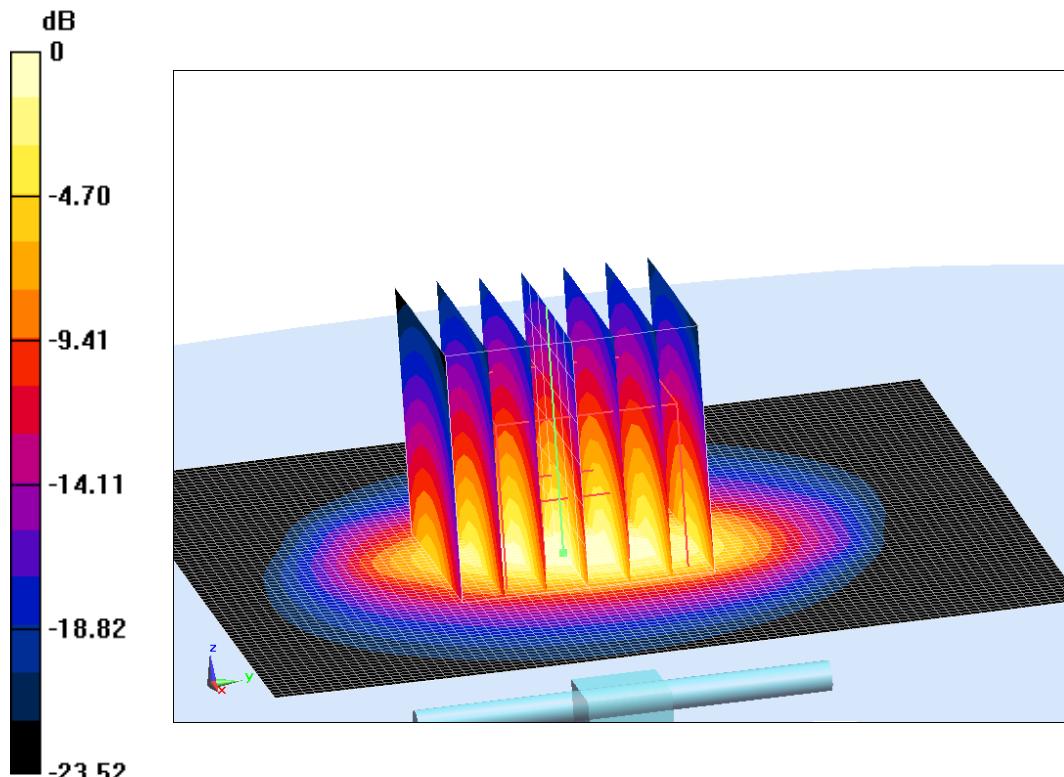

0 dB = 23.71 W/kg = 13.75 dB W/kg

Fig.B.12 validation 2600 MHz 250mW

The SAR system verification must be required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR.


Table B.1 Comparison between area scan and zoom scan for system verification

Date	Band	Position	Area scan (1g)	Zoom scan (1g)	Drift (%)
2018-2-1	750	Head	2.12	2.06	2.91
	750	Body	2.14	2.14	0.00
2018-2-2	835	Head	2.33	2.3	1.30
	835	Body	2.36	2.38	-0.84
2018-2-3	835	Head	9.07	9.21	-1.52
	835	Body	9.17	9.13	0.44
2018-2-4	1900	Head	10.09	9.97	1.20
	1900	Body	10.01	10.22	-2.05
2018-2-5	2450	Head	12.87	13.23	-2.72
	2450	Body	12.6	12.5	0.80
2018-2-6	2600	Head	14.3	14.2	0.70
	2600	Body	13.67	13.78	-0.80

ANNEX C SAR Measurement Setup

C.1 Measurement Set-up

The Dasy4 or DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

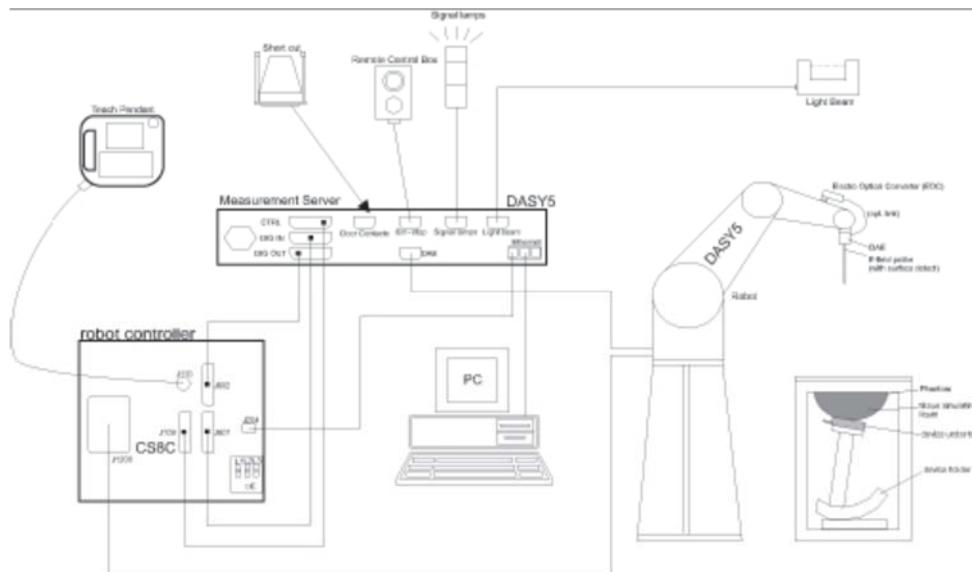

Picture C.1 SAR Lab Test Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY4 or DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

C.2 Dasy4 or DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 or DASY5 software reads the reflection during a software approach and looks for the maximum using 2nd ord curve fitting. The approach is stopped at reaching the maximum.

Probe Specifications:

Model:	ES3DV3, EX3DV4
Frequency	10MHz — 6.0GHz(EX3DV4)
Range:	10MHz — 4GHz(ES3DV3)
Calibration:	In head and body simulating tissue at Frequencies from 835 up to 5800MHz
Linearity:	± 0.2 dB(30 MHz to 6 GHz) for EX3DV4 ± 0.2 dB(30 MHz to 4 GHz) for ES3DV3
Dynamic Range:	10 mW/kg — 100W/kg
Probe Length:	330 mm
Probe Tip	
Length:	20 mm
Body Diameter:	12 mm
Tip Diameter:	2.5 mm (3.9 mm for ES3DV3)
Tip-Center:	1 mm (2.0mm for ES3DV3)
Application:	SAR Dosimetry Testing Compliance tests of mobile phones Dosimetry in strong gradient fields



Picture C.2 Near-field Probe



Picture C.3 E-field Probe

C.3 E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed

in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/ cm².

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

C.4 Other Test Equipment

C.4.1 Data Acquisition Electronics(DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



PictureC.4: DAE

C.4.2 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90XL; DASY5: RX160L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Picture C.5 DASY 4



Picture C.6 DASY 5

C.4.3 Measurement Server

The Measurement server is based on a PC/104 CPU broad with CPU (dasy4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128MB), RAM (DASY4: 64 MB, DASY5: 128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O broad, which is directly connected to the PC/104 bus of the CPU broad.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Picture C.7 Server for DASY 4



Picture C.8 Server for DASY 5

C.4.4 Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss

POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss


tangent $\delta =0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.



Picture C.9-1: Device Holder

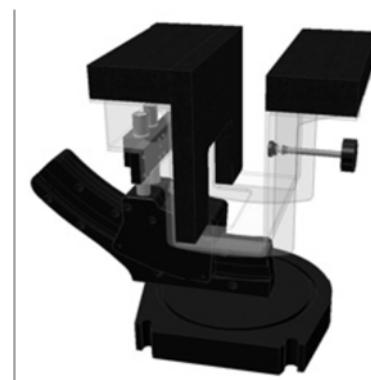

Picture C.9-2: Laptop Extension Kit

C.4.5 Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to

represent the 90th percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness: $2 \pm 0.2 \text{ mm}$

Filling Volume: Approx. 25 liters

Dimensions: 810 x 1000 x 500 mm (H x L x W)

Available: Special




Picture C.10: SAM Twin Phantom

ANNEX D Position of the wireless device in relation to the phantom

D.1 General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.

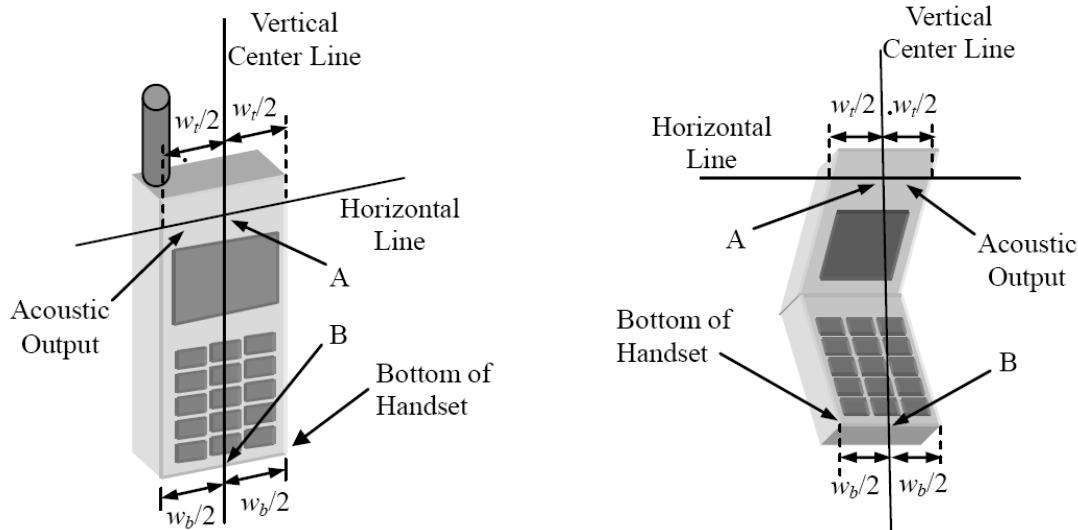

w_t

Width of the handset at the level of the acoustic

w_b

Width of the bottom of the handset


A

Midpoint of the width w_t of the handset at the level of the acoustic output


B

Midpoint of the width w_b of the bottom of the handset

Picture D.1-a Typical “fixed” case handset Picture D.1-b Typical “clam-shell” case handset

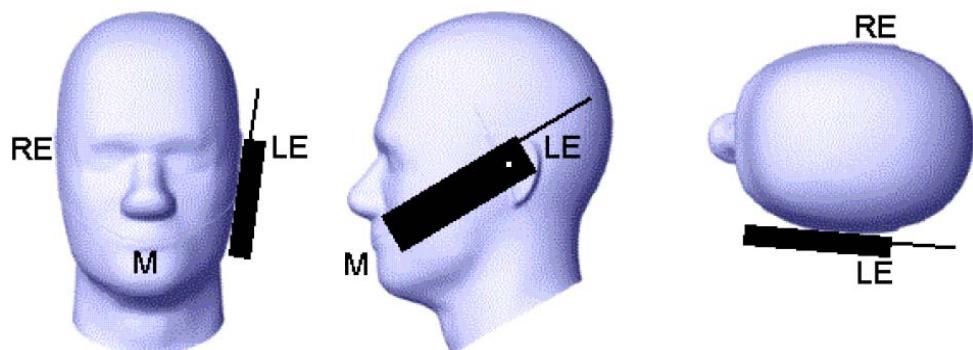


Picture D.2 Cheek position of the wireless device on the left side of SAM

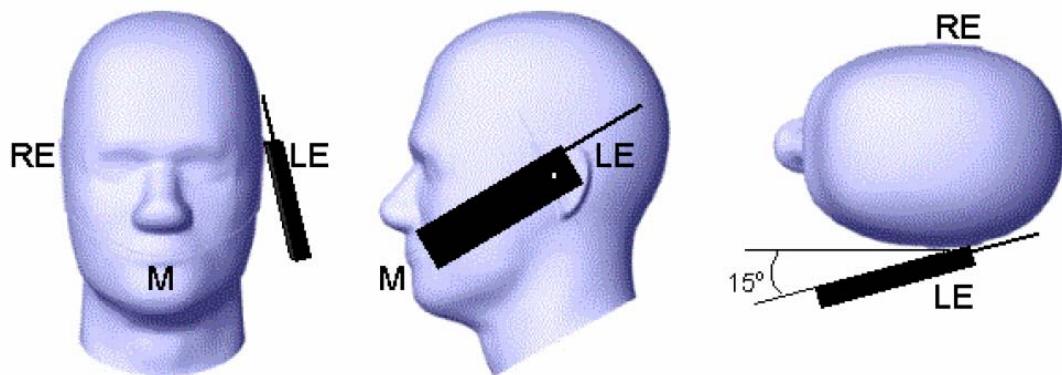

Picture D.3 Tilt position of the wireless device on the left side of SAM

D.2 Body-worn device

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

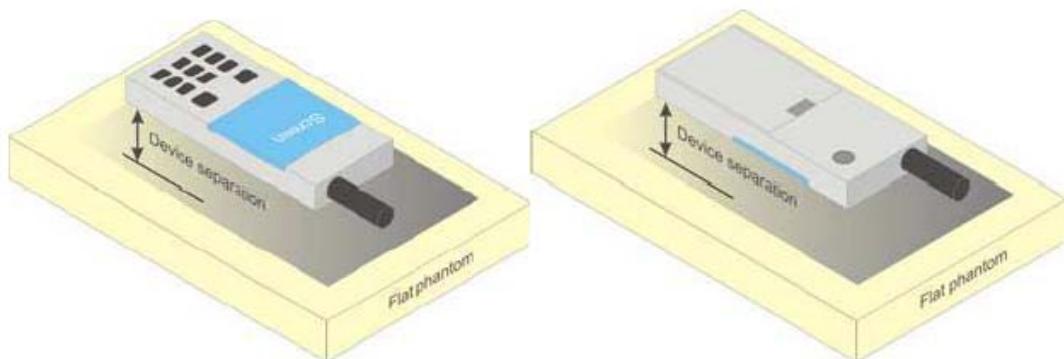


Picture D.4 Test positions for body-worn devices

D.3 Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions, tests shall be performed for all antenna positions specified. Picture 8.5 show positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat phantom.

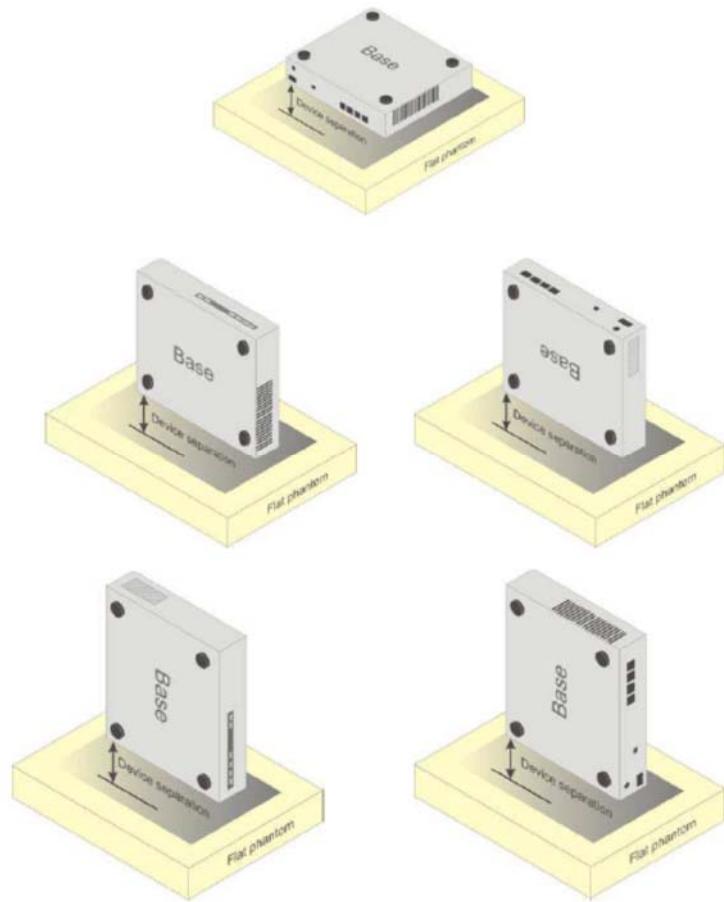

Picture D.5 Test positions for desktop devices

D.4 DUT Setup Photos



Picture D.6

ANNEX E Equivalent Media Recipes

The liquid used for the frequency range of 800-3000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table E.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

Table E.1: Composition of the Tissue Equivalent Matter

Frequency (MHz)	835 Head	835 Body	1900 Head	1900 Body	2450 Head	2450 Body	5800 Head	5800 Body
Ingredients (% by weight)								
Water	41.45	52.5	55.242	69.91	58.79	72.60	65.53	65.53
Sugar	56.0	45.0	\	\	\	\	\	\
Salt	1.45	1.4	0.306	0.13	0.06	0.18	\	\
Preventol	0.1	0.1	\	\	\	\	\	\
Cellulose	1.0	1.0	\	\	\	\	\	\
Glycol Monobutyl	\	\	44.452	29.96	41.15	27.22	\	\
Diethylenglycol monohexylether	\	\	\	\	\	\	17.24	17.24
Triton X-100	\	\	\	\	\	\	17.24	17.24
Dielectric Parameters Target Value	$\epsilon=41.5$ $\sigma=0.90$	$\epsilon=55.2$ $\sigma=0.97$	$\epsilon=40.0$ $\sigma=1.40$	$\epsilon=53.3$ $\sigma=1.52$	$\epsilon=39.2$ $\sigma=1.80$	$\epsilon=52.7$ $\sigma=1.95$	$\epsilon=35.3$ $\sigma=5.27$	$\epsilon=48.2$ $\sigma=6.00$

Note: There are a little adjustment respectively for 750, 1750, 2600, 5200, 5300 and 5600 based on the recipe of closest frequency in table E.1.

ANNEX F System Validation

The SAR system must be validated against its performance specifications before it is deployed. When SAR probes, system components or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such components.

Table F.1: System Validation for 7464

Probe SN.	Liquid name	Validation date	Frequency point	Status (OK or Not)
7464	Head 750MHz	Sep.26,2017	750 MHz	OK
7464	Head 850MHz	Sep.26,2017	850 MHz	OK
7464	Head 900MHz	Sep.26,2017	900 MHz	OK
7464	Head 1750MHz	Sep.26,2017	1750 MHz	OK
7464	Head 1810MHz	Sep.26,2017	1810 MHz	OK
7464	Head 1900MHz	Sep.27,2017	1900 MHz	OK
7464	Head 1950MHz	Sep.27,2017	1950 MHz	OK
7464	Head 2000MHz	Sep.27,2017	2000 MHz	OK
7464	Head 2100MHz	Sep.27,2017	2100 MHz	OK
7464	Head 2300MHz	Sep.27,2017	2300 MHz	OK
7464	Head 2450MHz	Sep.27,2017	2450 MHz	OK
7464	Head 2550MHz	Sep.28,2017	2550 MHz	OK
7464	Head 2600MHz	Sep.28,2017	2600 MHz	OK
7464	Head 3500MHz	Sep.28,2017	3500 MHz	OK
7464	Head 3700MHz	Sep.28,2017	3700 MHz	OK
7464	Head 5200MHz	Sep.28,2017	5200 MHz	OK
7464	Head 5500MHz	Sep.28,2017	5500 MHz	OK
7464	Head 5800MHz	Sep.28,2017	5800 MHz	OK
7464	Body 750MHz	Sep.28,2017	750 MHz	OK
7464	Body 850MHz	Sep.25,2017	850 MHz	OK
7464	Body 900MHz	Sep.25,2017	900 MHz	OK
7464	Body 1750MHz	Sep.25,2017	1750 MHz	OK
7464	Body 1810MHz	Sep.25,2017	1810 MHz	OK
7464	Body 1900MHz	Sep.25,2017	1900 MHz	OK
7464	Body 1950MHz	Sep.25,2017	1950 MHz	OK
7464	Body 2000MHz	Sep.29,2017	2000 MHz	OK
7464	Body 2100MHz	Sep.29,2017	2100 MHz	OK
7464	Body 2300MHz	Sep.29,2017	2300 MHz	OK
7464	Body 2450MHz	Sep.29,2017	2450 MHz	OK
7464	Body 2550MHz	Sep.29,2017	2550 MHz	OK
7464	Body 2600MHz	Sep.29,2017	2600 MHz	OK
7464	Body 3500MHz	Sep.24,2017	3500 MHz	OK
7464	Body 3700MHz	Sep.24,2017	3700 MHz	OK
7464	Body 5200MHz	Sep.24,2017	5200 MHz	OK
7464	Body 5500MHz	Sep.24,2017	5500 MHz	OK
7464	Body 5800MHz	Sep.24,2017	5800 MHz	OK

ANNEX G Probe Calibration Certificate

Probe 7464 Calibration Certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client CTTL-BJ (Auden)

Certificate No: EX3-7464_Sep17

CALIBRATION CERTIFICATE

Object EX3DV4 - SN:7464

Calibration procedure(s)
QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,
QA CAL-25.v6
Calibration procedure for dosimetric E-field probes


Calibration date: September 12, 2017

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02525)	Apr-18
Reference 20 dB Attenuator	SN: S5277 (20x)	07-Apr-17 (No. 217-02528)	Apr-18
Reference Probe ES3DV2	SN: 3013	31-Dec-16 (No. ES3-3013_Dec16)	Dec-17
DAE4	SN: 660	7-Dec-16 (No. DAE4-660_Dec16)	Dec-17
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by:	Name	Function	Signature
	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: September 12, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- $NORM_{x,y,z}$: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). $NORM_{x,y,z}$ are only intermediate values, i.e., the uncertainties of $NORM_{x,y,z}$ does not affect the E^2 -field uncertainty inside TSL (see below $ConvF$).
- $NORM(f)x,y,z = NORM_{x,y,z} * frequency_response$ (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of $ConvF$.
- $DCP_{x,y,z}$: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR : PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- $A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}$: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- $ConvF$ and *Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to $NORM_{x,y,z} * ConvF$ whereby the uncertainty corresponds to that given for $ConvF$. A frequency dependent $ConvF$ is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle*: The angle is assessed using the information gained by determining the $NORM_x$ (no uncertainty required).



EX3DV4 – SN:7464

September 12, 2017

Probe EX3DV4

SN:7464

Manufactured: September 6, 2016
Calibrated: September 12, 2017

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:7464

September 12, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7464

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.45	0.43	0.45	$\pm 10.1 \%$
DCP (mV) ^B	101.6	99.3	99.7	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	150.5	$\pm 3.3 \%$
		Y	0.0	0.0	1.0		144.7	
		Z	0.0	0.0	1.0		147.0	

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 ms.V^{-2}	T2 ms.V^{-1}	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
X	57.86	441.1	37.02	12.02	0.826	5.039	0.00	0.727	1.006
Y	59.82	453.4	36.65	14.84	0.468	5.100	0.25	0.626	1.007
Z	65.01	497.8	37.35	15.97	1.043	5.073	0.00	0.801	1.008

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:7464

September 12, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7464

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^h (mm)	Unc (k=2)
150	52.3	0.76	12.20	12.20	12.20	0.00	1.00	± 13.3 %
300	45.3	0.87	11.77	11.77	11.77	0.09	1.20	± 13.3 %
450	43.5	0.87	11.17	11.17	11.17	0.15	1.20	± 13.3 %
750	41.9	0.89	10.57	10.57	10.57	0.53	0.80	± 12.0 %
835	41.5	0.90	10.28	10.28	10.28	0.48	0.80	± 12.0 %
900	41.5	0.97	10.03	10.03	10.03	0.28	1.09	± 12.0 %
1450	40.5	1.20	9.05	9.05	9.05	0.37	0.80	± 12.0 %
1640	40.2	1.31	8.82	8.82	8.82	0.35	0.80	± 12.0 %
1750	40.1	1.37	8.70	8.70	8.70	0.38	0.80	± 12.0 %
1810	40.0	1.40	8.42	8.42	8.42	0.32	0.85	± 12.0 %
1900	40.0	1.40	8.39	8.39	8.39	0.35	0.80	± 12.0 %
2000	40.0	1.40	8.39	8.39	8.39	0.32	0.89	± 12.0 %
2100	39.8	1.49	8.54	8.54	8.54	0.27	0.86	± 12.0 %
2300	39.5	1.67	8.40	8.40	8.40	0.34	0.95	± 12.0 %
2450	39.2	1.80	7.89	7.89	7.89	0.34	0.93	± 12.0 %
2600	39.0	1.96	7.76	7.76	7.76	0.37	0.92	± 12.0 %
3500	37.9	2.91	7.40	7.40	7.40	0.41	0.94	± 13.1 %
3700	37.7	3.12	7.11	7.11	7.11	0.50	0.84	± 13.1 %
5200	36.0	4.66	5.82	5.82	5.82	0.35	1.80	± 13.1 %
5250	35.9	4.71	5.68	5.68	5.68	0.35	1.80	± 13.1 %
5300	35.9	4.76	5.53	5.53	5.53	0.35	1.80	± 13.1 %
5500	35.6	4.96	5.21	5.21	5.21	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.98	4.98	4.98	0.40	1.80	± 13.1 %
5750	35.4	5.22	5.04	5.04	5.04	0.40	1.80	± 13.1 %
5800	35.3	5.27	5.11	5.11	5.11	0.40	1.80	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (c and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.