

Appendix: 5G WIFI

Contents

Contents 2

Duty Cycle 3

Maximum Conducted Output Power 46

-26dB Bandwidth 125

Occupied Channel Bandwidth 147

Maximum Power Spectral Density Level 189


Frequency Stability 268

-6dB Bandwidth 604


Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	93.44	0.29	0.72
NVNT	a	5200	Ant1	93.38	0.3	0.72
NVNT	a	5240	Ant1	93.44	0.29	0.72
NVNT	a	5745	Ant1	93.44	0.29	0.72
NVNT	a	5785	Ant1	93.44	0.29	0.72
NVNT	a	5825	Ant1	93.38	0.3	0.72
NVNT	a	5180	Ant2	93.44	0.29	0.72
NVNT	a	5200	Ant2	93.38	0.3	0.72
NVNT	a	5240	Ant2	93.38	0.3	0.72
NVNT	a	5745	Ant2	93.38	0.3	0.72
NVNT	a	5785	Ant2	93.38	0.3	0.72
NVNT	a	5825	Ant2	93.44	0.29	0.72
NVNT	n20	5180	Ant1	92.96	0.32	0.76
NVNT	n20	5200	Ant1	92.96	0.32	0.76
NVNT	n20	5240	Ant1	92.96	0.32	0.76
NVNT	n20	5745	Ant1	92.96	0.32	0.76
NVNT	n20	5785	Ant1	92.96	0.32	0.76
NVNT	n20	5825	Ant1	93.06	0.31	0.76
NVNT	n20	5180	Ant2	92.96	0.32	0.76
NVNT	n20	5200	Ant2	92.96	0.32	0.76
NVNT	n20	5240	Ant2	92.96	0.32	0.76
NVNT	n20	5745	Ant2	92.96	0.32	0.76
NVNT	n20	5785	Ant2	92.96	0.32	0.76
NVNT	n20	5825	Ant2	92.96	0.32	0.76
NVNT	n40	5190	Ant1	86.75	0.62	1.54
NVNT	n40	5230	Ant1	86.75	0.62	1.54
NVNT	n40	5755	Ant1	86.86	0.61	1.54
NVNT	n40	5795	Ant1	86.63	0.62	1.54
NVNT	n40	5190	Ant2	86.63	0.62	1.54
NVNT	n40	5230	Ant2	86.86	0.61	1.54
NVNT	n40	5755	Ant2	86.86	0.61	1.54
NVNT	n40	5795	Ant2	86.86	0.61	1.54
NVNT	ac20	5180	Ant1	93	0.32	0.76
NVNT	ac20	5200	Ant1	93	0.32	0.76
NVNT	ac20	5240	Ant1	93	0.32	0.76
NVNT	ac20	5745	Ant1	93	0.32	0.76
NVNT	ac20	5785	Ant1	93	0.32	0.76
NVNT	ac20	5825	Ant1	93.07	0.31	0.76


NVNT	ac20	5180	Ant2	93.01	0.31	0.76
NVNT	ac20	5200	Ant2	93.01	0.31	0.76
NVNT	ac20	5240	Ant2	93	0.32	0.76
NVNT	ac20	5745	Ant2	93.01	0.31	0.76
NVNT	ac20	5785	Ant2	93	0.32	0.76
NVNT	ac20	5825	Ant2	93	0.32	0.76
NVNT	ac40	5190	Ant1	86.88	0.61	1.53
NVNT	ac40	5230	Ant1	86.88	0.61	1.53
NVNT	ac40	5755	Ant1	86.77	0.62	1.52
NVNT	ac40	5795	Ant1	87	0.6	1.52
NVNT	ac40	5190	Ant2	87	0.6	1.52
NVNT	ac40	5230	Ant2	86.77	0.62	1.52
NVNT	ac40	5755	Ant2	86.77	0.62	1.52
NVNT	ac40	5795	Ant2	86.77	0.62	1.52
NVNT	ac80	5210	Ant1	76.6	1.16	3.09
NVNT	ac80	5775	Ant1	76.33	1.17	3.09
NVNT	ac80	5210	Ant2	76.6	1.16	3.09
NVNT	ac80	5775	Ant2	76.6	1.16	3.09
NVNT	ax20	5180	Ant1	91.15	0.4	0.98
NVNT	ax20	5200	Ant1	91.16	0.4	0.98
NVNT	ax20	5240	Ant1	91.29	0.4	0.98
NVNT	ax20	5745	Ant1	91.16	0.4	0.98
NVNT	ax20	5785	Ant1	91.16	0.4	0.98
NVNT	ax20	5825	Ant1	91.15	0.4	0.98
NVNT	ax20	5180	Ant2	91.15	0.4	0.98
NVNT	ax20	5200	Ant2	91.15	0.4	0.98
NVNT	ax20	5240	Ant2	91.15	0.4	0.98
NVNT	ax20	5745	Ant2	91.16	0.4	0.98
NVNT	ax20	5785	Ant2	91.29	0.4	0.98
NVNT	ax20	5825	Ant2	91.16	0.4	0.98
NVNT	ax40	5190	Ant1	84.31	0.74	1.85
NVNT	ax40	5230	Ant1	84.54	0.73	1.85
NVNT	ax40	5755	Ant1	84.69	0.72	1.85
NVNT	ax40	5795	Ant1	84.69	0.72	1.85
NVNT	ax40	5190	Ant2	84.69	0.72	1.85
NVNT	ax40	5230	Ant2	84.38	0.74	1.85
NVNT	ax40	5755	Ant2	84.69	0.72	1.85
NVNT	ax40	5795	Ant2	84.69	0.72	1.85
NVNT	ax80	5210	Ant1	74.62	1.27	3.44
NVNT	ax80	5775	Ant1	74.62	1.27	3.44
NVNT	ax80	5210	Ant2	74.36	1.29	3.45
NVNT	ax80	5775	Ant2	0	0	∞

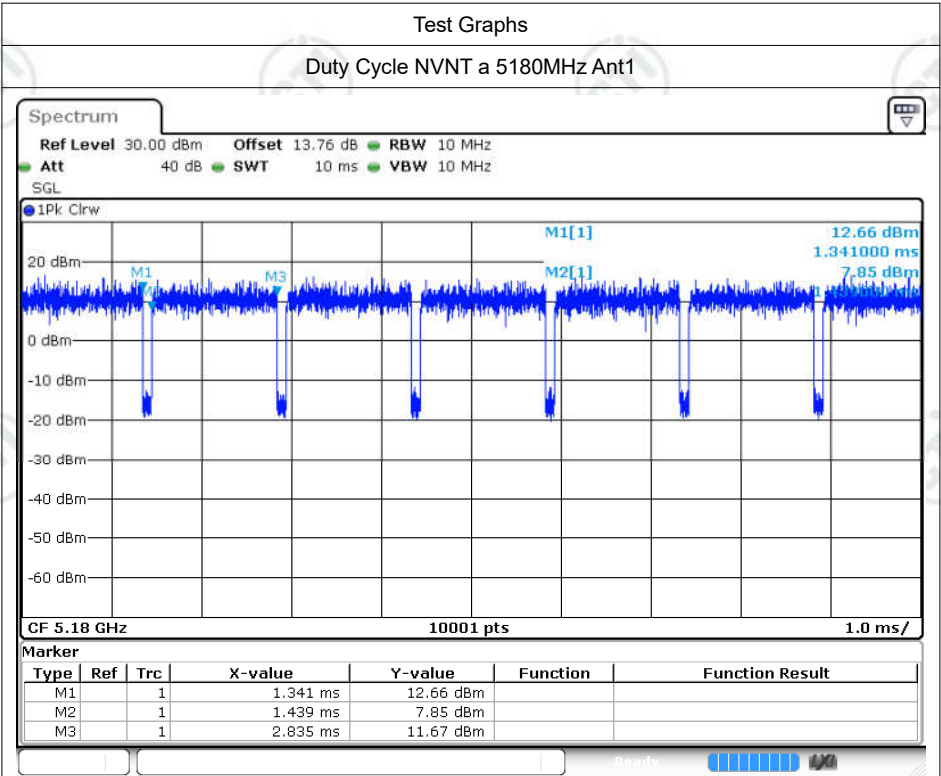


Date: 27.MAR.2023 10:47:19

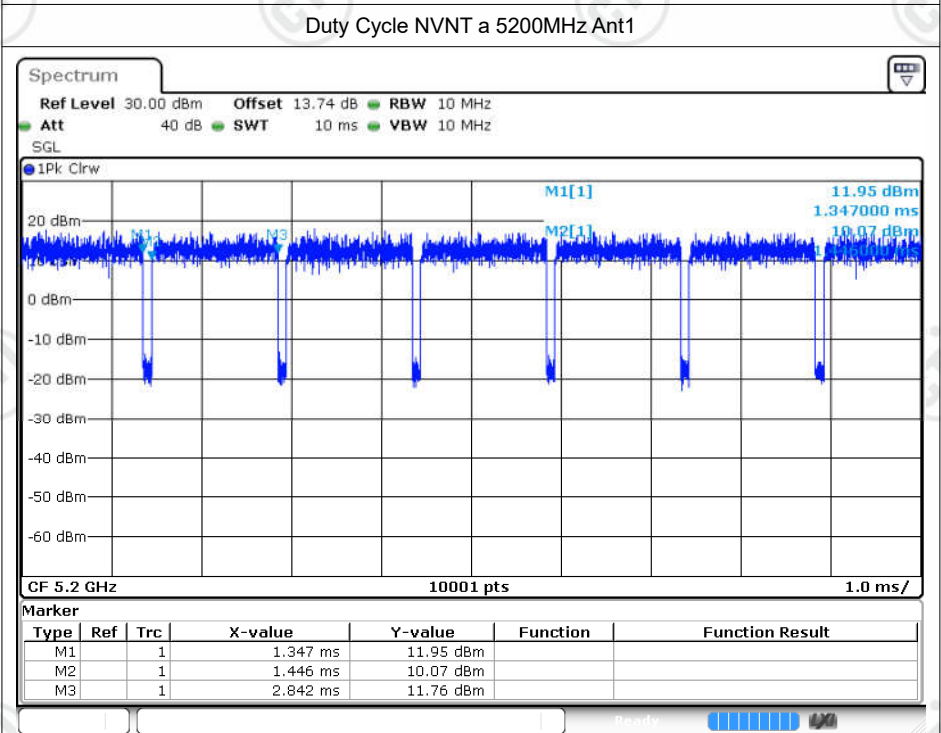


Date: 27.MAR.2023 14:02:28

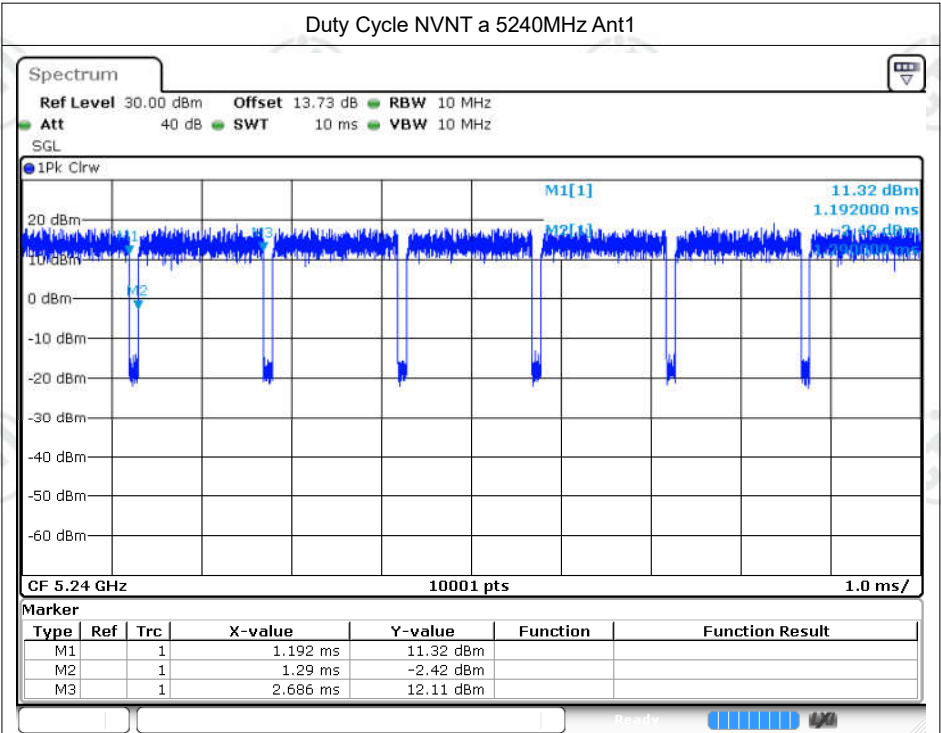


Date: 27. MAR 2023 14:04:58

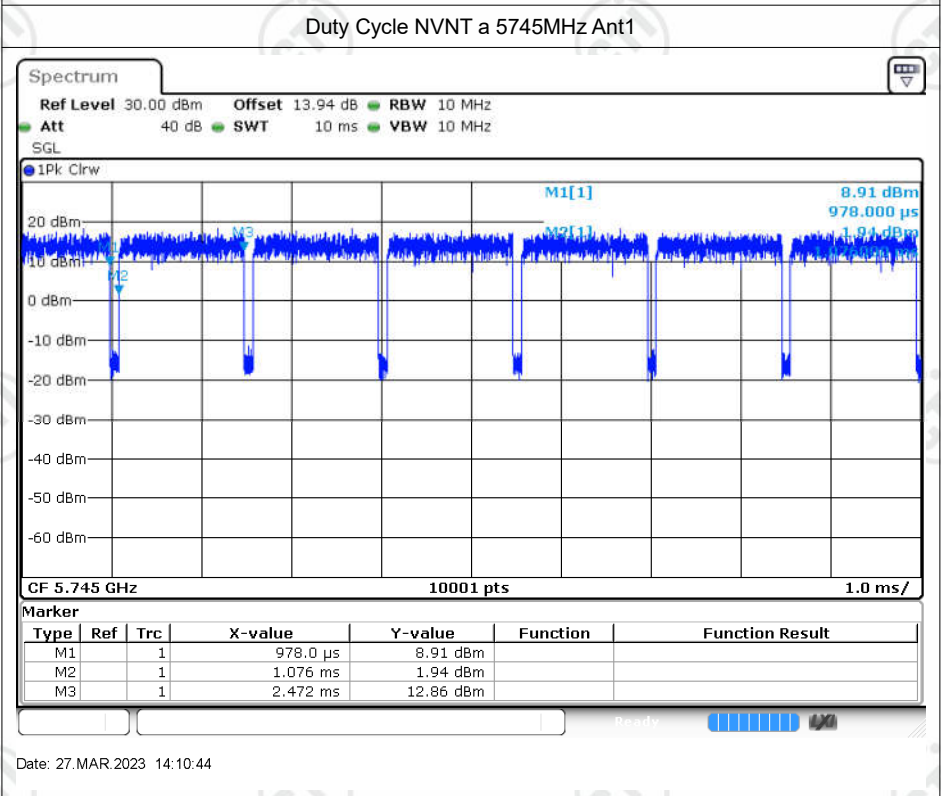


Date: 27. MAR 2023 14:10:44

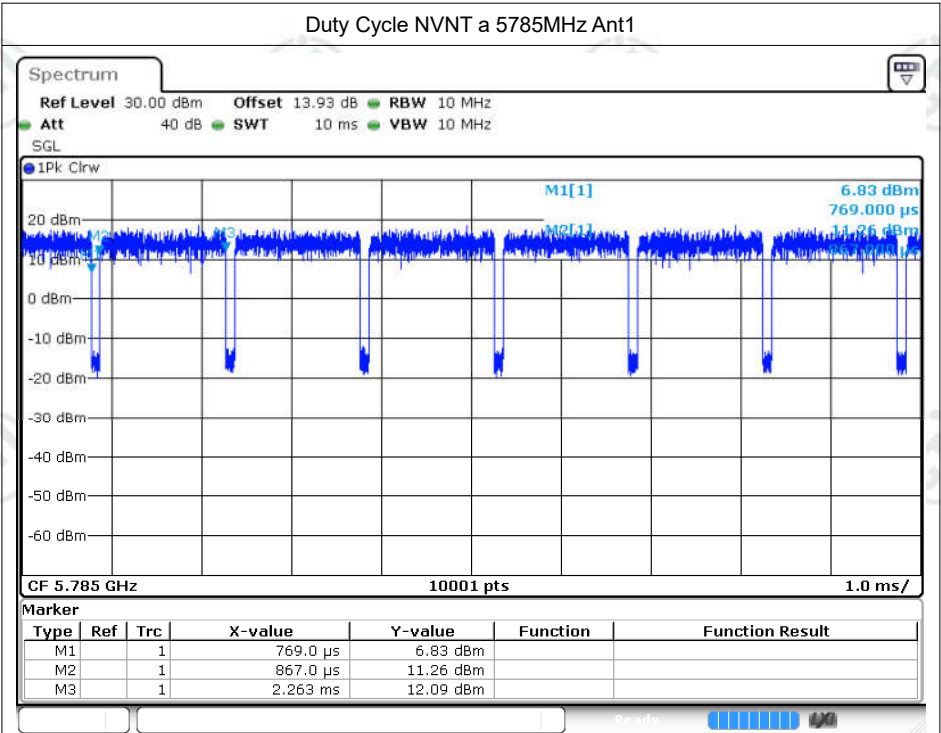


Date: 27. MAR. 2023 14:14:52

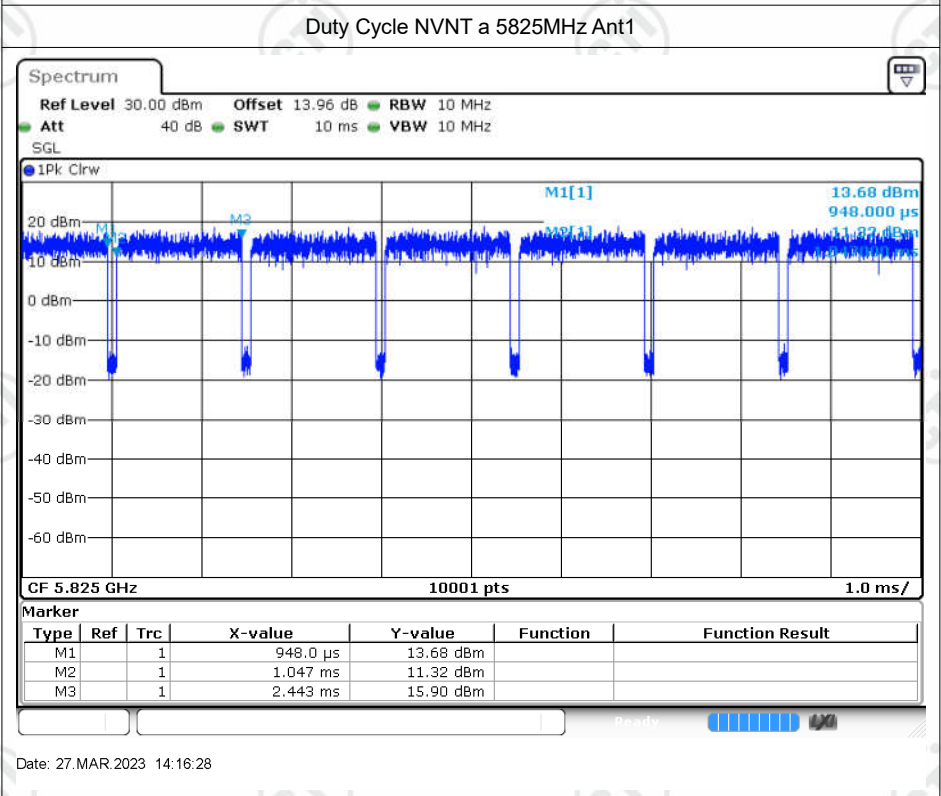


Date: 27. MAR. 2023 14:16:28

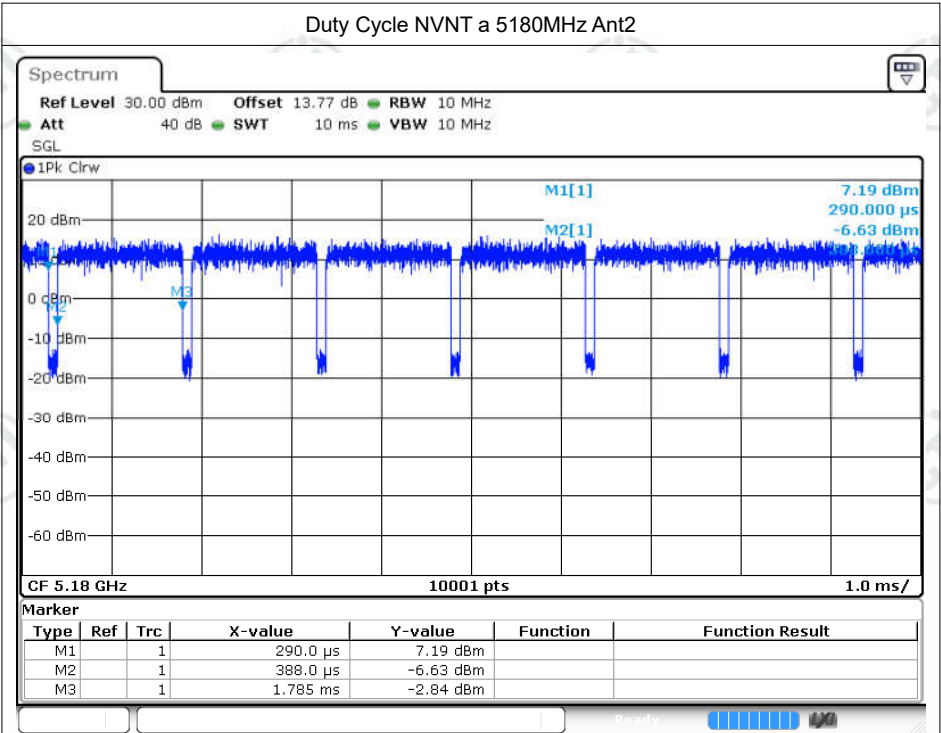


Date: 27. MAR.2023 17:30:13

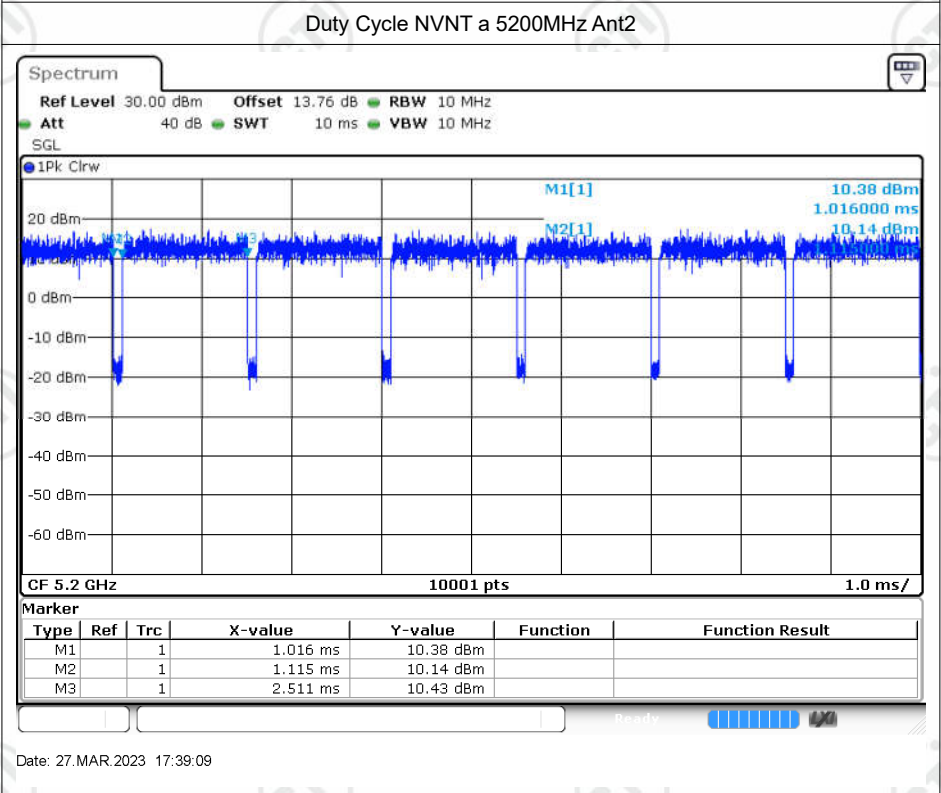


Date: 27. MAR.2023 17:39:09

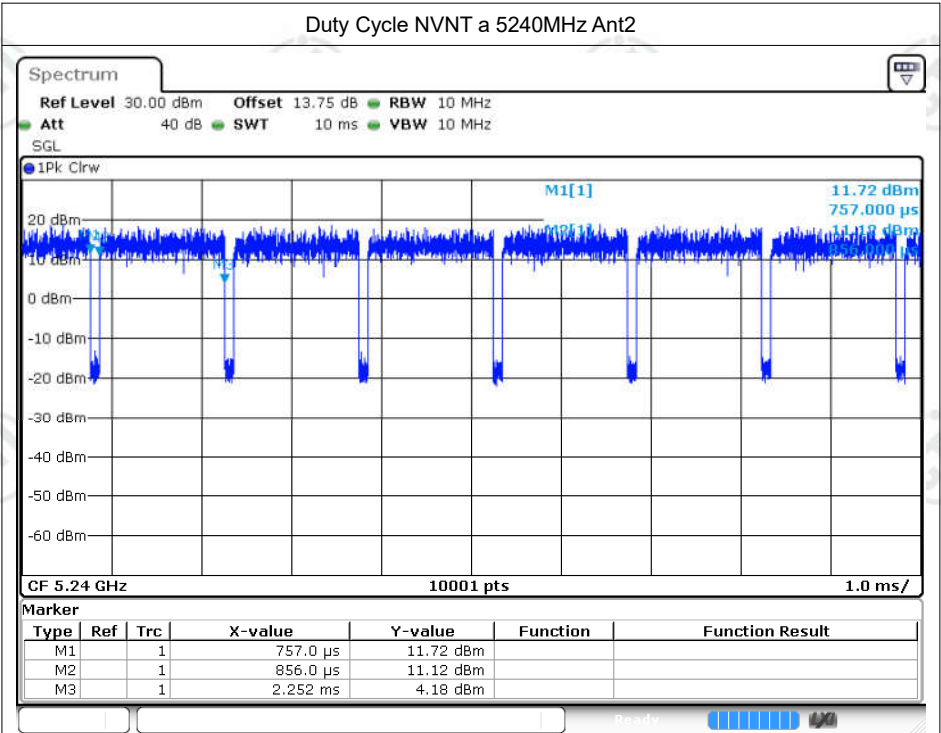


Date: 27. MAR.2023 18:05:25

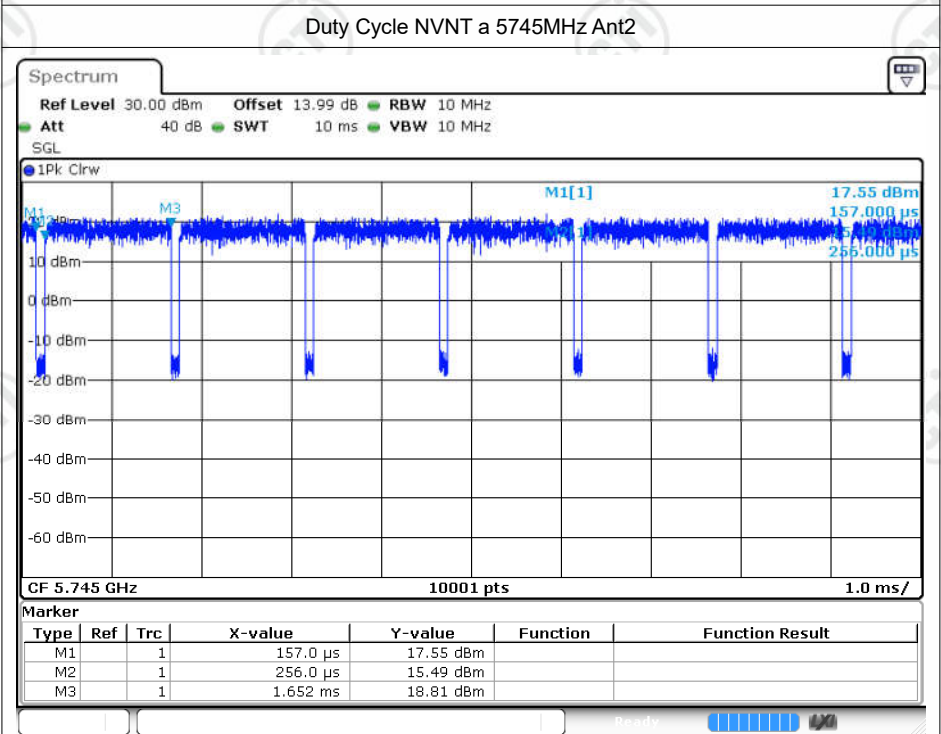


Date: 27. MAR.2023 18:09:45

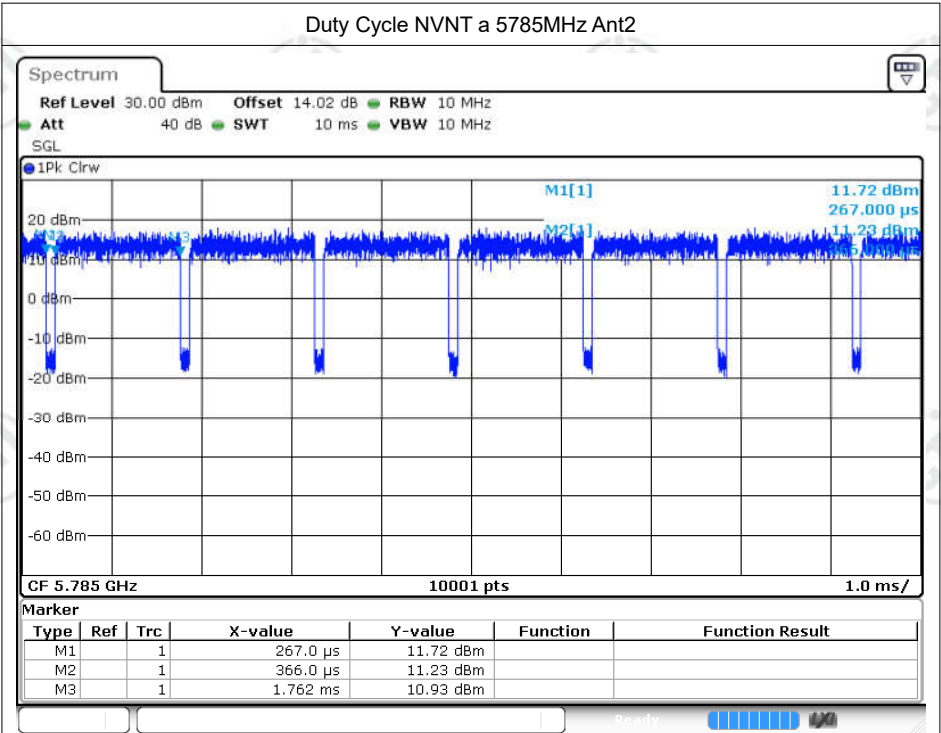


Date: 27. MAR.2023 18:14:31

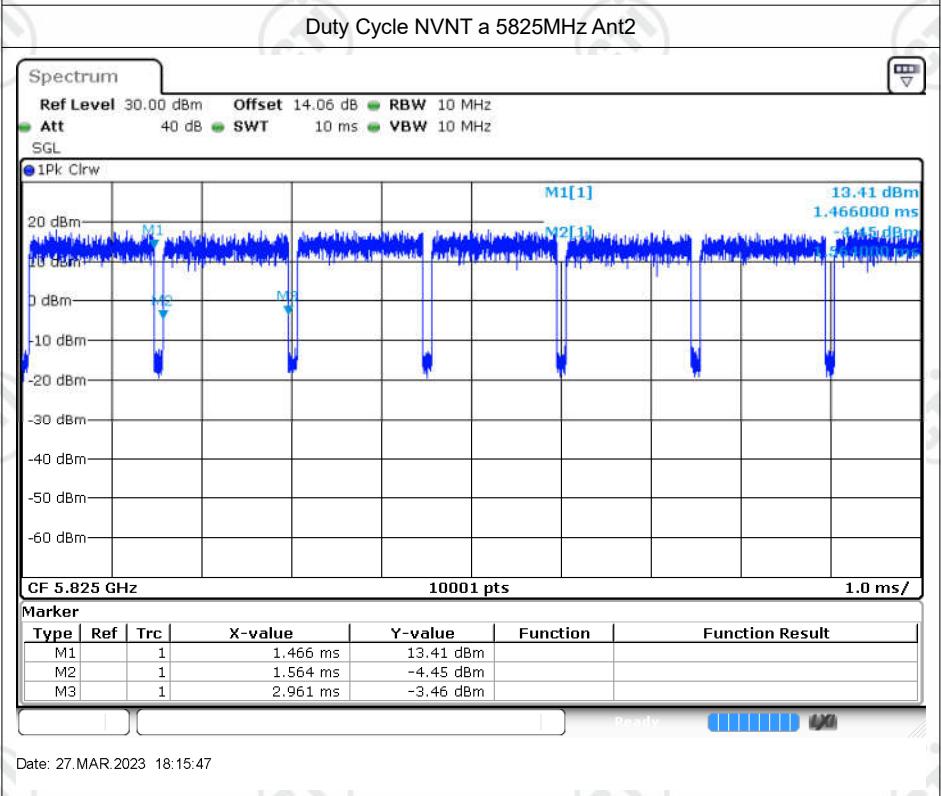


Date: 27. MAR.2023 18:15:47

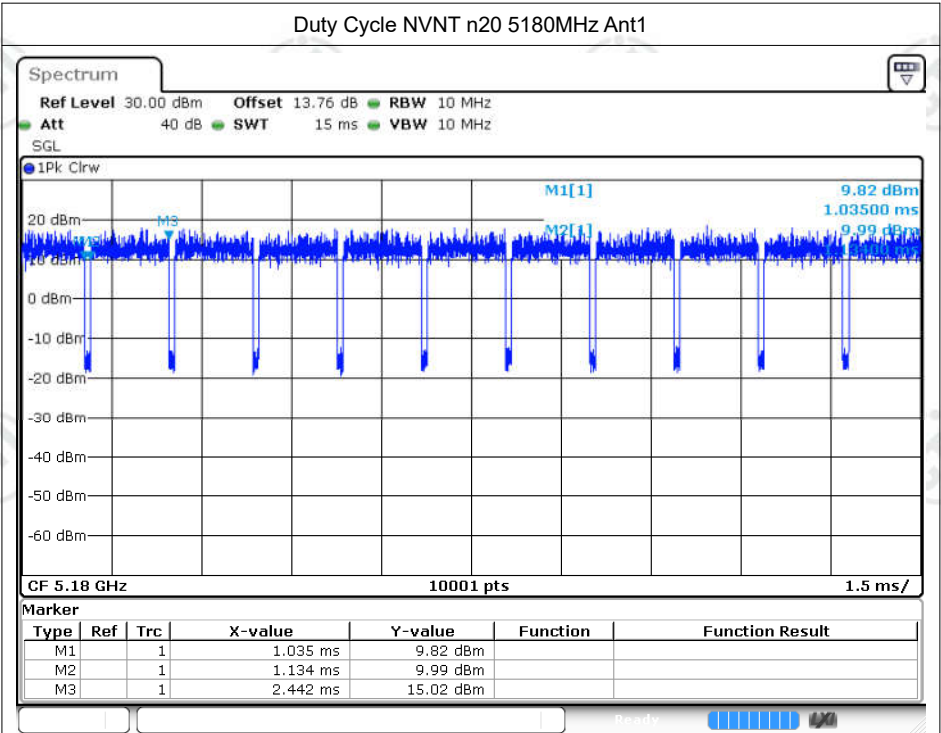


Date: 27. MAR 2023 14:23:47

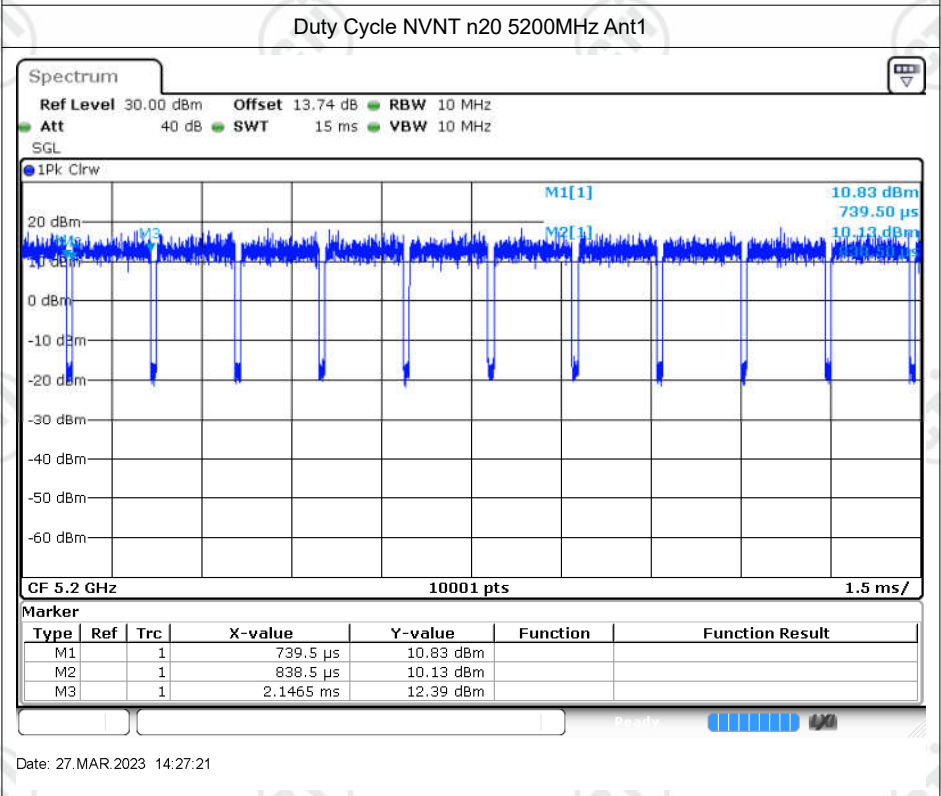


Date: 27. MAR 2023 14:27:21

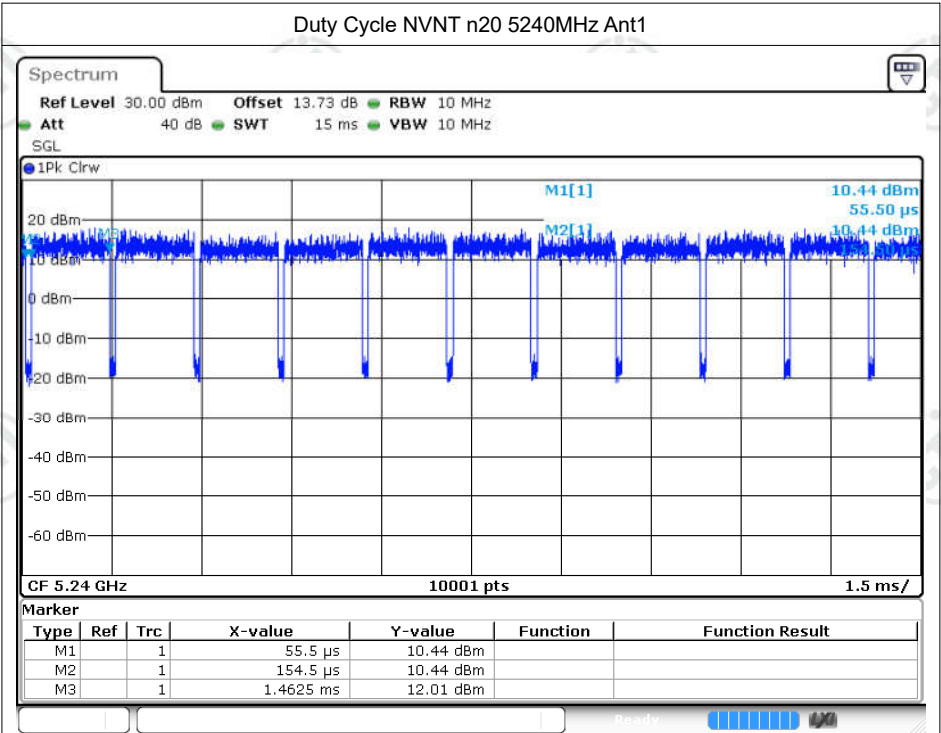


Date: 27. MAR. 2023 14:30:02

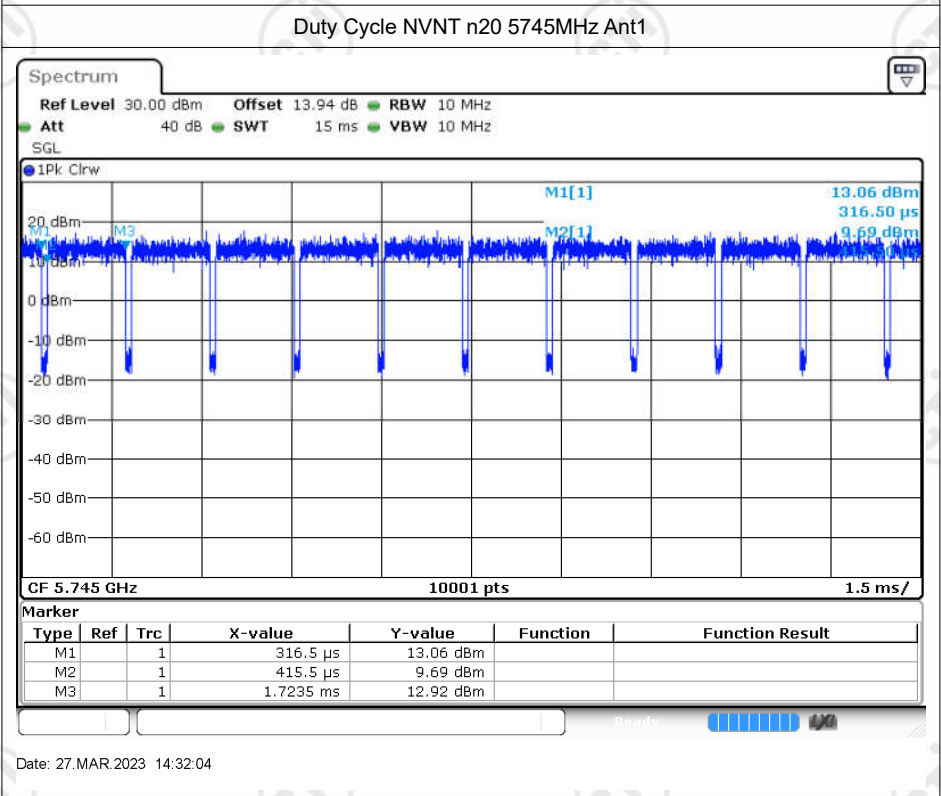


Date: 27. MAR. 2023 14:32:04

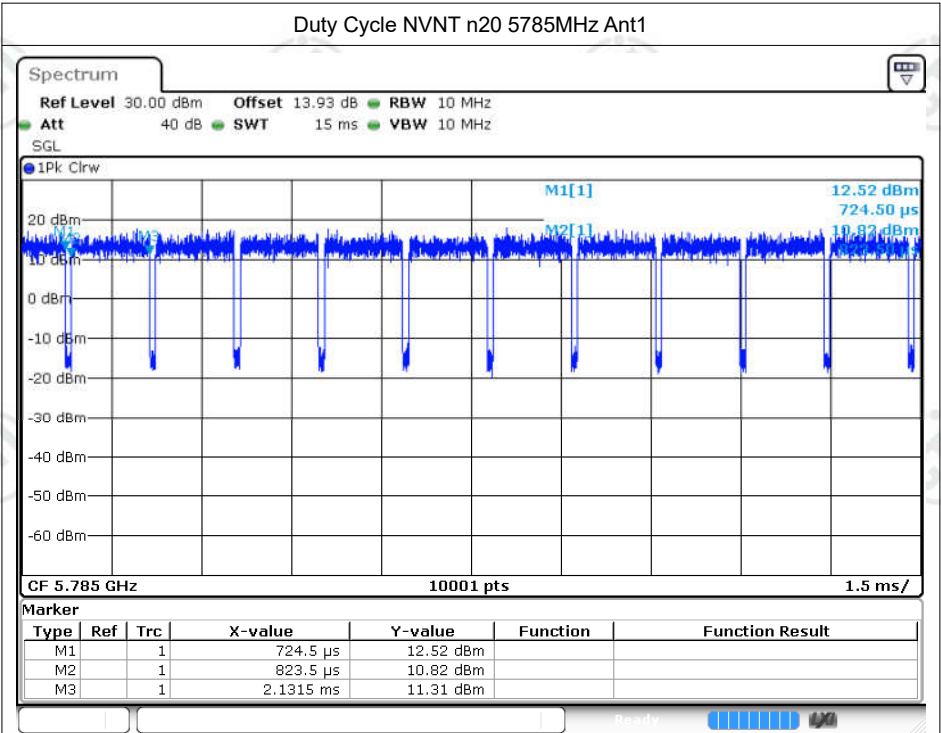


Date: 27. MAR.2023 14:41:06

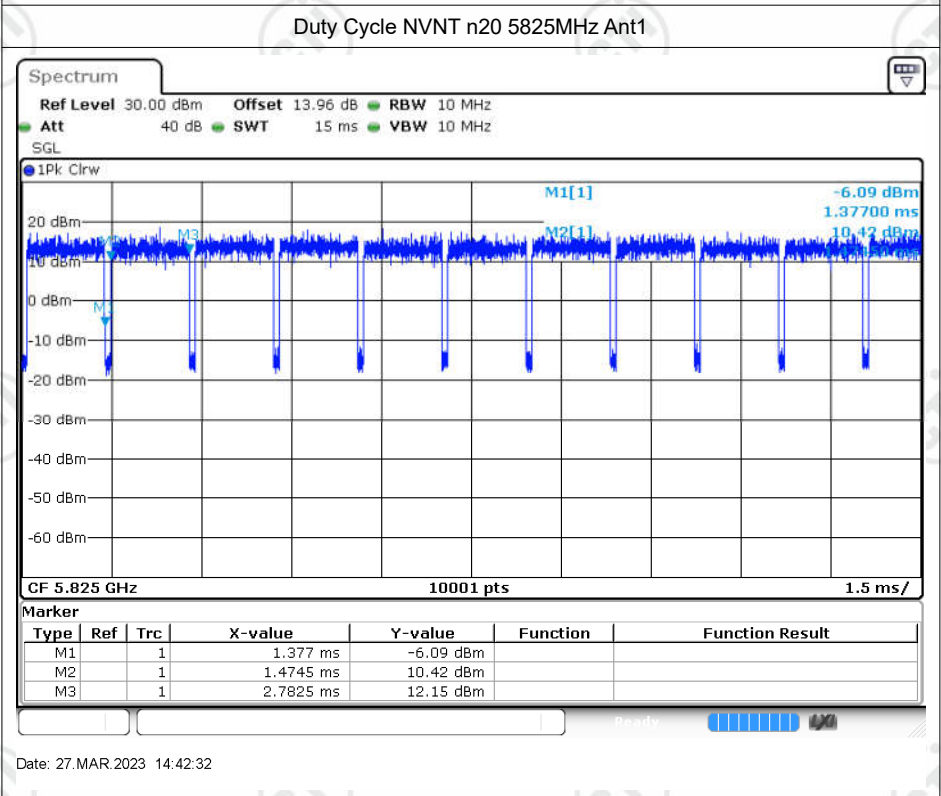


Date: 27. MAR.2023 14:42:32

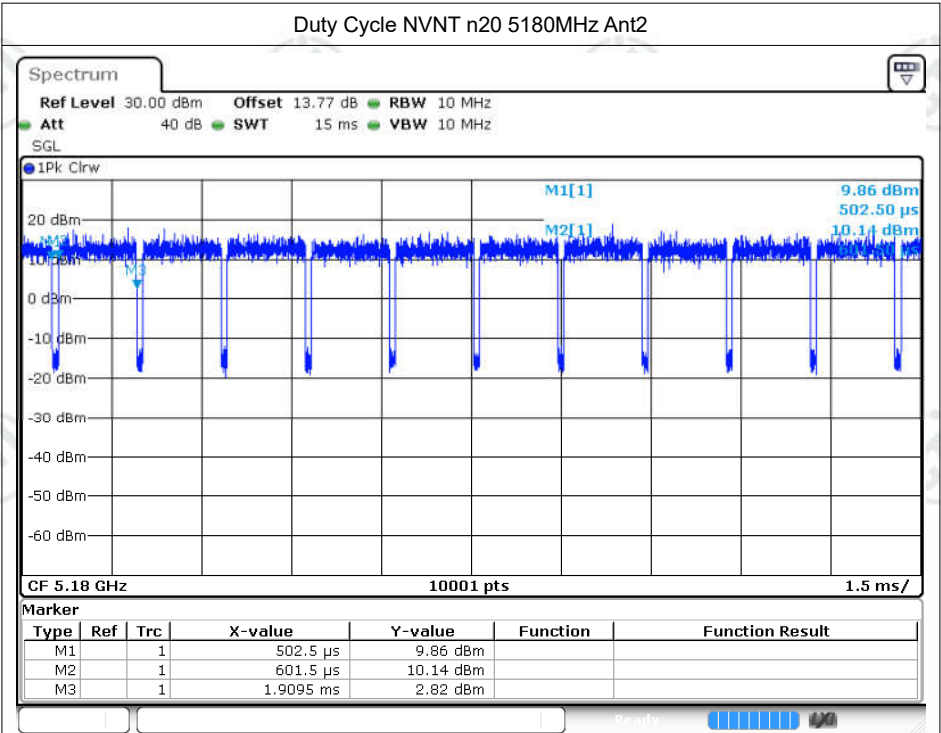


Date: 27. MAR.2023 18:17:02

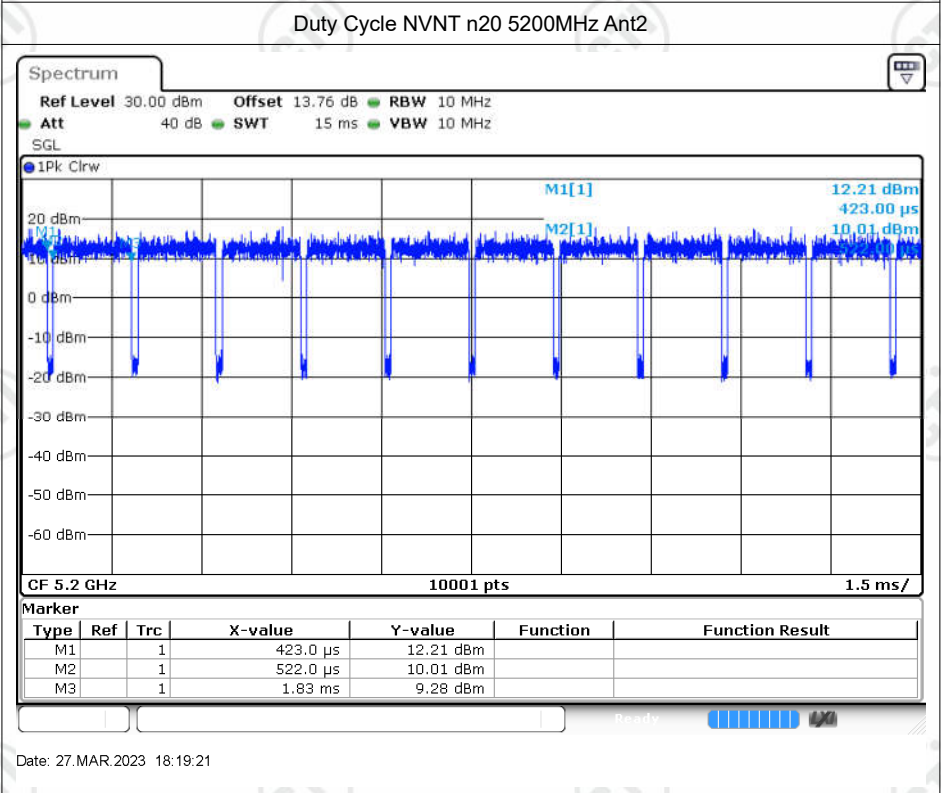


Date: 27. MAR.2023 18:19:21

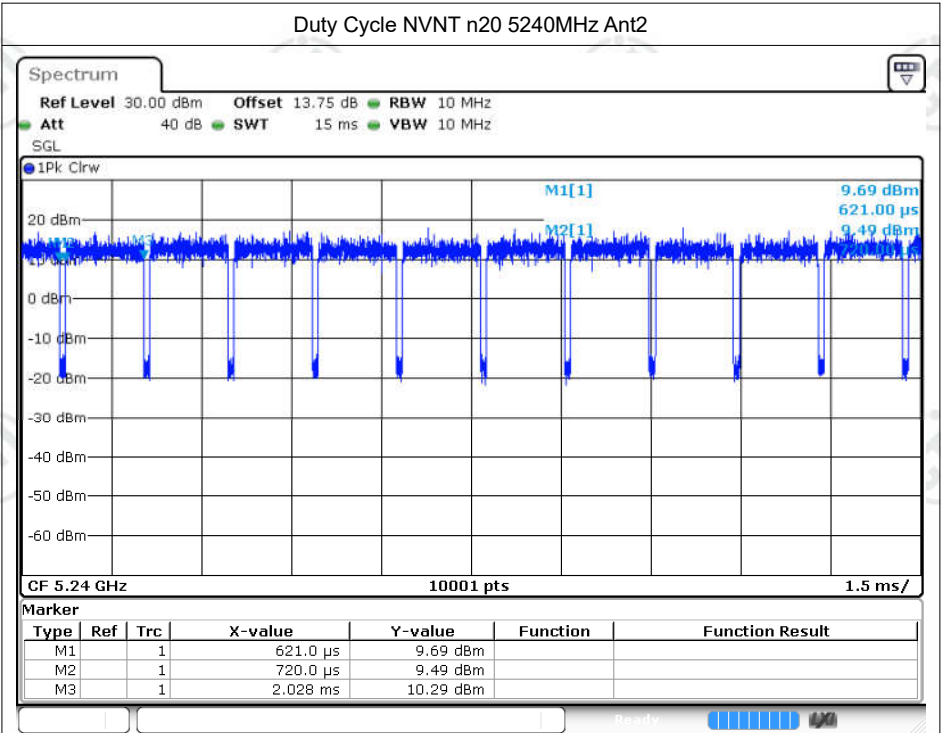


Date: 27. MAR 2023 18:20:05

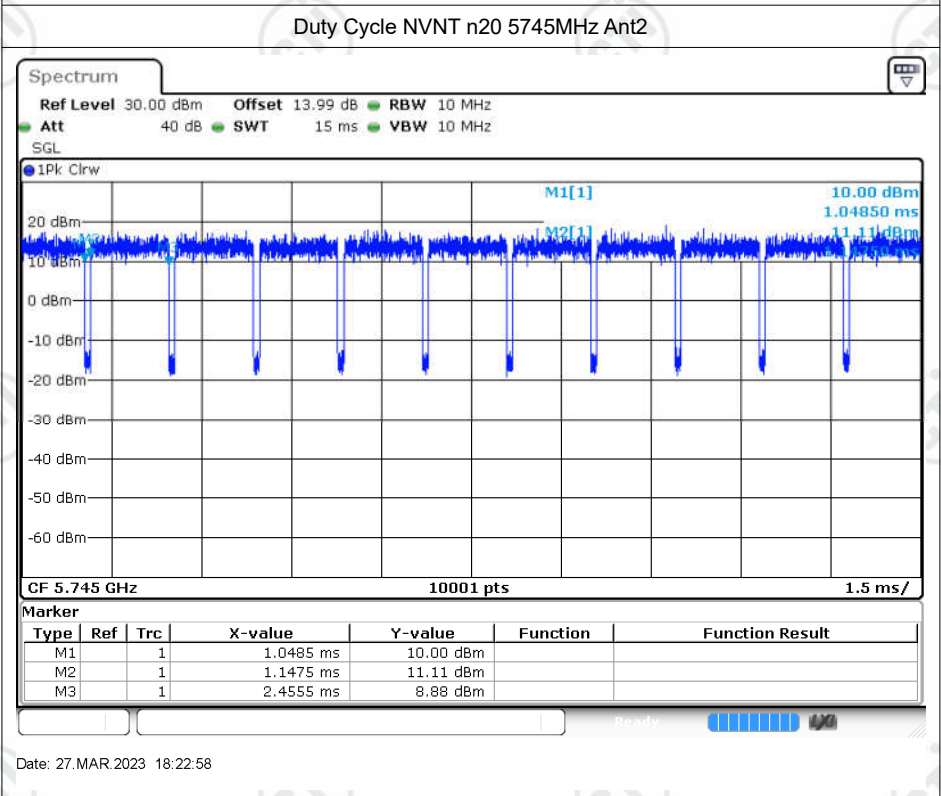


Date: 27. MAR 2023 18:22:58

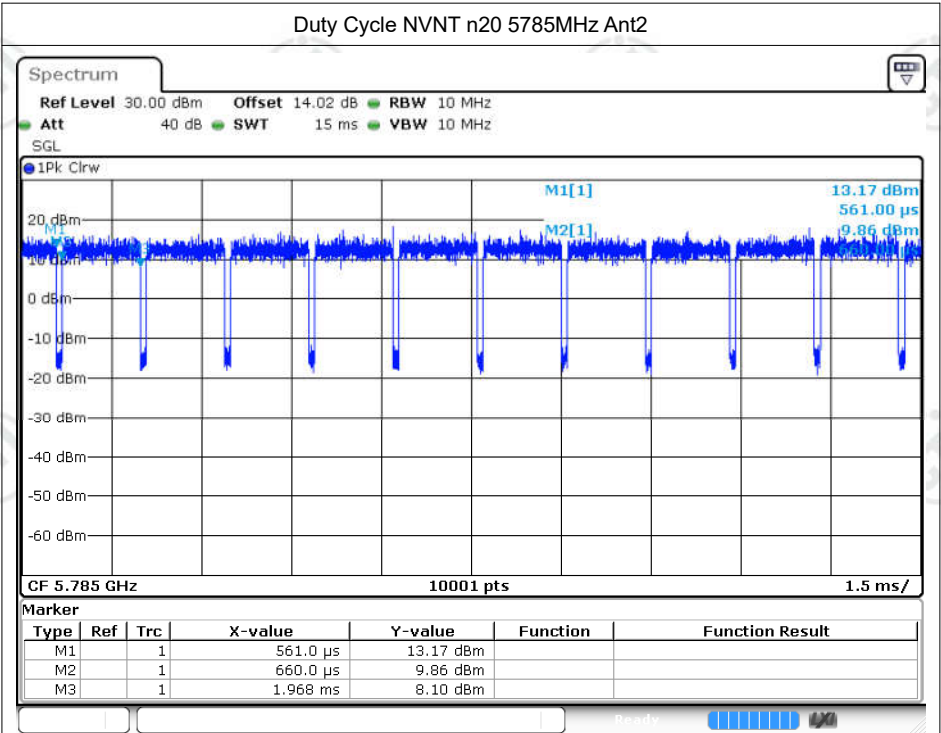


Date: 27. MAR. 2023 18:25:30

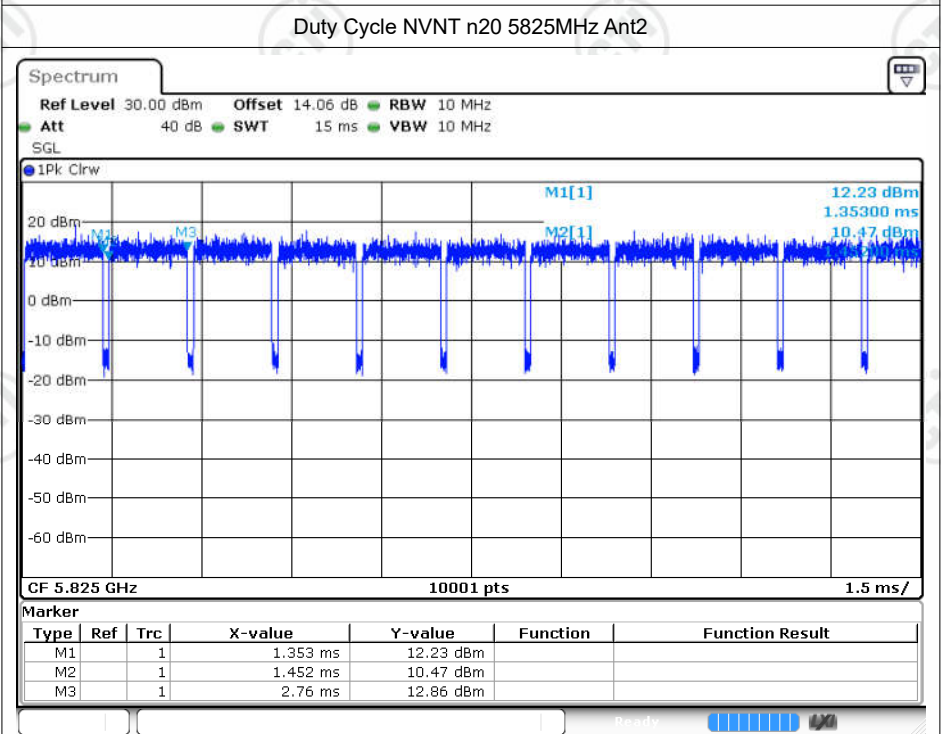


Date: 27. MAR. 2023 18:26:14

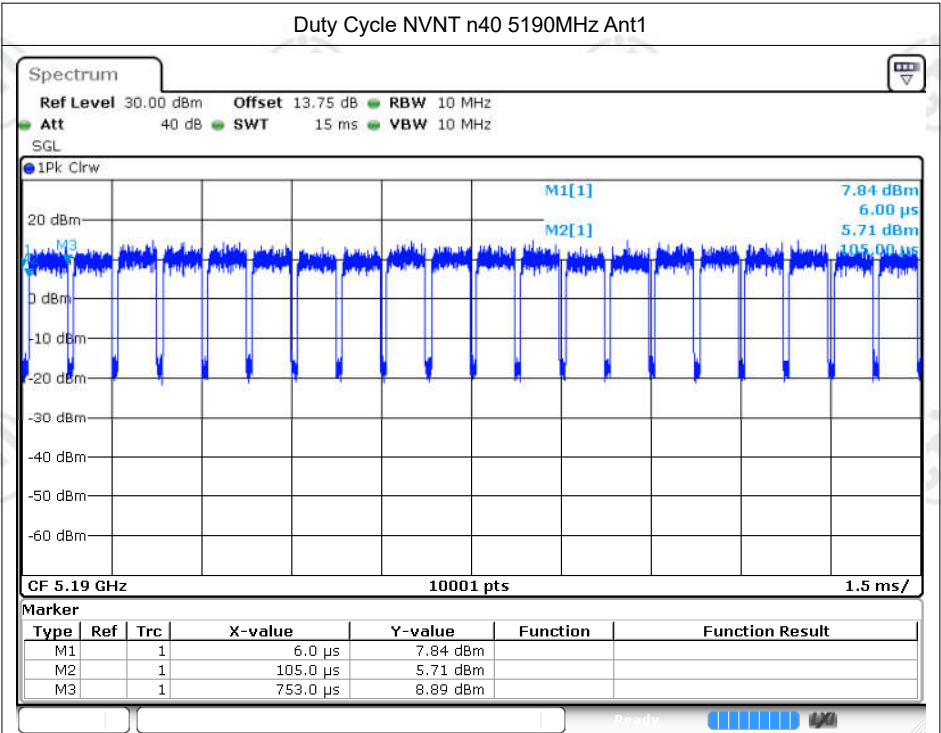


Date: 27. MAR 2023 14:47:35

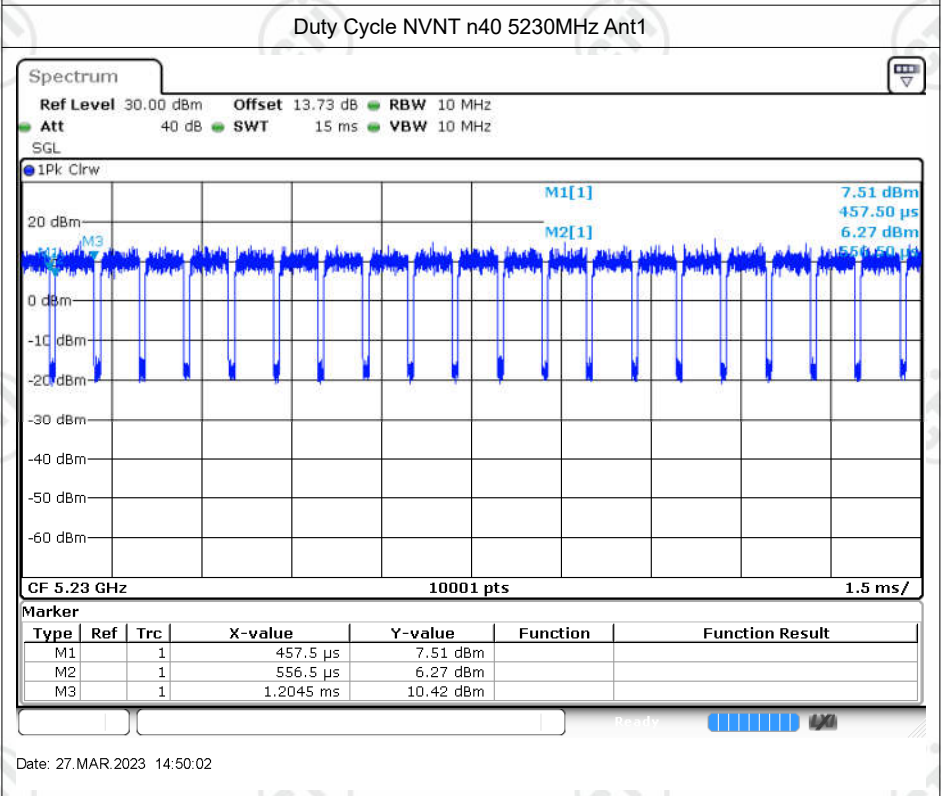


Date: 27. MAR 2023 14:50:02

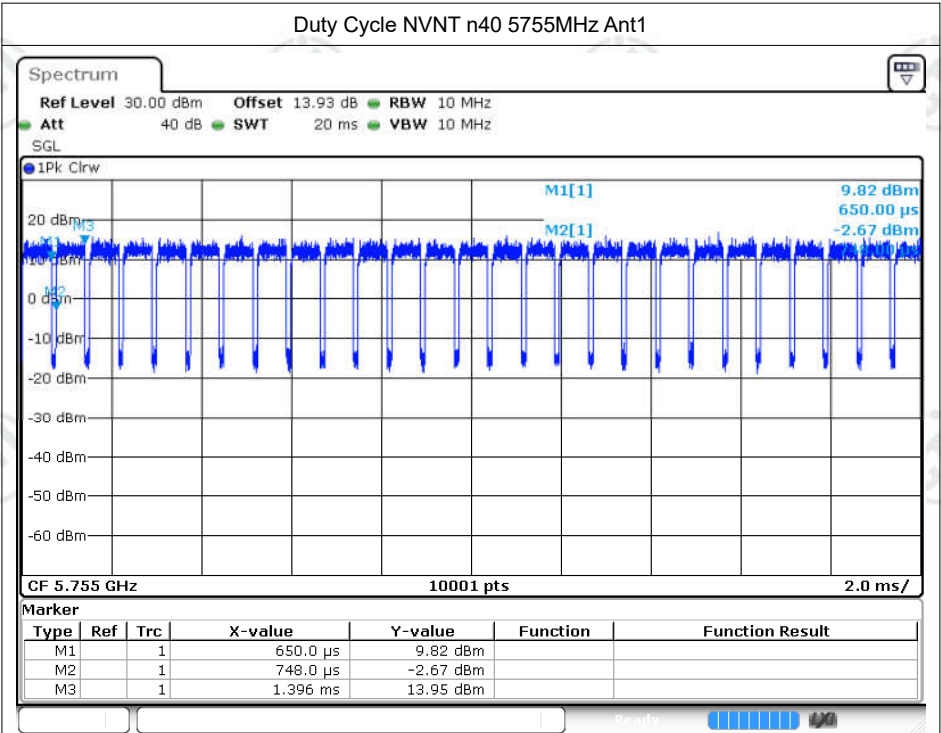


Date: 27. MAR.2023 15:16:26

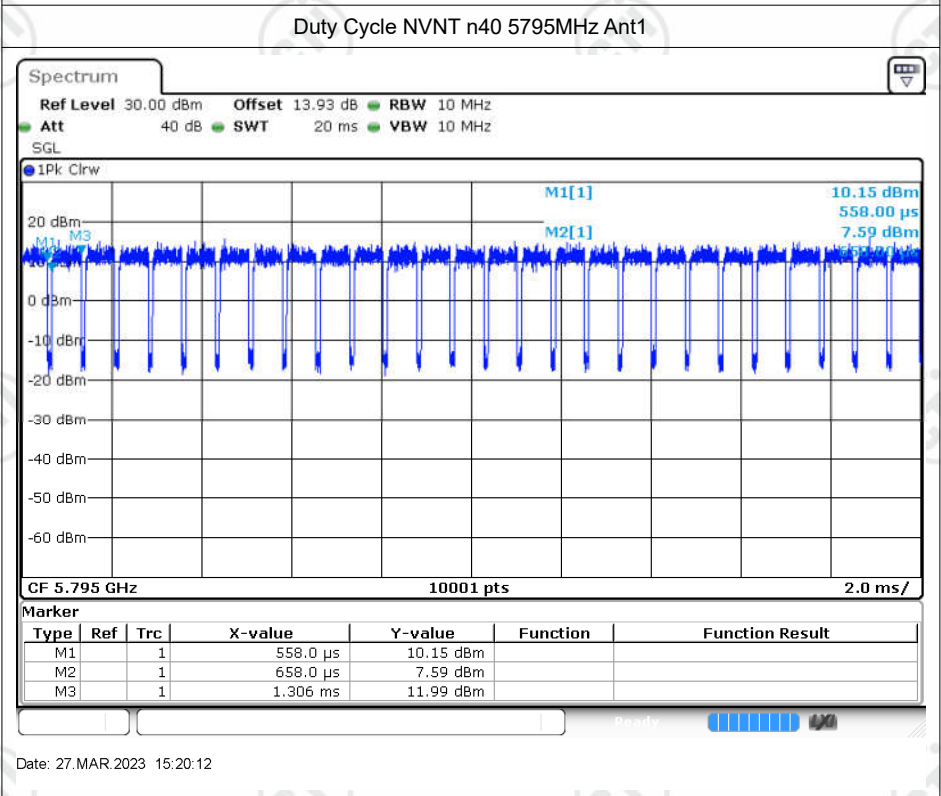


Date: 27. MAR.2023 15:20:12

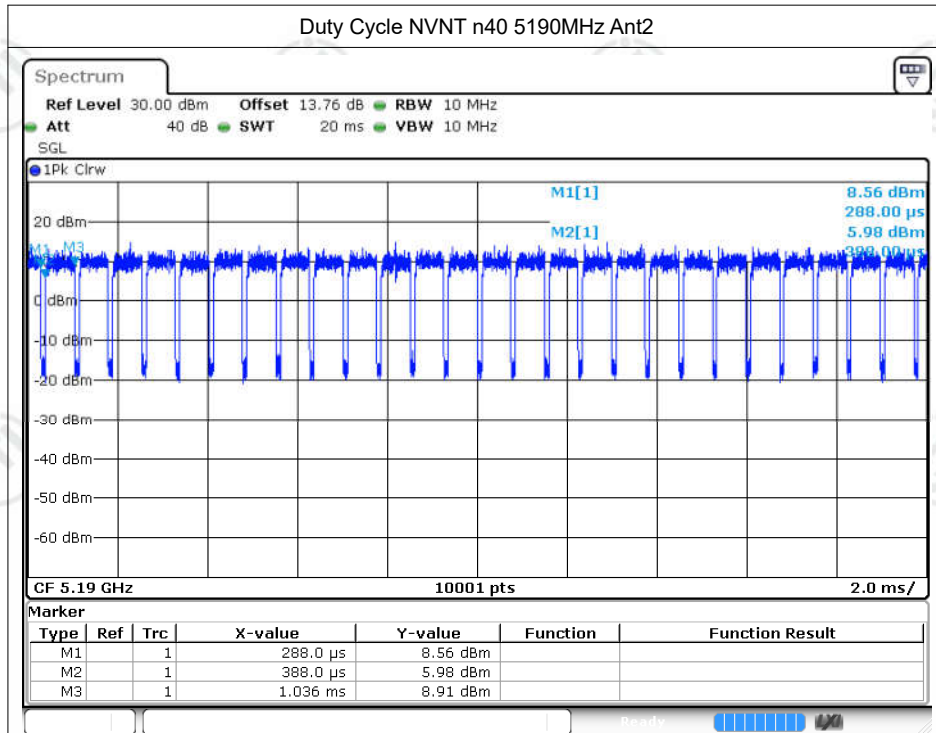


Date: 27. MAR.2023 18:29:08

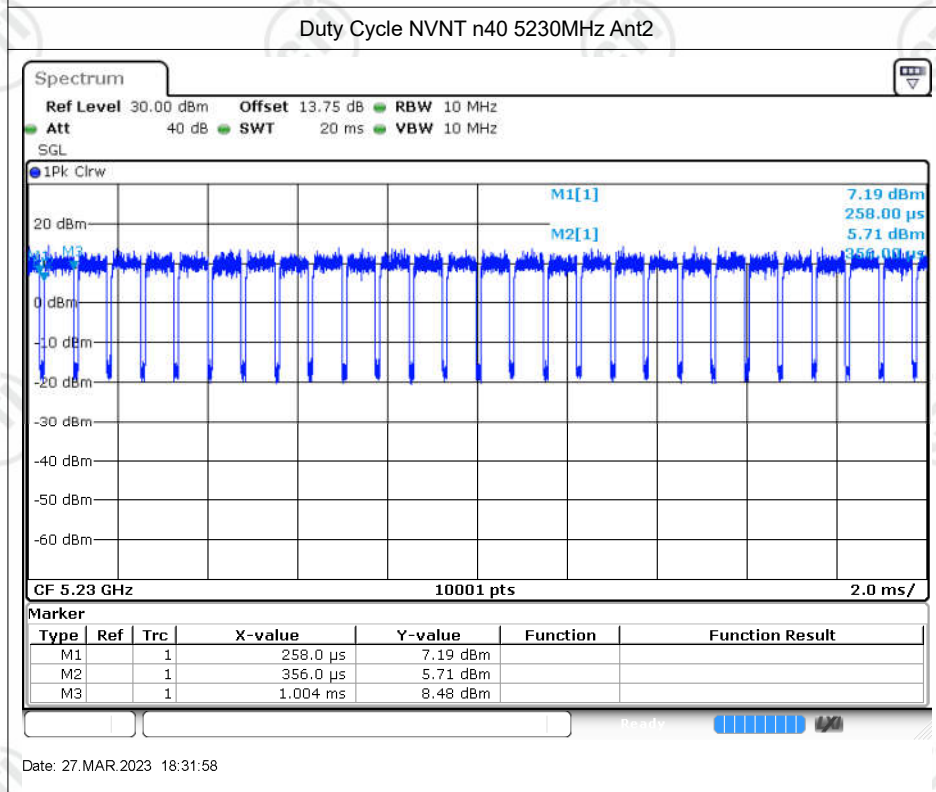


Date: 27. MAR.2023 18:31:58

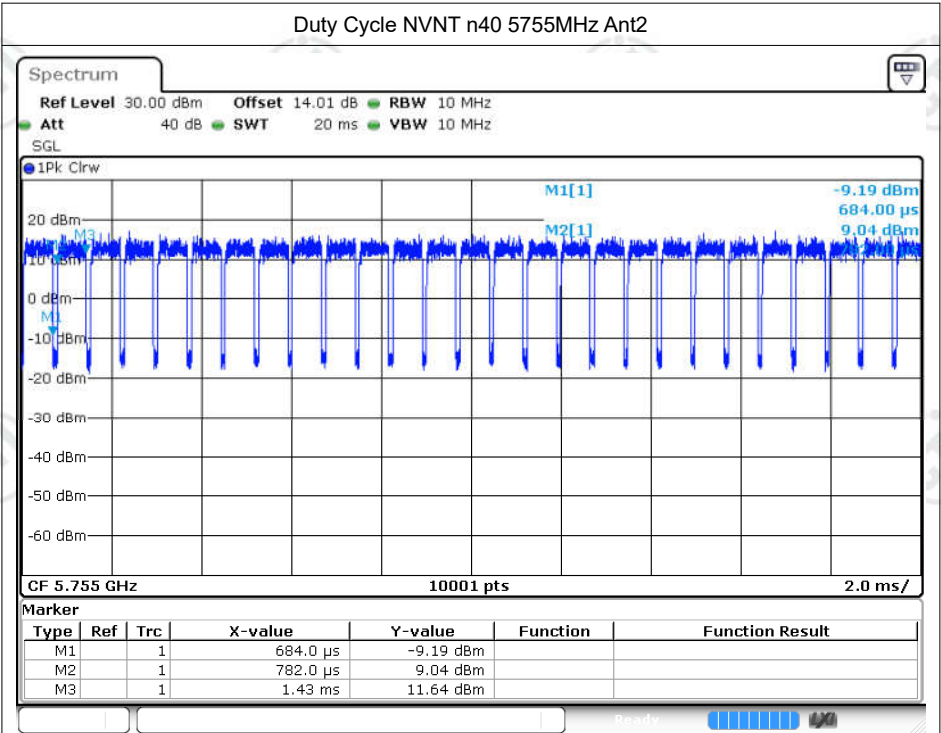


Date: 27. MAR. 2023 18:33:28

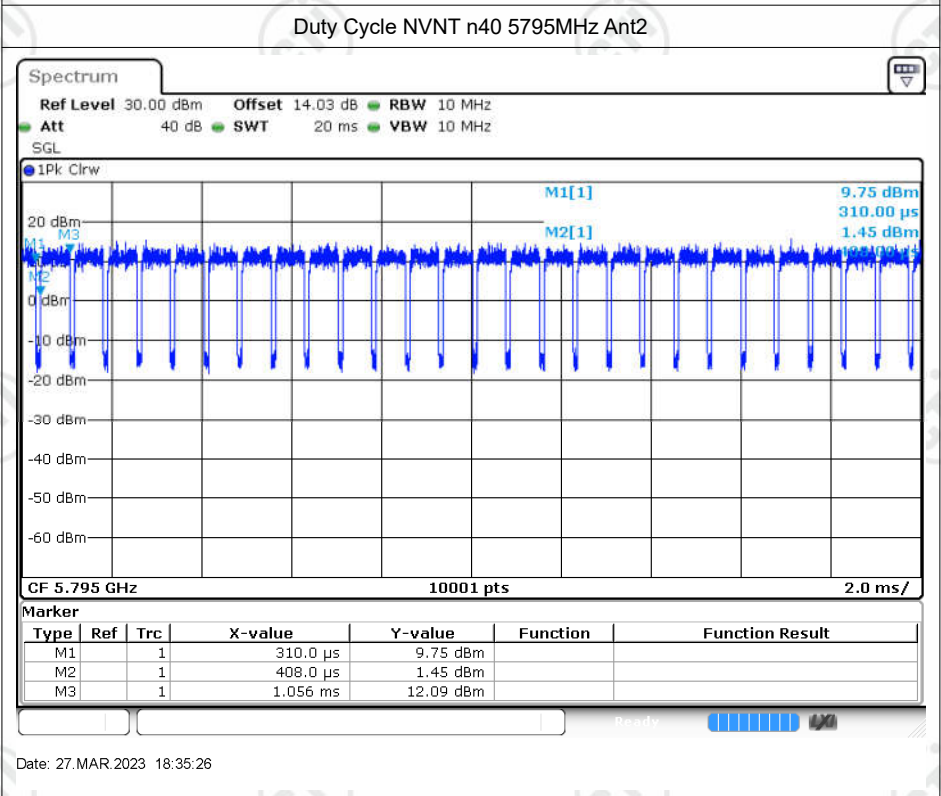


Date: 27. MAR. 2023 18:35:26

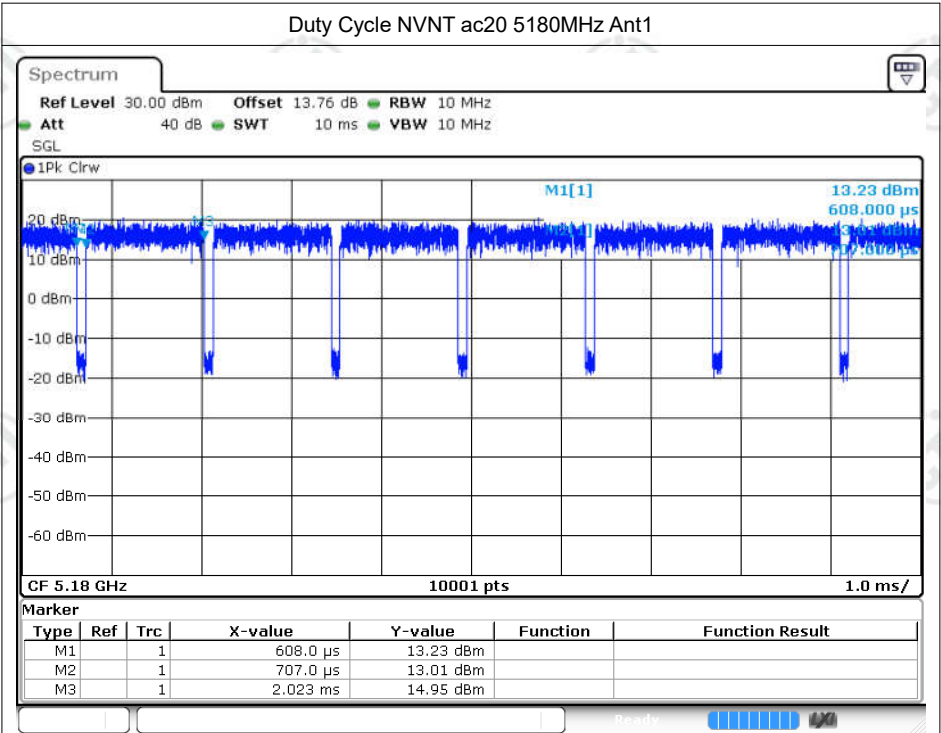


Date: 27. MAR.2023 15:23:45

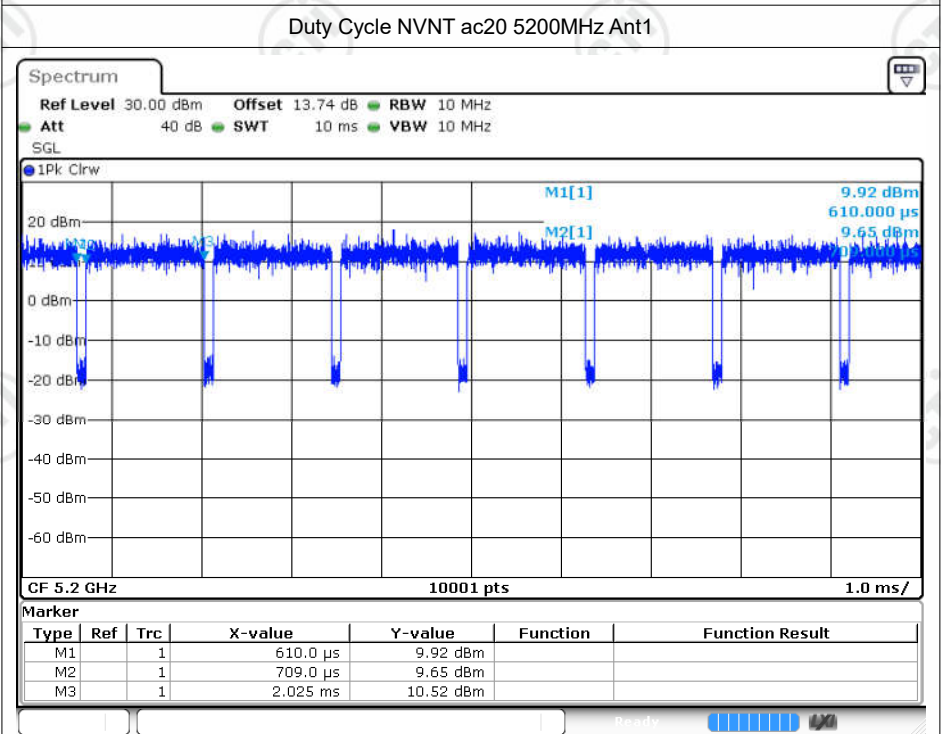


Date: 27. MAR.2023 15:26:35

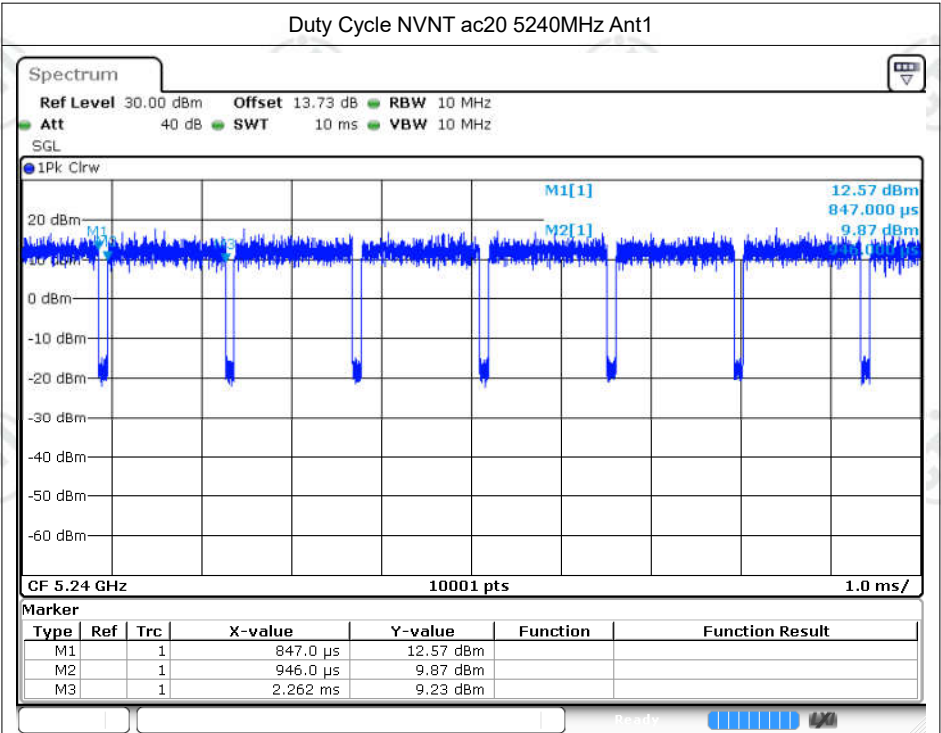


Date: 27. MAR 2023 15:27:46

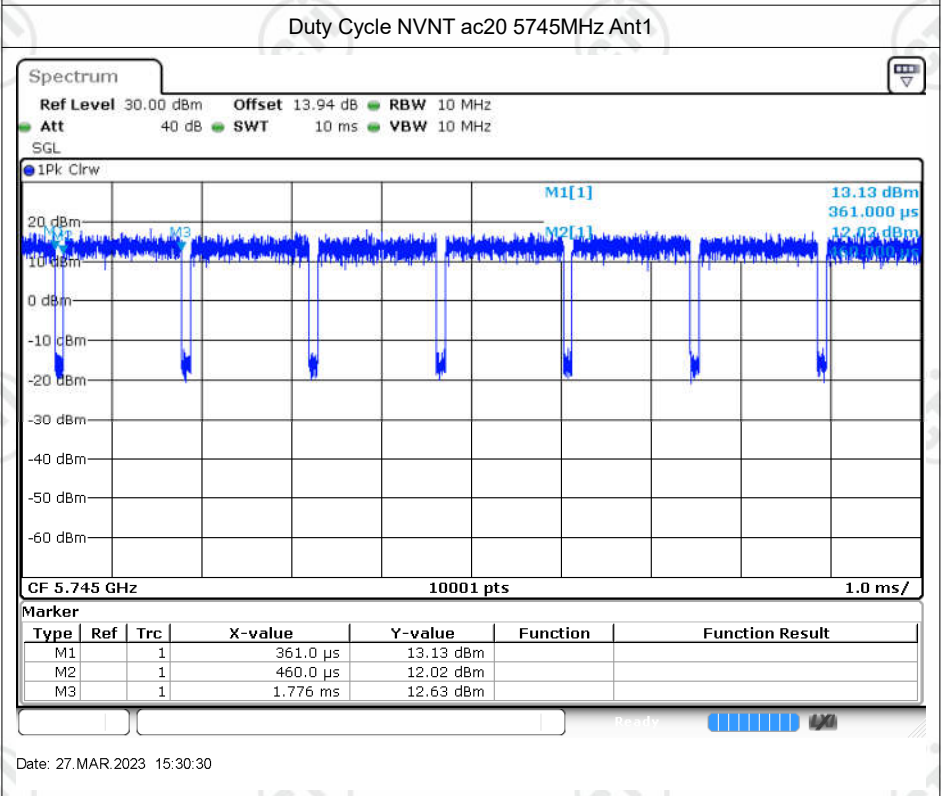


Date: 27. MAR 2023 15:30:30

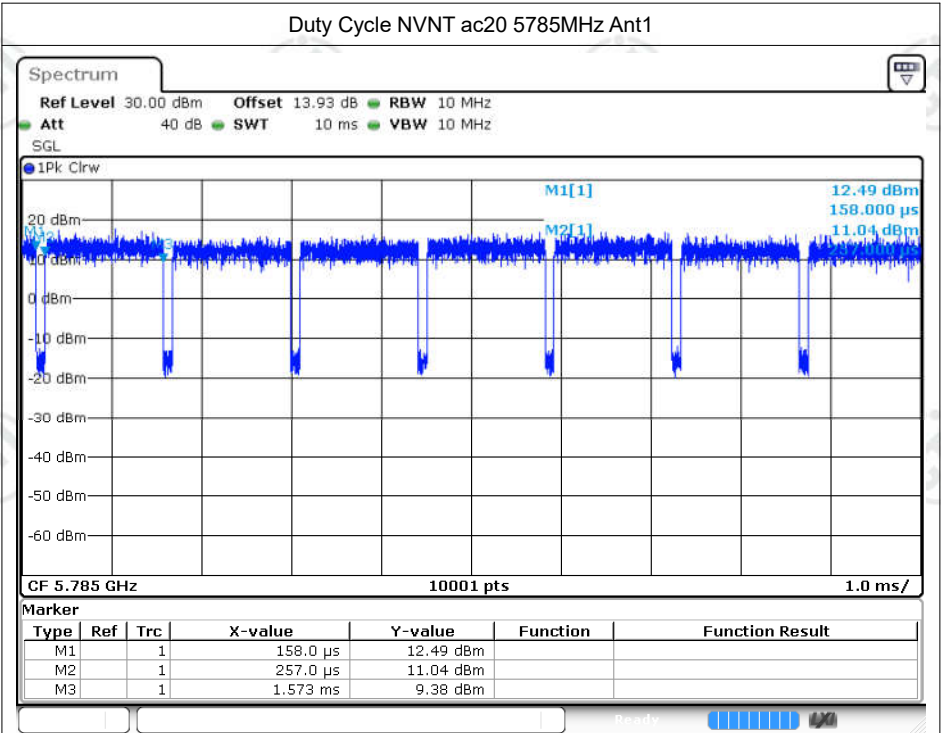


Date: 27. MAR 2023 15:33:26

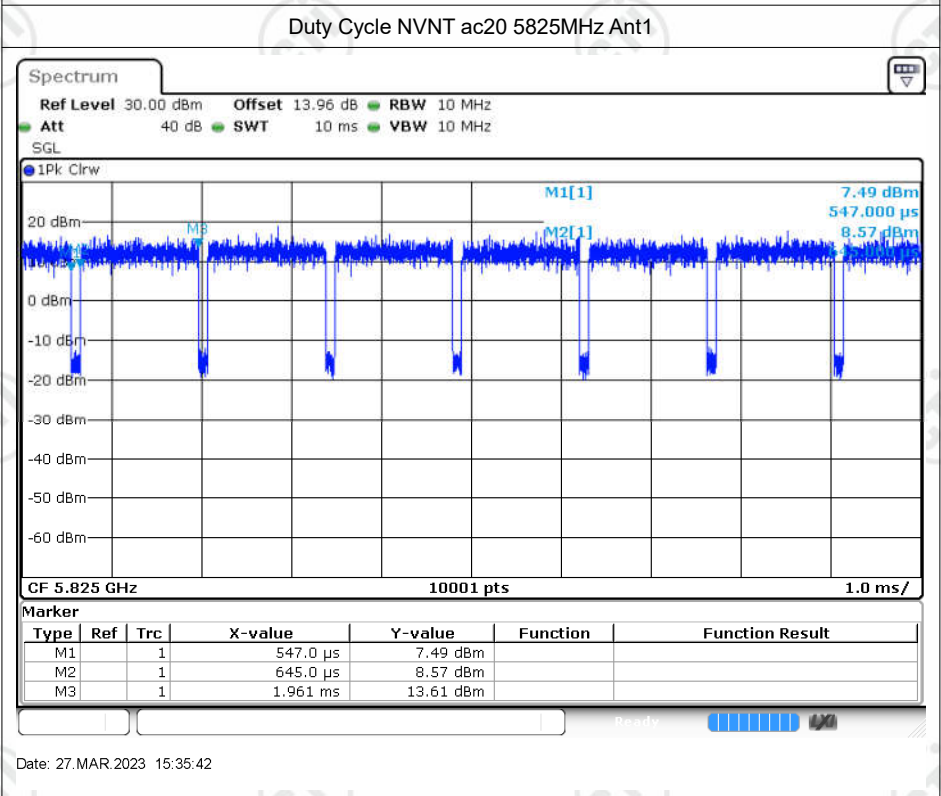


Date: 27. MAR 2023 15:35:42

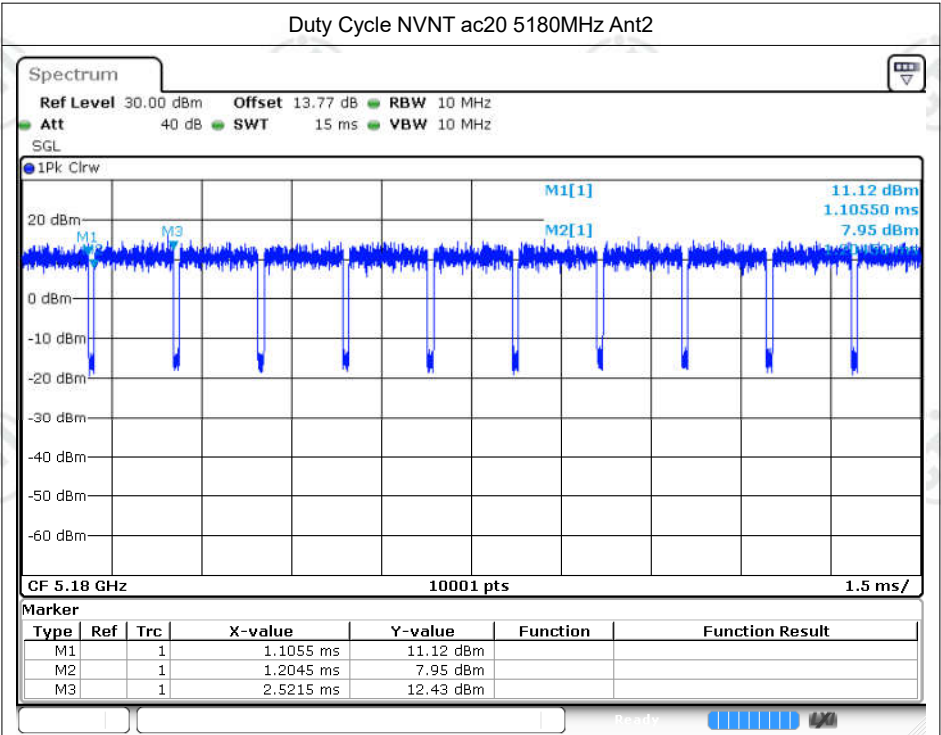


Date: 27. MAR 2023 18:38:00

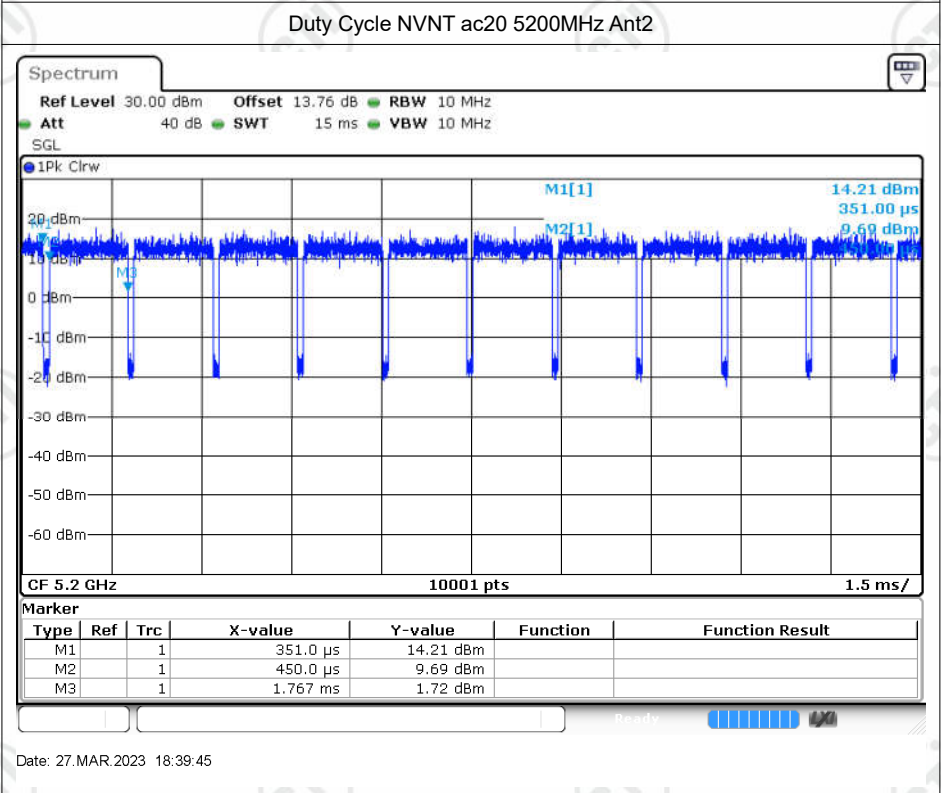


Date: 27. MAR 2023 18:39:45

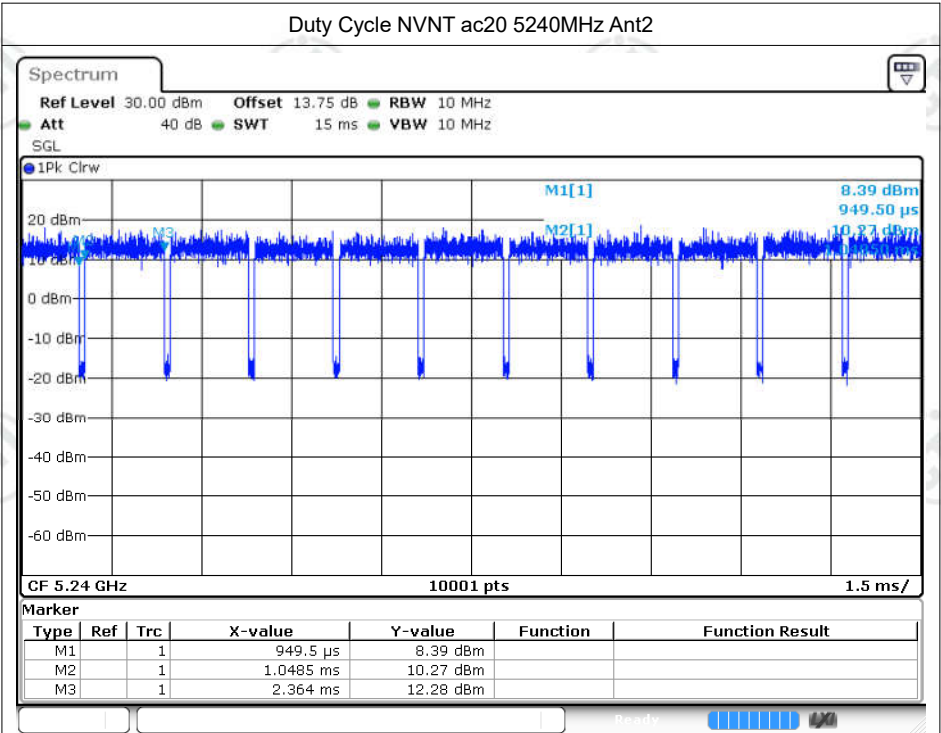


Date: 27. MAR. 2023 19:09:17

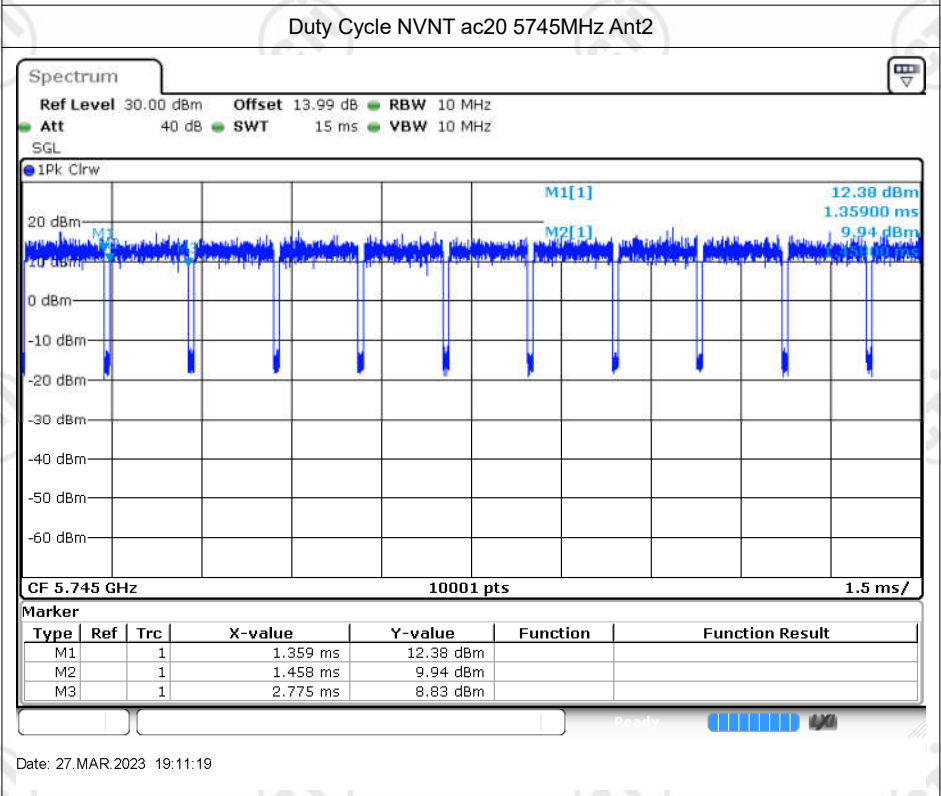


Date: 27. MAR. 2023 19:11:19

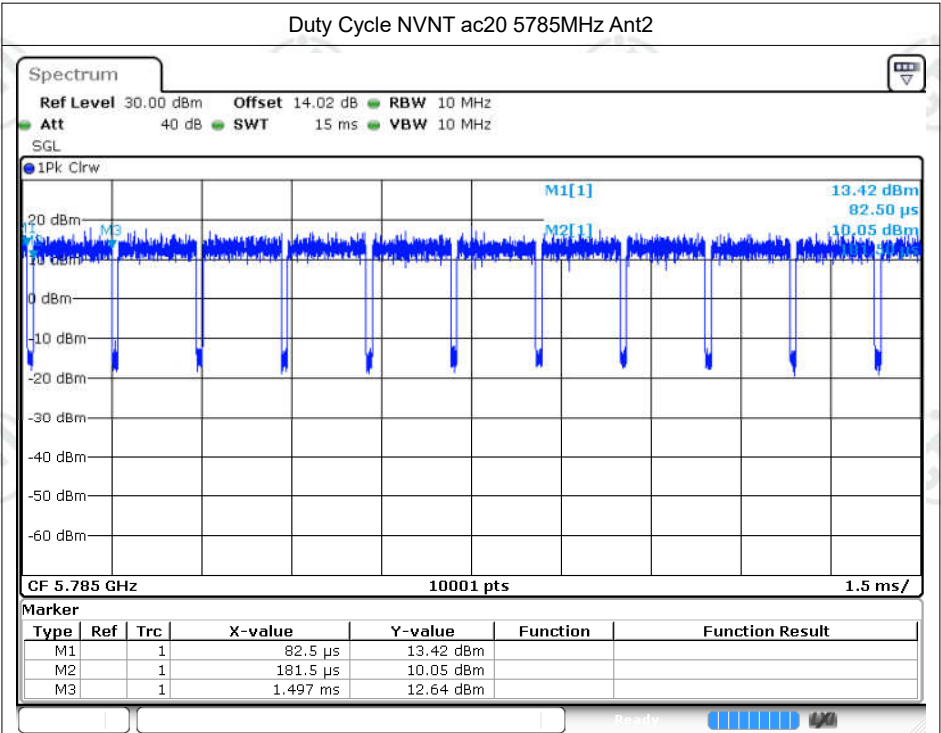


Date: 27. MAR.2023 19:16:10

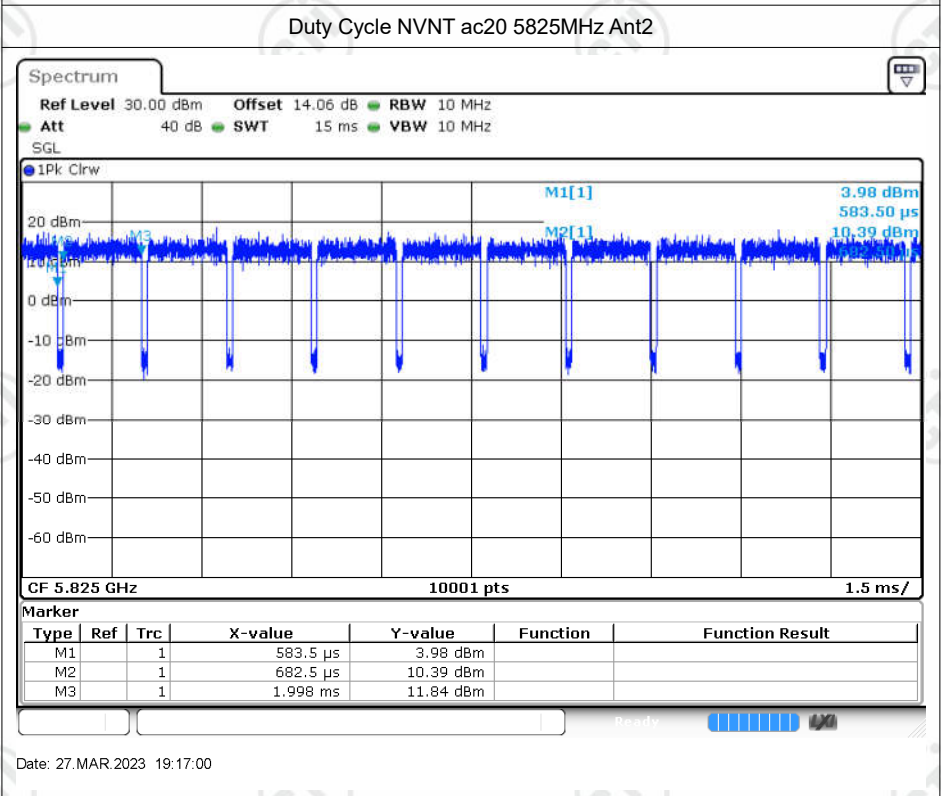


Date: 27. MAR.2023 19:17:00

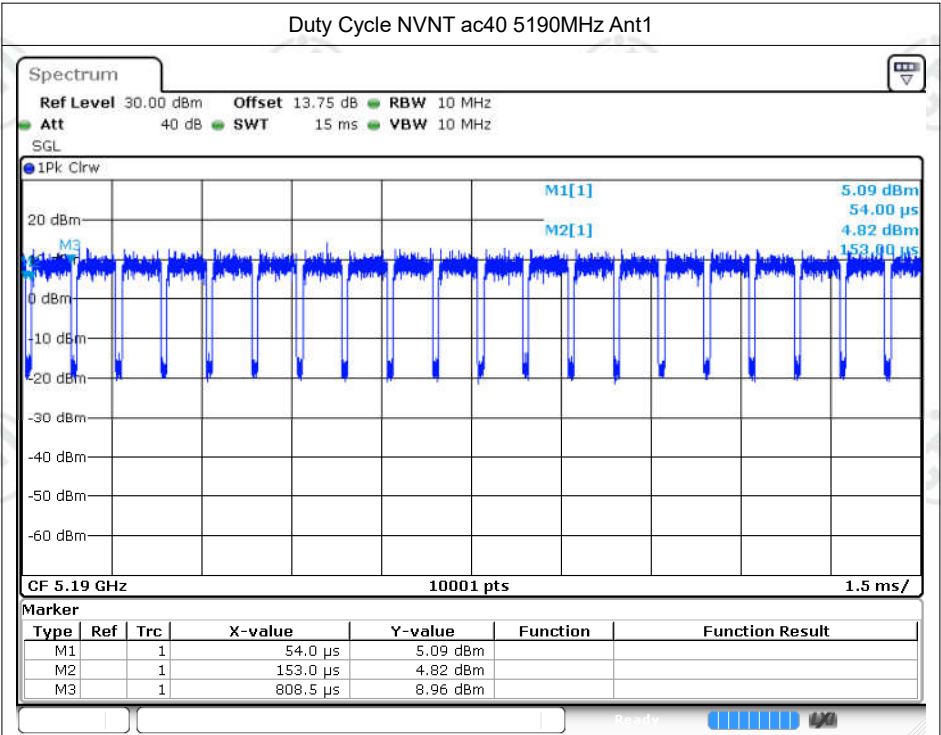


Date: 27. MAR.2023 15:39:40

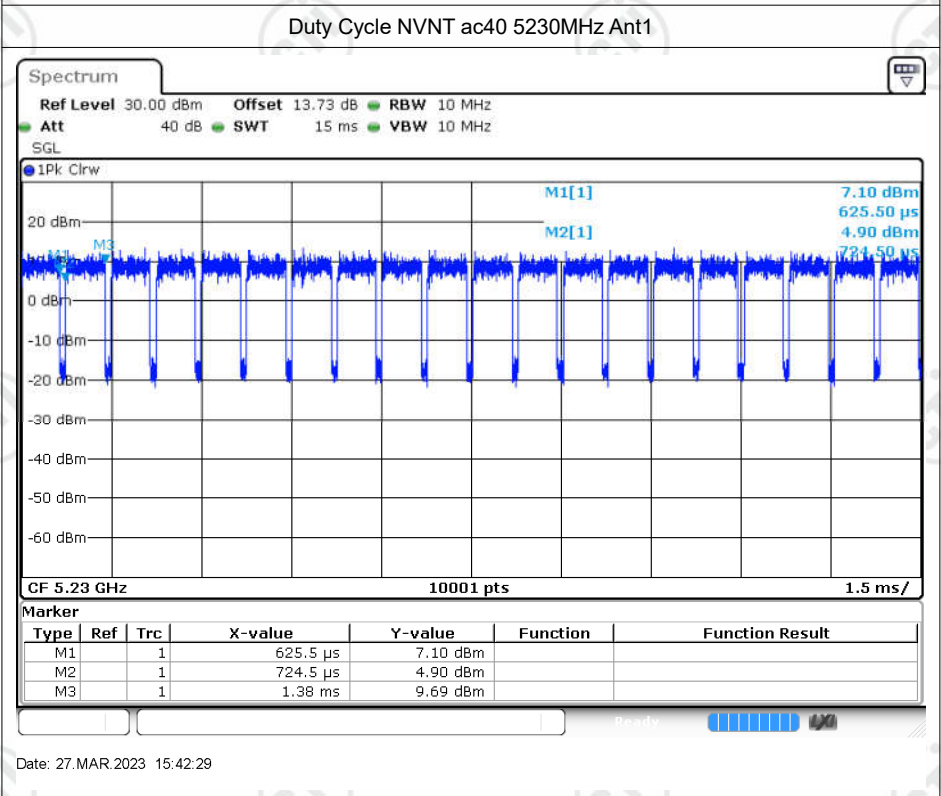


Date: 27. MAR.2023 15:42:29

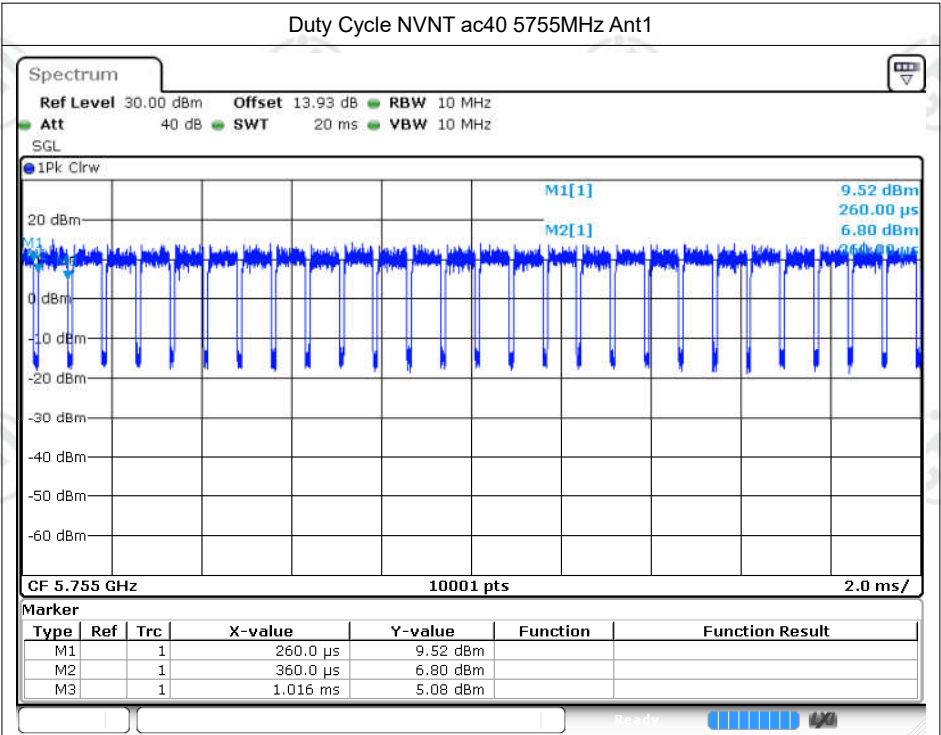


Date: 27. MAR.2023 15:44:46

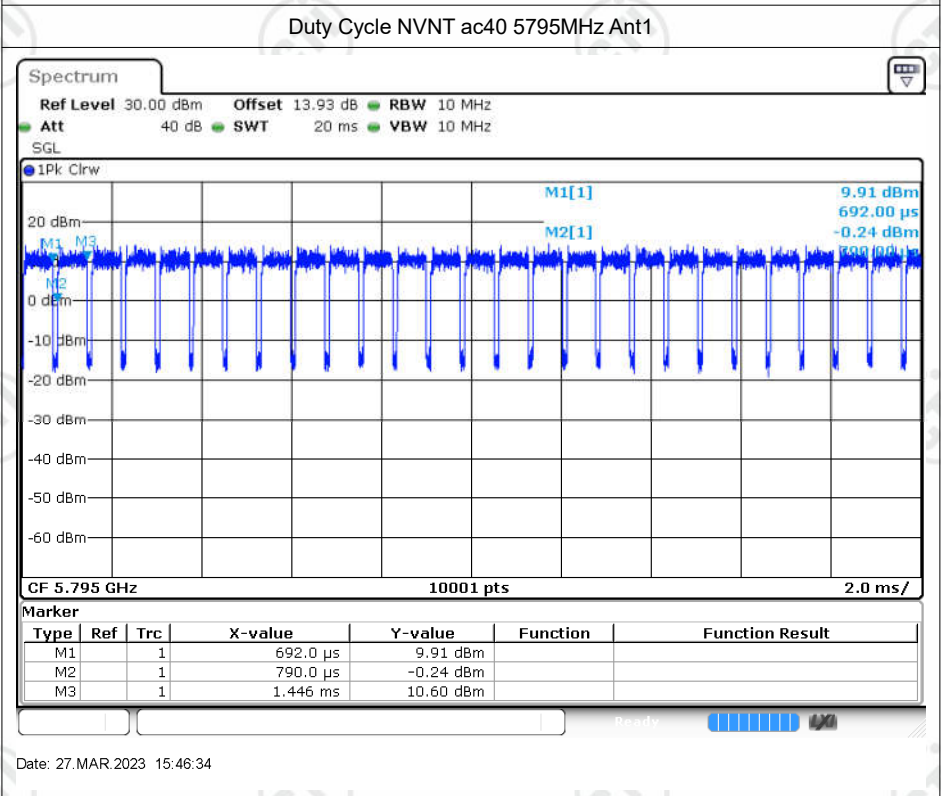


Date: 27. MAR.2023 15:46:34

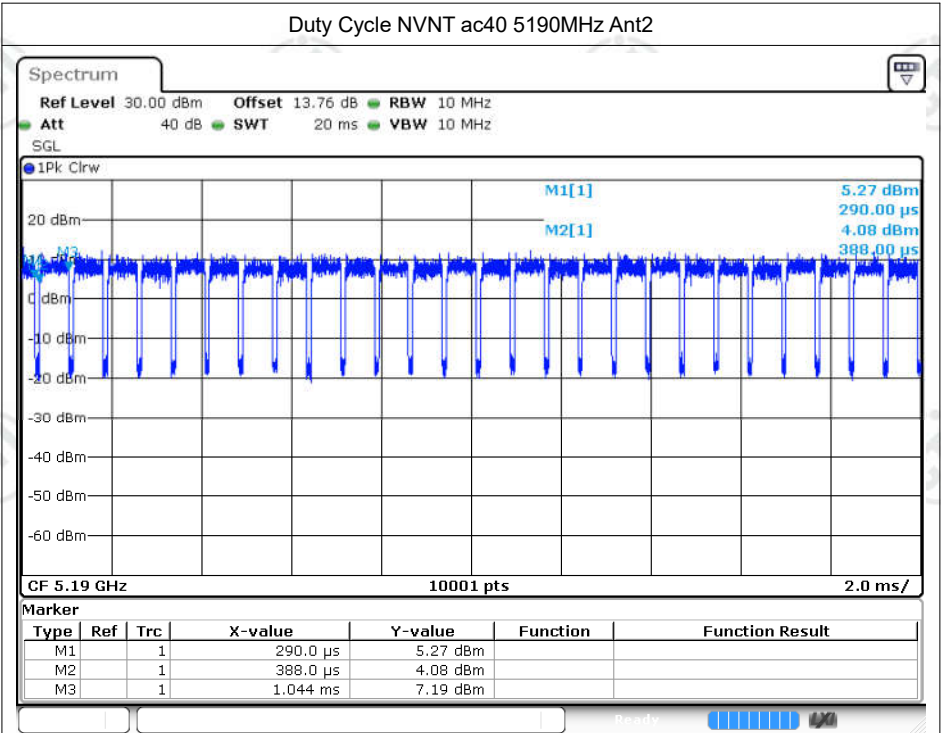


Date: 27. MAR.2023 19:18:56

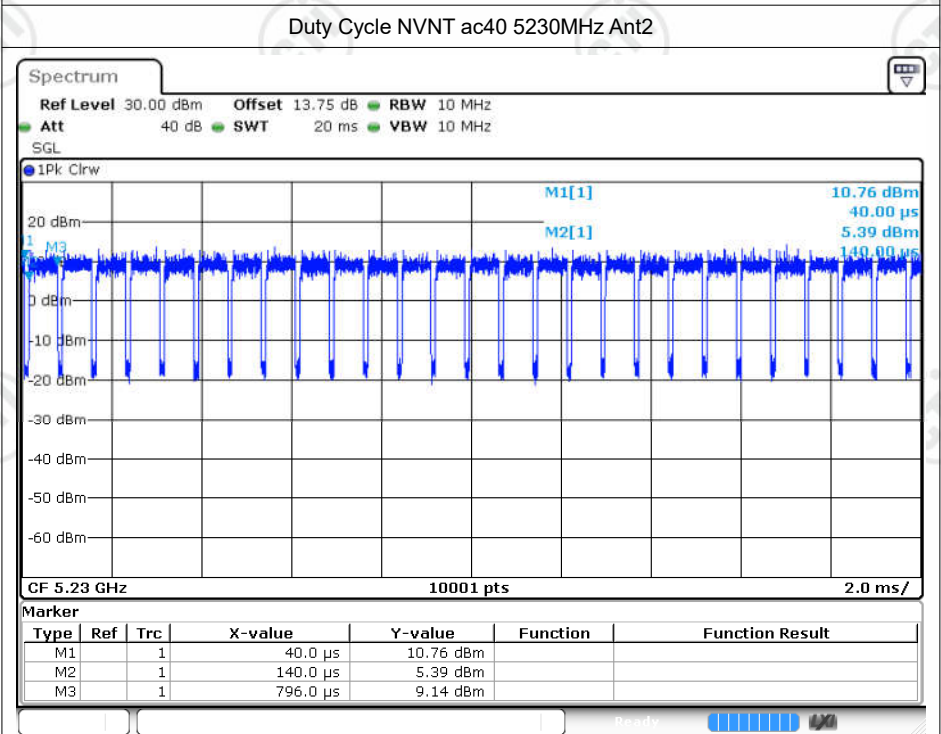


Date: 27. MAR.2023 19:21:57

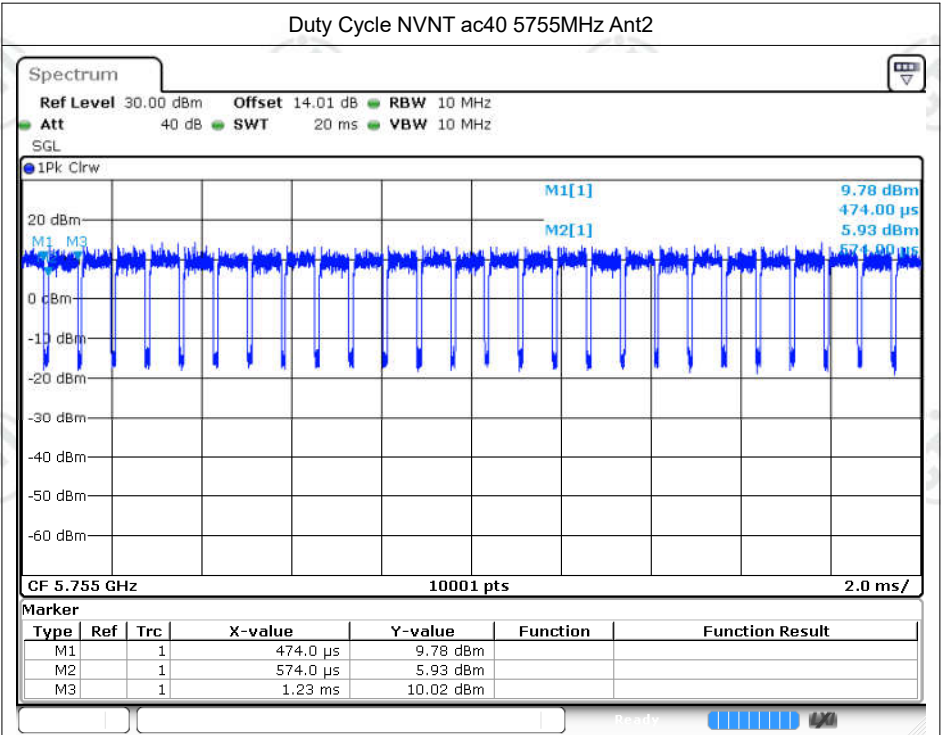


Date: 27. MAR. 2023 19:23:58

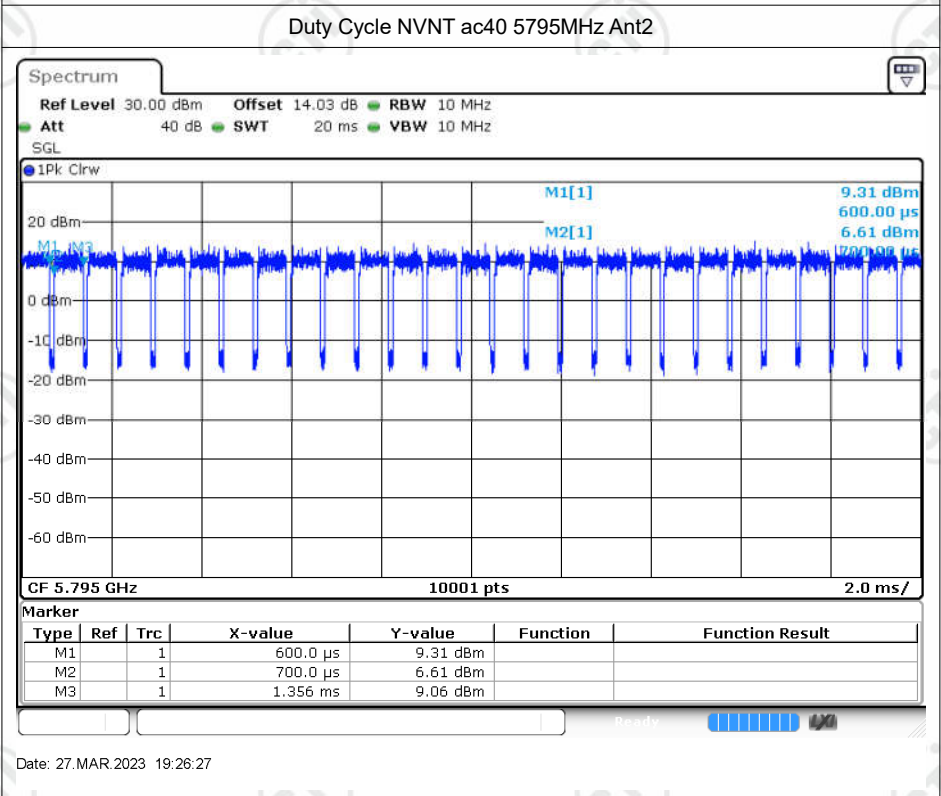


Date: 27. MAR. 2023 19:26:27

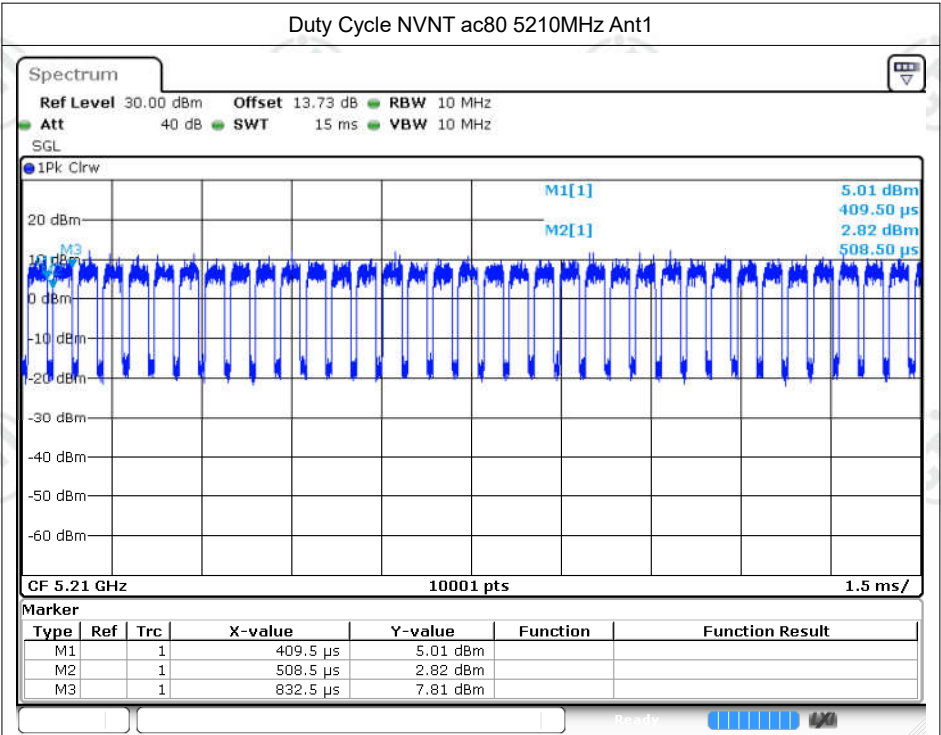


Date: 27. MAR.2023 15:51:32

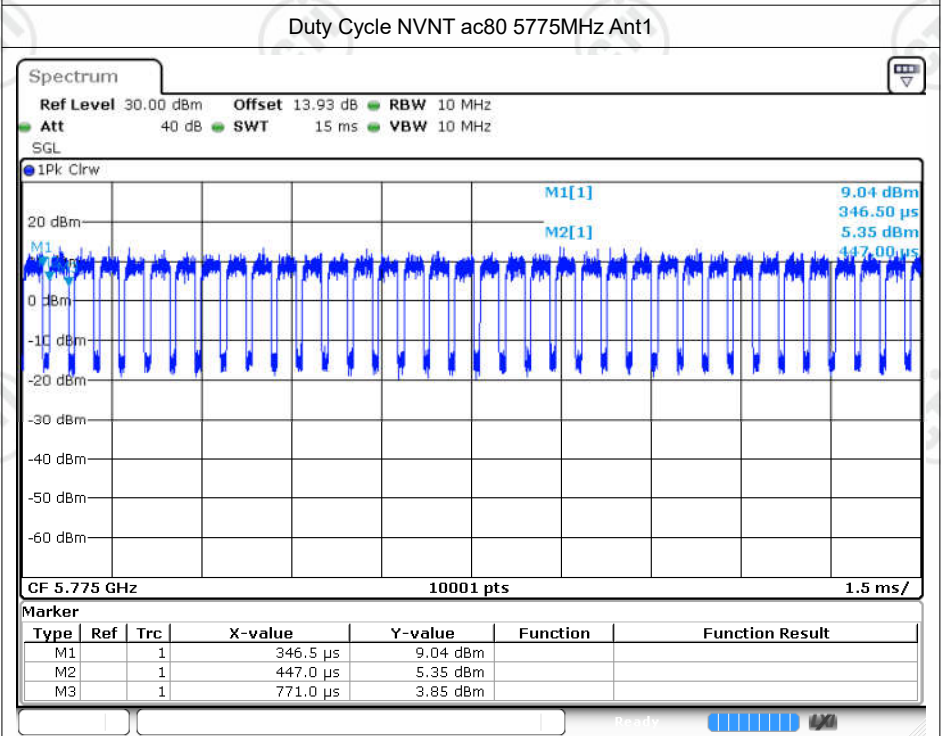


Date: 27. MAR.2023 15:56:42

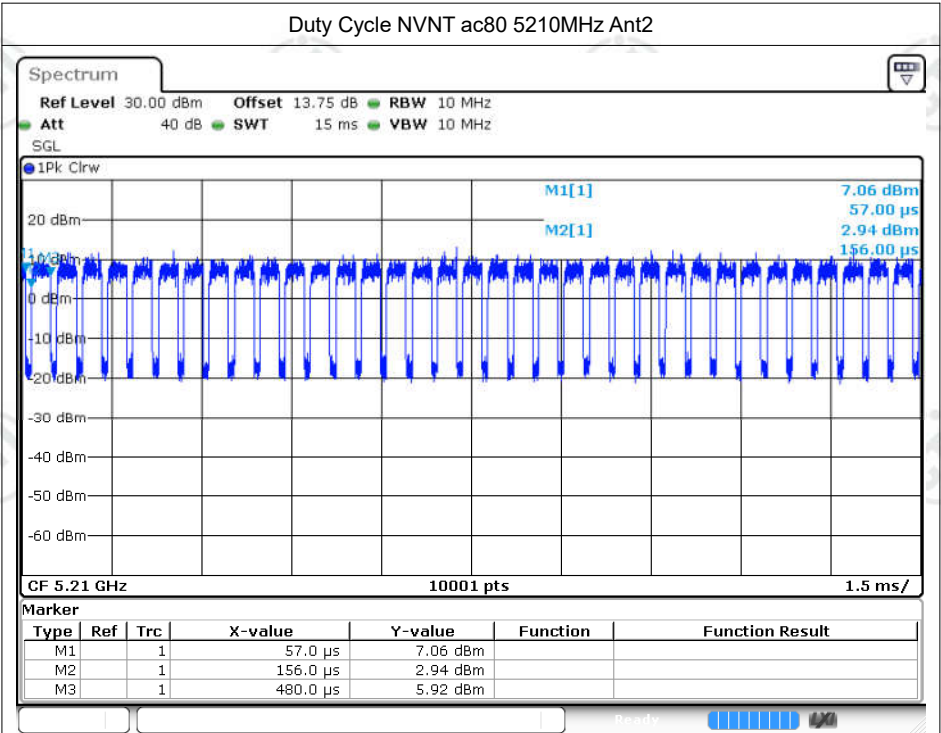


Date: 27. MAR. 2023 19:28:26

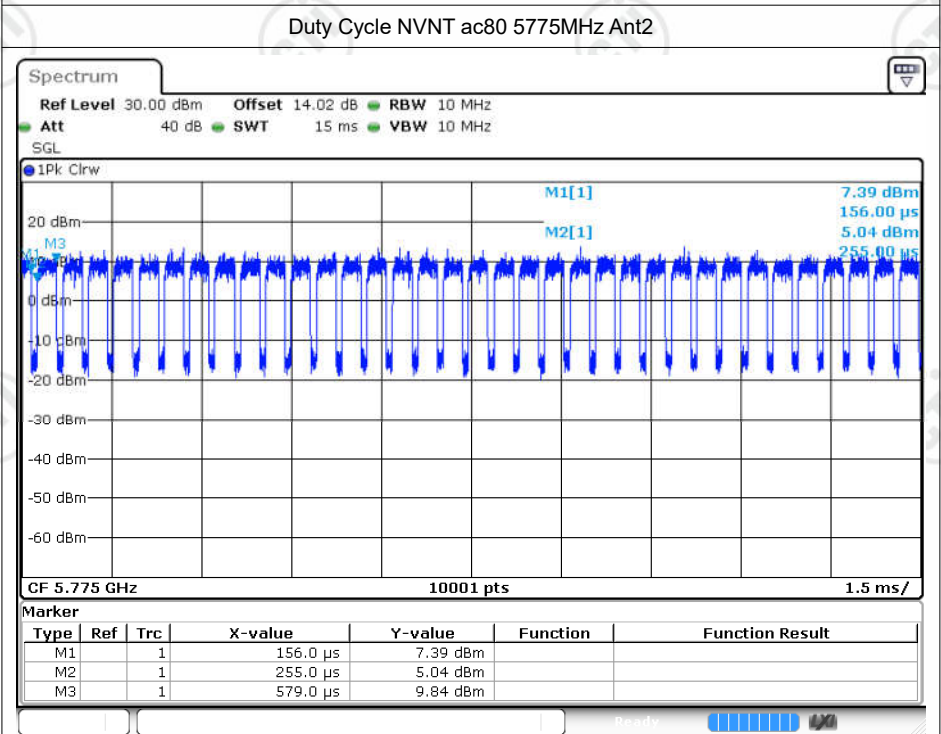


Date: 27. MAR. 2023 19:31:30

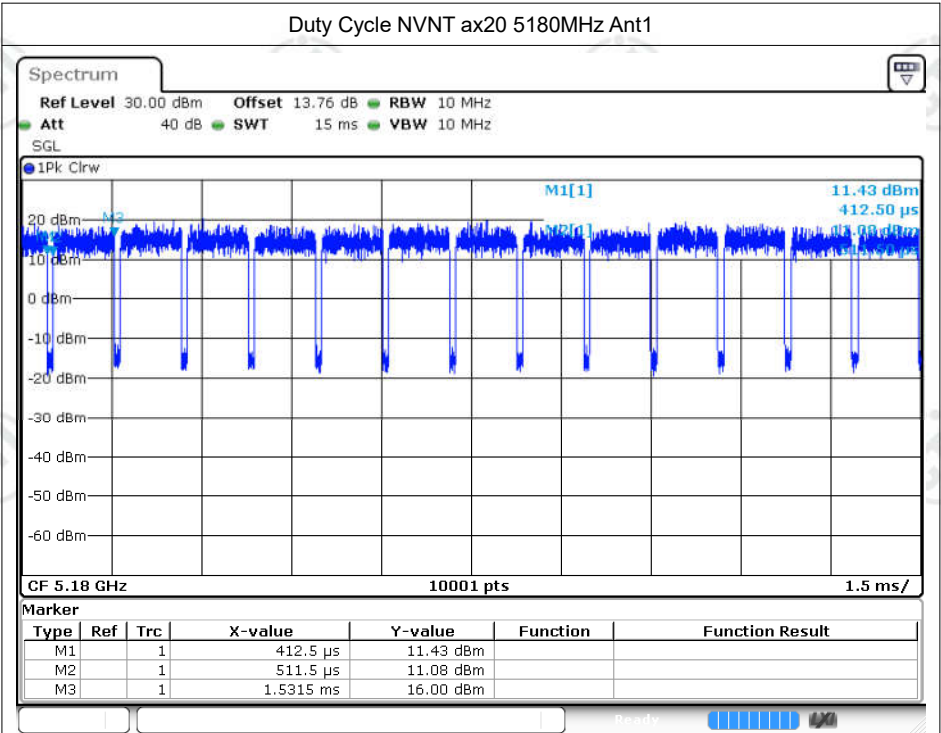


Date: 27. MAR 2023 16:00:24

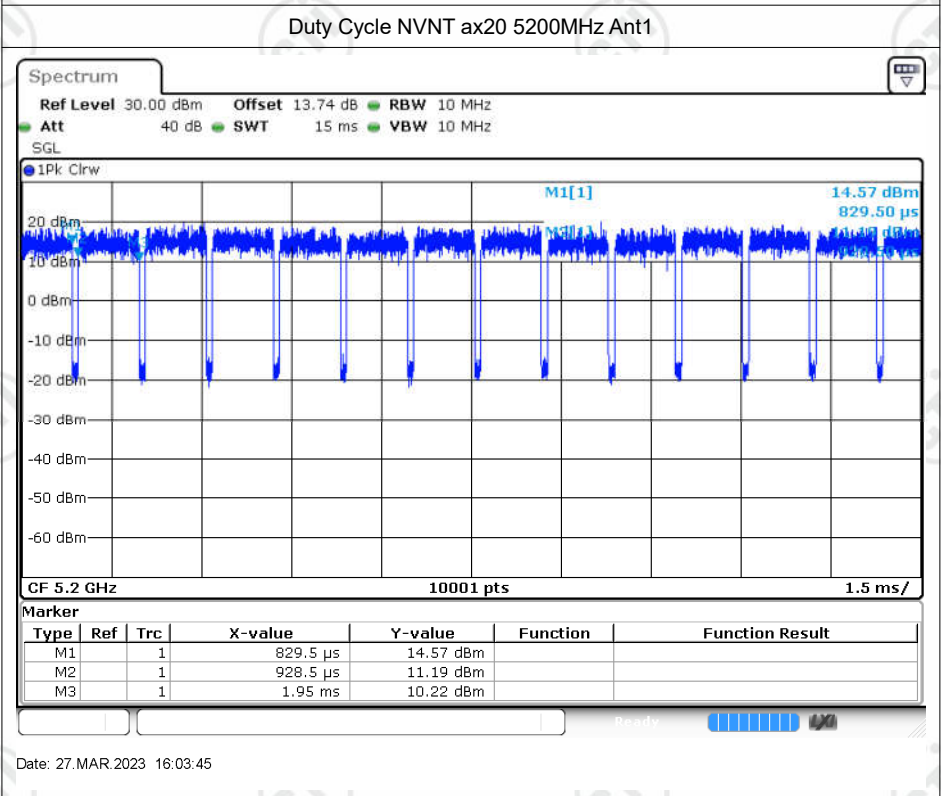


Date: 27. MAR 2023 16:03:45

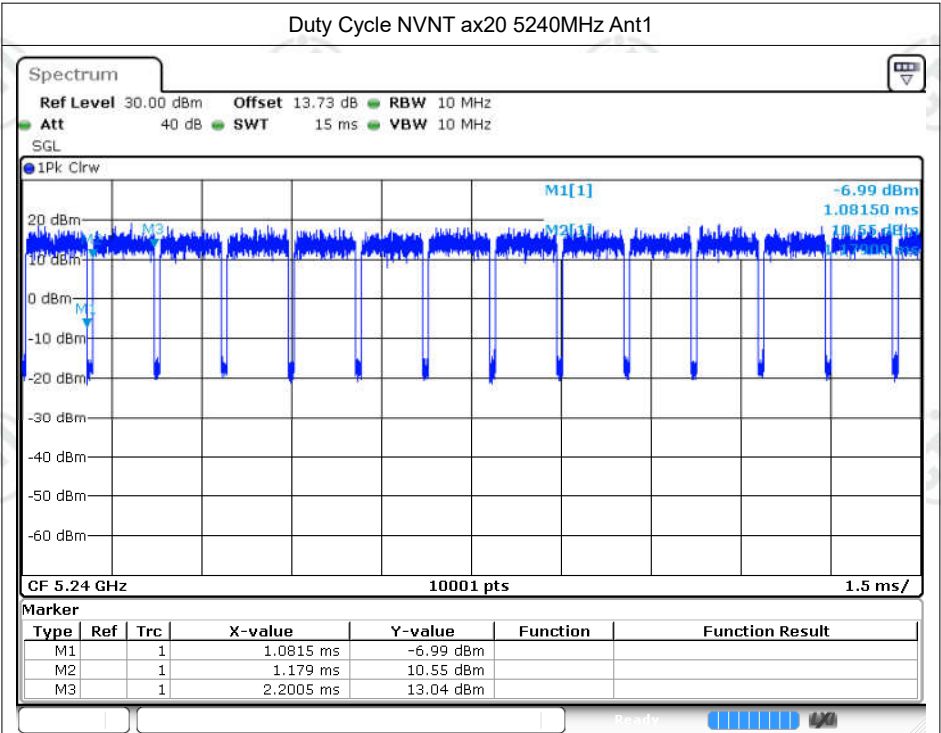


Date: 27. MAR.2023 16:29:03

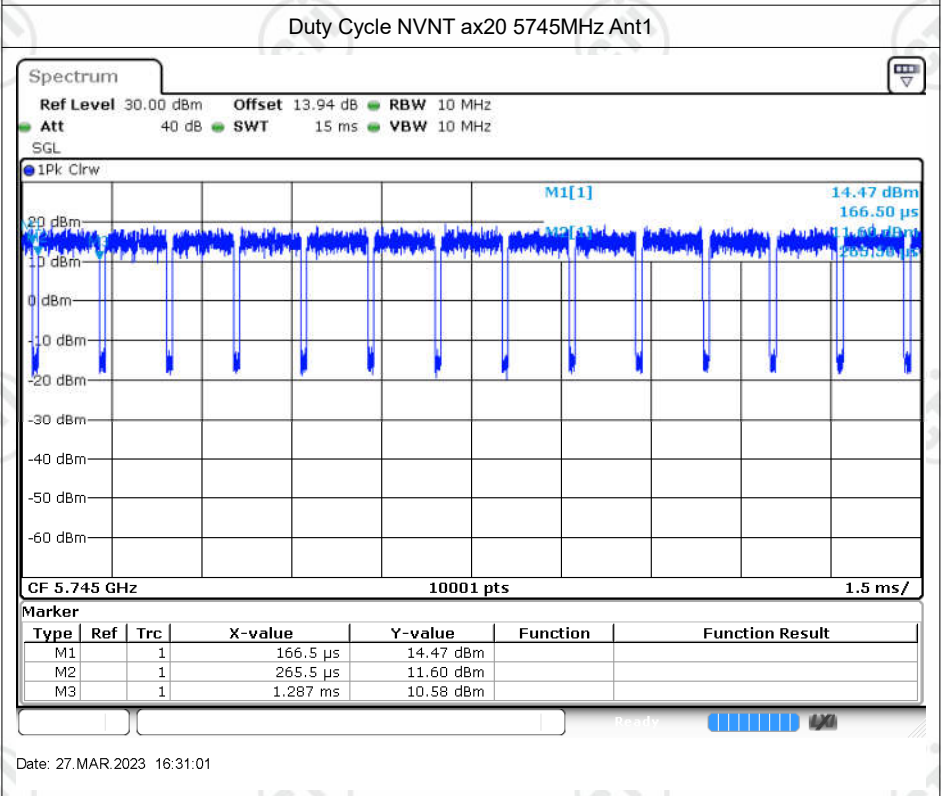


Date: 27. MAR.2023 16:31:01

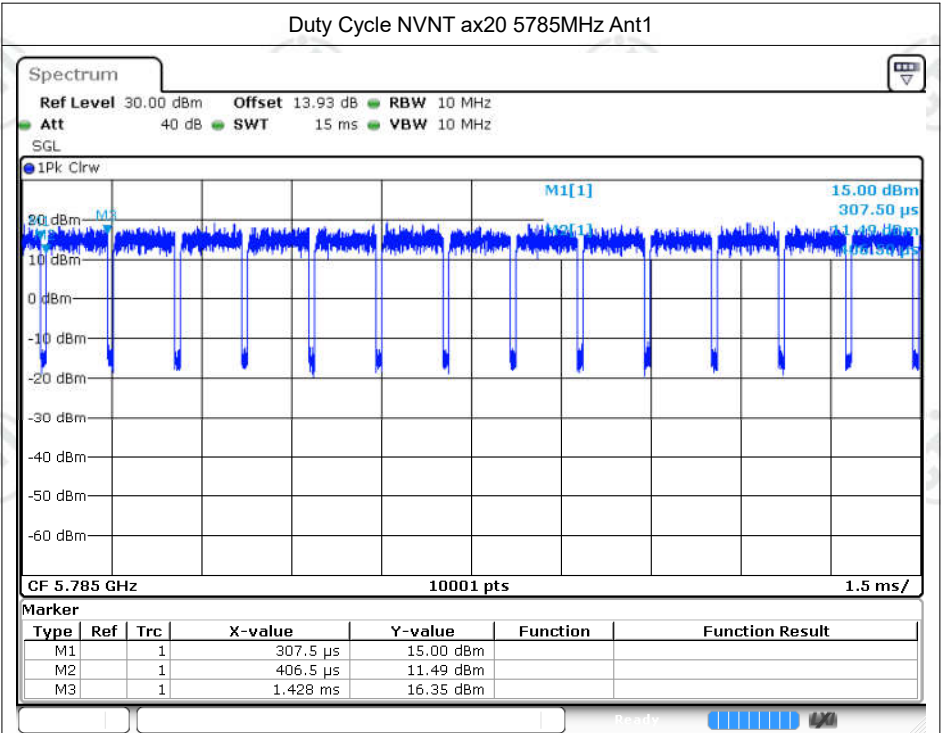


Date: 27. MAR.2023 16:32:53

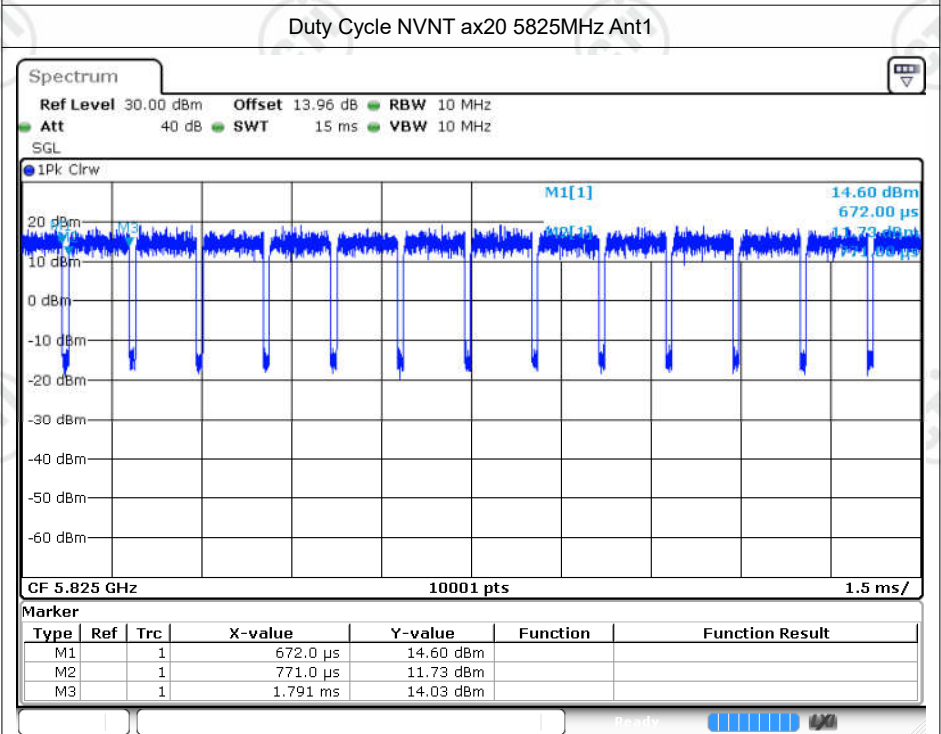


Date: 27. MAR.2023 16:36:55

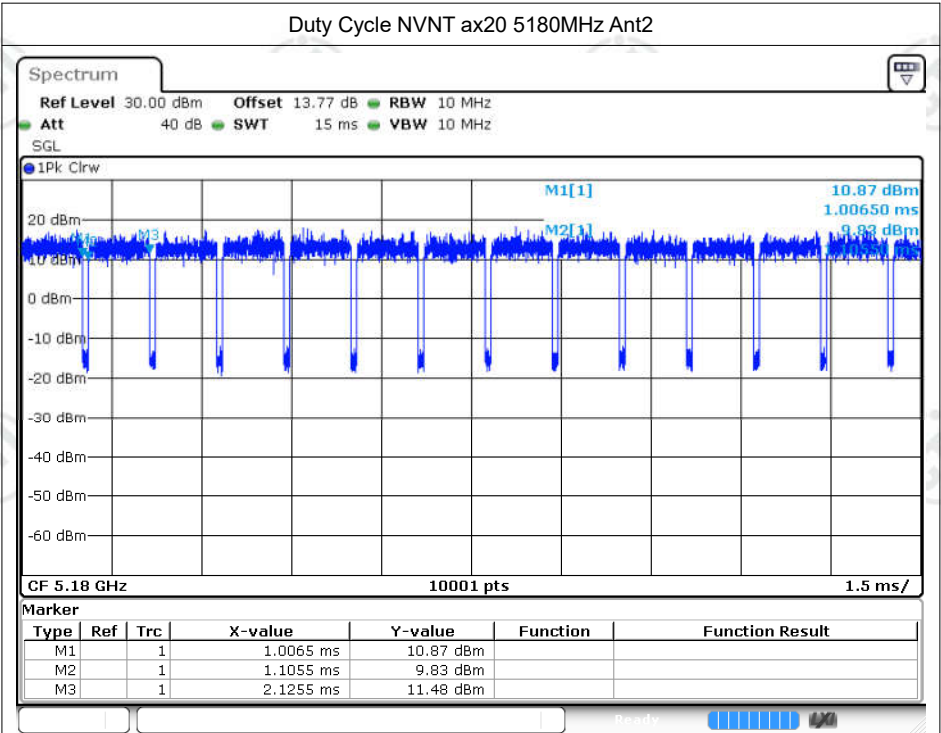


Date: 27. MAR 2023 19:34:12

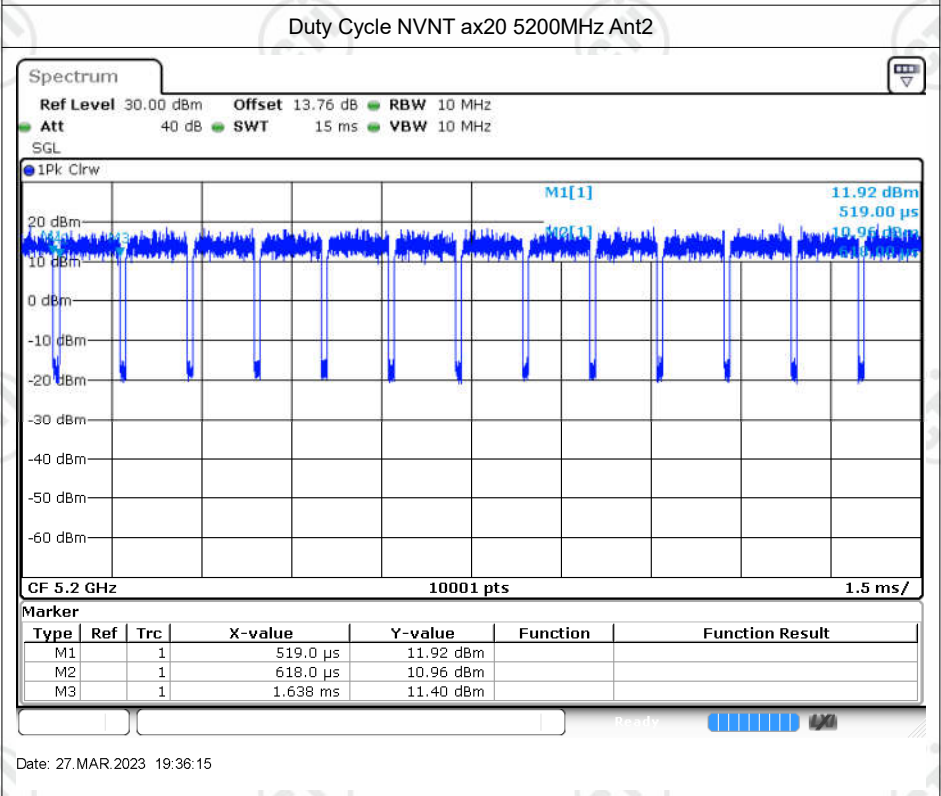


Date: 27. MAR 2023 19:36:15

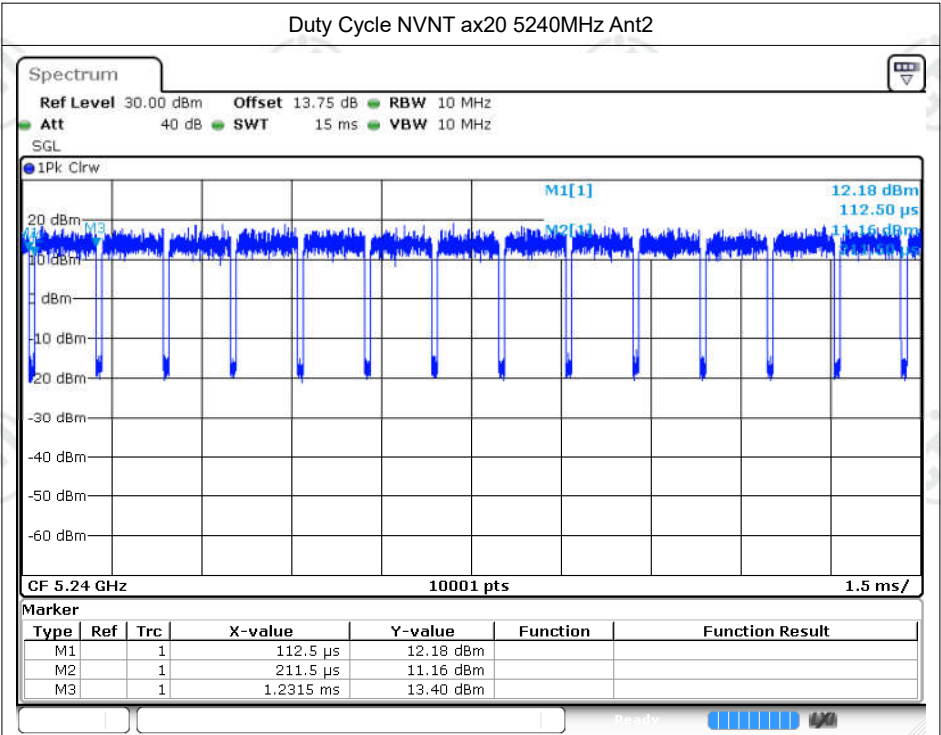


Date: 27. MAR 2023 19:37:30

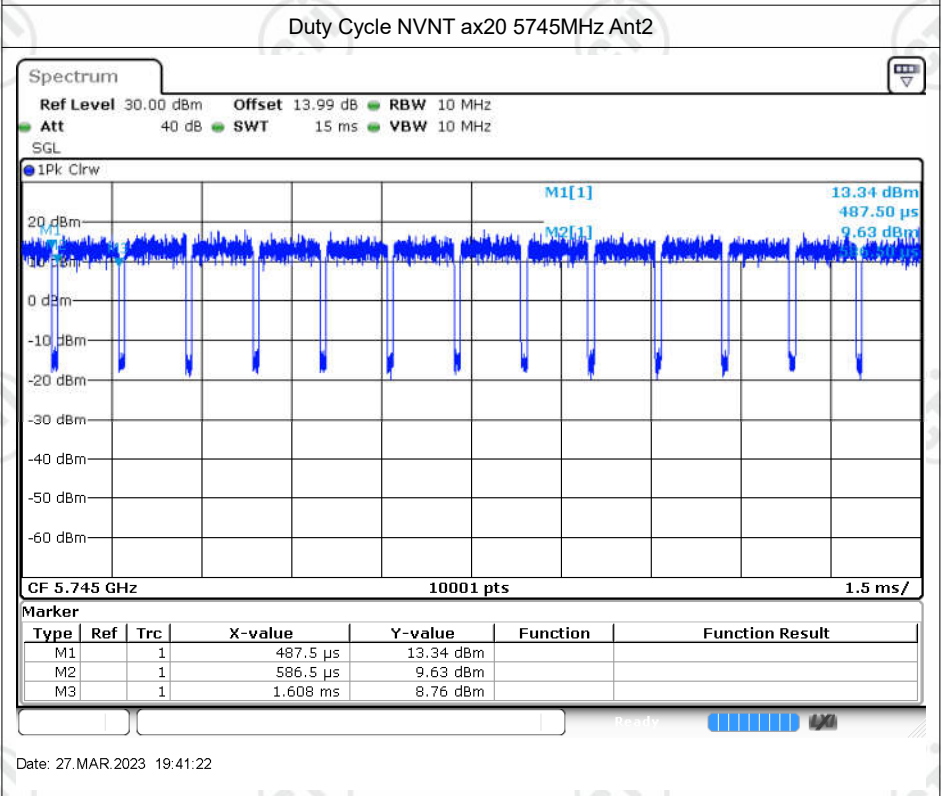


Date: 27. MAR 2023 19:41:22

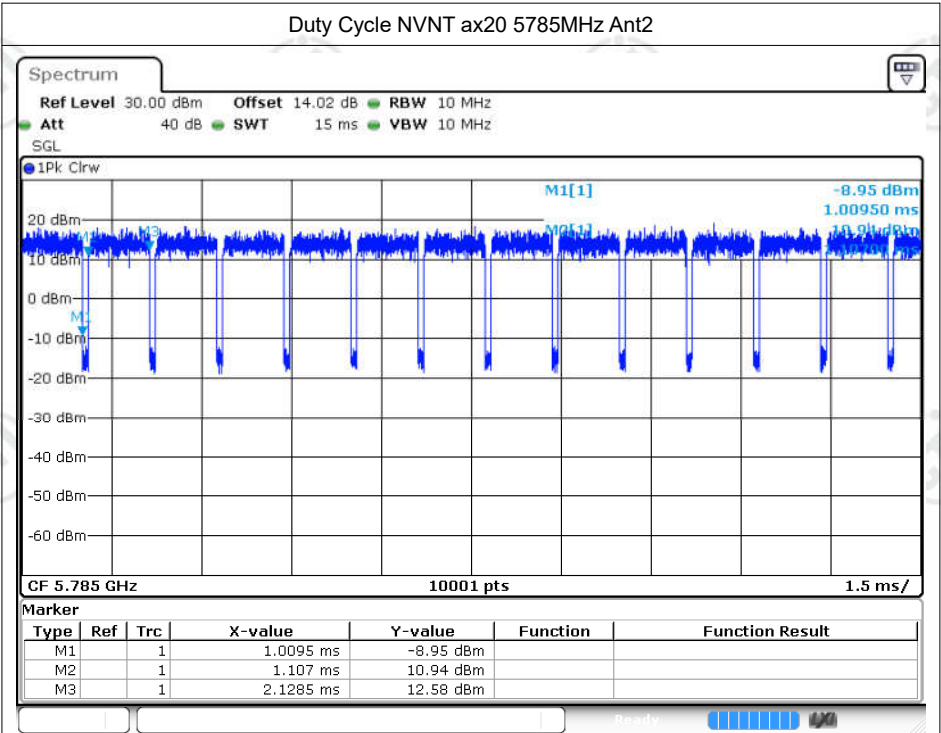


Date: 27. MAR 2023 19:42:54

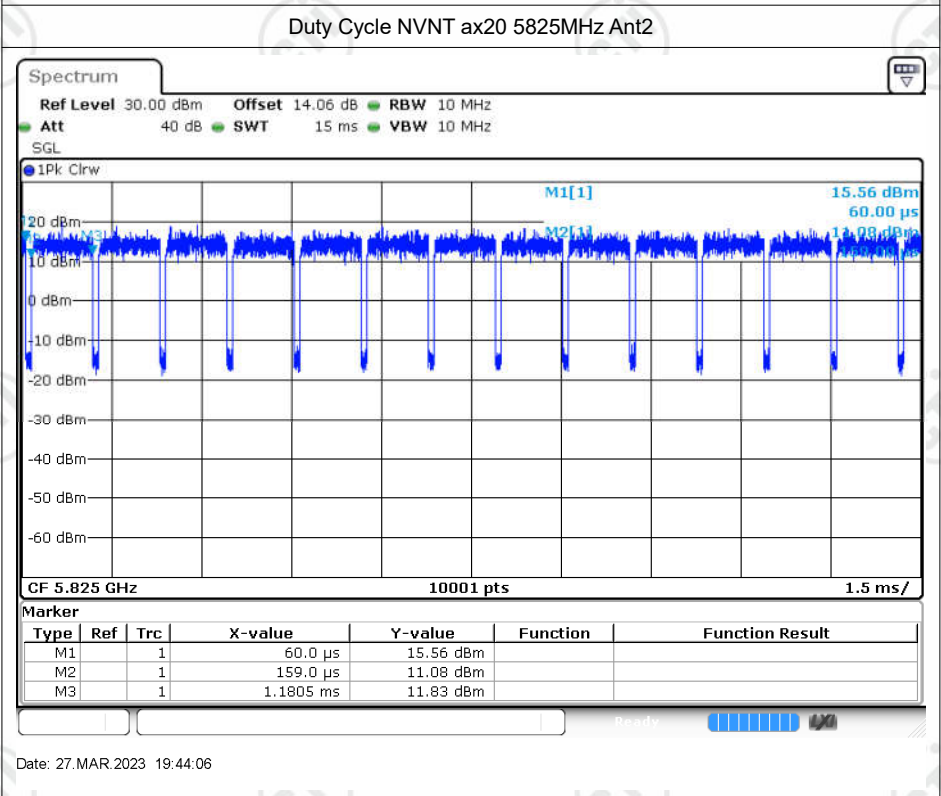


Date: 27. MAR 2023 19:44:06

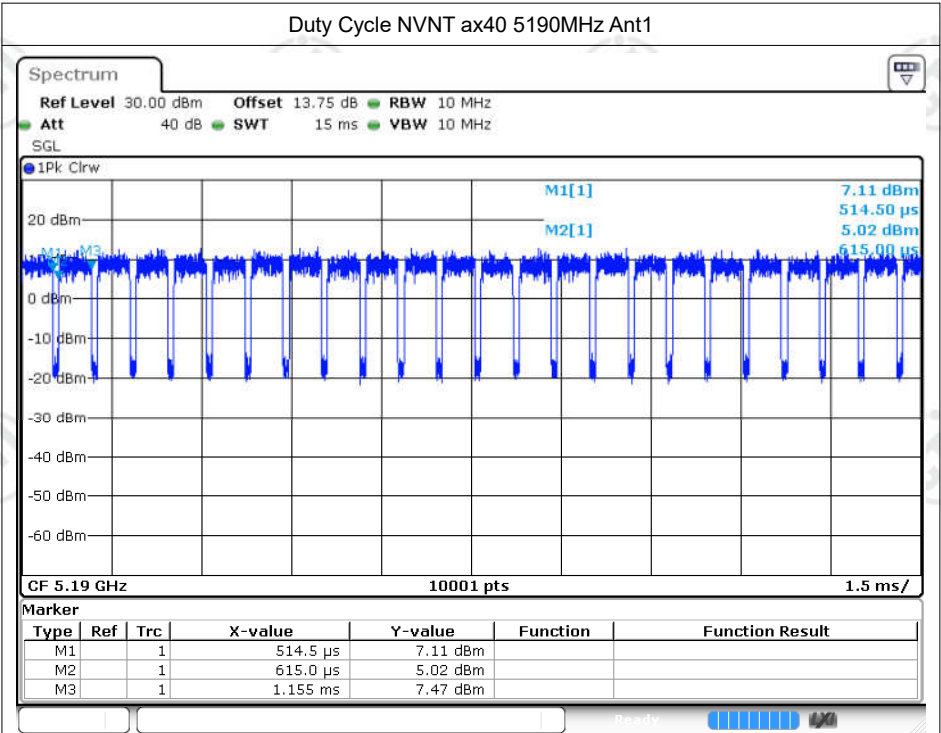


Date: 27. MAR.2023 16:54:14

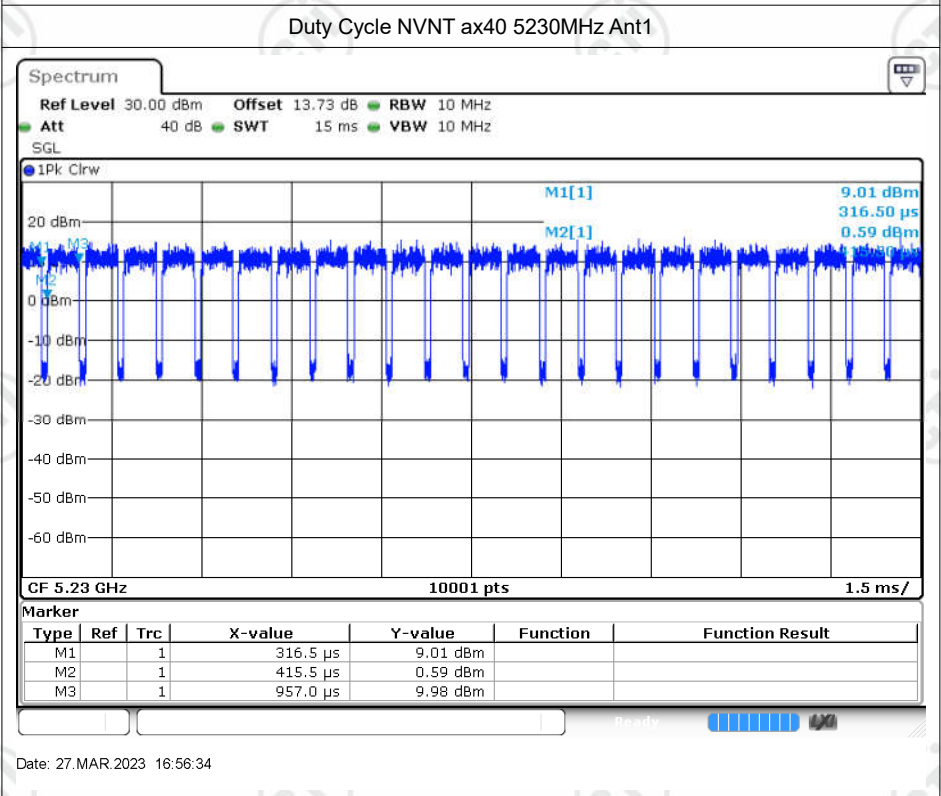


Date: 27. MAR.2023 16:56:34

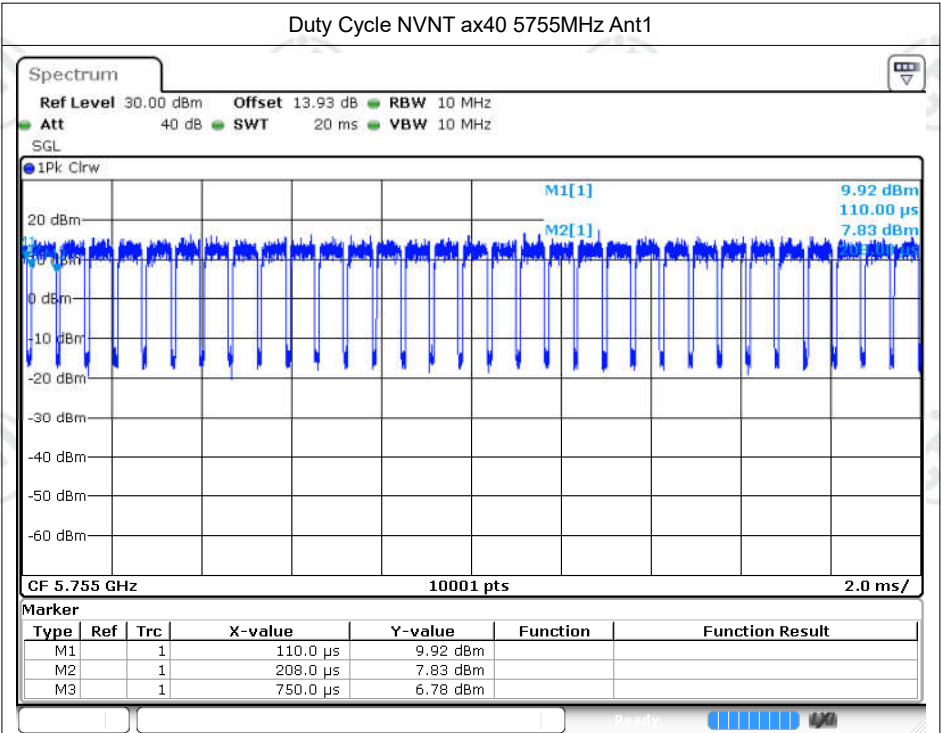


Date: 27. MAR. 2023 16:58:28

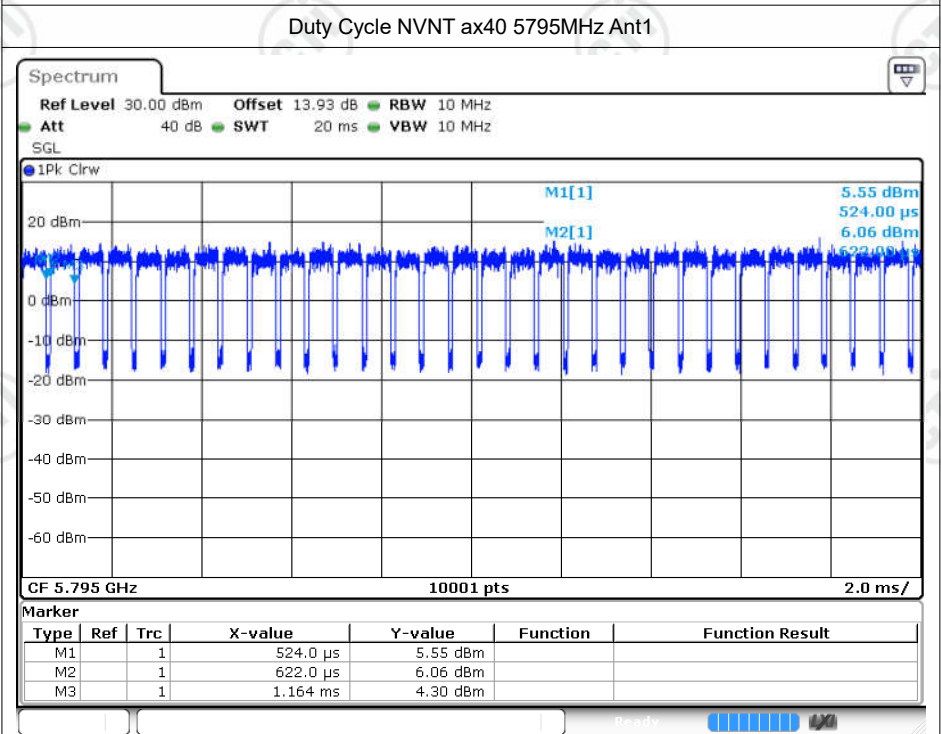


Date: 27. MAR. 2023 17:01:40

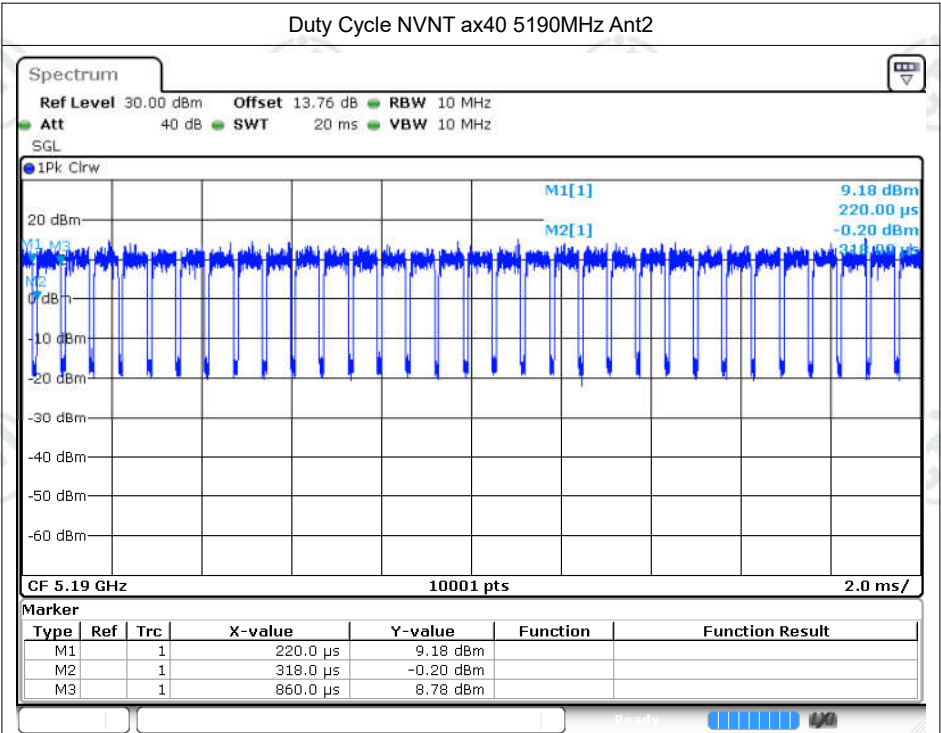


Date: 27. MAR. 2023 19:46:36

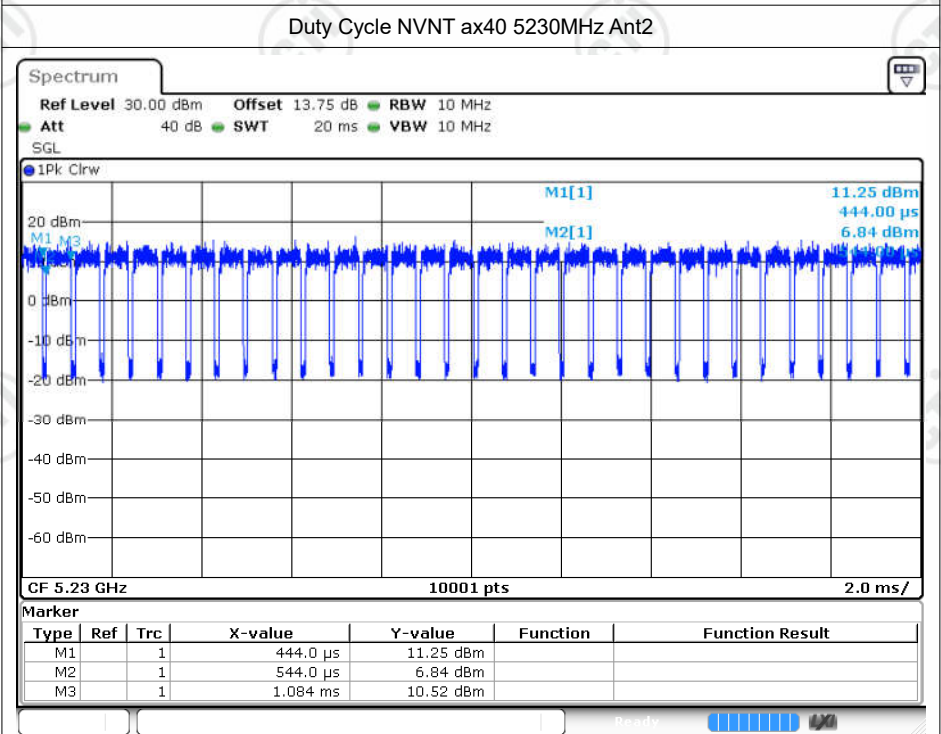


Date: 27. MAR. 2023 19:49:08

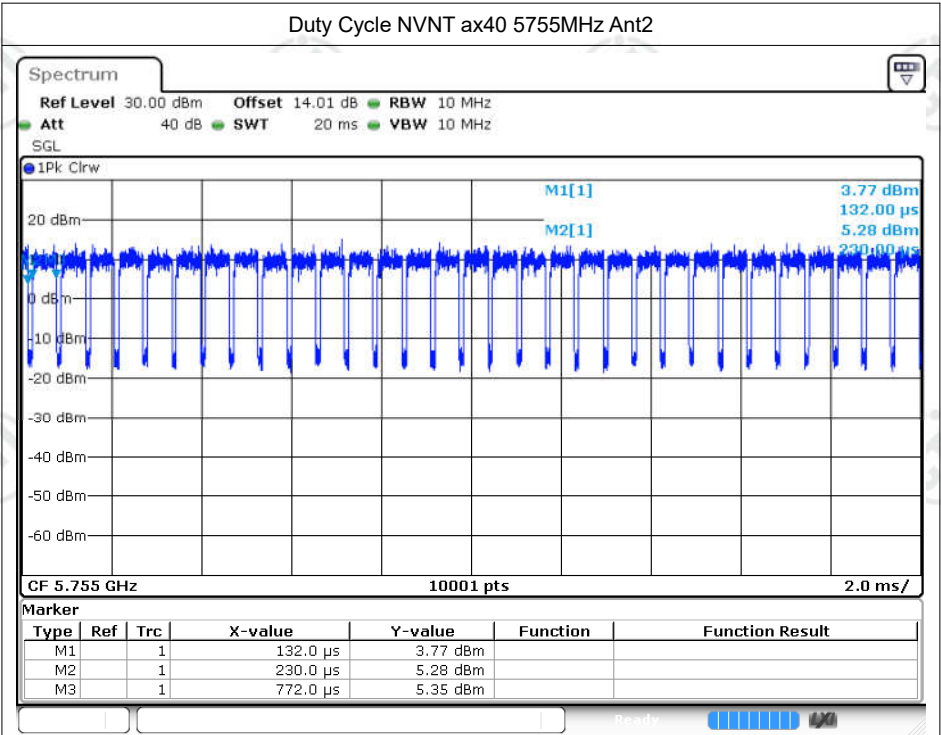


Date: 27. MAR. 2023 19:50:34

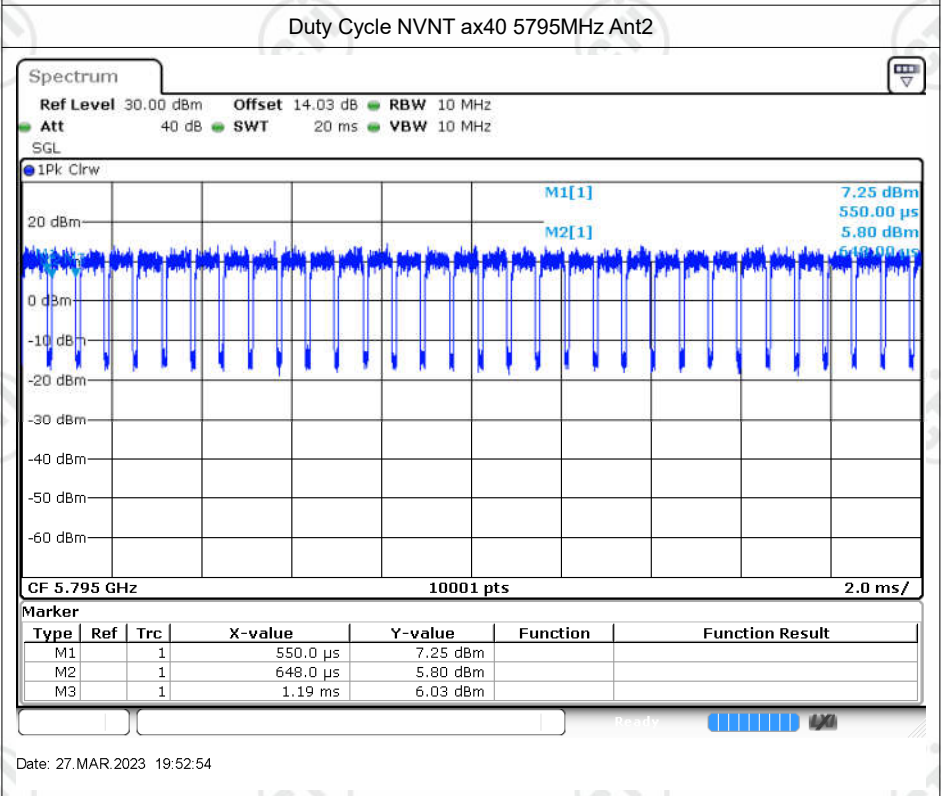


Date: 27. MAR. 2023 19:52:54

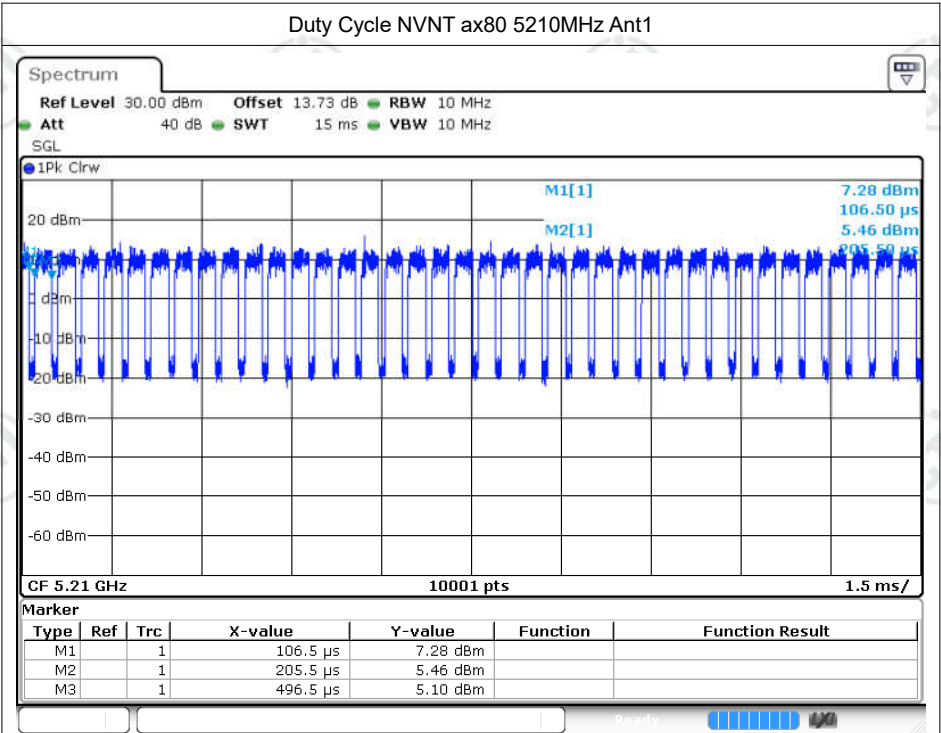


Date: 27. MAR 2023 17:04:38

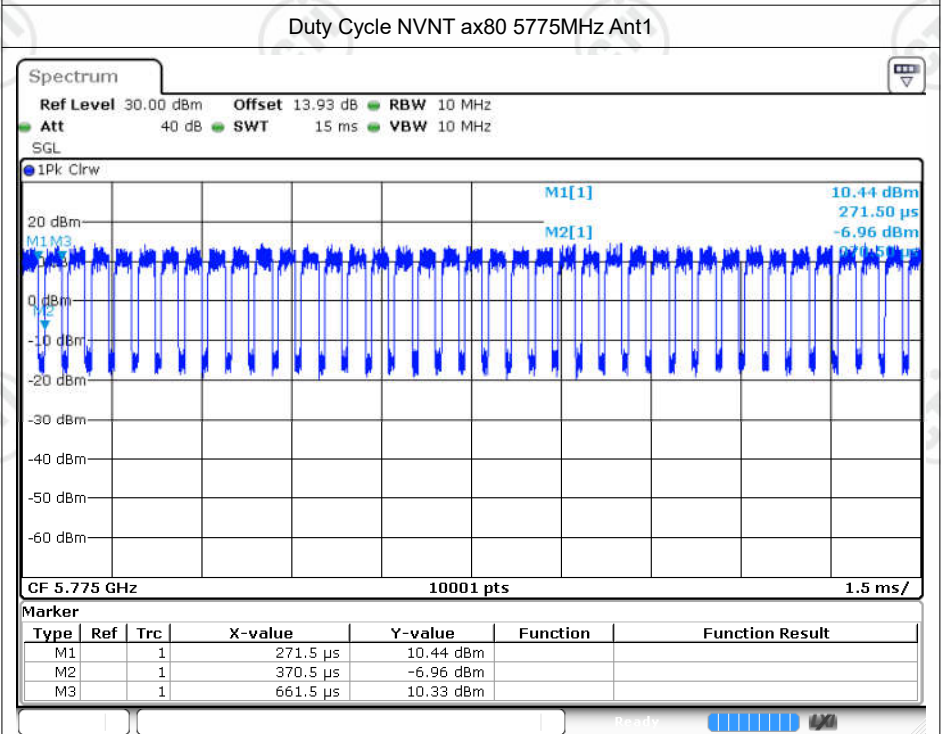

Date: 27. MAR 2023 17:07:20

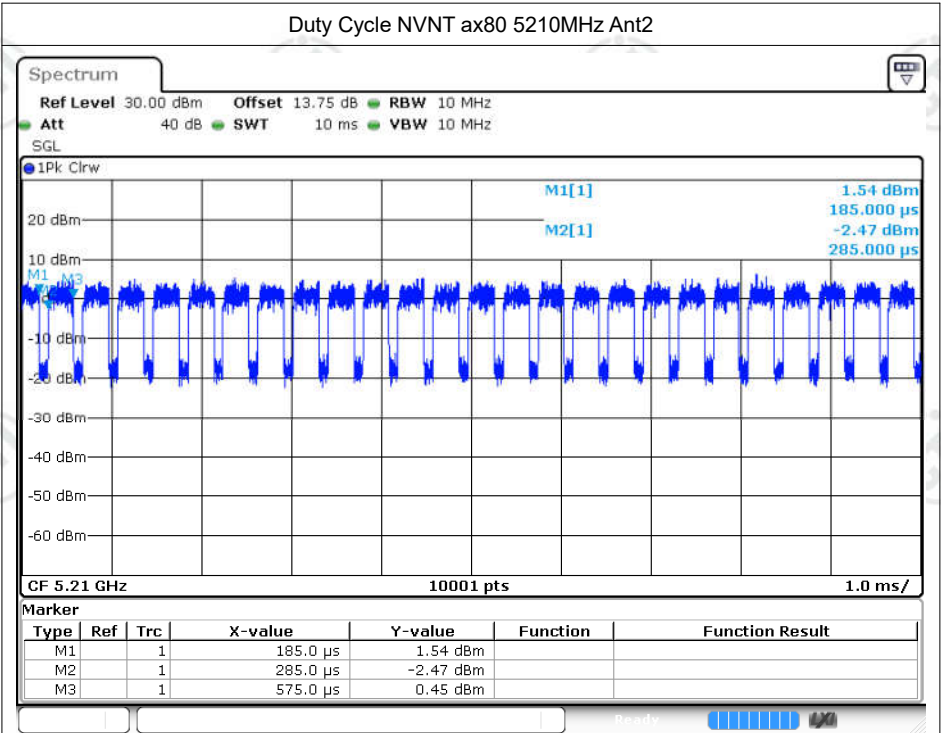

Date: 28.MAR.2023 08:53:56

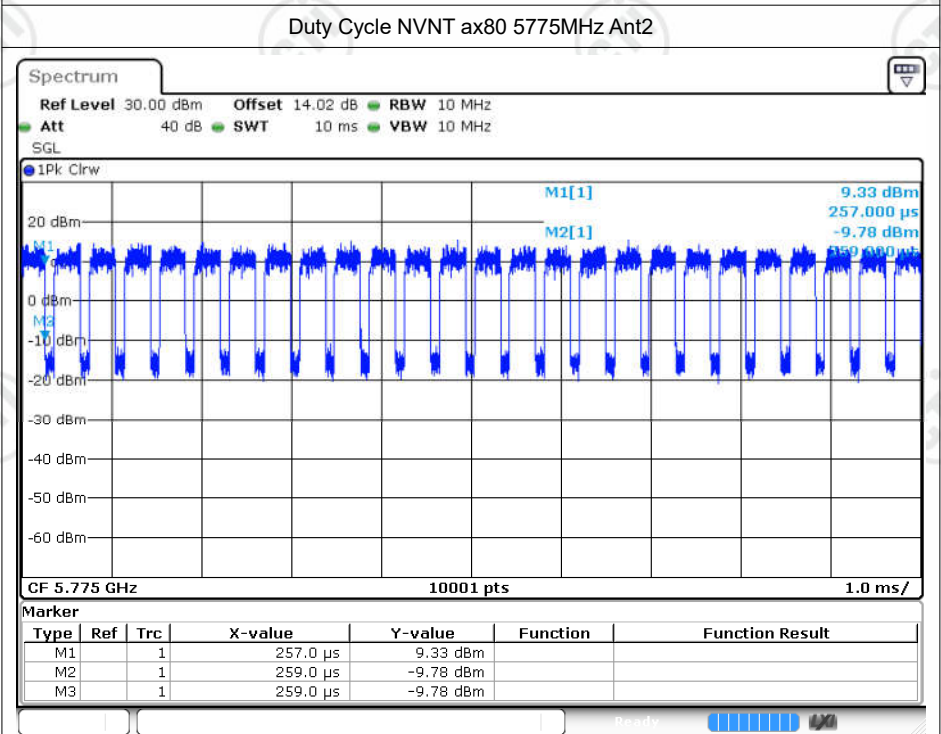

Date: 28.MAR.2023 09:03:05

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	6.45	0.29	6.74	24	Pass
NVNT	a	5200	Ant1	6.09	0.3	6.39	24	Pass
NVNT	a	5240	Ant1	6.53	0.29	6.82	24	Pass
NVNT	a	5745	Ant1	6.9	0.29	7.19	30	Pass
NVNT	a	5785	Ant1	6.55	0.29	6.84	30	Pass
NVNT	a	5825	Ant1	6.92	0.3	7.22	30	Pass
NVNT	a	5180	Ant2	7.15	0.29	7.44	24	Pass
NVNT	a	5200	Ant2	6.29	0.3	6.59	24	Pass
NVNT	a	5240	Ant2	6.39	0.3	6.69	24	Pass
NVNT	a	5745	Ant2	6.35	0.3	6.65	30	Pass
NVNT	a	5785	Ant2	6.13	0.3	6.43	30	Pass
NVNT	a	5825	Ant2	6.54	0.29	6.83	30	Pass
NVNT	n20	5180	Ant1	5.37	0.32	5.69	24	Pass
NVNT	n20	5200	Ant1	5.5	0.32	5.82	24	Pass
NVNT	n20	5240	Ant1	5.47	0.32	5.79	24	Pass
NVNT	n20	5745	Ant1	5.46	0.32	5.78	30	Pass
NVNT	n20	5785	Ant1	5.81	0.32	6.13	30	Pass
NVNT	n20	5825	Ant1	5.77	0.31	6.08	30	Pass
NVNT	n20	5180	Ant2	5.03	0.32	5.35	24	Pass
NVNT	n20	5200	Ant2	5.54	0.32	5.86	24	Pass
NVNT	n20	5240	Ant2	4.9	0.32	5.22	24	Pass
NVNT	n20	5745	Ant2	5.04	0.32	5.36	30	Pass
NVNT	n20	5785	Ant2	5.04	0.32	5.36	30	Pass
NVNT	n20	5825	Ant2	5.39	0.32	5.71	30	Pass
NVNT	n20	5180	Ant1	2.91	0	2.91	24	Pass
NVNT	n20	5180	Ant2	2.17	0	2.17	24	Pass
NVNT	n20	5180	Sum	5.57	0	5.57	24	Pass
NVNT	n20	5200	Ant1	3.49	0	3.49	24	Pass
NVNT	n20	5200	Ant2	1.9	0	1.9	24	Pass
NVNT	n20	5200	Sum	5.78	0	5.78	24	Pass
NVNT	n20	5240	Ant1	3.64	0	3.64	24	Pass
NVNT	n20	5240	Ant2	1.97	0	1.97	24	Pass
NVNT	n20	5240	Sum	5.9	0	5.9	24	Pass
NVNT	n20	5745	Ant1	1.25	0	1.25	30	Pass
NVNT	n20	5745	Ant2	4.11	0	4.11	30	Pass
NVNT	n20	5745	Sum	5.92	0	5.92	30	Pass
NVNT	n20	5785	Ant1	0.25	0	0.25	30	Pass

NVNT	n20	5785	Ant2	3.51	0	3.51	30	Pass
NVNT	n20	5785	Sum	5.19	0	5.19	30	Pass
NVNT	n20	5825	Ant1	0.69	0	0.69	30	Pass
NVNT	n20	5825	Ant2	3.82	0	3.82	30	Pass
NVNT	n20	5825	Sum	5.54	0	5.54	30	Pass
NVNT	n40	5190	Ant1	3.47	0.62	4.09	24	Pass
NVNT	n40	5230	Ant1	3.33	0.62	3.95	24	Pass
NVNT	n40	5755	Ant1	4.59	0.61	5.2	30	Pass
NVNT	n40	5795	Ant1	4.79	0.62	5.41	30	Pass
NVNT	n40	5190	Ant2	3.67	0.62	4.29	24	Pass
NVNT	n40	5230	Ant2	4.03	0.61	4.64	24	Pass
NVNT	n40	5755	Ant2	4.31	0.61	4.92	30	Pass
NVNT	n40	5795	Ant2	4.38	0.61	4.99	30	Pass
NVNT	n40	5190	Ant1	0.55	0	0.55	24	Pass
NVNT	n40	5190	Ant2	-0.44	0	-0.44	24	Pass
NVNT	n40	5190	Sum	3.09	0	3.09	24	Pass
NVNT	n40	5230	Ant1	1.05	0	1.05	24	Pass
NVNT	n40	5230	Ant2	-0.43	0	-0.43	24	Pass
NVNT	n40	5230	Sum	3.38	0	3.38	24	Pass
NVNT	n40	5755	Ant1	-1.7	0	-1.7	30	Pass
NVNT	n40	5755	Ant2	1.51	0	1.51	30	Pass
NVNT	n40	5755	Sum	3.21	0	3.21	30	Pass
NVNT	n40	5795	Ant1	-1.42	0	-1.42	30	Pass
NVNT	n40	5795	Ant2	1.38	0	1.38	30	Pass
NVNT	n40	5795	Sum	3.21	0	3.21	30	Pass
NVNT	ac20	5180	Ant1	4.98	0.32	5.3	24	Pass
NVNT	ac20	5200	Ant1	4.98	0.32	5.3	24	Pass
NVNT	ac20	5240	Ant1	5.19	0.32	5.51	24	Pass
NVNT	ac20	5745	Ant1	5.49	0.32	5.81	30	Pass
NVNT	ac20	5785	Ant1	5.27	0.32	5.59	30	Pass
NVNT	ac20	5825	Ant1	5.53	0.31	5.84	30	Pass
NVNT	ac20	5180	Ant2	4.83	0.31	5.14	24	Pass
NVNT	ac20	5200	Ant2	4.73	0.31	5.04	24	Pass
NVNT	ac20	5240	Ant2	5.19	0.32	5.51	24	Pass
NVNT	ac20	5745	Ant2	5.28	0.31	5.59	30	Pass
NVNT	ac20	5785	Ant2	5.17	0.32	5.49	30	Pass
NVNT	ac20	5825	Ant2	5.21	0.32	5.53	30	Pass
NVNT	ac20	5180	Ant1	3.38	0	3.38	24	Pass
NVNT	ac20	5180	Ant2	0.75	0	0.75	24	Pass
NVNT	ac20	5180	Sum	5.27	0	5.27	24	Pass
NVNT	ac20	5200	Ant1	3.19	0	3.19	24	Pass
NVNT	ac20	5200	Ant2	0.98	0	0.98	24	Pass


NVNT	ac20	5200	Sum	5.23	0	5.23	24	Pass
NVNT	ac20	5240	Ant1	3.7	0	3.7	24	Pass
NVNT	ac20	5240	Ant2	1.3	0	1.3	24	Pass
NVNT	ac20	5240	Sum	5.67	0	5.67	24	Pass
NVNT	ac20	5745	Ant1	1.73	0	1.73	30	Pass
NVNT	ac20	5745	Ant2	1.08	0	1.08	30	Pass
NVNT	ac20	5745	Sum	4.43	0	4.43	30	Pass
NVNT	ac20	5785	Ant1	0.92	0	0.92	30	Pass
NVNT	ac20	5785	Ant2	1.14	0	1.14	30	Pass
NVNT	ac20	5785	Sum	4.04	0	4.04	30	Pass
NVNT	ac20	5825	Ant1	0.5	0	0.5	30	Pass
NVNT	ac20	5825	Ant2	1.7	0	1.7	30	Pass
NVNT	ac20	5825	Sum	4.15	0	4.15	30	Pass
NVNT	ac40	5190	Ant1	3.28	0.61	3.89	24	Pass
NVNT	ac40	5230	Ant1	2.73	0.61	3.34	24	Pass
NVNT	ac40	5755	Ant1	3.74	0.62	4.36	30	Pass
NVNT	ac40	5795	Ant1	3.99	0.6	4.59	30	Pass
NVNT	ac40	5190	Ant2	2.89	0.6	3.49	24	Pass
NVNT	ac40	5230	Ant2	2.98	0.62	3.6	24	Pass
NVNT	ac40	5755	Ant2	3.36	0.62	3.98	30	Pass
NVNT	ac40	5795	Ant2	3.88	0.62	4.5	30	Pass
NVNT	ac40	5190	Ant1	1.4	0	1.4	24	Pass
NVNT	ac40	5190	Ant2	-0.53	0	-0.53	24	Pass
NVNT	ac40	5190	Sum	3.55	0	3.55	24	Pass
NVNT	ac40	5230	Ant1	1.55	0	1.55	24	Pass
NVNT	ac40	5230	Ant2	-0.44	0	-0.44	24	Pass
NVNT	ac40	5230	Sum	3.68	0	3.68	24	Pass
NVNT	ac40	5755	Ant1	0.29	0	0.29	30	Pass
NVNT	ac40	5755	Ant2	-0.03	0	-0.03	30	Pass
NVNT	ac40	5755	Sum	3.14	0	3.14	30	Pass
NVNT	ac40	5795	Ant1	0.01	0	0.01	30	Pass
NVNT	ac40	5795	Ant2	0.1	0	0.1	30	Pass
NVNT	ac40	5795	Sum	3.07	0	3.07	30	Pass
NVNT	ac80	5210	Ant1	1.9	1.16	3.06	24	Pass
NVNT	ac80	5775	Ant1	2.85	1.17	4.02	30	Pass
NVNT	ac80	5210	Ant2	2.18	1.16	3.34	24	Pass
NVNT	ac80	5775	Ant2	2.29	1.16	3.45	30	Pass
NVNT	ac80	5210	Ant1	-0.79	0	-0.79	24	Pass
NVNT	ac80	5210	Ant2	-2.89	0	-2.89	24	Pass
NVNT	ac80	5210	Sum	1.3	0	1.3	24	Pass
NVNT	ac80	5775	Ant1	-1.22	0	-1.22	30	Pass
NVNT	ac80	5775	Ant2	-1.29	0	-1.29	30	Pass

NVNT	ac80	5775	Sum	1.76	0	1.76	30	Pass
NVNT	ax20	5180	Ant1	5.3	0.4	5.7	24	Pass
NVNT	ax20	5200	Ant1	5.09	0.4	5.49	24	Pass
NVNT	ax20	5240	Ant1	5.19	0.4	5.59	24	Pass
NVNT	ax20	5745	Ant1	5.01	0.4	5.41	30	Pass
NVNT	ax20	5785	Ant1	5.27	0.4	5.67	30	Pass
NVNT	ax20	5825	Ant1	4.79	0.4	5.19	30	Pass
NVNT	ax20	5180	Ant2	5.16	0.4	5.56	24	Pass
NVNT	ax20	5200	Ant2	4.93	0.4	5.33	24	Pass
NVNT	ax20	5240	Ant2	4.73	0.4	5.13	24	Pass
NVNT	ax20	5745	Ant2	5.58	0.4	5.98	30	Pass
NVNT	ax20	5785	Ant2	5.34	0.4	5.74	30	Pass
NVNT	ax20	5825	Ant2	5.57	0.4	5.97	30	Pass
NVNT	ax20	5180	Ant1	2.53	0	2.53	24	Pass
NVNT	ax20	5180	Ant2	2.07	0	2.07	24	Pass
NVNT	ax20	5180	Sum	5.32	0	5.32	24	Pass
NVNT	ax20	5200	Ant1	3.04	0	3.04	24	Pass
NVNT	ax20	5200	Ant2	2.27	0	2.27	24	Pass
NVNT	ax20	5200	Sum	5.68	0	5.68	24	Pass
NVNT	ax20	5240	Ant1	3.78	0	3.78	24	Pass
NVNT	ax20	5240	Ant2	1.55	0	1.55	24	Pass
NVNT	ax20	5240	Sum	5.82	0	5.82	24	Pass
NVNT	ax20	5745	Ant1	0.12	0	0.12	30	Pass
NVNT	ax20	5745	Ant2	3.58	0	3.58	30	Pass
NVNT	ax20	5745	Sum	5.2	0	5.2	30	Pass
NVNT	ax20	5785	Ant1	0.52	0	0.52	30	Pass
NVNT	ax20	5785	Ant2	3.5	0	3.5	30	Pass
NVNT	ax20	5785	Sum	5.27	0	5.27	30	Pass
NVNT	ax20	5825	Ant1	0.49	0	0.49	30	Pass
NVNT	ax20	5825	Ant2	3.97	0	3.97	30	Pass
NVNT	ax20	5825	Sum	5.58	0	5.58	30	Pass
NVNT	ax40	5190	Ant1	3.13	0.74	3.87	24	Pass
NVNT	ax40	5230	Ant1	3.16	0.73	3.89	24	Pass
NVNT	ax40	5755	Ant1	3.46	0.72	4.18	30	Pass
NVNT	ax40	5795	Ant1	3.93	0.72	4.65	30	Pass
NVNT	ax40	5190	Ant2	3.99	0.72	4.71	24	Pass
NVNT	ax40	5230	Ant2	4.65	0.74	5.39	24	Pass
NVNT	ax40	5755	Ant2	3.39	0.72	4.11	30	Pass
NVNT	ax40	5795	Ant2	3.43	0.72	4.15	30	Pass
NVNT	ax40	5190	Ant1	1.46	0	1.46	24	Pass
NVNT	ax40	5190	Ant2	0.02	0	0.02	24	Pass
NVNT	ax40	5190	Sum	3.81	0	3.81	24	Pass


NVNT	ax40	5230	Ant1	1.92	0	1.92	24	Pass
NVNT	ax40	5230	Ant2	-0.29	0	-0.29	24	Pass
NVNT	ax40	5230	Sum	3.96	0	3.96	24	Pass
NVNT	ax40	5755	Ant1	-0.19	0	-0.19	30	Pass
NVNT	ax40	5755	Ant2	1.21	0	1.21	30	Pass
NVNT	ax40	5755	Sum	3.58	0	3.58	30	Pass
NVNT	ax40	5795	Ant1	-0.81	0	-0.81	30	Pass
NVNT	ax40	5795	Ant2	1.82	0	1.82	30	Pass
NVNT	ax40	5795	Sum	3.71	0	3.71	30	Pass
NVNT	ax80	5210	Ant1	2.17	1.27	3.44	24	Pass
NVNT	ax80	5775	Ant1	2.39	1.27	3.66	30	Pass
NVNT	ax80	5210	Ant2	0.93	1.29	2.22	24	Pass
NVNT	ax80	5775	Ant2	2.94	0	2.94	30	Pass
NVNT	ax80	5210	Ant1	-1.25	0	-1.25	24	Pass
NVNT	ax80	5210	Ant2	-2.34	0	-2.34	24	Pass
NVNT	ax80	5210	Sum	1.25	0	1.25	24	Pass
NVNT	ax80	5775	Ant1	-2.57	0	-2.57	30	Pass
NVNT	ax80	5775	Ant2	-0.05	0	-0.05	30	Pass
NVNT	ax80	5775	Sum	1.88	0	1.88	30	Pass

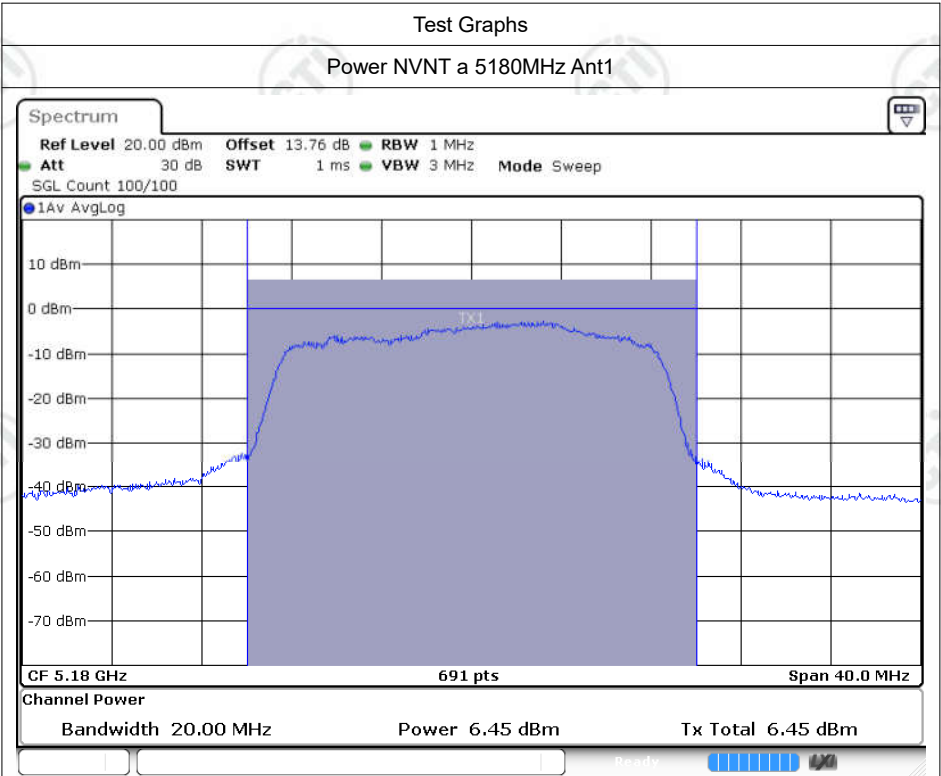


Date: 27.MAR.2023 17:26:58

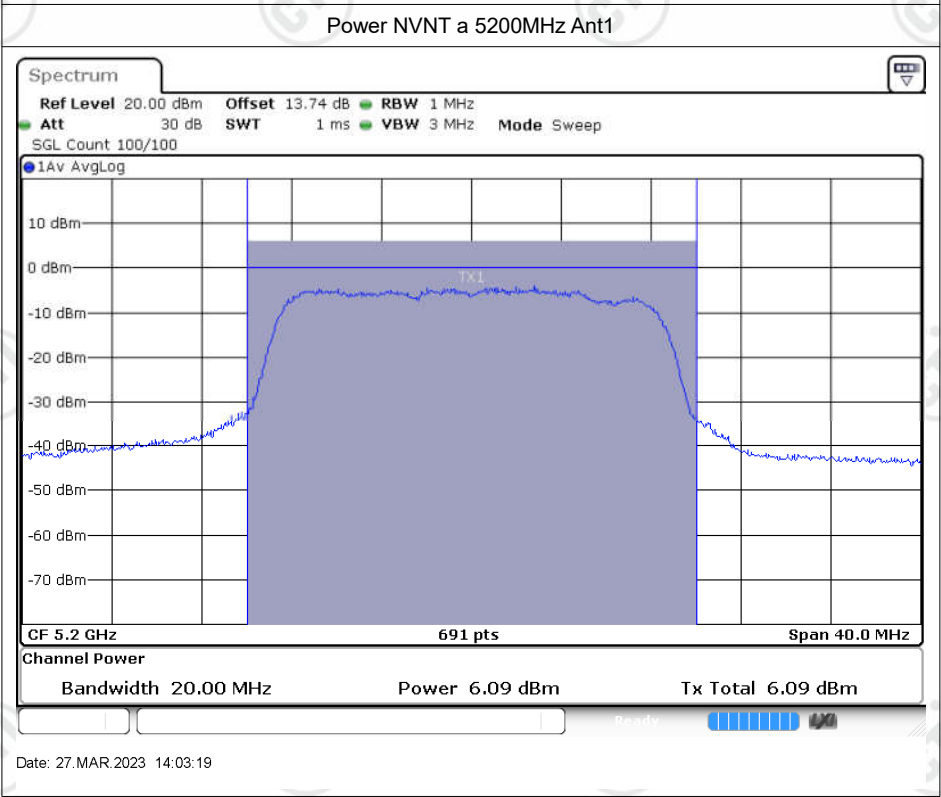


Date: 27.MAR.2023 14:03:19

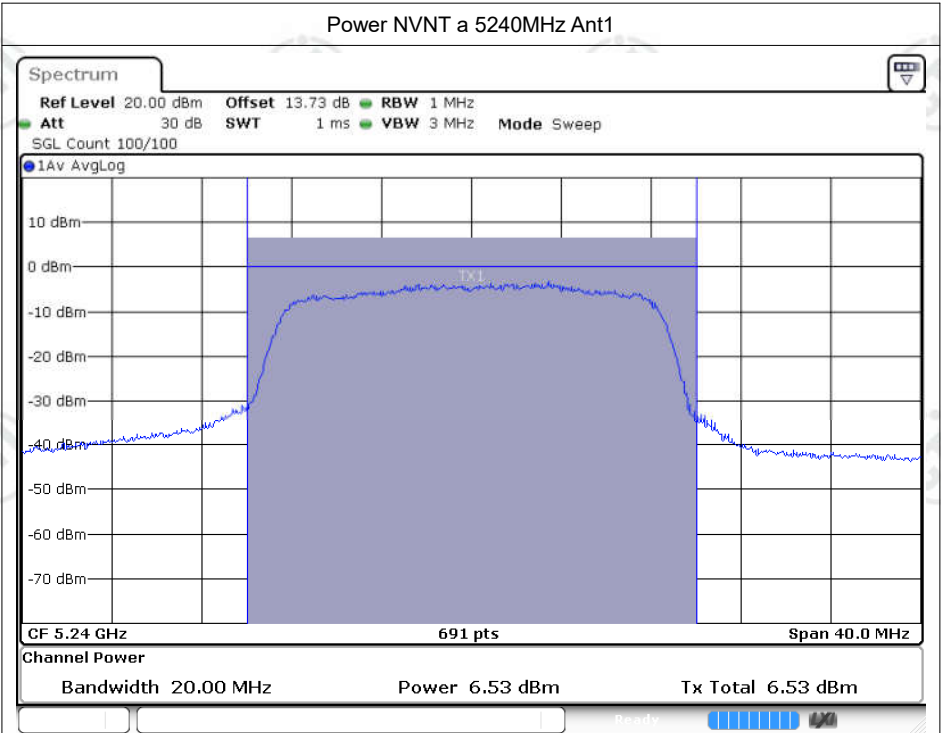


Date: 27. MAR. 2023 14:05:07

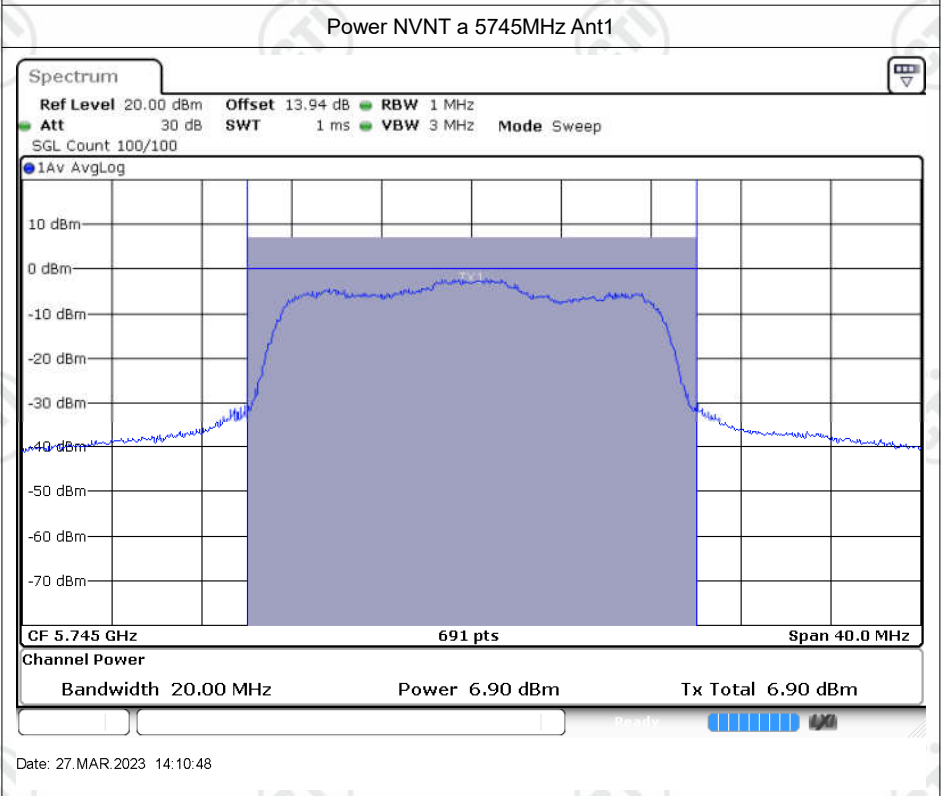


Date: 27. MAR. 2023 14:10:48

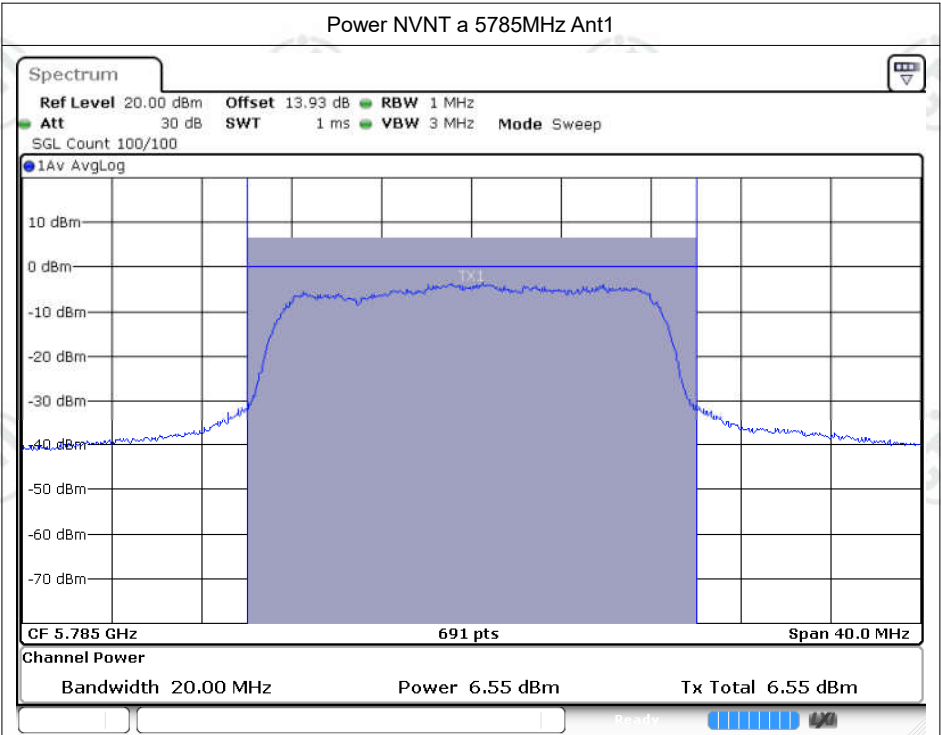


Date: 27. MAR. 2023 14:14:59

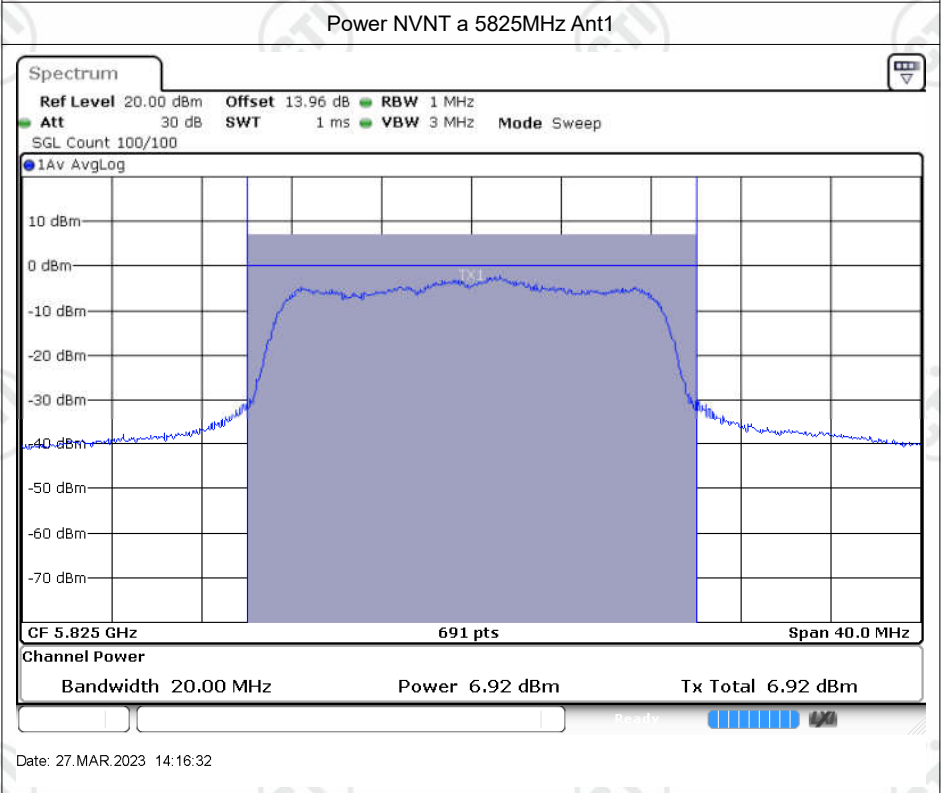


Date: 27. MAR. 2023 14:16:32

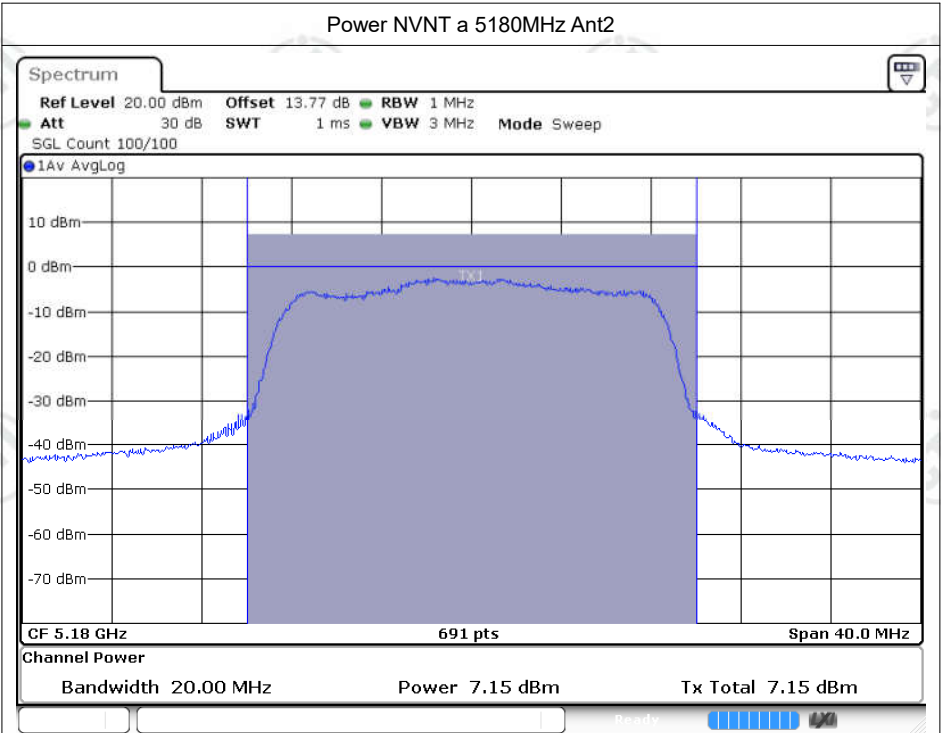


Date: 27. MAR. 2023 17:37:26

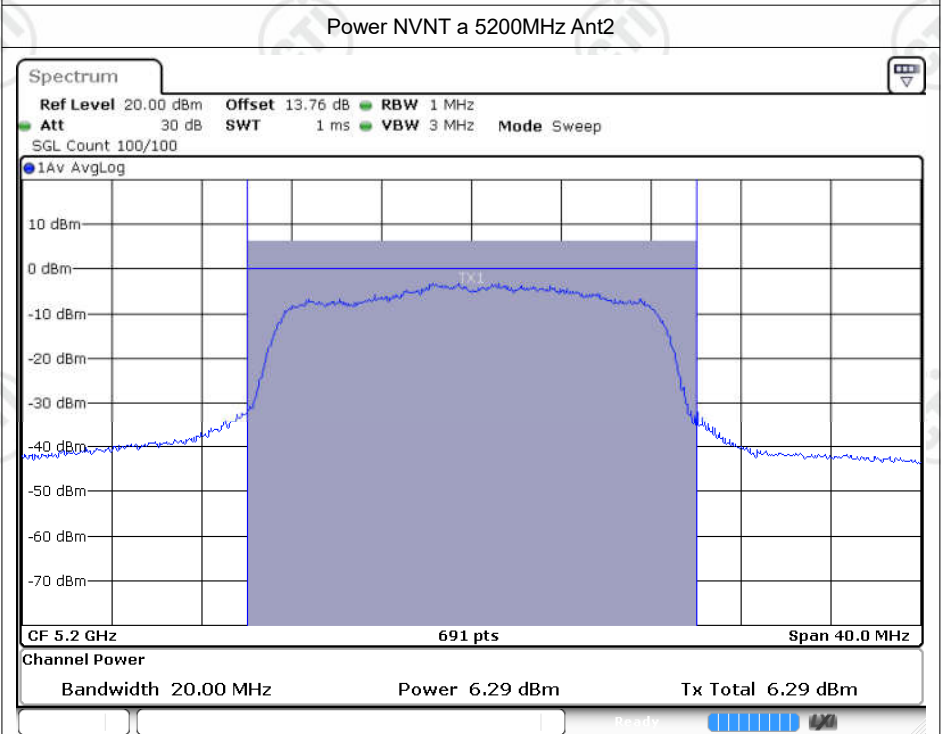


Date: 27. MAR. 2023 17:40:45

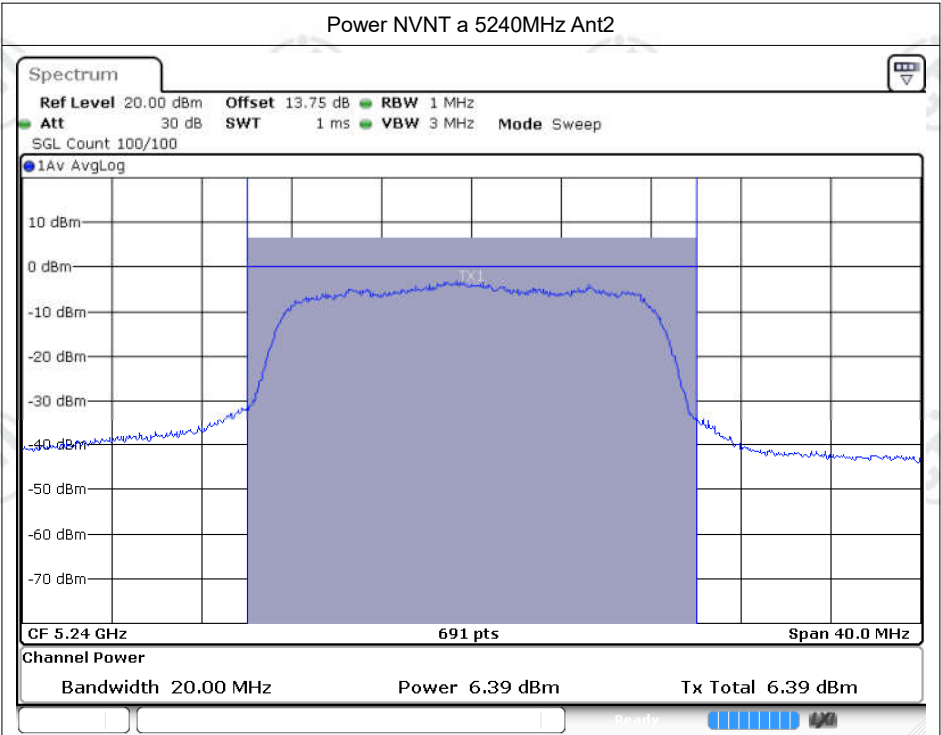


Date: 27. MAR. 2023 18:05:34

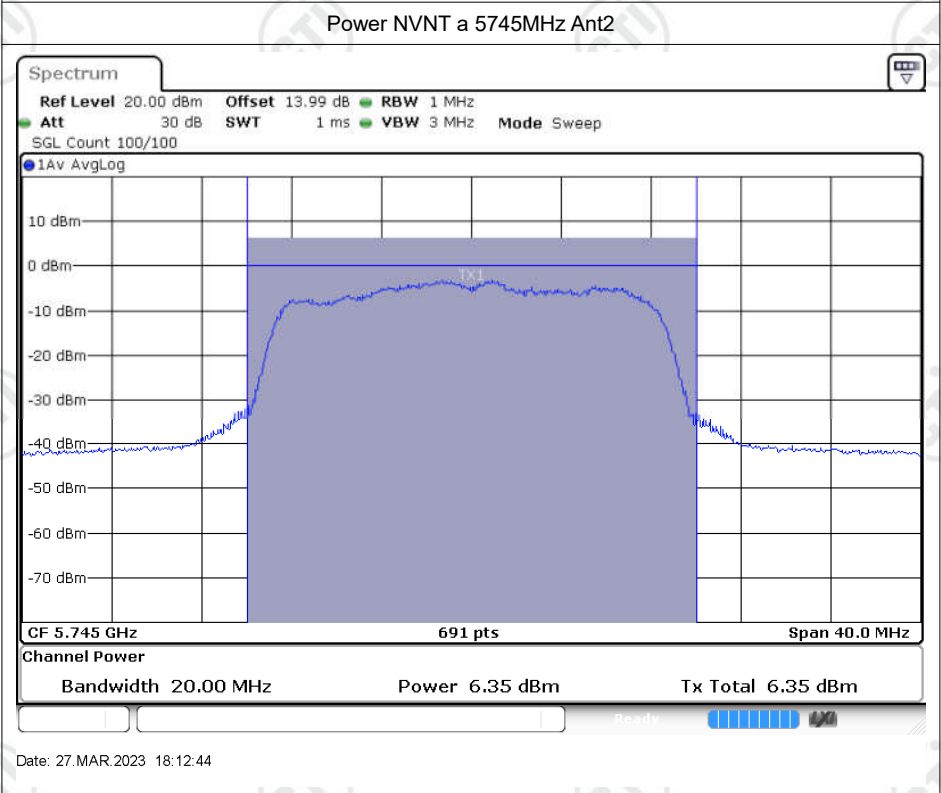



Date: 27. MAR. 2023 18:12:44

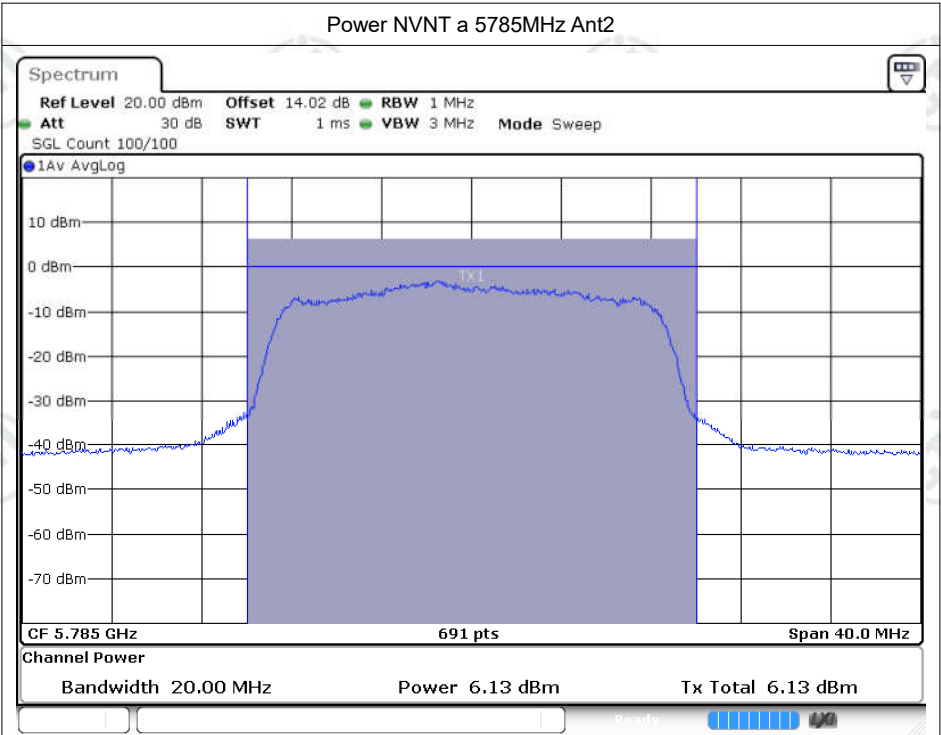


Date: 27. MAR. 2023 18:14:35

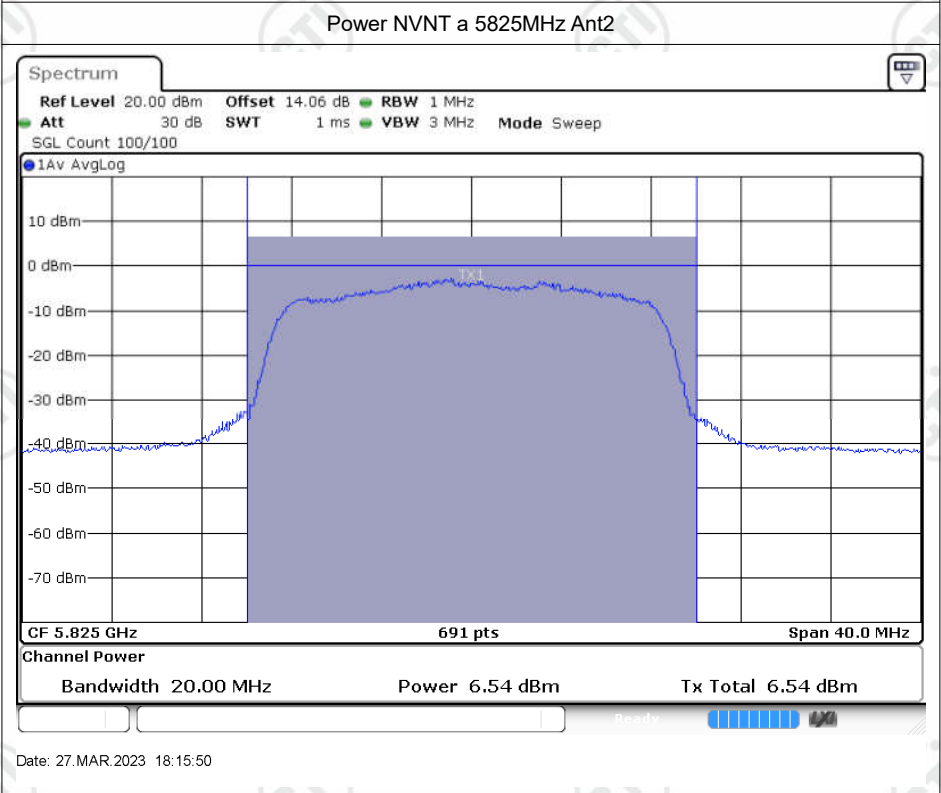


Date: 27. MAR. 2023 18:15:50

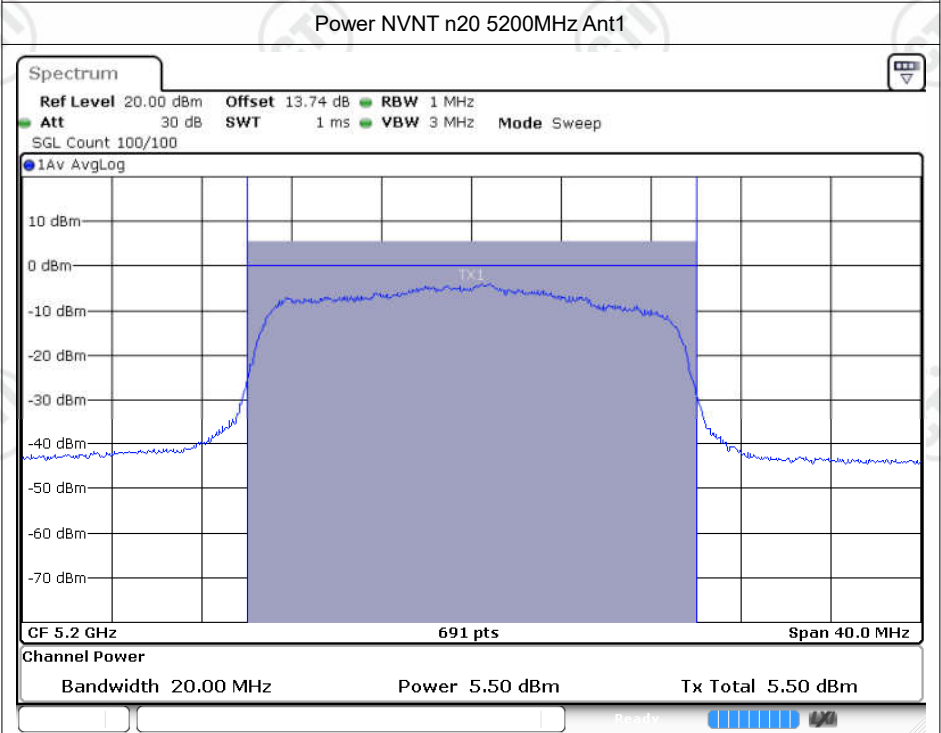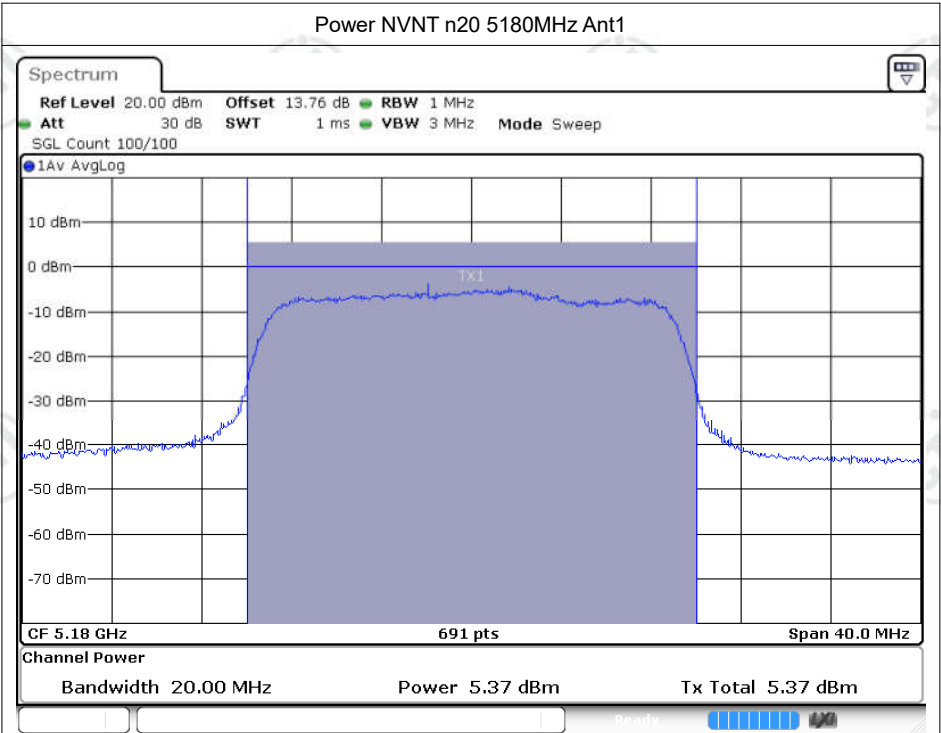


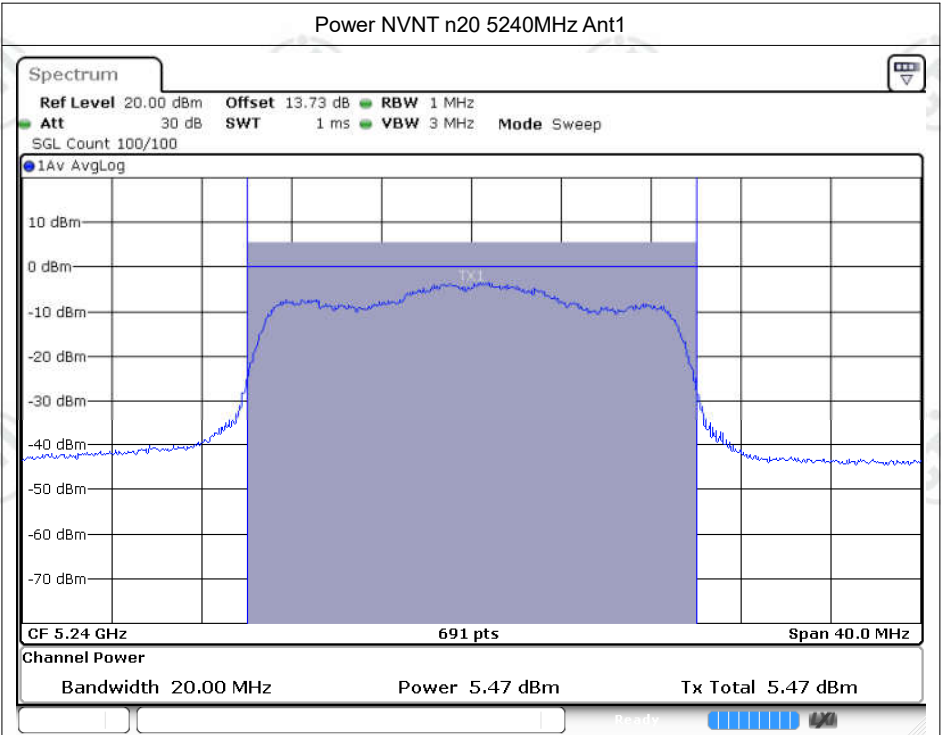


Date: 27. MAR. 2023 14:31:23

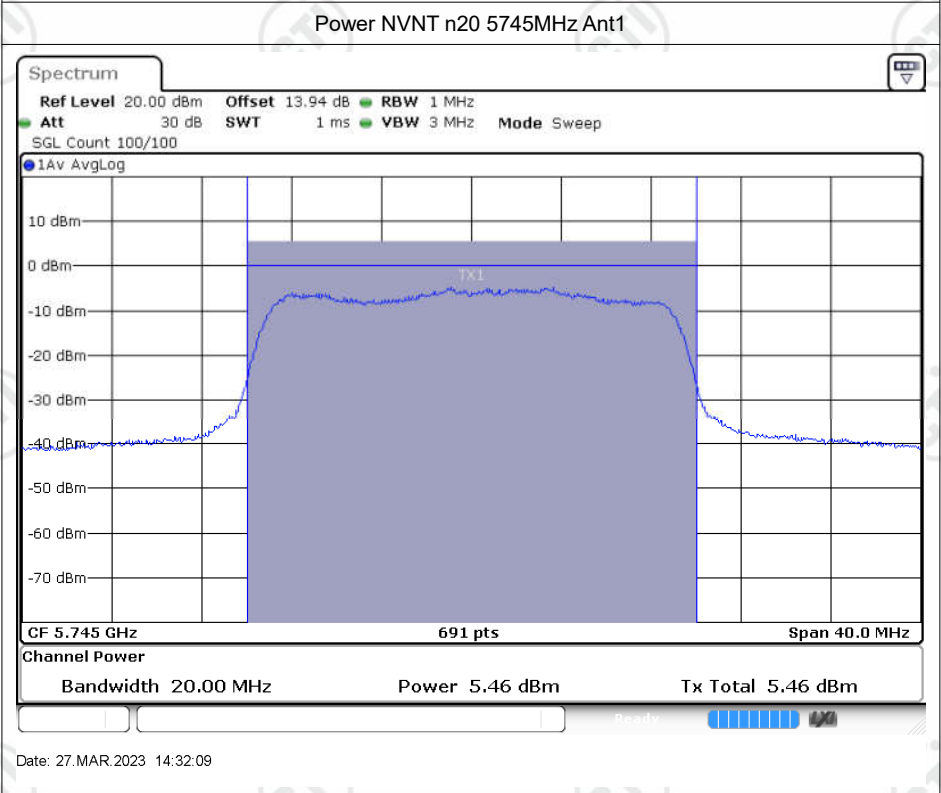


Date: 27. MAR. 2023 14:32:09

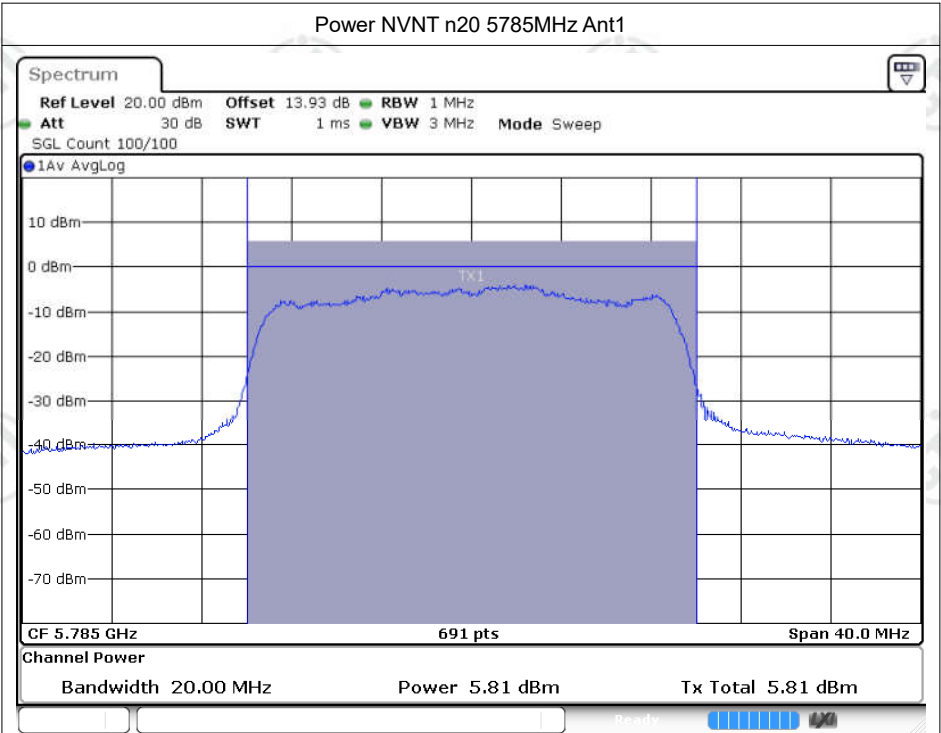


Date: 27. MAR. 2023 14:41:13

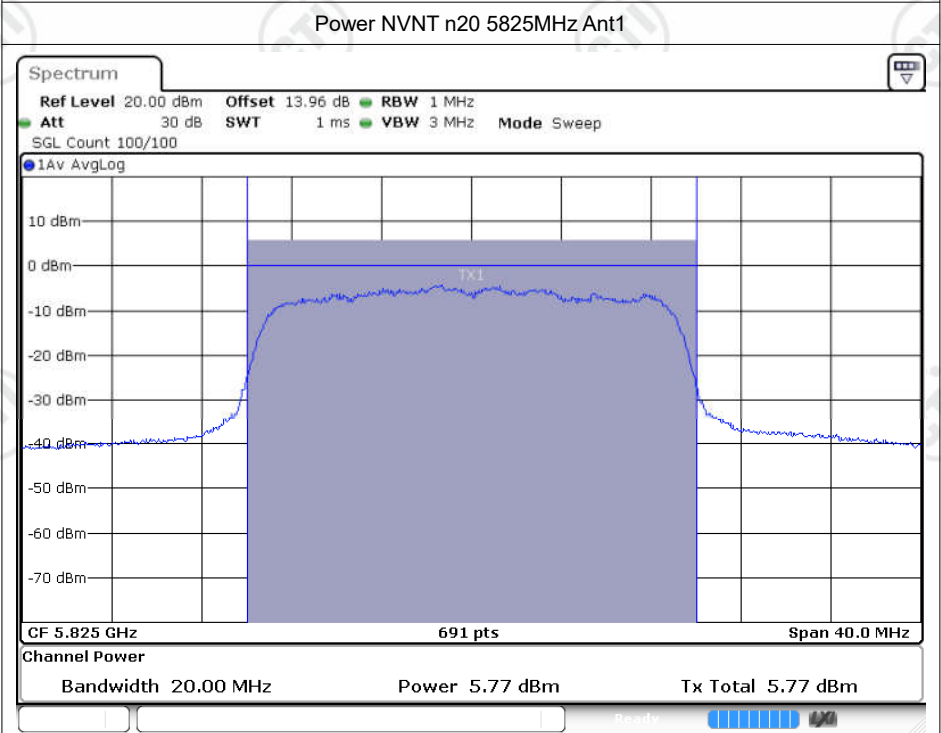



Date: 27. MAR. 2023 14:42:36

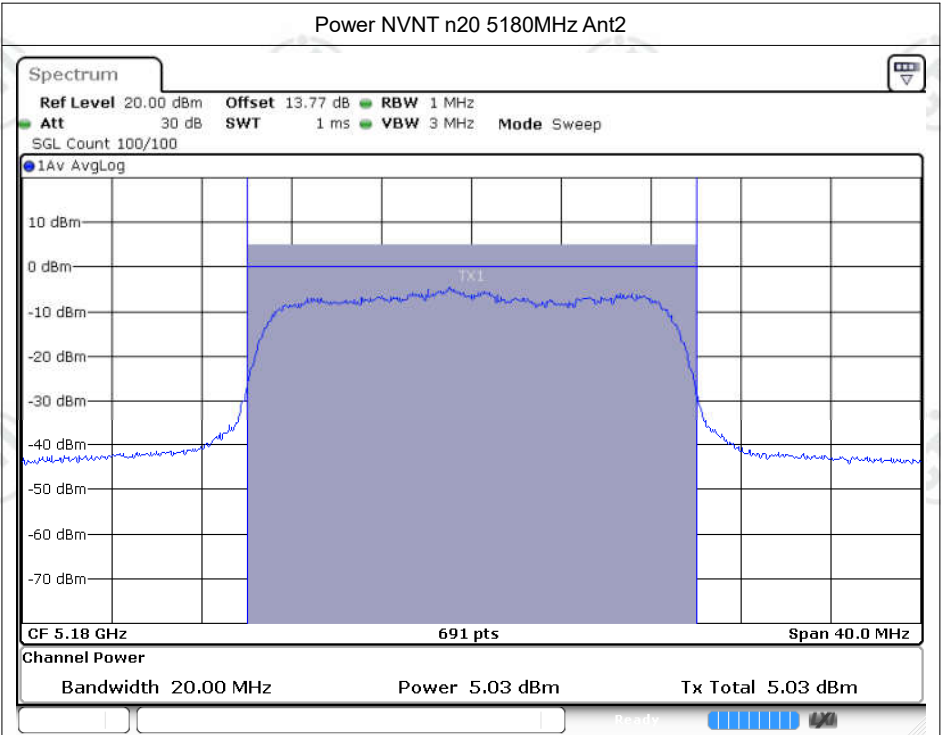


Date: 27. MAR. 2023 18:17:06

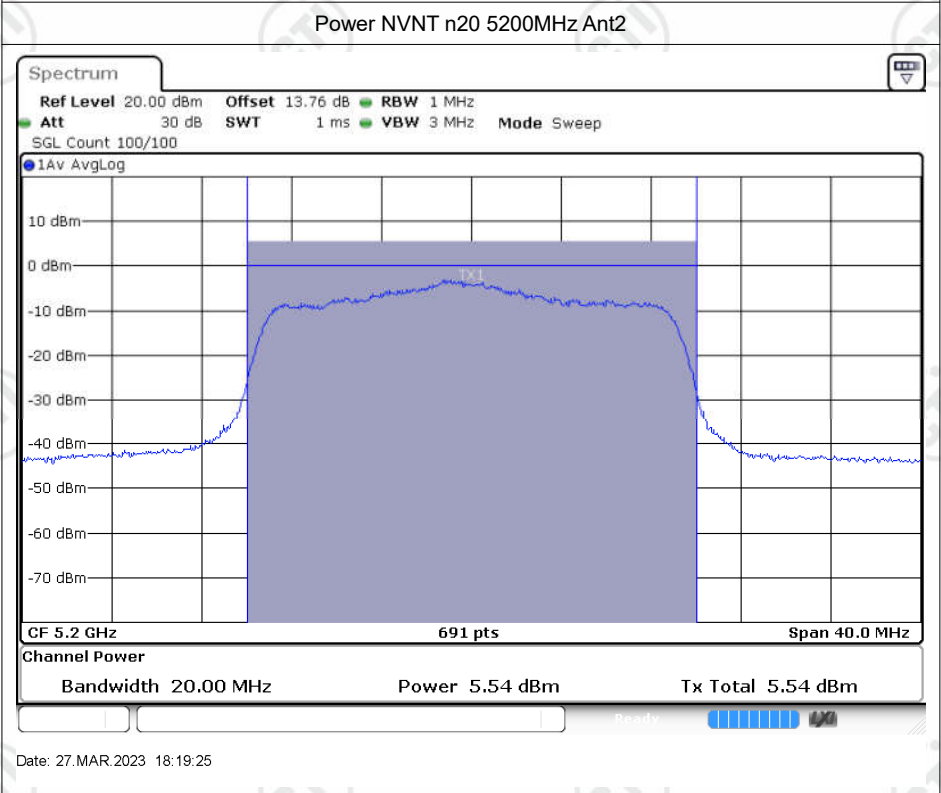


Date: 27. MAR. 2023 18:19:25

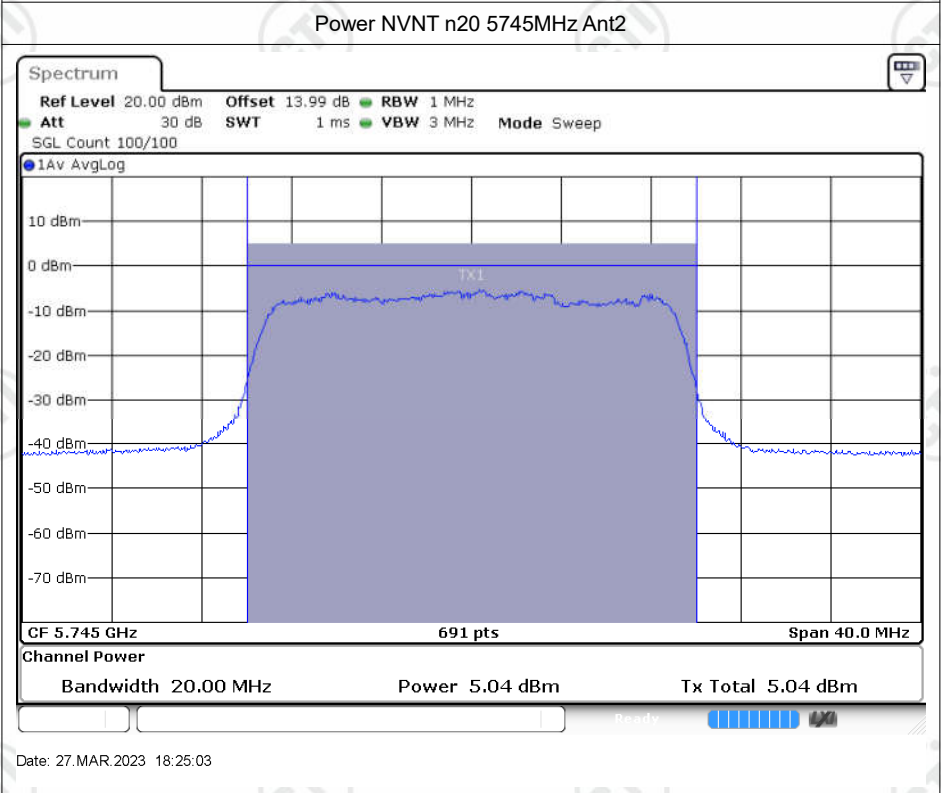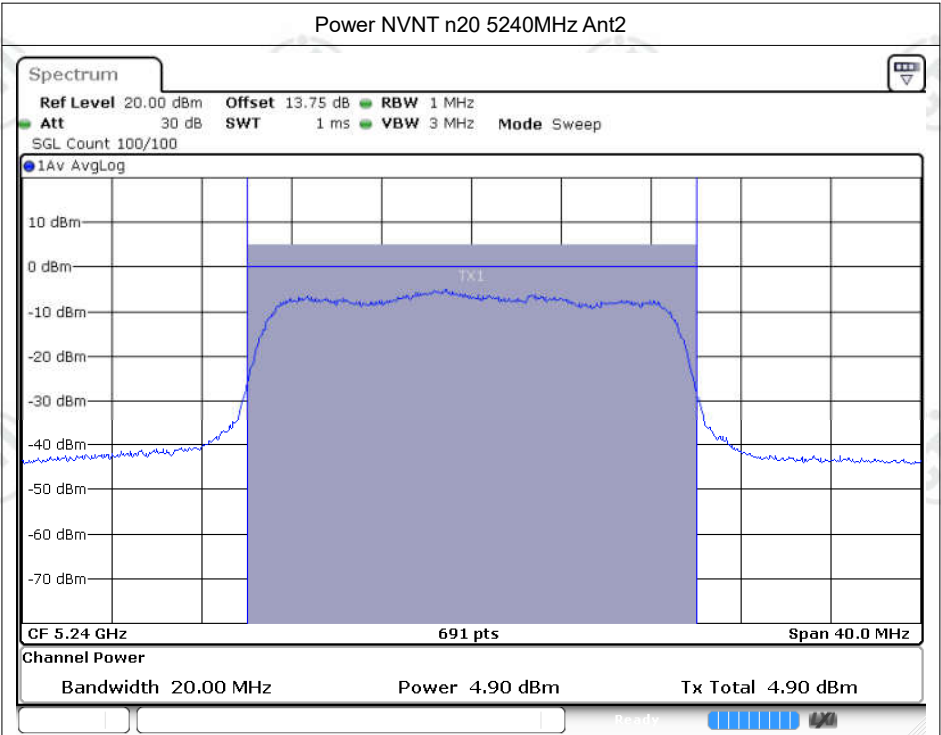


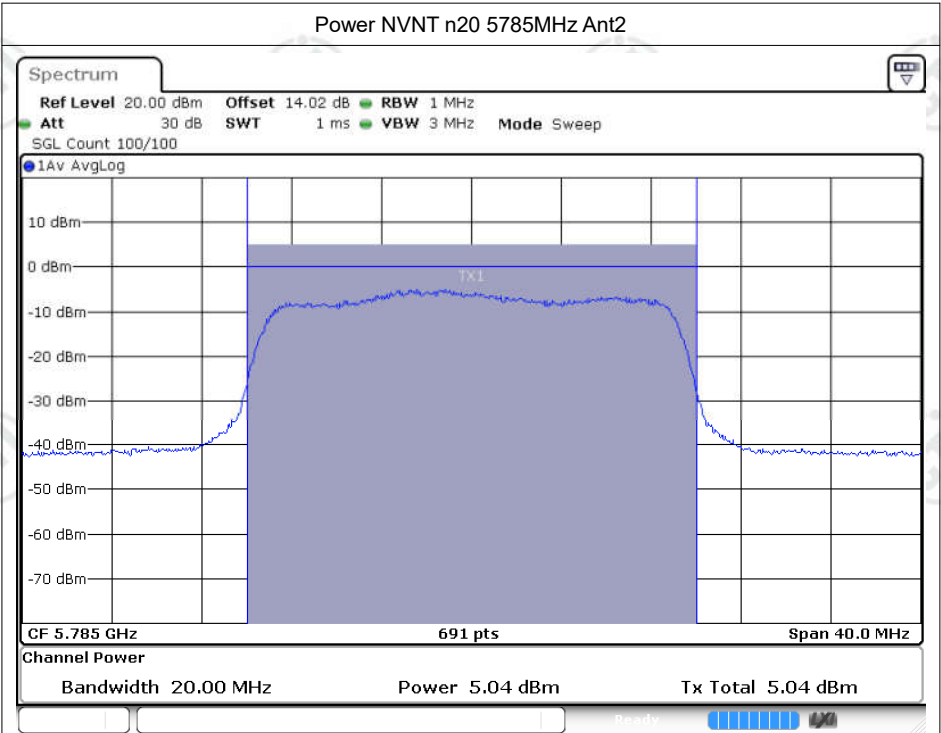


Date: 27. MAR. 2023 18:25:33

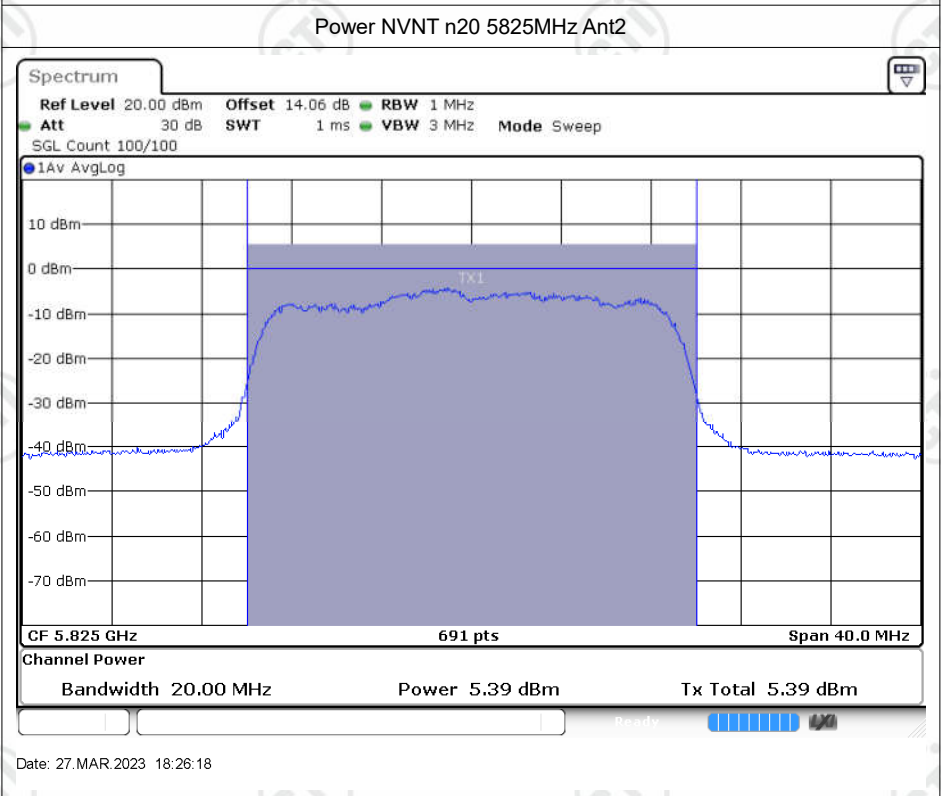



Date: 27. MAR. 2023 18:26:18


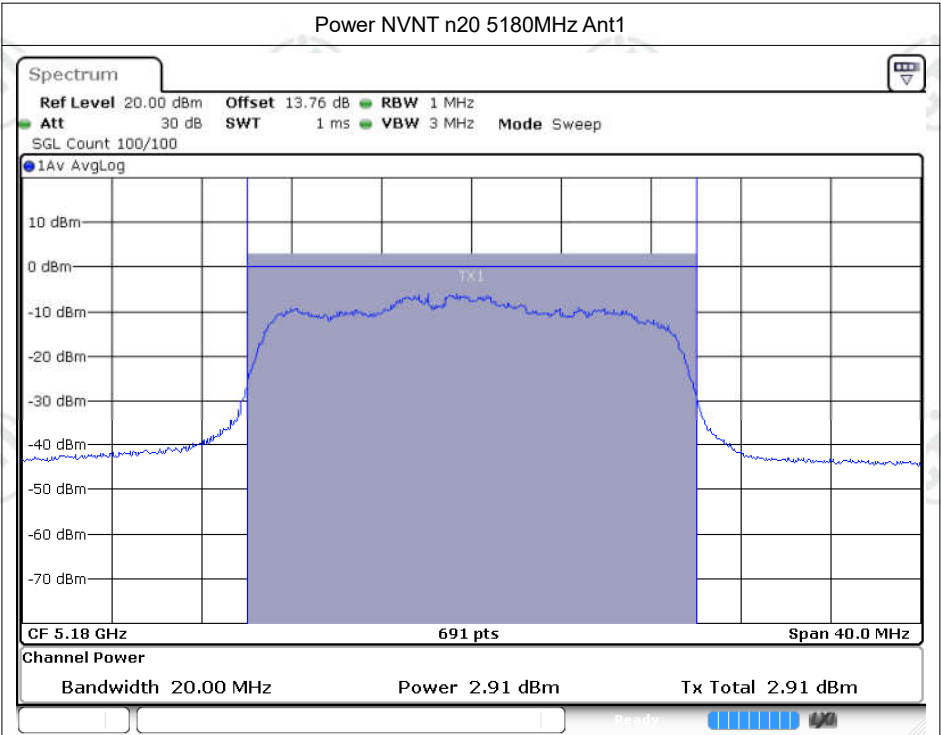




Date: 28.MAR.2023 10:24:30

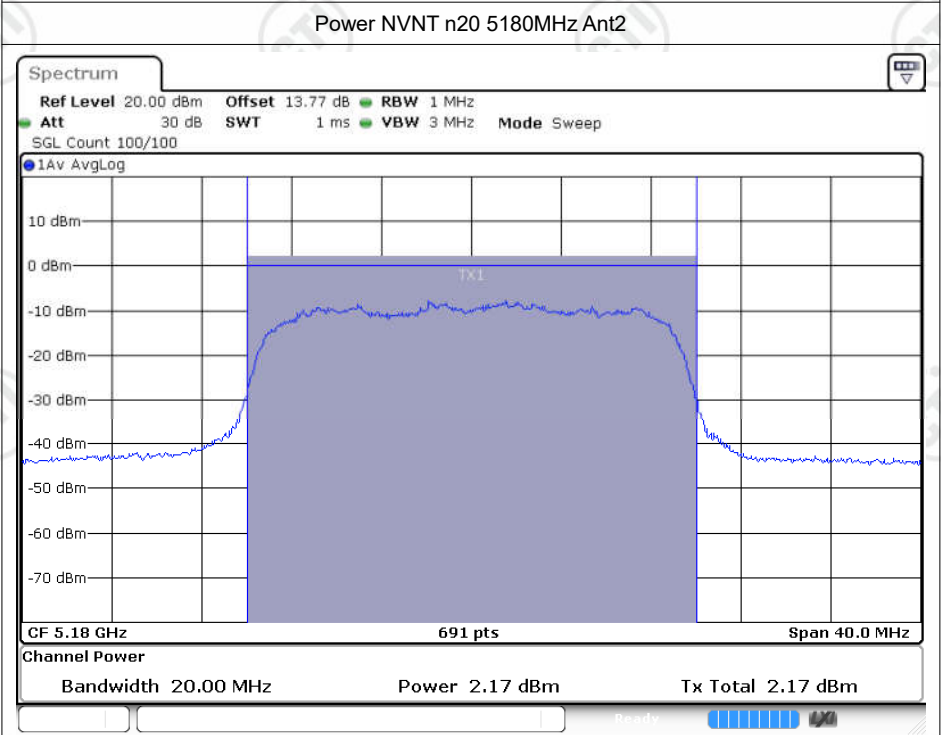


Date: 28.MAR.2023 10:24:33

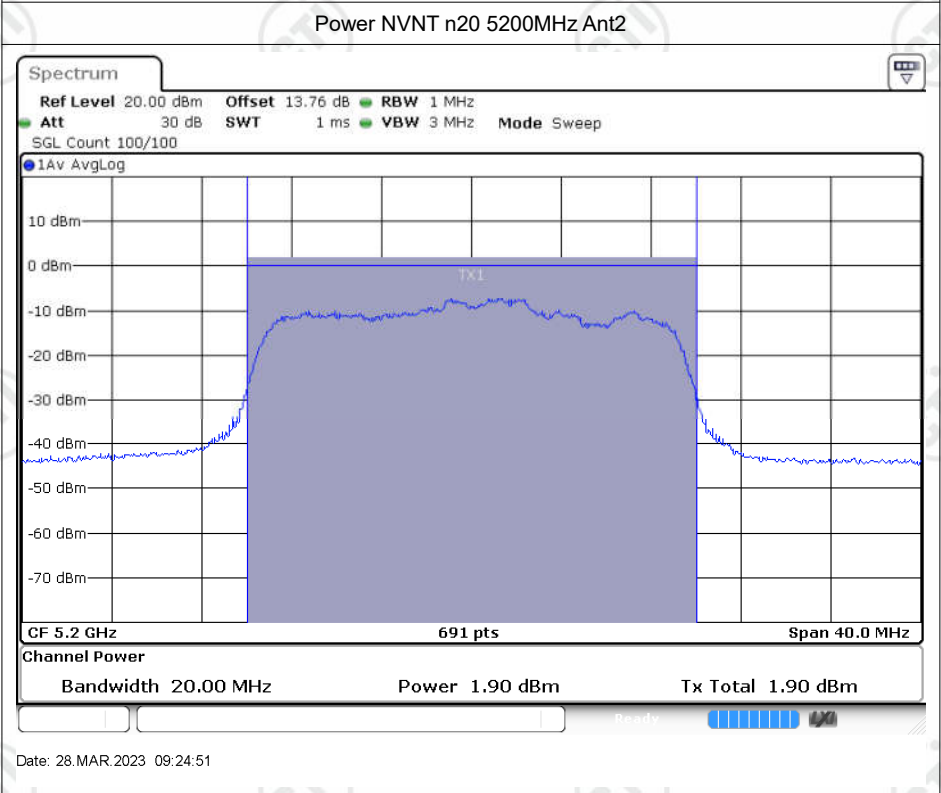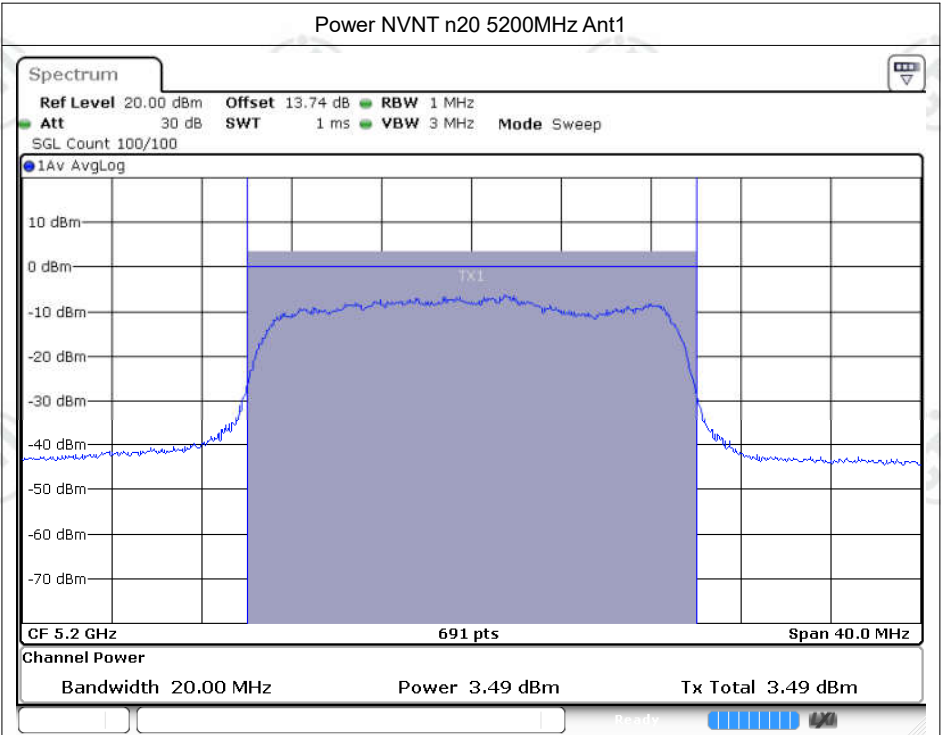


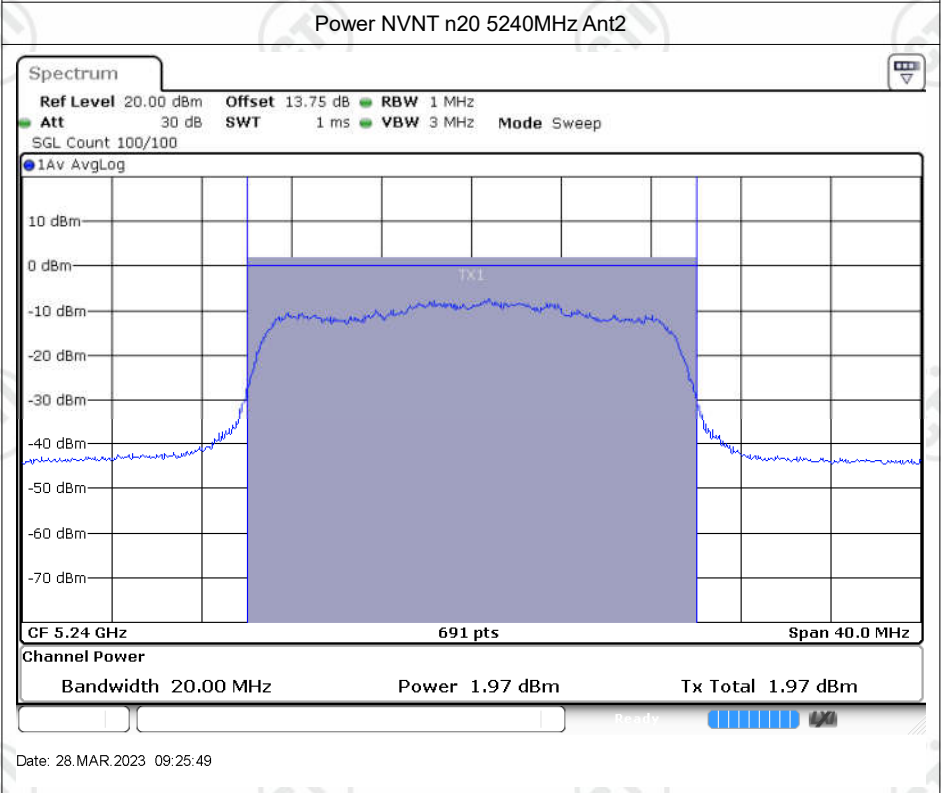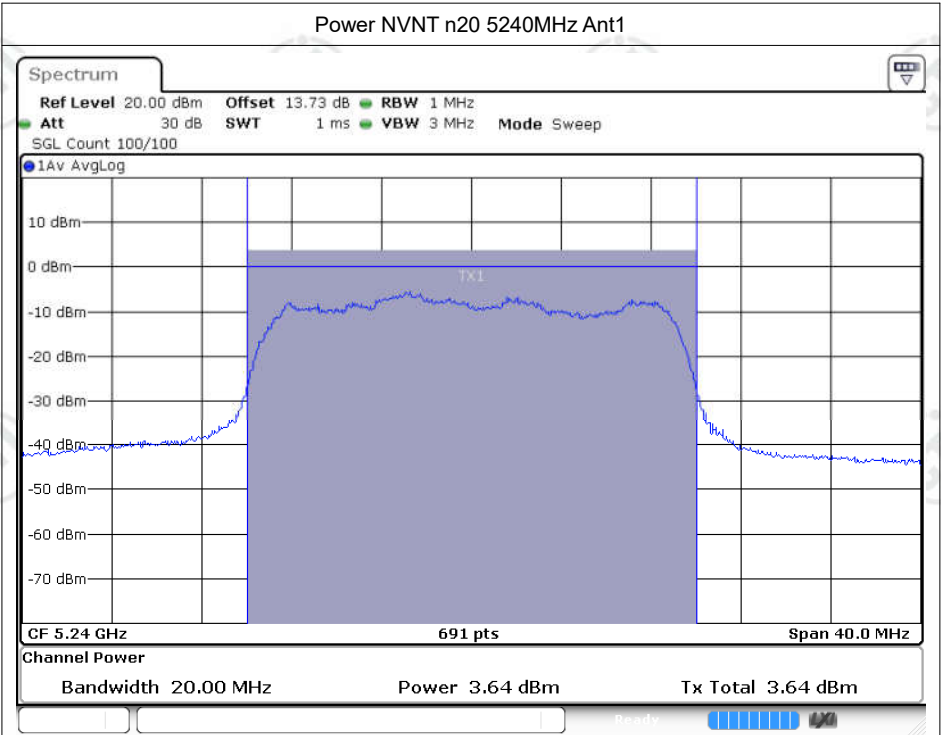

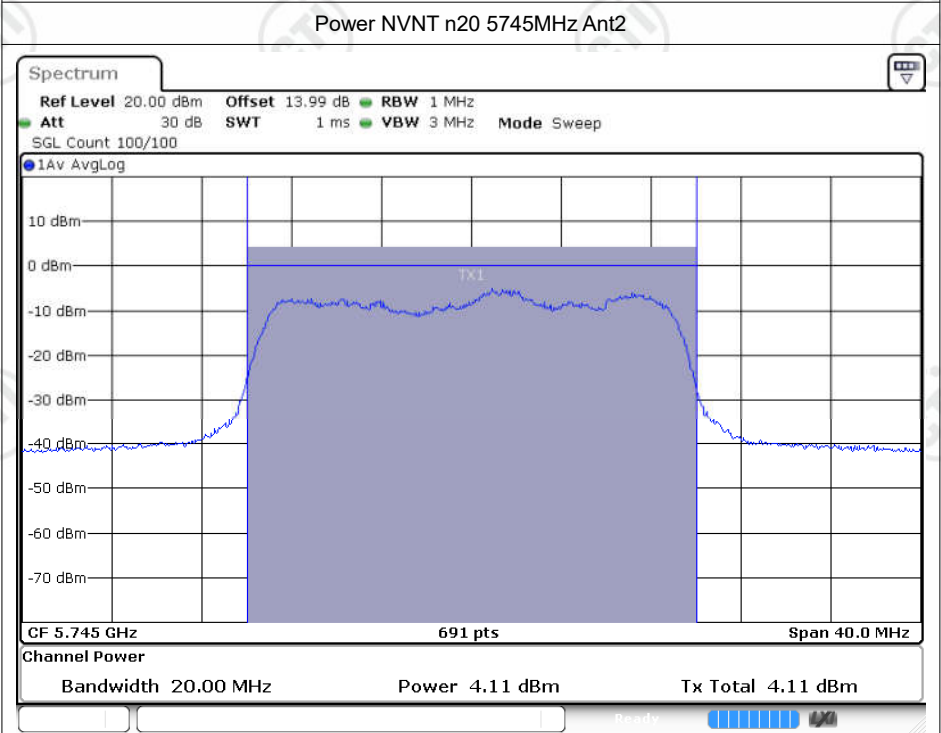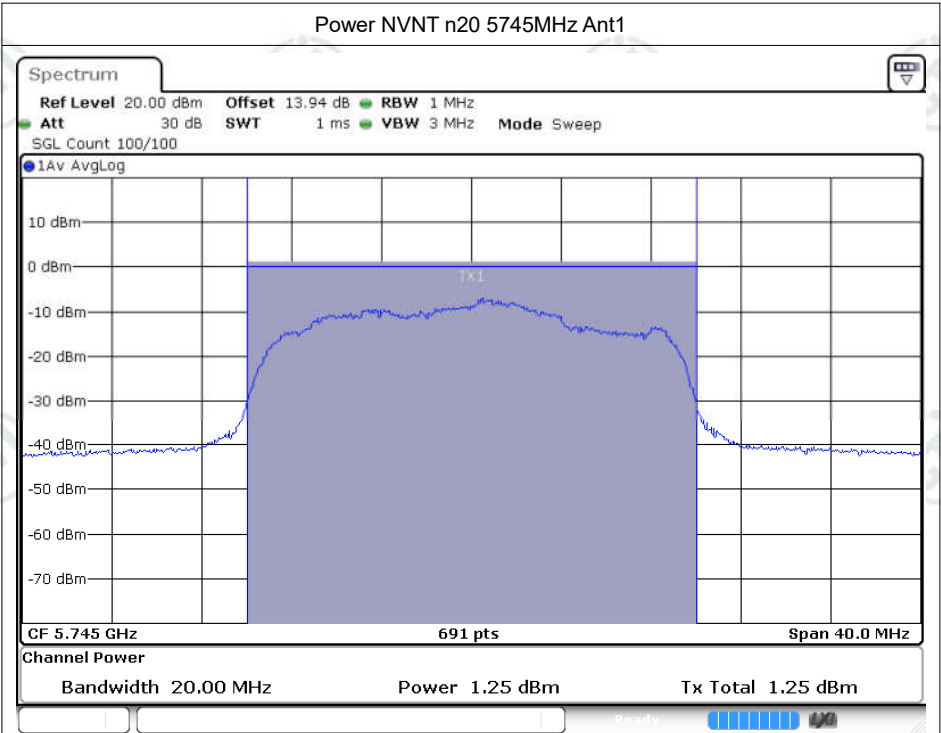


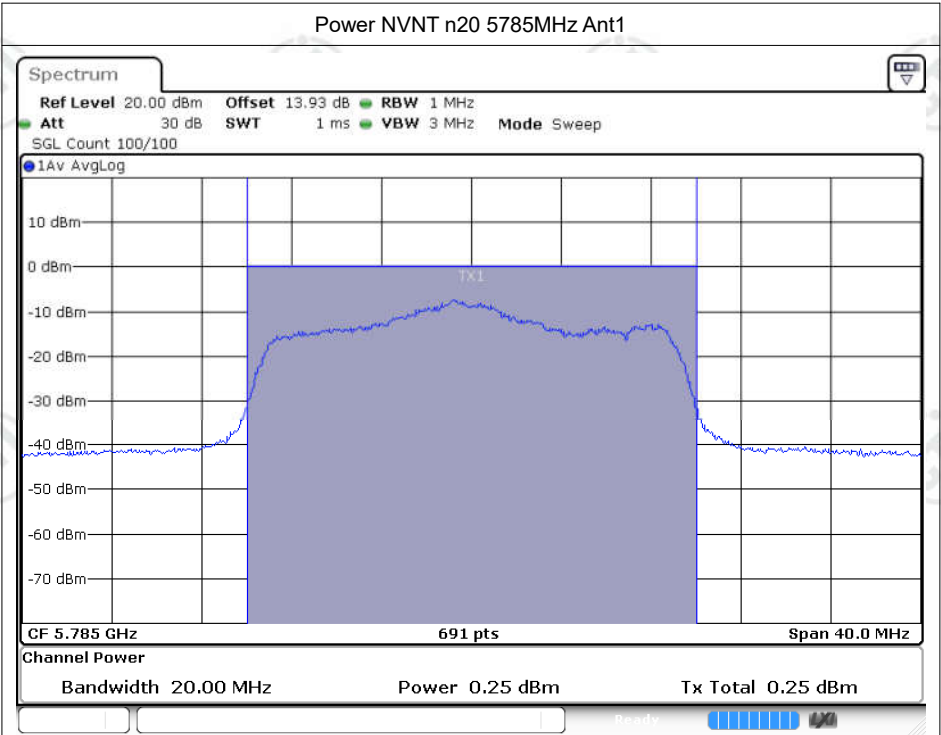


Date: 28.MAR.2023 10:27:51

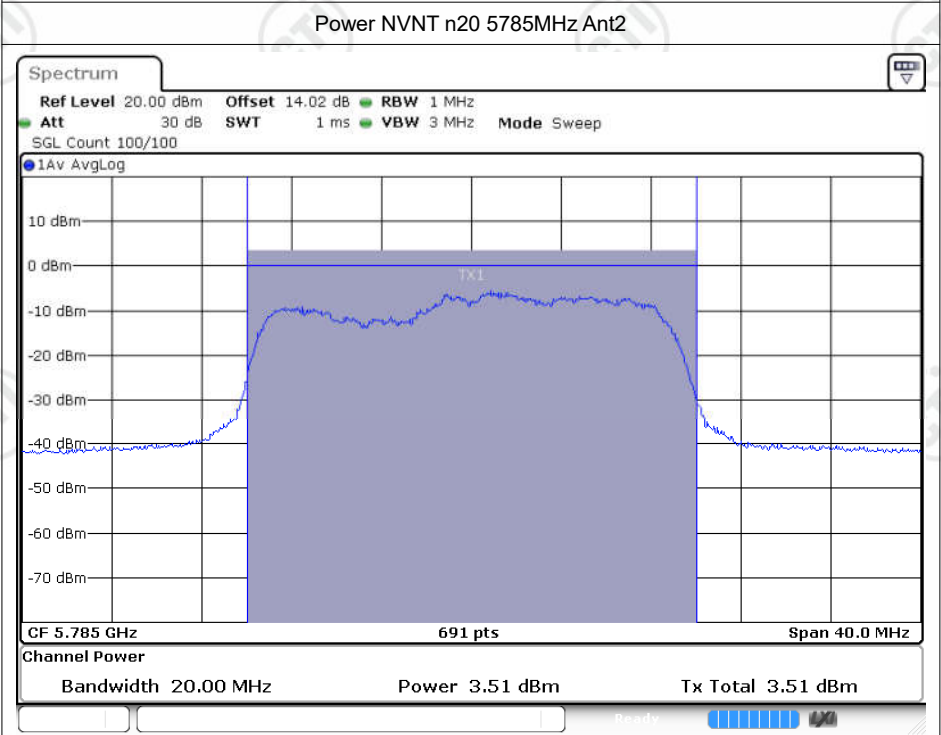


Date: 28.MAR.2023 10:27:53

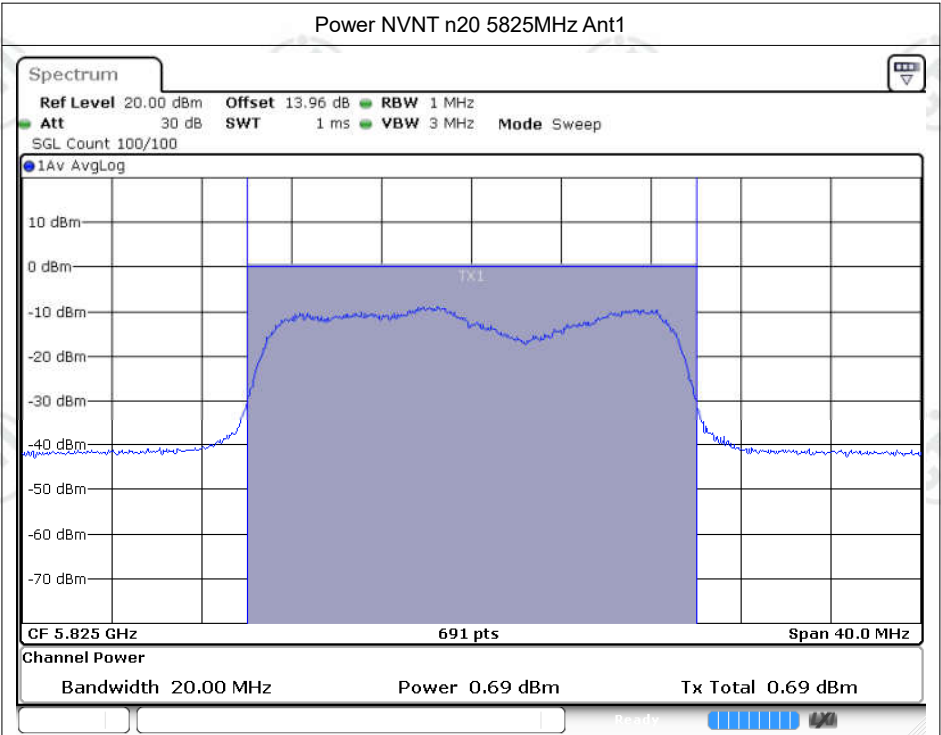


Date: 28.MAR.2023 10:28:33

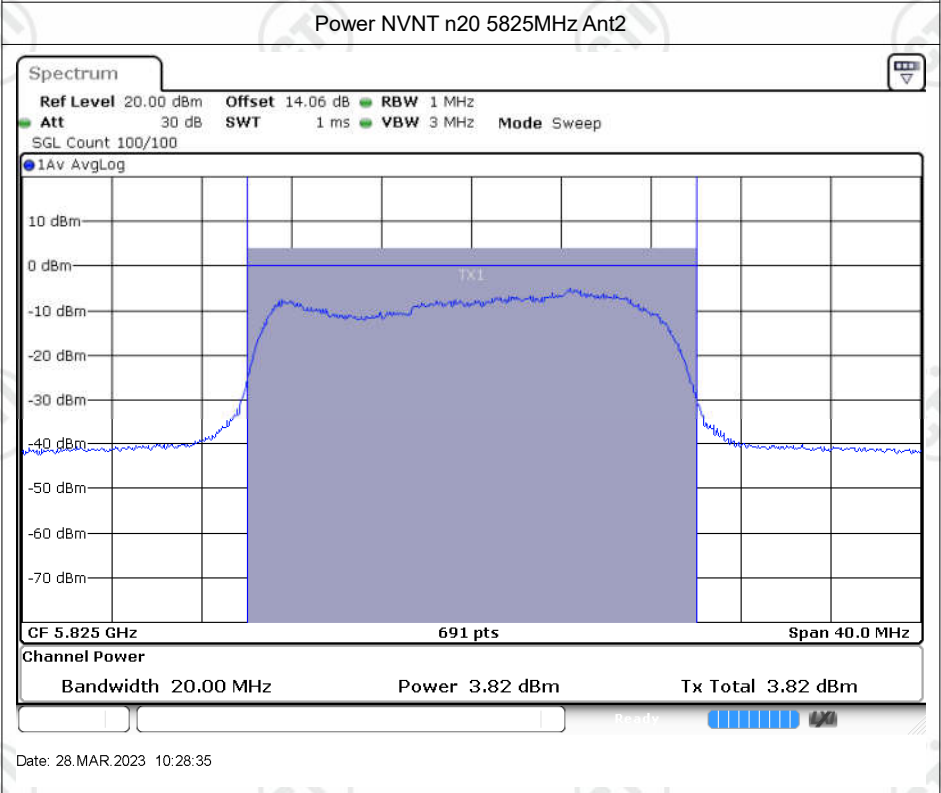


Date: 28.MAR.2023 10:28:35

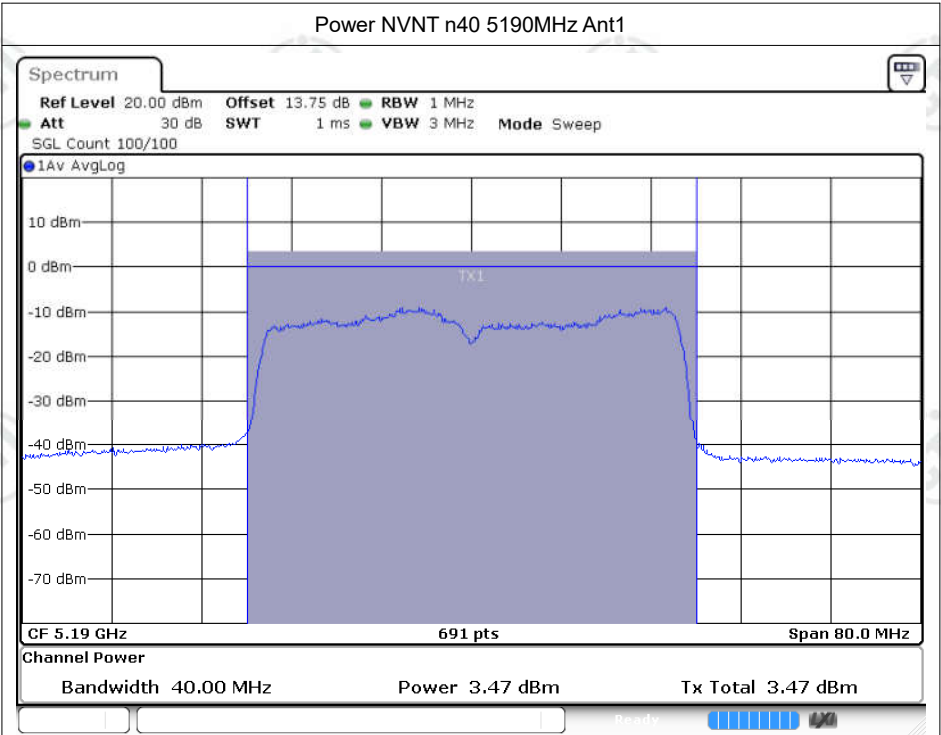


Date: 27. MAR. 2023 14:47:39

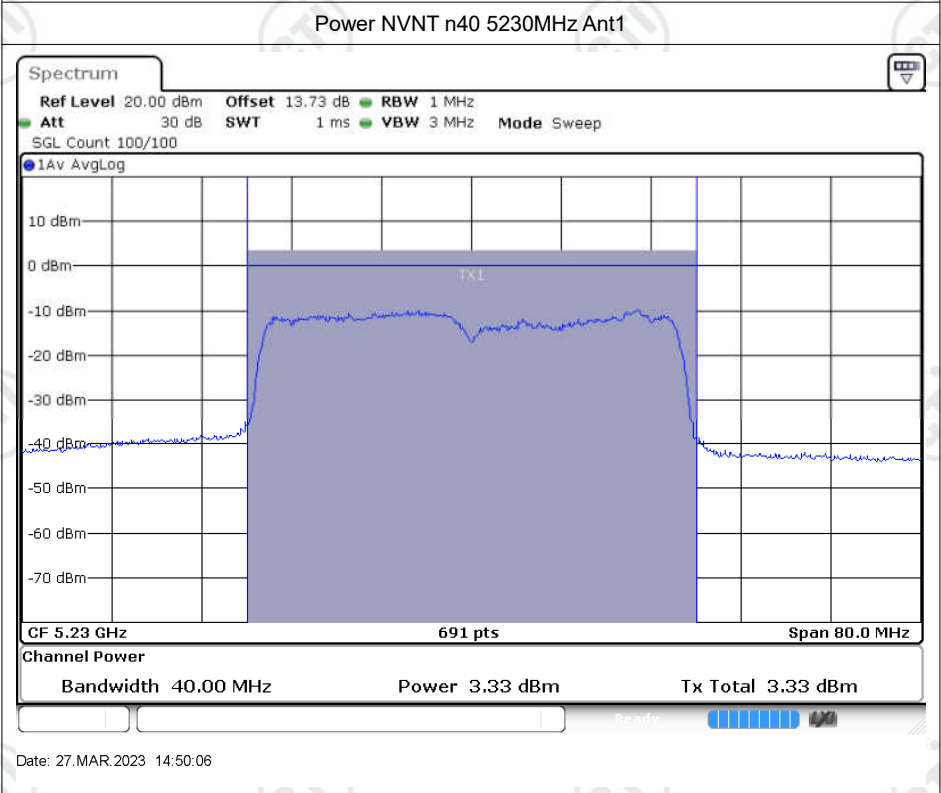

Date: 27. MAR. 2023 14:50:06

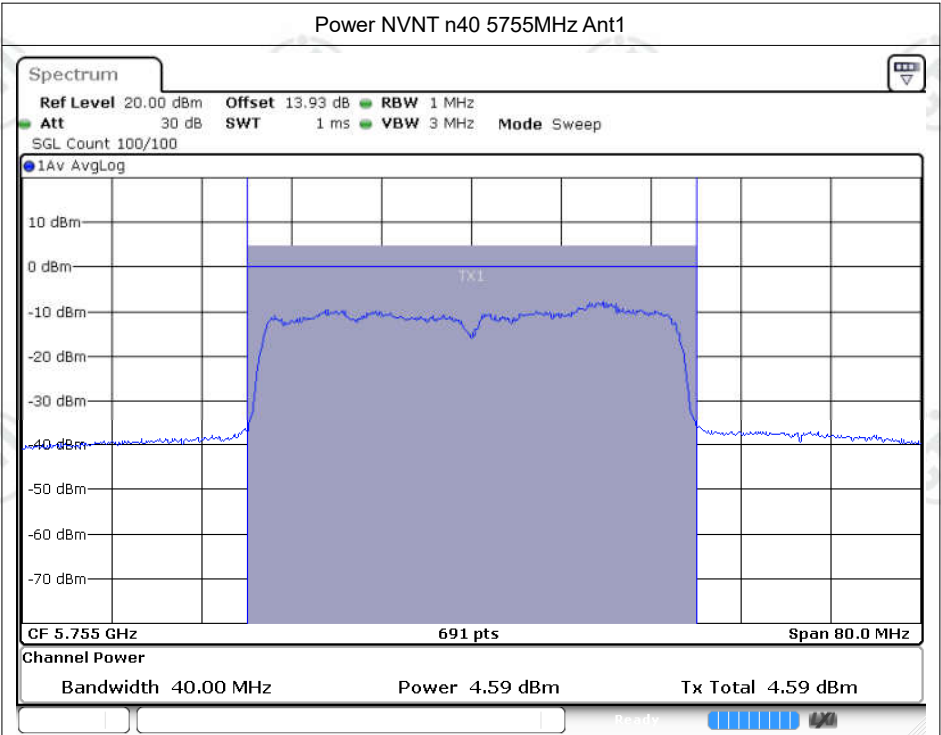

Date: 27. MAR. 2023 15:17:06

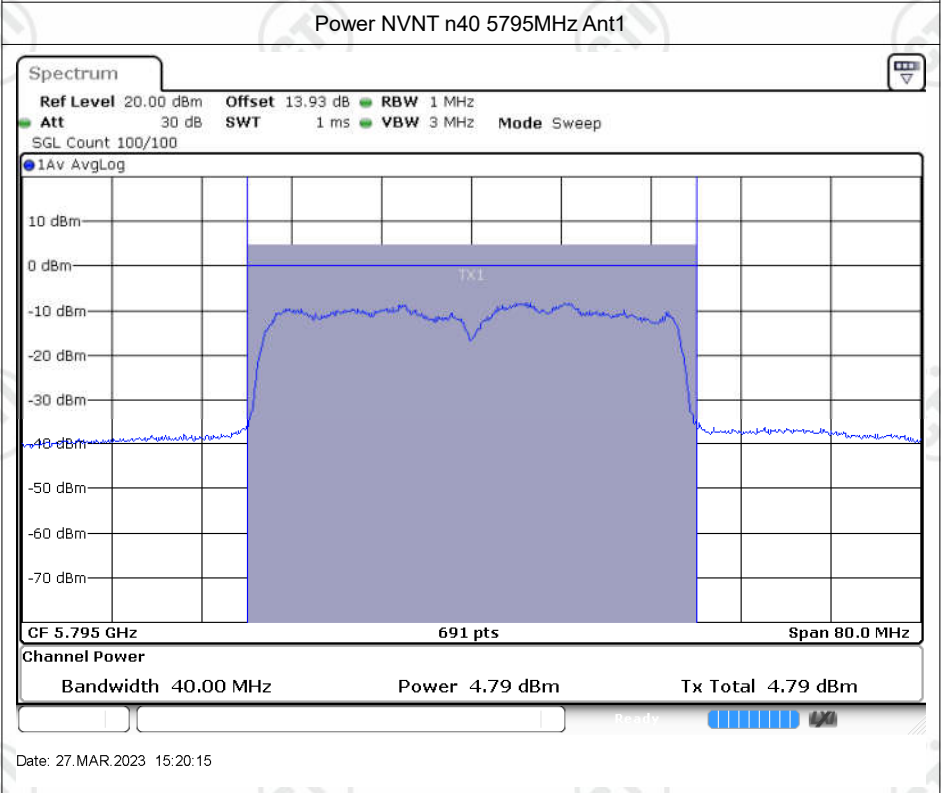

Date: 27. MAR. 2023 15:20:15