

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.54 PK	71.2	74	-2.8	-33.64	-33.76	6.63	-24.06
2	2483.51 AV	50.47	54	-3.53	-54.28	-54.59	6.63	-44.79

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

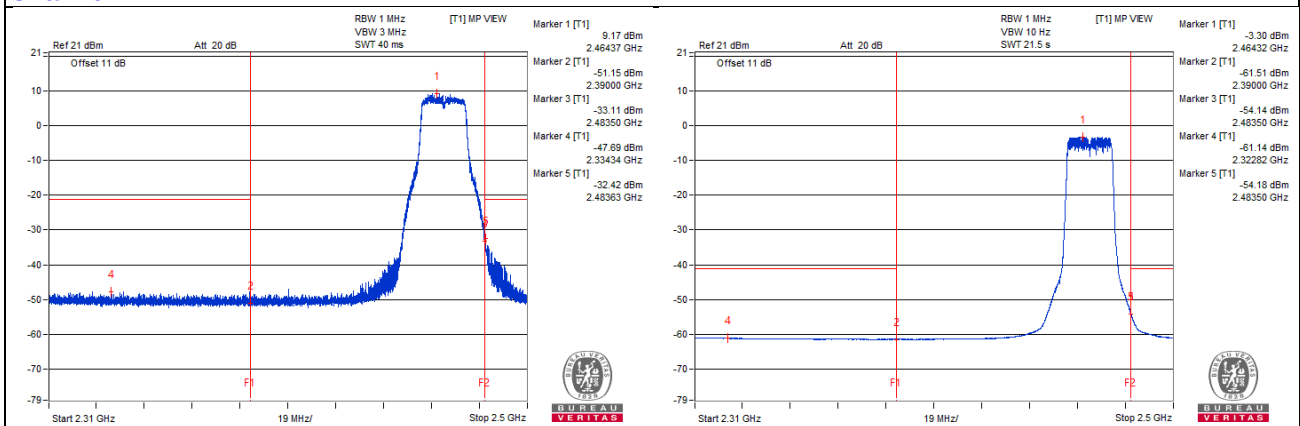

Chain 1

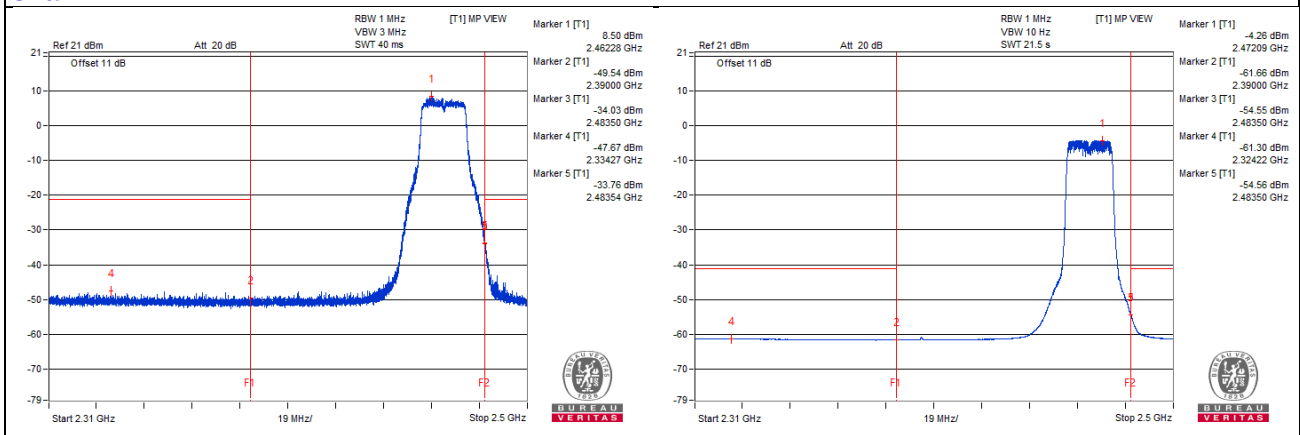

VHT20 - Channel 13

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4943.75 PK	53.54	74	-20.46	-51.53	-51.2	6.63	-41.72
2	4942.18 AV	43.64	54	-10.36	-61.2	-61.33	6.63	-51.62
3	7414.06 PK	56.14	74	-17.86	-48.89	-48.64	6.63	-39.12
4	7415.62 AV	45.71	54	-8.29	-59.31	-59.08	6.63	-49.55

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

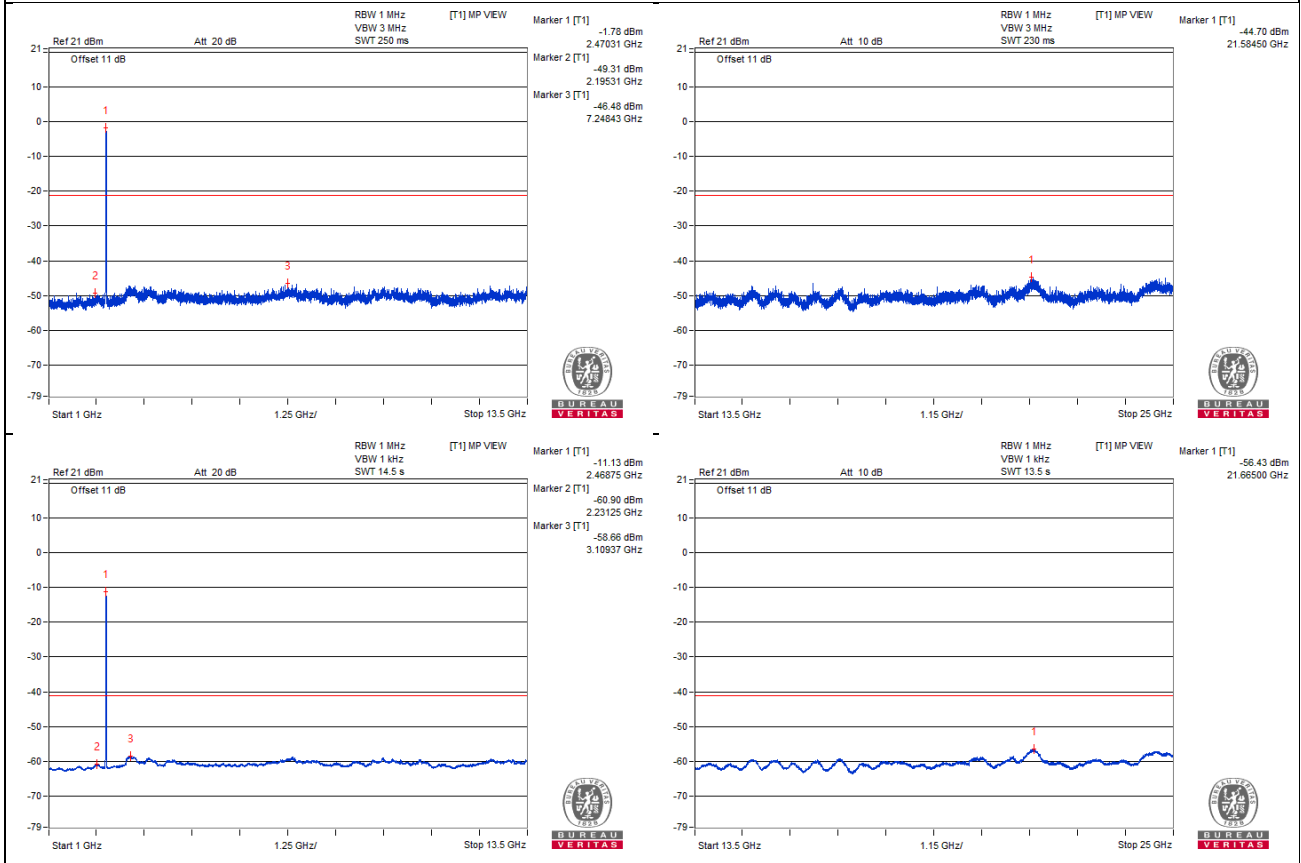

Chain 1

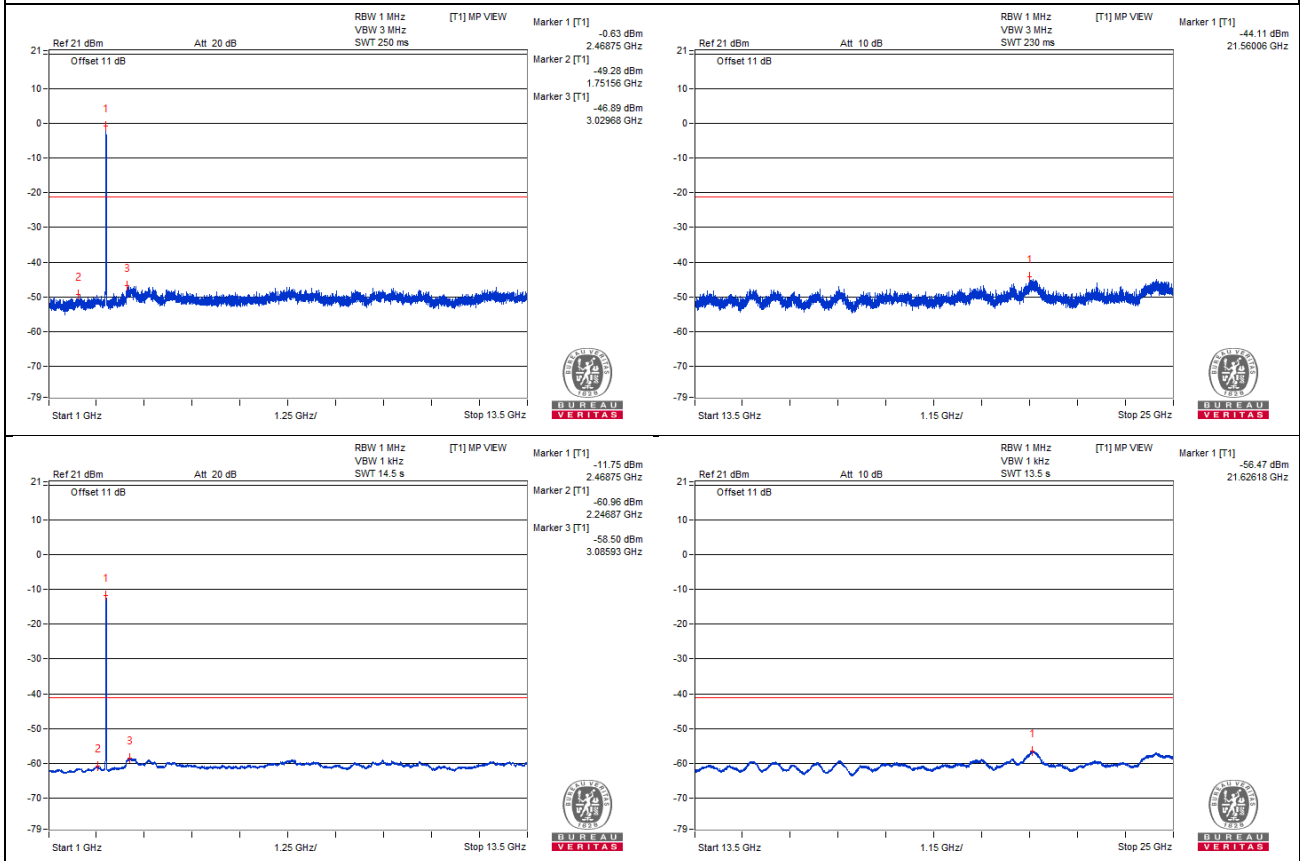

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.51 PK	71.85	74	-2.15	-32.71	-33.43	6.63	-23.41
2	2483.51 AV	50.38	54	-3.62	-54.41	-54.63	6.63	-44.88

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

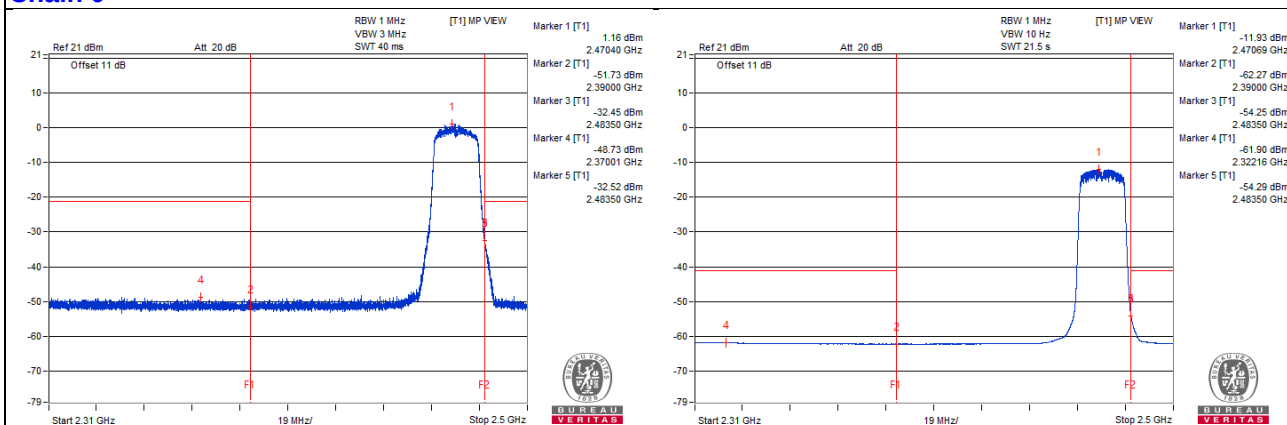

Chain 1

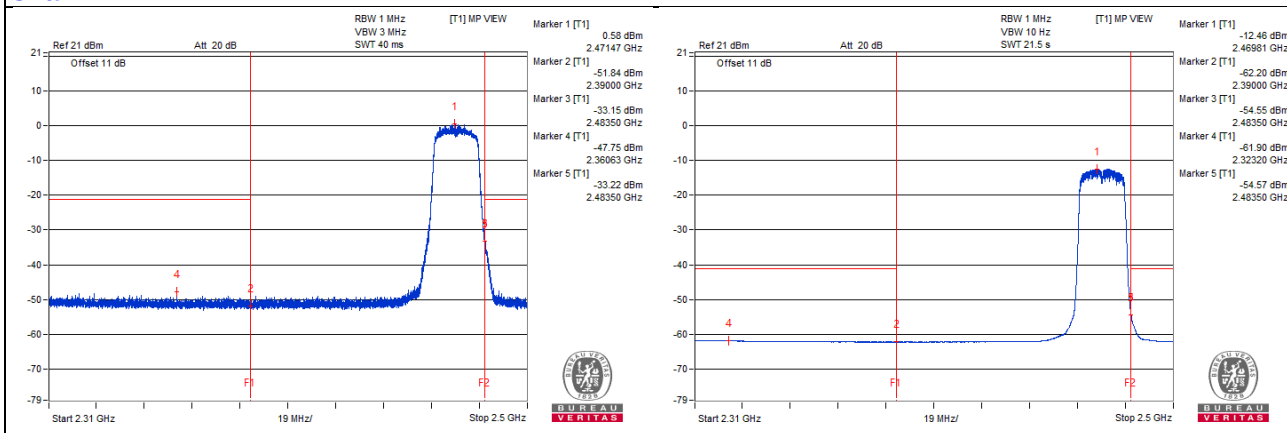

VHT40 - Channel 3

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1615.62 PK	51.48	74	-22.52	-53.86	-53.03	6.63	-43.78
2	1615.62 AV	42.3	54	-11.7	-62.78	-62.43	6.63	-52.96
3	4843.75 PK	53.64	74	-20.36	-50.73	-51.87	6.63	-41.62
4	4842.18 AV	43.69	54	-10.31	-61.24	-61.18	6.63	-51.57
5	7265.62 PK	56	74	-18	-47.75	-50.46	6.63	-39.26
6	7265.62 AV	45.39	54	-8.61	-59.63	-59.39	6.63	-49.87

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

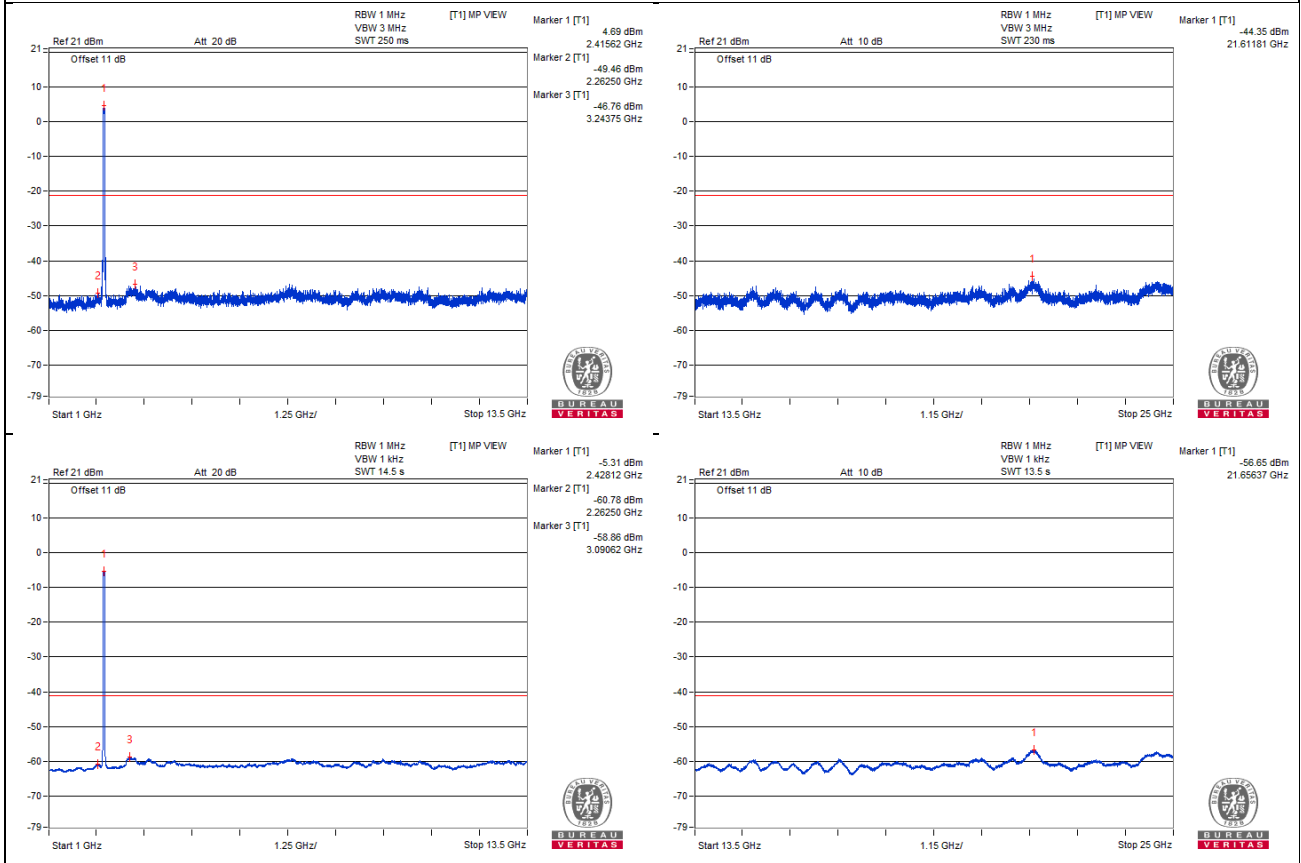

Chain 1

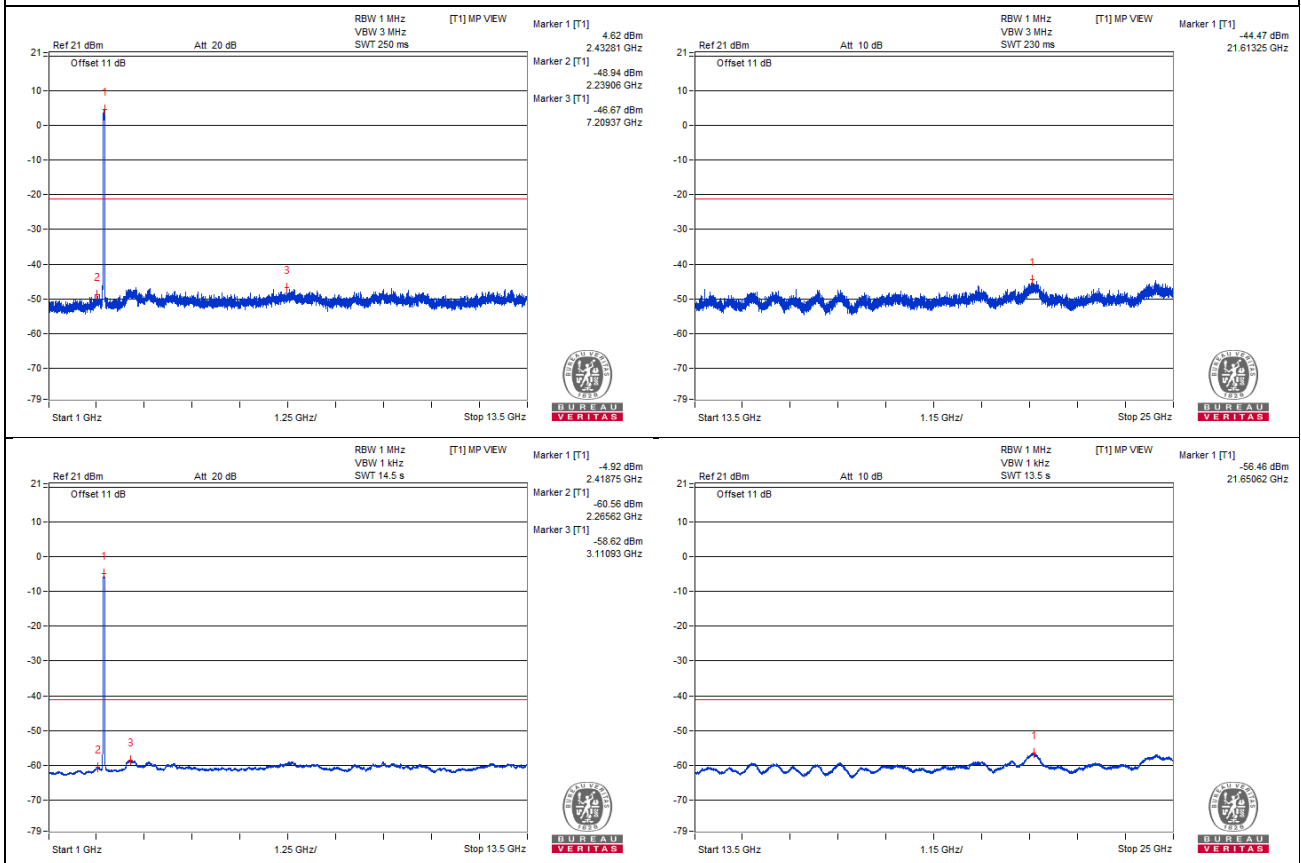

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.94 PK	71.22	74	-2.78	-32.82	-34.76	6.63	-24.04
2	2389.87 AV	49.21	54	-4.79	-55.95	-55.44	6.63	-46.05

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

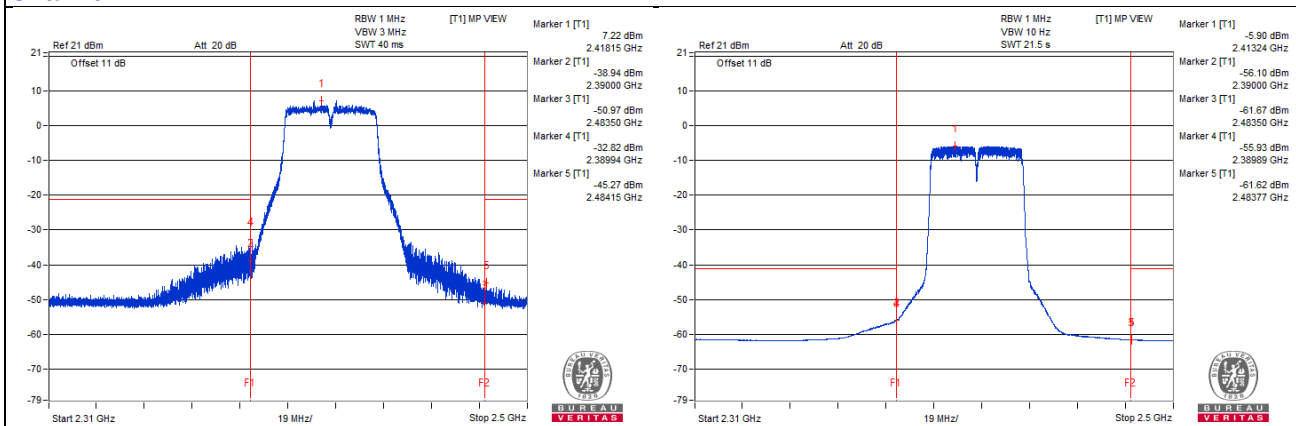

Chain 1

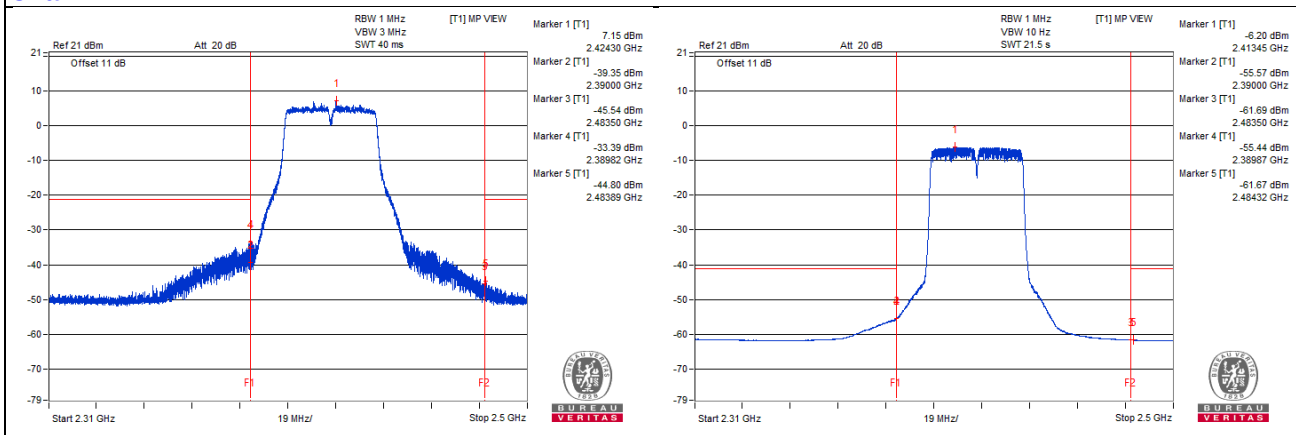

VHT40 - Channel 4

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1617.18 PK	53.41	74	-20.59	-51.1	-51.93	6.63	-41.85
2	1617.18 AV	42.49	54	-11.51	-62.46	-62.36	6.63	-52.77
3	4853.12 PK	54.32	74	-19.68	-49.44	-52.12	6.63	-40.94
4	4853.12 AV	43.79	54	-10.21	-61.15	-61.08	6.63	-51.47
5	7279.68 PK	55.94	74	-18.06	-48.79	-49.14	6.63	-39.32
6	7281.25 AV	45.45	54	-8.55	-59.43	-59.48	6.63	-49.81

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

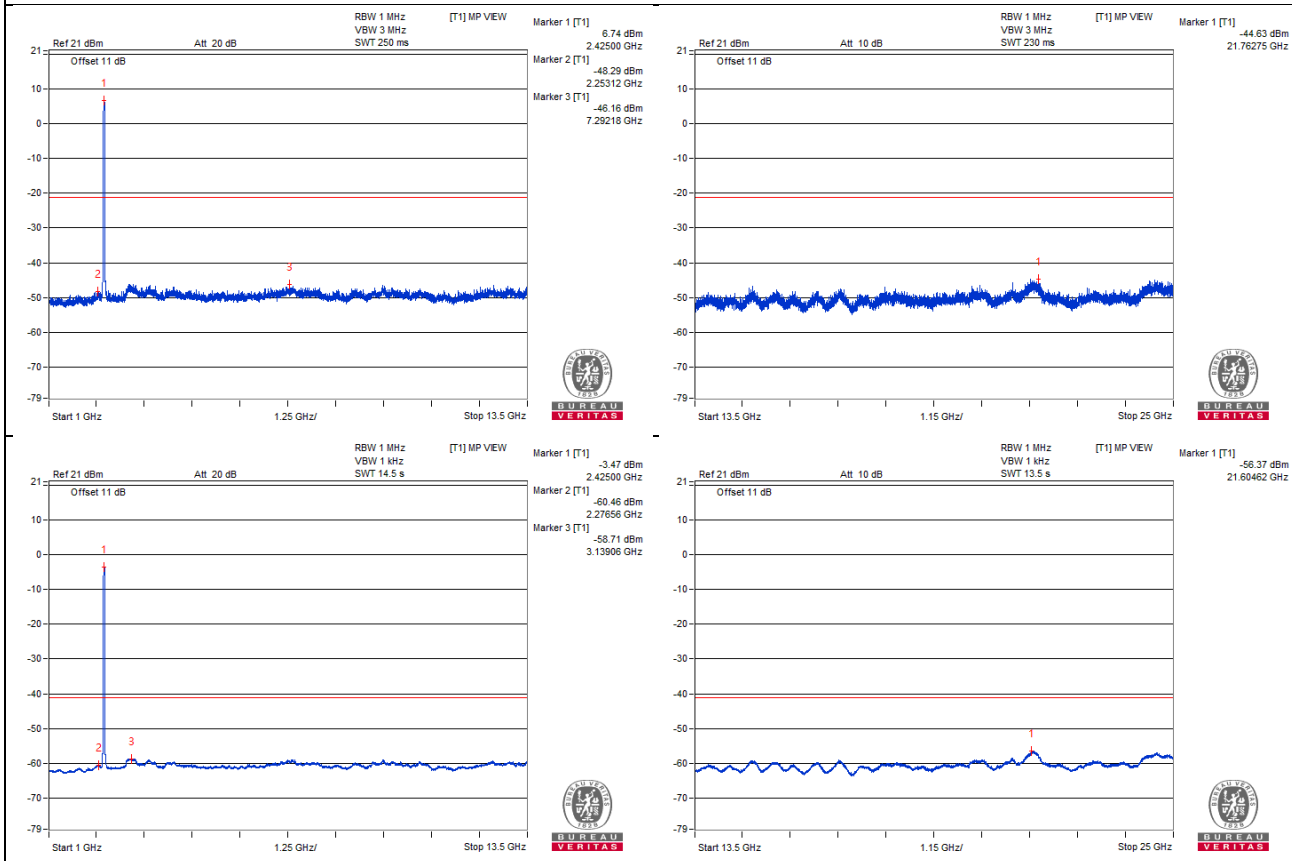

Chain 1

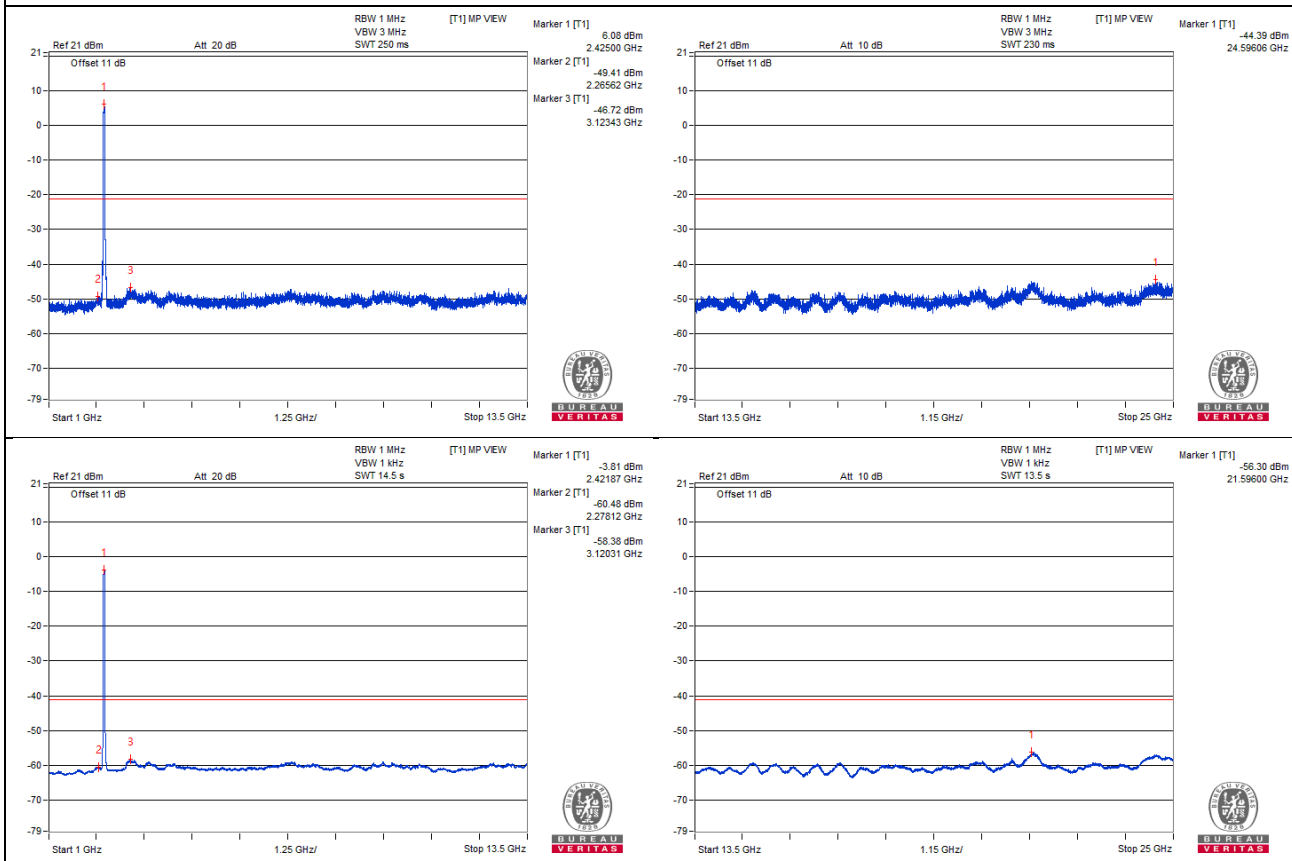

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.77 PK	71.16	74	-2.84	-33.59	-33.9	6.63	-24.1
2	2389.72 AV	49.44	54	-4.56	-55.39	-55.54	6.63	-45.82

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

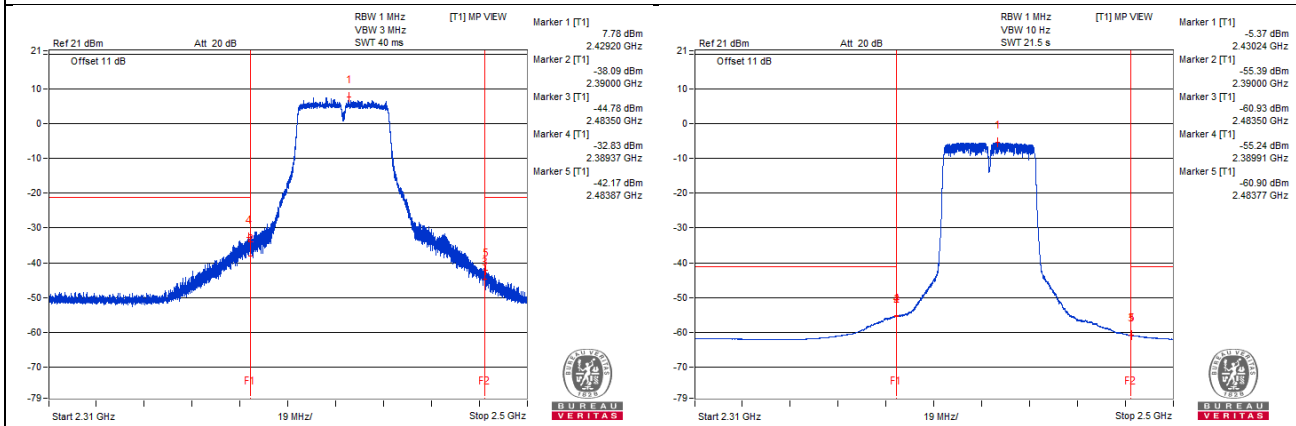

Chain 1

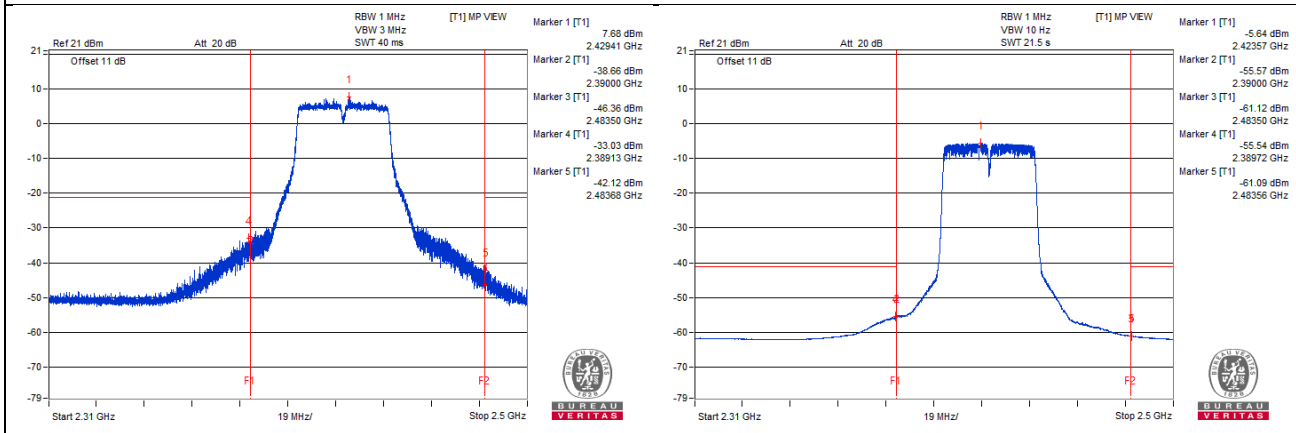

VHT40 - Channel 6

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1623.43 PK	52.45	74	-21.55	-52.33	-52.58	6.63	-42.81
2	1623.43 AV	42.32	54	-11.68	-62.58	-62.58	6.63	-52.94
3	4873.43 PK	54.63	74	-19.37	-51.14	-49.55	6.63	-40.63
4	4875 AV	43.96	54	-10.04	-61.35	-60.57	6.63	-51.3
5	7310.93 PK	55.84	74	-18.16	-48.32	-49.96	6.63	-39.42
6	7312.5 AV	45.18	54	-8.82	-59.97	-59.49	6.63	-50.08

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

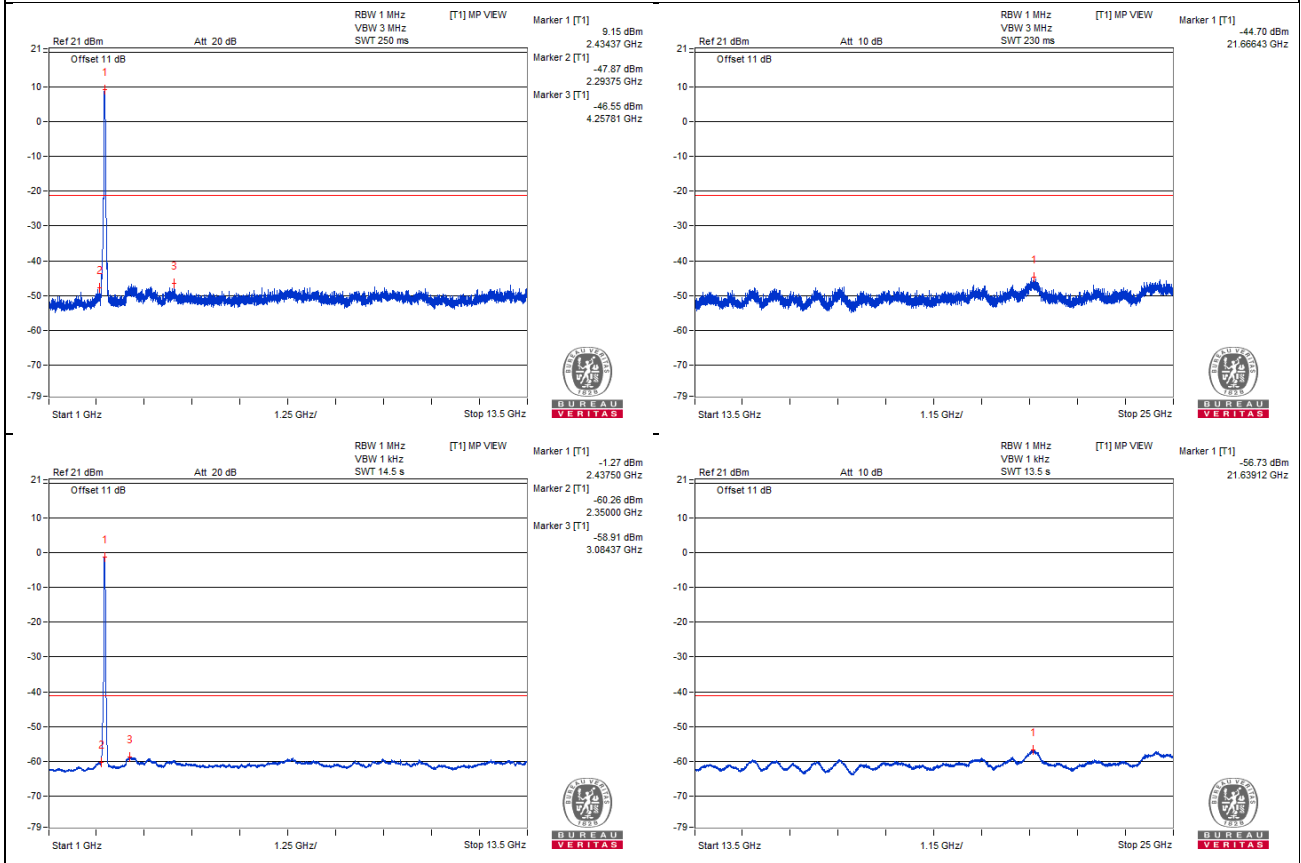

Chain 1

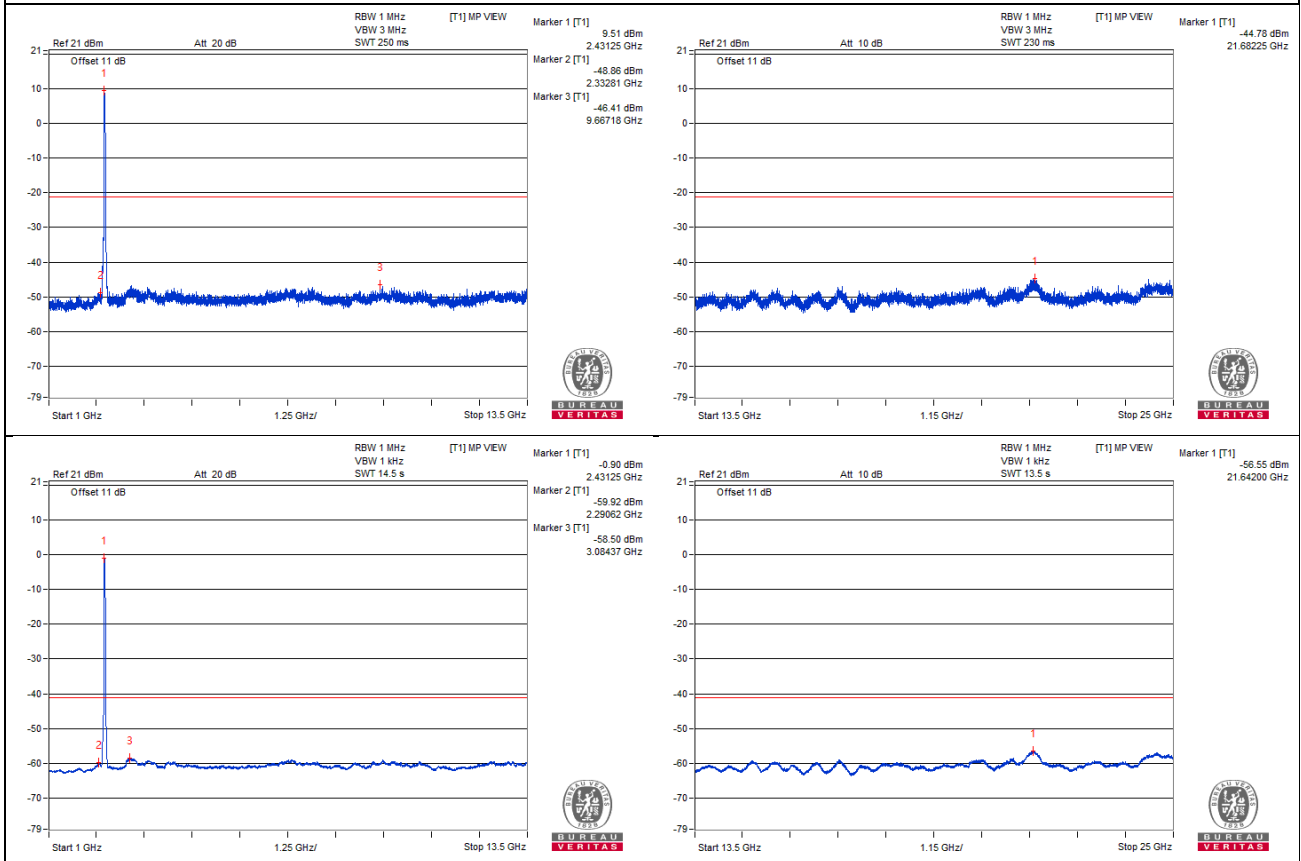

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.56 PK	77.32	74	* 3.32	-27.04	-28.2	6.63	-17.94
2	2483.66 AV	57.08	54	* 3.08	-47.27	-48.44	6.63	-38.18
3	2389.99 PK	75.42	74	* 1.42	-28.76	-30.35	6.63	-19.84
4	2389.94 AV	56.95	54	* 2.95	-47.35	-48.65	6.63	-38.31


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

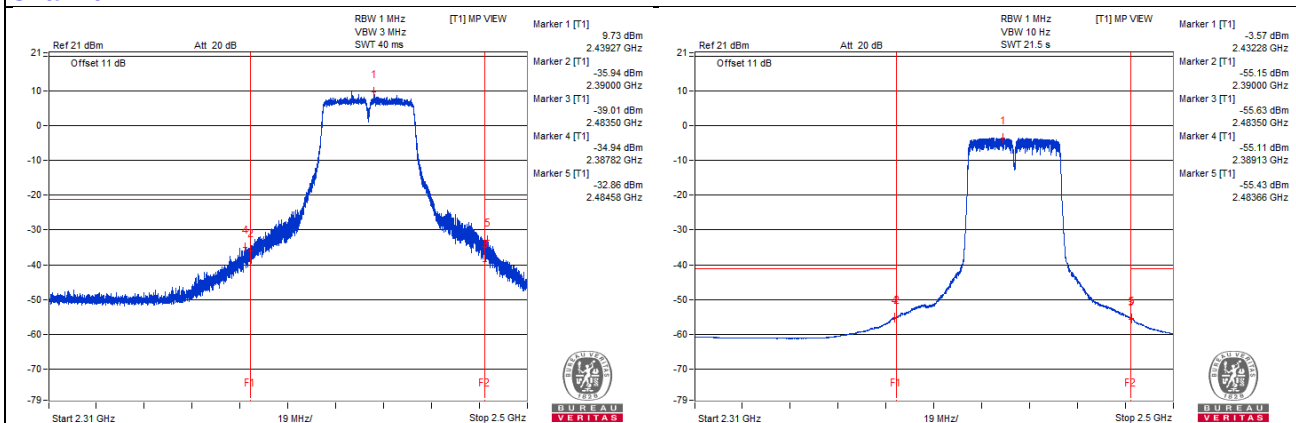

Chain 1

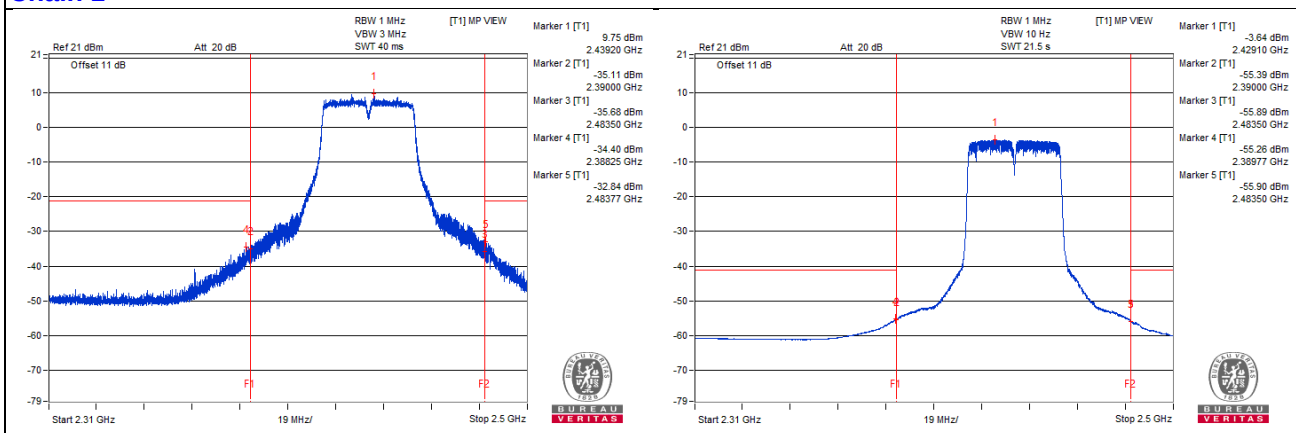

VHT40 - Channel 8

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3264.06 PK	55.75	74	-18.25	-50.09	-48.37	6.63	-39.51
2	3262.5 AV	45.28	54	-8.72	-59.62	-59.63	6.63	-49.98
3	4895.31 PK	53.61	74	-20.39	-51.48	-51.1	6.63	-41.65
4	4893.75 AV	43.82	54	-10.18	-61.06	-61.11	6.63	-51.44
5	7342.18 PK	56.05	74	-17.95	-48.12	-49.74	6.63	-39.21
6	7340.62 AV	45.73	54	-8.27	-59.16	-59.19	6.63	-49.53

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

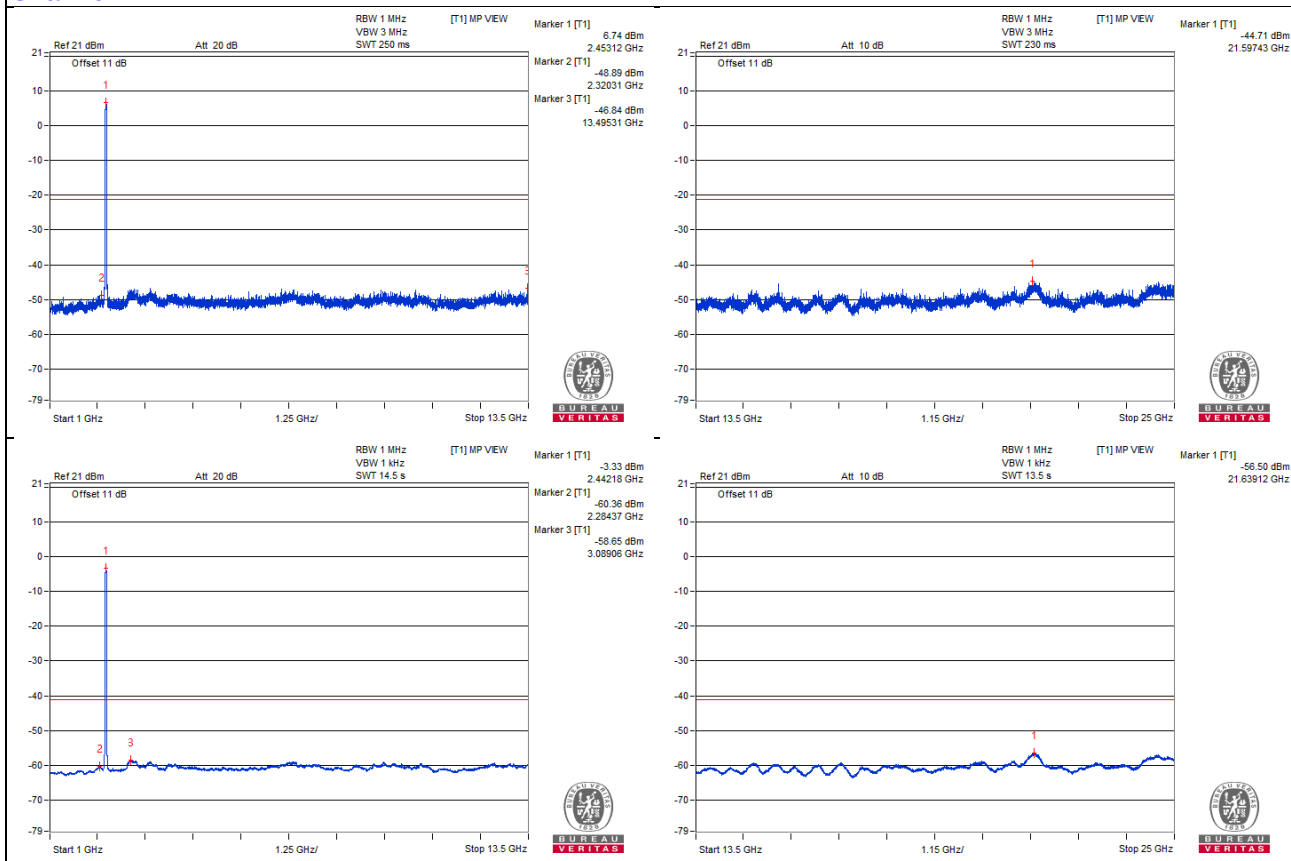

Chain 1

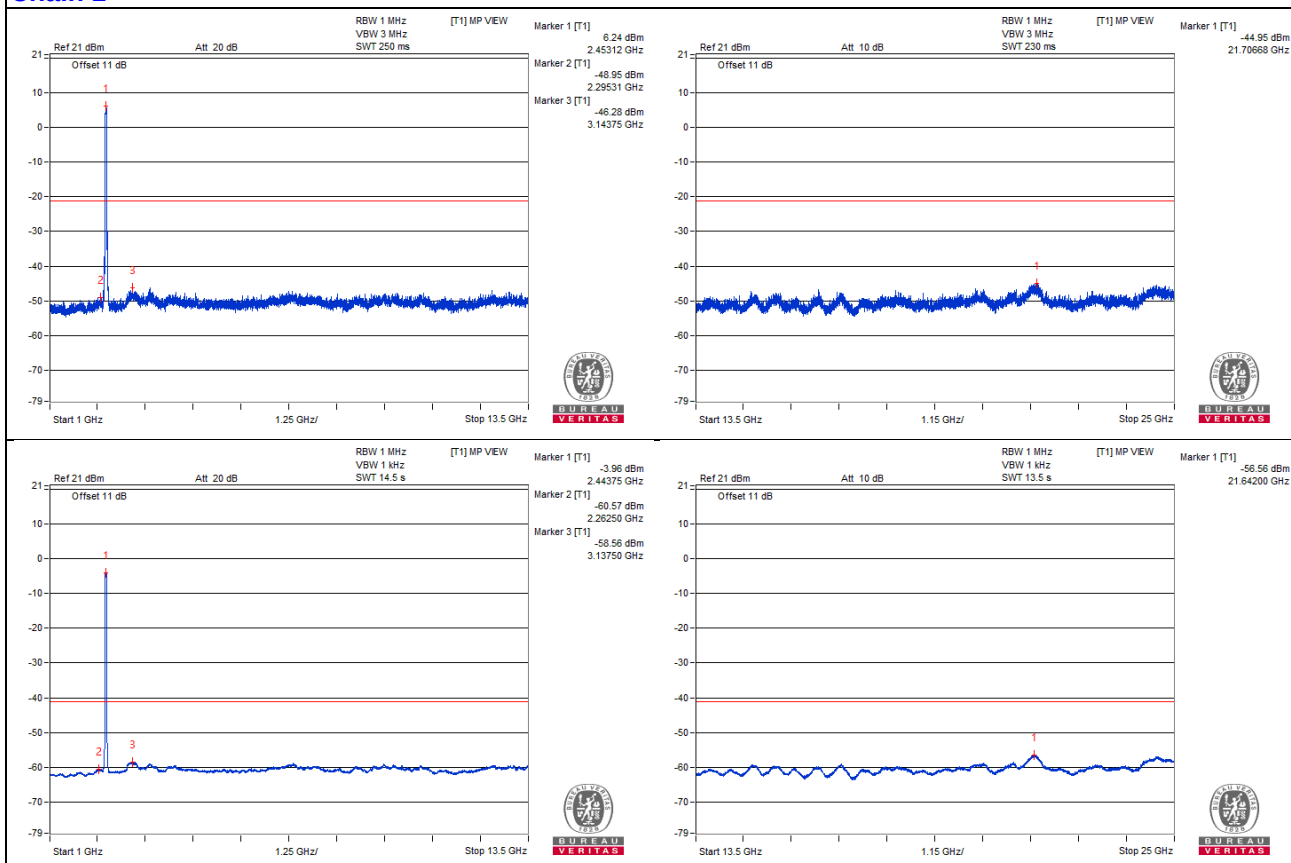

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2487 PK	71.87	74	-2.13	-32.06	-34.28	6.63	-23.39
2	2483.63 AV	48.44	54	-5.56	-55.71	-57.36	6.63	-46.82

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

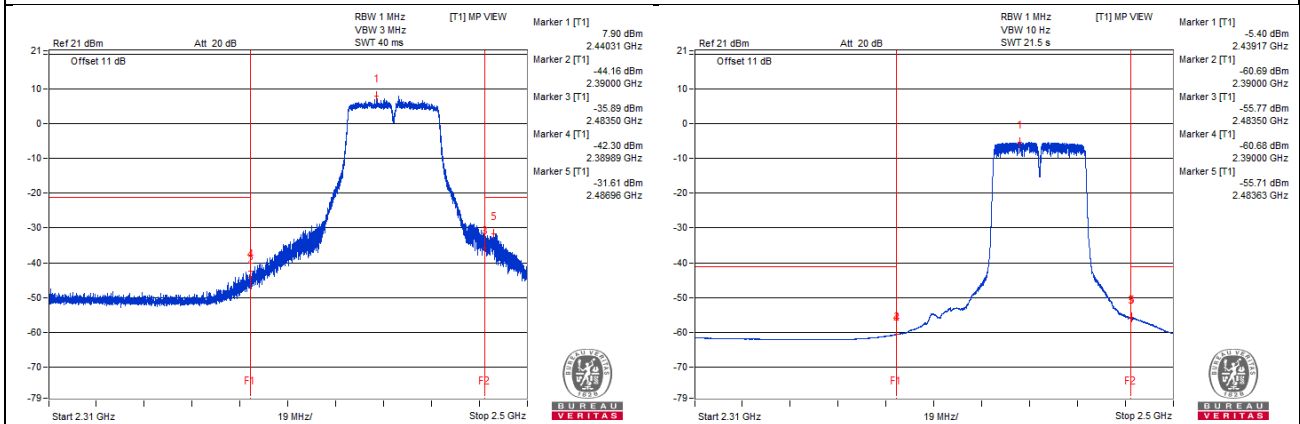

Chain 1

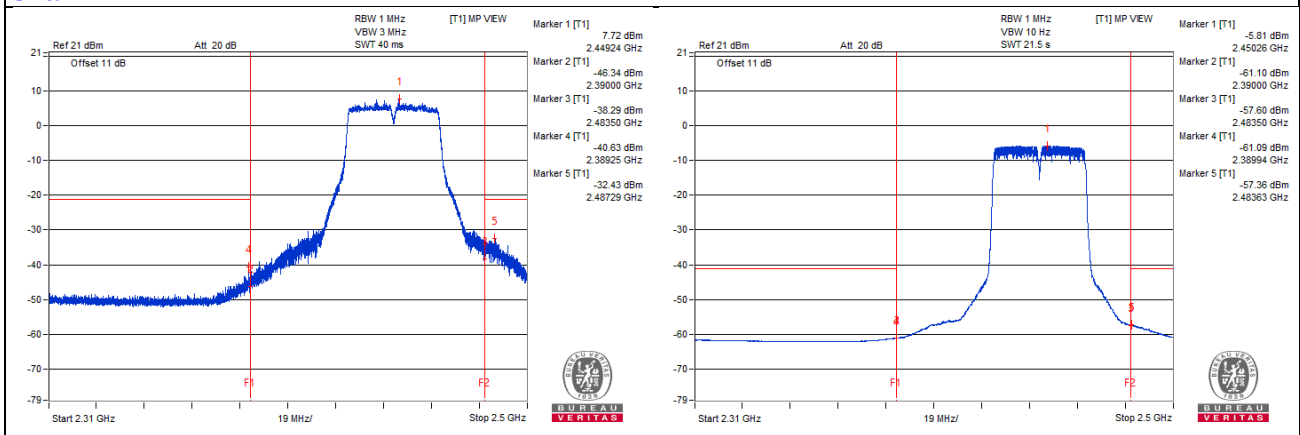

VHT40 - Channel 9

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4903.12 PK	53.78	74	-20.22	-51.92	-50.44	6.63	-41.48
2	4904.68 AV	43.64	54	-10.36	-61.35	-61.17	6.63	-51.62
3	7356.25 PK	55.96	74	-18.04	-48.53	-49.4	6.63	-39.3
4	7357.81 AV	45.65	54	-8.35	-59.39	-59.12	6.63	-49.61

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

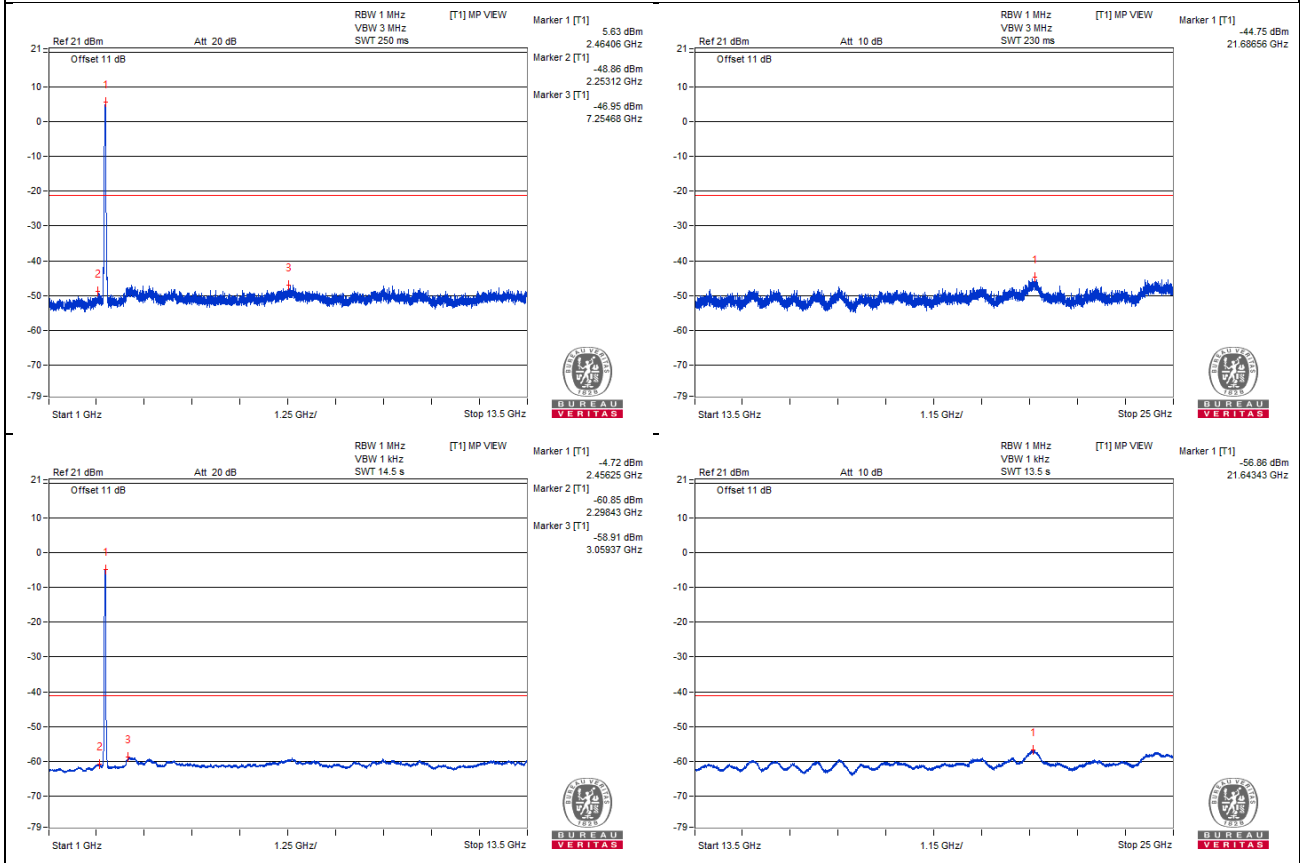

Chain 1

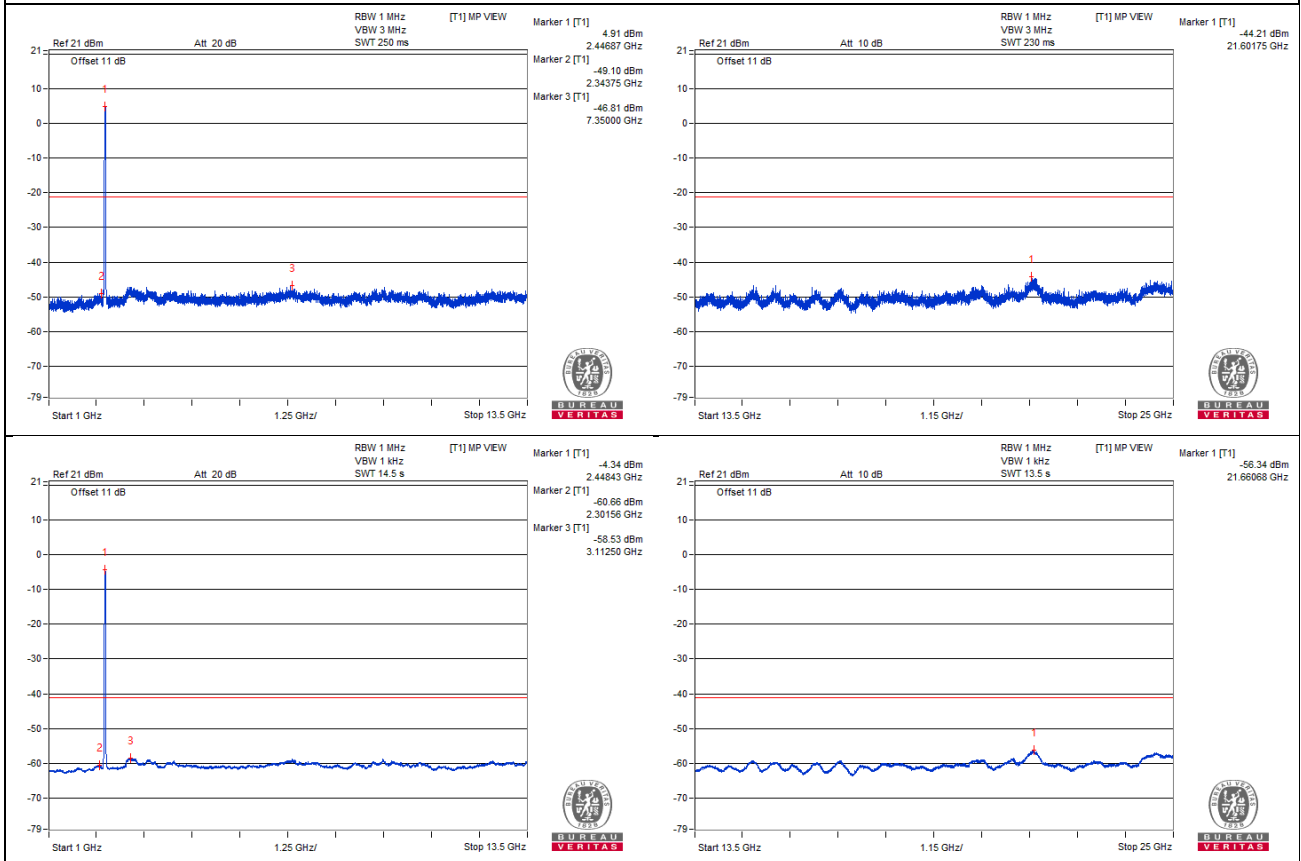

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2484.65 PK	71.92	74	-2.08	-31.87	-34.47	6.63	-23.34
2	2483.51 AV	48.26	54	-5.74	-56.02	-57.37	6.63	-47

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

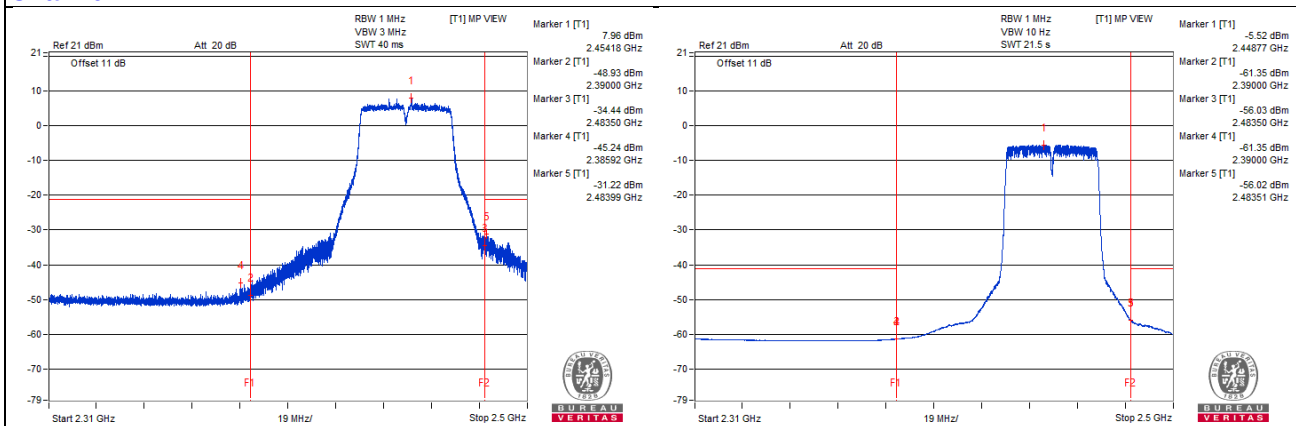

Chain 1

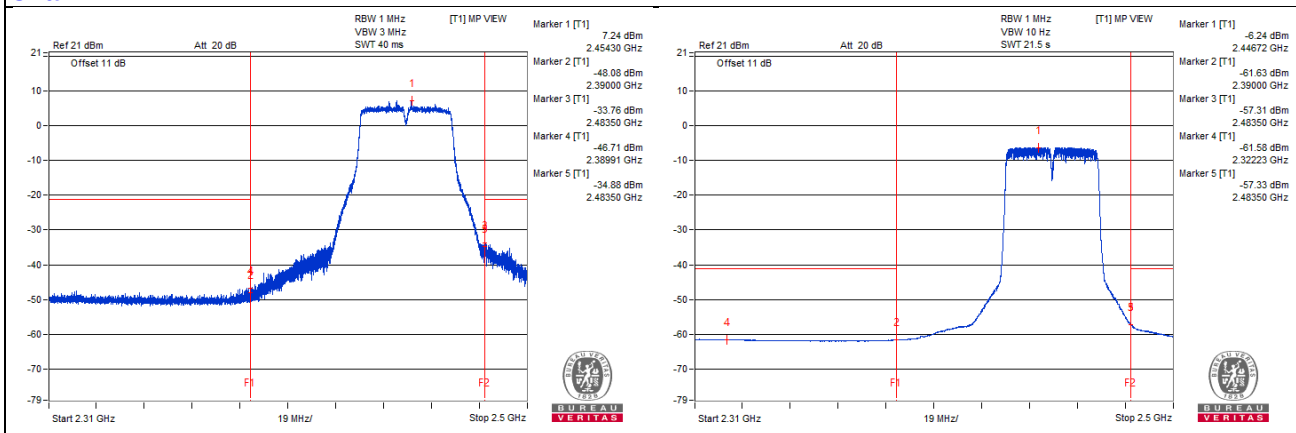

VHT40 - Channel 10

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4914.06 PK	54.16	74	-19.84	-51.46	-50.12	6.63	-41.1
2	4912.5 AV	43.73	54	-10.27	-61.05	-61.3	6.63	-51.53
3	7370.31 PK	56.84	74	-17.16	-46.92	-49.62	6.63	-38.42
4	7371.87 AV	45.72	54	-8.28	-59.34	-59.02	6.63	-49.54

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

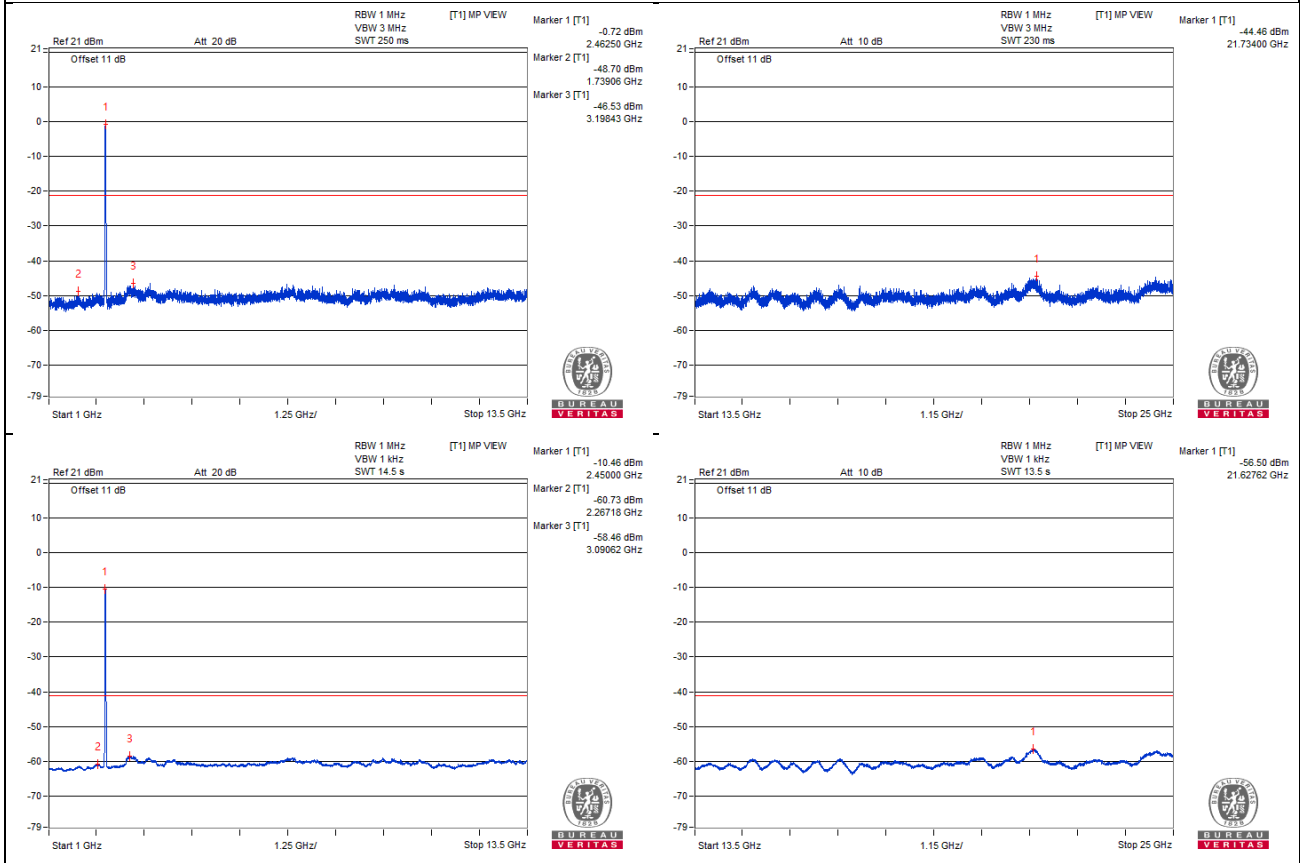

Chain 1

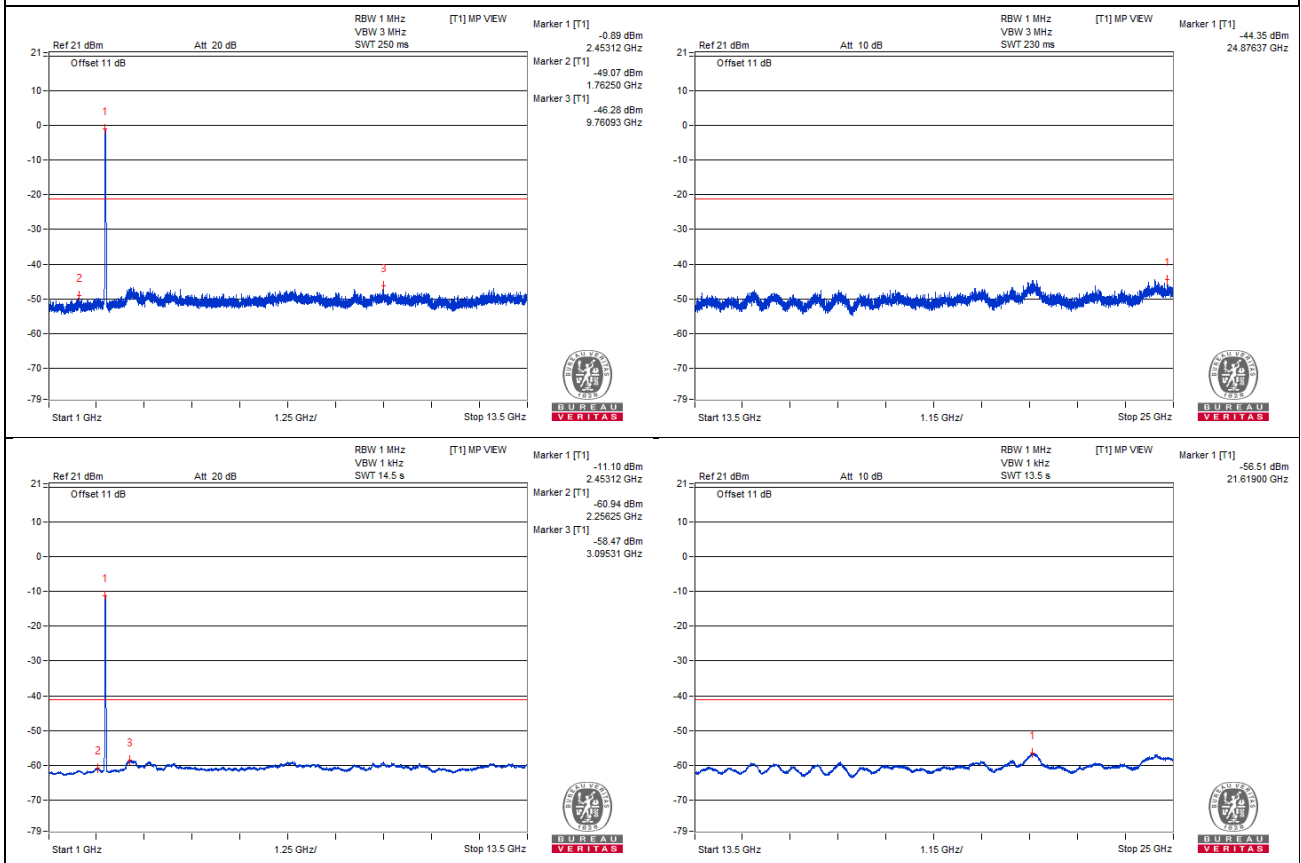

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.68 PK	71.83	74	-2.17	-32.7	-33.47	6.63	-23.43
2	2483.51 AV	48.31	54	-5.69	-56.43	-56.76	6.63	-46.95

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

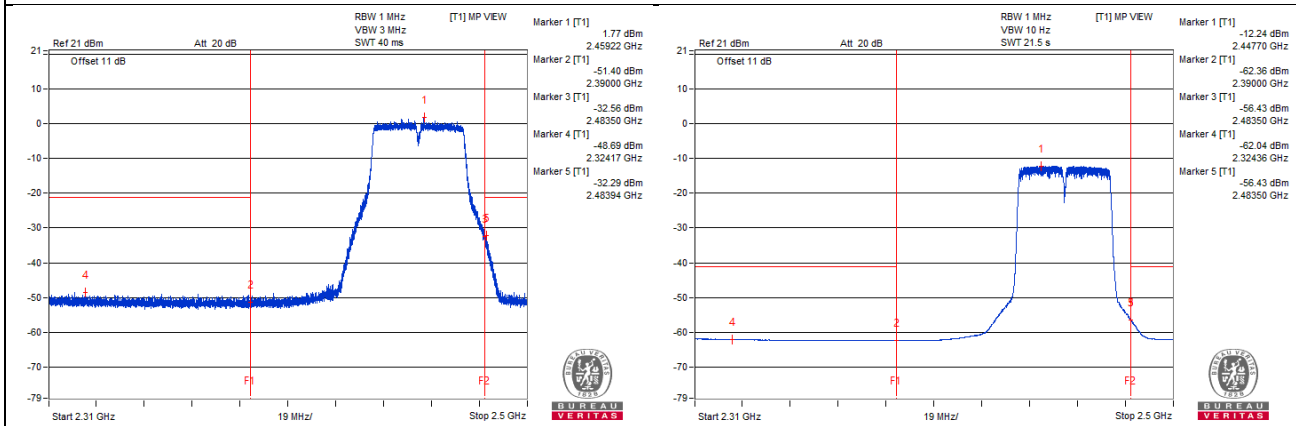

Chain 1

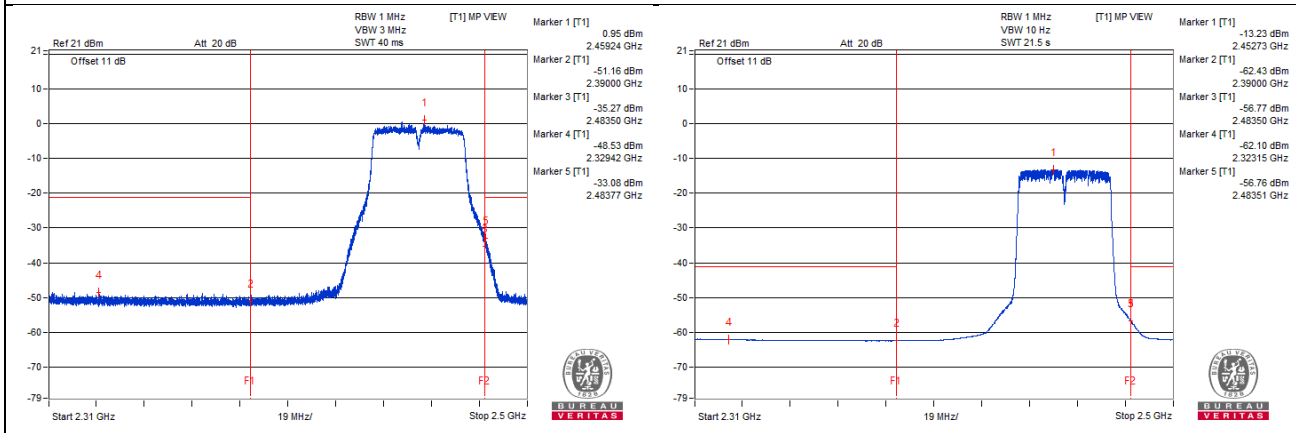

VHT40 - Channel 11

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4923.43 PK	54	74	-20	-50.41	-51.45	6.63	-41.26
2	4923.43 AV	43.76	54	-10.24	-61.07	-61.22	6.63	-51.5
3	7387.5 PK	56.19	74	-17.81	-49.4	-48.11	6.63	-39.07
4	7384.37 AV	45.4	54	-8.6	-59.48	-59.52	6.63	-49.86

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

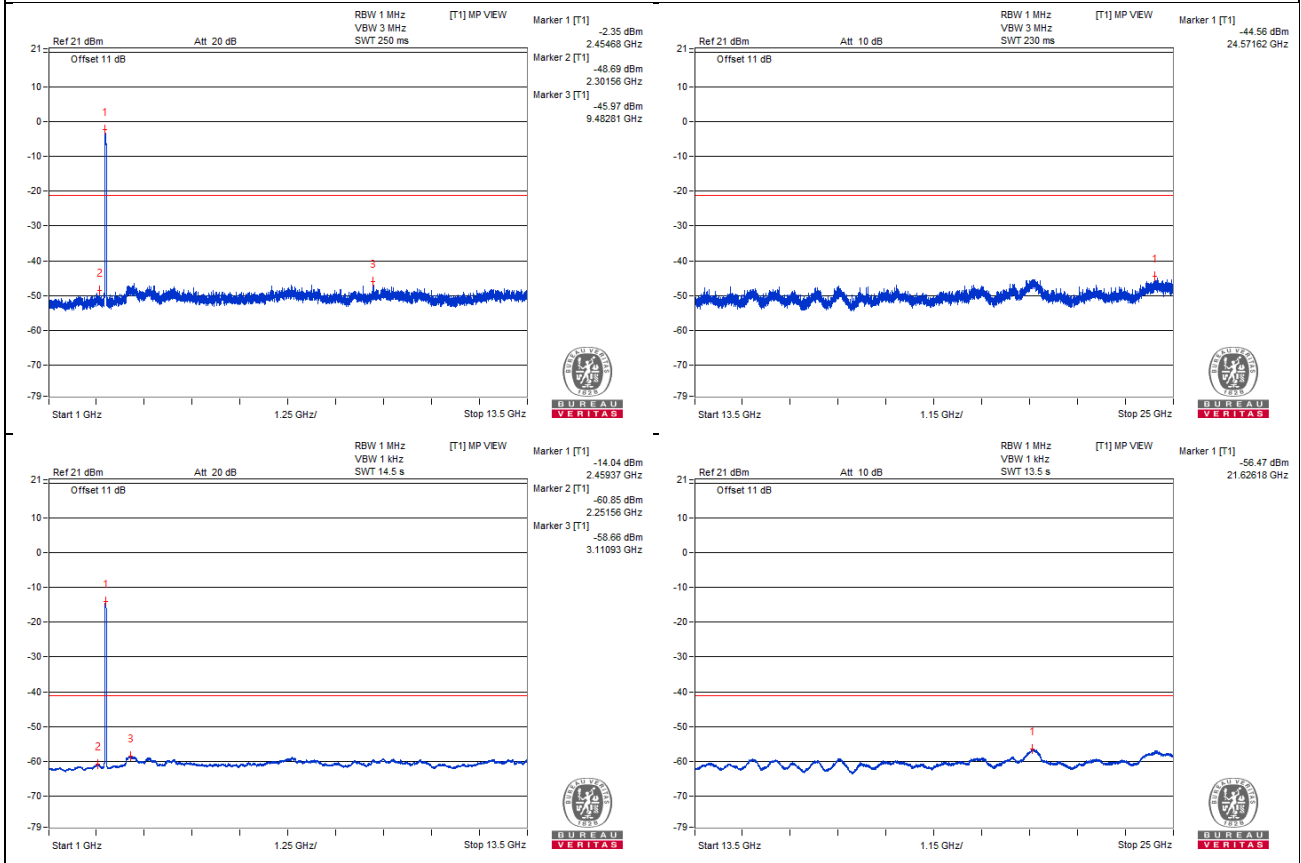

Chain 1

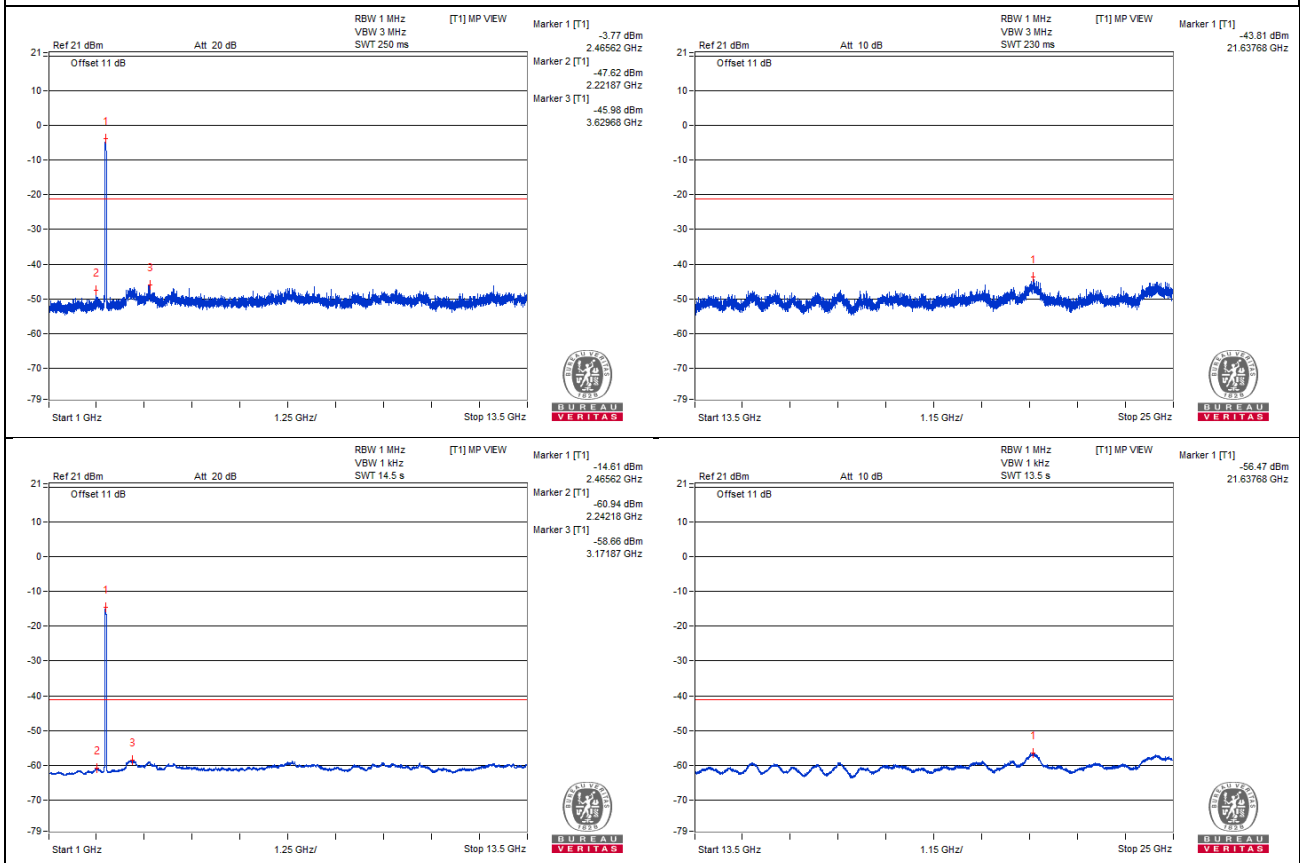

Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.54 PK	71.12	74	-2.88	-33.39	-34.22	6.63	-24.14
2	2483.51 AV	47.82	54	-6.18	-56.93	-57.23	6.63	-47.44

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

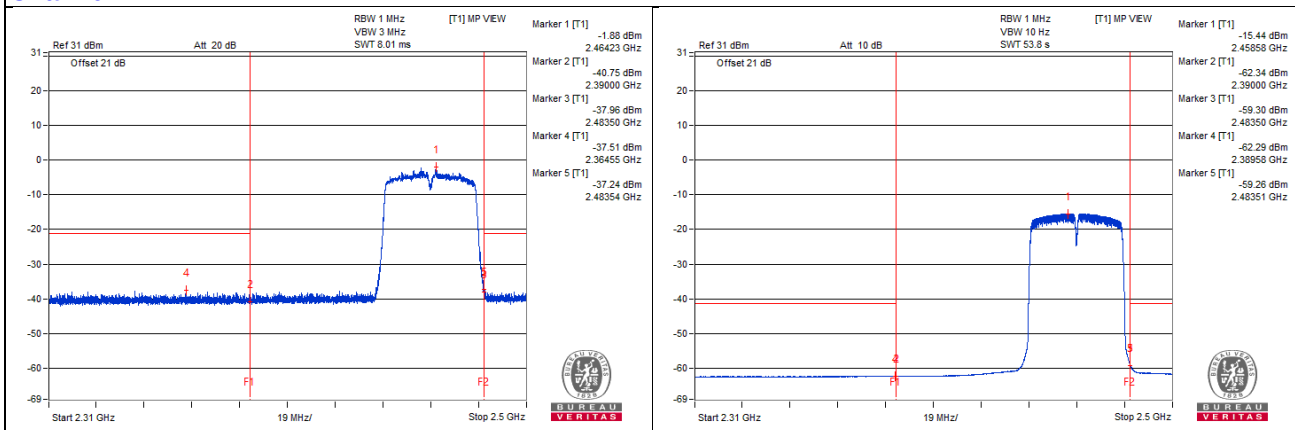

Chain 1

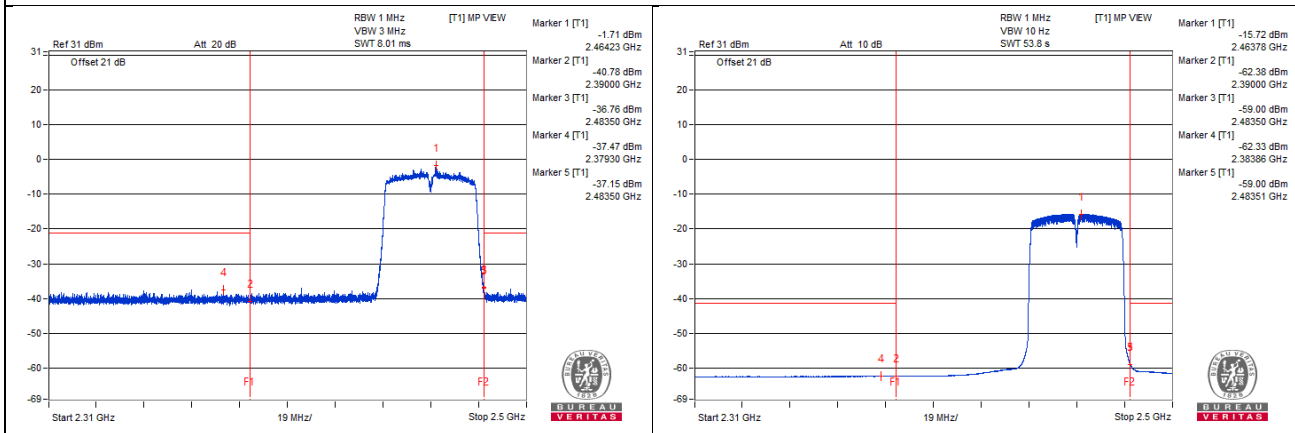

802.11ax (HE 20) - Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1607.81 PK	53.21	74	-20.79	-52.34	-51.13	6.63	-42.05
2	1607.81 AV	42.47	54	-11.53	-62.49	-62.38	6.63	-52.79
3	4825 PK	54.55	74	-19.45	-50.07	-50.65	6.63	-40.71
4	4825 AV	44	54	-10	-60.85	-60.96	6.63	-51.26

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

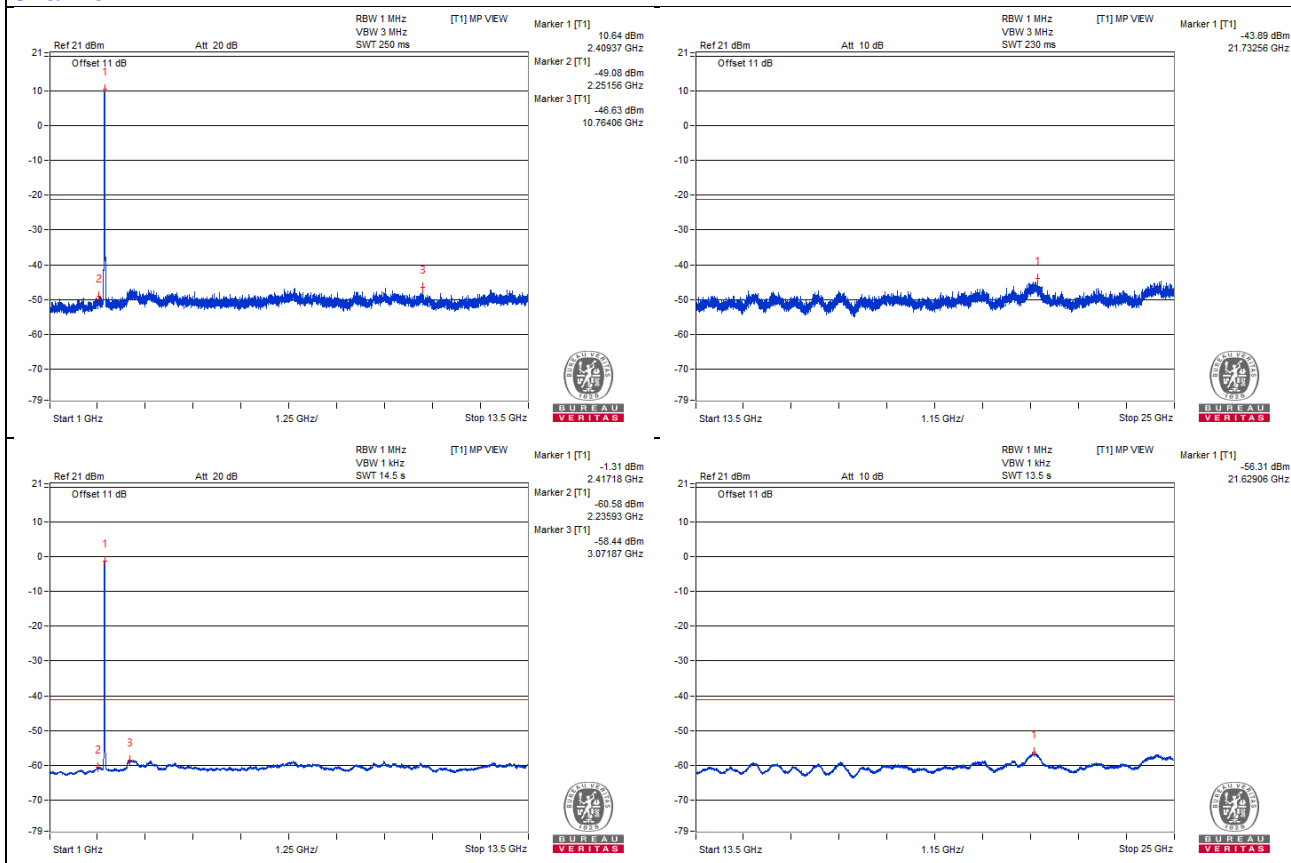

Chain 1

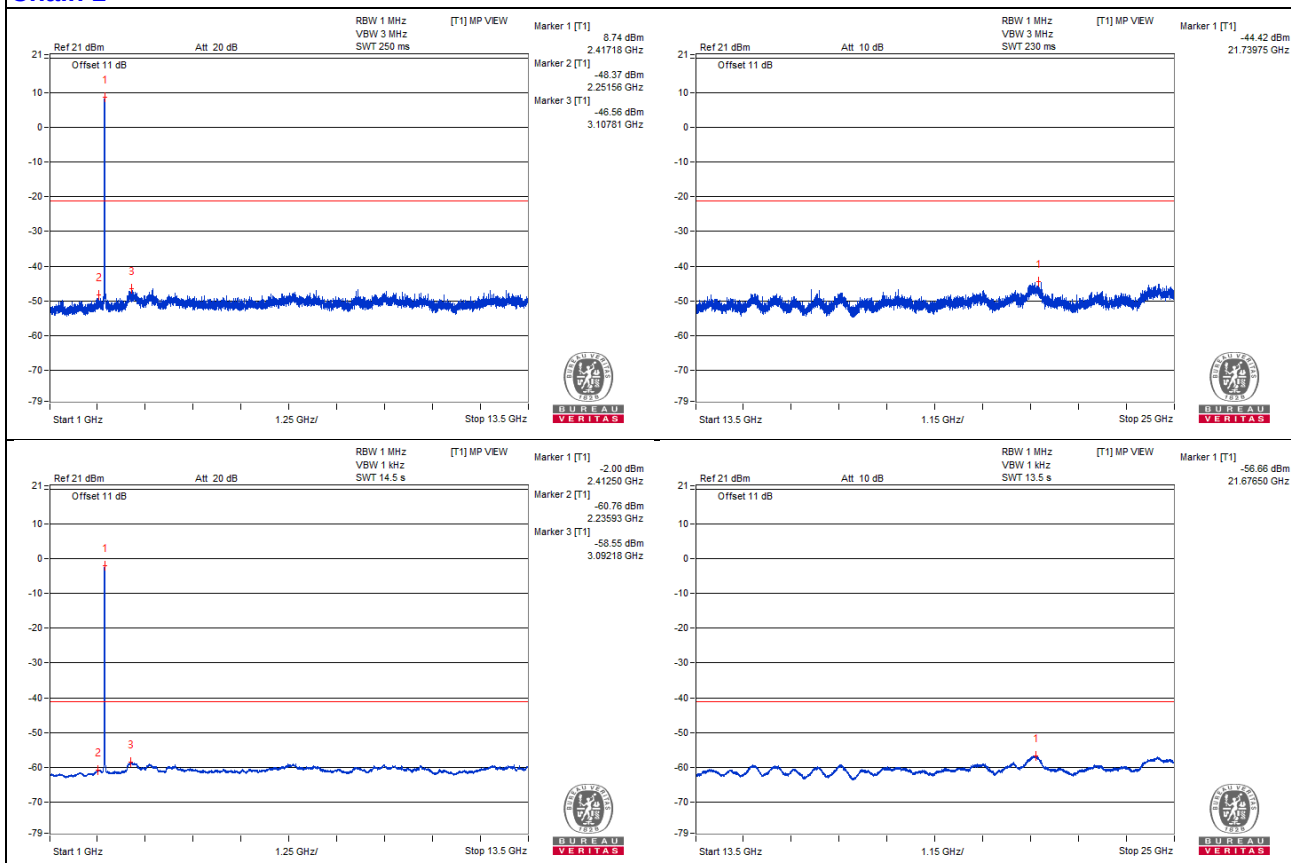

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2388.37 PK	71.21	74	-2.79	-32.1	-36.24	6.63	-24.05
2	2389.89 AV	47.54	54	-6.46	-57.04	-57.7	6.63	-47.72

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

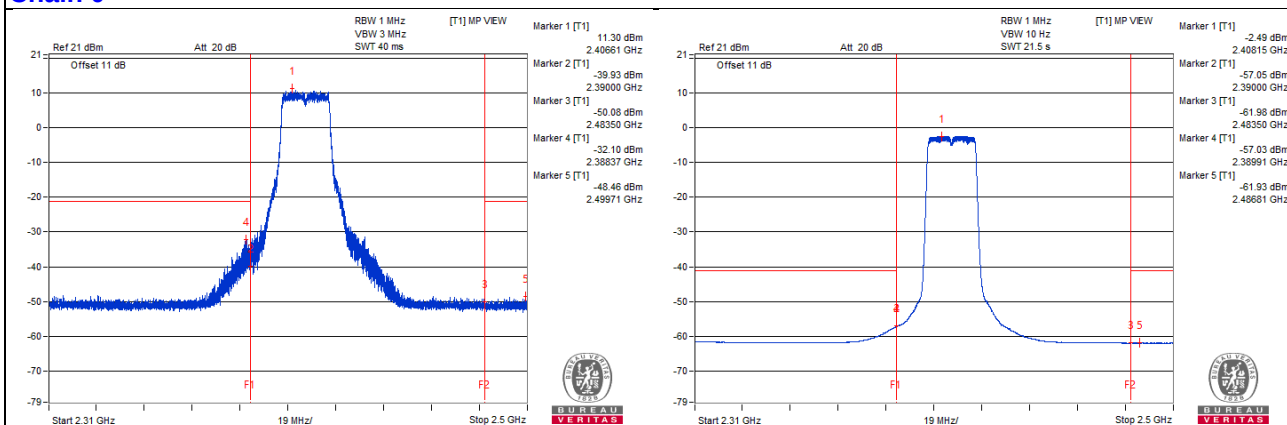

Chain 1

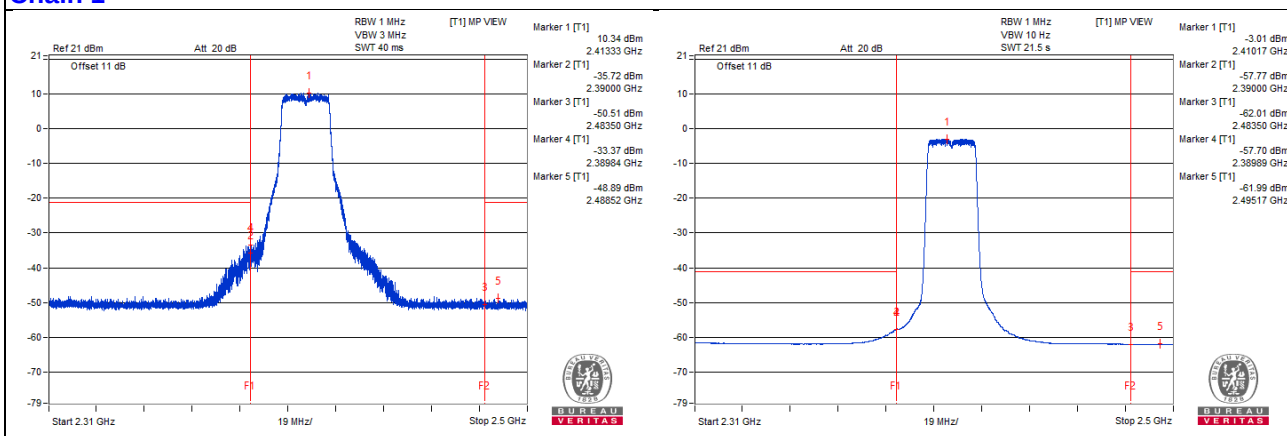

802.11ax (HE 20) - Channel 2

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1610.93 PK	52.44	74	-21.56	-52.57	-52.35	6.63	-42.82
2	1612.5 AV	42.57	54	-11.43	-62.34	-62.32	6.63	-52.69
3	4834.37 PK	55.09	74	-18.91	-49.97	-49.66	6.63	-40.17
4	4835.93 AV	44.01	54	-9.99	-60.76	-61.03	6.63	-51.25
5	7251.56 PK	56.14	74	-17.86	-49.08	-48.46	6.63	-39.12
6	7251.56 AV	45.42	54	-8.58	-59.4	-59.56	6.63	-49.84

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

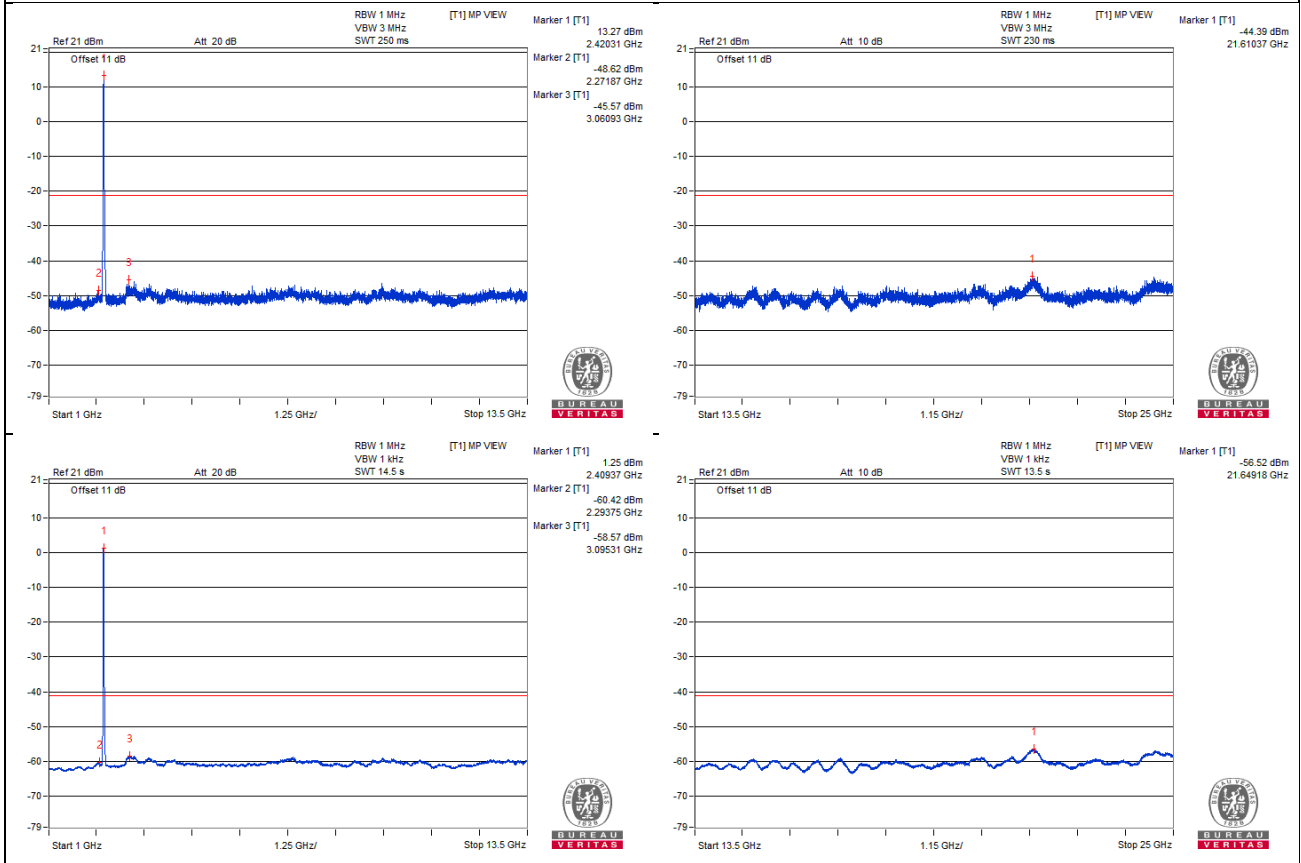

Chain 1

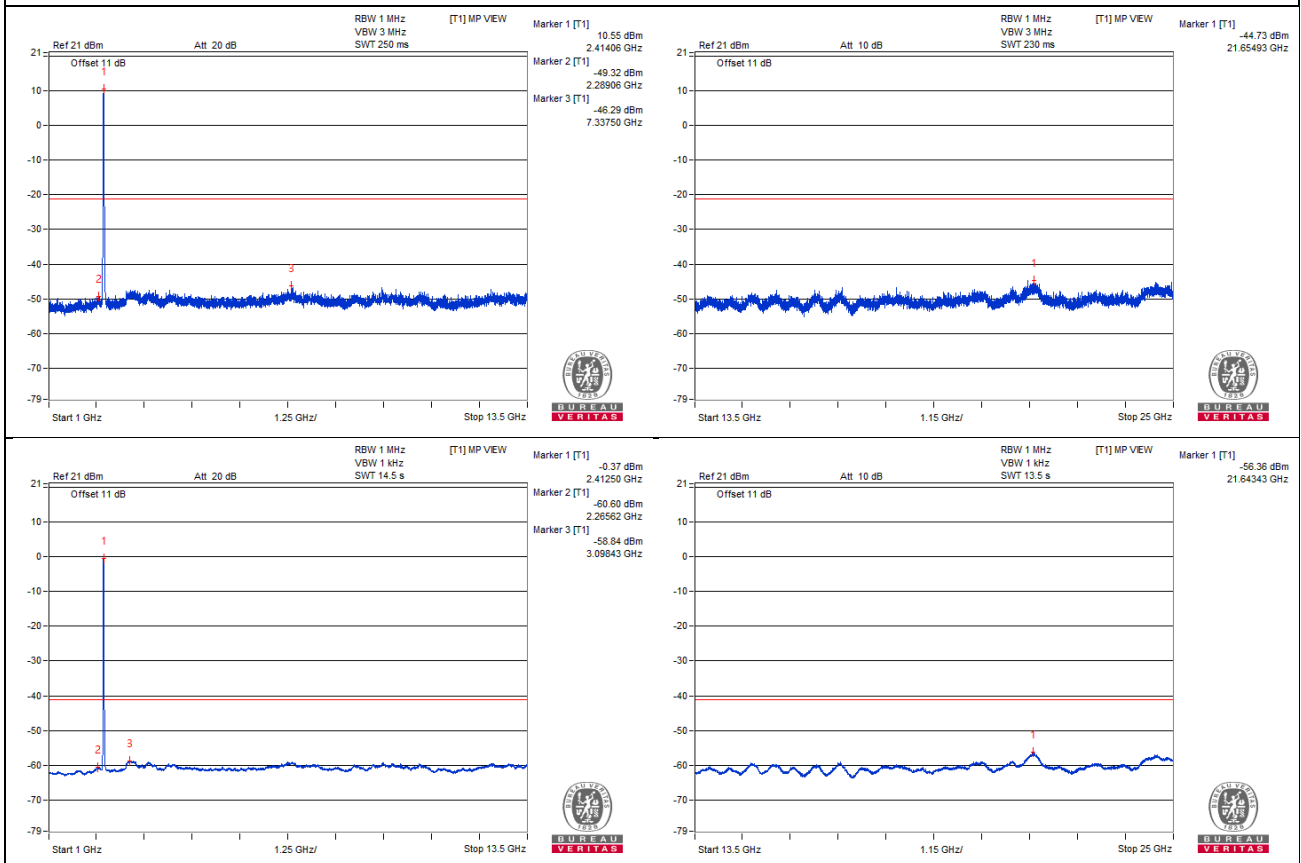

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2388.63 PK	71.43	74	-2.57	-31.57	-36.92	6.63	-23.83
2	2389.89 AV	50.58	54	-3.42	-53.2	-55.84	6.63	-44.68

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

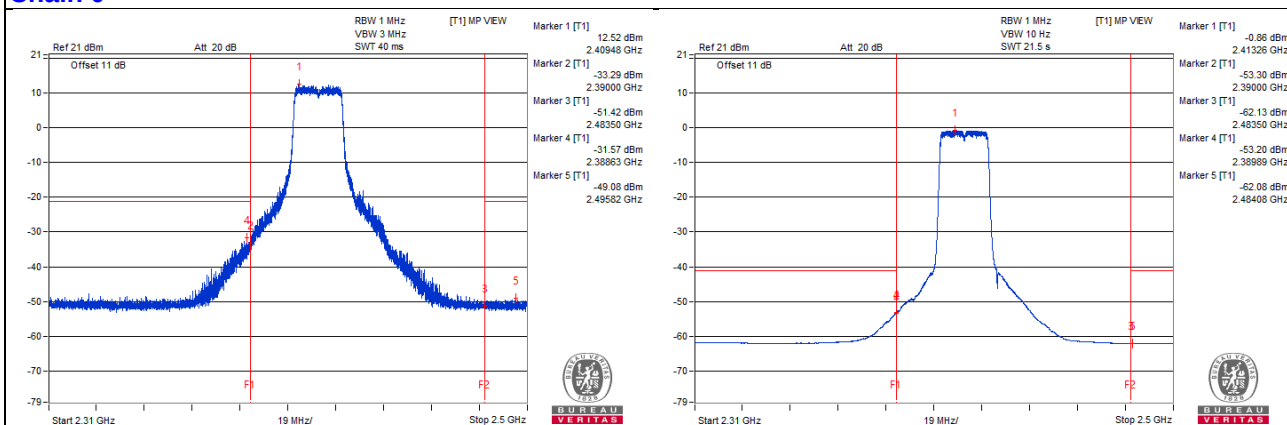

Chain 1

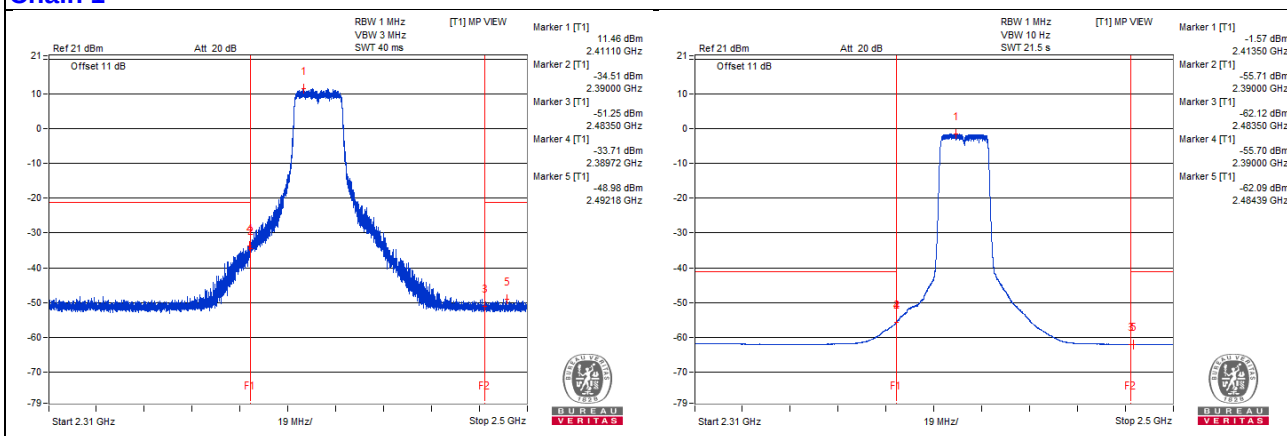

802.11ax (HE 20) - Channel 6

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1623.43 PK	52.5	74	-21.5	-53.22	-51.71	6.63	-42.76
2	1625 AV	42.42	54	-11.58	-62.37	-62.59	6.63	-52.84
3	4875 PK	54.57	74	-19.43	-51.11	-49.67	6.63	-40.69
4	4873.43 AV	43.8	54	-10.2	-61.18	-61.02	6.63	-51.46
5	7312.5 PK	55.11	74	-18.89	-49.65	-49.94	6.63	-40.15
6	7309.37 AV	45.43	54	-8.57	-59.17	-59.8	6.63	-49.83

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

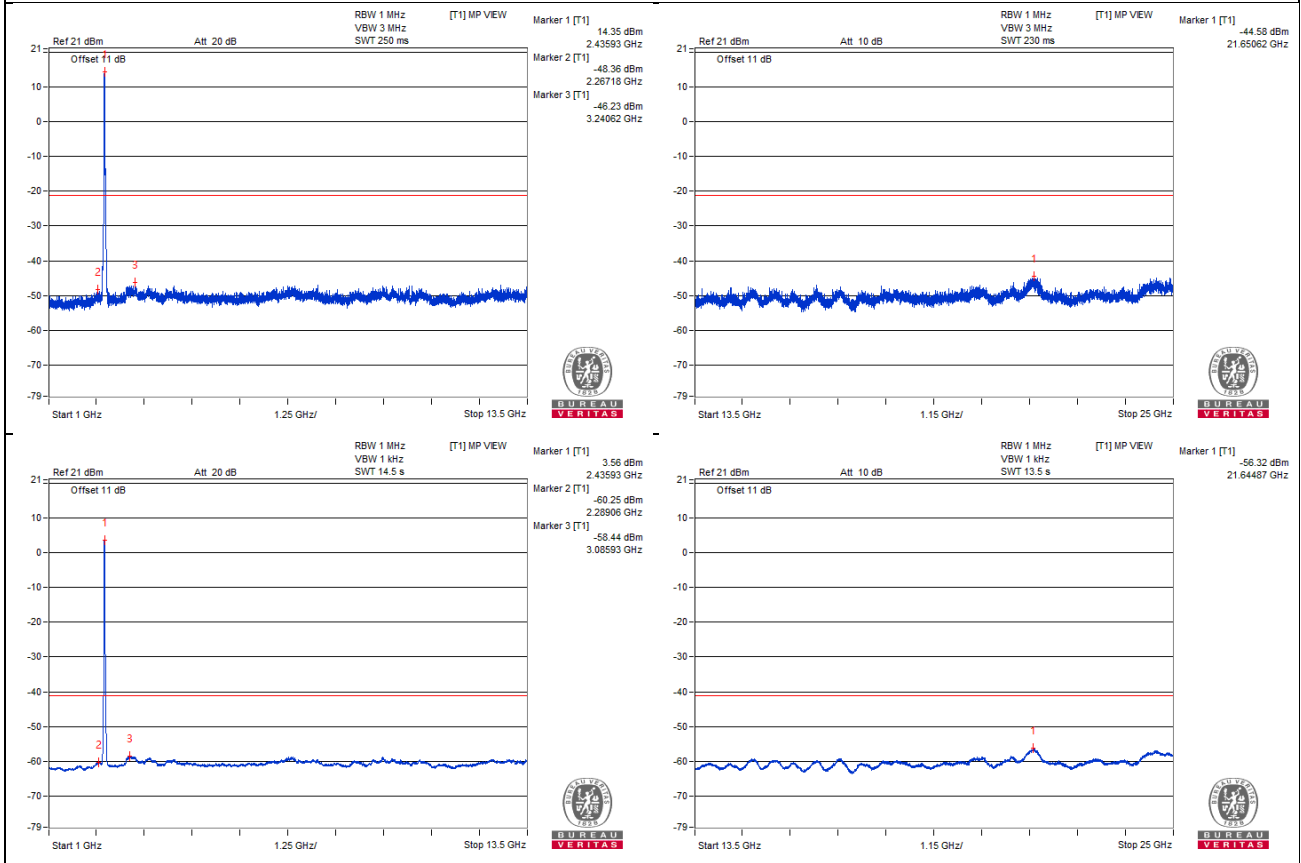

Chain 1

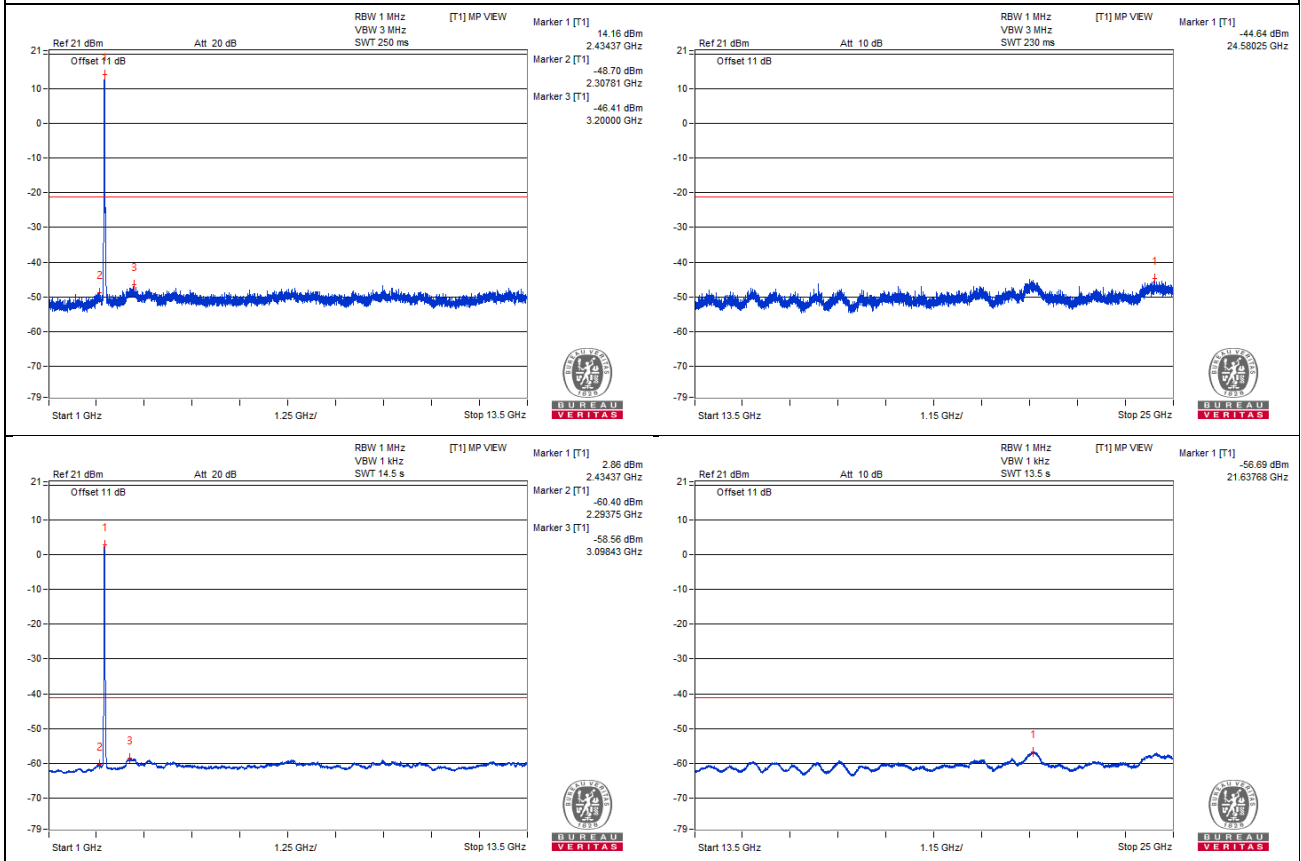

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2388.28 PK	68.36	74	-5.64	-34.71	-39.78	6.63	-26.9
2	2389.94 AV	47.36	54	-6.64	-56.99	-58.17	6.63	-47.9
3	2485.34 PK	68.2	74	-5.8	-35.56	-38.25	6.63	-27.06
4	2483.51 AV	47.77	54	-6.23	-56.65	-57.66	6.63	-47.49

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

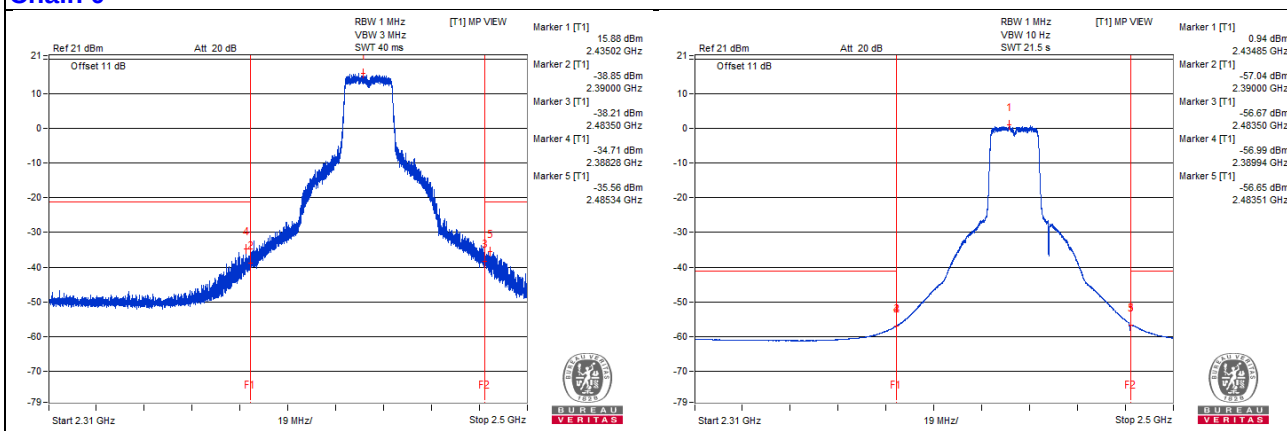

Chain 1

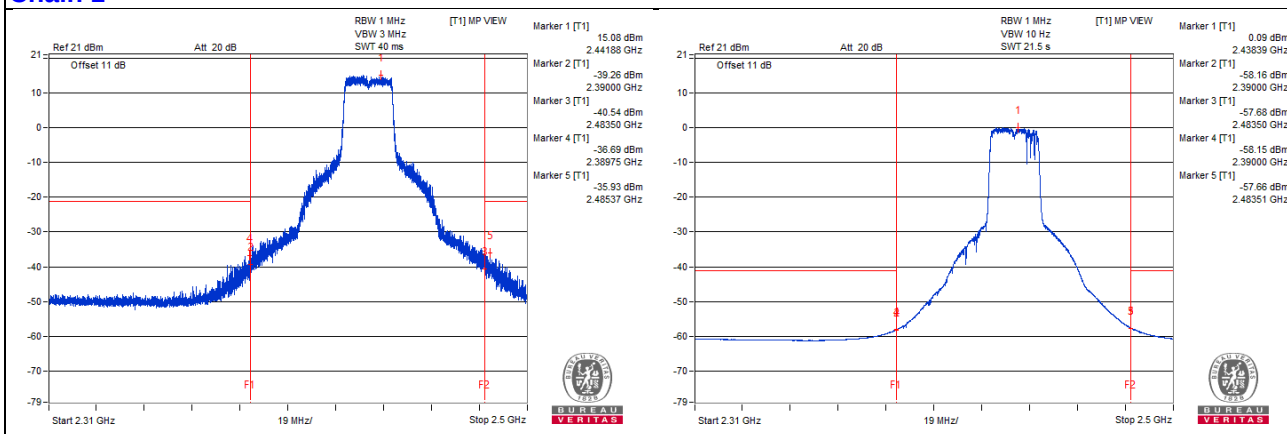

802.11ax (HE 20) - Channel 10

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4914.06 PK	55.17	74	-18.83	-49.07	-50.51	6.63	-40.09
2	4914.06 AV	43.77	54	-10.23	-61.16	-61.1	6.63	-51.49
3	7371.87 PK	56.43	74	-17.57	-47.94	-49.07	6.63	-38.83
4	7370.31 AV	45.68	54	-8.32	-59.09	-59.35	6.63	-49.58

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

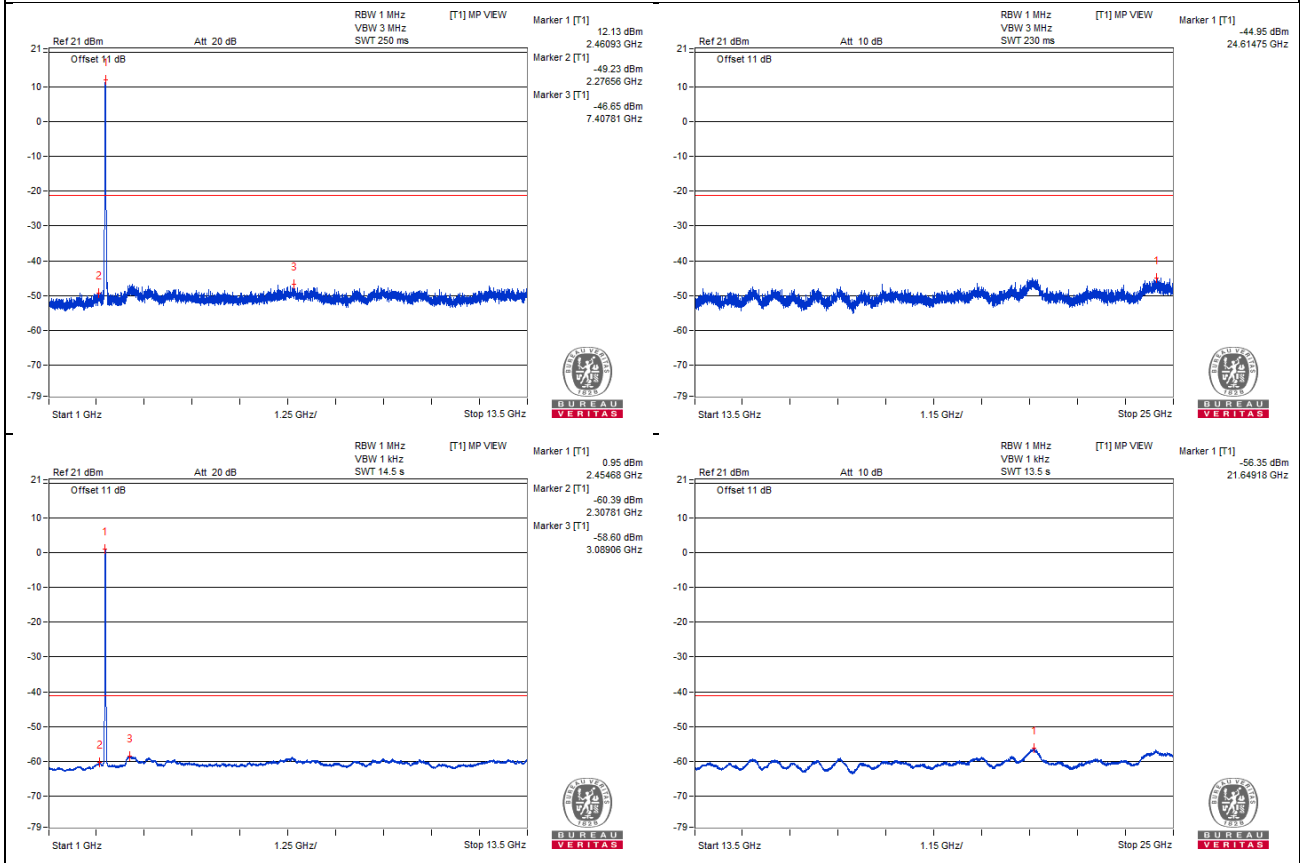

Chain 1

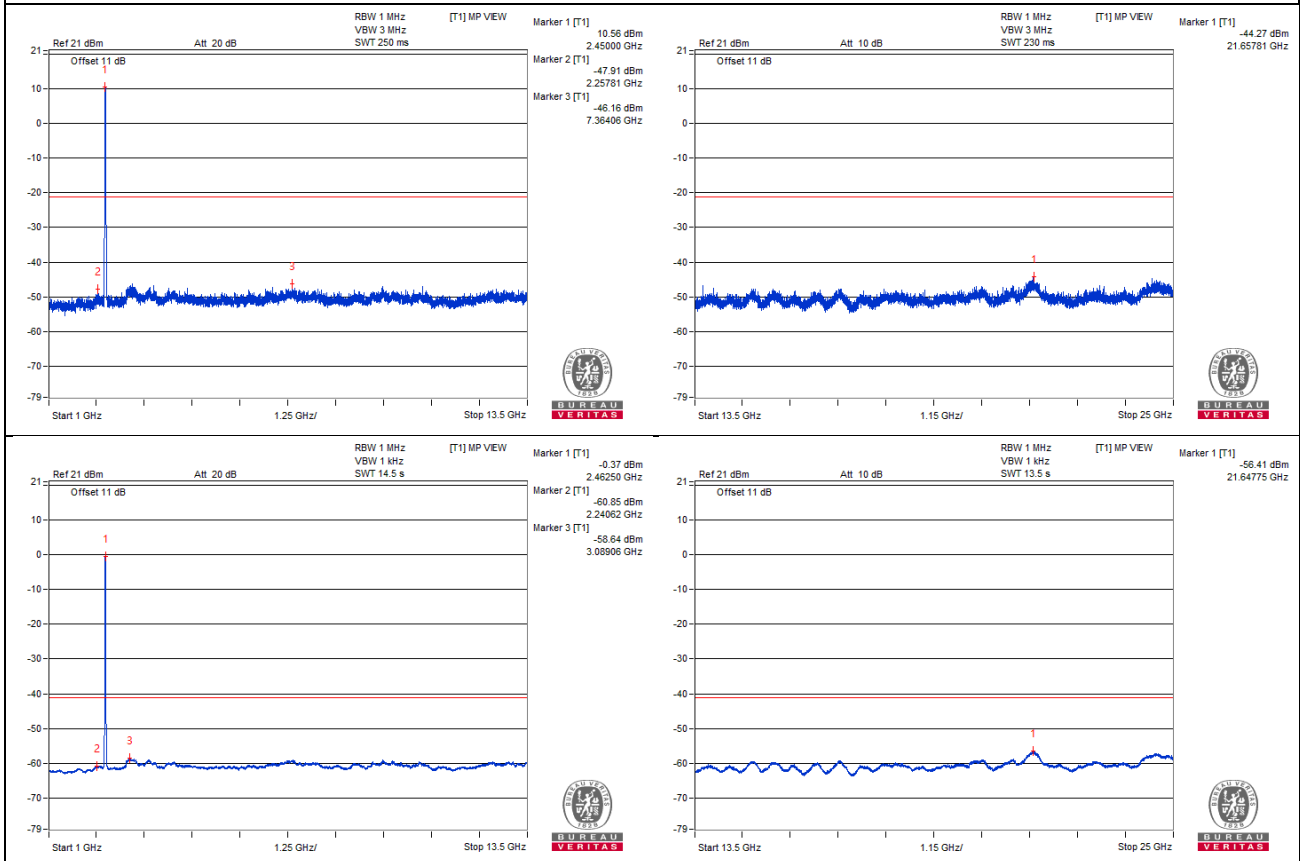

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.8 PK	71.83	74	-2.17	-33.12	-33.02	6.63	-23.43
2	2483.51 AV	50.34	54	-3.66	-53.76	-55.55	6.63	-44.92

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

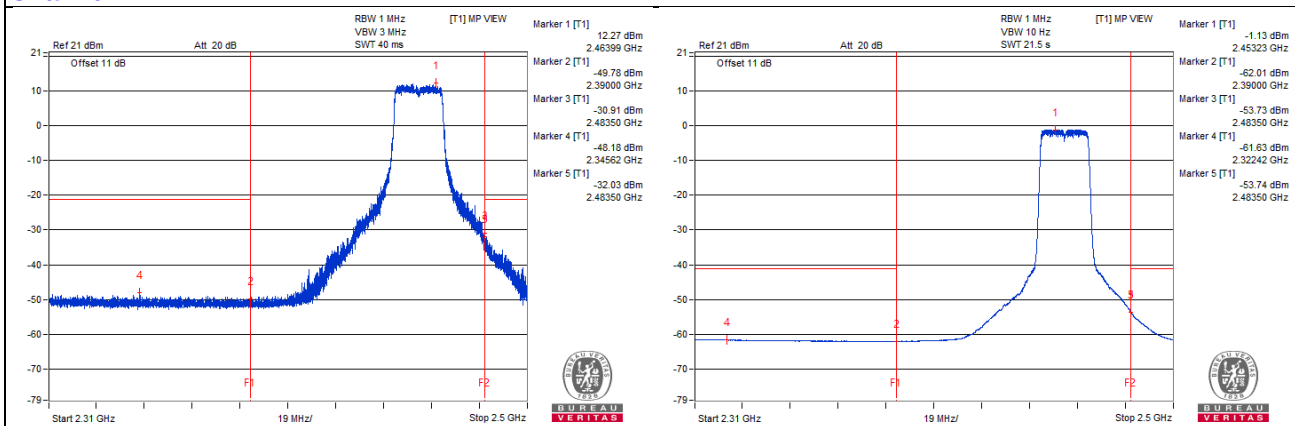

Chain 1

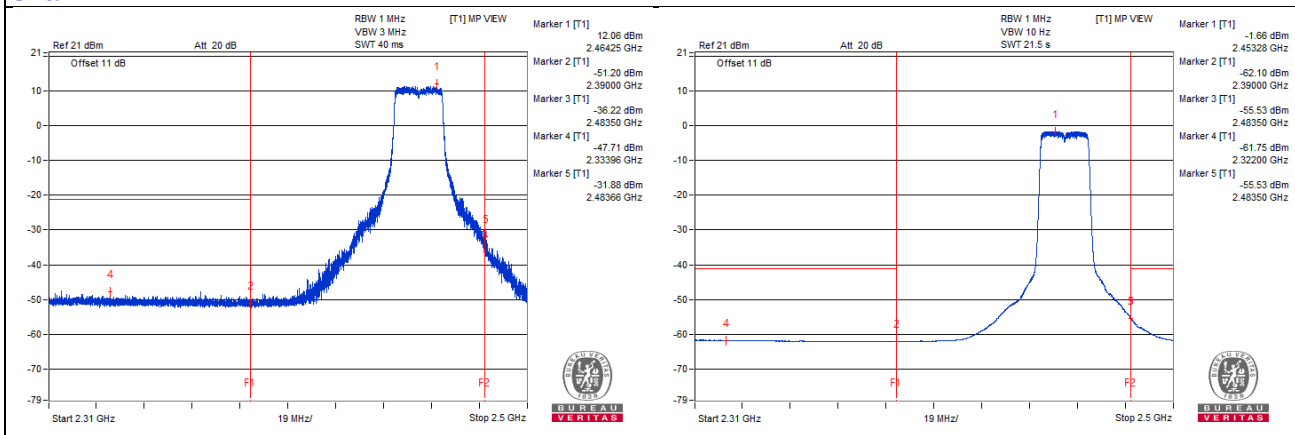

802.11ax (HE 20) - Channel 11

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4923.43 PK	54.87	74	-19.13	-50.72	-49.43	6.63	-40.39
2	4925 AV	43.6	54	-10.4	-61.23	-61.37	6.63	-51.66
3	7385.93 PK	56.48	74	-17.52	-47.96	-48.93	6.63	-38.78
4	7385.93 AV	45.58	54	-8.42	-59.01	-59.65	6.63	-49.68

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

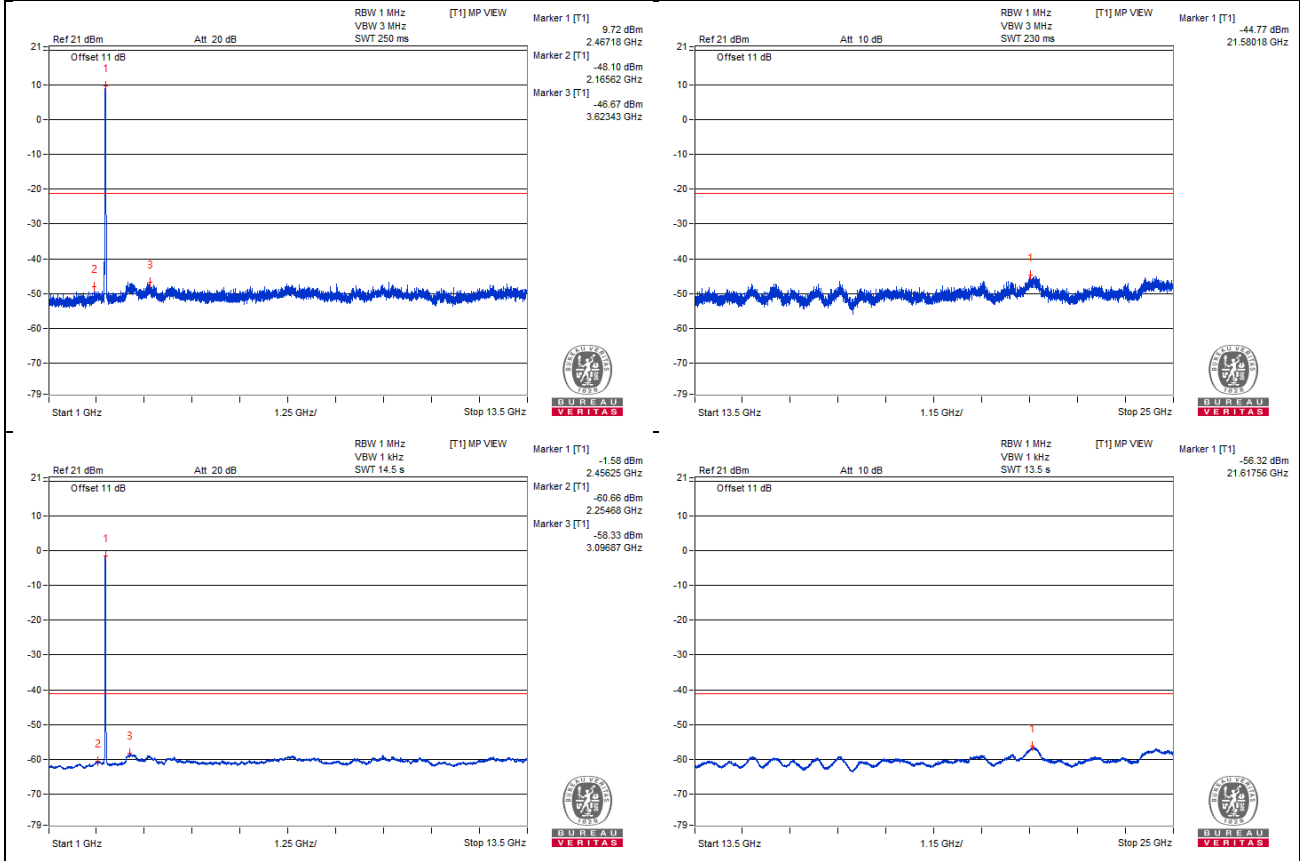

Chain 1

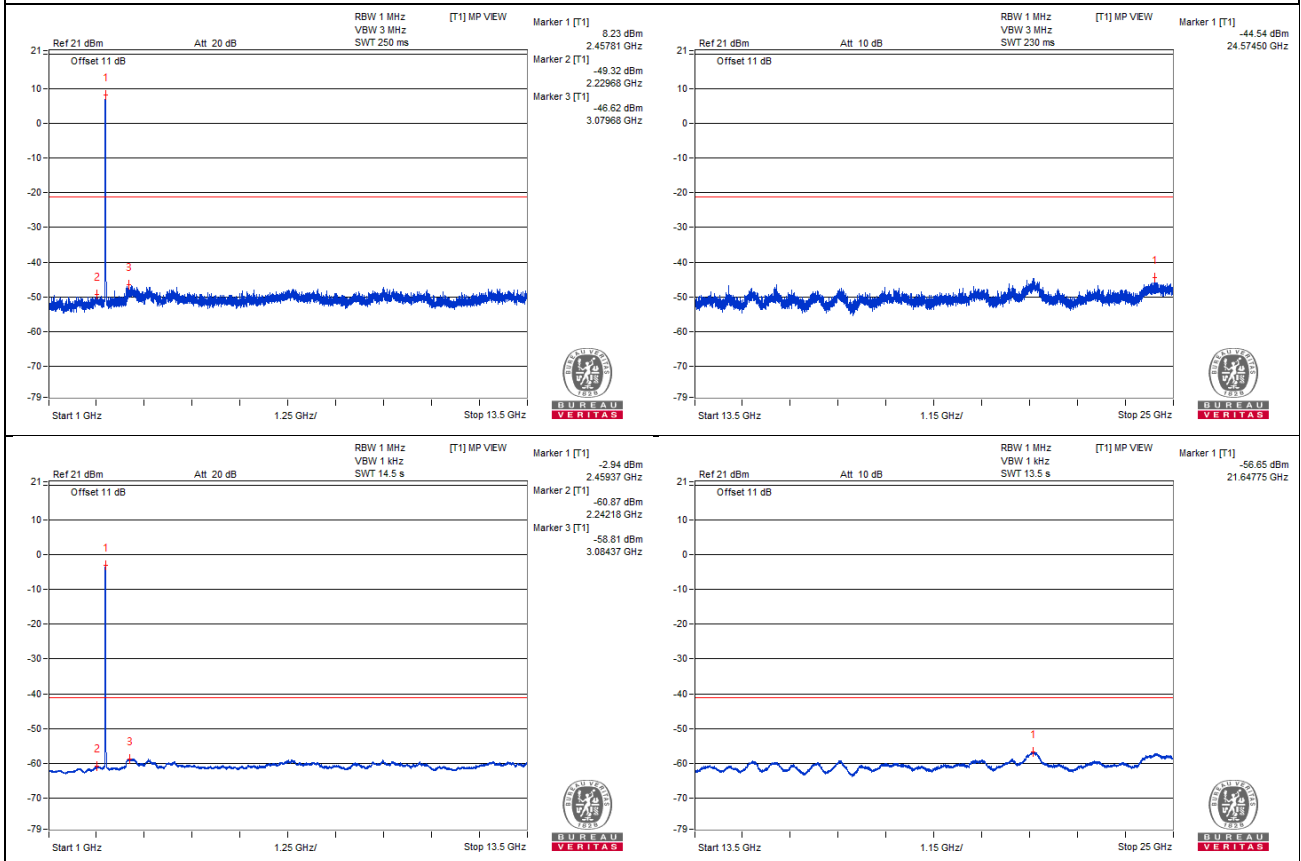

Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2484.7 PK	70.1	74	-3.9	-32.53	-39.83	6.63	-25.16
2	2483.73 AV	46.43	54	-7.57	-57.78	-59.3	6.63	-48.83

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

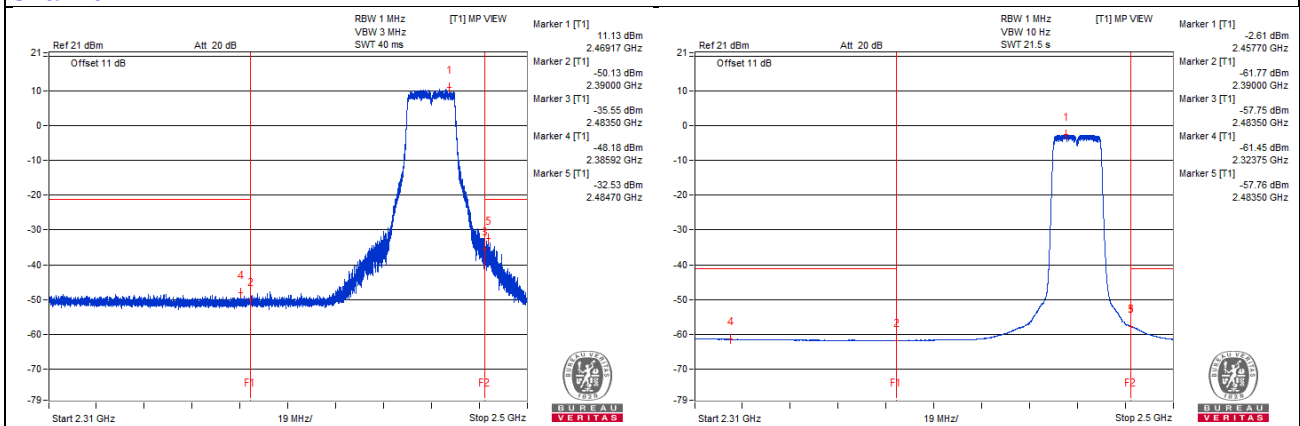

Chain 1

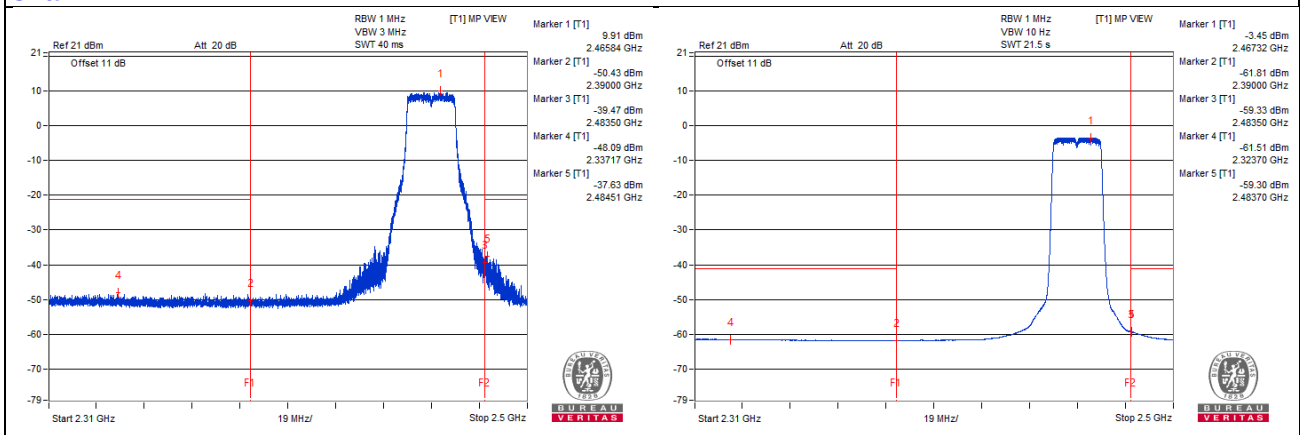

802.11ax (HE 20) - Channel 12

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4934.37 PK	54.04	74	-19.96	-51.24	-50.51	6.63	-41.22
2	4935.93 AV	43.72	54	-10.28	-61.14	-61.23	6.63	-51.54
3	7400 PK	56.73	74	-17.27	-47.41	-49.09	6.63	-38.53
4	7401.56 AV	45.33	54	-8.67	-59.55	-59.59	6.63	-49.93

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

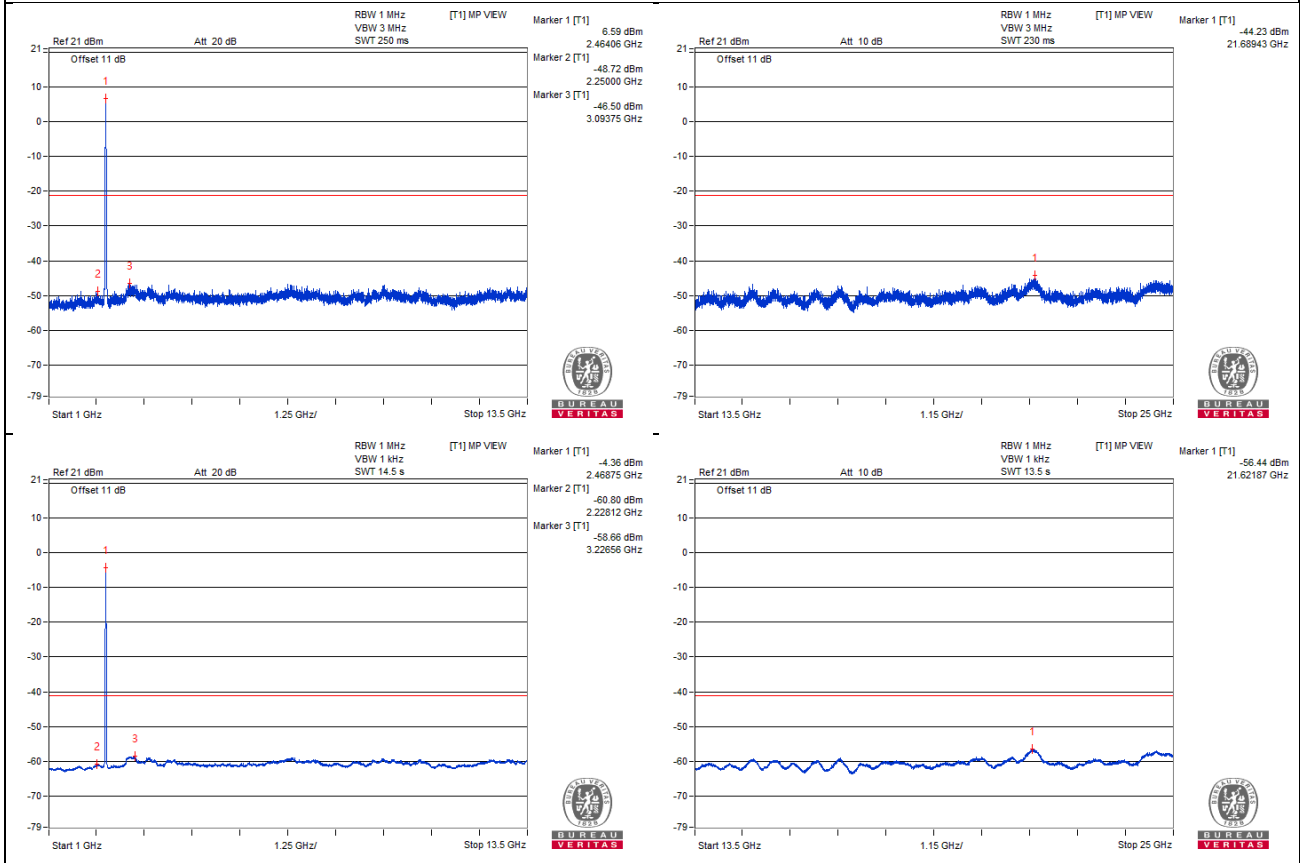

Chain 1

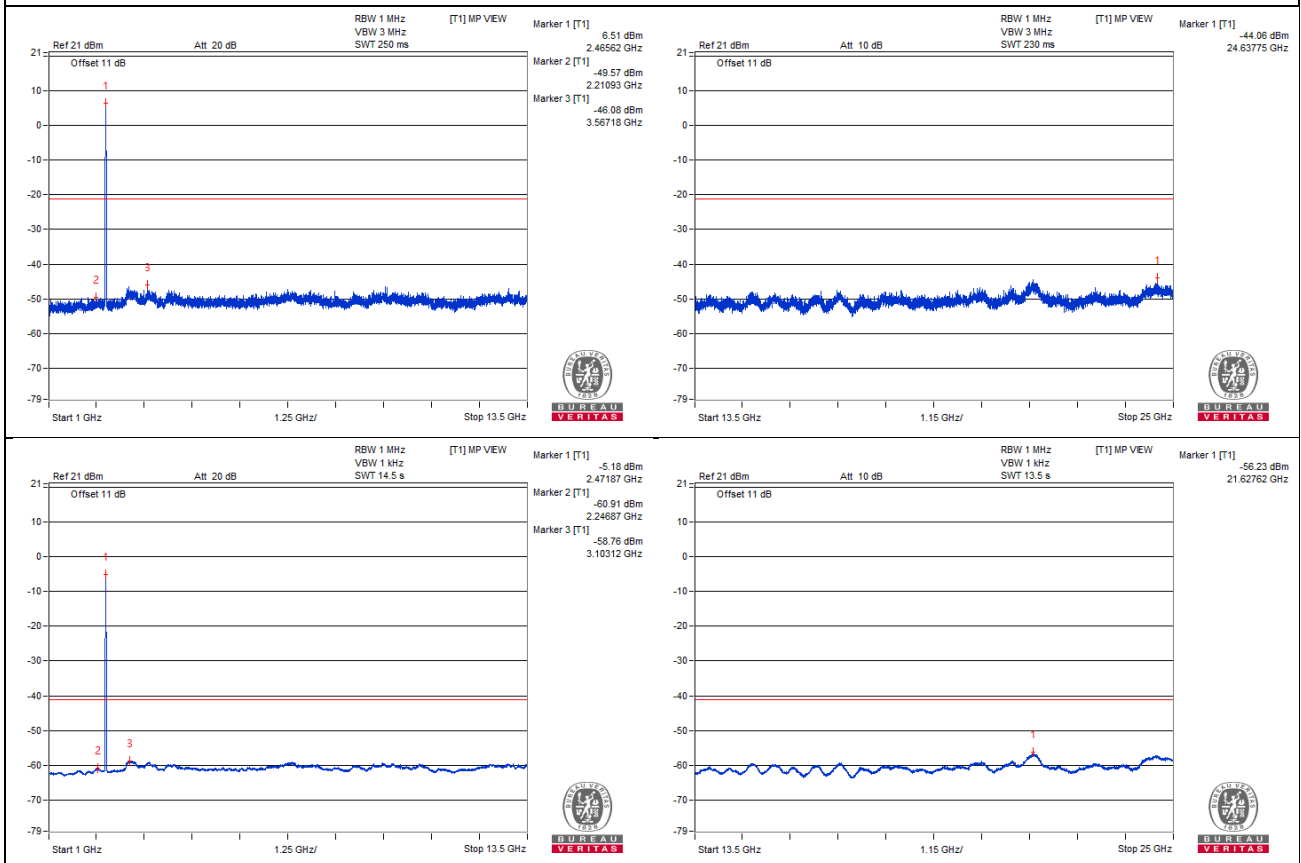

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.77 PK	71.26	74	-2.74	-32.25	-35.7	6.63	-24
2	2483.51 AV	47.21	54	-6.79	-57.49	-57.91	6.63	-48.05

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

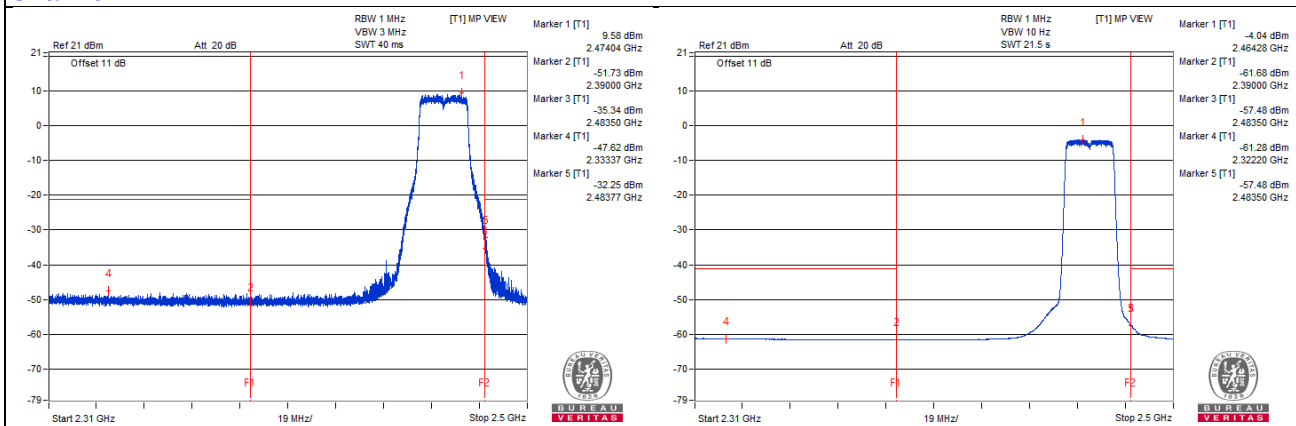

Chain 1

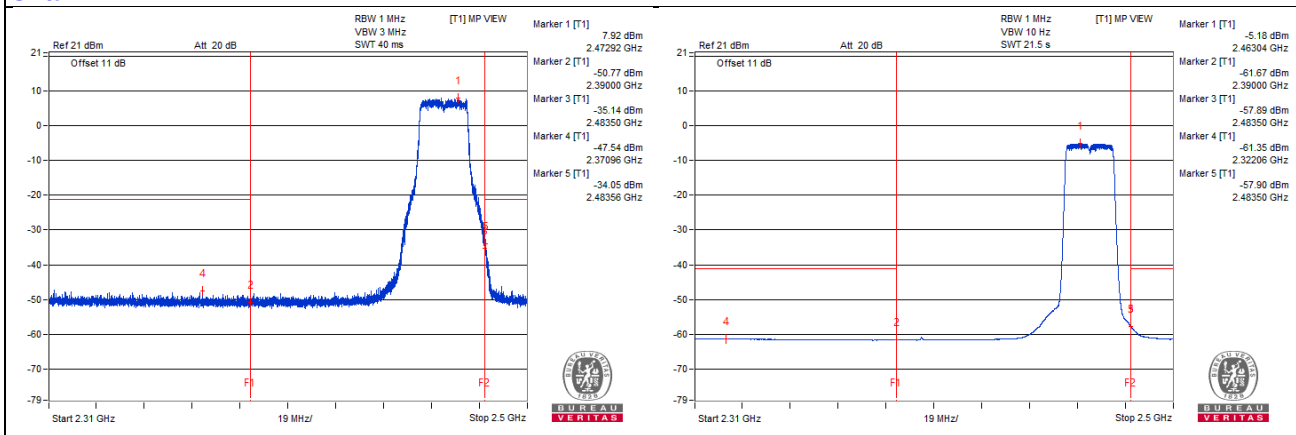

802.11ax (HE 20) - Channel 13

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4945.31 PK	53.99	74	-20.01	-50.1	-51.91	6.63	-41.27
2	4942.18 AV	43.56	54	-10.44	-61.24	-61.44	6.63	-51.7
3	7414.06 PK	55.77	74	-18.23	-49.23	-49.04	6.63	-39.49
4	7417.18 AV	45.38	54	-8.62	-59.53	-59.51	6.63	-49.88

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

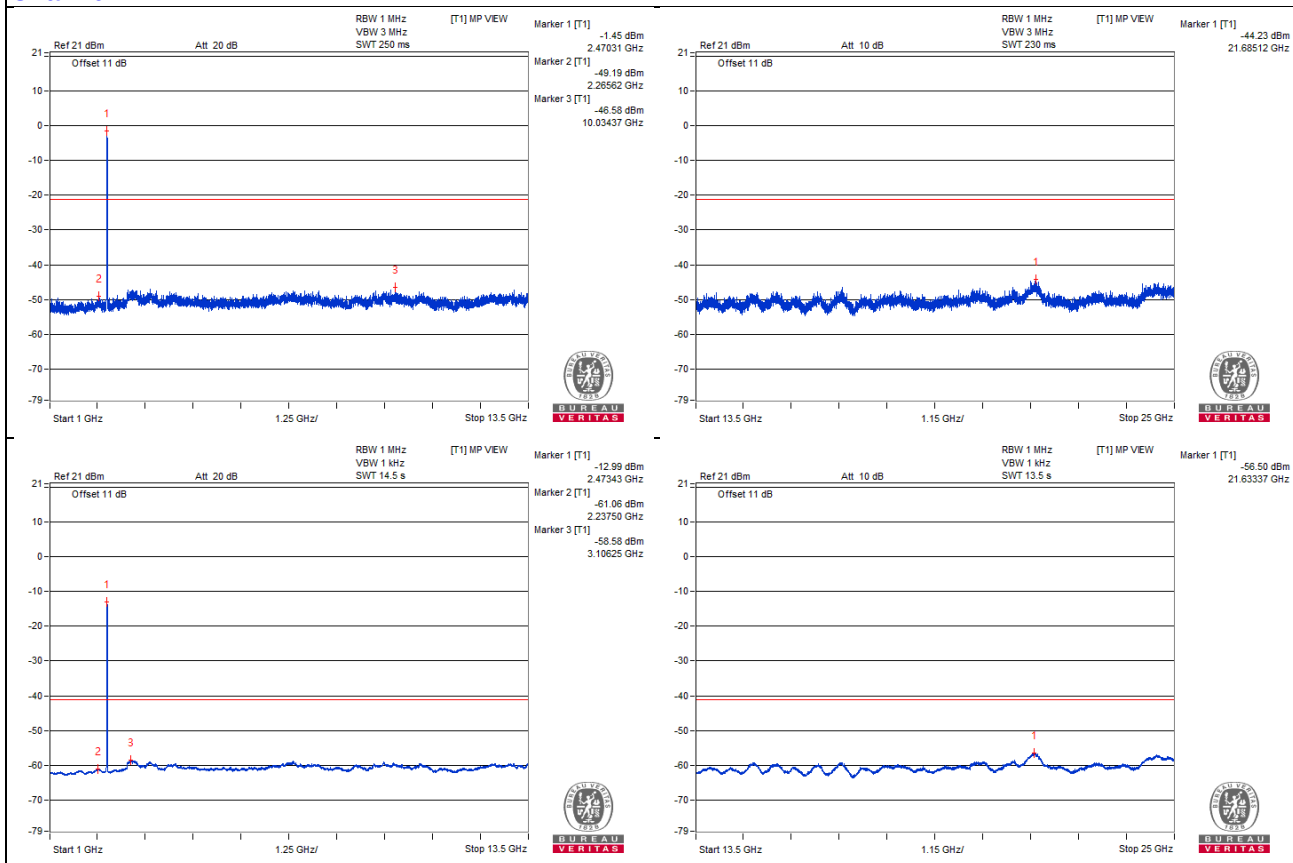

Chain 1

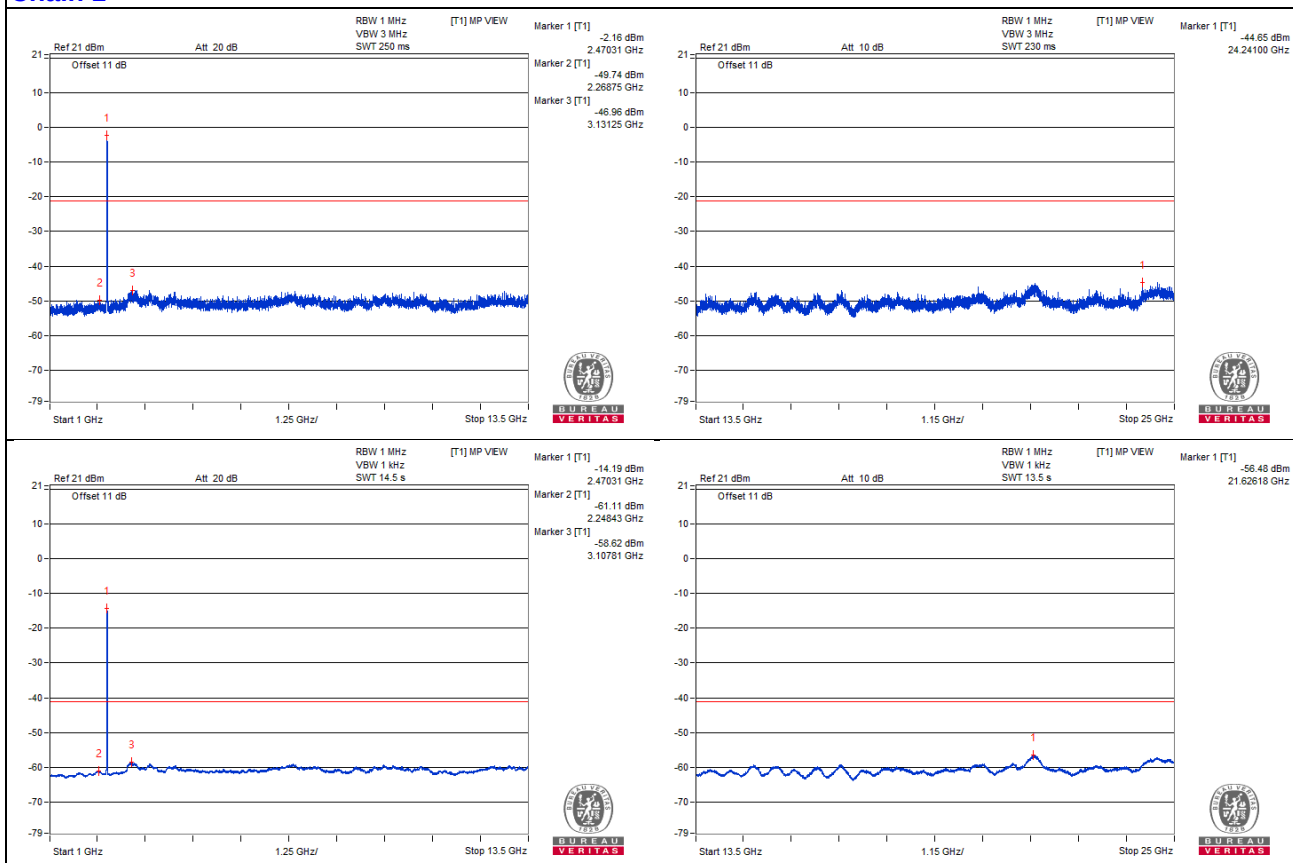

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.51 PK	71.08	74	-2.92	-33.42	-34.27	6.63	-24.18
2	2483.51 AV	51.22	54	-2.78	-53.46	-53.92	6.63	-44.04

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

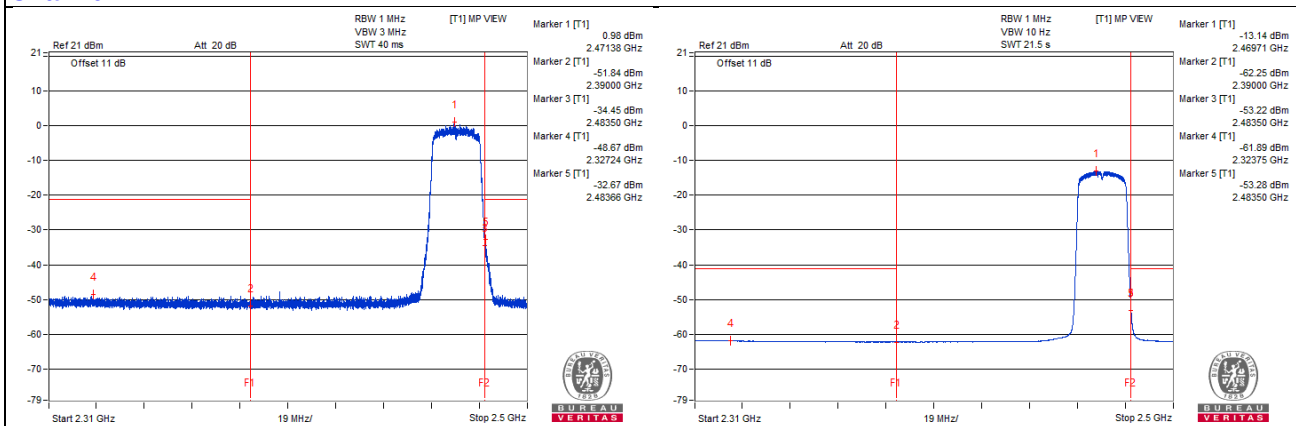

Chain 1

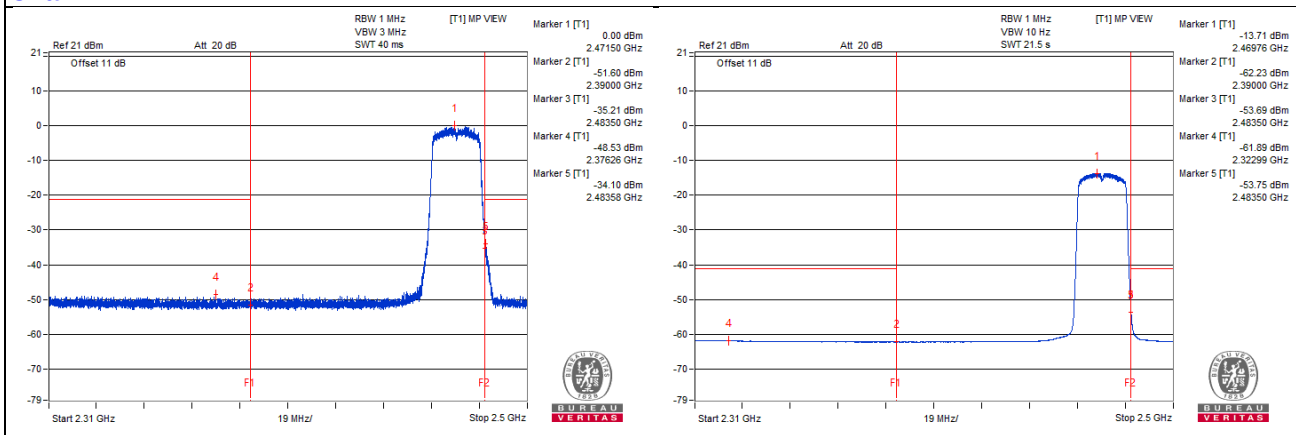

802.11ax (HE 40) - Channel 3

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1614.06 PK	52.2	74	-21.8	-52.17	-53.31	6.63	-43.06
2	1614.06 AV	42.43	54	-11.57	-62.33	-62.61	6.63	-52.83
3	4845.31 PK	54.53	74	-19.47	-51.73	-49.33	6.63	-40.73
4	4843.75 AV	43.97	54	-10.03	-60.85	-61.02	6.63	-51.29
5	7265.62 PK	56.24	74	-17.76	-47.4	-50.43	6.63	-39.02
6	7265.62 AV	45.46	54	-8.54	-59.39	-59.49	6.63	-49.8

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

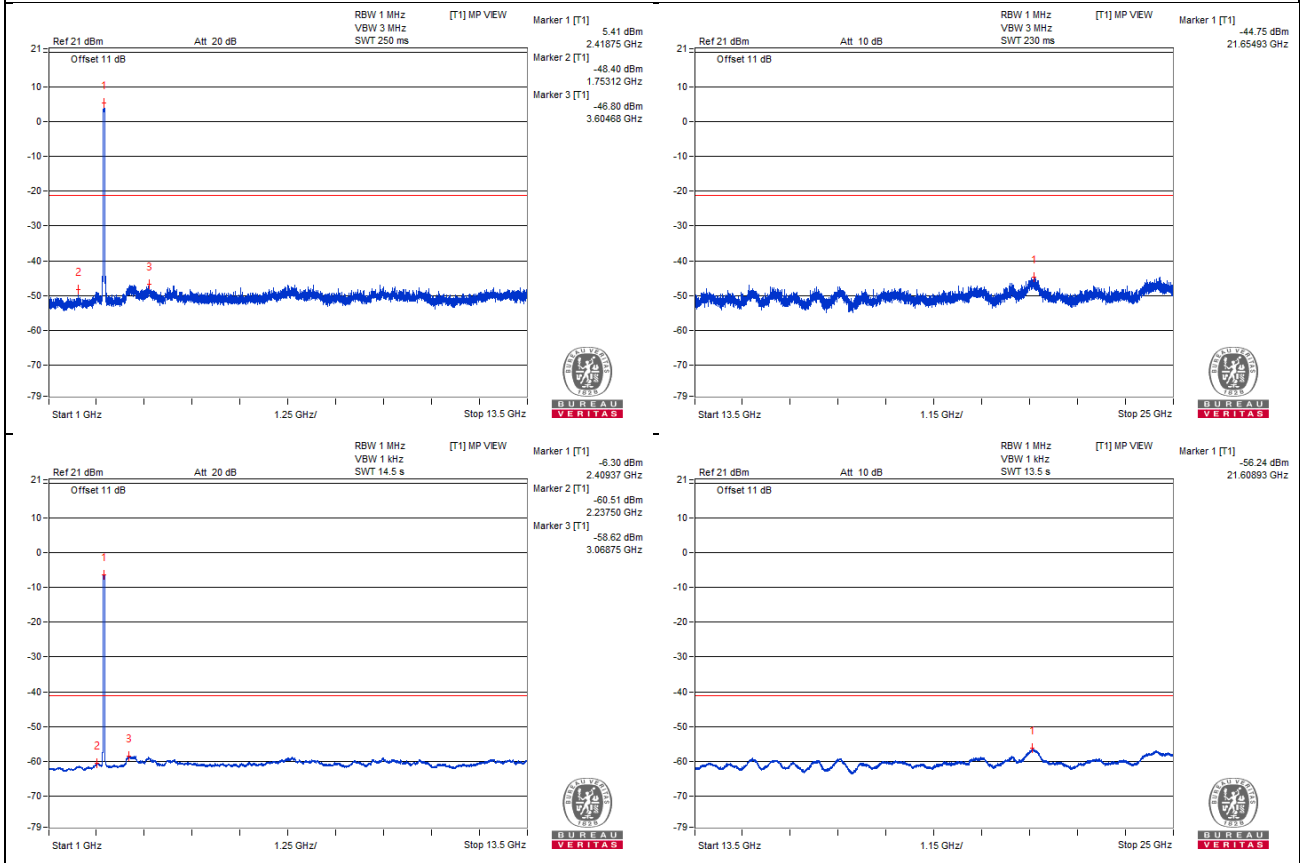

Chain 1

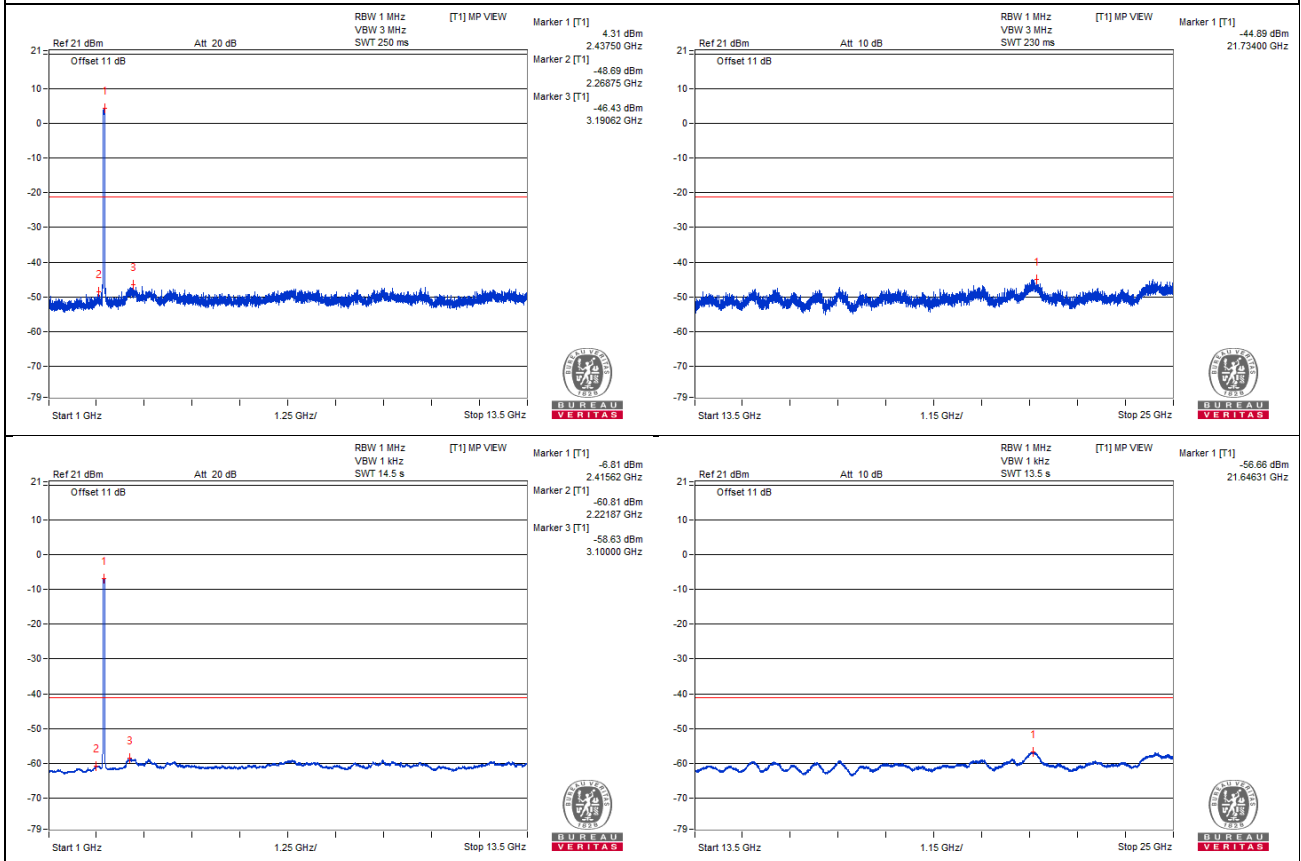

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2383.48 PK	71.62	74	-2.38	-32.77	-33.87	6.63	-23.64
2	2389.8 AV	47.91	54	-6.09	-56.68	-57.33	6.63	-47.35

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

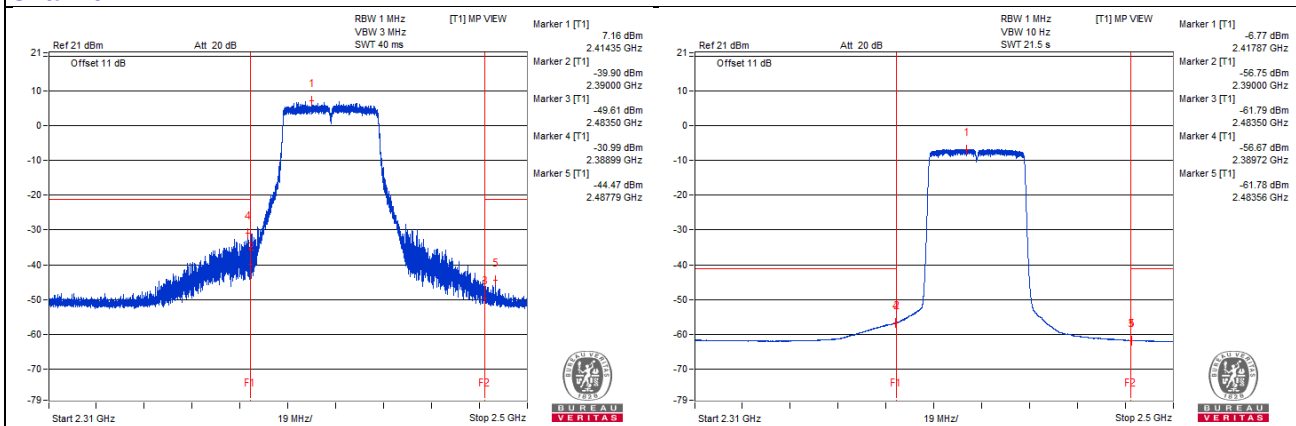

Chain 1

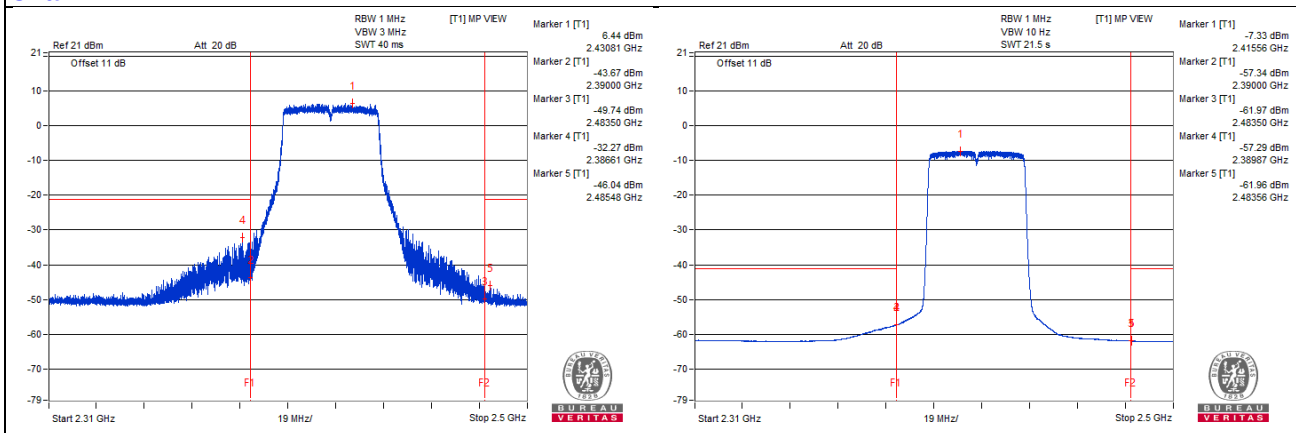

802.11ax (HE 40) - Channel 4

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1617.18 PK	51.61	74	-22.39	-53.32	-53.26	6.63	-43.65
2	1617.18 AV	42.28	54	-11.72	-62.62	-62.63	6.63	-52.98
3	4853.12 PK	54.06	74	-19.94	-50.2	-51.58	6.63	-41.2
4	4853.12 AV	43.82	54	-10.18	-61.04	-61.13	6.63	-51.44
5	7282.81 PK	56.45	74	-17.55	-48.83	-48.11	6.63	-38.81
6	7279.68 AV	45.26	54	-8.74	-59.5	-59.78	6.63	-50

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

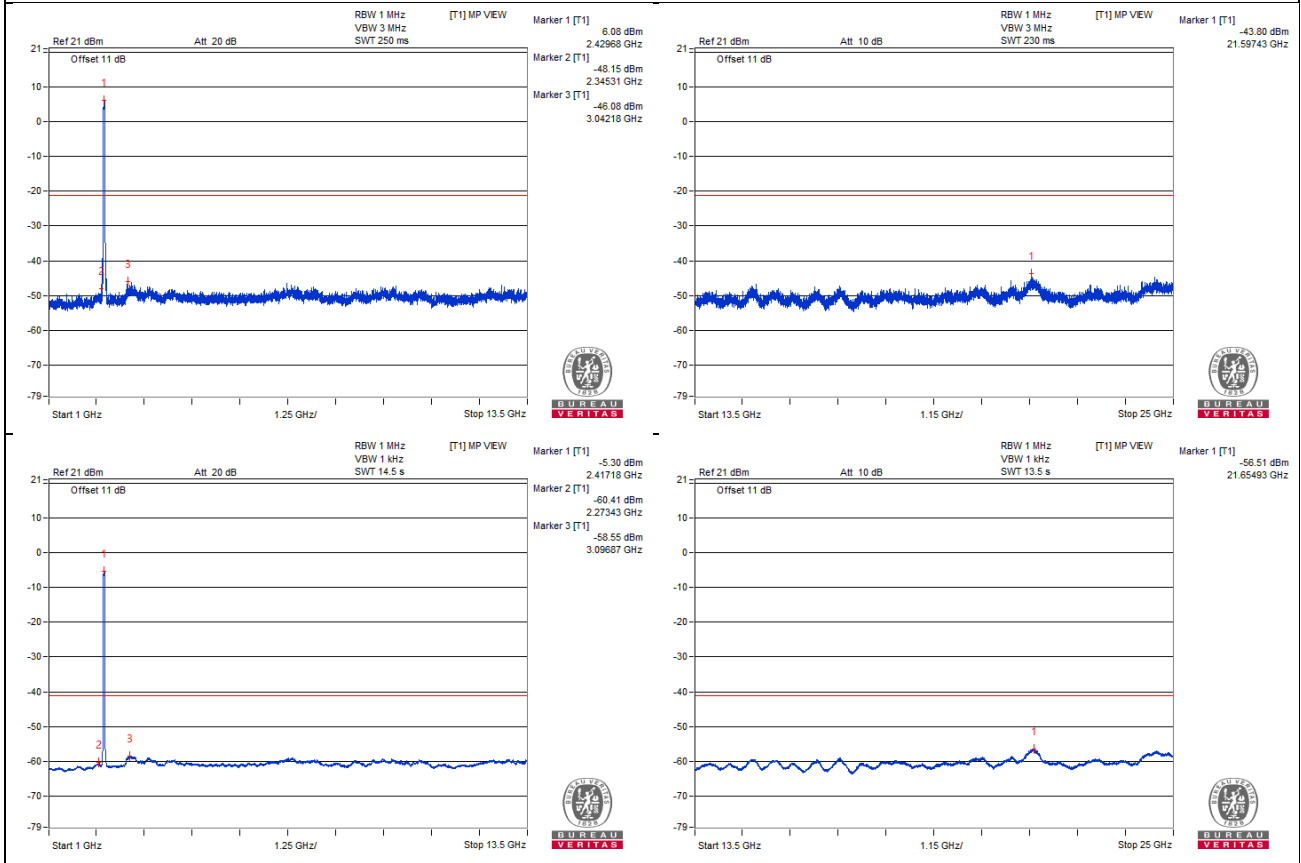

Chain 1

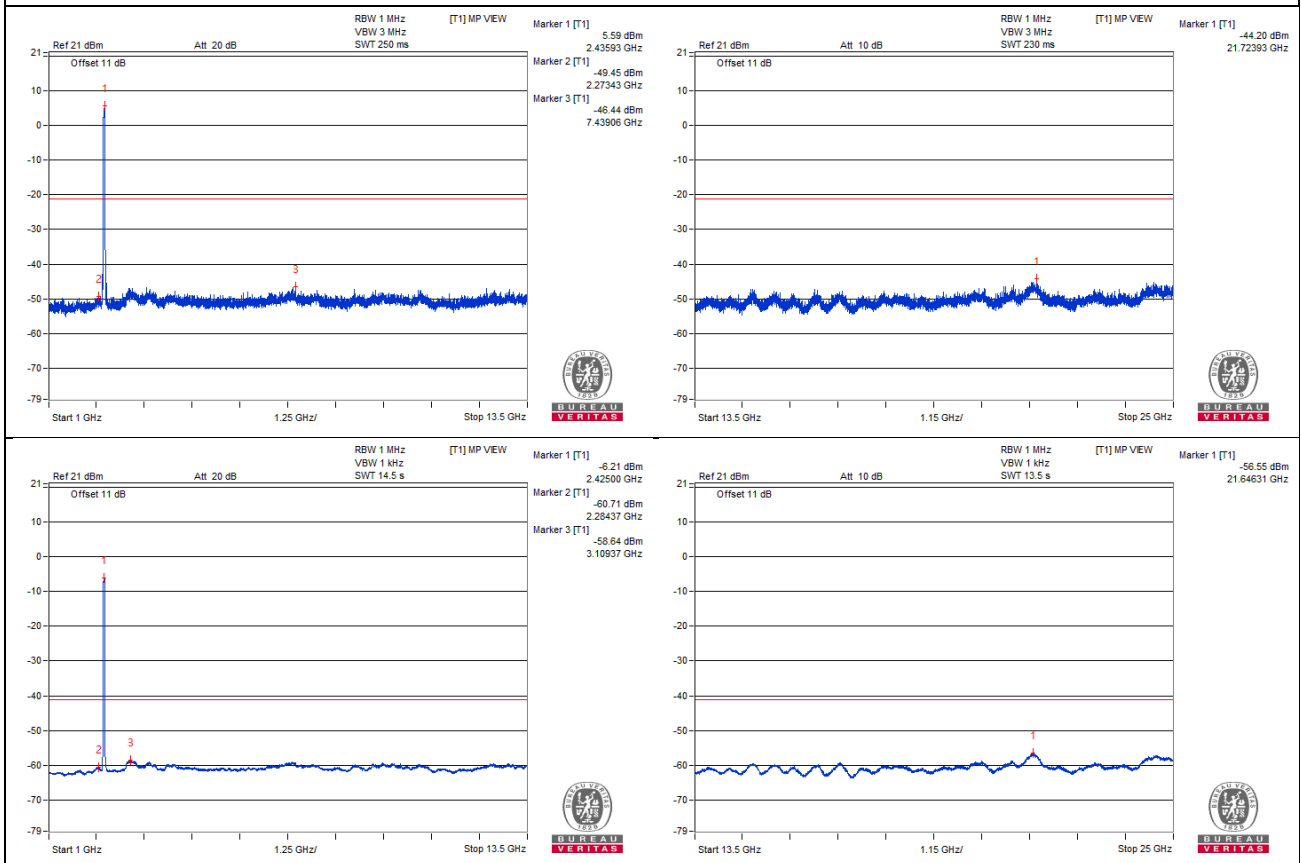

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2388.94 PK	71.92	74	-2.08	-36.29	-31.12	6.63	-23.34
2	2389.72 AV	47.89	54	-6.11	-57.76	-56.37	6.63	-47.37

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

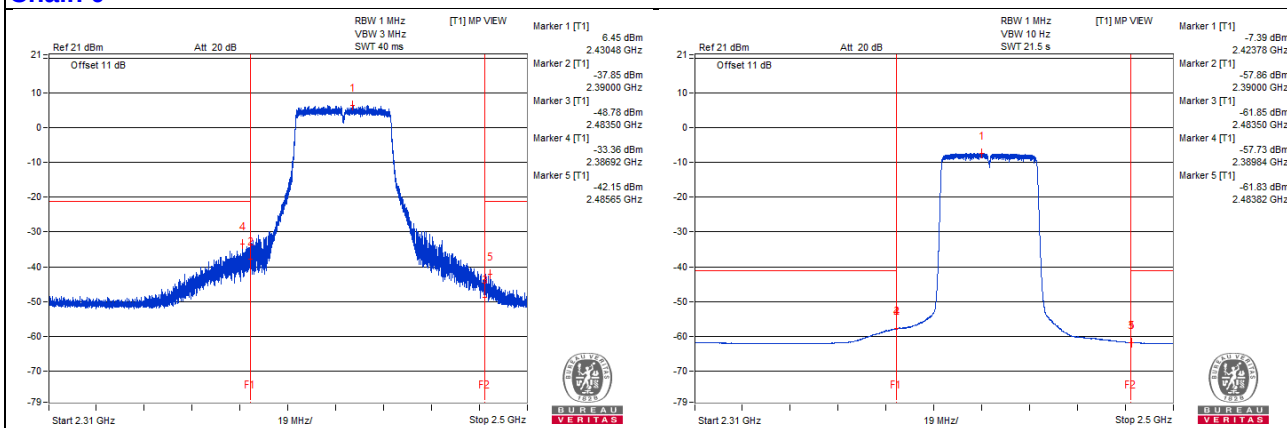

Chain 1

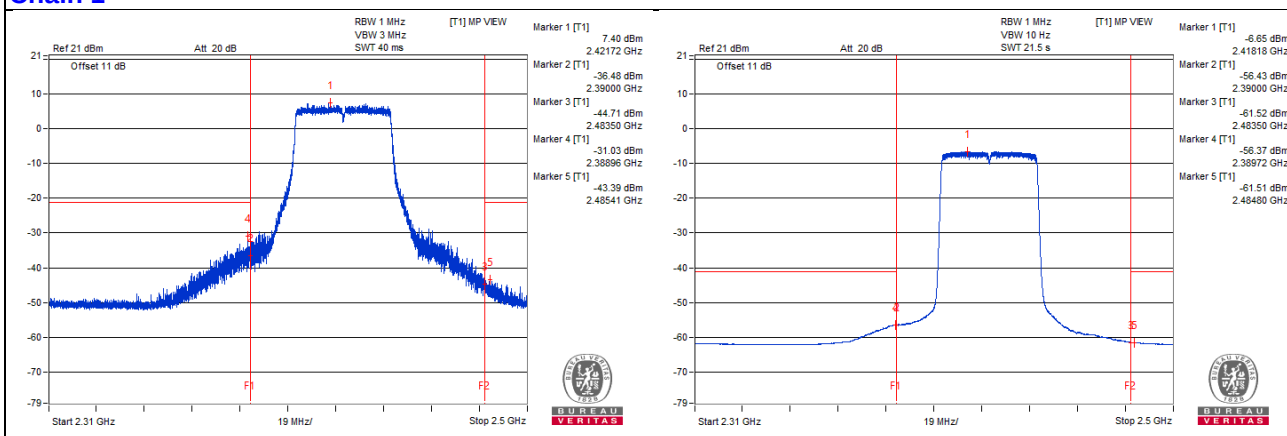

802.11ax (HE 40) - Channel 6

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1625 PK	53.14	74	-20.86	-51.91	-51.61	6.63	-42.12
2	1623.43 AV	42.52	54	-11.48	-62.44	-62.33	6.63	-52.74
3	4873.43 PK	54.61	74	-19.39	-50.77	-49.86	6.63	-40.65
4	4873.43 AV	43.94	54	-10.06	-61.01	-60.91	6.63	-51.32
5	7312.5 PK	56	74	-18	-48.32	-49.58	6.63	-39.26
6	7312.5 AV	45.5	54	-8.5	-59.44	-59.37	6.63	-49.76

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

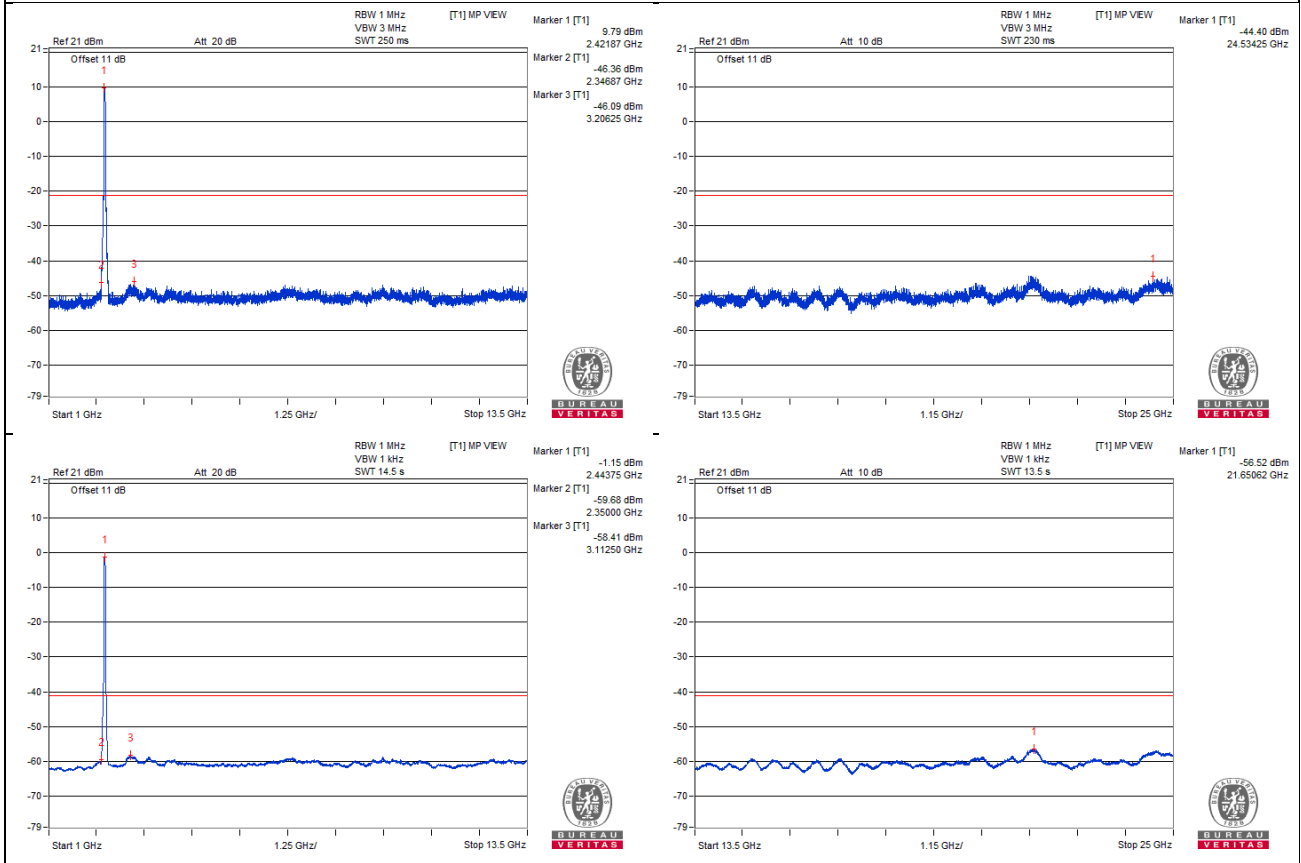

Chain 1

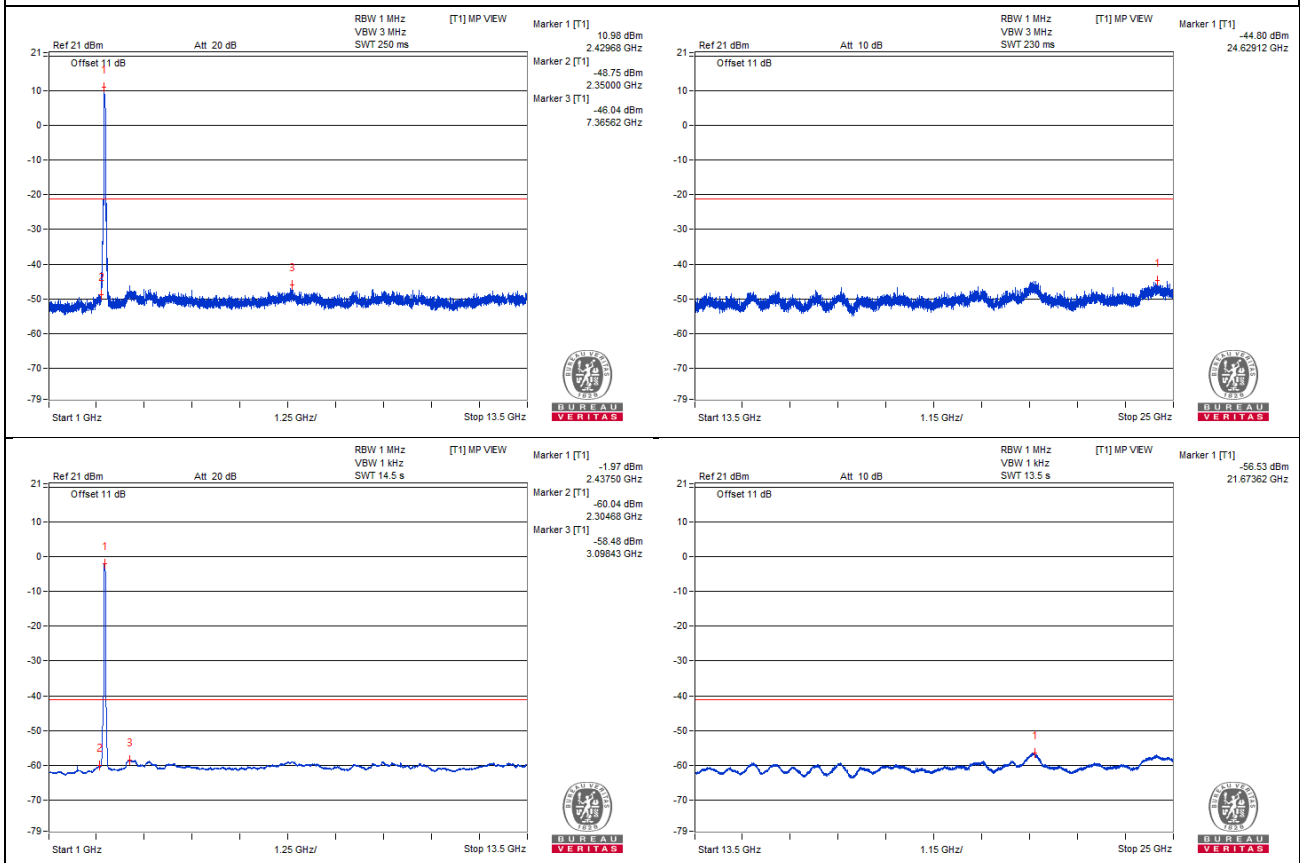

Bandedge table

No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.84 PK	78.81	74	* 4.81	-25.48	-26.81	6.63	-16.45
2	2389.84 AV	58.06	54	* 4.06	-46.15	-47.67	6.63	-37.2
3	2483.99 PK	80.17	74	* 6.17	-25.8	-23.88	6.63	-15.09
4	2483.51 AV	58.57	54	* 4.57	-45.5	-47.37	6.63	-36.69


Note :

Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

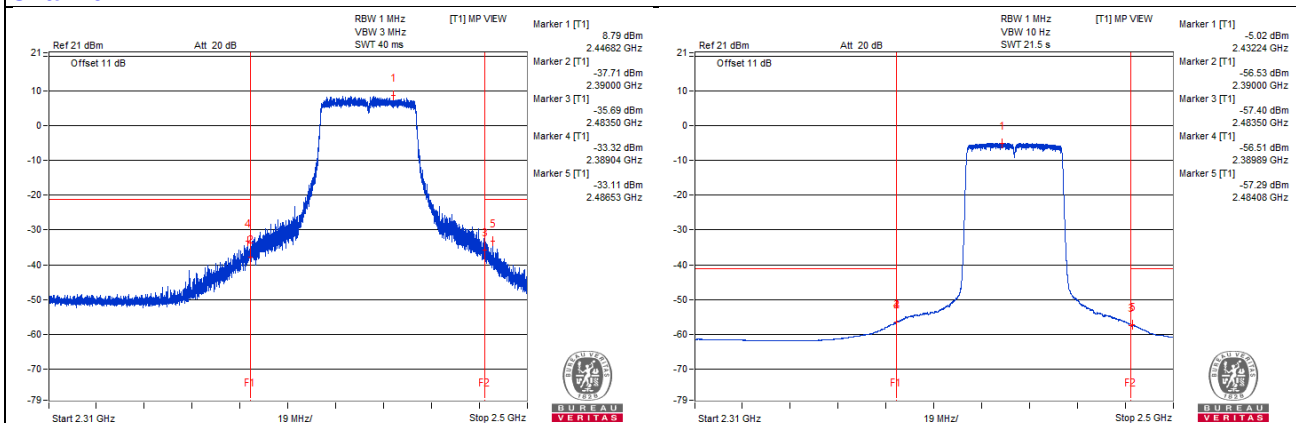

Chain 1

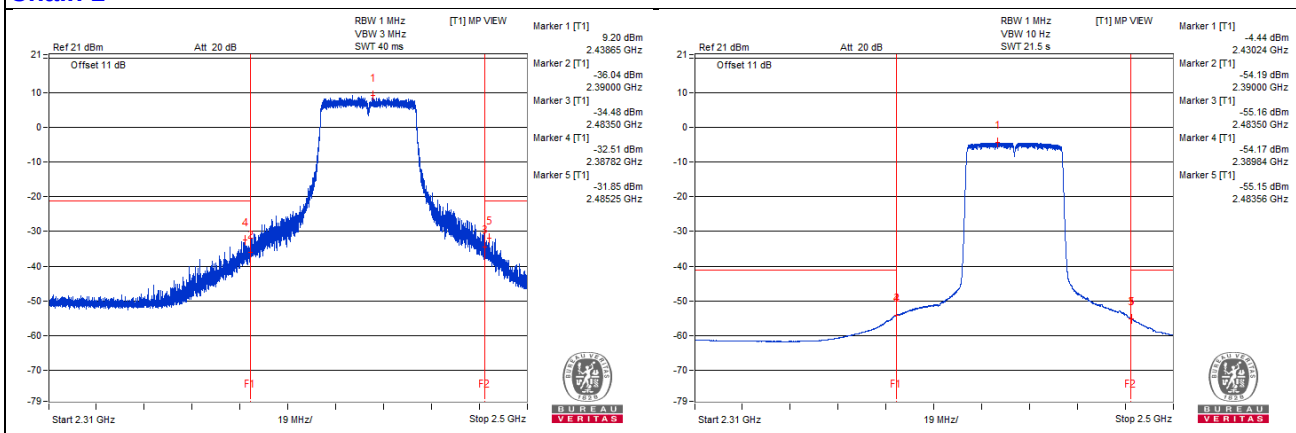

802.11ax (HE 40) - Channel 8

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3264.06 PK	56.01	74	-17.99	-48.68	-49.11	6.63	-39.25
2	3264.06 AV	45.36	54	-8.64	-59.47	-59.62	6.63	-49.9
3	4893.75 PK	53.75	74	-20.25	-50.91	-51.4	6.63	-41.51
4	4892.18 AV	43.7	54	-10.3	-61.1	-61.31	6.63	-51.56
5	7339.06 PK	55.78	74	-18.22	-48.79	-49.48	6.63	-39.48
6	7342.18 AV	45.7	54	-8.3	-59.3	-59.11	6.63	-49.56

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

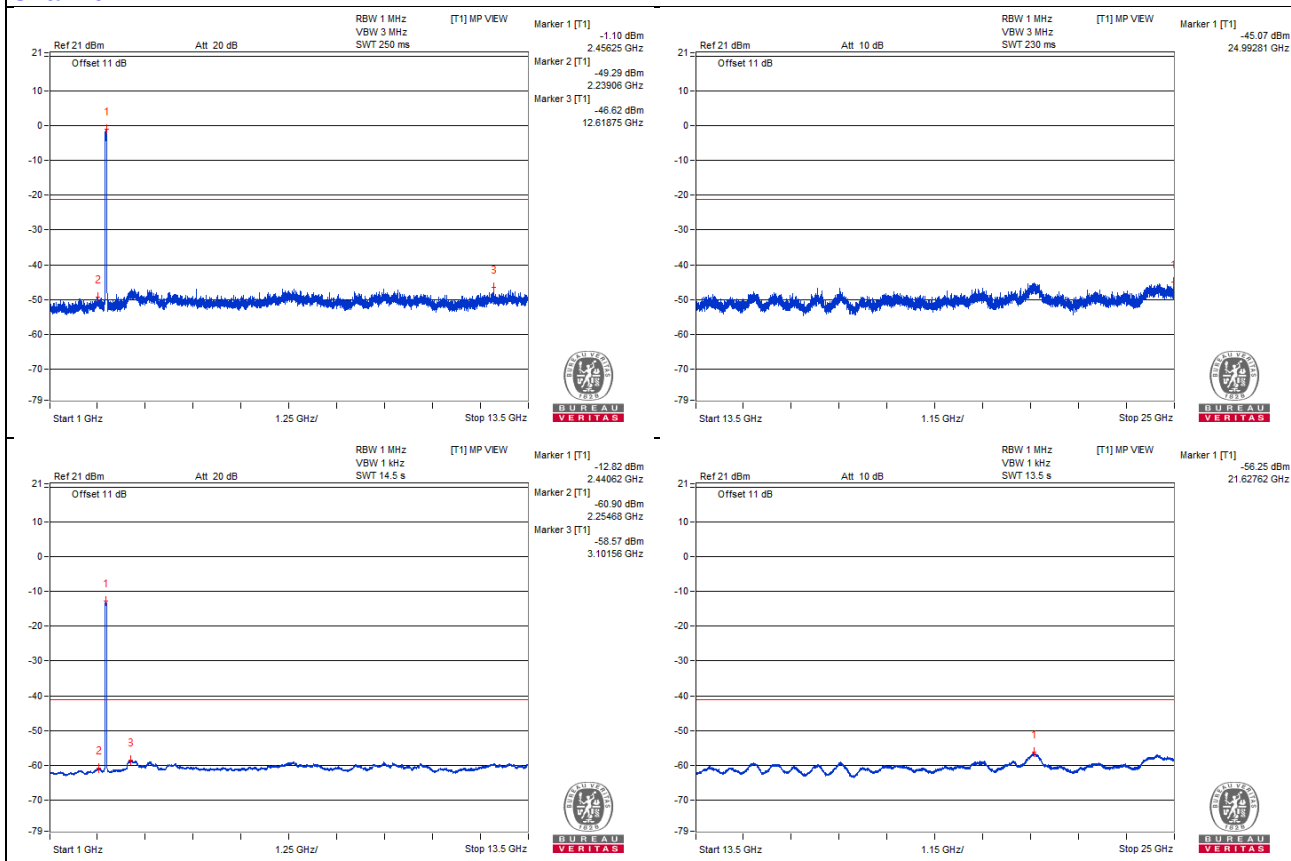

Chain 1

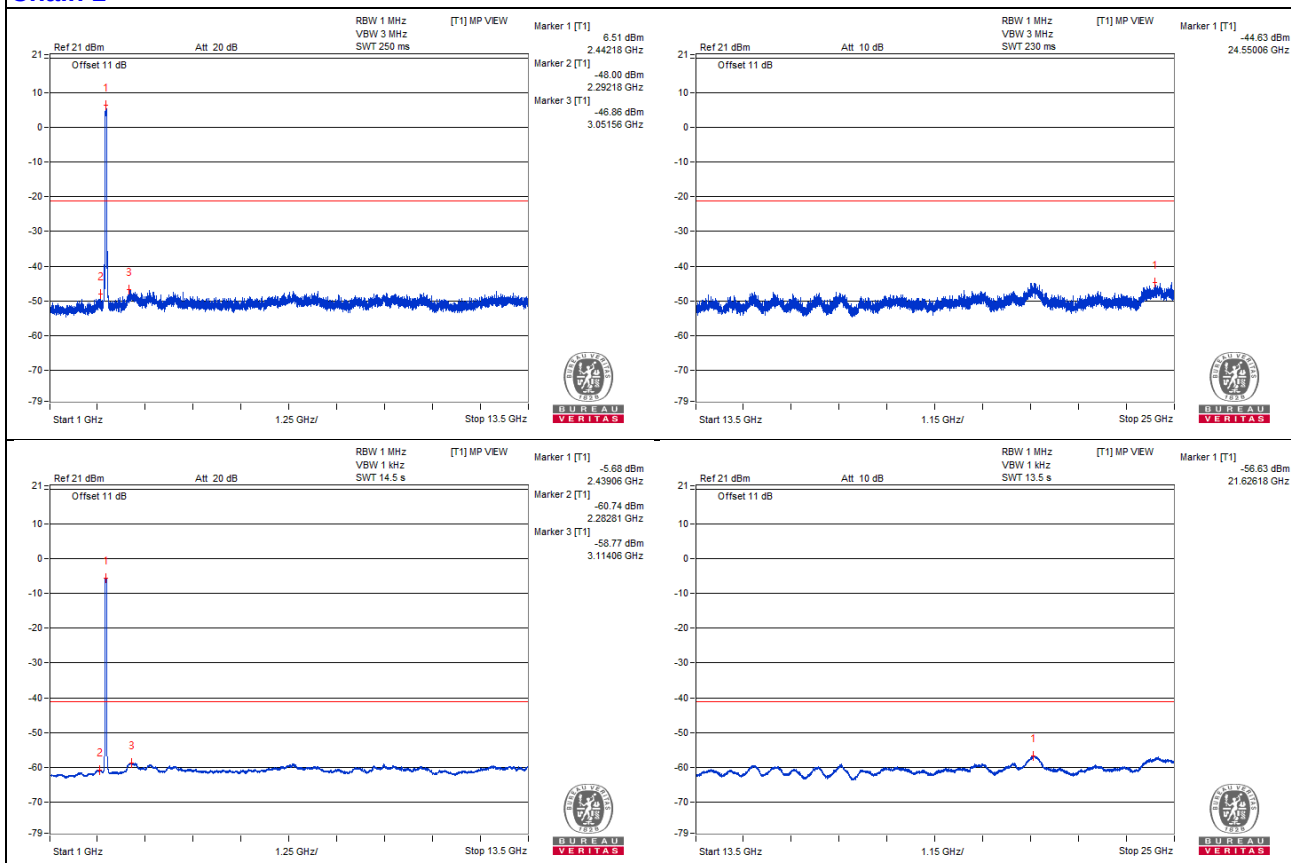

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2485.7 PK	71.71	74	-2.29	-31.28	-36.7	6.63	-23.55
2	2483.54 AV	47.1	54	-6.9	-56.7	-59.29	6.63	-48.16

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

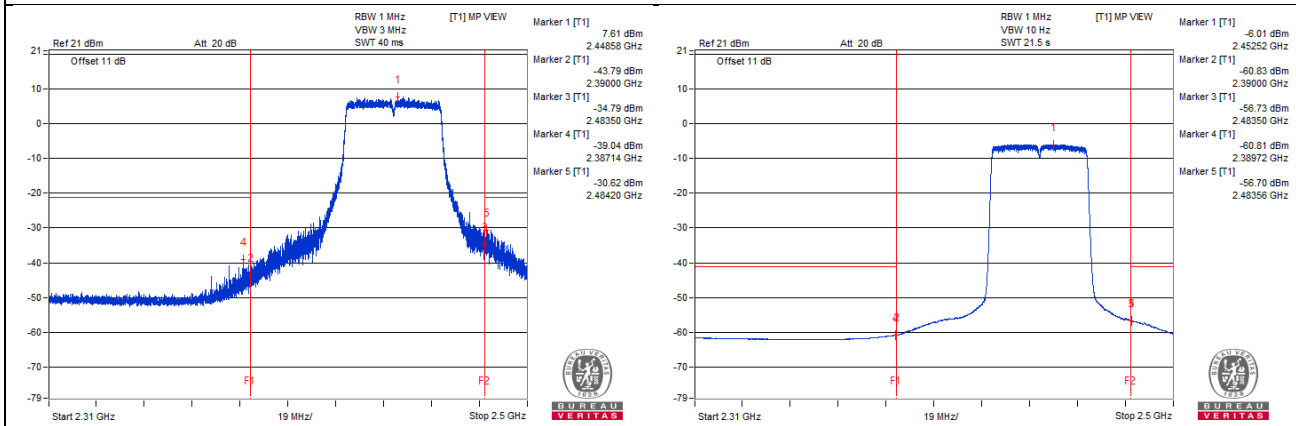

Chain 1

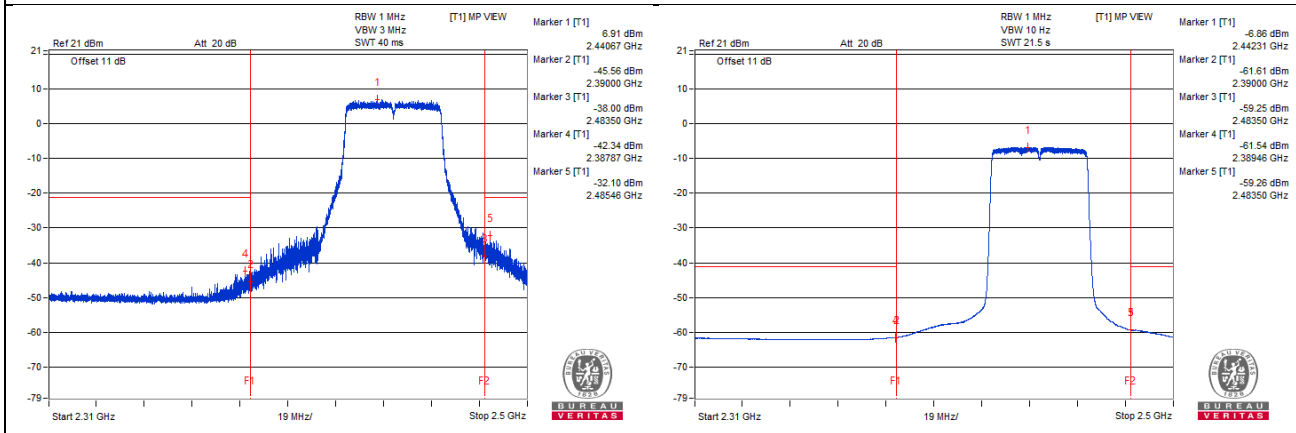

802.11ax (HE 40) - Channel 9

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4904.68 PK	54.58	74	-19.42	-50.34	-50.31	6.63	-40.68
2	4904.68 AV	43.69	54	-10.31	-61.33	-61.09	6.63	-51.57
3	7356.25 PK	56.23	74	-17.77	-48.77	-48.58	6.63	-39.03
4	7356.25 AV	45.73	54	-8.27	-59.22	-59.13	6.63	-49.53

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

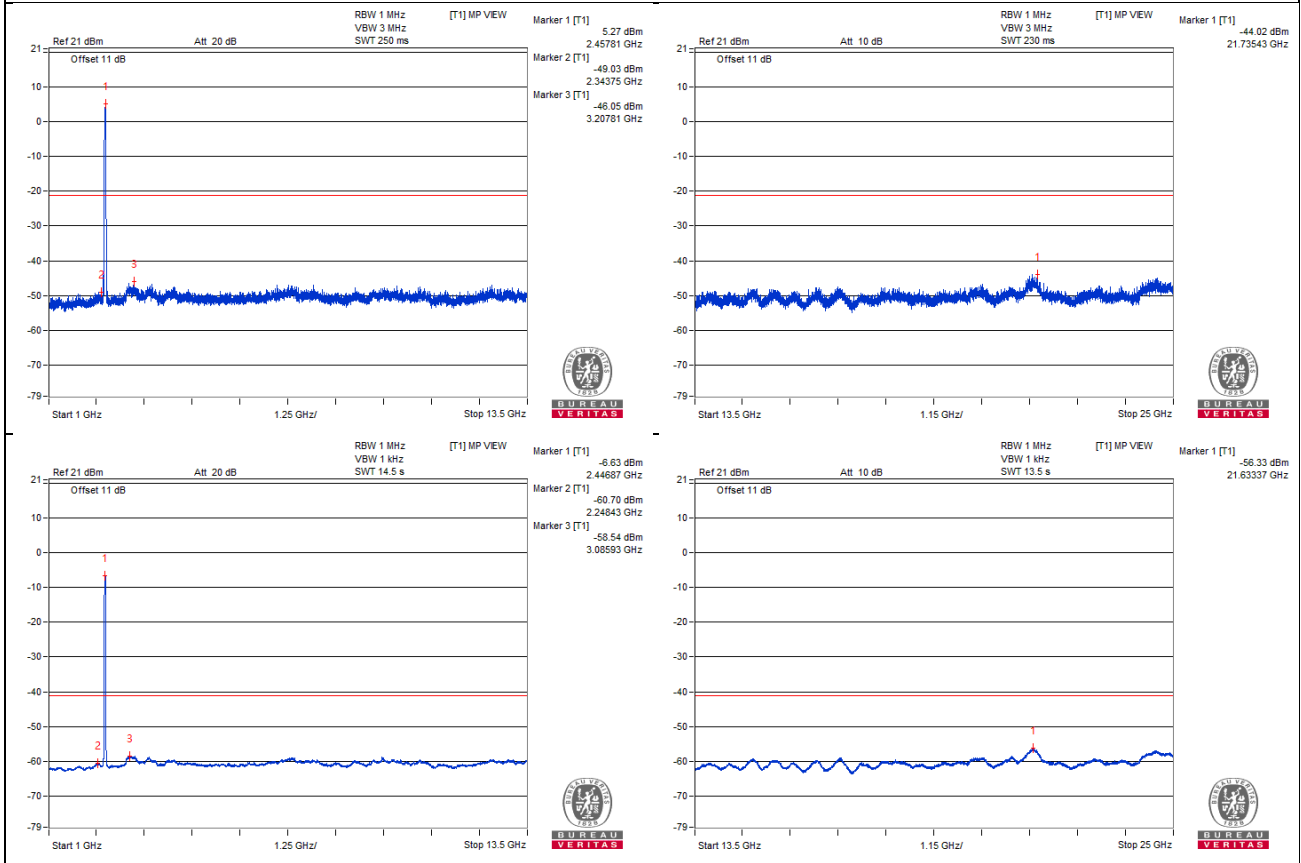

Chain 1

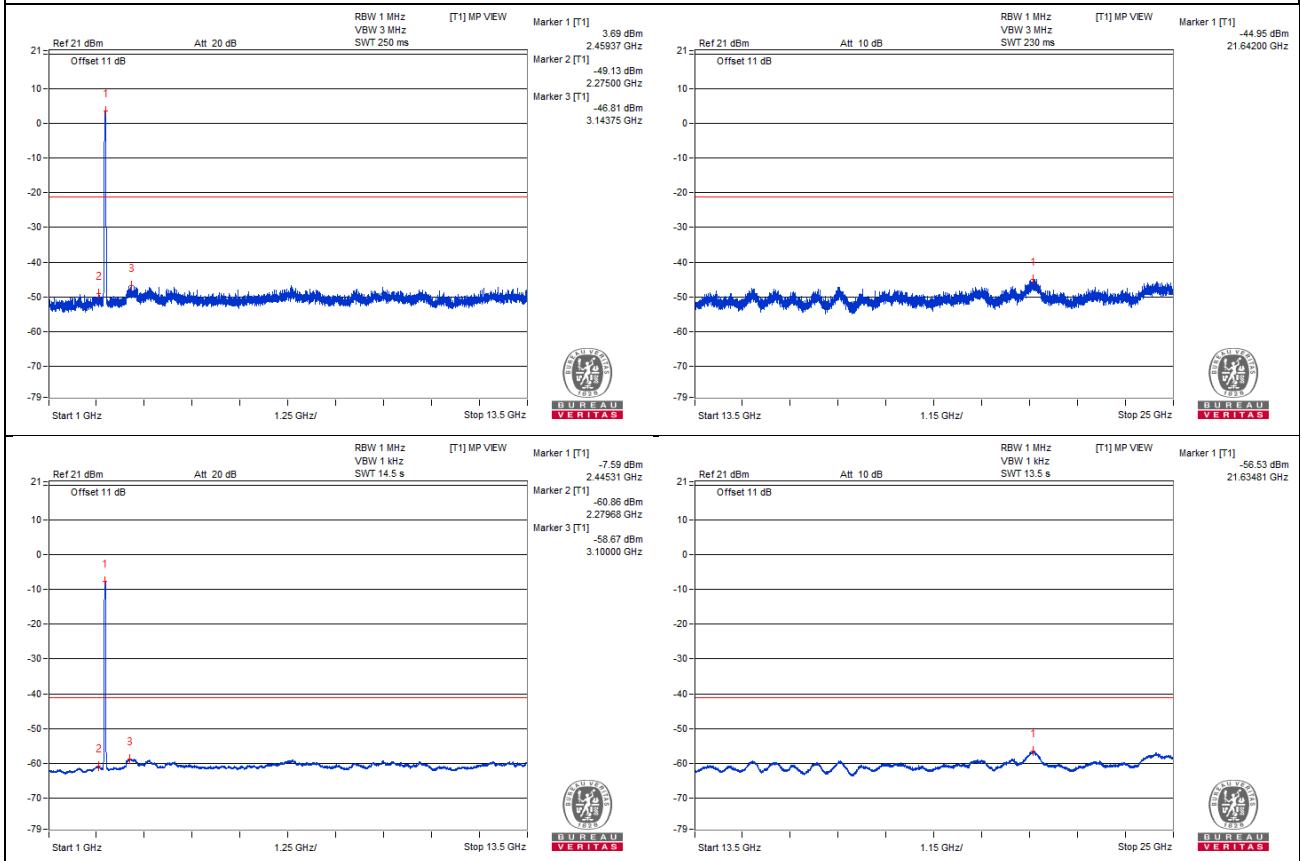

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2484.42 PK	71.1	74	-2.9	-33.16	-34.54	6.63	-24.16
2	2483.51 AV	44.5	54	-9.5	-60.49	-60.31	6.63	-50.76

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

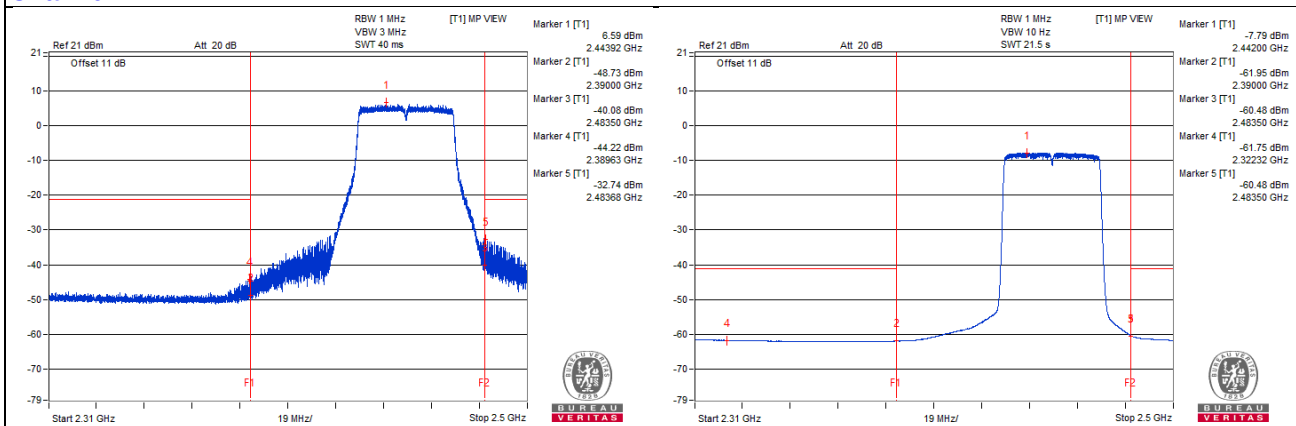

Chain 1

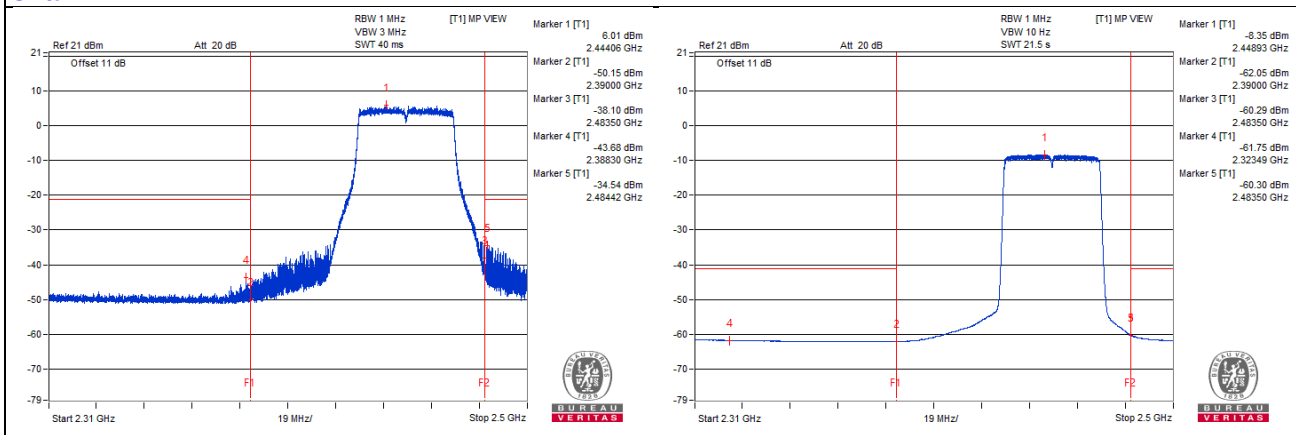

802.11ax (HE 40) - Channel 10

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4915.62 PK	54.91	74	-19.09	-49.3	-50.81	6.63	-40.35
2	4915.62 AV	43.72	54	-10.28	-61.14	-61.23	6.63	-51.54
3	7371.87 PK	55.69	74	-18.31	-48.83	-49.62	6.63	-39.57
4	7371.87 AV	45.58	54	-8.42	-59.1	-59.56	6.63	-49.68

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

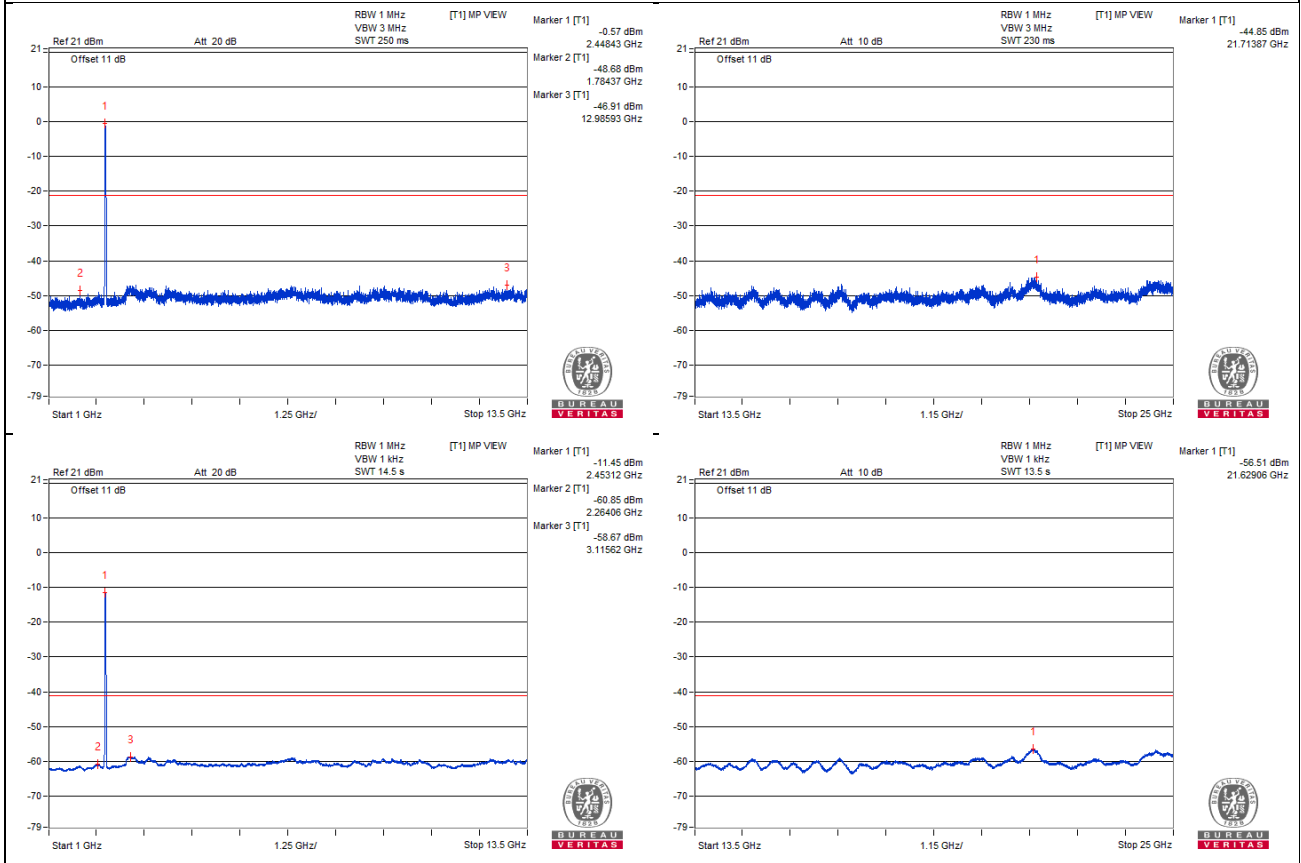

Chain 1

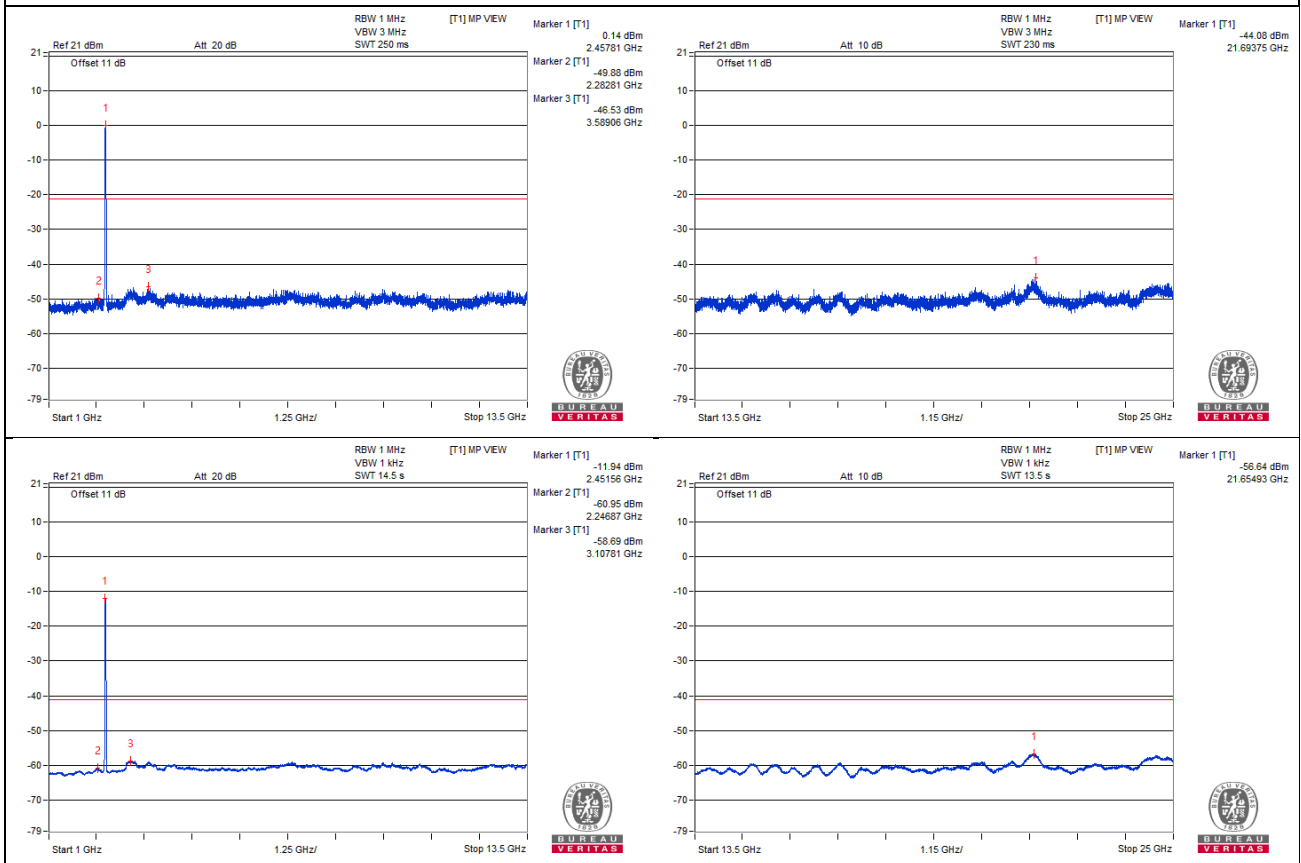

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.56 PK	71.31	74	-2.69	-32.44	-35.17	6.63	-23.95
2	2483.54 AV	45	54	-9	-59.92	-59.88	6.63	-50.26

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

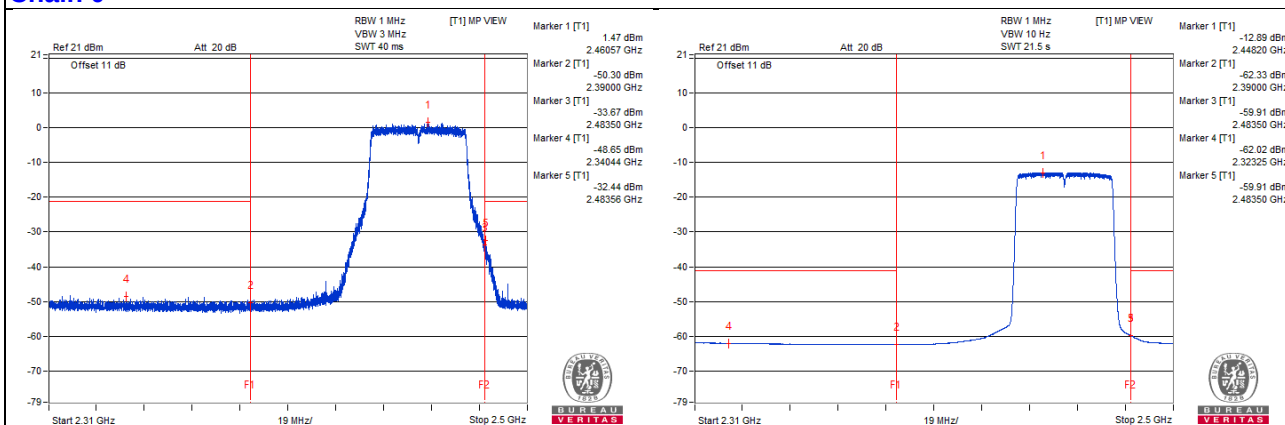

Chain 1

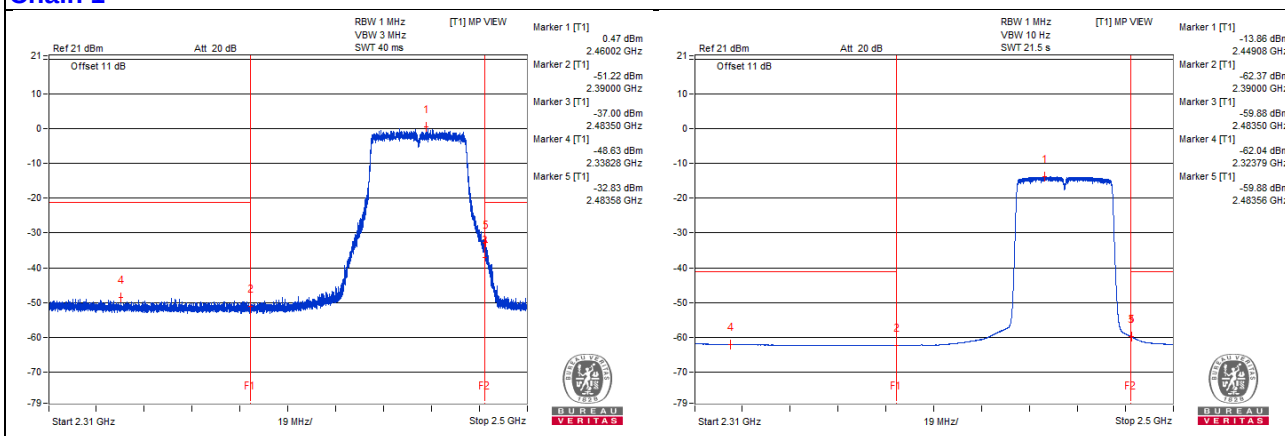

802.11ax (HE 40) - Channel 11

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4925 PK	53.02	74	-20.98	-51.79	-51.98	6.63	-42.24
2	4923.43 AV	43.58	54	-10.42	-61.22	-61.43	6.63	-51.68
3	7387.5 PK	55.75	74	-18.25	-49.49	-48.84	6.63	-39.51
4	7387.5 AV	45.41	54	-8.59	-59.39	-59.6	6.63	-49.85

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

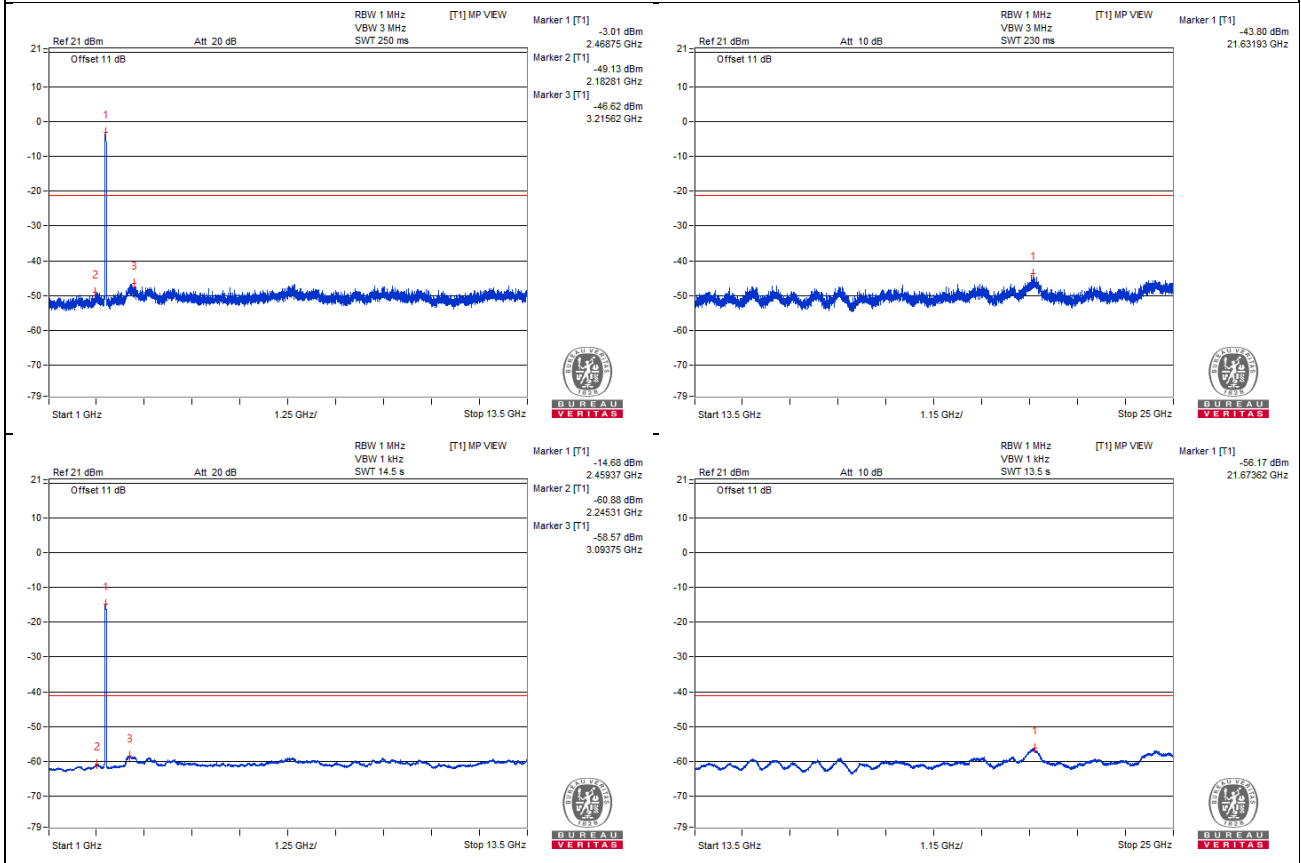

Chain 1

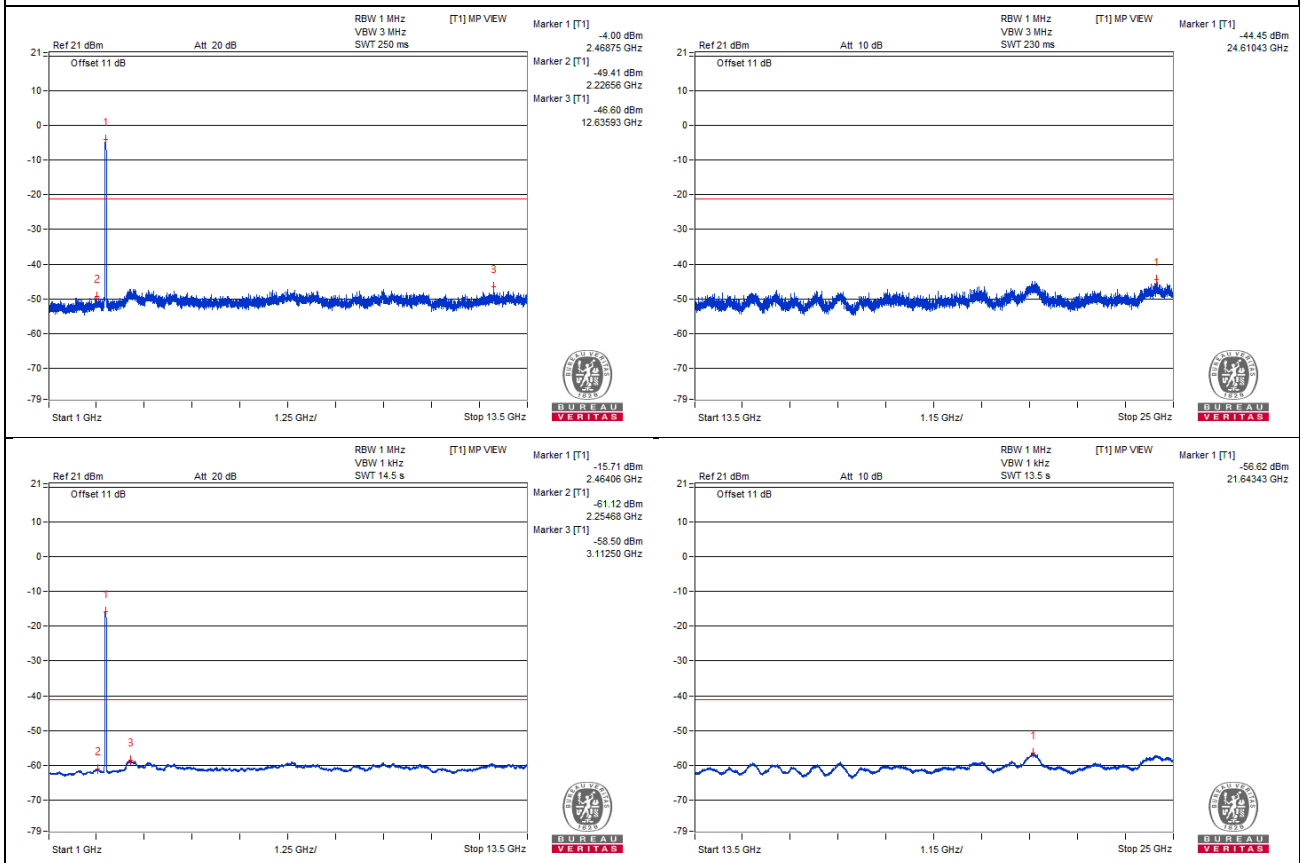

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.61 PK	68.75	74	-5.25	-35.33	-37.15	6.63	-26.51
2	2483.51 AV	44.57	54	-9.43	-60.38	-60.28	6.63	-50.69

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

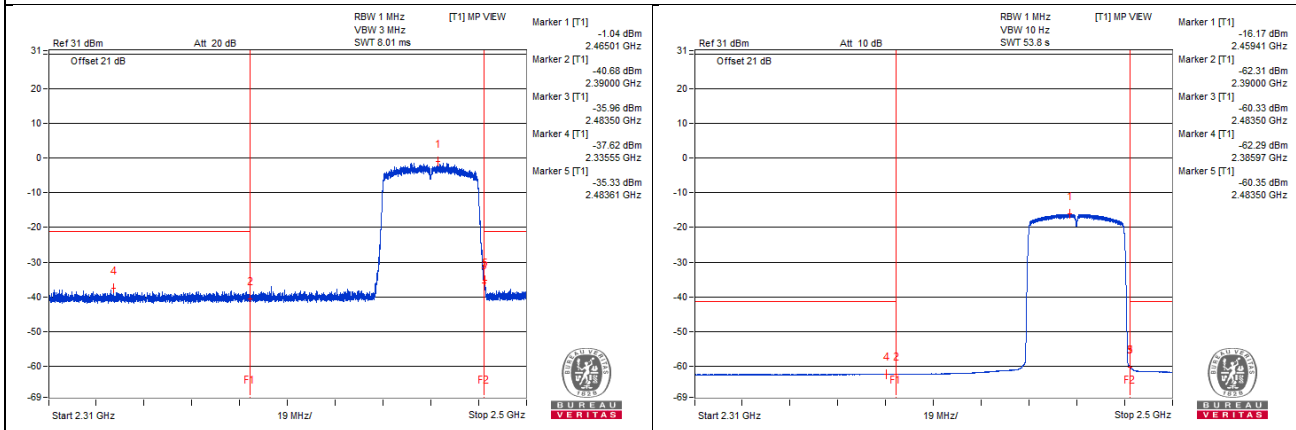

Chain 1

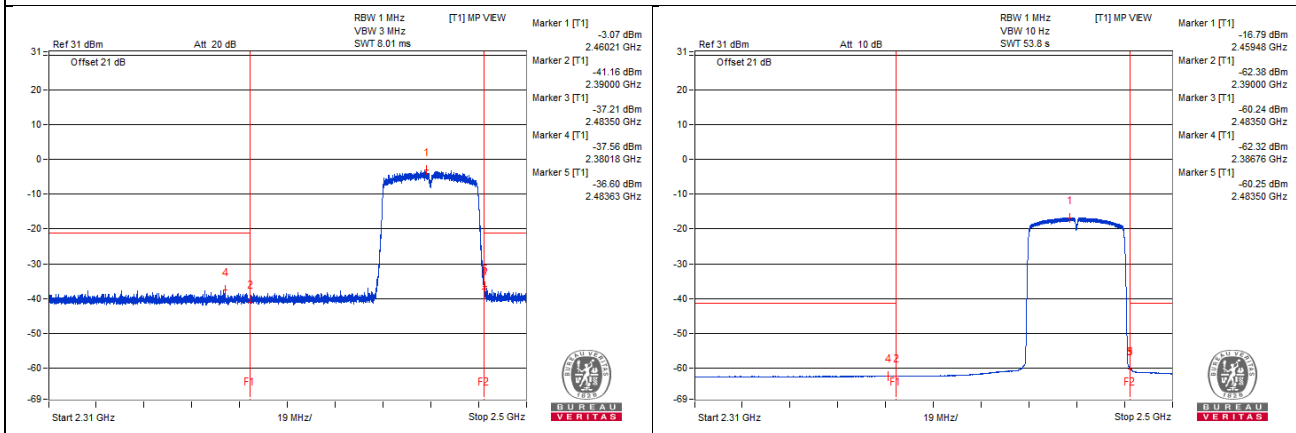

20MHz Preamble

RU26

Channel 1

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1607.81 PK	63.53	74	-10.47	-40.74	-42.1	6.63	-31.73
2	1609.37 AV	42.74	54	-11.26	-62.16	-62.16	6.63	-52.52
3	4839.06 PK	66.64	74	-7.36	-38.69	-37.87	6.63	-28.62
4	4843.75 AV	45.5	54	-8.5	-59.47	-59.34	6.63	-49.76

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.