



Chain 0

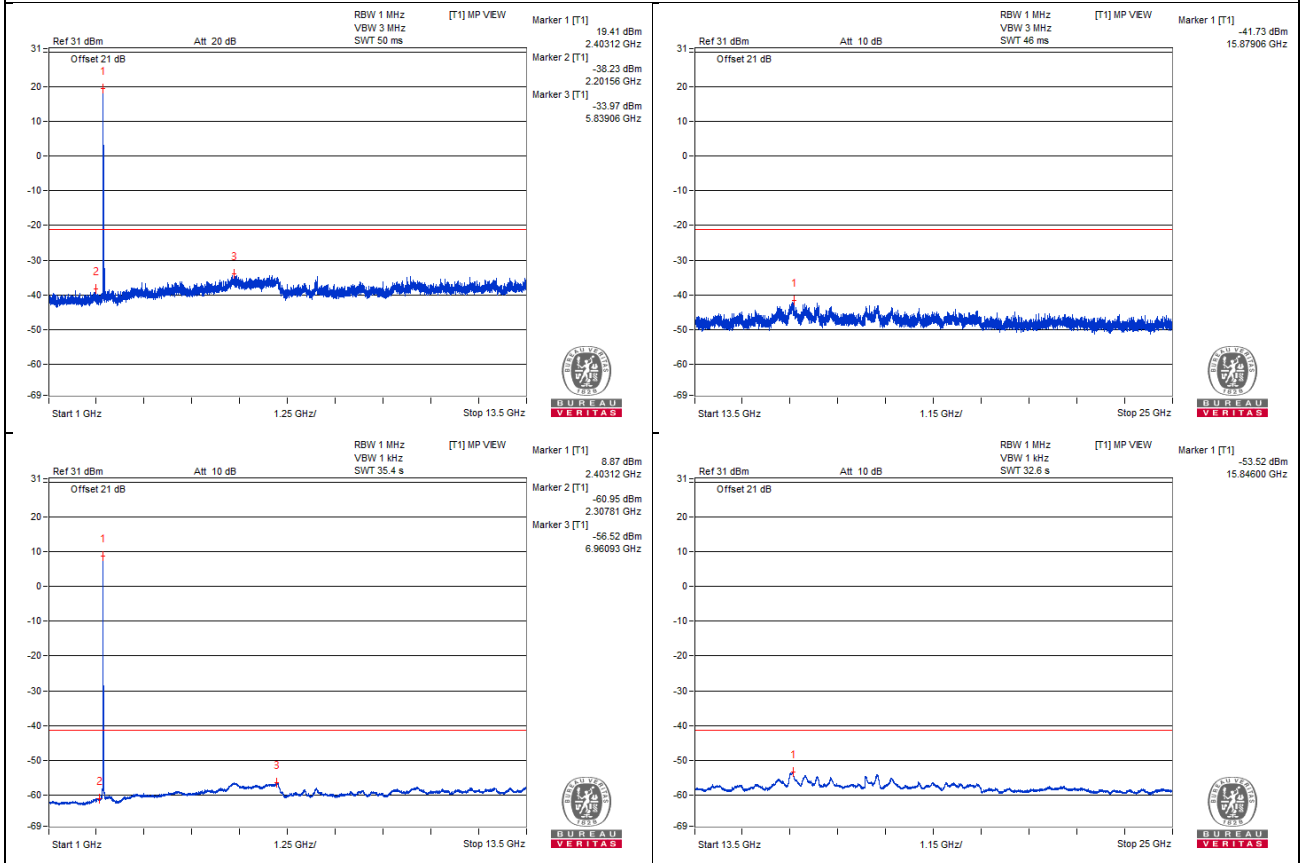

Chain 1

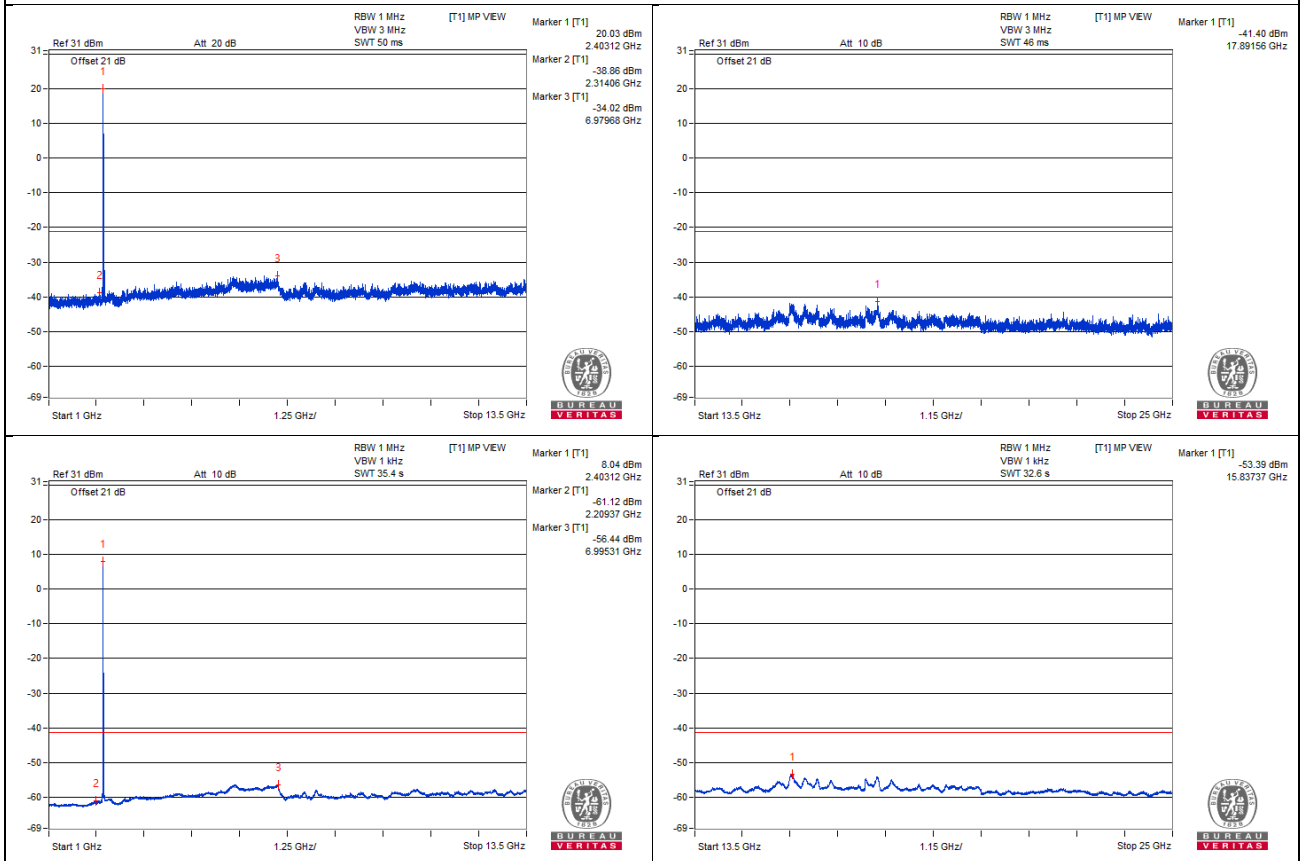

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2383.79 PK	71.4	74	-2.6	-33.62	-33.38	6.63	-23.86
2	2386.59 AV	46.51	54	-7.49	-58.52	-58.26	6.63	-48.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

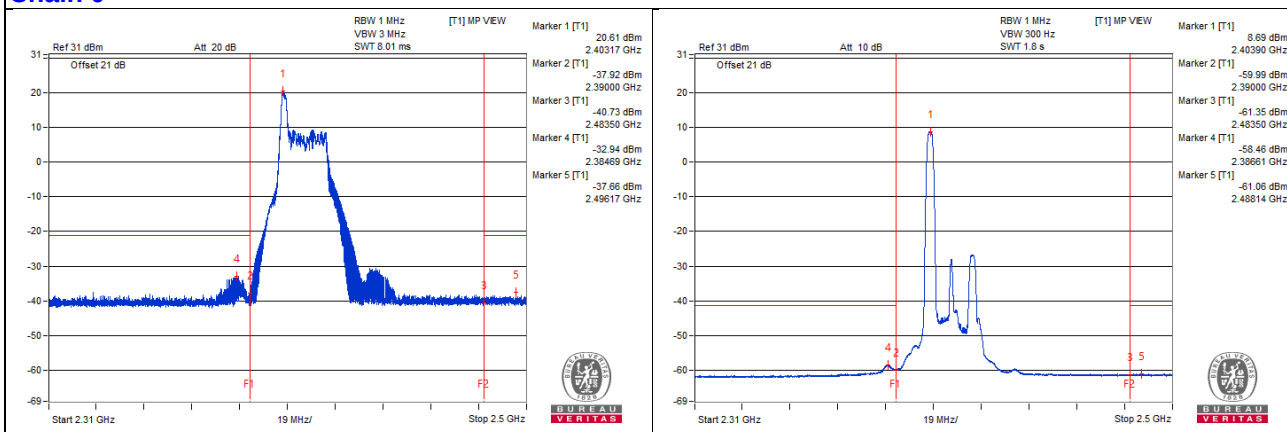

Chain 1

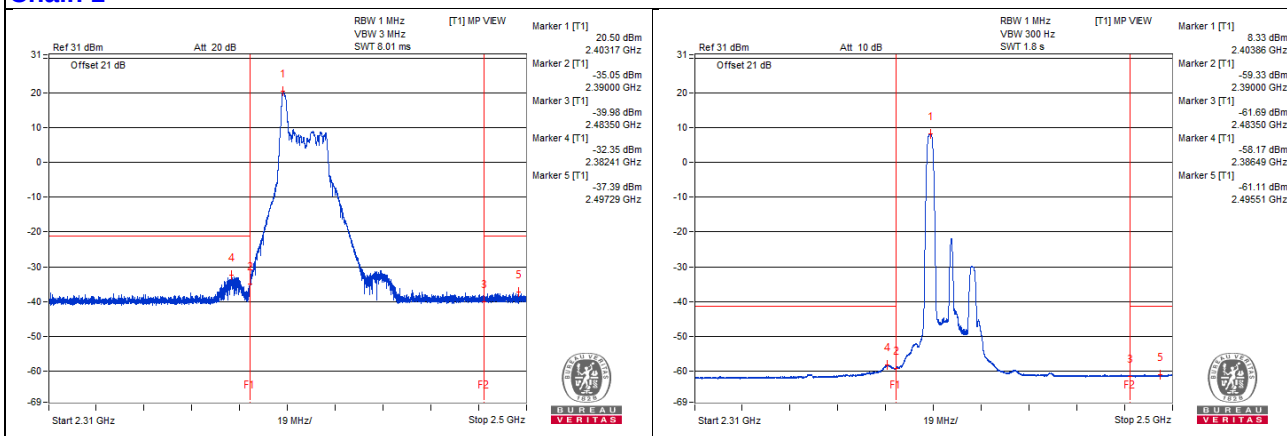

Channel 2

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1610.93 PK	64.45	74	-9.55	-40.14	-40.78	6.63	-30.81
2	1612.5 AV	42.69	54	-11.31	-62.14	-62.28	6.63	-52.57
3	4845.31 PK	67.1	74	-6.9	-38.93	-36.91	6.63	-28.16
4	4850 AV	45.56	54	-8.44	-59.32	-59.36	6.63	-49.7
5	7257.81 PK	66.68	74	-7.32	-37.51	-39.08	6.63	-28.58
6	7251.56 AV	44.91	54	-9.09	-60.02	-59.96	6.63	-50.35

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

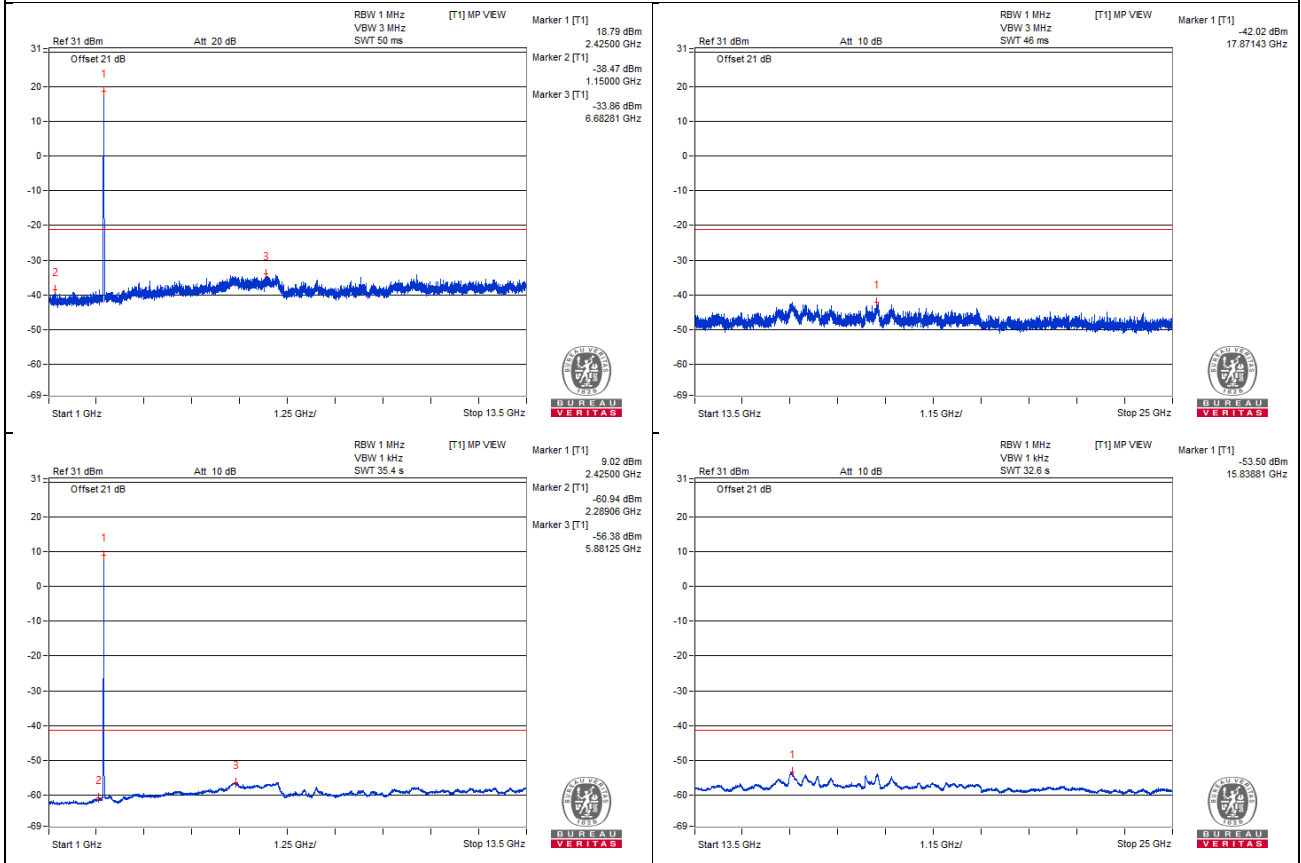

Chain 1

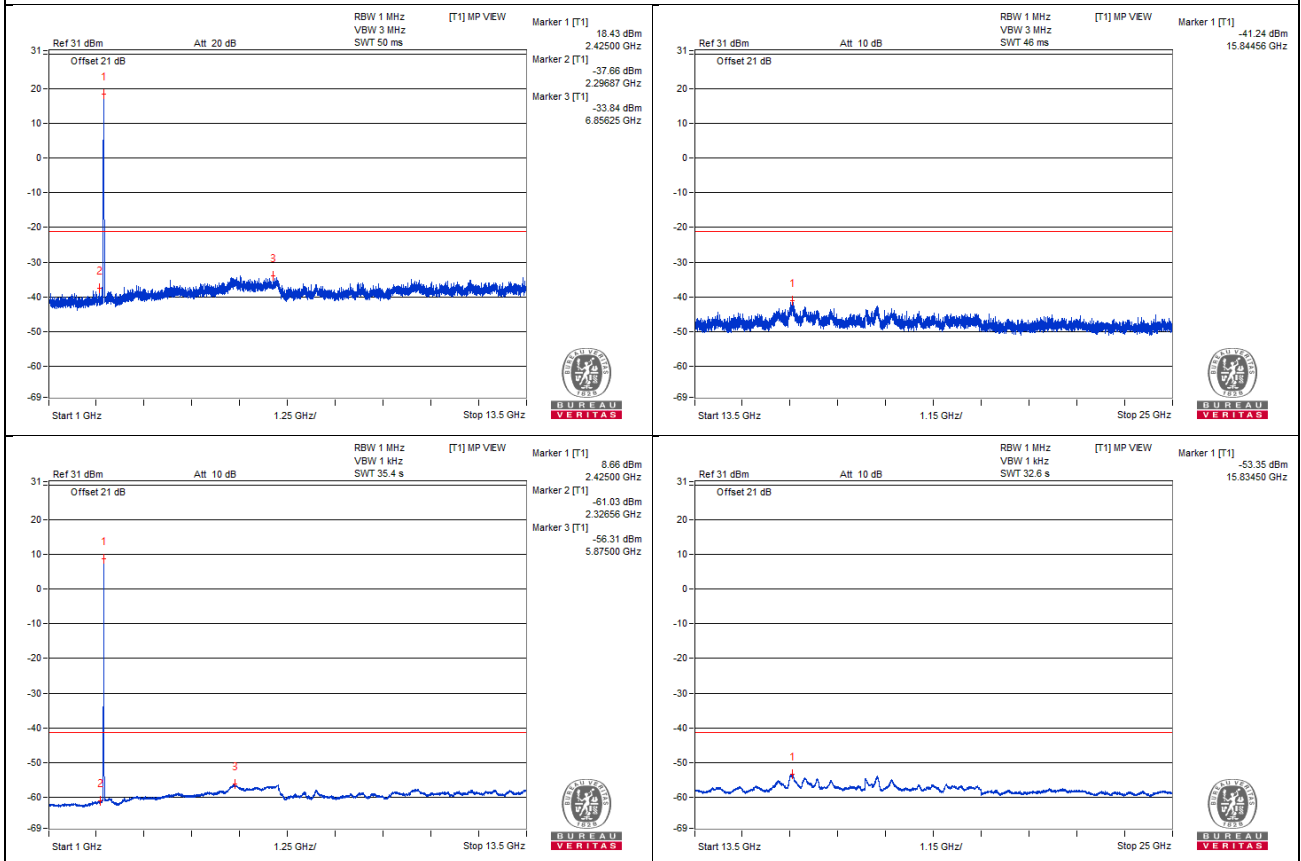

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2388.25 PK	71.94	74	-2.06	-31.32	-35.08	6.63	-23.32
2	2389.99 AV	45.12	54	-8.88	-59.75	-59.82	6.63	-50.14

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

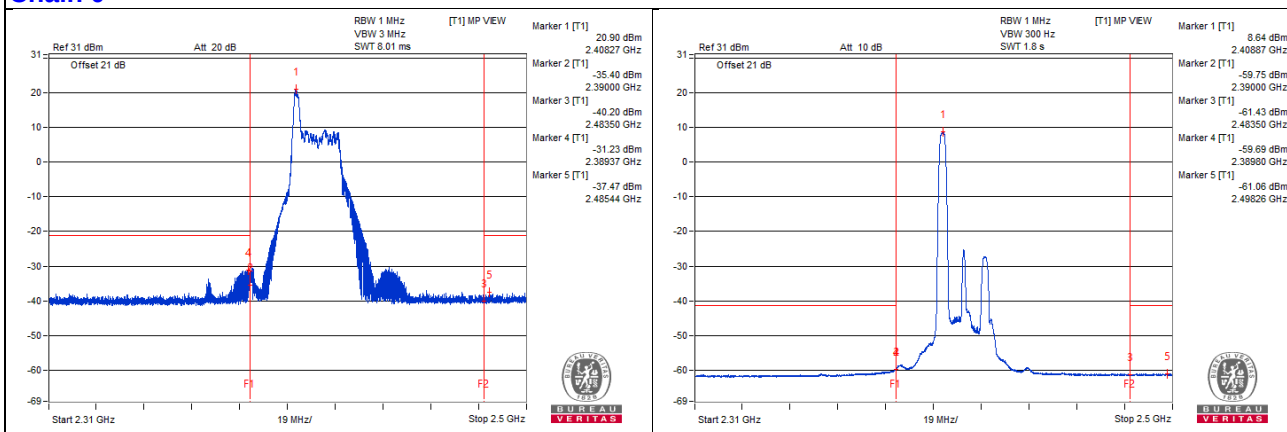

Chain 1

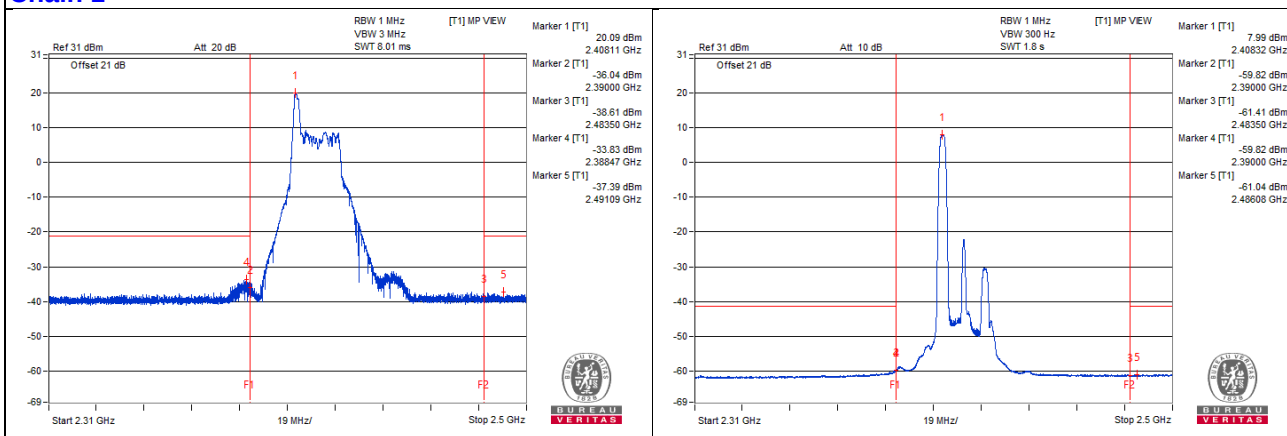

Channel 6

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1623.43 PK	63.76	74	-10.24	-40.34	-42.13	6.63	-31.5
2	1625 AV	42.88	54	-11.12	-61.93	-62.12	6.63	-52.38
3	4862.5 PK	67.22	74	-6.78	-37.43	-37.95	6.63	-28.04
4	4873.43 AV	45.79	54	-8.21	-59	-59.23	6.63	-49.47
5	7328.12 PK	66.48	74	-7.52	-37.72	-39.26	6.63	-28.78
6	7310.93 AV	45.16	54	-8.84	-59.85	-59.63	6.63	-50.1

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

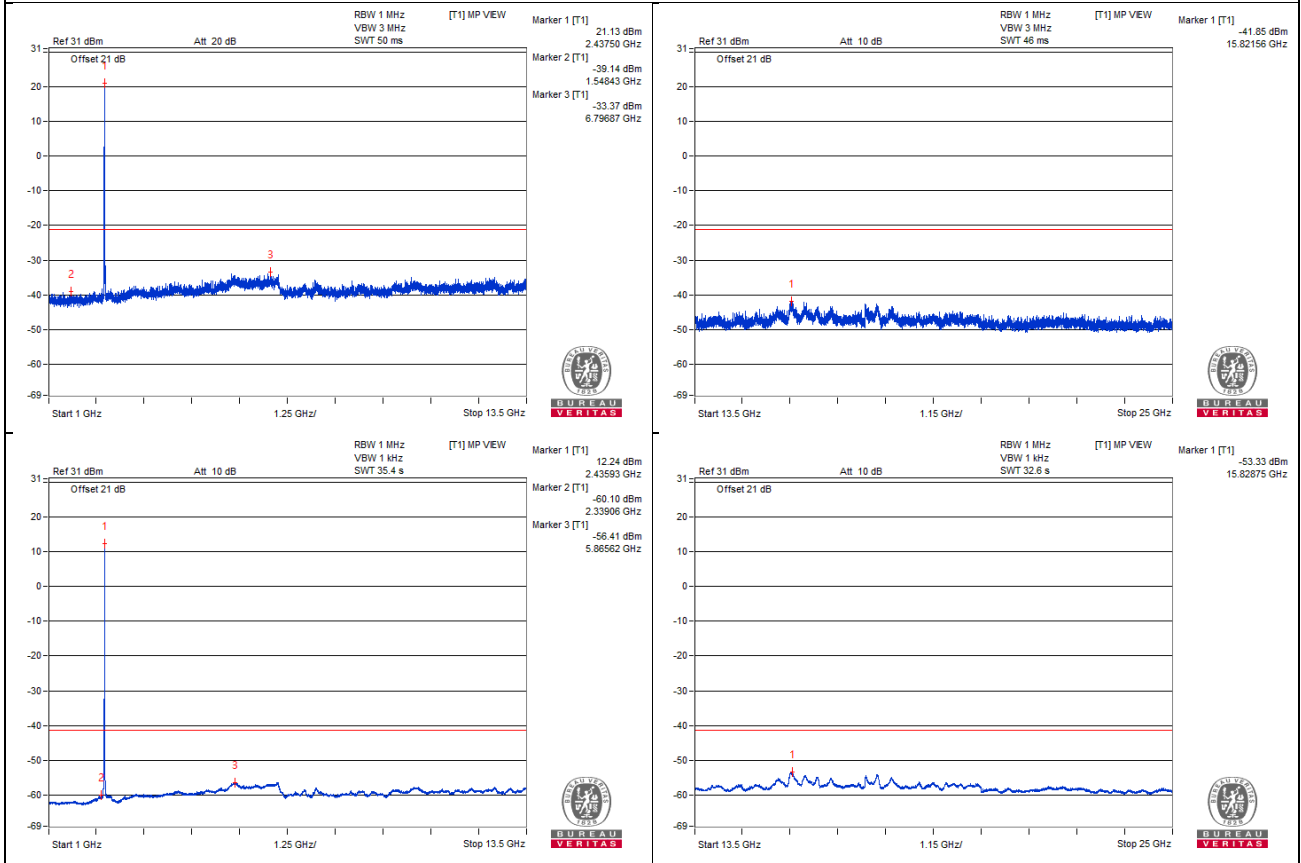

Chain 1

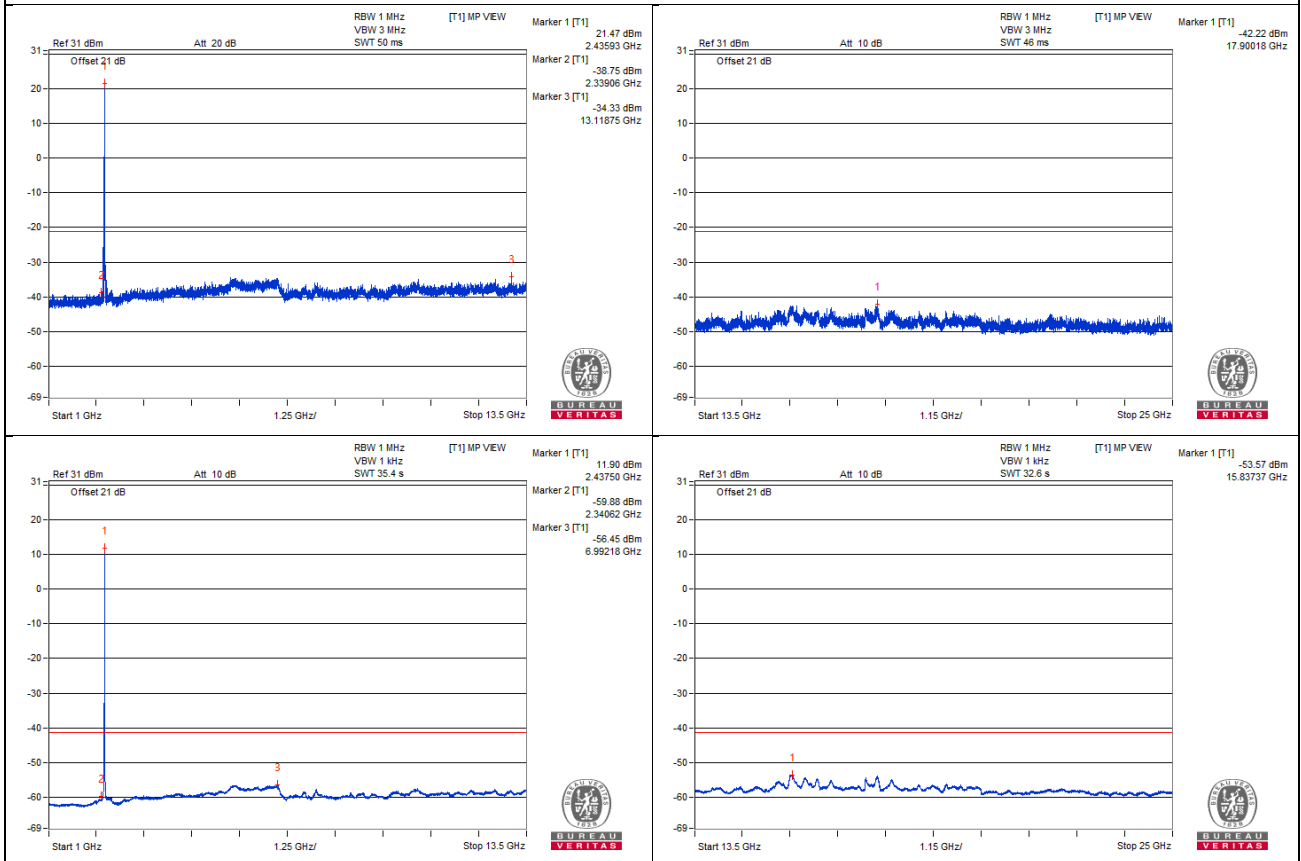

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2487.27 PK	71.7	74	-2.3	-32.76	-33.68	6.63	-23.56
2	2485.79 AV	44.7	54	-9.3	-60.2	-60.21	6.63	-50.56

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

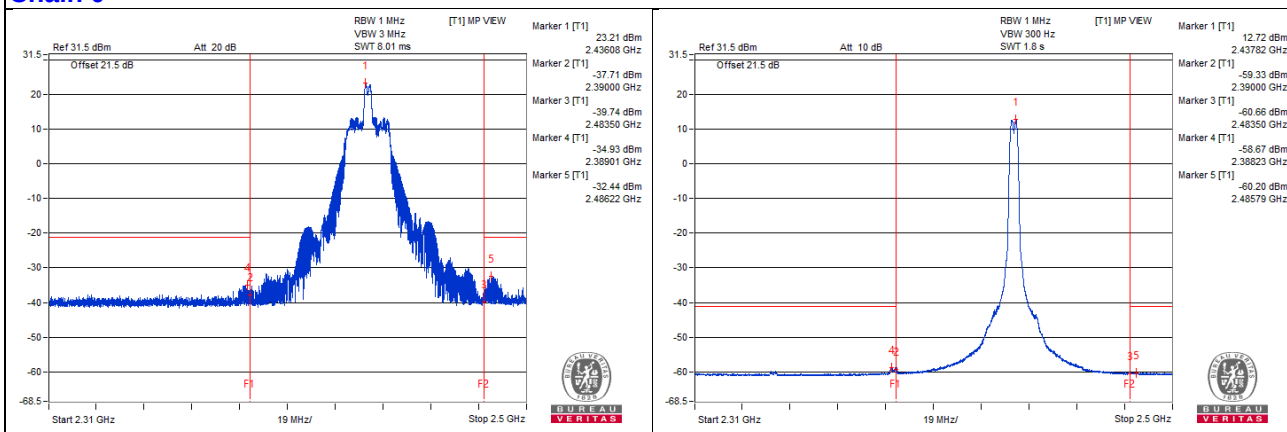

Chain 1

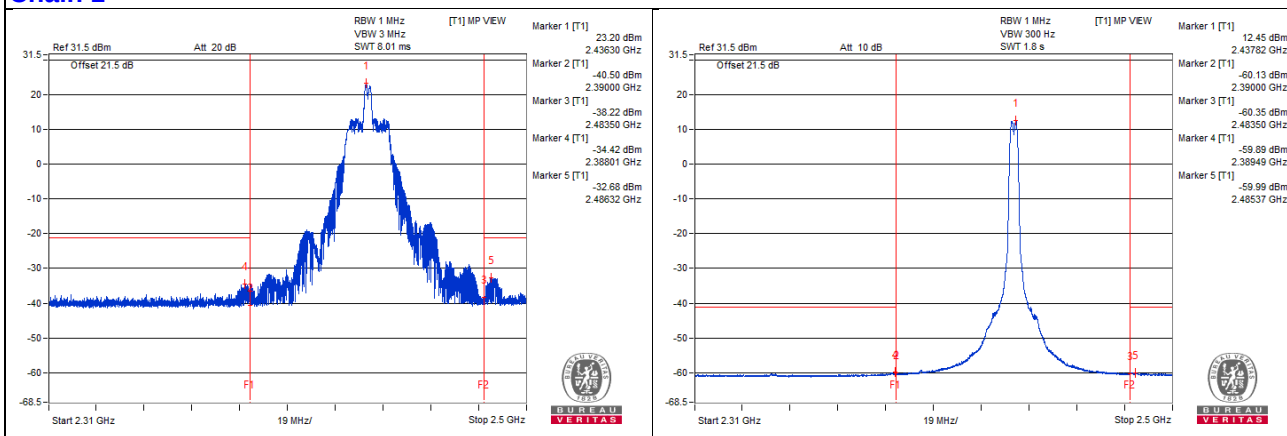

Channel 10

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4917.18 PK	67.39	74	-6.61	-36.57	-38.71	6.63	-27.87
2	4931.25 AV	45.58	54	-8.42	-59.29	-59.36	6.63	-49.68
3	7373.43 PK	66.74	74	-7.26	-38.35	-37.98	6.63	-28.52
4	7353.12 AV	45.13	54	-8.87	-59.87	-59.68	6.63	-50.13

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

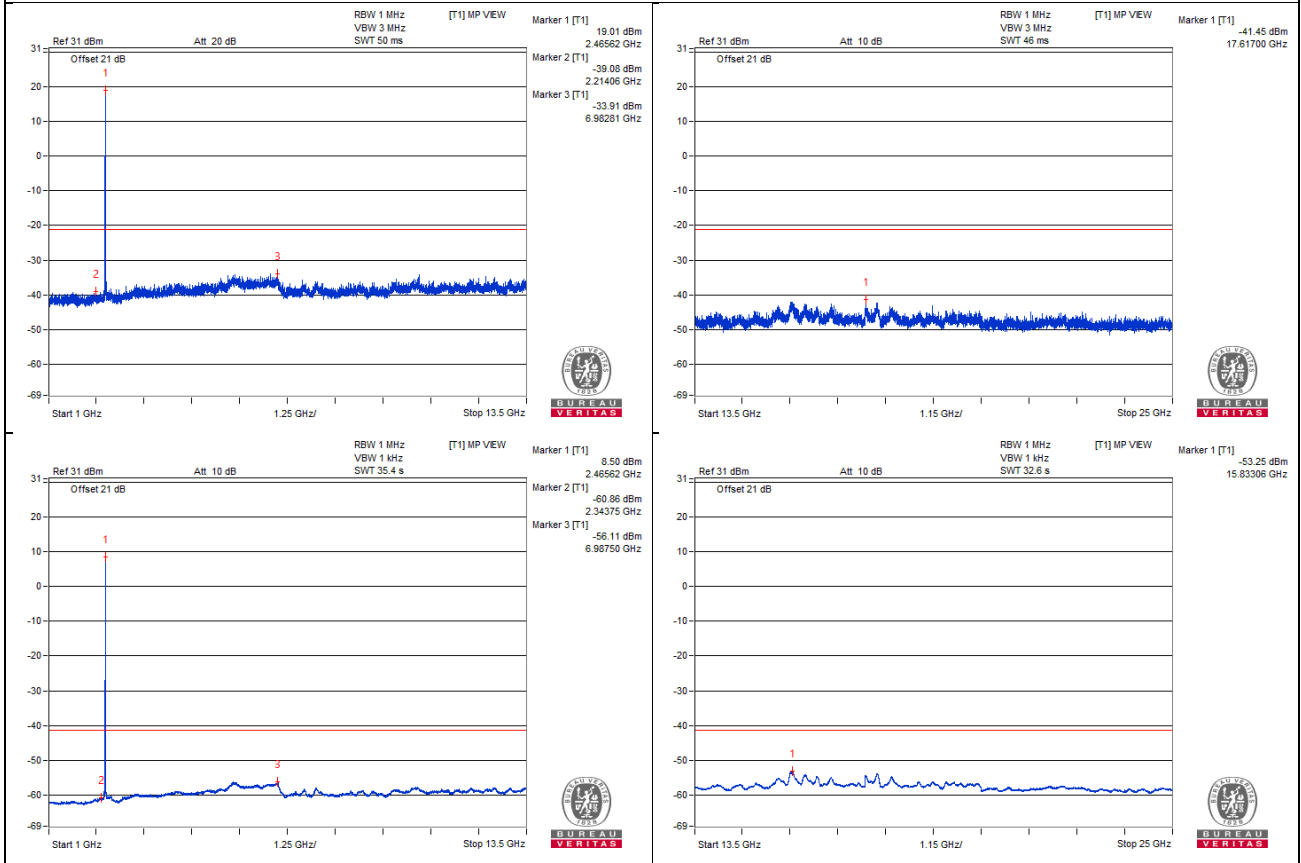

Chain 1

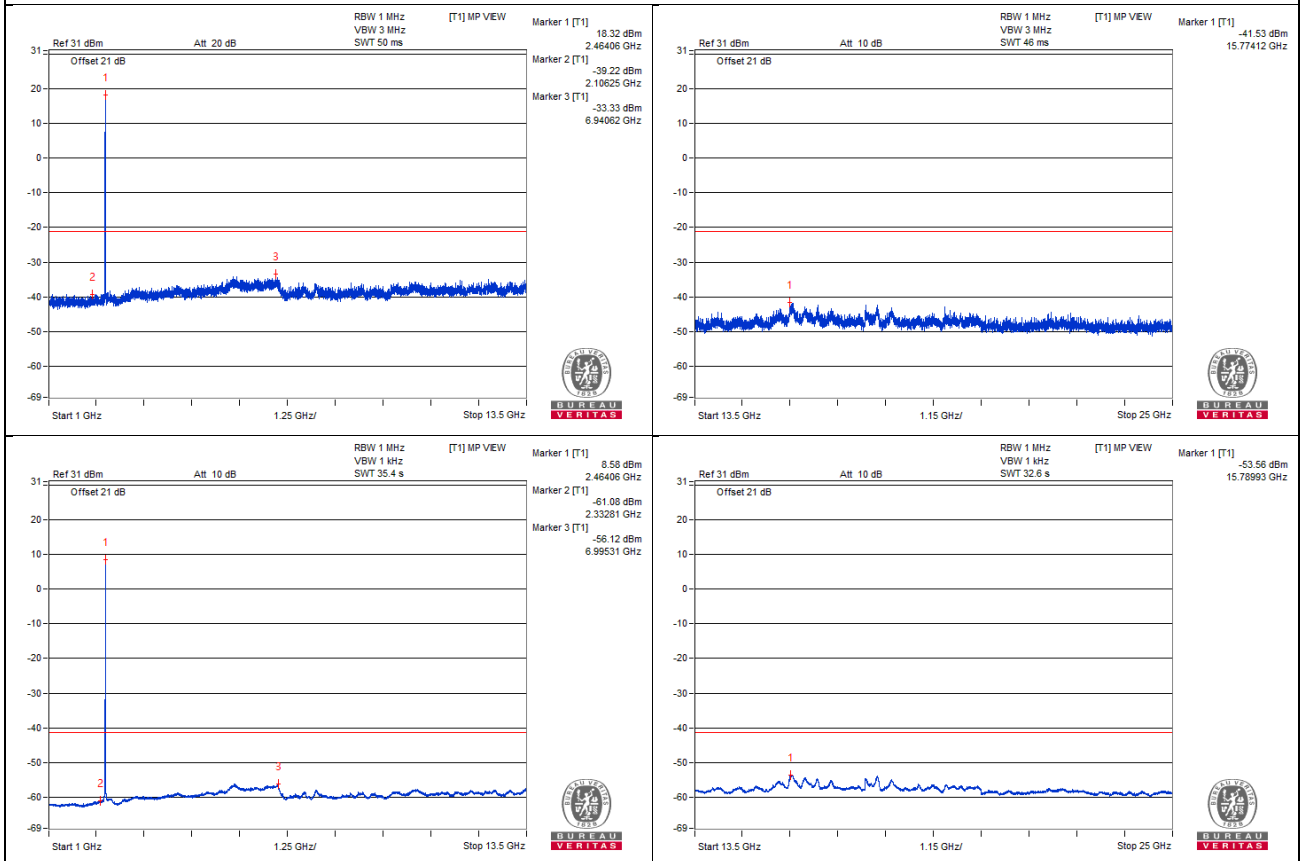

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2484.04 PK	71.92	74	-2.08	-33.29	-32.51	6.63	-23.34
2	2483.58 AV	45.26	54	-8.74	-59.65	-59.63	6.63	-50

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

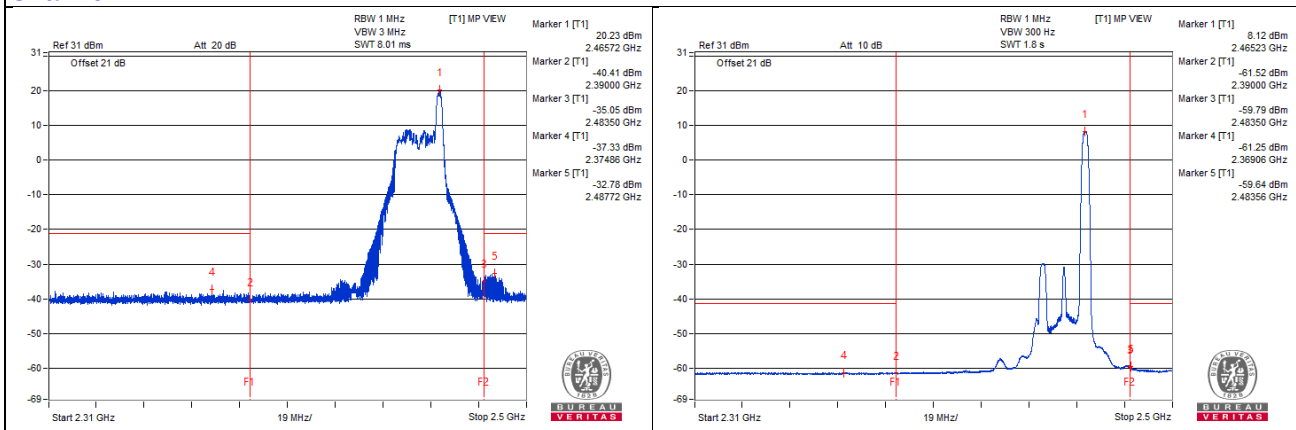

Chain 1

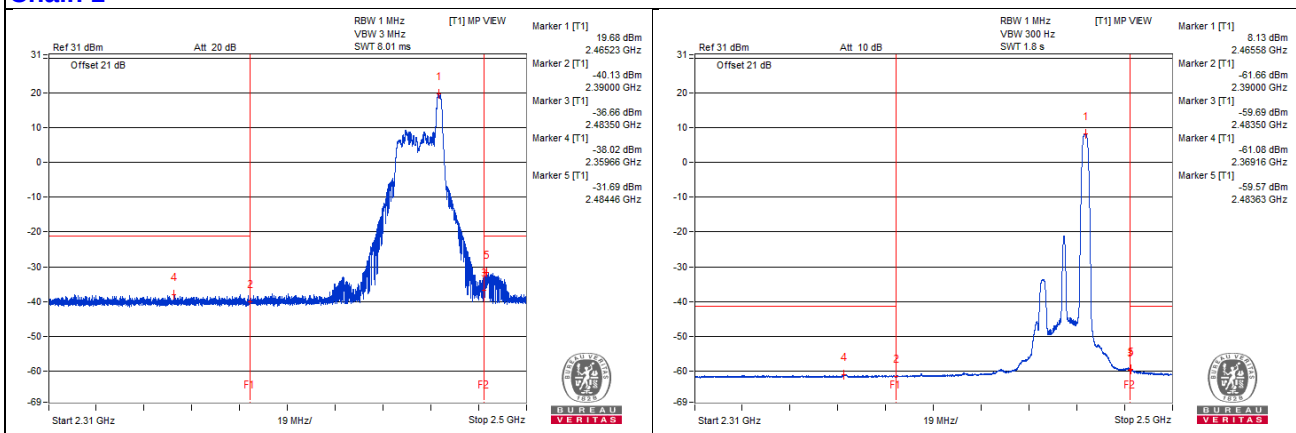

Channel 11

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4923.43 PK	66.76	74	-7.24	-38.8	-37.56	6.63	-28.5
2	4917.18 AV	45.65	54	-8.35	-59.27	-59.24	6.63	-49.61
3	7404.68 PK	66.61	74	-7.39	-38.45	-38.13	6.63	-28.65
4	7400 AV	45.19	54	-8.81	-59.57	-59.85	6.63	-50.07

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

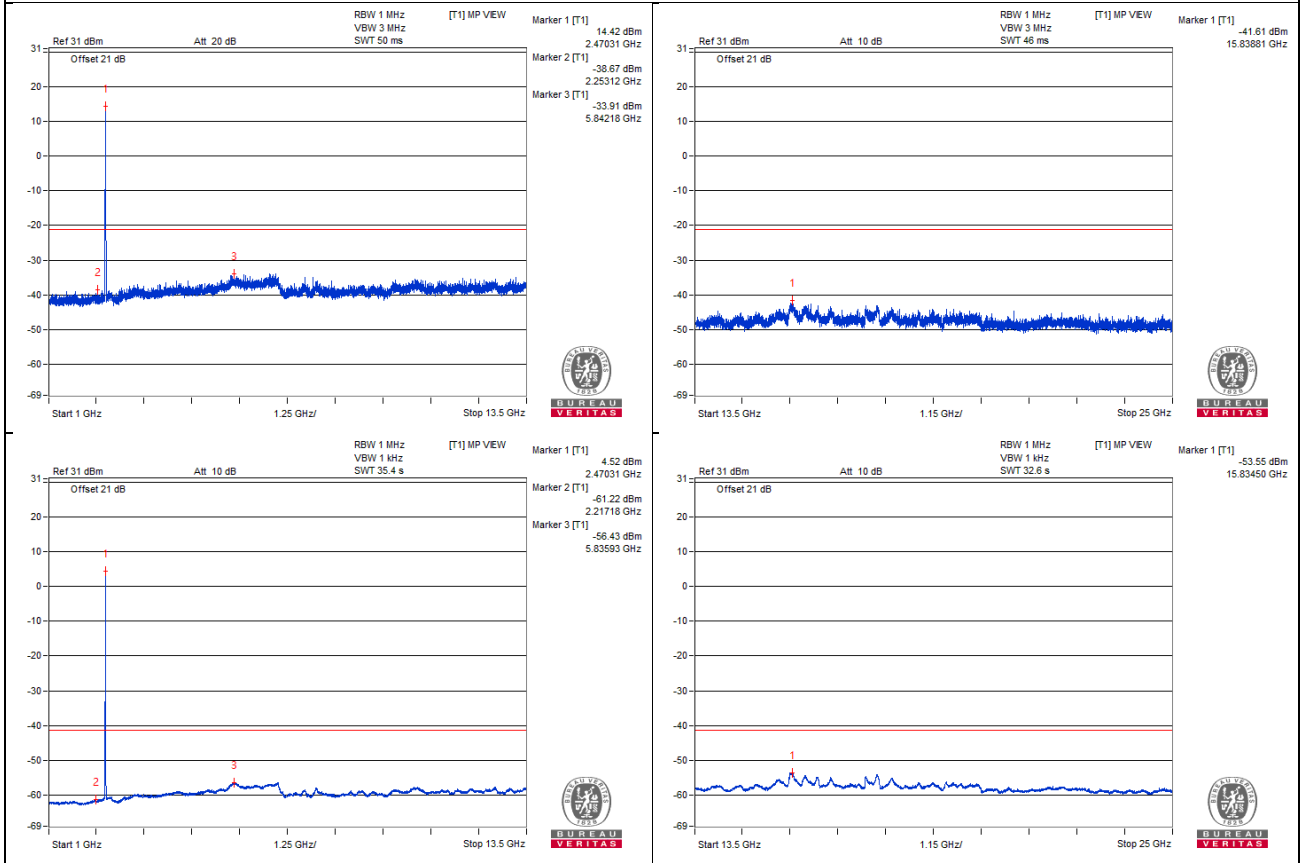

Chain 1

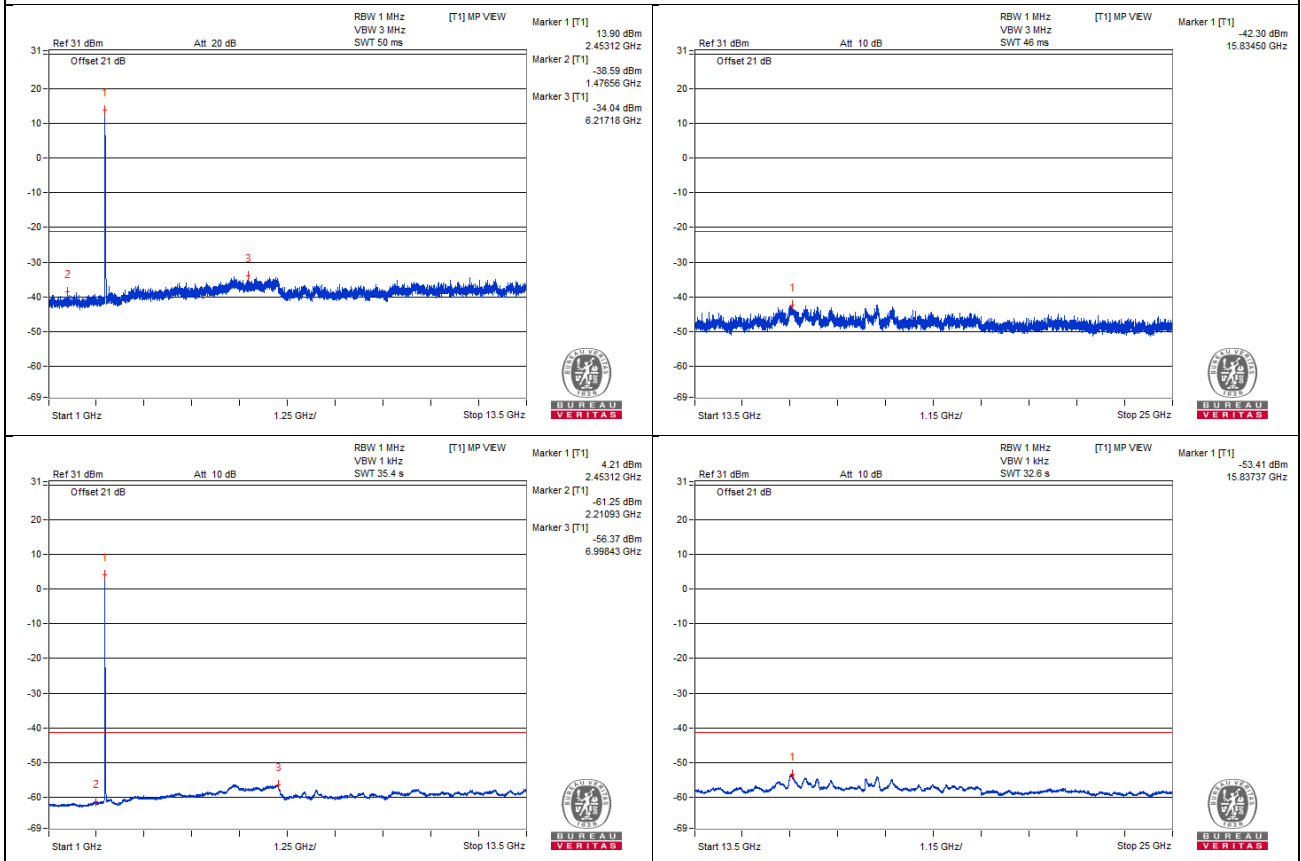

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2484.27 PK	71.12	74	-2.88	-34.79	-32.96	6.63	-24.14
2	2483.7 AV	44.07	54	-9.93	-60.63	-61.03	6.63	-51.19

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

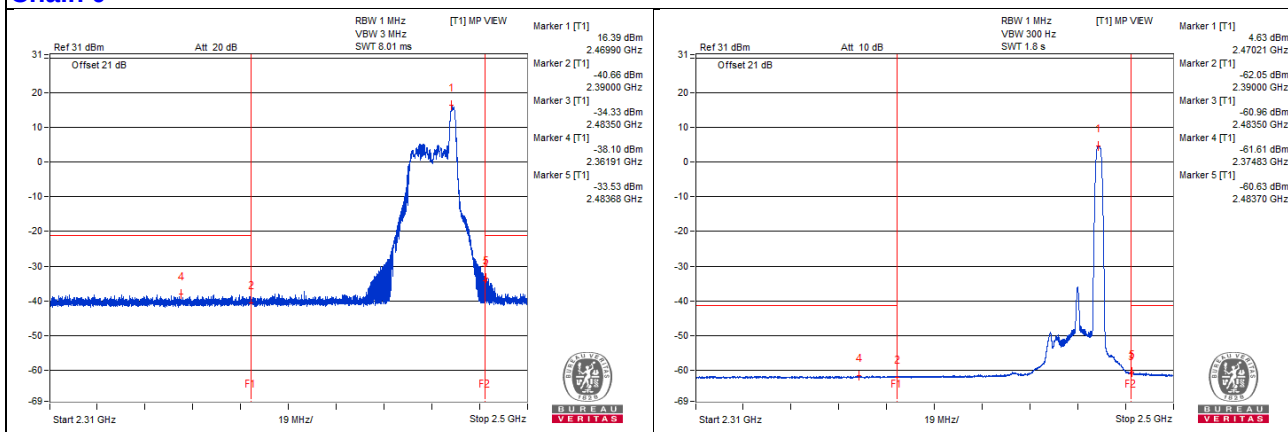

Chain 1

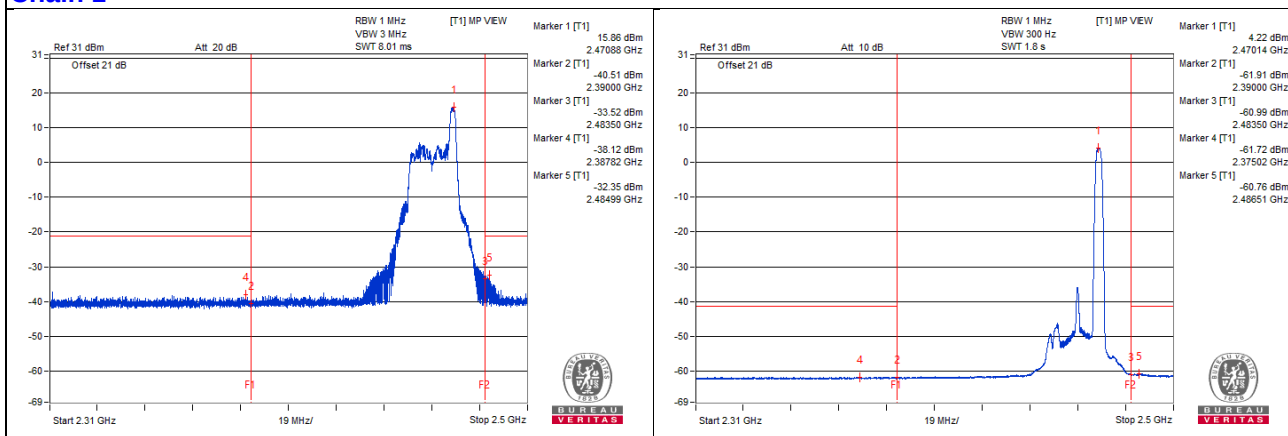

Channel 12

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4917.18 PK	67.44	74	-6.56	-37.93	-37.04	6.63	-27.82
2	4931.25 AV	45.53	54	-8.47	-59.36	-59.39	6.63	-49.73
3	7418.75 PK	66.98	74	-7.02	-38.3	-37.58	6.63	-28.28
4	7407.81 AV	45.25	54	-8.75	-59.73	-59.57	6.63	-50.01

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

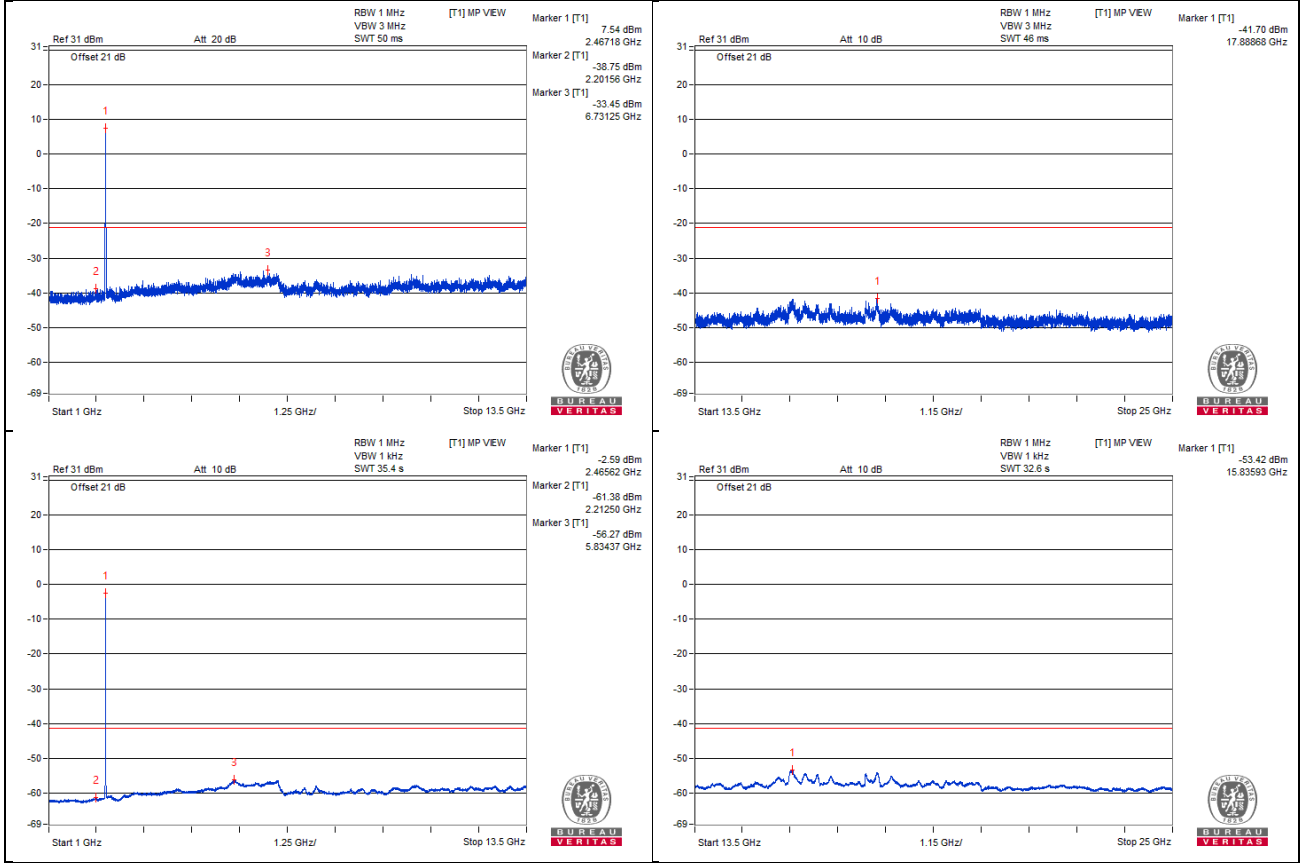

Chain 1

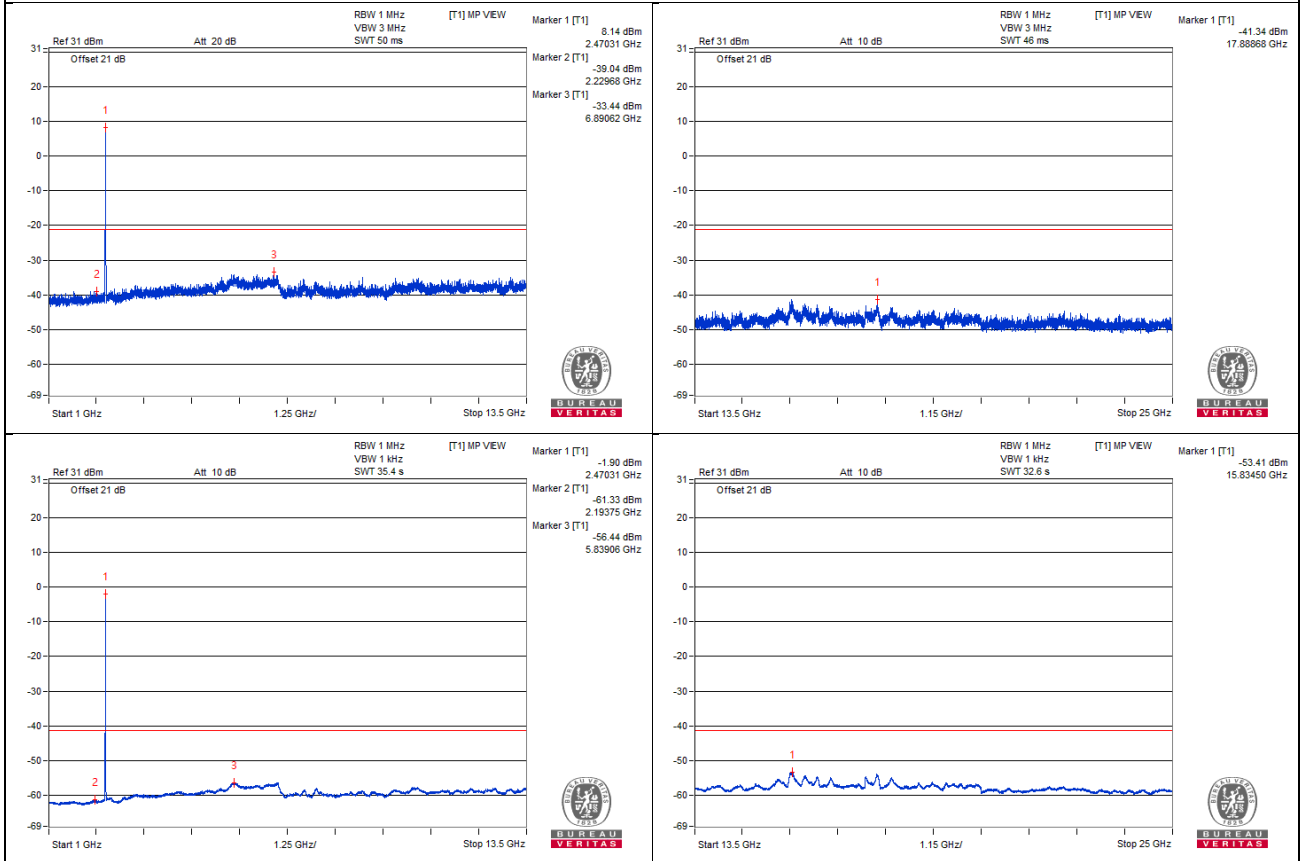

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.68 PK	71.74	74	-2.26	-35.1	-31.82	6.63	-23.52
2	2483.51 AV	44.77	54	-9.23	-60.02	-60.24	6.63	-50.49

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

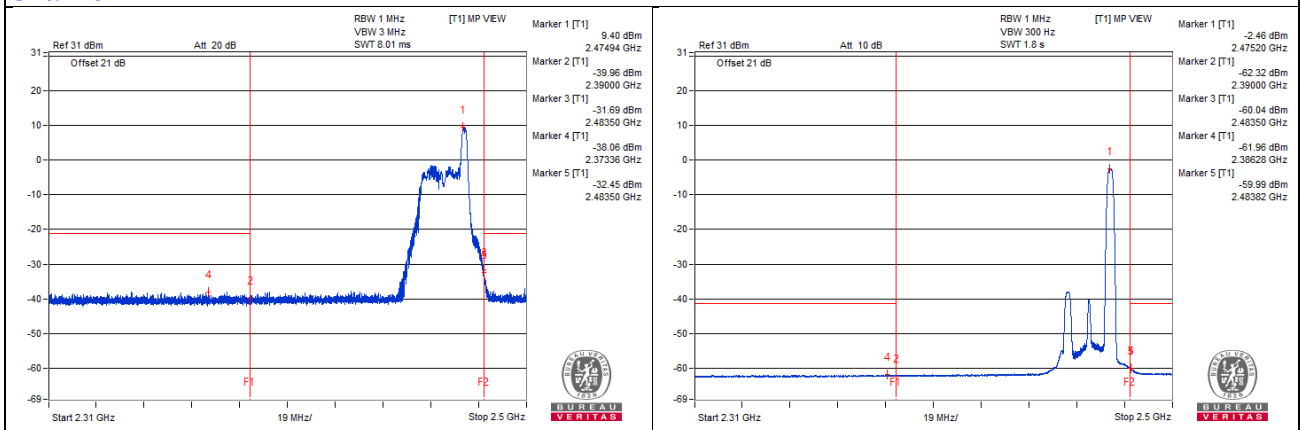

Chain 1

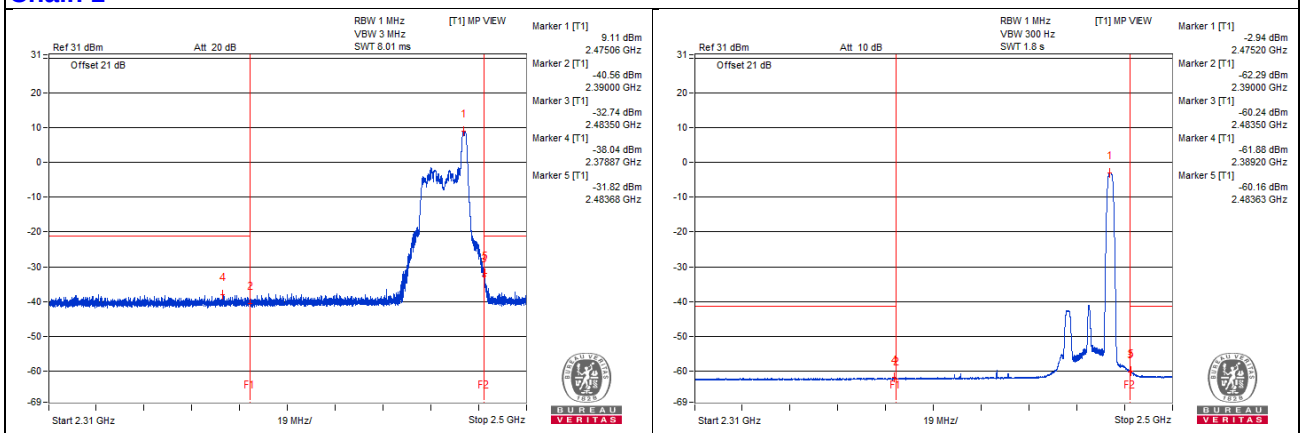

Channel 13

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4959.37 PK	67.86	74	-6.14	-36.92	-37.16	6.63	-27.4
2	4954.68 AV	45.58	54	-8.42	-59.28	-59.37	6.63	-49.68
3	7412.5 PK	66.09	74	-7.91	-38.87	-38.75	6.63	-29.17
4	7415.62 AV	45.3	54	-8.7	-59.51	-59.69	6.63	-49.96

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

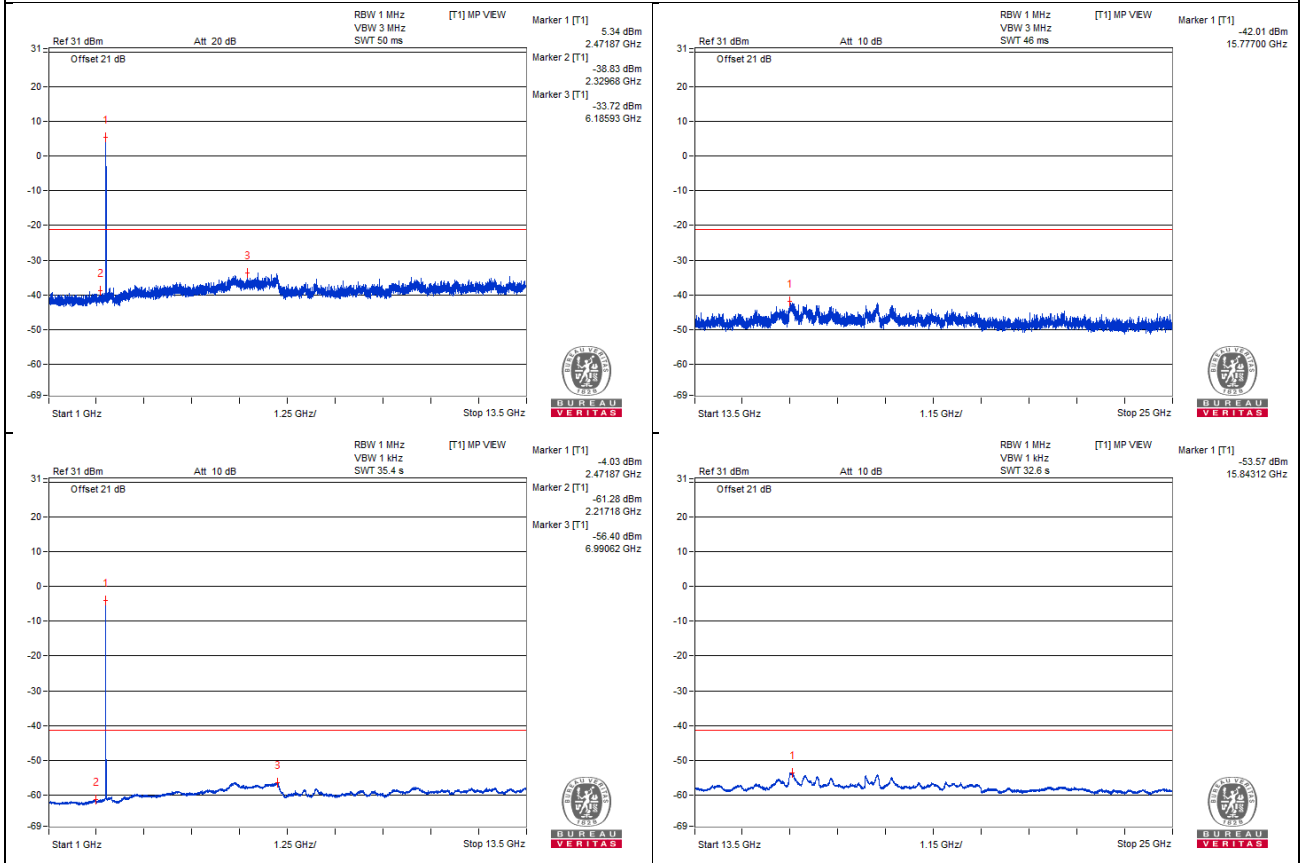

Chain 1

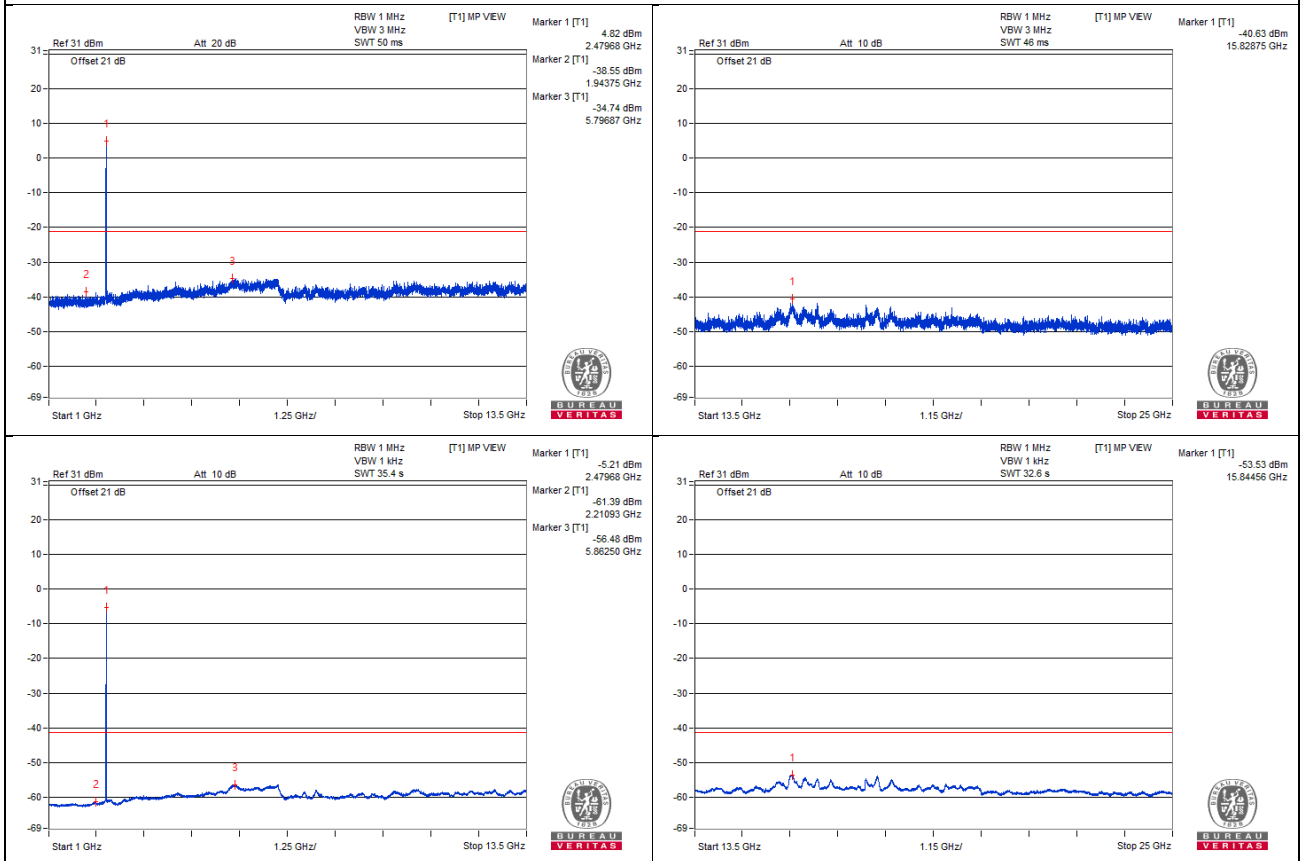

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.51 PK	79.71	74	* 5.71	-25.93	-24.55	6.63	-15.55
2	2483.51 AV	46.6	54	-7.4	-58.28	-58.32	6.63	-48.66


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

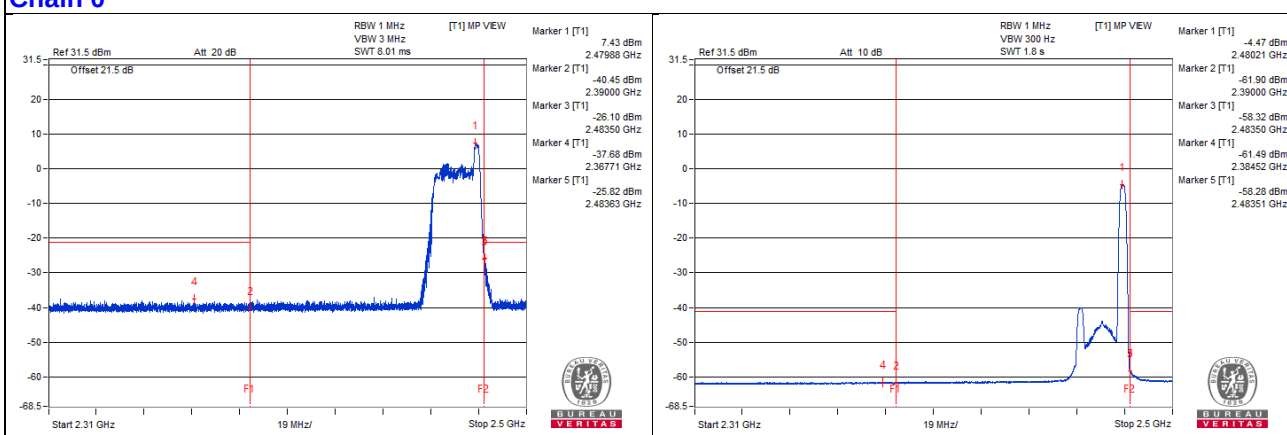

Chain 1

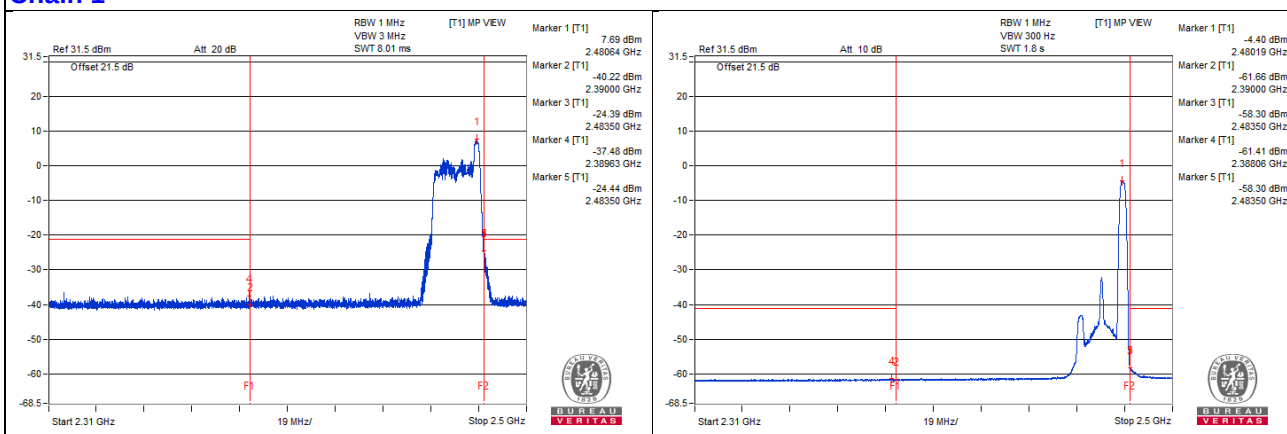

20MHz Preamble

RU242

Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1607.81 PK	64.57	74	-9.43	-41.63	-39.33	6.63	-30.69
2	1609.37 AV	42.71	54	-11.29	-62.15	-62.24	6.63	-52.55
3	4817.18 PK	67.48	74	-6.52	-37.73	-37.14	6.63	-27.78
4	4834.37 AV	45.44	54	-8.56	-59.27	-59.65	6.63	-49.82

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

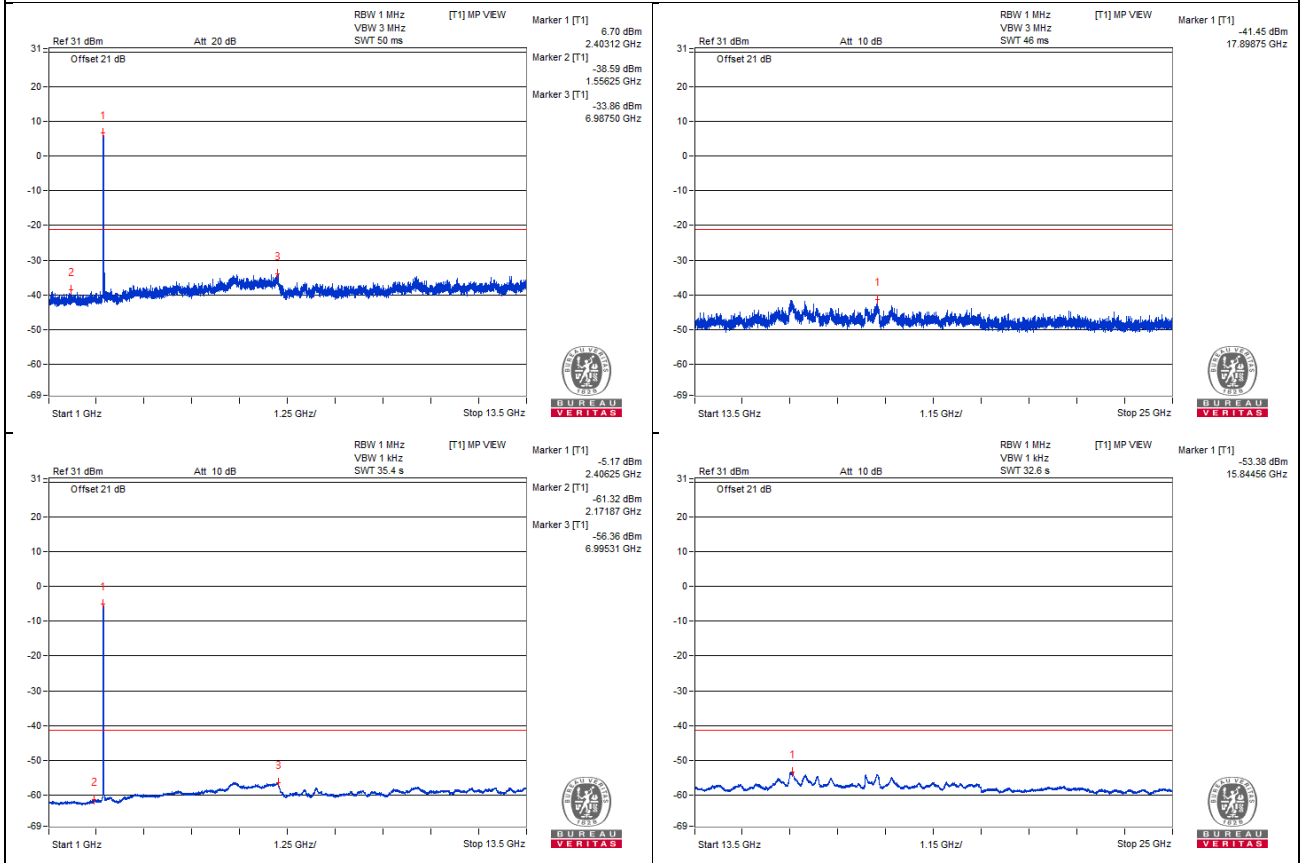

Chain 1

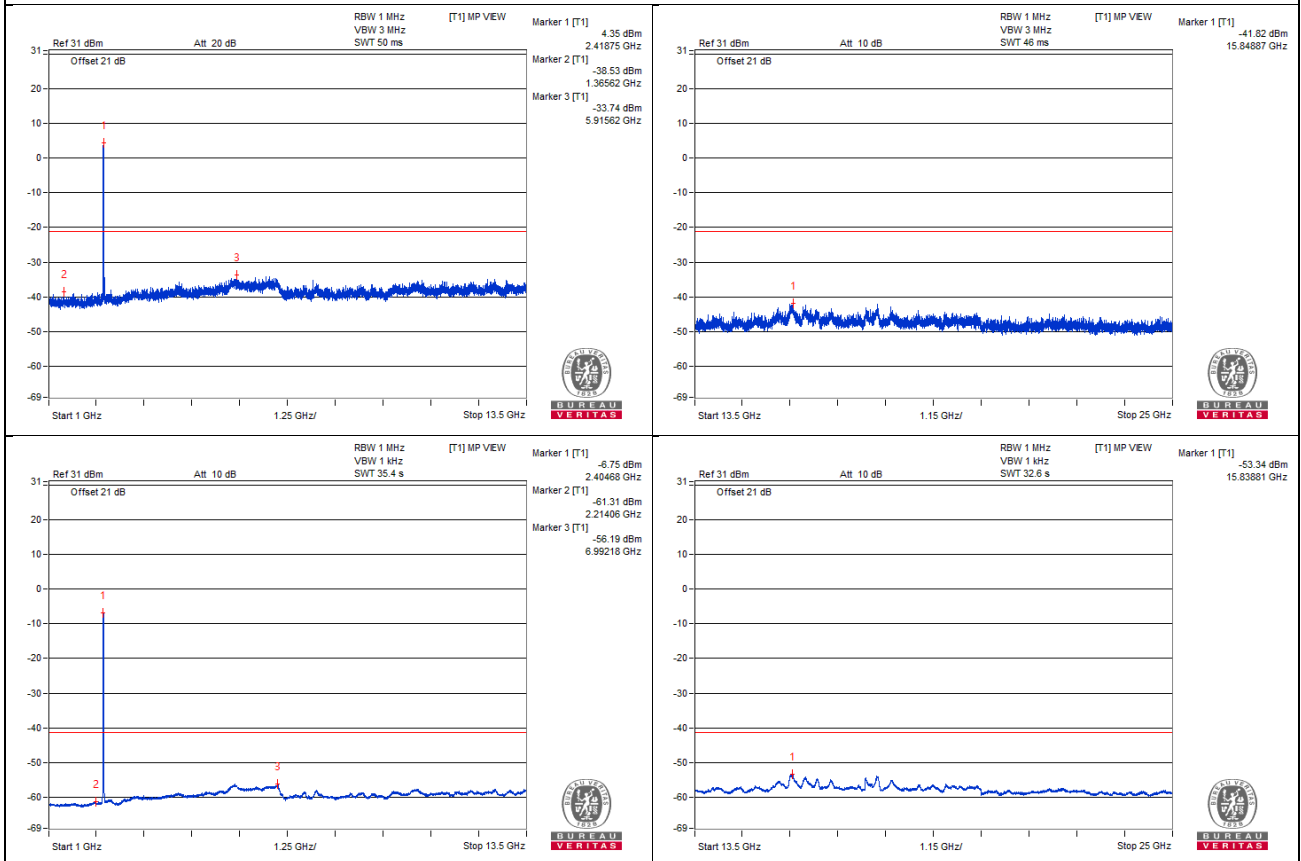

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.72 PK	71.74	74	-2.26	-33.43	-32.9	6.63	-23.52
2	2389.82 AV	48.35	54	-5.65	-56.55	-56.56	6.63	-46.91

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

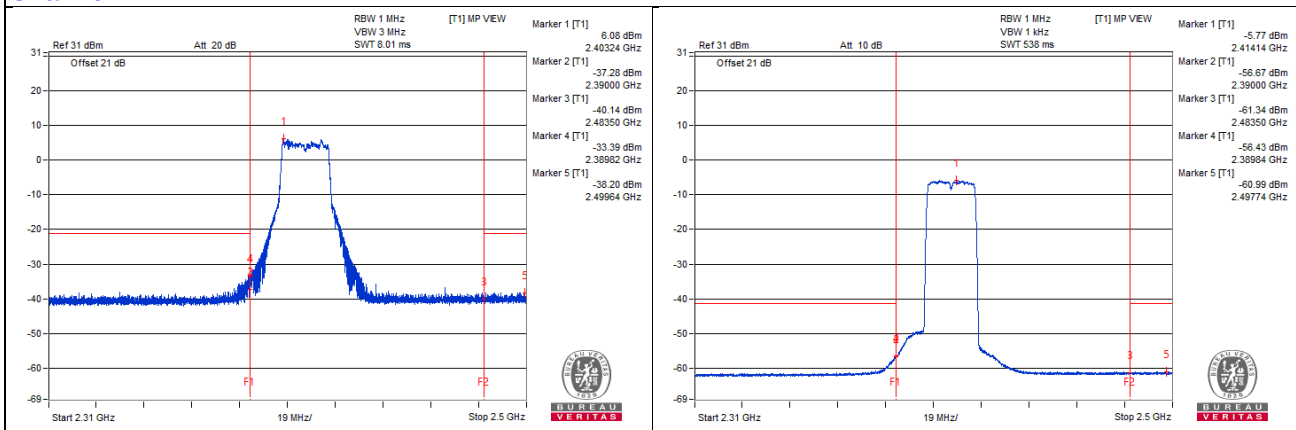

Chain 1

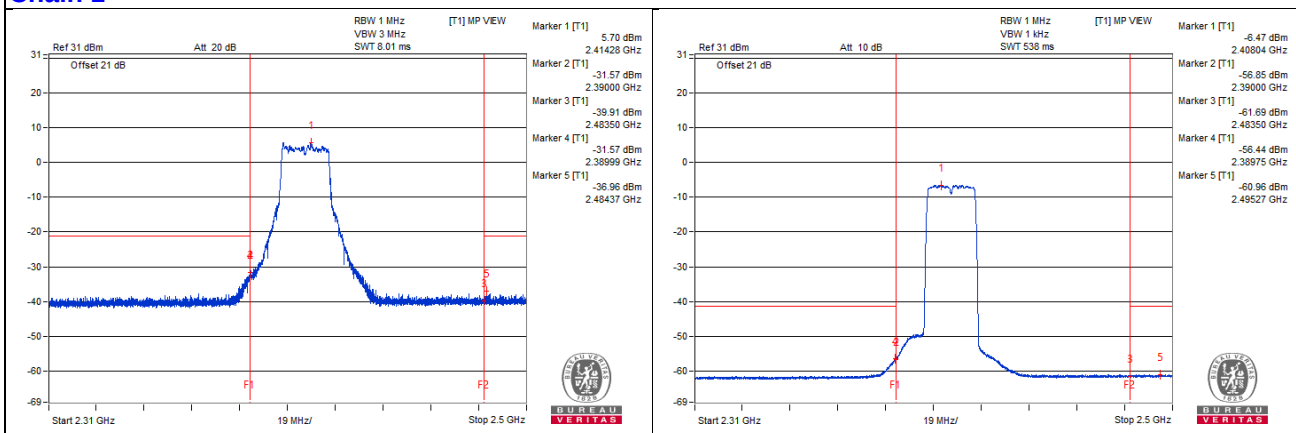

Channel 2

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1612.5 PK	63.53	74	-10.47	-41.16	-41.6	6.63	-31.73
2	1610.93 AV	42.79	54	-11.21	-62.14	-62.09	6.63	-52.47
3	4825 PK	67.19	74	-6.81	-39.59	-36.4	6.63	-28.07
4	4850 AV	45.41	54	-8.59	-59.57	-59.42	6.63	-49.85
5	7250 PK	65.51	74	-8.49	-38.55	-40.44	6.63	-29.75
6	7251.56 AV	44.73	54	-9.27	-60.01	-60.33	6.63	-50.53

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

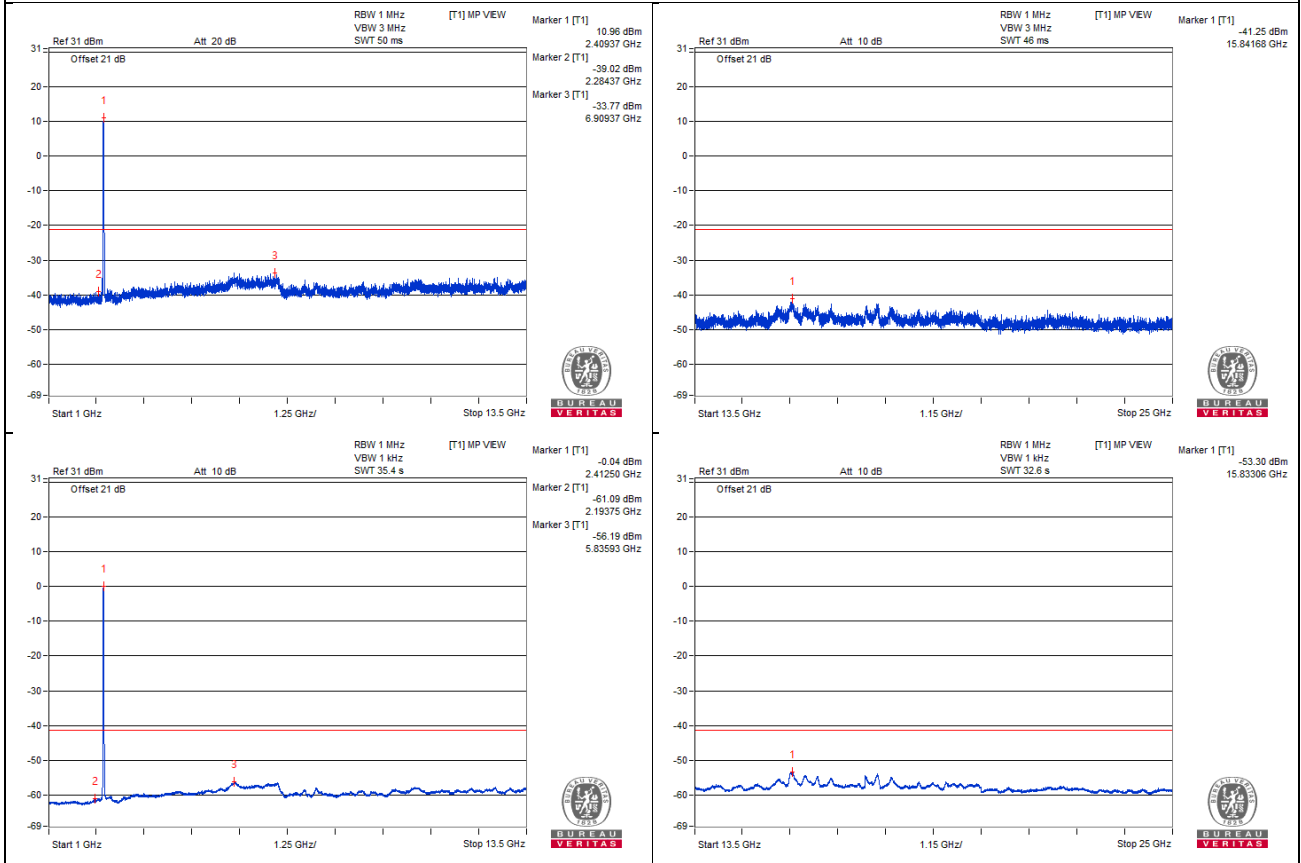

Chain 1

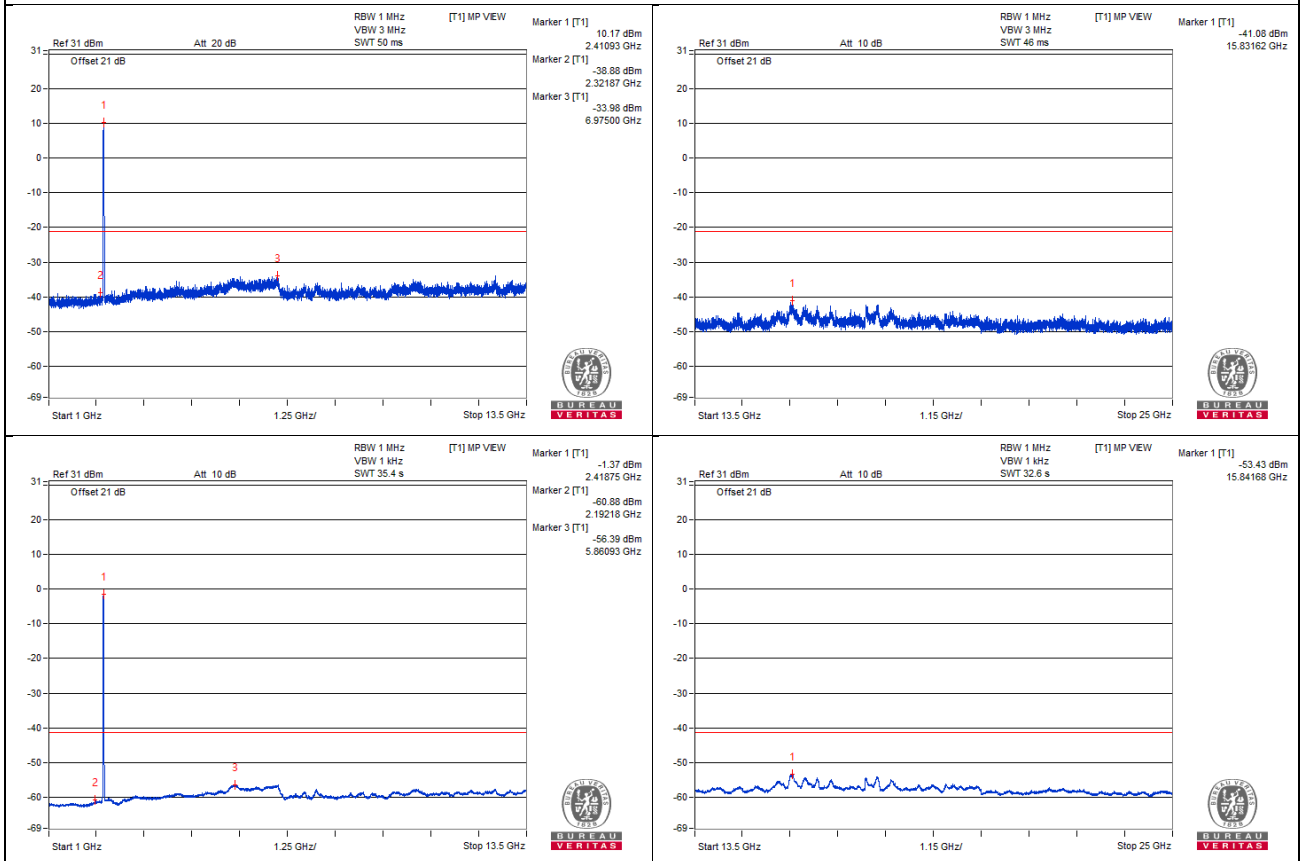

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.99 PK	71.97	74	-2.03	-32.92	-32.95	6.63	-23.29
2	2389.94 AV	48.32	54	-5.68	-57.36	-55.92	6.63	-46.94

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

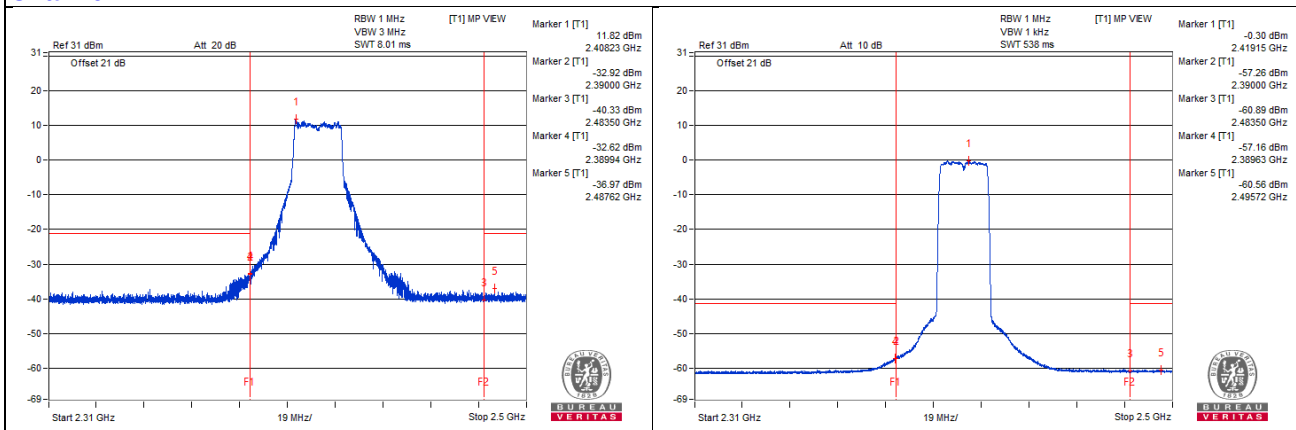

Chain 1

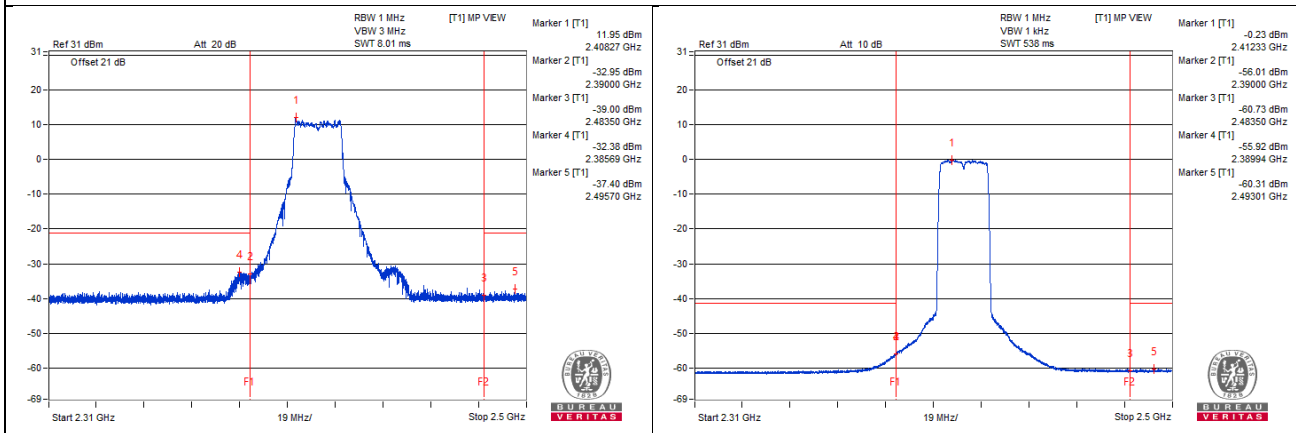

Channel 6

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1623.43 PK	64.97	74	-9.03	-40.23	-39.65	6.63	-30.29
2	1625 AV	42.78	54	-11.22	-62.08	-62.16	6.63	-52.48
3	4857.81 PK	66.74	74	-7.26	-39.38	-37.21	6.63	-28.52
4	4876.56 AV	45.58	54	-8.42	-59.16	-59.49	6.63	-49.68
5	7310.93 PK	65.56	74	-8.44	-39.82	-38.9	6.63	-29.7
6	7312.5 AV	44.85	54	-9.15	-60.1	-60.01	6.63	-50.41

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

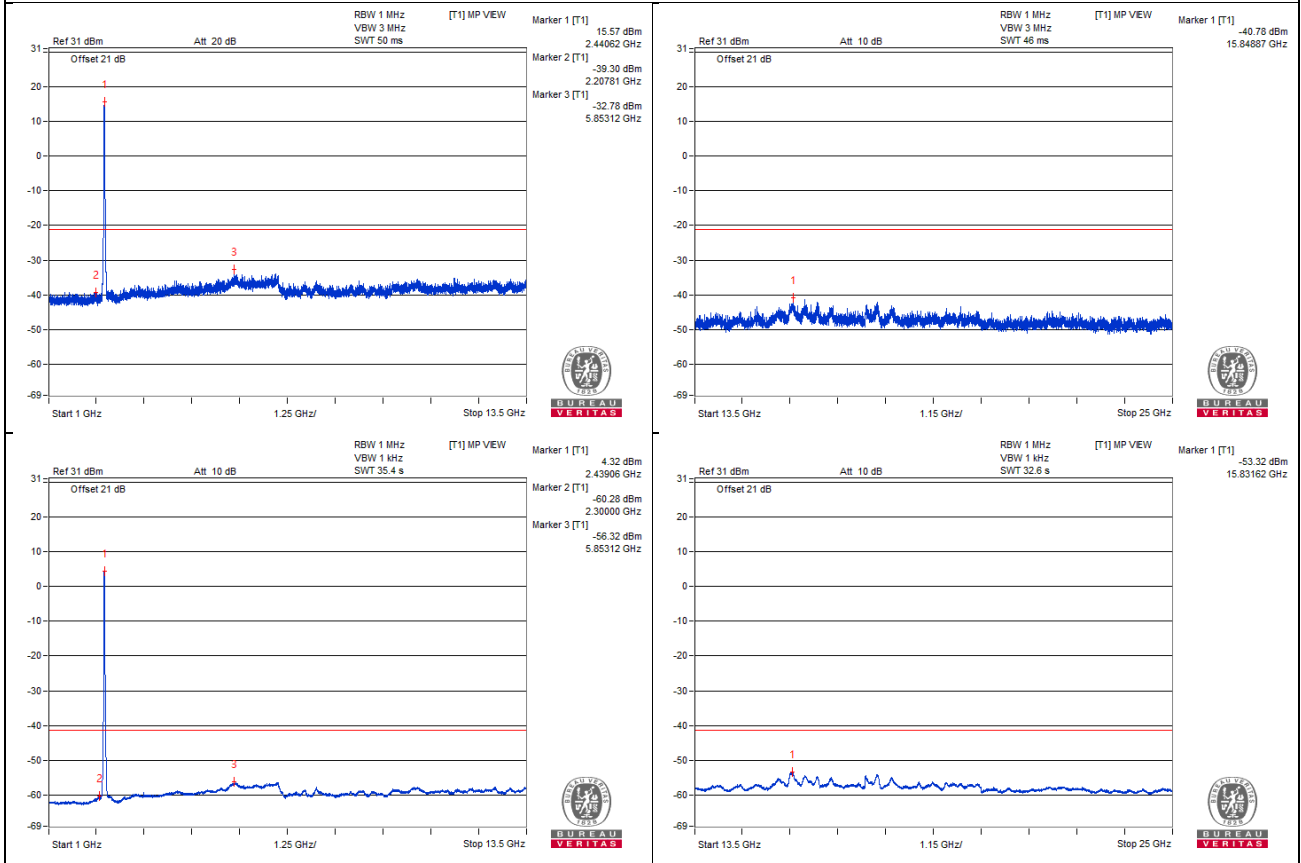

Chain 1

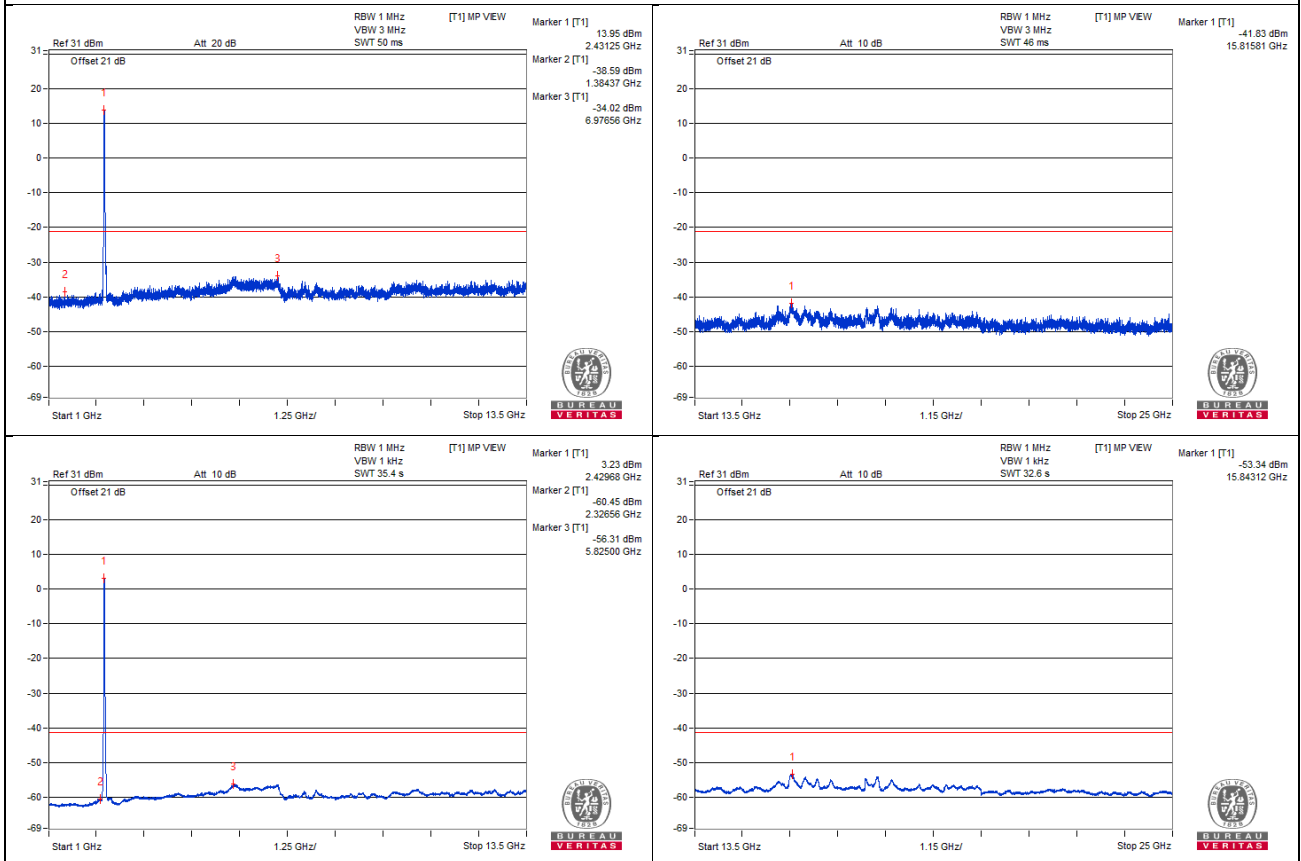

Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2486.62 PK	70.79	74	-3.21	-33.56	-34.73	6.63	-24.47
2	2483.51 AV	47.76	54	-6.24	-57.27	-57.01	6.63	-47.5

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

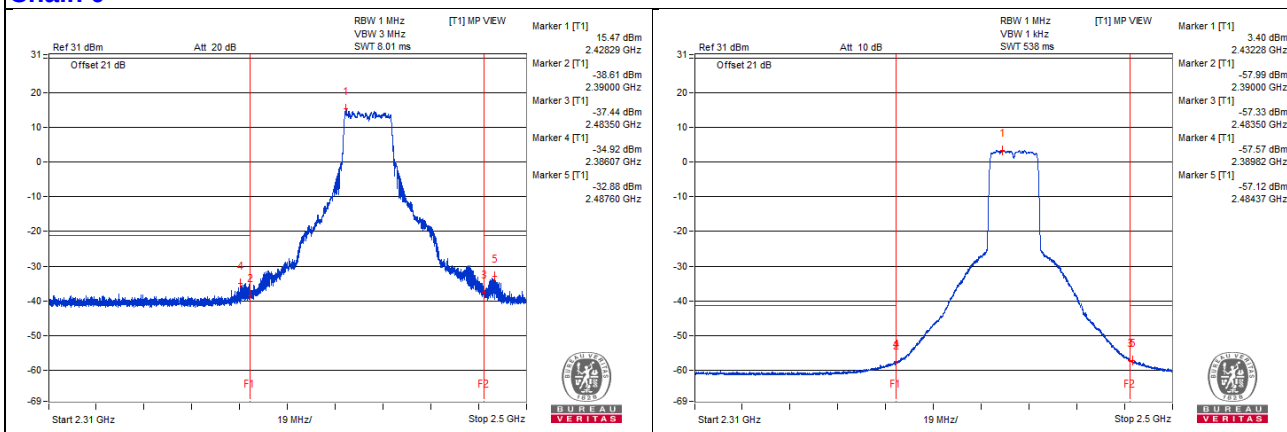

Chain 1

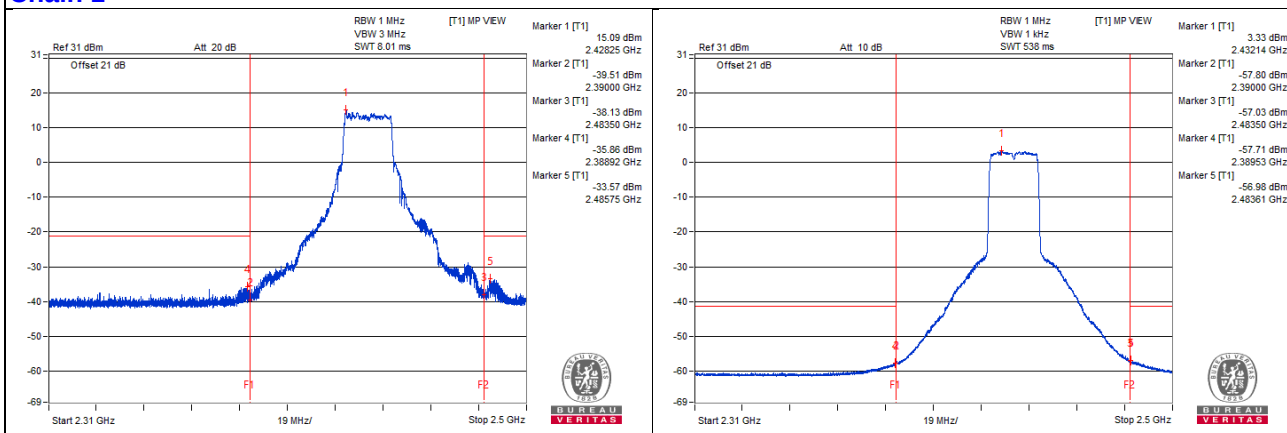

Channel 10

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4921.87 PK	67.02	74	-6.98	-37.85	-37.92	6.63	-28.24
2	4918.75 AV	45.6	54	-8.4	-59.2	-59.4	6.63	-49.66
3	7370.31 PK	65.35	74	-8.65	-39.31	-39.8	6.63	-29.91
4	7371.87 AV	44.93	54	-9.07	-59.97	-59.98	6.63	-50.33

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

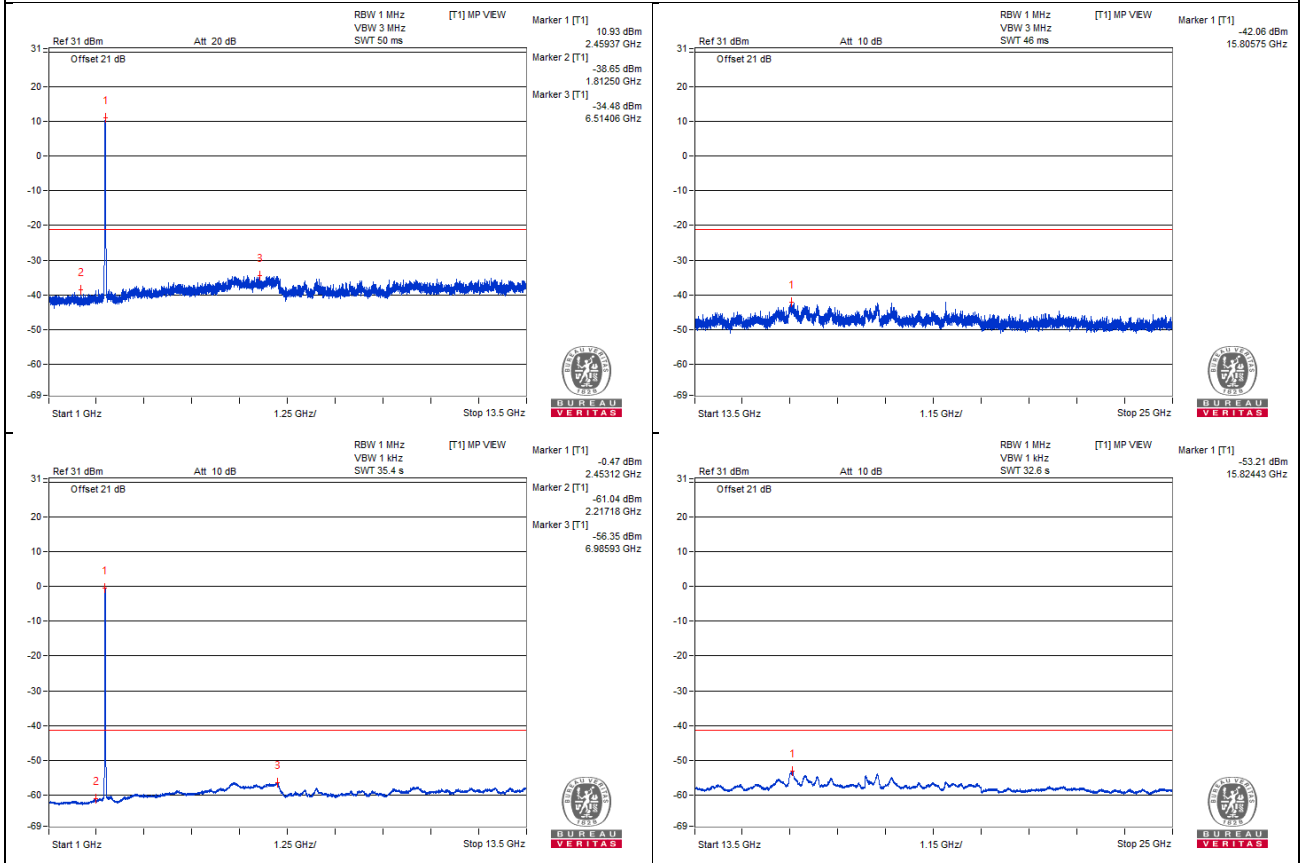

Chain 1

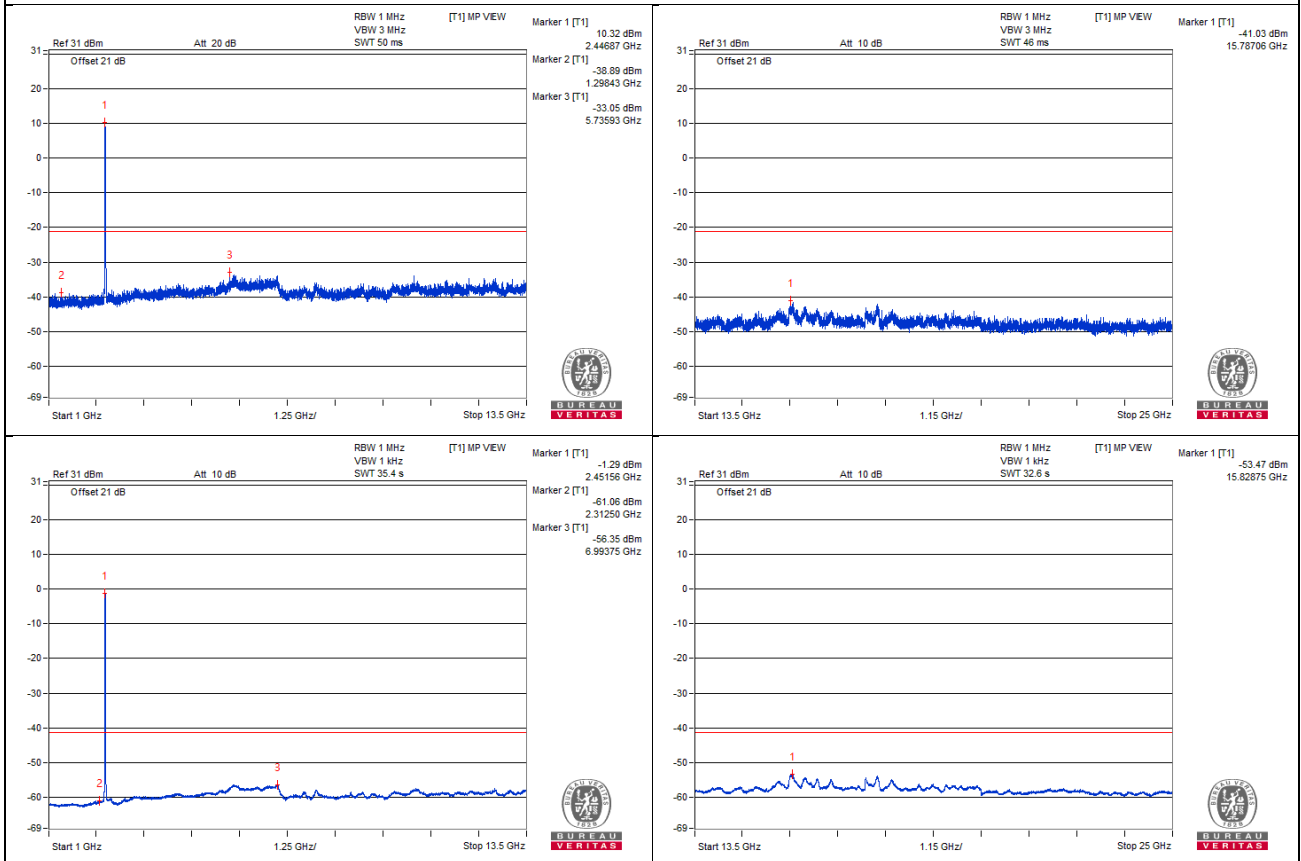

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2487.22 PK	71.99	74	-2.01	-32.26	-33.62	6.63	-23.27
2	2483.63 AV	47.67	54	-6.33	-56.92	-57.57	6.63	-47.59

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

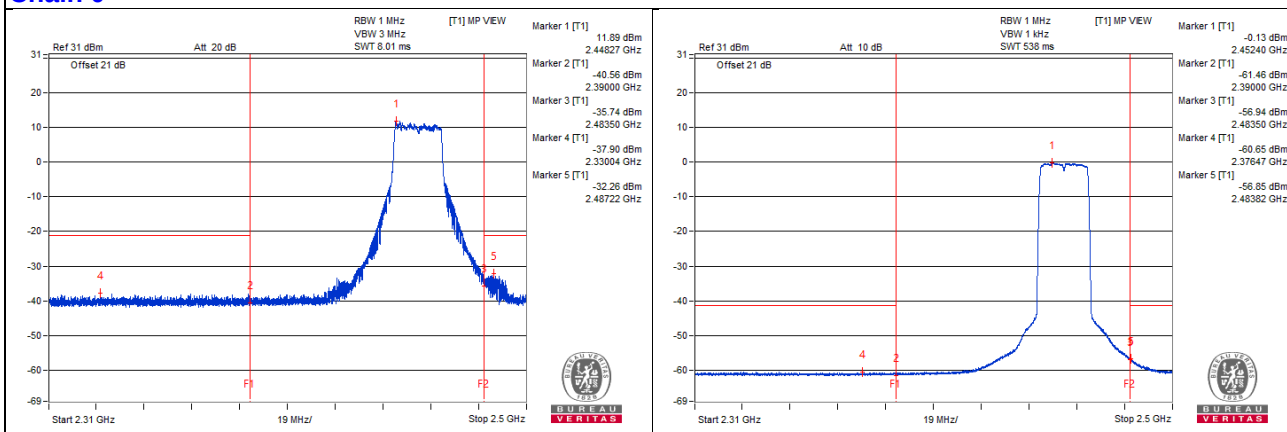

Chain 1

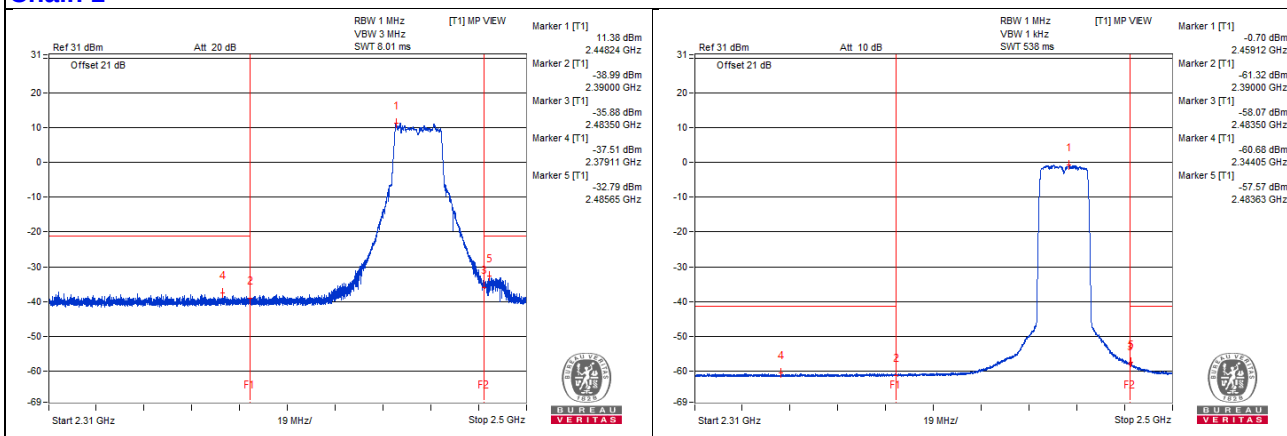

Channel 11

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4937.5 PK	67.07	74	-6.93	-38.79	-37.04	6.63	-28.19
2	4907.81 AV	45.72	54	-8.28	-59.14	-59.23	6.63	-49.54
3	7385.93 PK	65.75	74	-8.25	-39.72	-38.64	6.63	-29.51
4	7385.93 AV	44.95	54	-9.05	-60.27	-59.66	6.63	-50.31

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

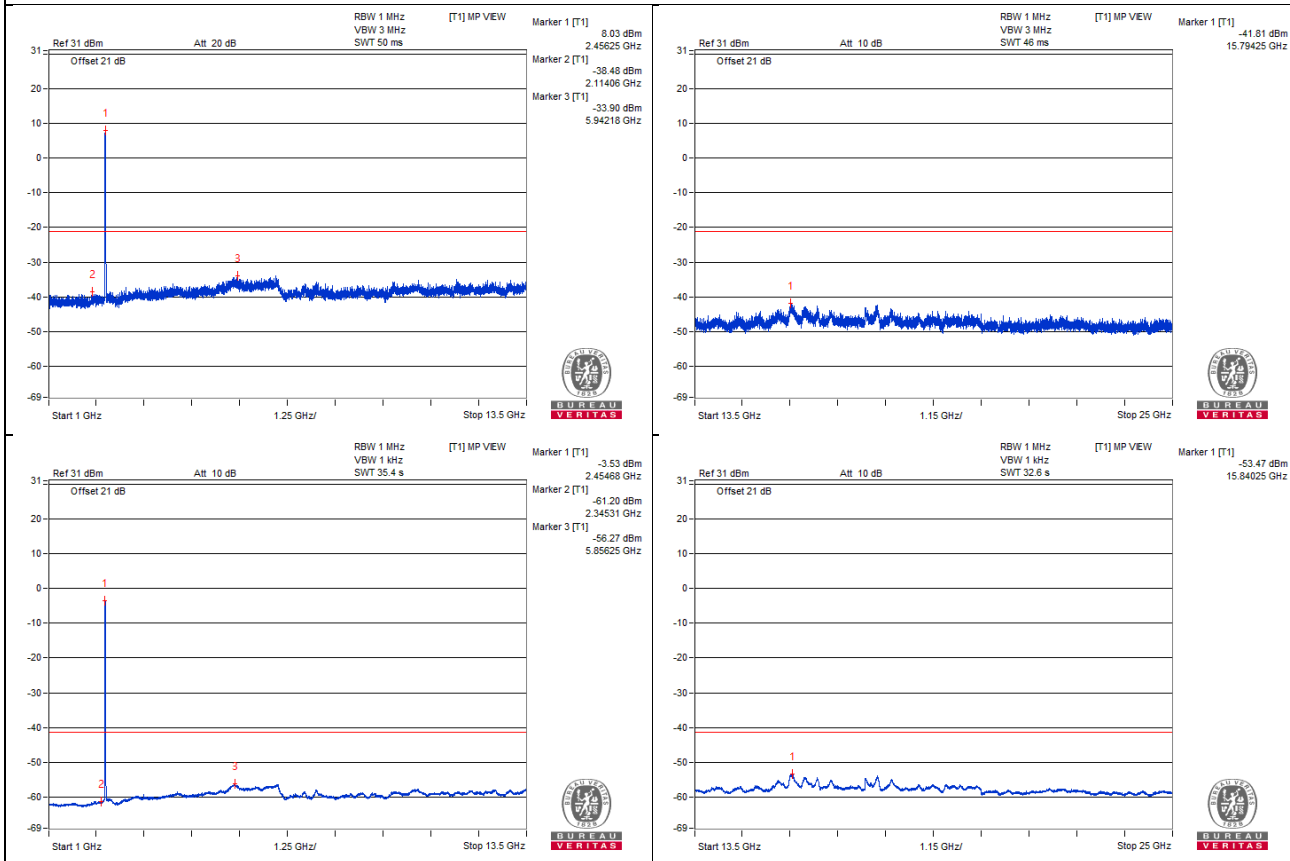

Chain 1

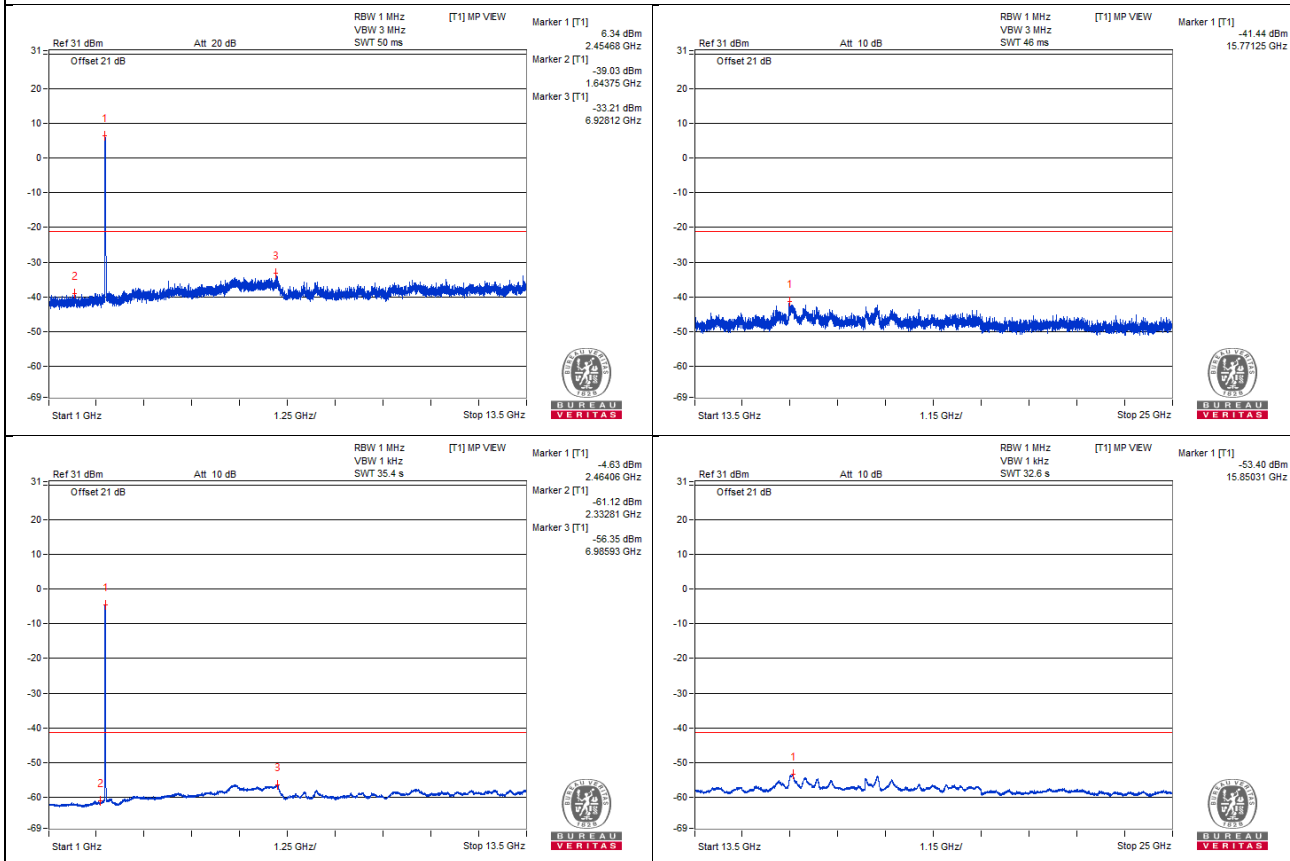

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.58 PK	71.59	74	-2.41	-33.31	-33.32	6.63	-23.67
2	2483.82 AV	44.63	54	-9.37	-60.12	-60.42	6.63	-50.63

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

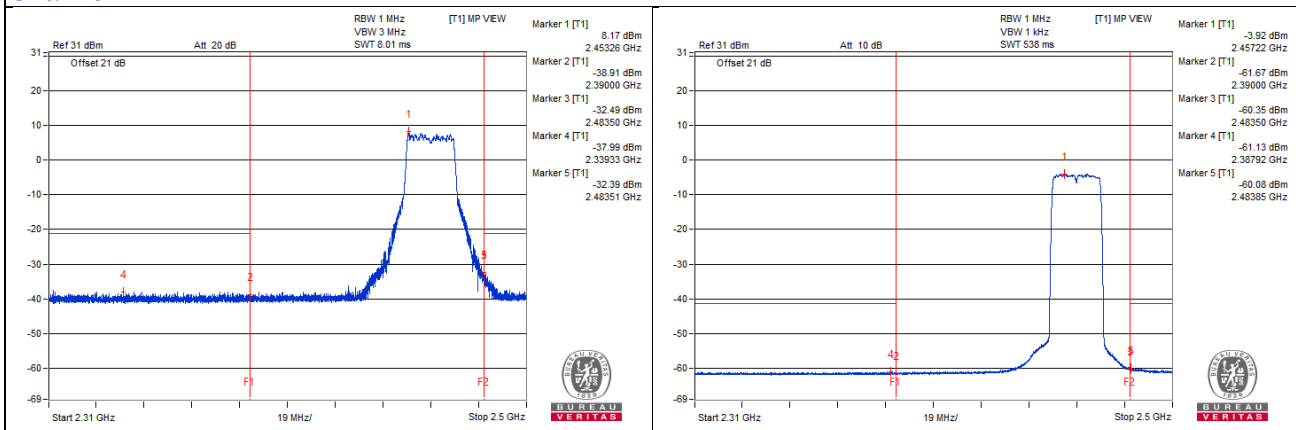

Chain 1

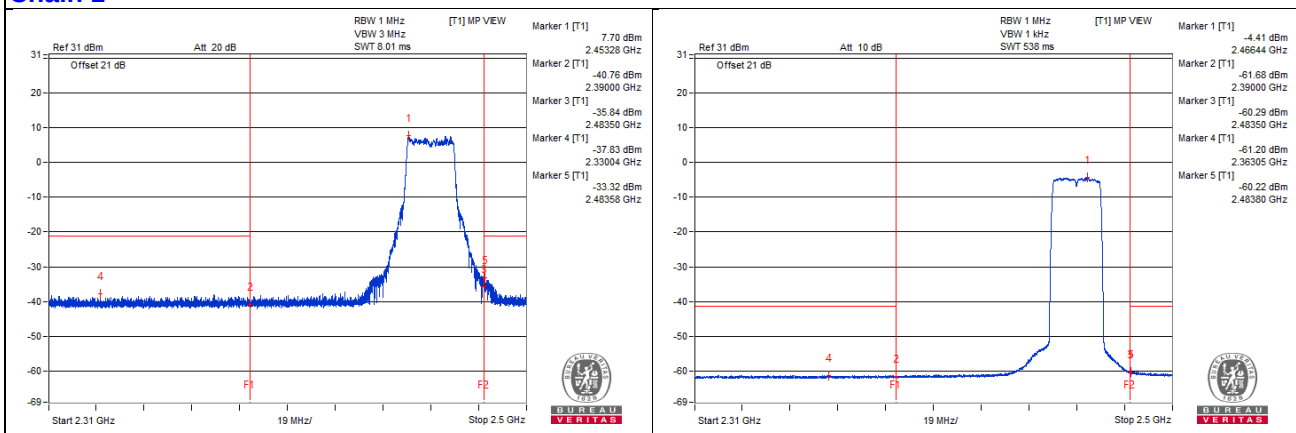

Channel 12

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4953.12 PK	67.05	74	-6.95	-37.34	-38.43	6.63	-28.21
2	4946.87 AV	45.63	54	-8.37	-59.4	-59.14	6.63	-49.63
3	7401.56 PK	66.99	74	-7.01	-37.54	-38.31	6.63	-28.27
4	7401.56 AV	44.93	54	-9.07	-60.02	-59.92	6.63	-50.33

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

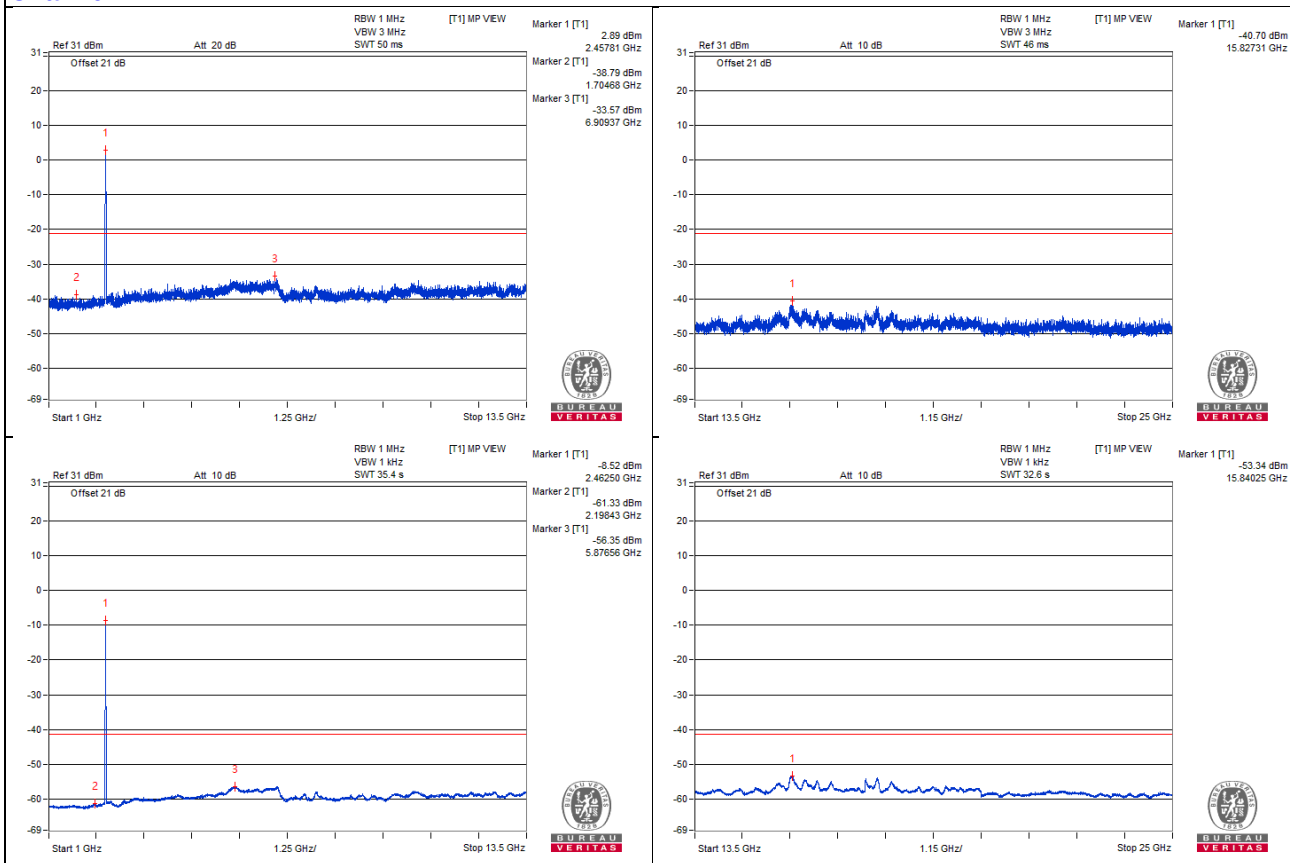

Chain 1

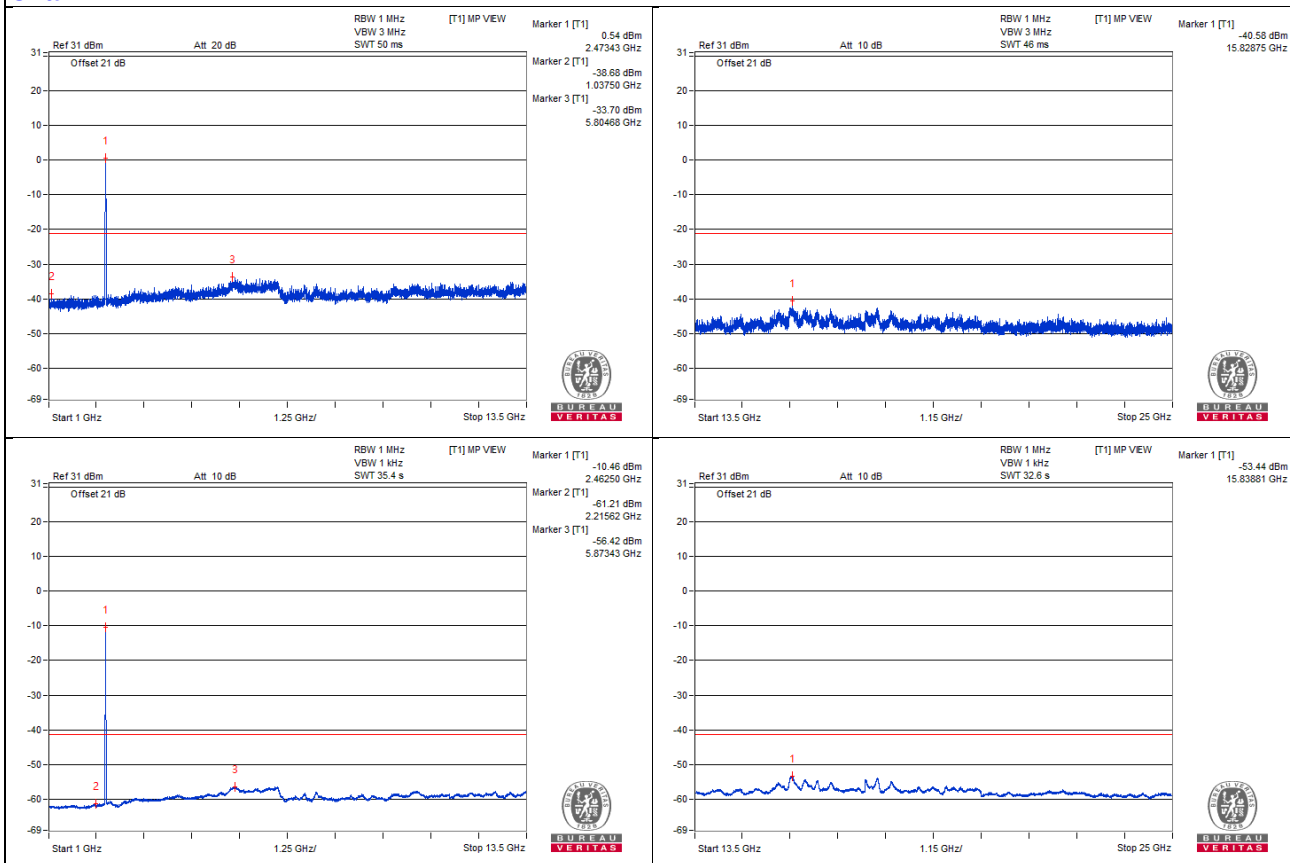

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.66 PK	71.51	74	-2.49	-33.86	-32.97	6.63	-23.75
2	2483.61 AV	44.97	54	-9.03	-60.07	-59.8	6.63	-50.29

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

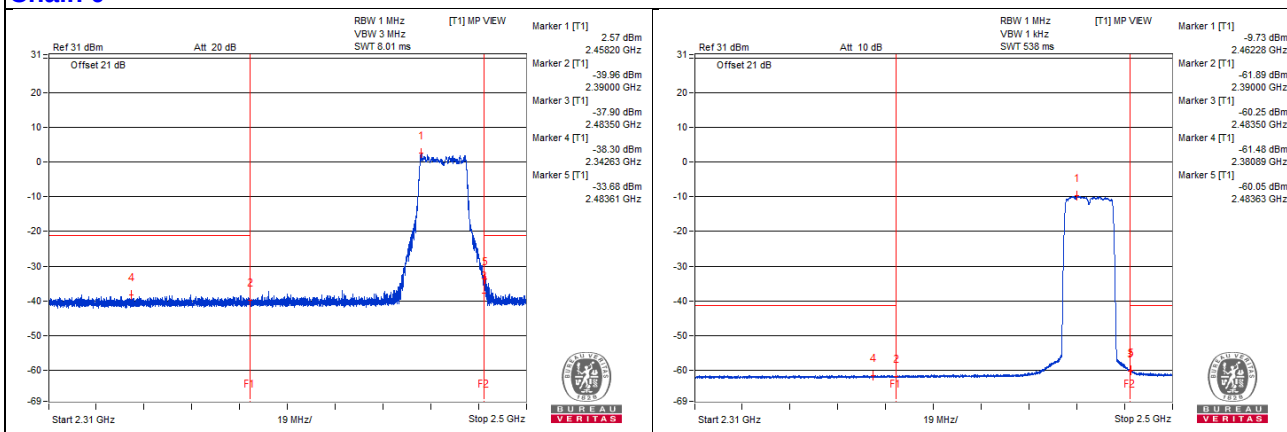

Chain 1

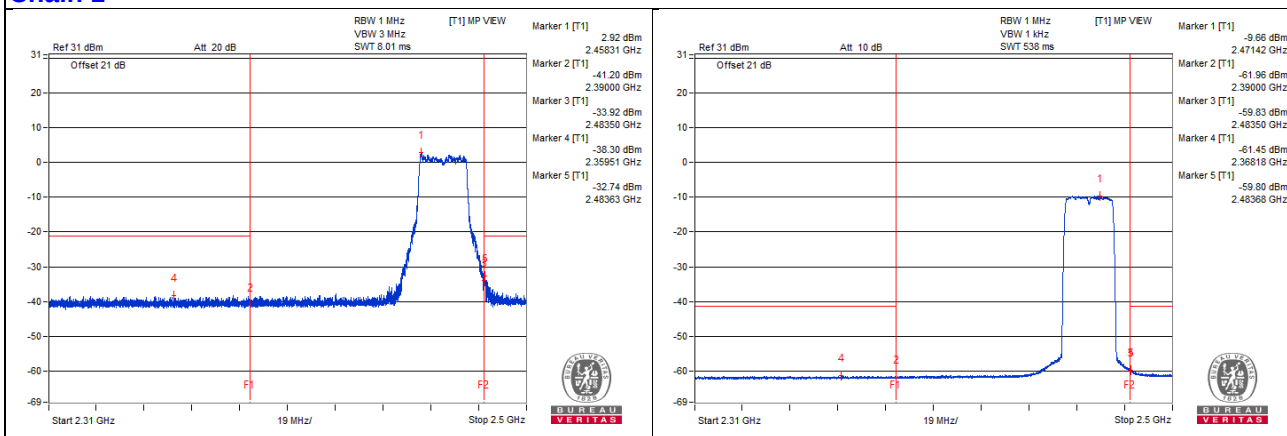

Channel 13

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4953.12 PK	67.38	74	-6.62	-38.47	-36.74	6.63	-27.88
2	4950 AV	45.59	54	-8.41	-59.17	-59.46	6.63	-49.67
3	7417.18 PK	66.31	74	-7.69	-39.24	-38.03	6.63	-28.95
4	7415.62 AV	45.33	54	-8.67	-59.53	-59.62	6.63	-49.93

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

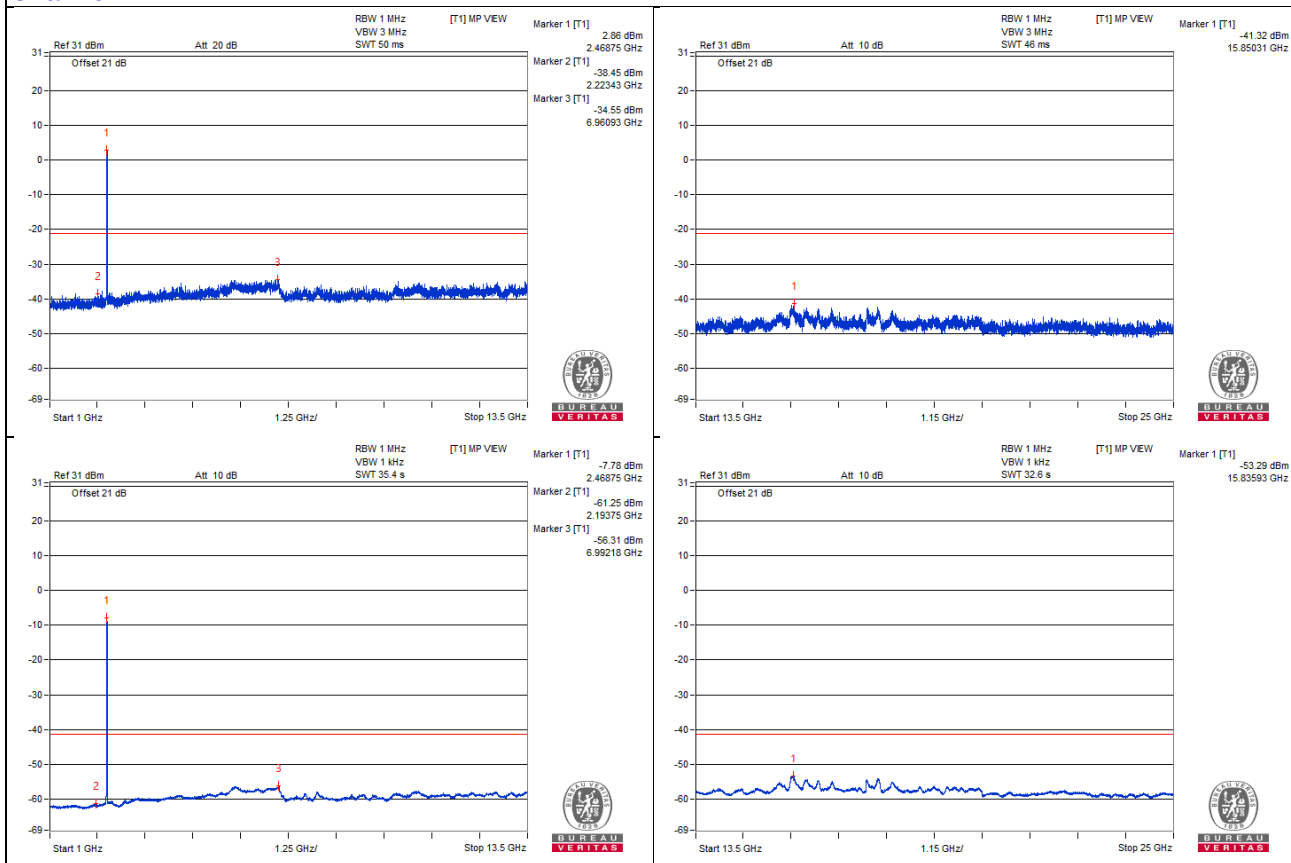

Chain 1

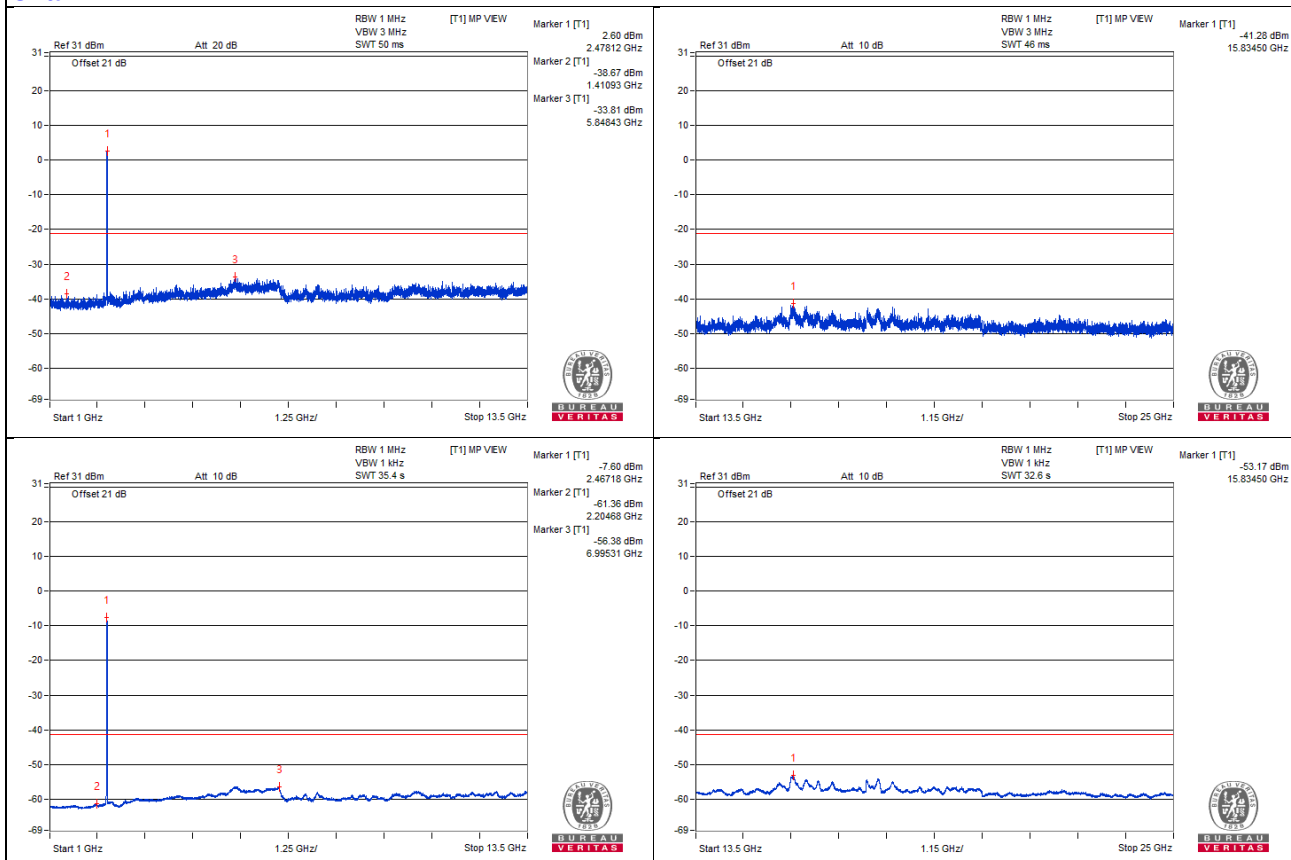

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.58 PK	78.62	74	* 4.62	-26.81	-25.81	6.63	-16.64
2	2483.58 AV	46.95	54	-7.05	-58.04	-57.87	6.63	-48.31


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

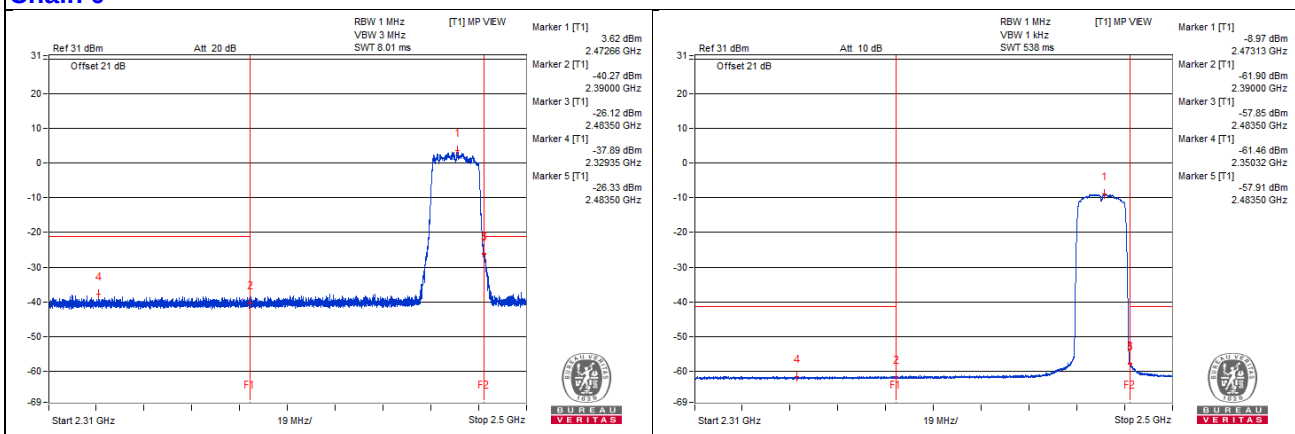

Chain 1

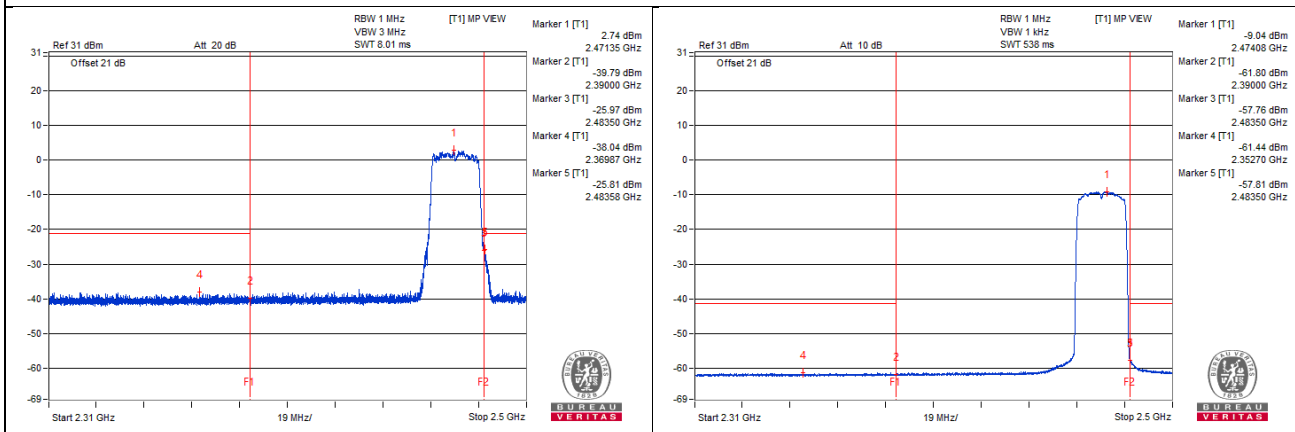

40MHz Preamble

RU484

Channel 3

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1614.06 PK	63.78	74	-10.22	-40.94	-41.31	6.63	-31.48
2	1615.62 AV	43.37	54	-10.63	-61.63	-61.44	6.63	-51.89
3	4831.25 PK	67.08	74	-6.92	-38.56	-37.18	6.63	-28.18
4	4845.31 AV	46.09	54	-7.91	-58.61	-59.02	6.63	-49.17
5	7267.18 PK	65.7	74	-8.3	-39.17	-39.24	6.63	-29.56
6	7265.62 AV	45.42	54	-8.58	-59.65	-59.31	6.63	-49.84

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

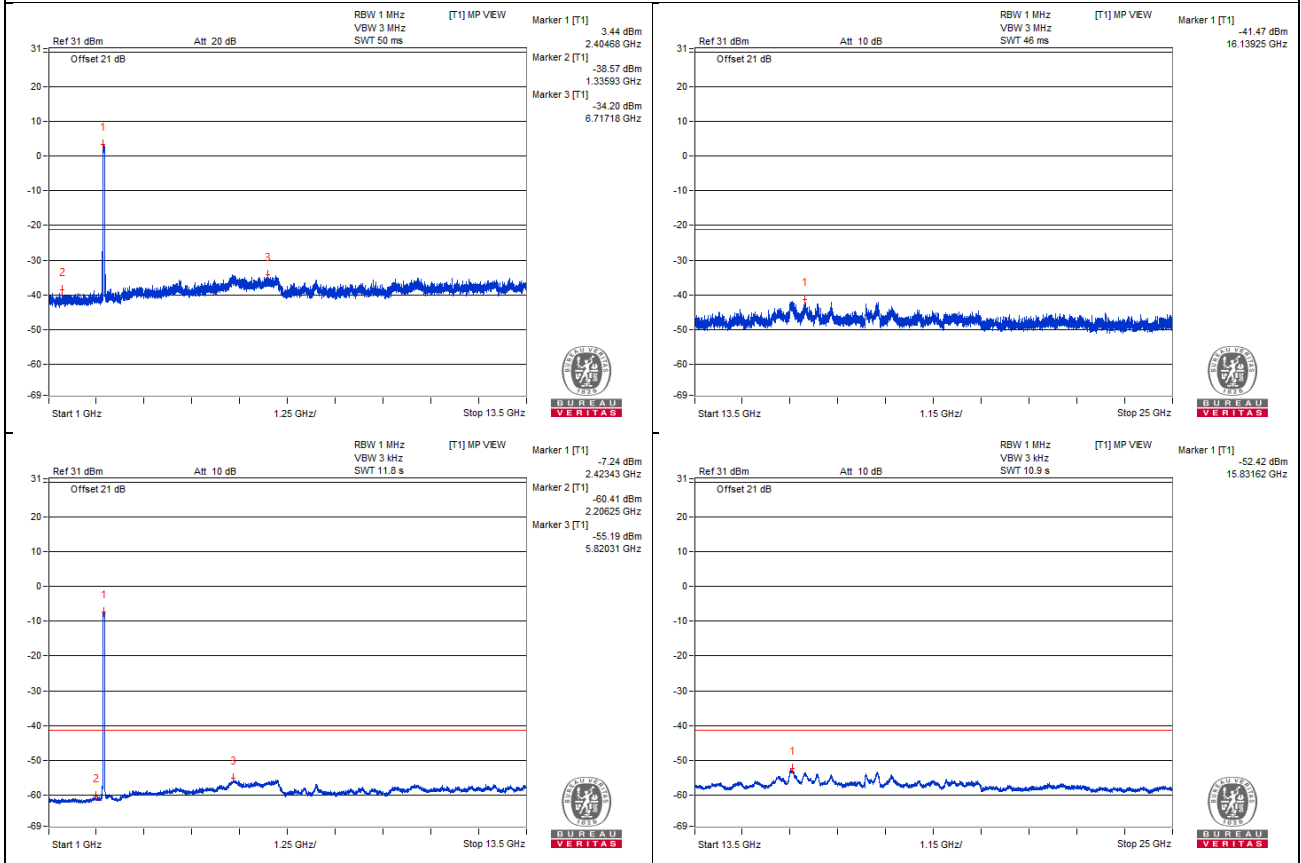

Chain 1

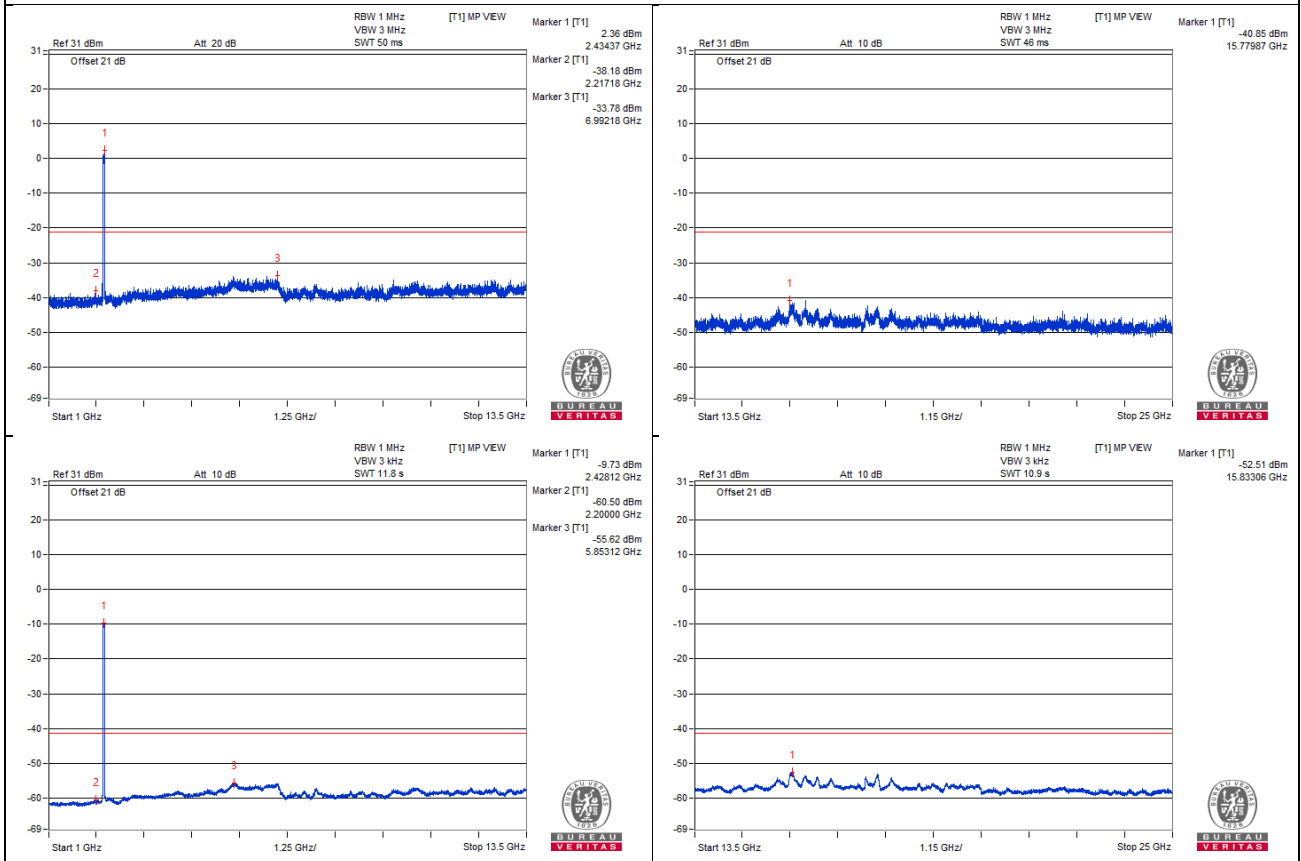

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.56 PK	71.65	74	-2.35	-33.03	-33.49	6.63	-23.61
2	2389.87 AV	48.04	54	-5.96	-57.94	-55.99	6.63	-47.22

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

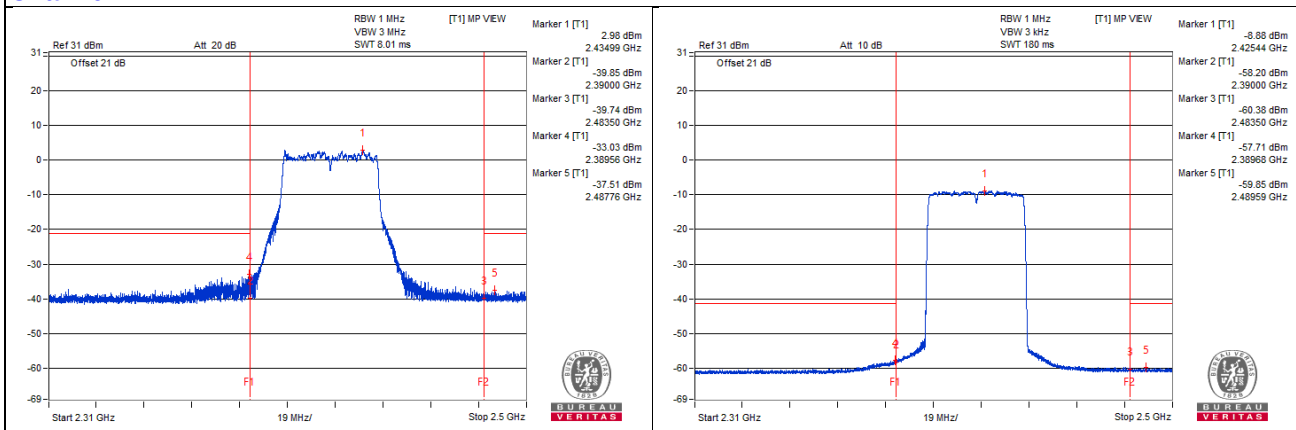

Chain 1

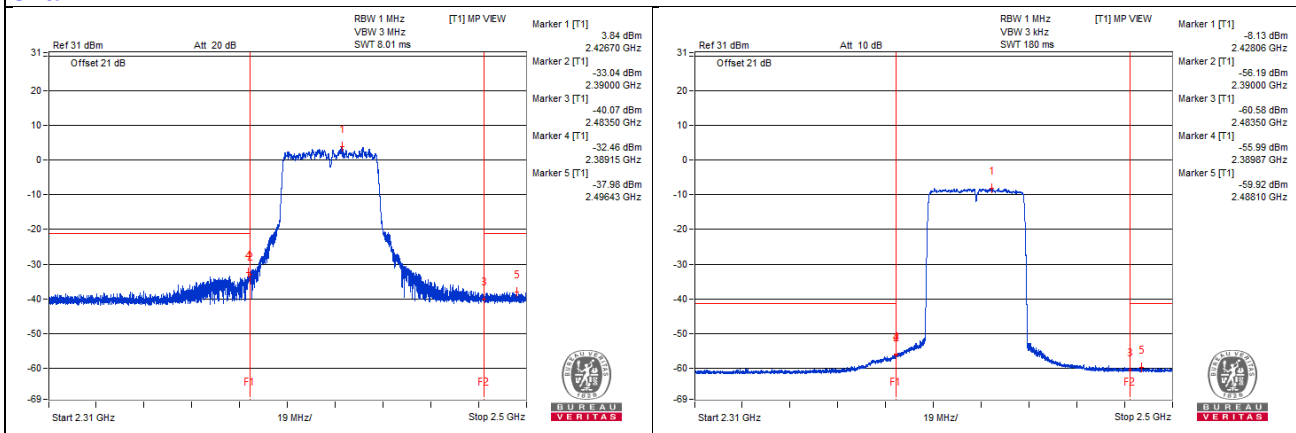

Channel 4

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1618.75 PK	63.85	74	-10.15	-41.35	-40.77	6.63	-31.41
2	1617.18 AV	43.49	54	-10.51	-61.13	-61.71	6.63	-51.77
3	4843.75 PK	66.88	74	-7.12	-38.51	-37.58	6.63	-28.38
4	4865.62 AV	46.1	54	-7.9	-58.78	-58.83	6.63	-49.16
5	7281.25 PK	65.21	74	-8.79	-39.63	-39.76	6.63	-30.05
6	7281.25 AV	45.12	54	-8.88	-59.88	-59.68	6.63	-50.14

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

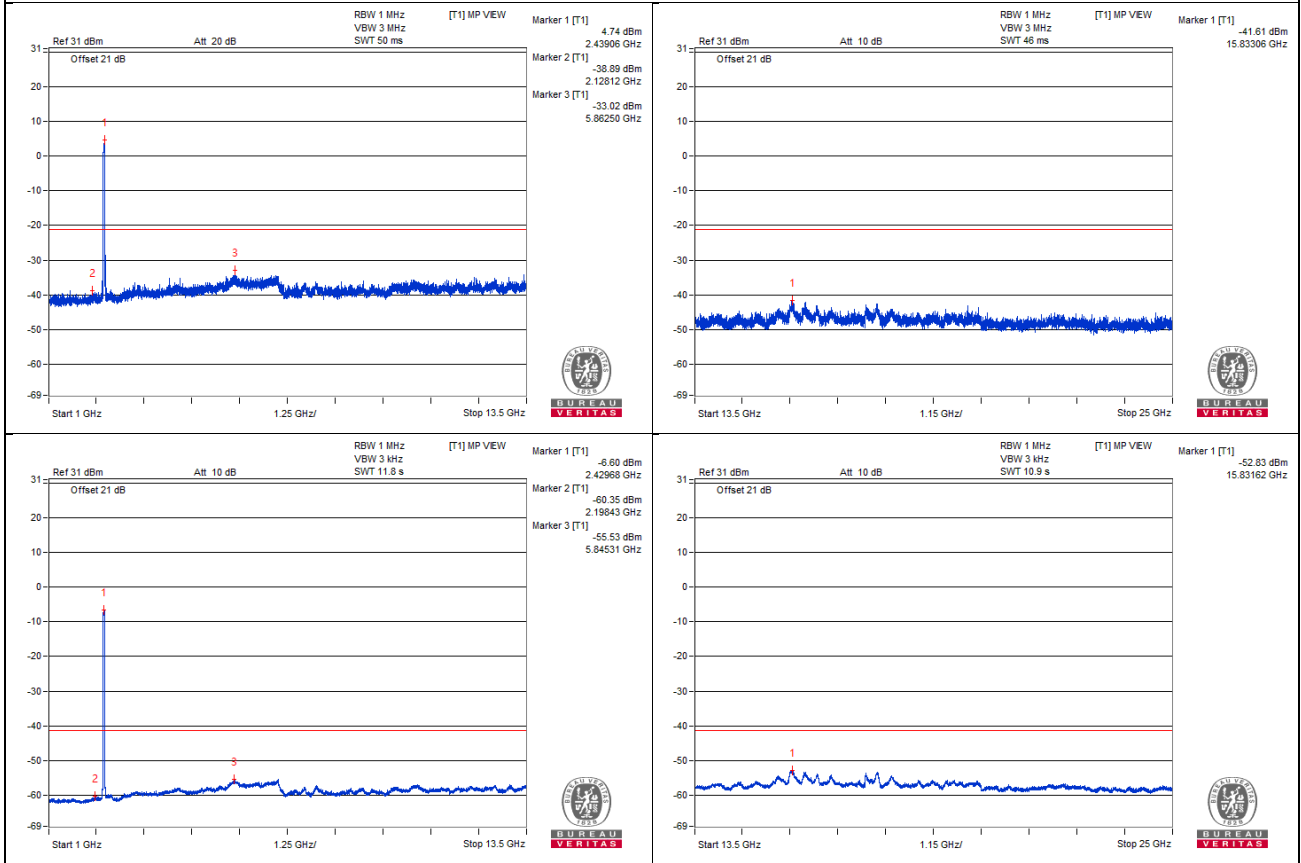

Chain 1

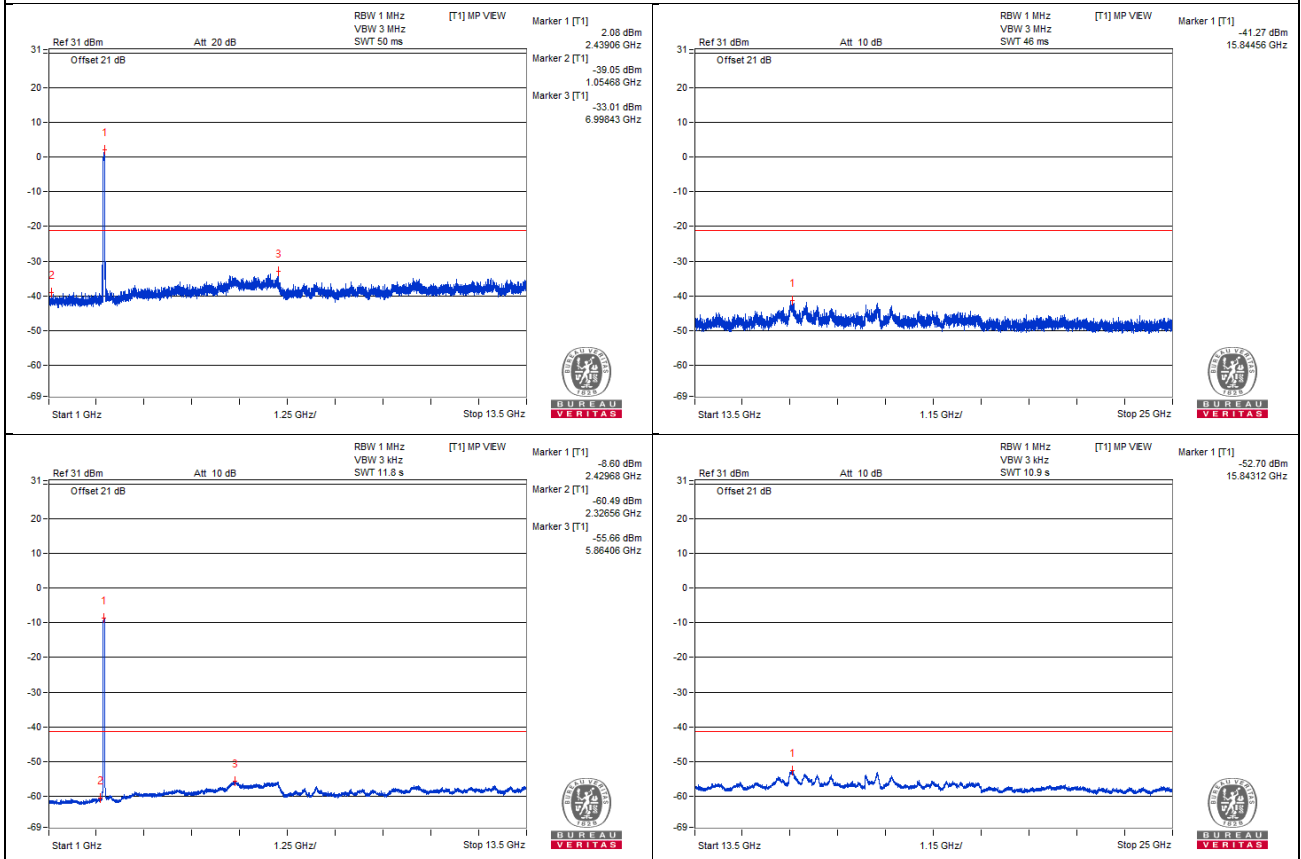

Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2386.19 PK	71.55	74	-2.45	-31.95	-35.43	6.63	-23.71
2	2388.8 AV	46.91	54	-7.09	-58.86	-57.27	6.63	-48.35

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

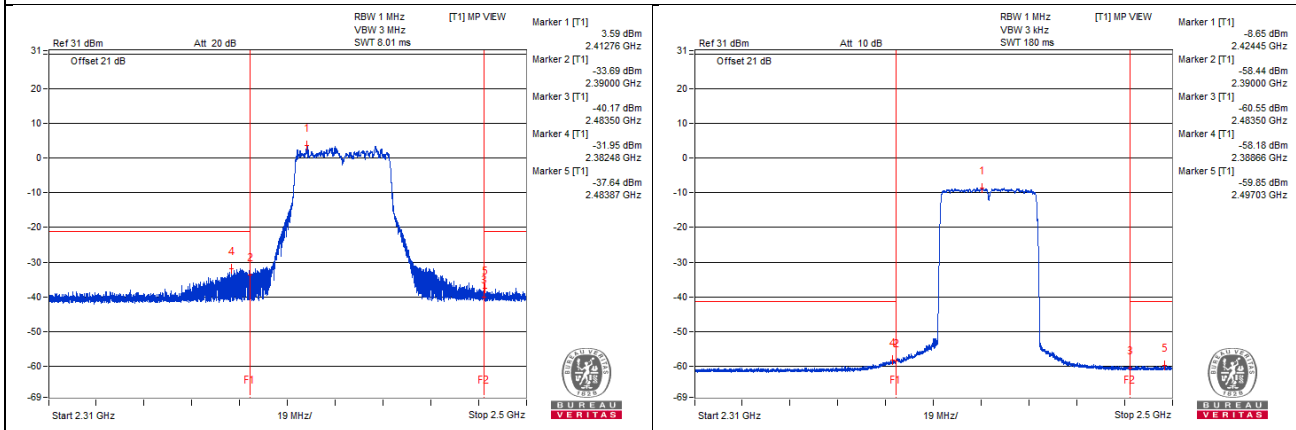

Chain 1

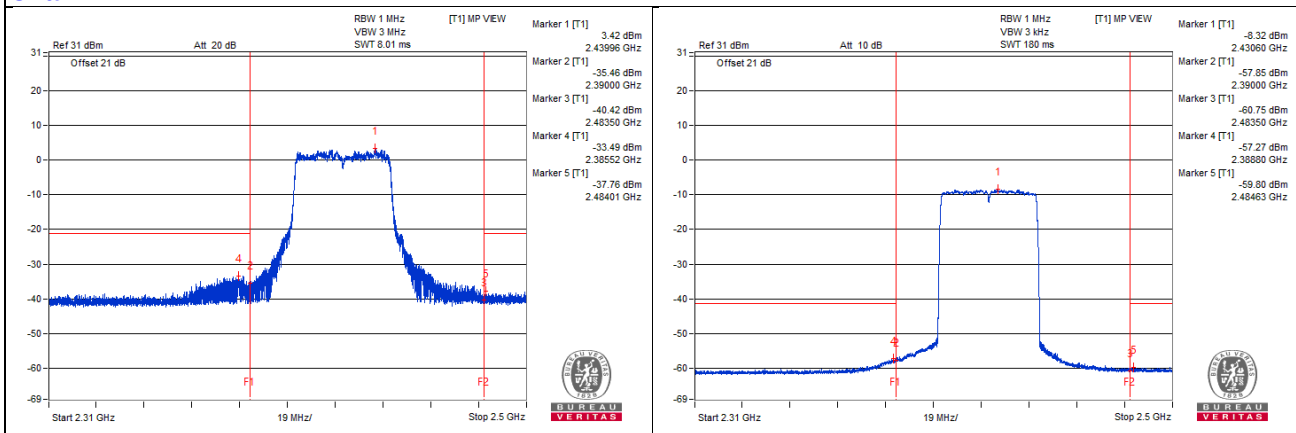

Channel 6

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1623.43 PK	64.52	74	-9.48	-39.33	-41.77	6.63	-30.74
2	1625 AV	43.37	54	-10.63	-61.16	-61.94	6.63	-51.89
3	4857.81 PK	66.89	74	-7.11	-37.21	-38.99	6.63	-28.37
4	4871.87 AV	46.04	54	-7.96	-58.71	-59.02	6.63	-49.22
5	7310.93 PK	66.55	74	-7.45	-38.75	-37.98	6.63	-28.71
6	7312.5 AV	45.77	54	-8.23	-59.28	-58.98	6.63	-49.49

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

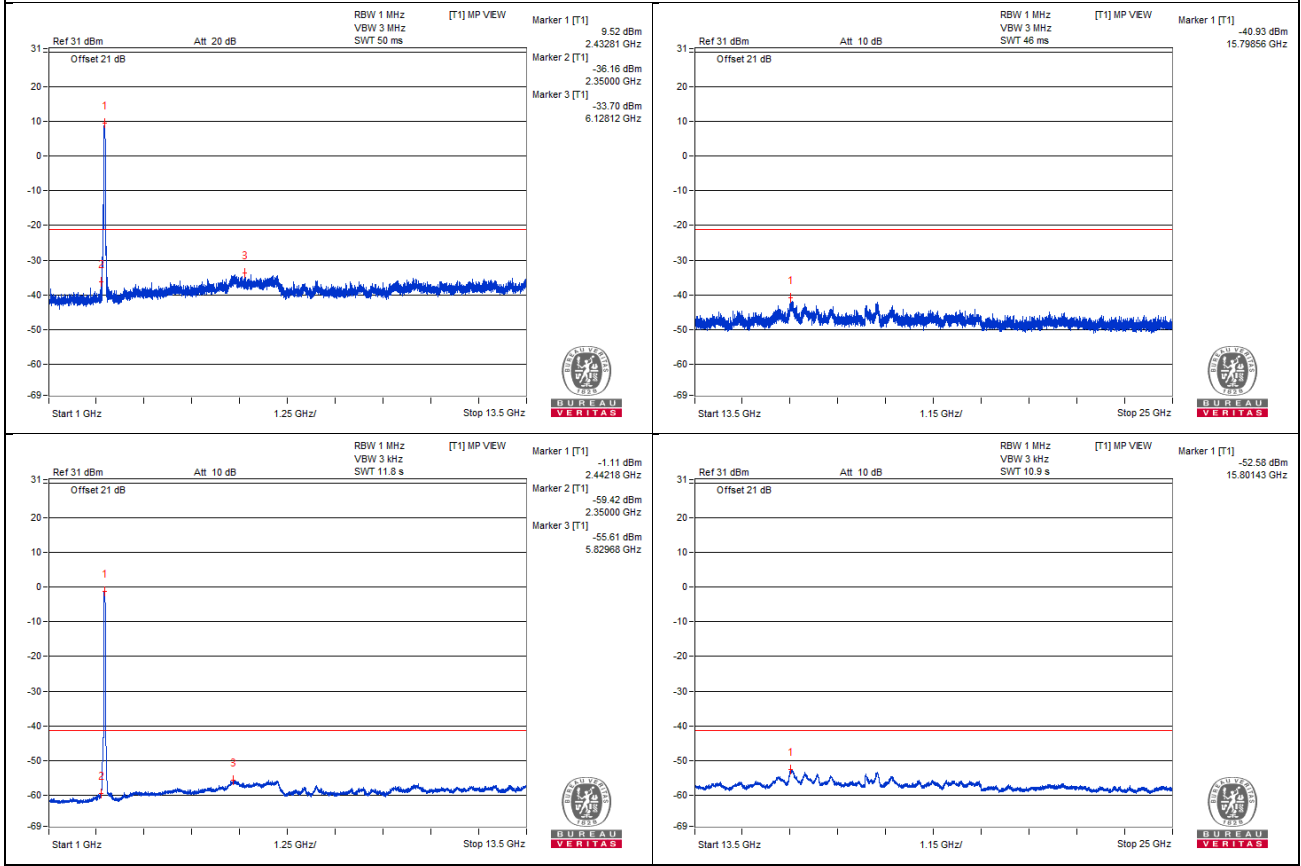

Chain 1

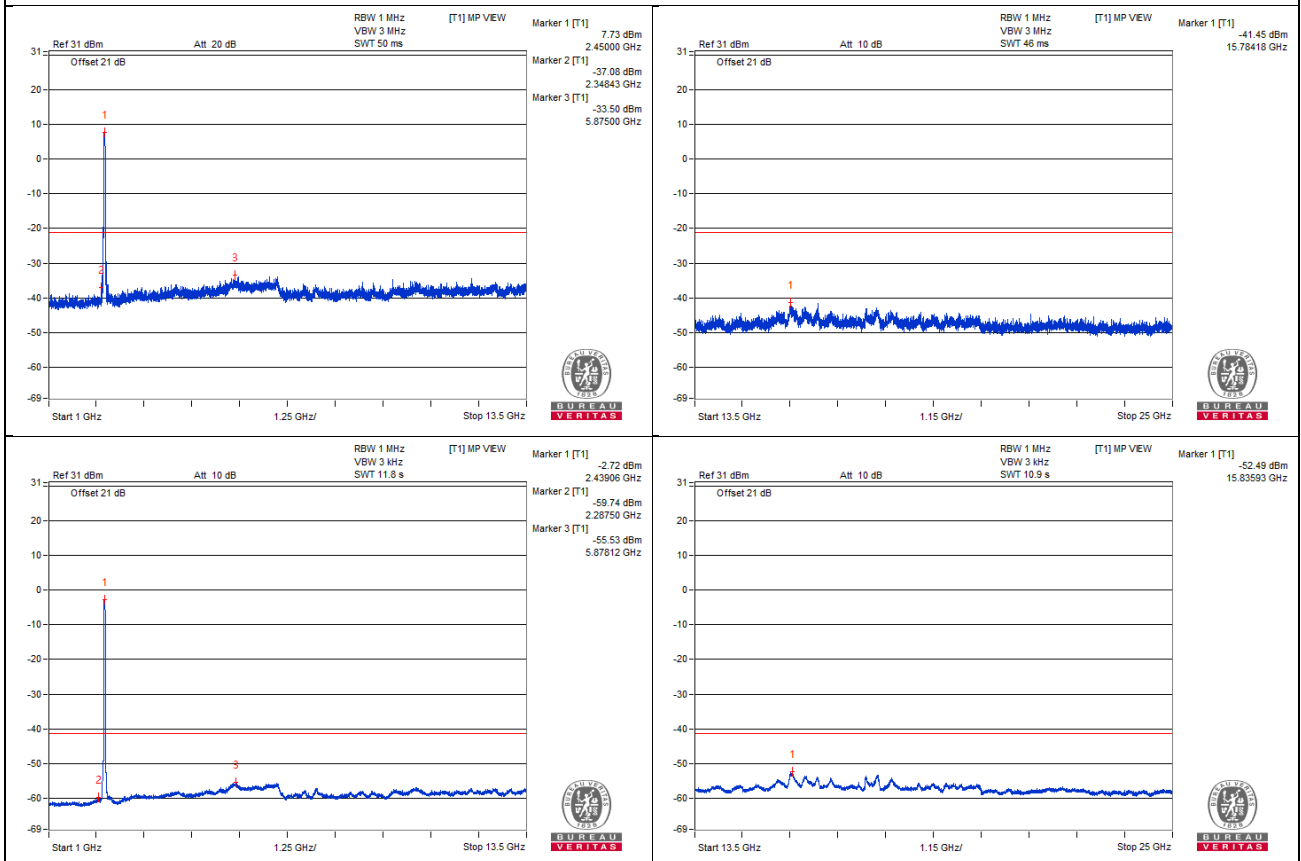

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2485.03 PK	78.46	74	* 4.46	-26.26	-26.62	6.63	-16.8
2	2483.58 AV	52.37	54	-1.63	-51.97	-53.18	6.63	-42.89
3	2389.27 PK	76.8	74	* 2.8	-27.51	-28.79	6.63	-18.46
4	2388.8 AV	52.95	54	-1.05	-51.89	-52.01	6.63	-42.31


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

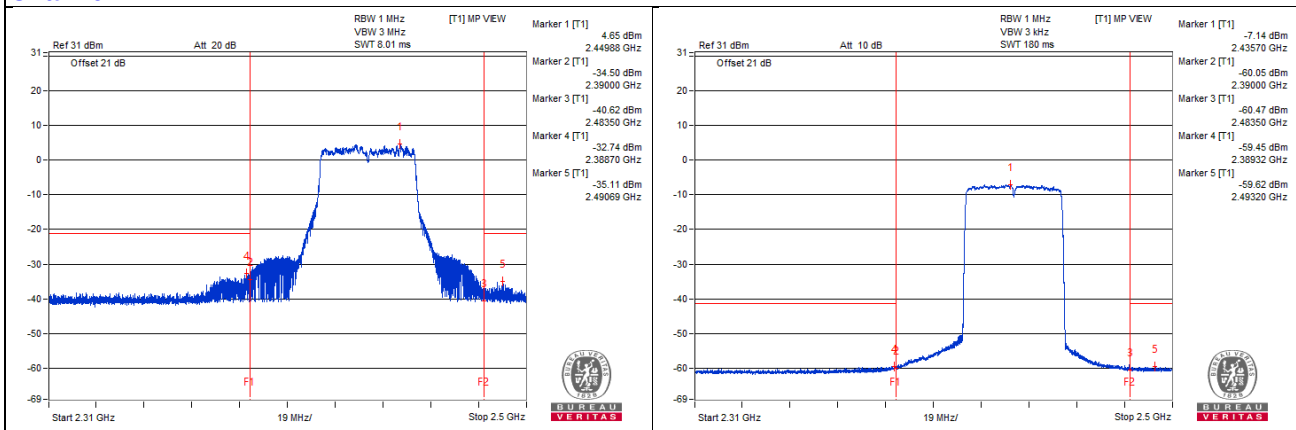

Chain 1

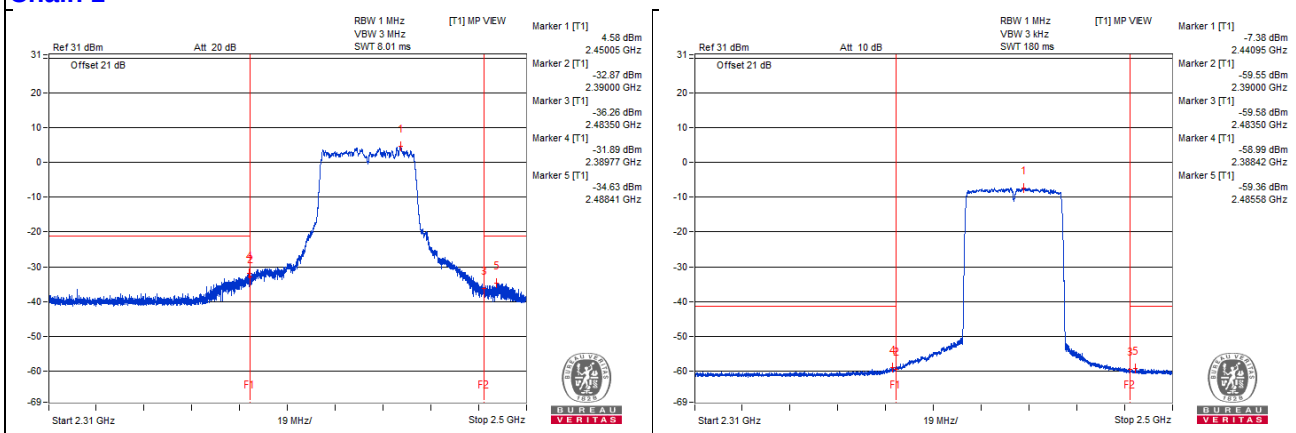

Channel 8

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3262.5 PK	66.08	74	-7.92	-38.38	-39.31	6.63	-29.18
2	3264.06 AV	45.57	54	-8.43	-59.49	-59.18	6.63	-49.69
3	4910.93 PK	66.82	74	-7.18	-39.8	-36.85	6.63	-28.44
4	4910.93 AV	46.16	54	-7.84	-58.69	-58.79	6.63	-49.1
5	7340.62 PK	65.5	74	-8.5	-39.78	-39.06	6.63	-29.76
6	7340.62 AV	45.64	54	-8.36	-59.06	-59.46	6.63	-49.62

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

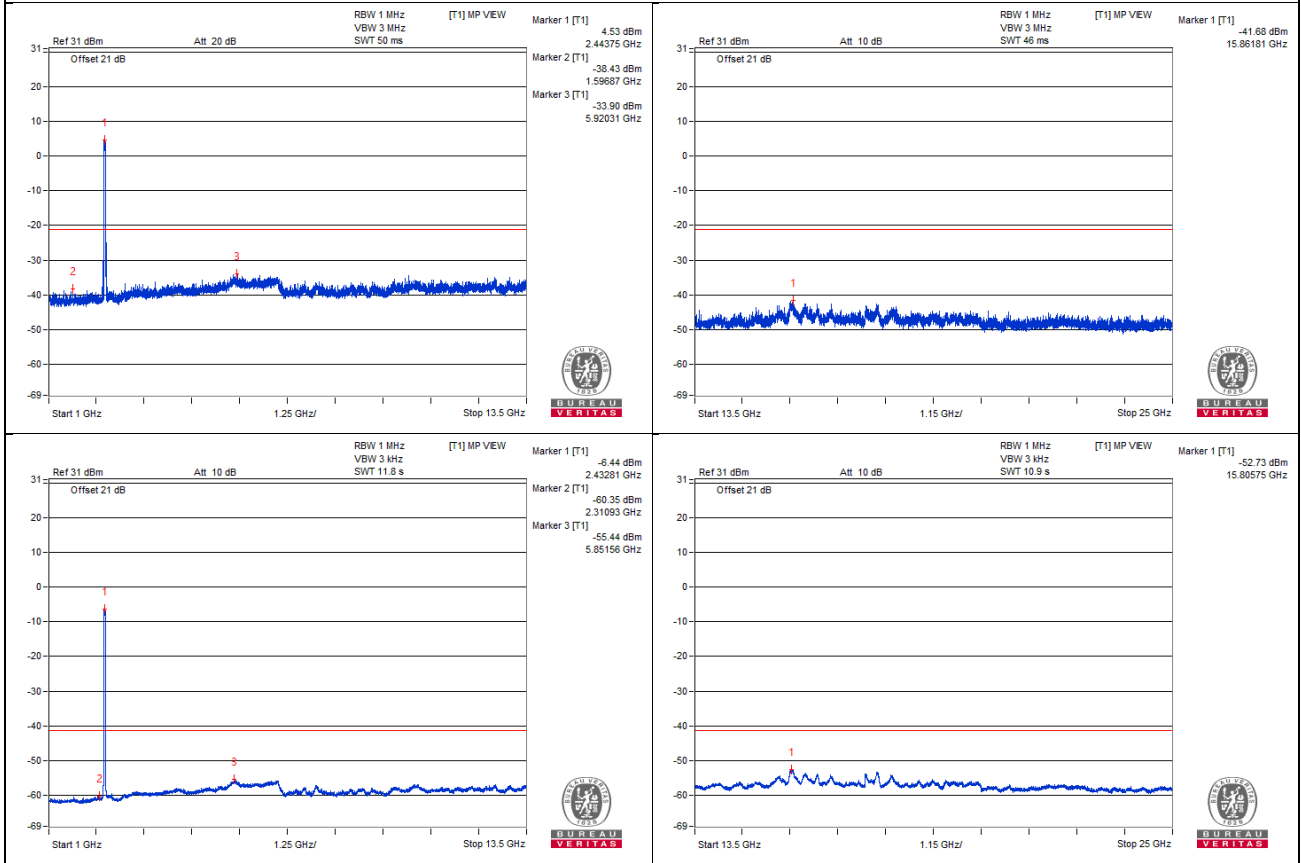

Chain 1

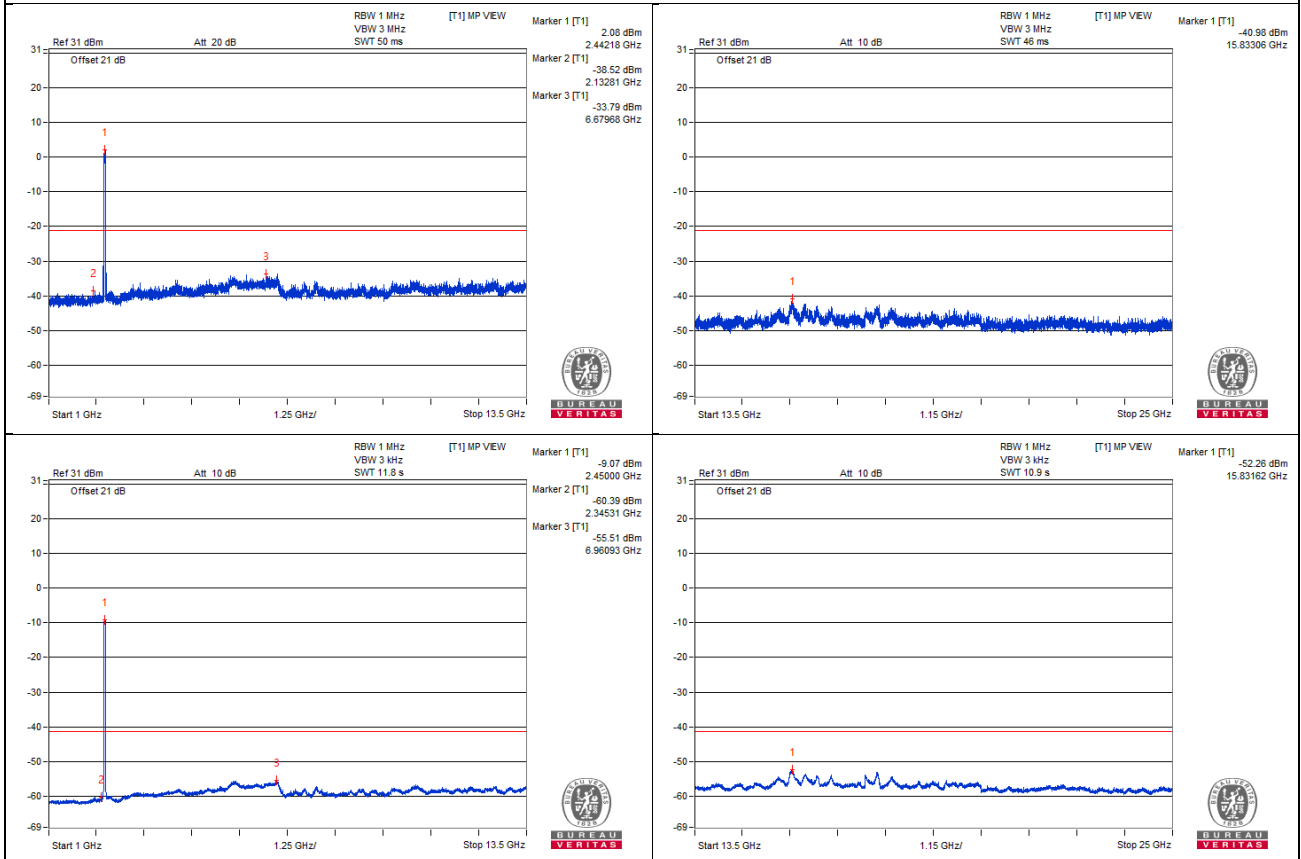

Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.56 PK	71.01	74	-2.99	-33.94	-33.85	6.63	-24.25
2	2484.68 AV	45.32	54	-8.68	-60.05	-59.16	6.63	-49.94

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

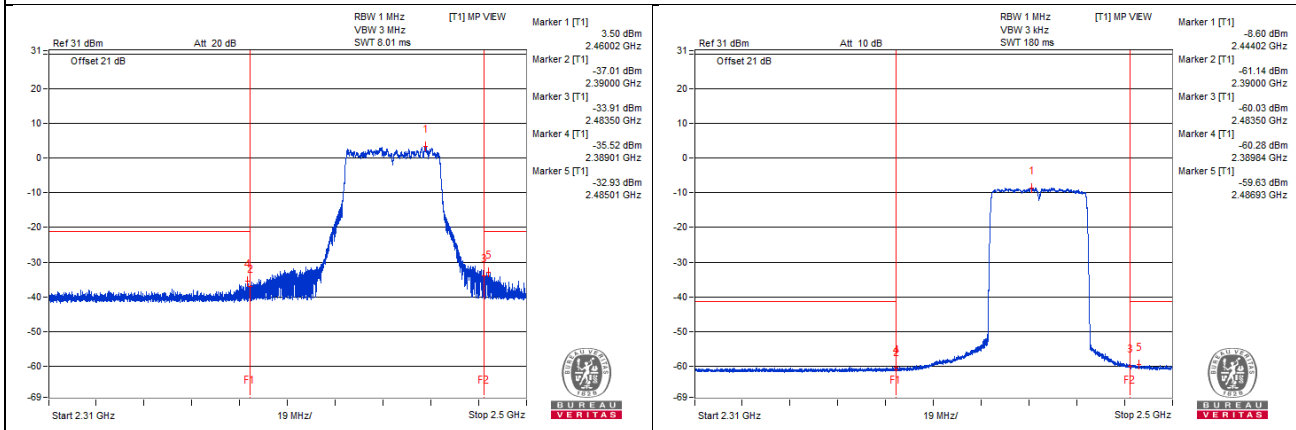

Chain 1

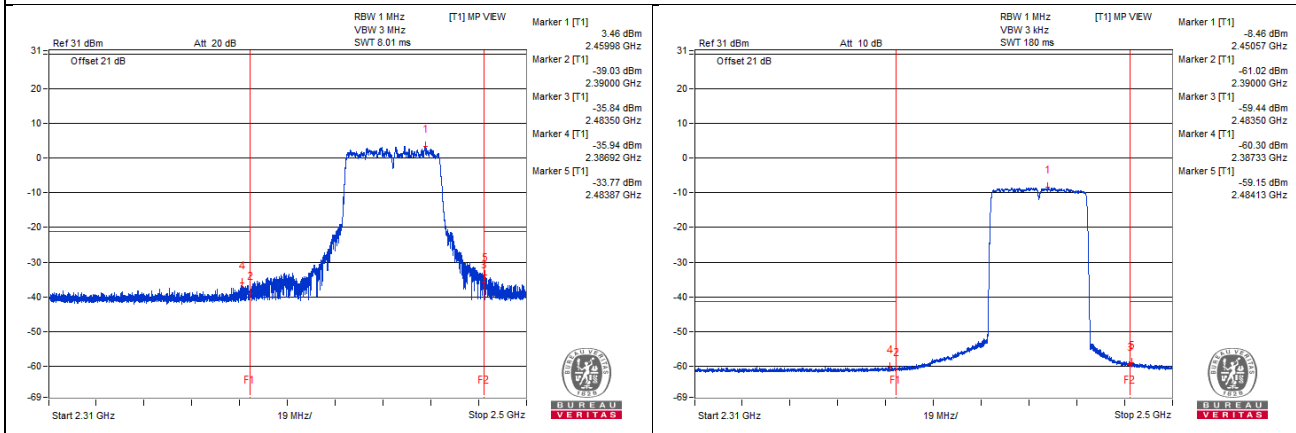

Channel 9

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4904.68 PK	67.03	74	-6.97	-38.54	-37.29	6.63	-28.23
2	4893.75 AV	46.27	54	-7.73	-58.91	-58.36	6.63	-48.99
3	7354.68 PK	65.53	74	-8.47	-39.98	-38.84	6.63	-29.73
4	7356.25 AV	45.47	54	-8.53	-59.39	-59.47	6.63	-49.79

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

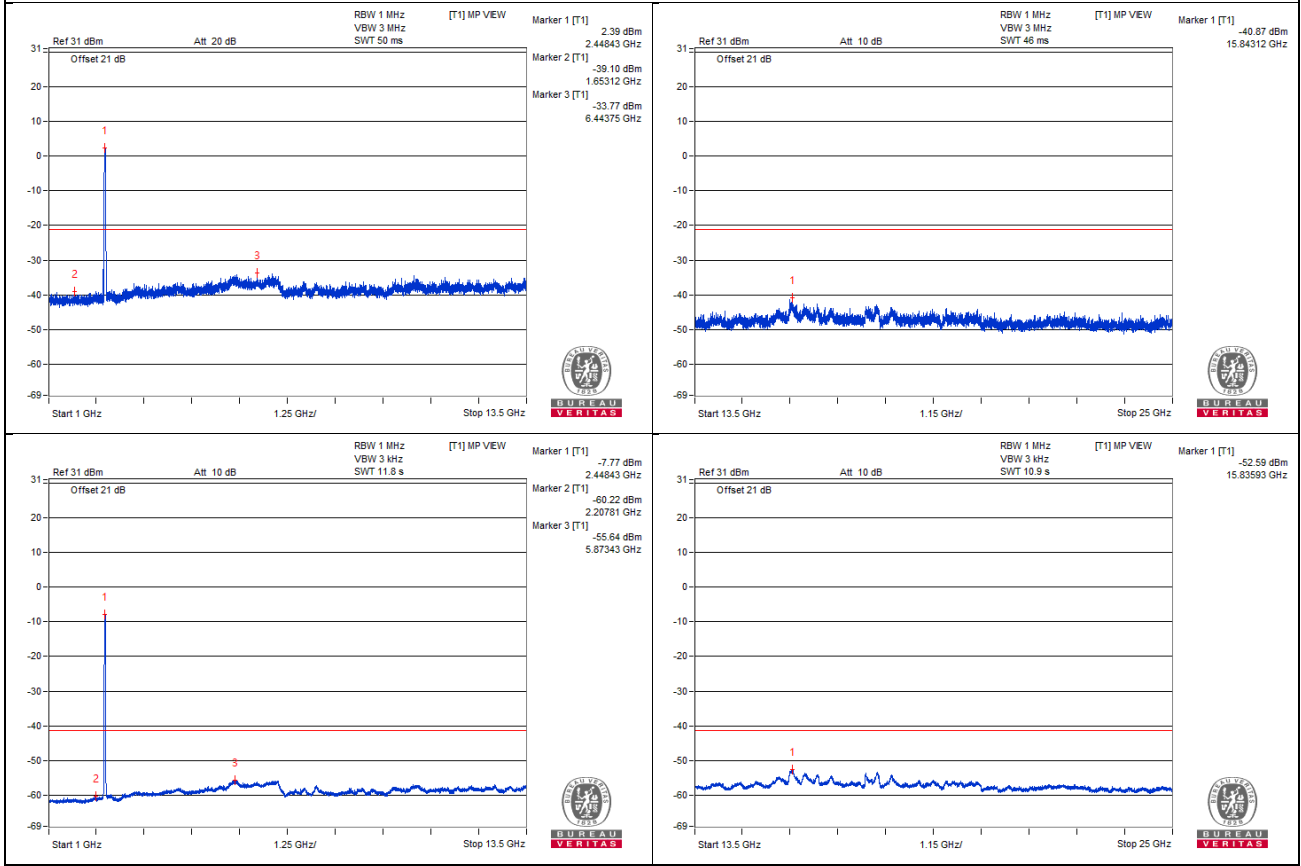

Chain 1

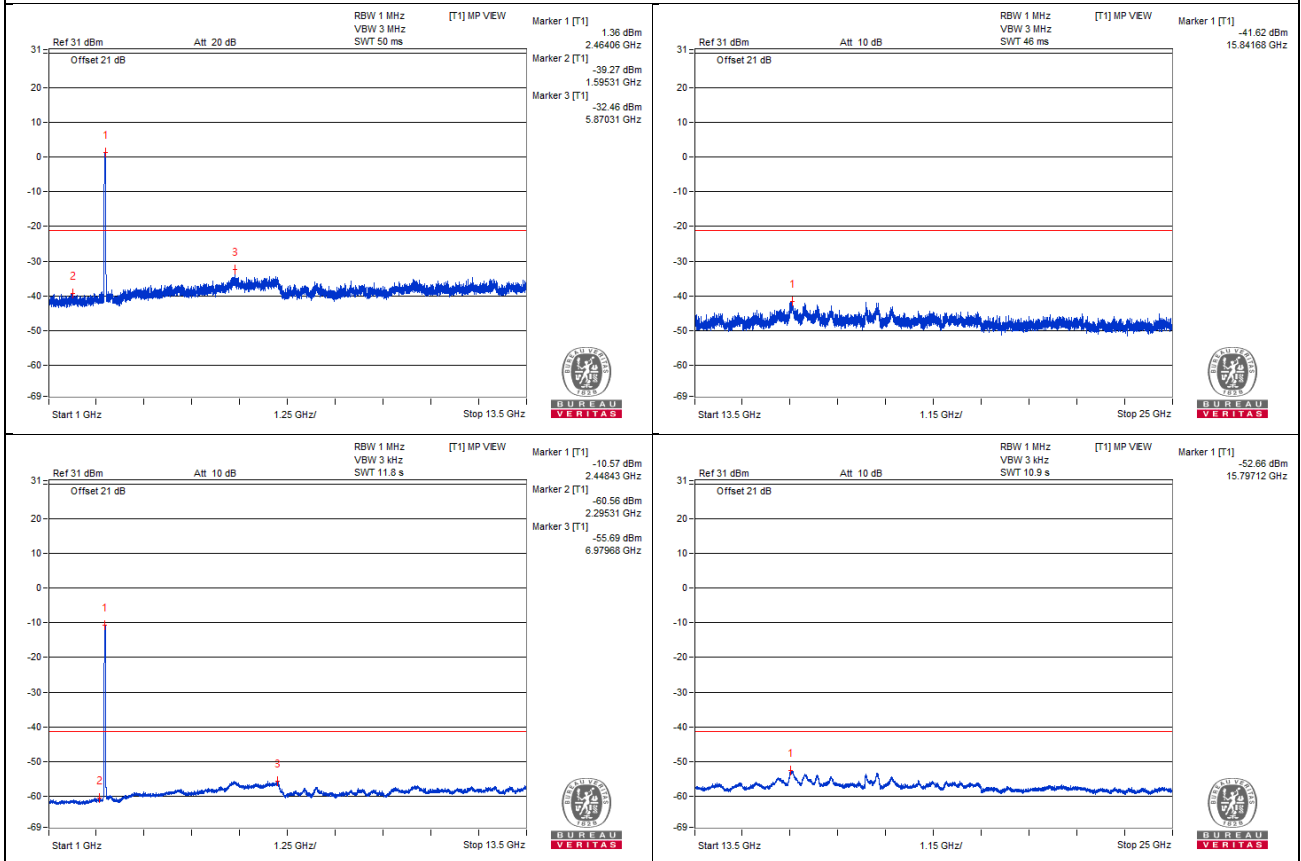

Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2484.3 PK	71.56	74	-2.44	-33.37	-33.31	6.63	-23.7
2	2483.56 AV	45.9	54	-8.1	-59.27	-58.74	6.63	-49.36

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

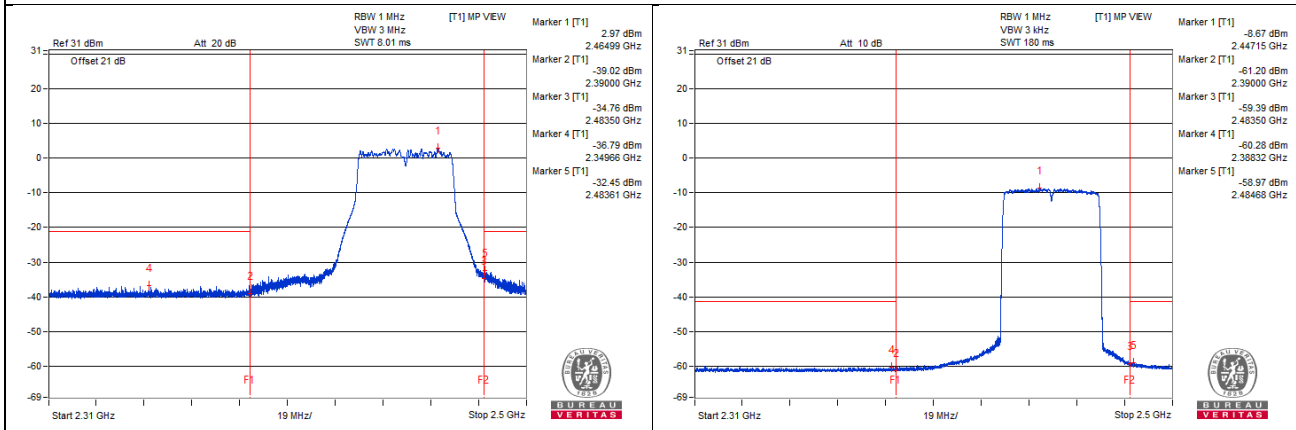

Chain 1

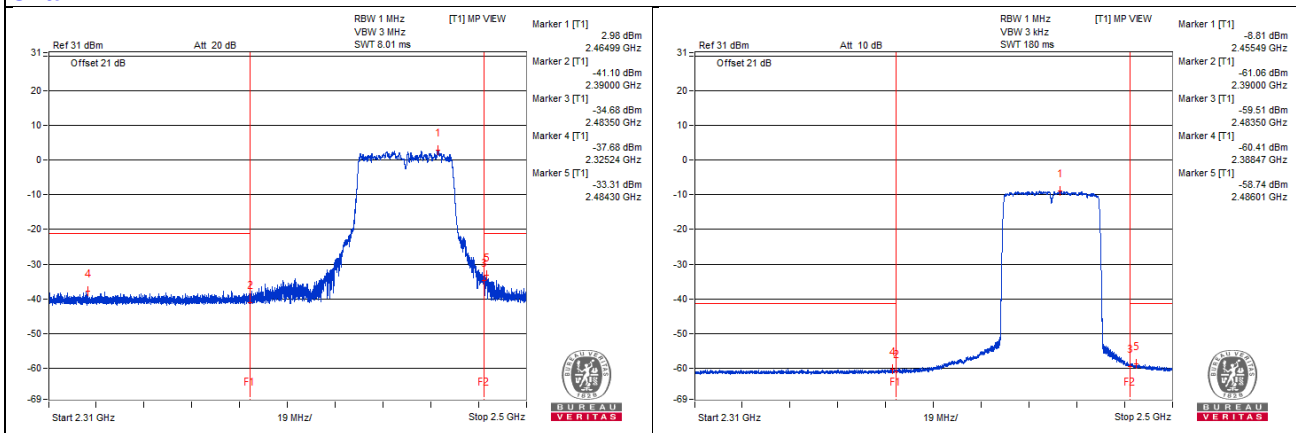

Channel 10

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4921.87 PK	67.08	74	-6.92	-37.24	-38.48	6.63	-28.18
2	4912.5 AV	46.19	54	-7.81	-58.42	-59.02	6.63	-49.07
3	7371.87 PK	65.62	74	-8.38	-39.56	-39.02	6.63	-29.64
4	7371.87 AV	45.62	54	-8.38	-59.53	-59.05	6.63	-49.64

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

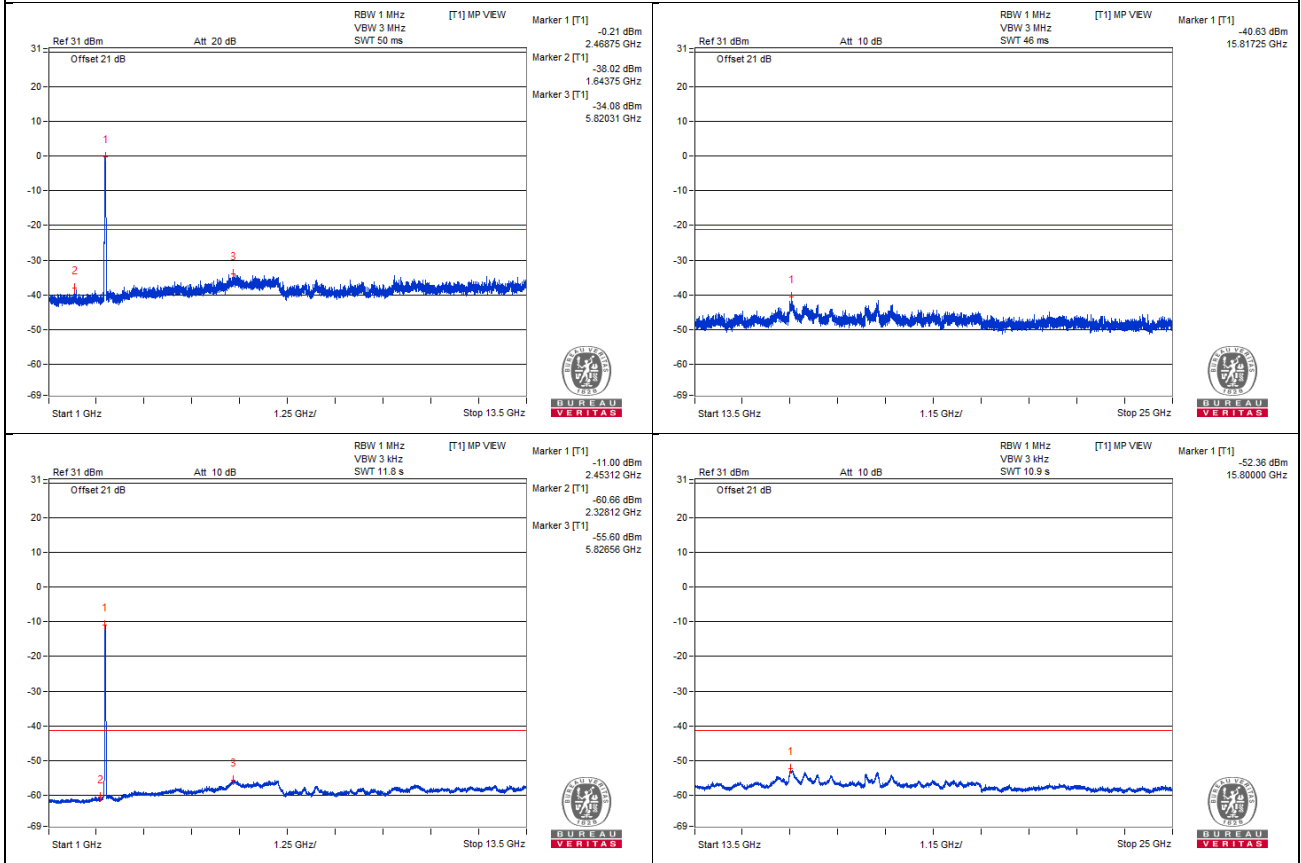

Chain 1

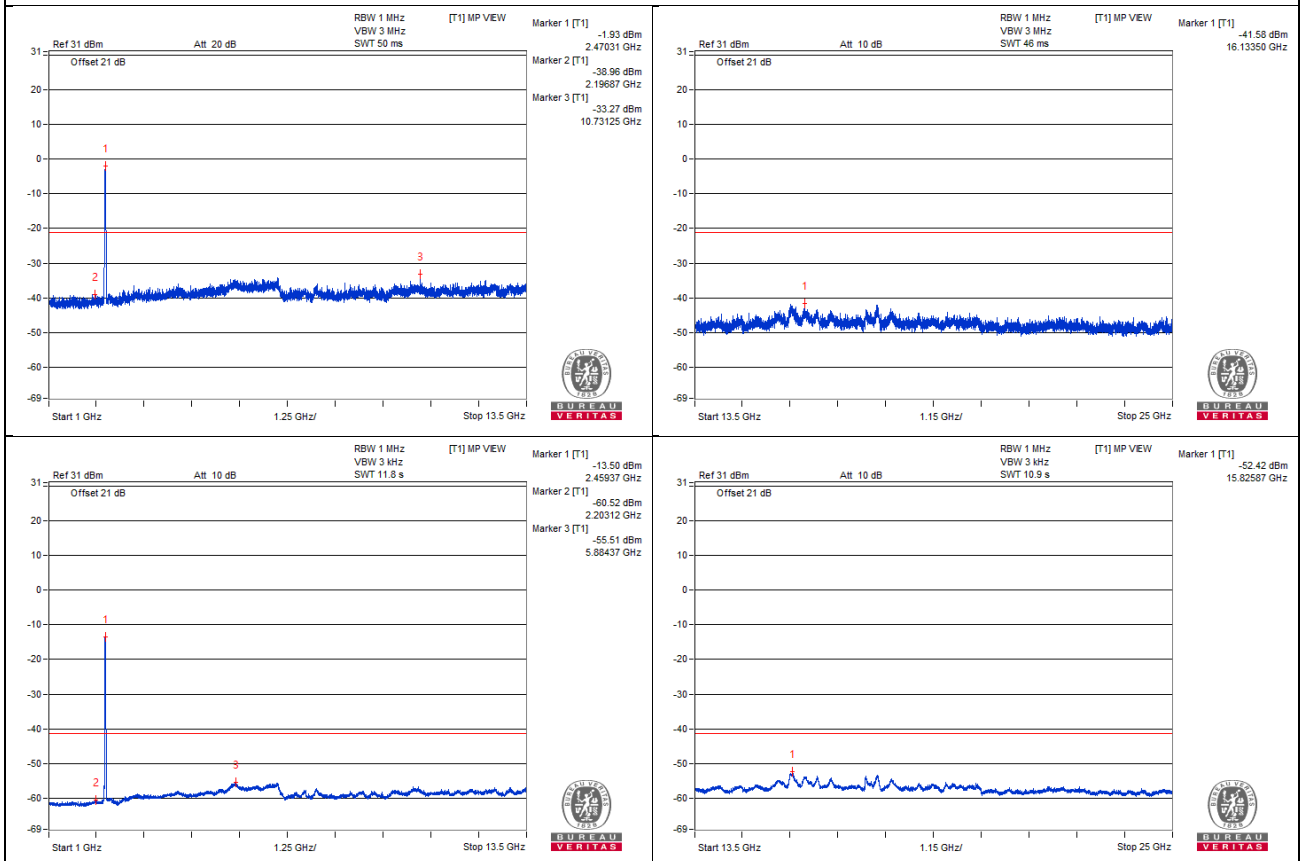

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.51 PK	71.77	74	-2.23	-32.16	-34.39	6.63	-23.49
2	2484.01 AV	47.04	54	-6.96	-58.18	-57.56	6.63	-48.22

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

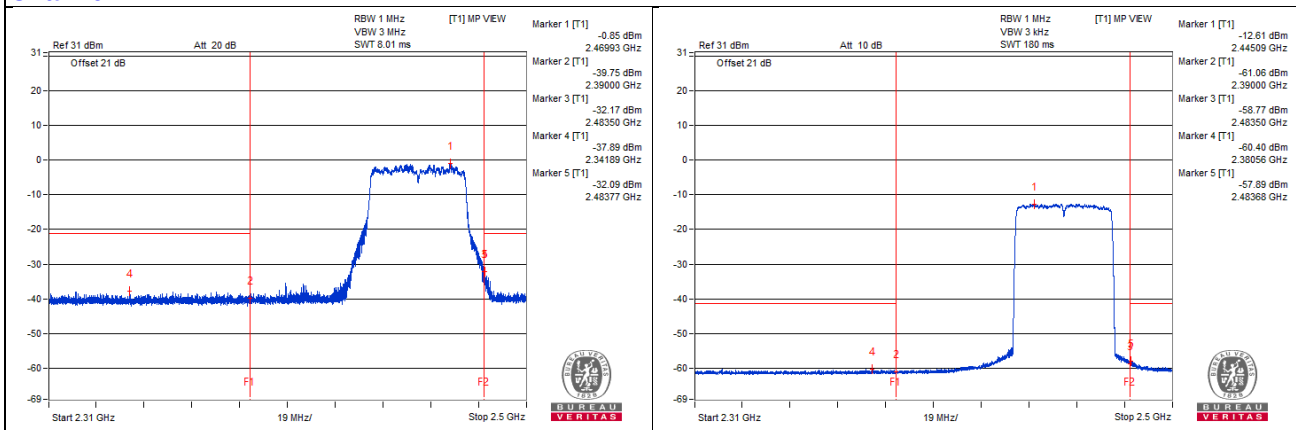

Chain 1

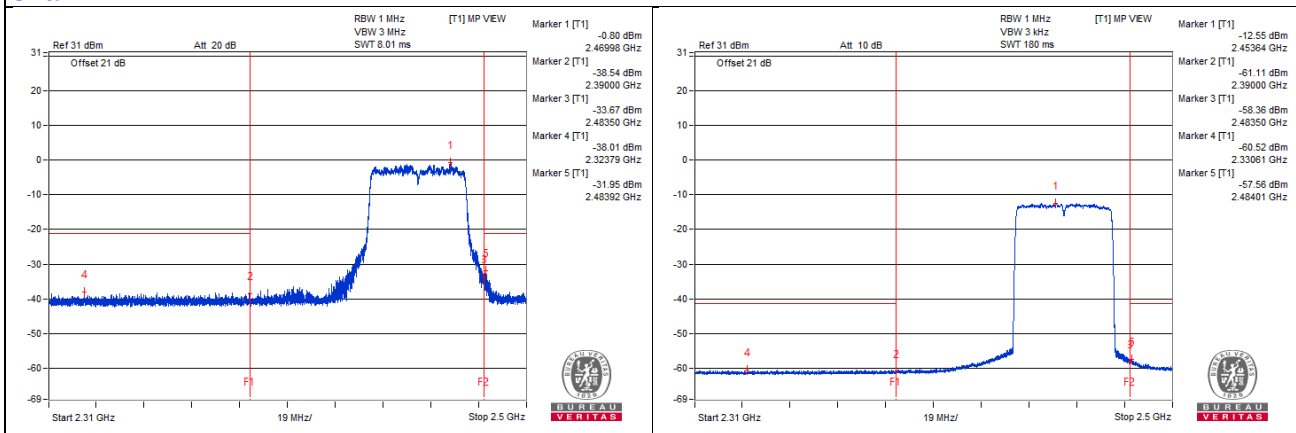

Channel 11

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4920.31 PK	67.54	74	-6.46	-39.71	-35.84	6.63	-27.72
2	4942.18 AV	46.51	54	-7.49	-58.6	-58.19	6.63	-48.75
3	7387.5 PK	65.75	74	-8.25	-38.71	-39.64	6.63	-29.51
4	7387.5 AV	45.41	54	-8.59	-59.48	-59.5	6.63	-49.85

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

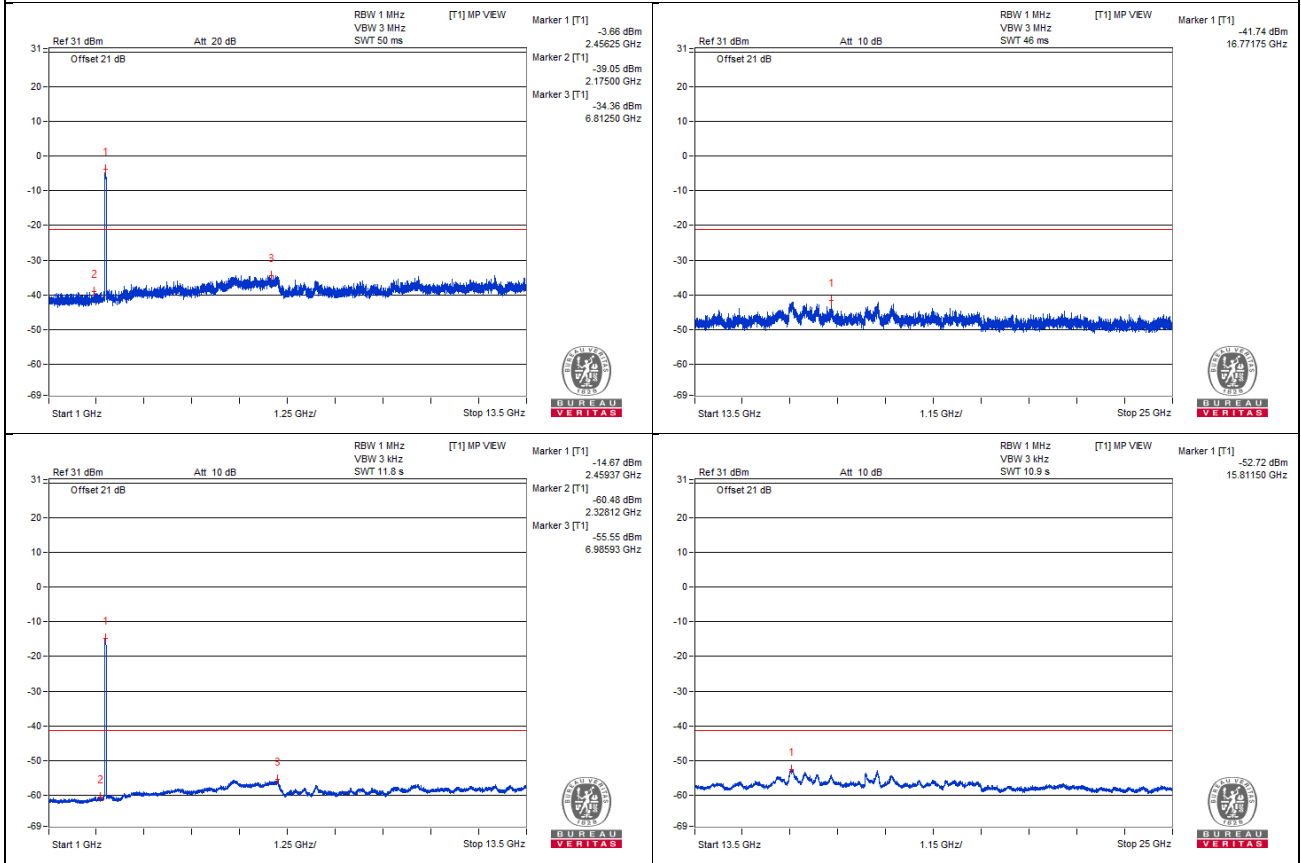

Chain 1

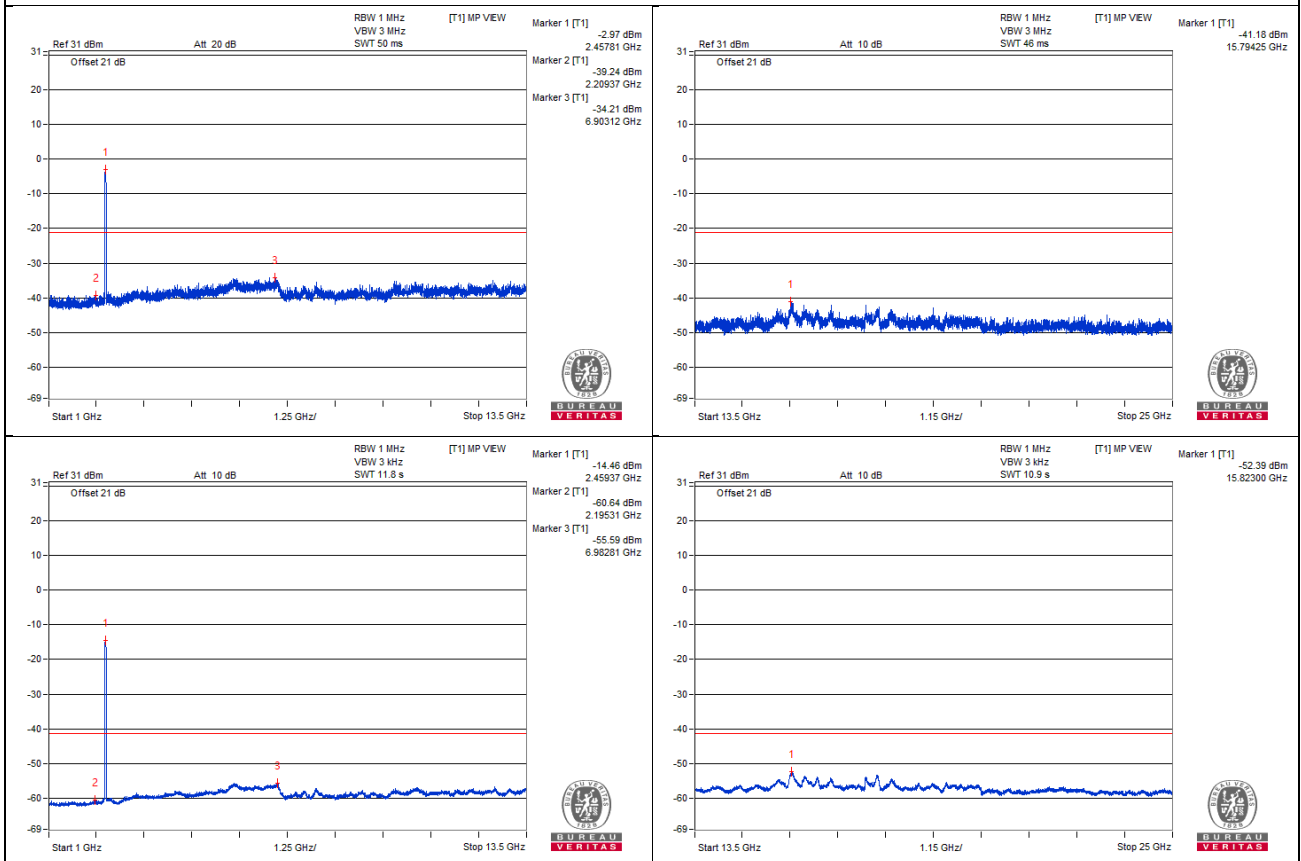

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.54 PK	68.34	74	-5.66	-37.96	-35.51	6.63	-26.92
2	2483.66 AV	45.82	54	-8.18	-59	-59.17	6.63	-49.44

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

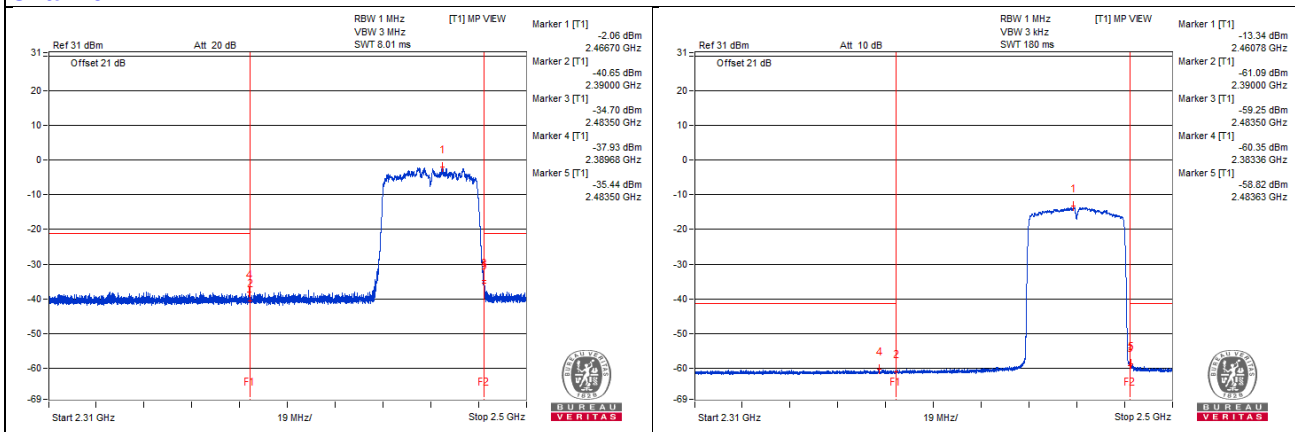

Chain 1

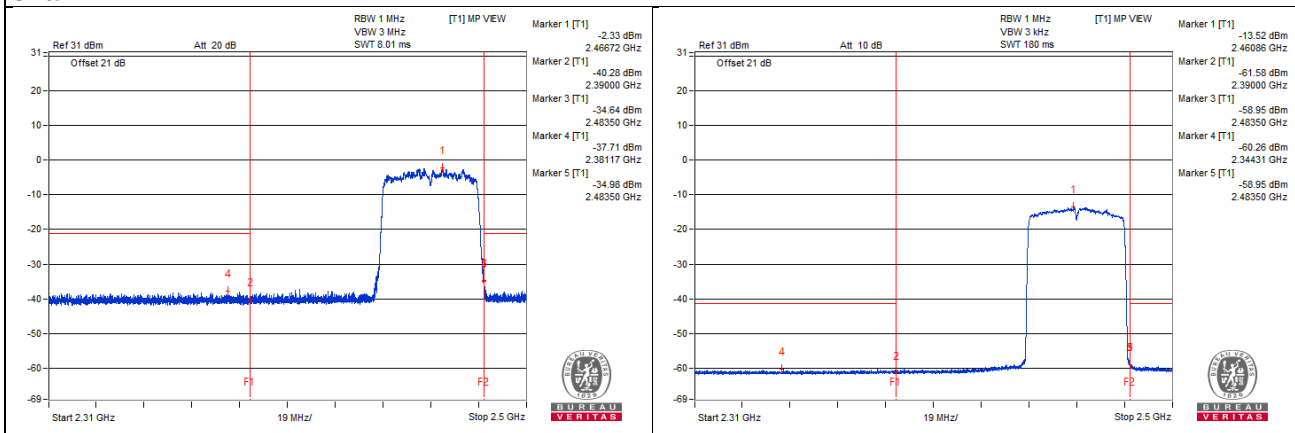

Below 1GHz Data

802.11g - Channel 6

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	125.9	30.05	43.5	-13.45	-76.59	-73.61	6.63	-65.21

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

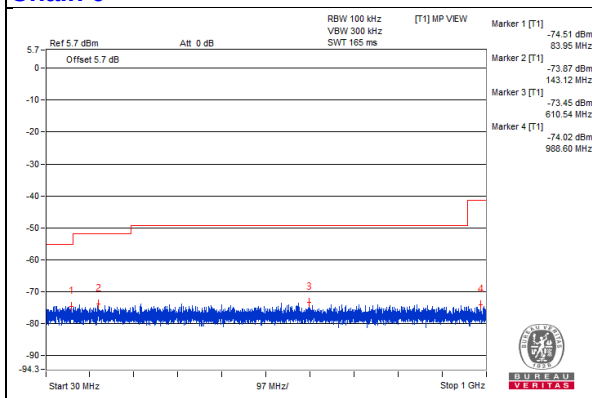

Chain 1

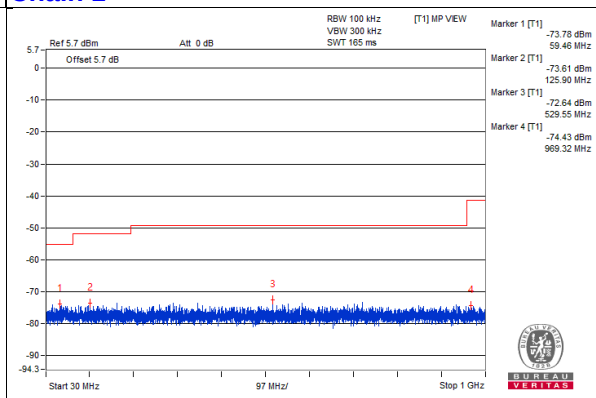

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2018	Oct. 23, 2019
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 22, 2018	Oct. 21, 2019
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 17, 2019	Mar. 16, 2020
50 ohms Terminator	N/A	3	Oct. 22, 2018	Oct. 21, 2019
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 14, 2019	Mar. 13, 2020
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: Oct. 03, 2019

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

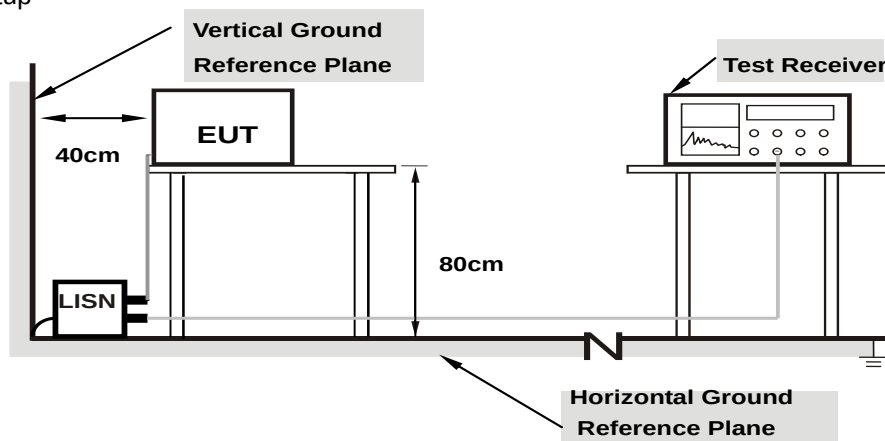

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.