


Site: AC1	Time: 2018/06/21 - 23:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0 + 1	

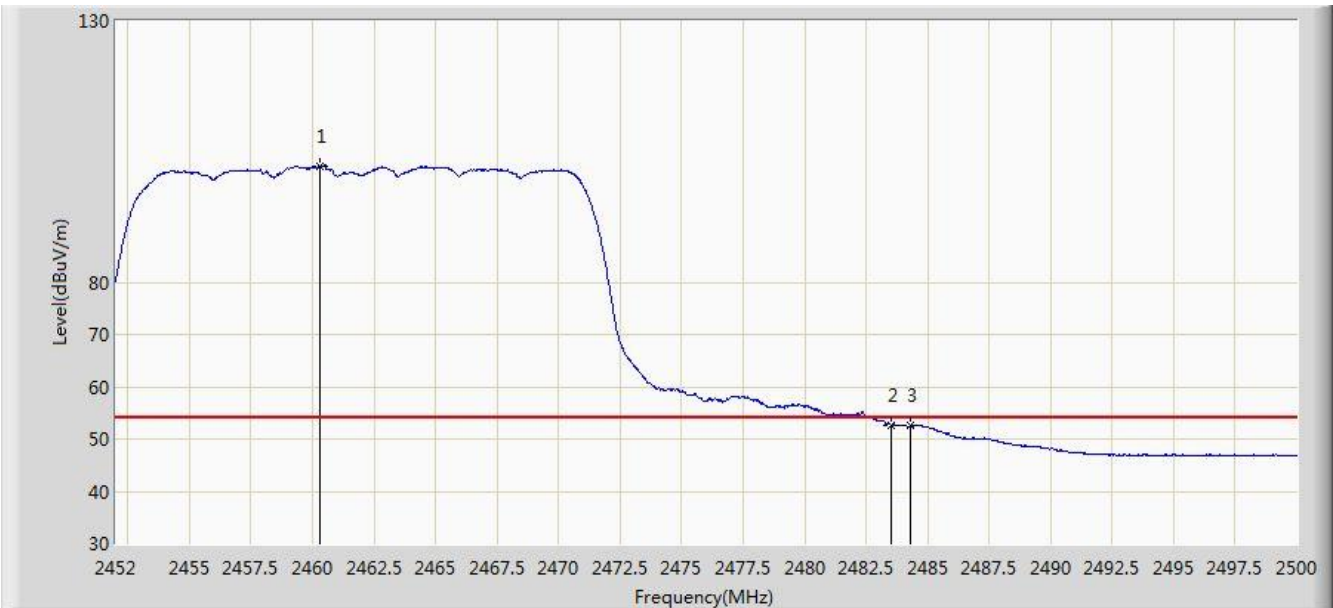


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2460.328	102.209	69.696	N/A	N/A	32.513	AV
2			2483.500	52.746	20.165	-1.254	54.000	32.580	AV
3			2484.328	52.678	20.095	-1.322	54.000	32.583	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0 + 1	

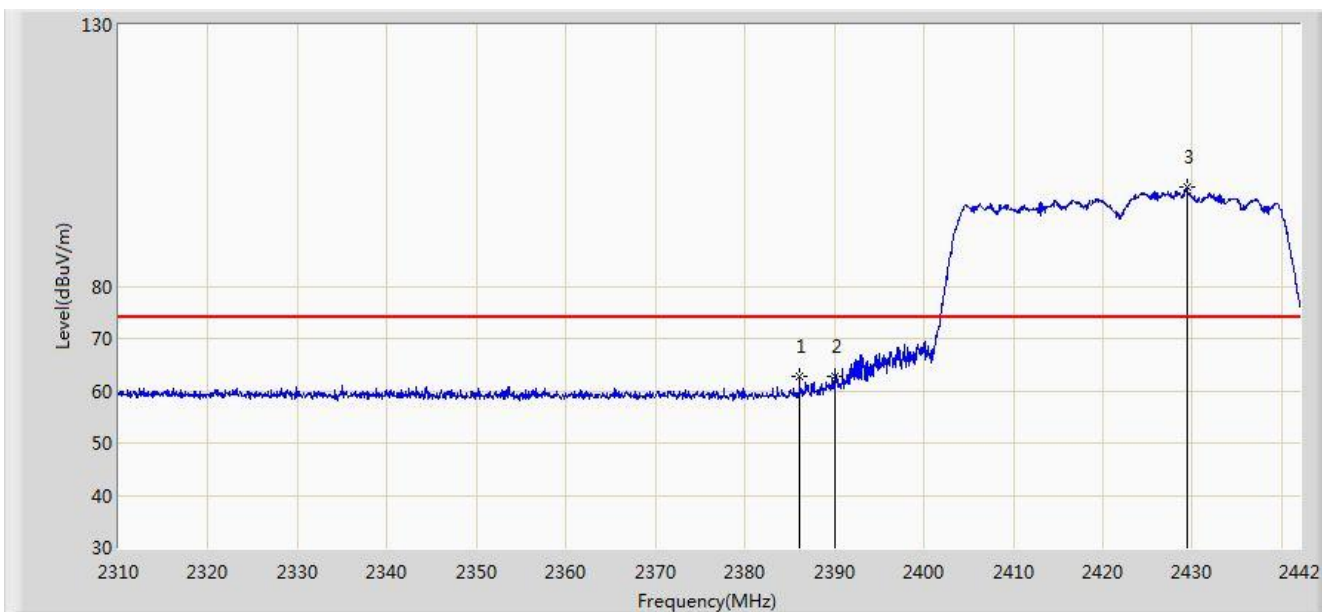


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.098	62.648	30.088	-11.352	74.000	32.559	PK
2			2390.000	62.868	30.314	-11.132	74.000	32.554	PK
3			2429.394	98.988	66.483	N/A	N/A	32.505	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0 + 1	

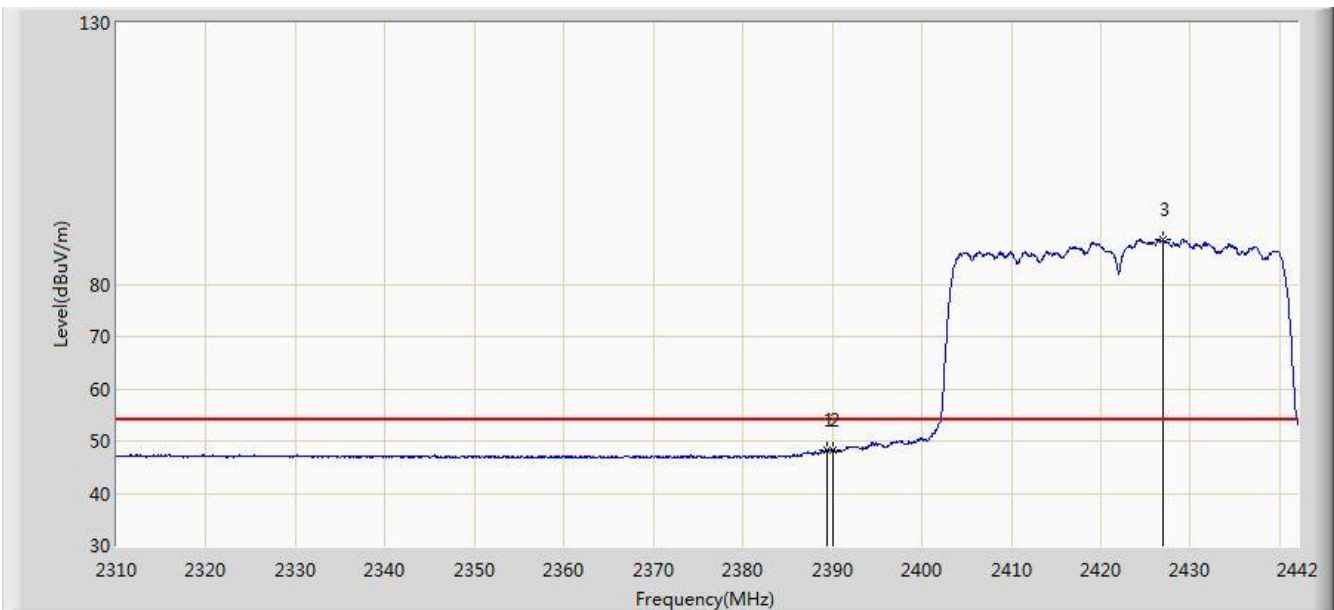


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.464	48.290	15.735	-5.710	54.000	32.555	AV
2			2390.000	48.145	15.591	-5.855	54.000	32.554	AV
3			2426.952	88.506	55.998	N/A	N/A	32.508	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0 + 1	

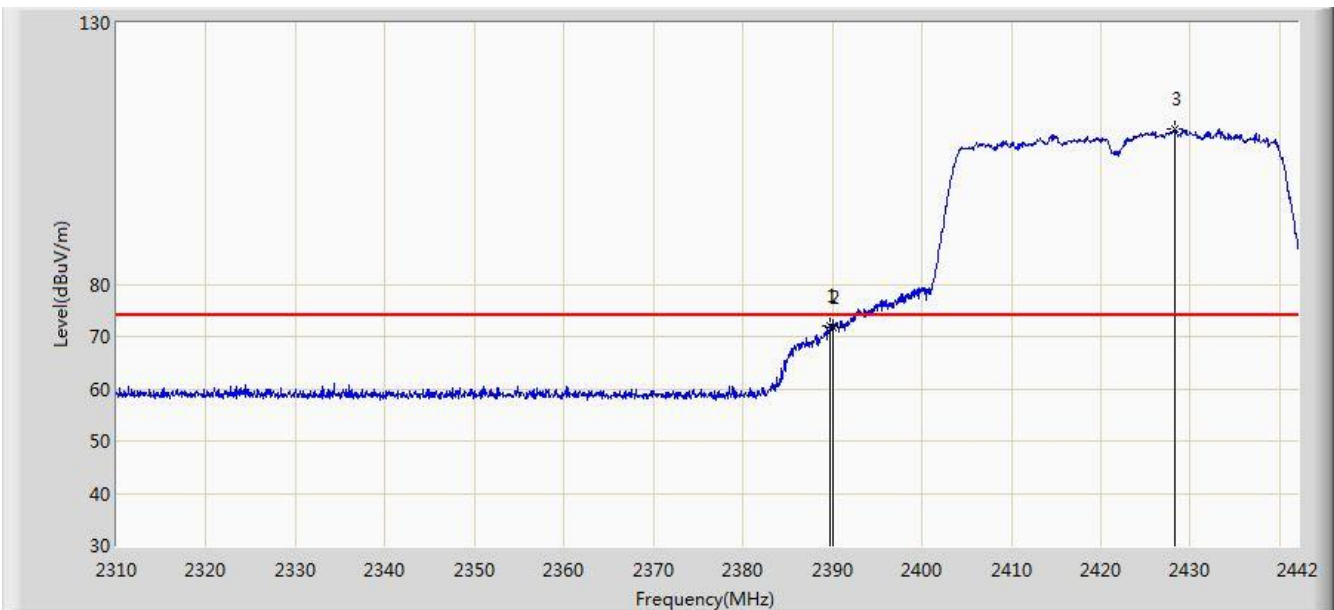


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.728	71.961	39.406	-2.039	74.000	32.555	PK
2			2390.000	71.831	39.277	-2.169	74.000	32.554	PK
3			2428.338	109.699	77.193	N/A	N/A	32.506	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0 + 1	

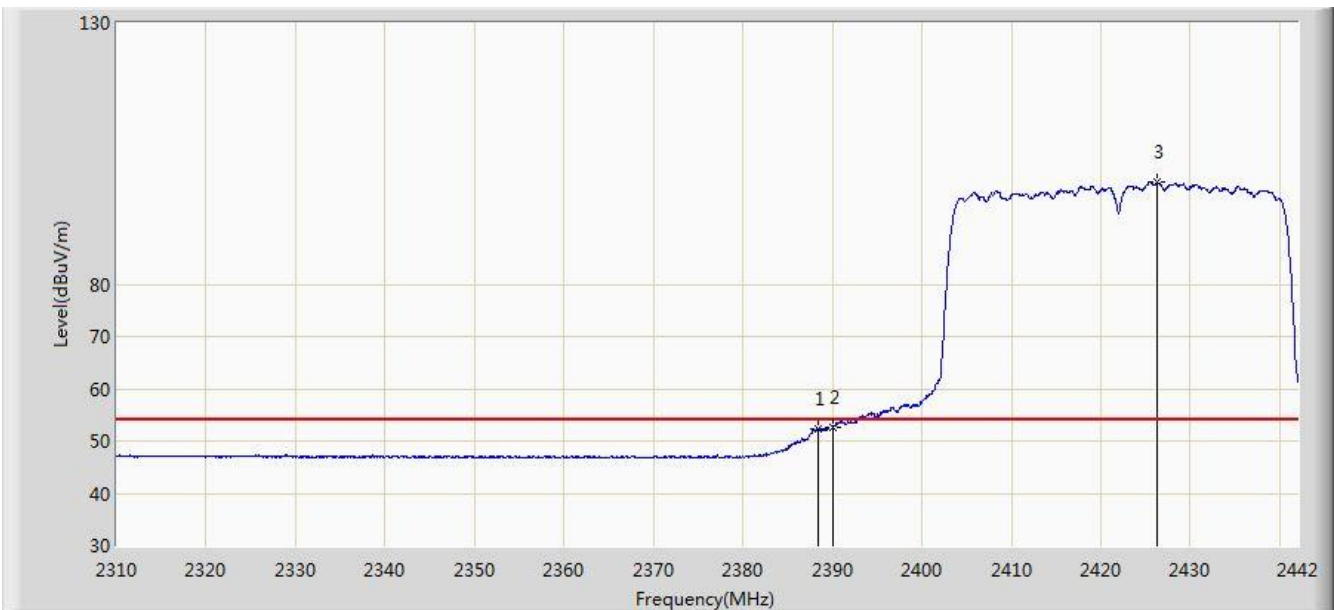

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.342	52.352	19.795	-1.648	54.000	32.557	AV
2			2390.000	52.560	20.006	-1.440	54.000	32.554	AV
3			2426.358	99.499	66.991	N/A	N/A	32.509	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2444.512	96.705	64.218	N/A	N/A	32.487	PK
2			2483.500	60.576	27.995	-13.424	74.000	32.580	PK
3			2485.142	62.590	30.004	-11.410	74.000	32.585	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0 + 1	

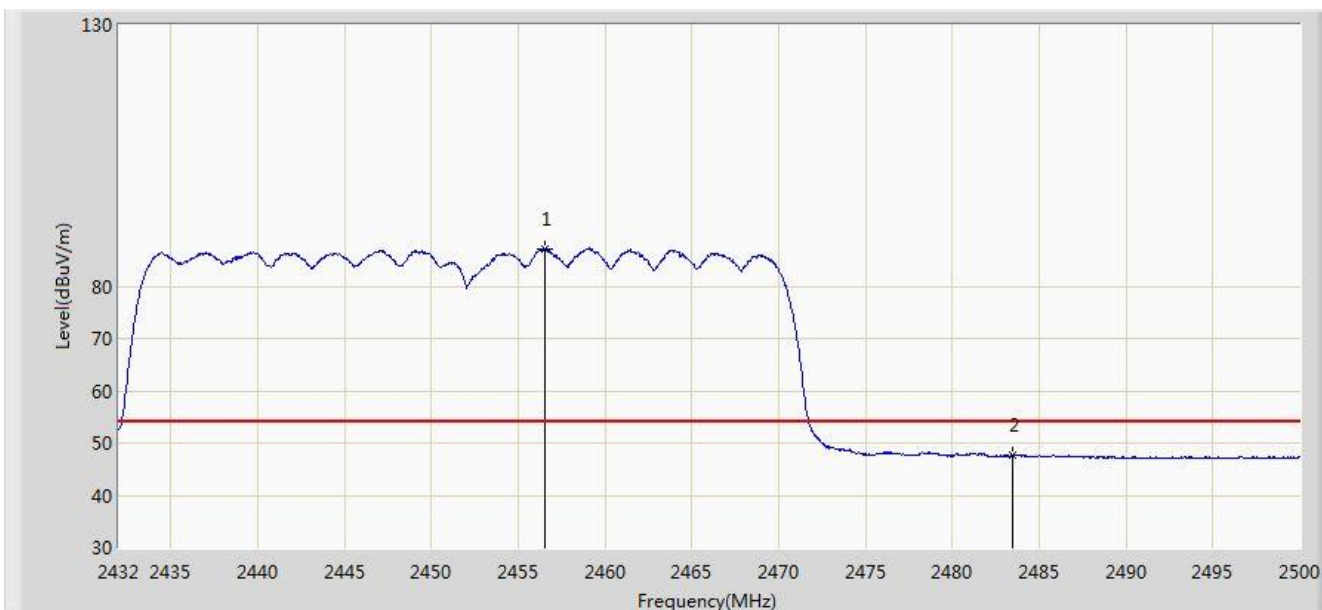


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2456.514	87.199	54.692	N/A	N/A	32.507	AV
2			2483.500	47.582	15.001	-6.418	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0 + 1	

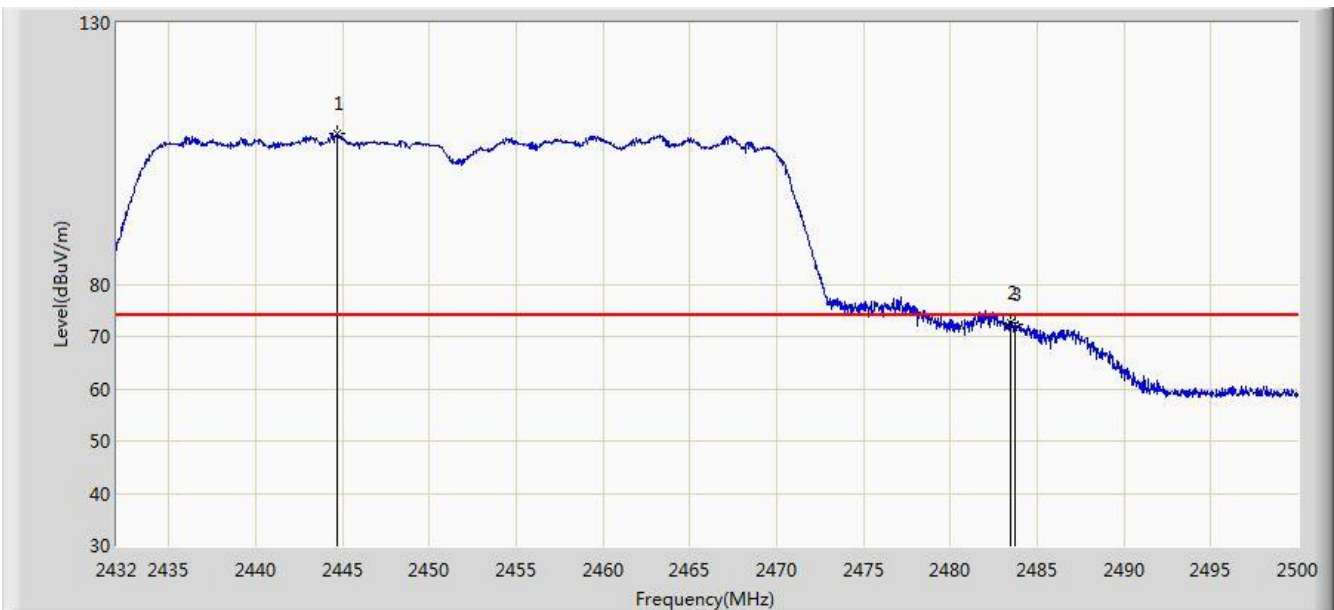


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2444.682	108.762	76.275	N/A	N/A	32.487	PK
2			2483.500	72.629	40.048	-1.371	74.000	32.580	PK
3			2483.748	72.182	39.601	-1.818	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0 + 1	

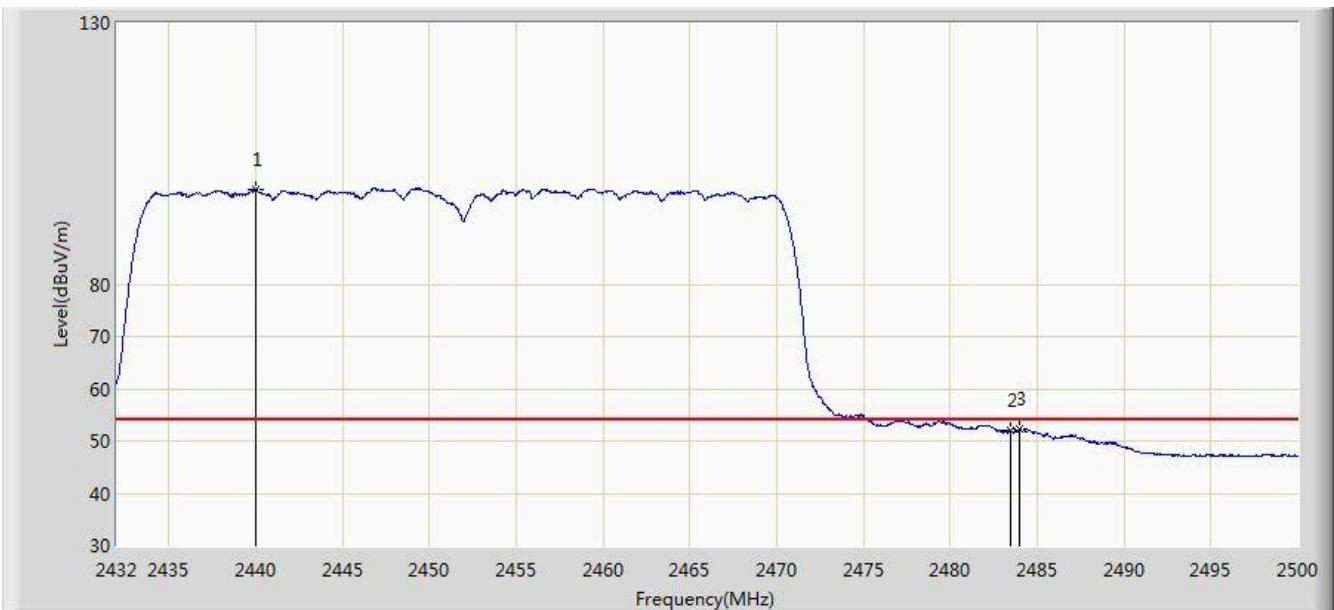


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2439.990	98.240	65.748	N/A	N/A	32.492	AV
2			2483.500	51.912	19.331	-2.088	54.000	32.580	AV
3			2483.986	52.239	19.657	-1.761	54.000	32.582	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz Ant 0 + 1	

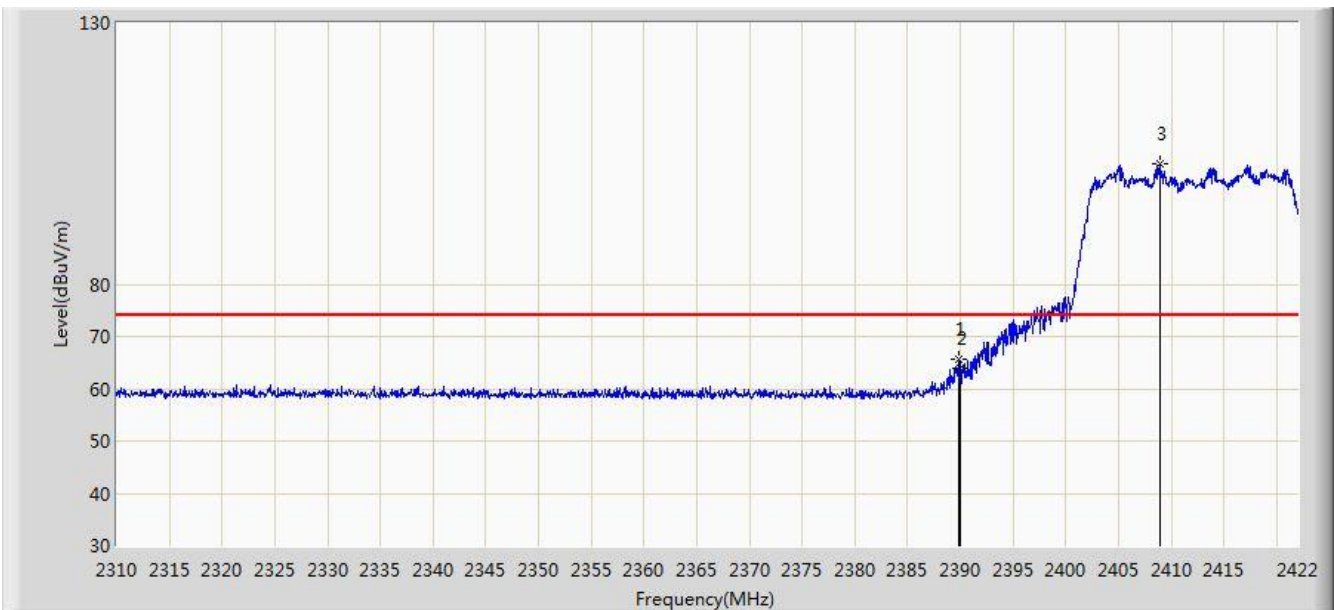


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	65.564	33.009	-8.436	74.000	32.555	PK
2			2390.000	64.000	31.446	-10.000	74.000	32.554	PK
3			2409.008	103.046	70.517	N/A	N/A	32.530	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz Ant 0 + 1	

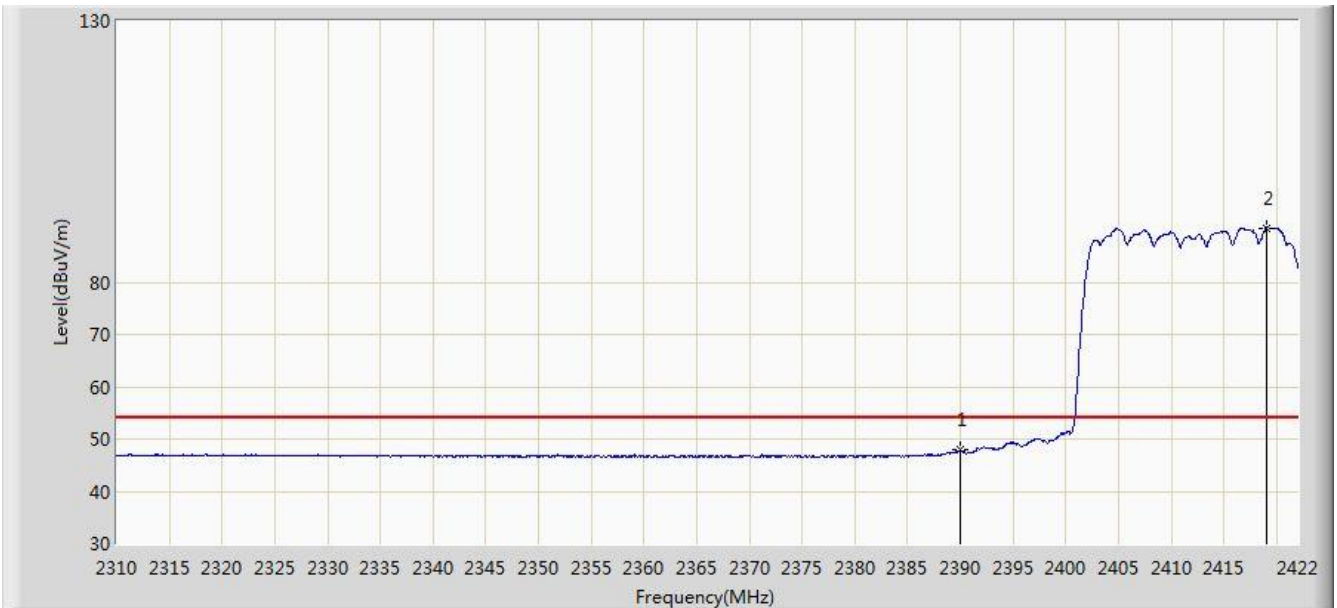


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.867	15.313	-6.133	54.000	32.554	AV
2			2419.032	90.408	57.891	N/A	N/A	32.518	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz Ant 0 + 1	

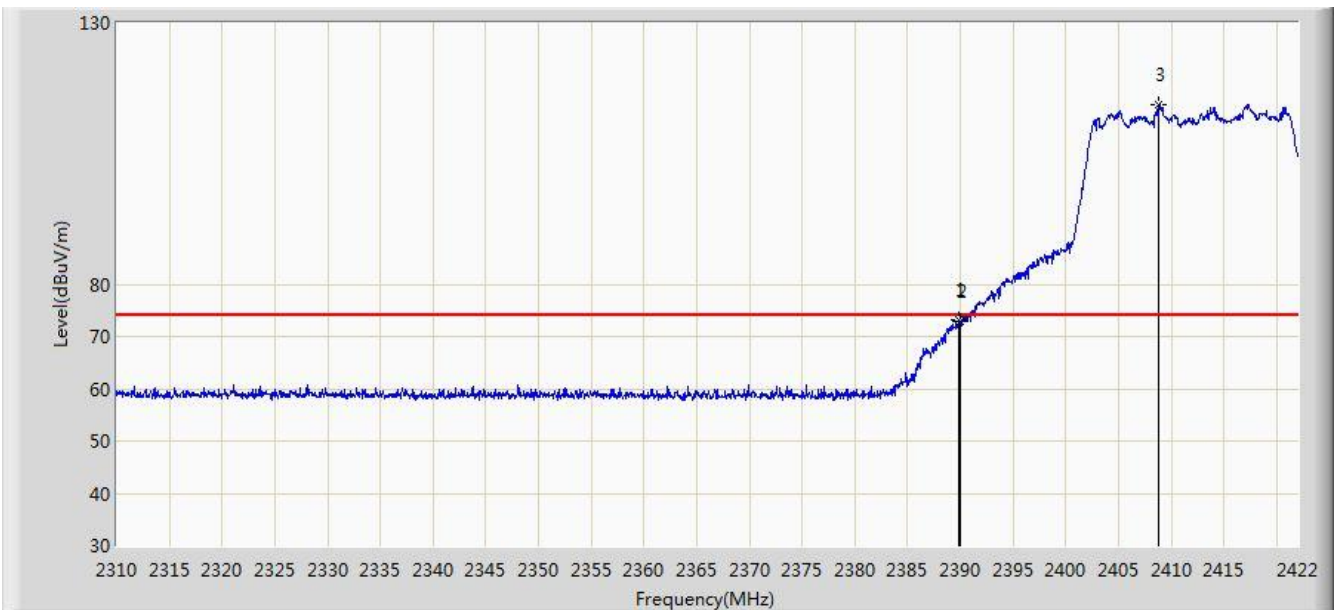


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	73.309	40.754	-0.691	74.000	32.555	PK
2			2390.000	72.833	40.279	-1.167	74.000	32.554	PK
3			2408.840	114.381	81.851	N/A	N/A	32.529	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz Ant 0 + 1	

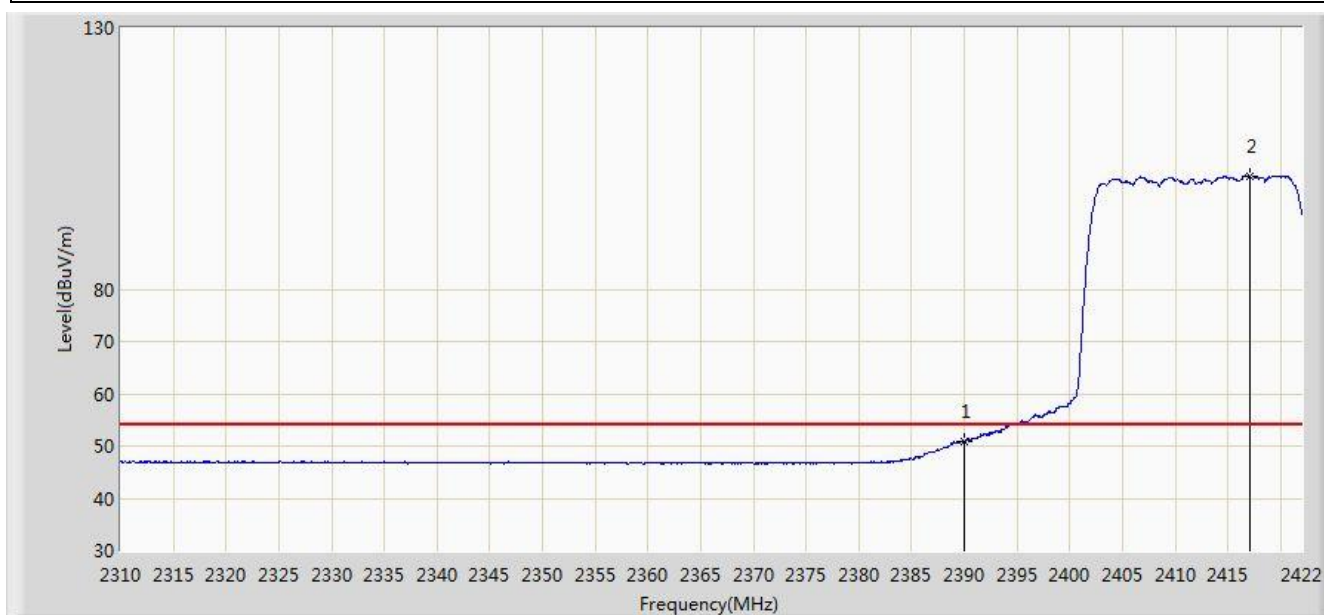

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.927	18.373	-3.073	54.000	32.554	AV
2			2417.128	101.662	69.143	N/A	N/A	32.519	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2458.912	101.623	69.112	N/A	N/A	32.511	PK
2			2483.500	62.515	29.934	-11.485	74.000	32.580	PK
3			2483.608	63.742	31.161	-10.258	74.000	32.581	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz Ant 0 + 1	

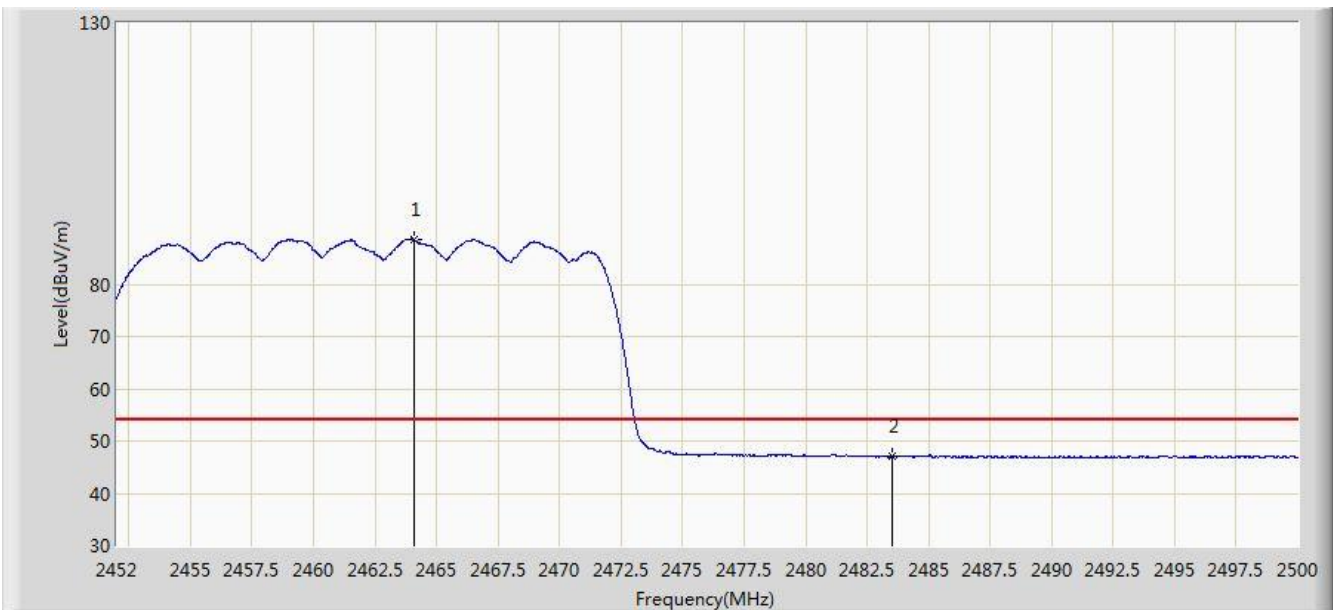

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2464.072	88.540	56.018	N/A	N/A	32.523	AV
2			2483.500	47.010	14.429	-6.990	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2467.240	112.320	80.028	N/A	N/A	32.292	PK
2			2483.500	71.808	39.469	-2.192	74.000	32.340	PK
3			2484.136	72.443	40.101	-1.557	74.000	32.342	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 00:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz Ant 0 + 1	

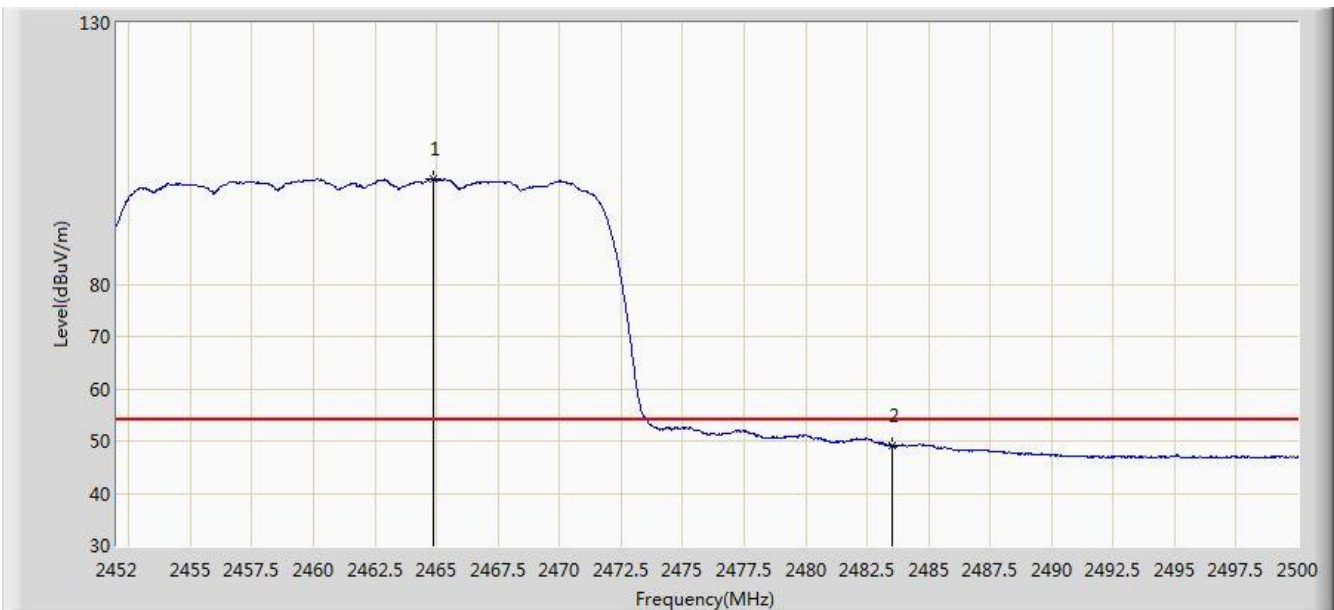


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2464.888	100.102	67.577	N/A	N/A	32.525	AV
2			2483.500	49.082	16.501	-4.918	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 01:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz Ant 0 + 1	

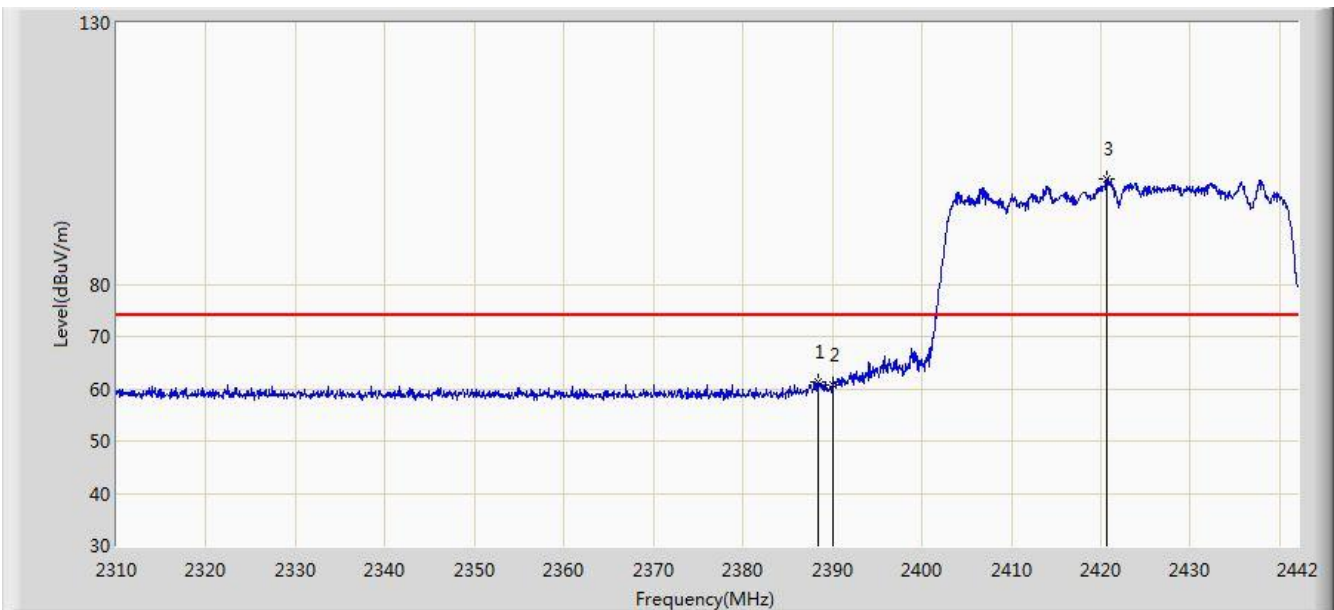


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.342	61.383	28.826	-12.617	74.000	32.557	PK
2			2390.000	60.614	28.060	-13.386	74.000	32.554	PK
3			2420.682	100.101	67.586	N/A	N/A	32.516	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 01:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz Ant 0 + 1	

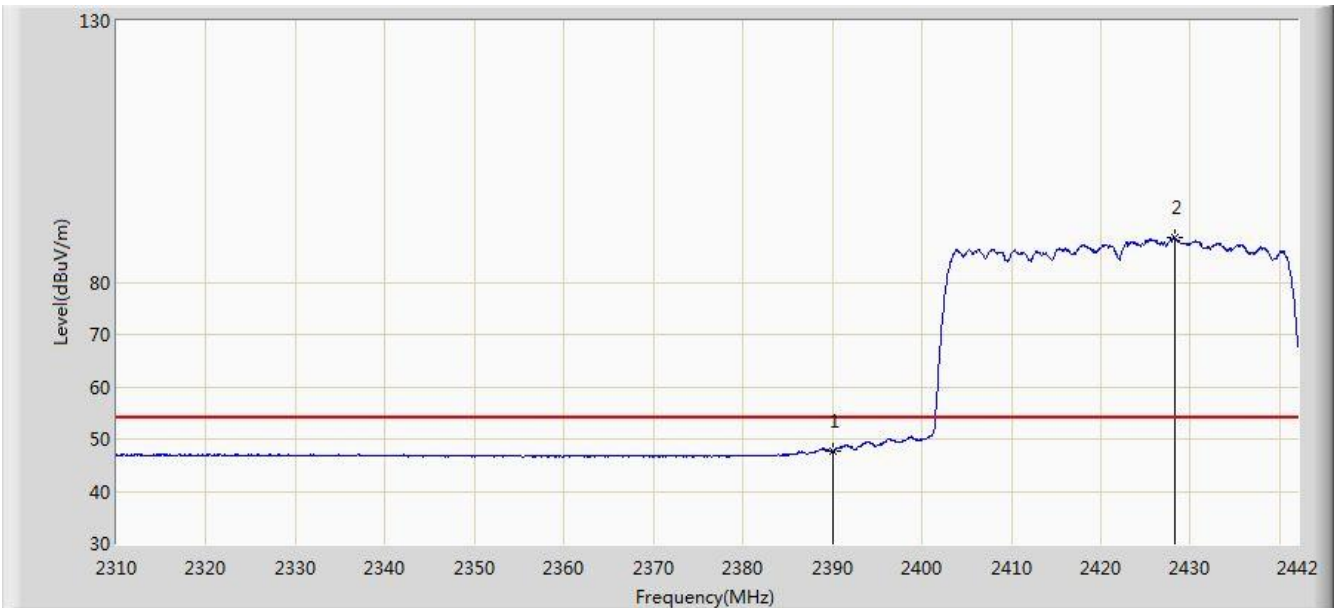


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.741	15.187	-6.259	54.000	32.554	AV
2			2428.206	88.406	55.900	N/A	N/A	32.507	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 01:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz Ant 0 + 1	

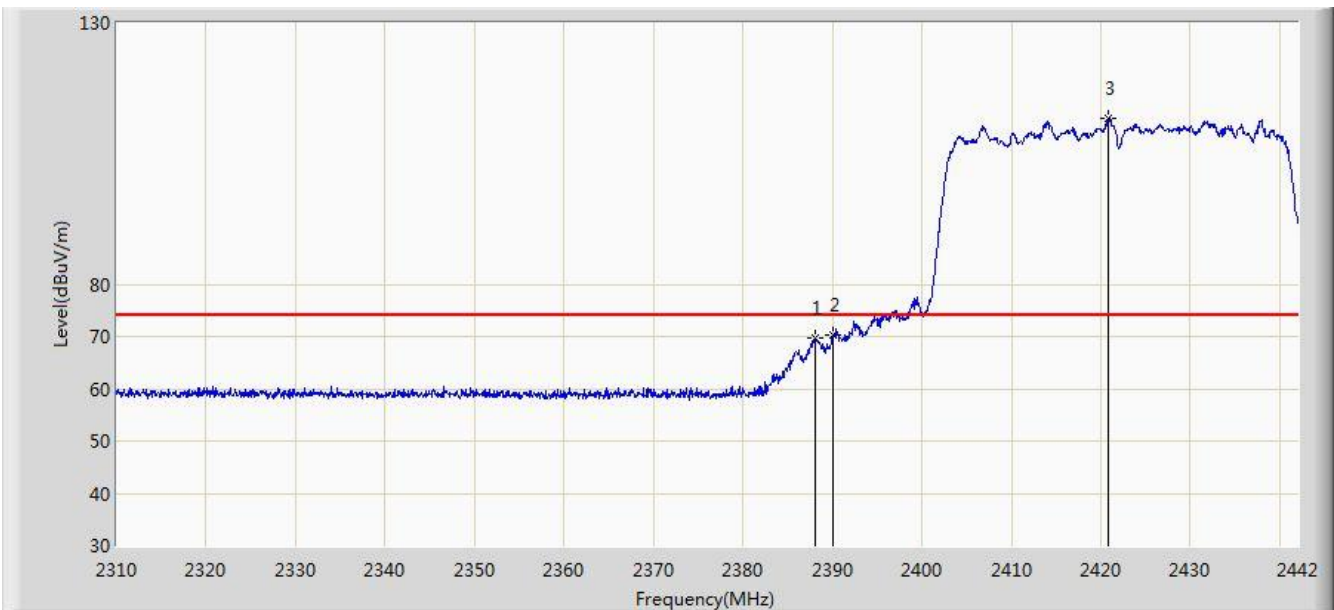


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.078	69.650	37.093	-4.350	74.000	32.557	PK
2			2390.000	70.315	37.761	-3.685	74.000	32.554	PK
3			2420.748	111.654	79.139	N/A	N/A	32.515	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 01:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz Ant 0 + 1	

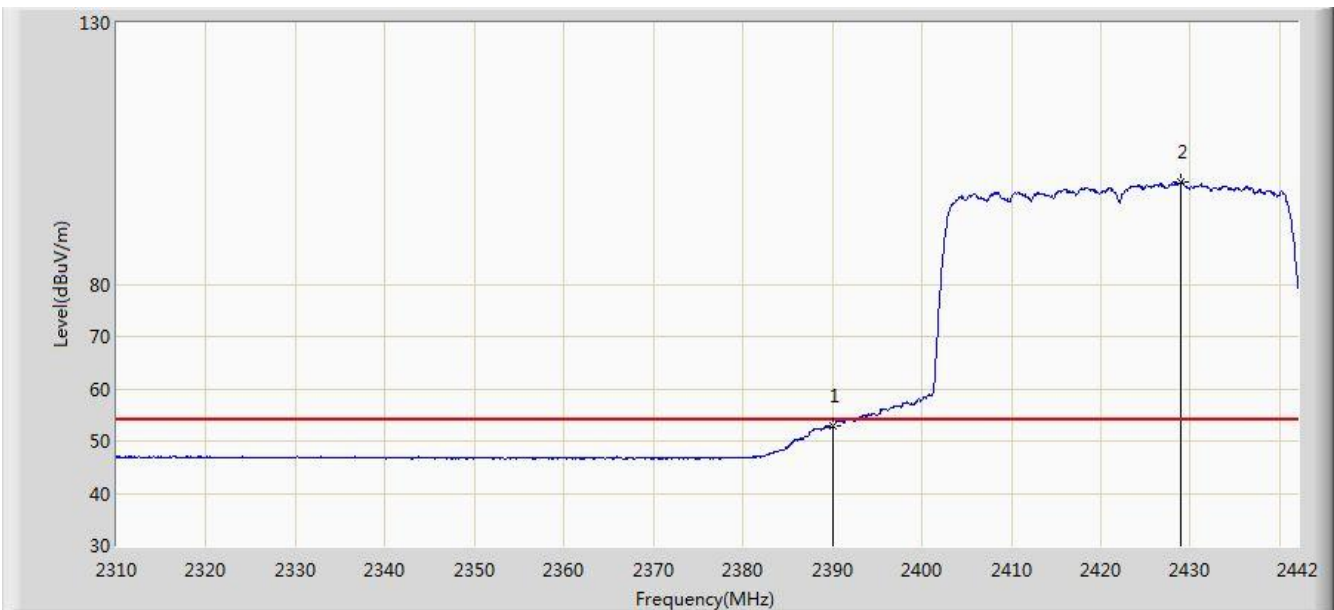


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.854	20.300	-1.146	54.000	32.554	AV
2			2428.866	99.451	66.945	N/A	N/A	32.506	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 01:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz Ant 0 + 1	

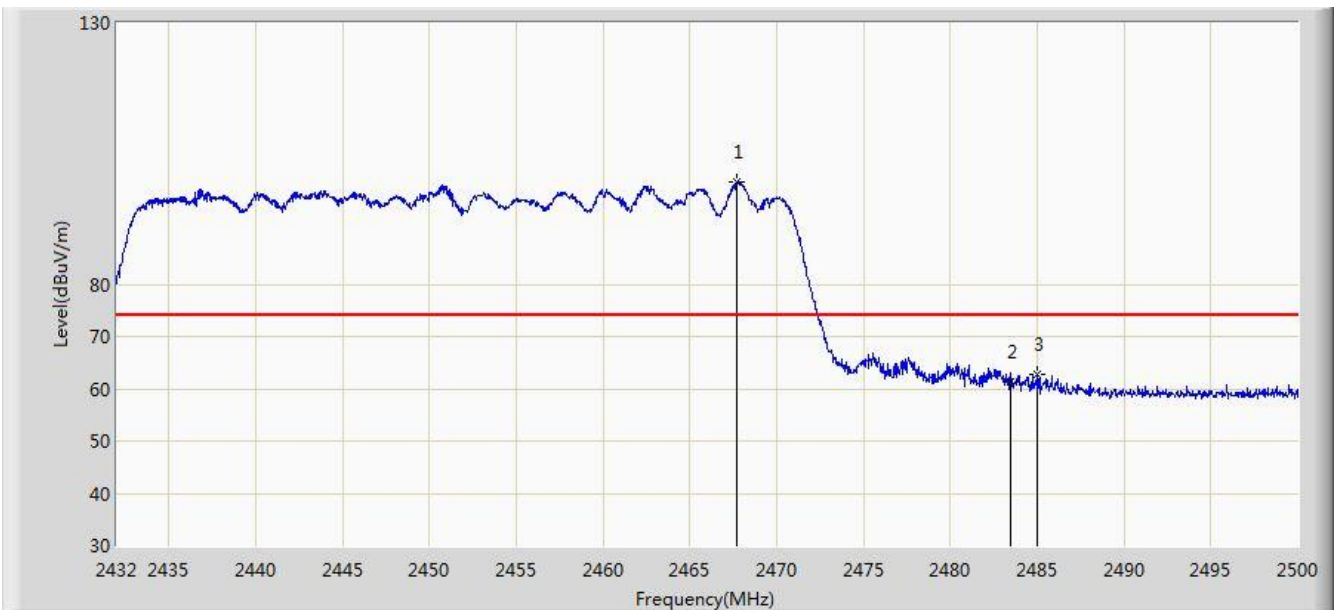


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2467.700	99.482	66.949	N/A	N/A	32.533	PK
2			2483.500	61.399	28.818	-12.601	74.000	32.580	PK
3			2485.006	62.699	30.114	-11.301	74.000	32.585	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 01:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz Ant 0 + 1	

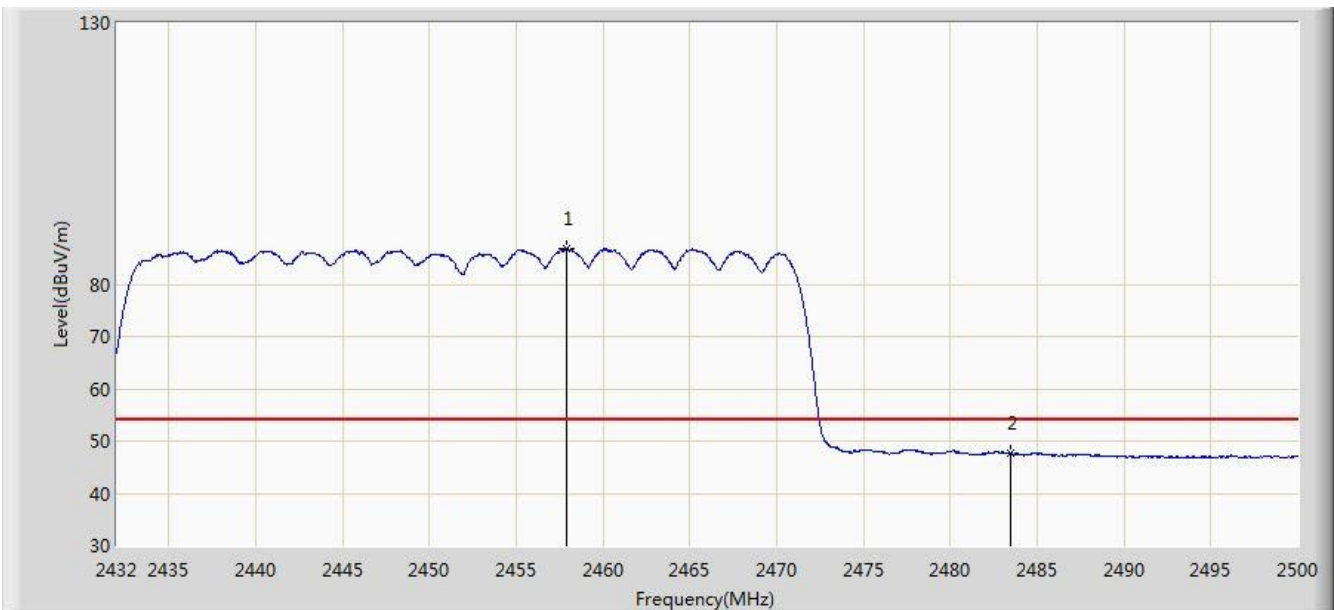


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2457.874	86.842	54.333	N/A	N/A	32.510	AV
2			2483.500	47.552	14.971	-6.448	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 01:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz Ant 0 + 1	

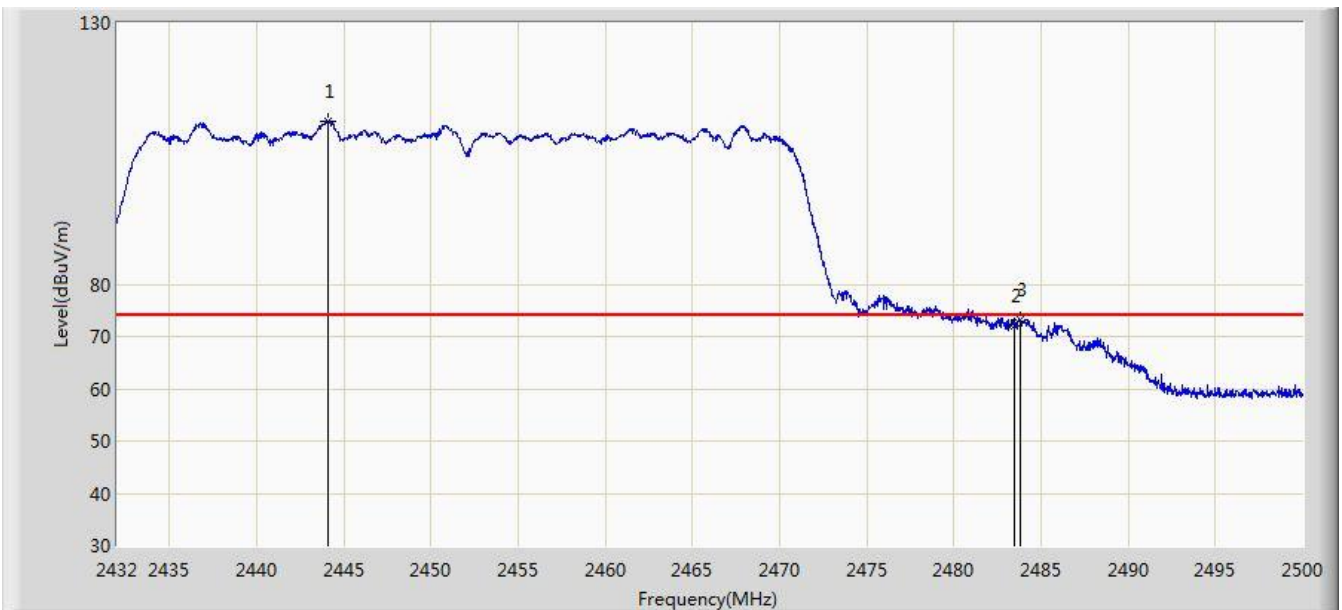


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2444.138	111.218	78.731	N/A	N/A	32.487	PK
2			2483.500	71.974	39.393	-2.026	74.000	32.580	PK
3			2483.816	73.212	40.630	-0.788	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/22 - 01:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz Ant 0 + 1	

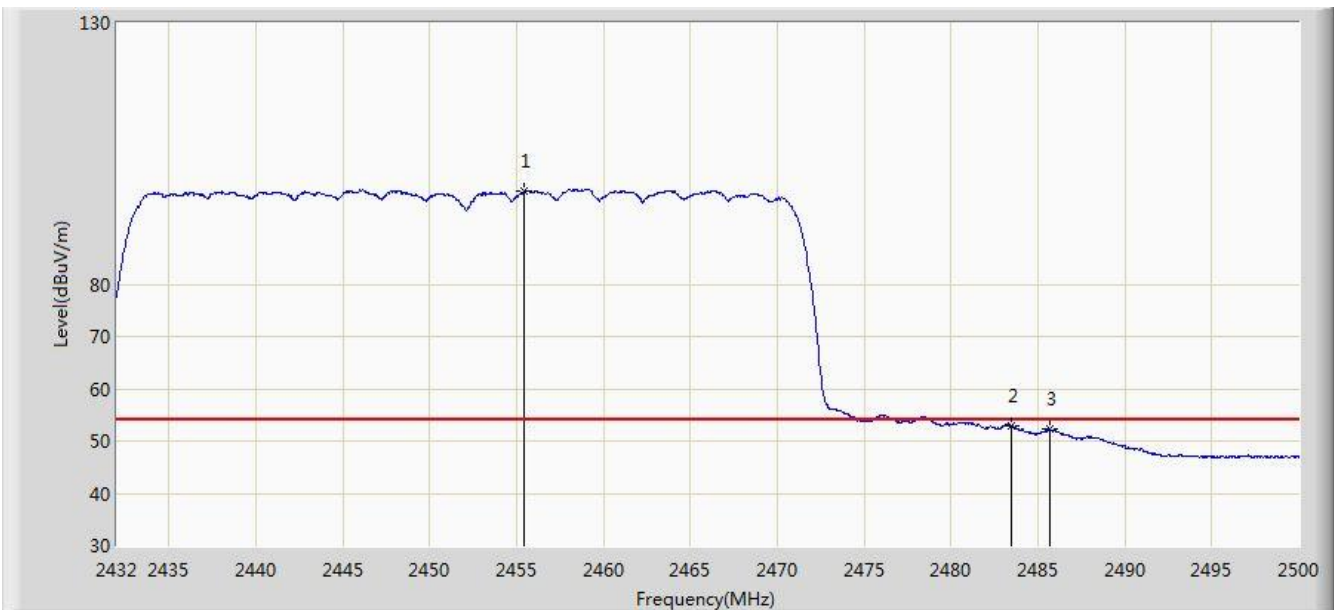


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2455.426	97.715	65.210	N/A	N/A	32.505	AV
2			2483.500	52.941	20.360	-1.059	54.000	32.580	AV
3			2485.686	52.213	19.626	-1.787	54.000	32.587	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

For APIN0514 - Omni Antenna (AP-ANT-40)

Site: AC1	Time: 2018/06/29 - 11:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0 + 1	

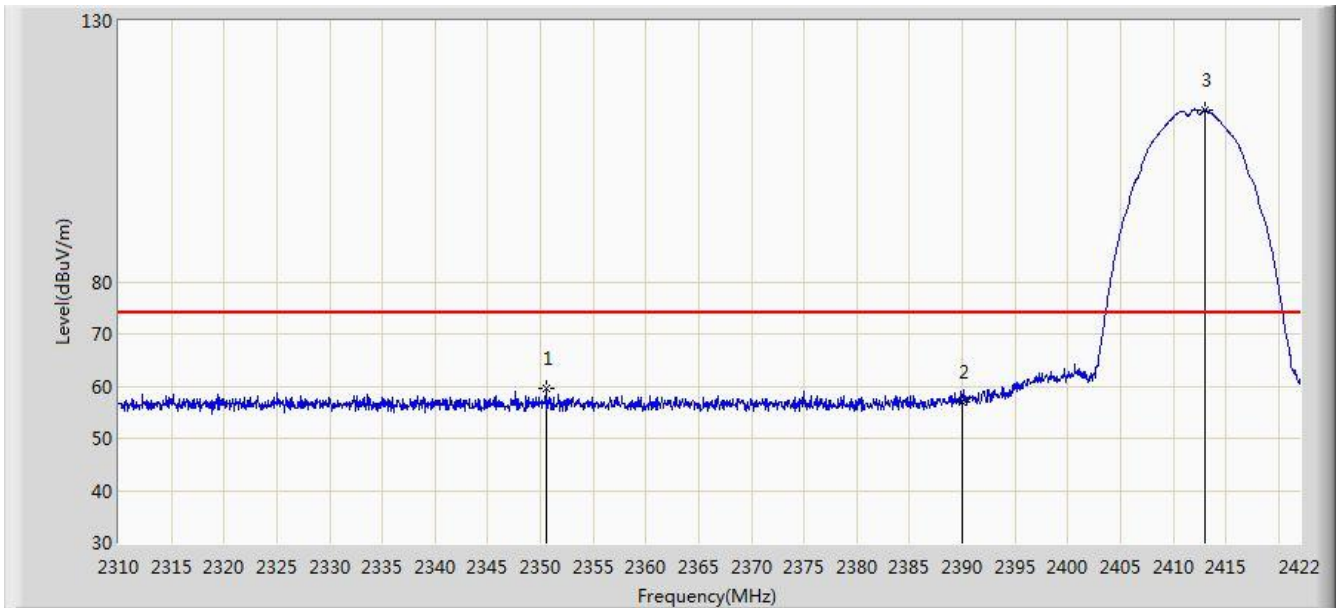


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2350.544	59.434	26.814	-14.566	74.000	32.621	PK
2			2390.000	57.024	24.470	-16.976	74.000	32.554	PK
3			2413.040	112.776	80.252	N/A	N/A	32.524	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 11:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0 + 1	

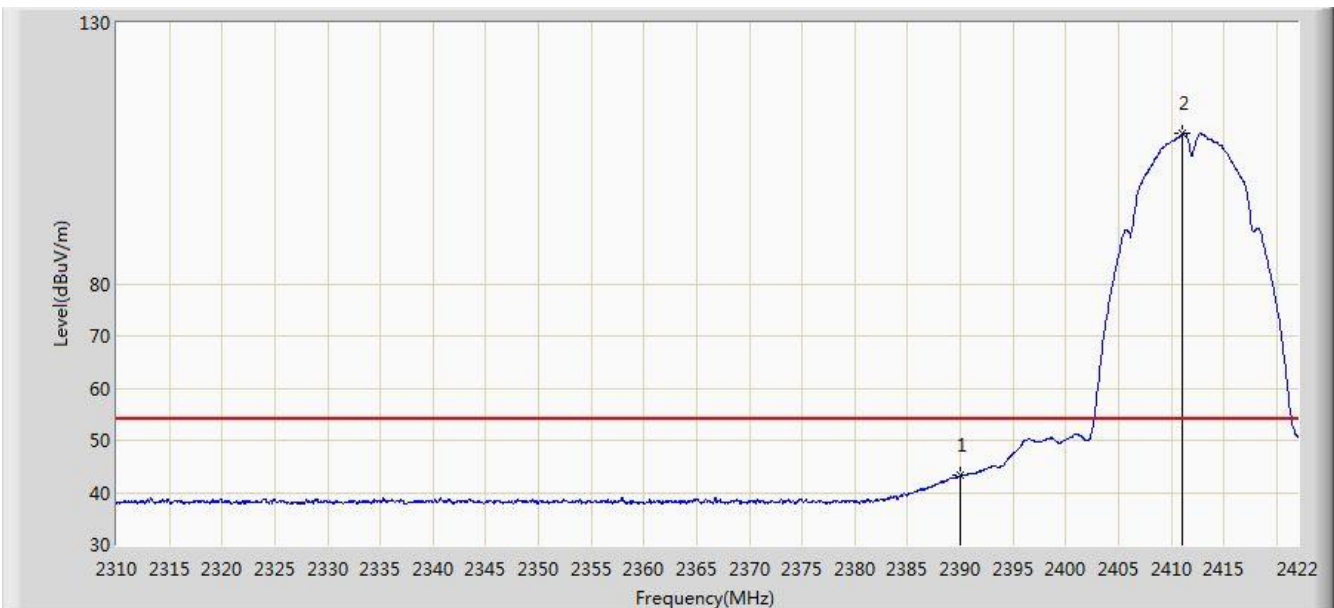


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.189	10.635	-10.811	54.000	32.554	AV
2	X		2411.080	108.805	76.278	N/A	N/A	32.527	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 11:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0 + 1	

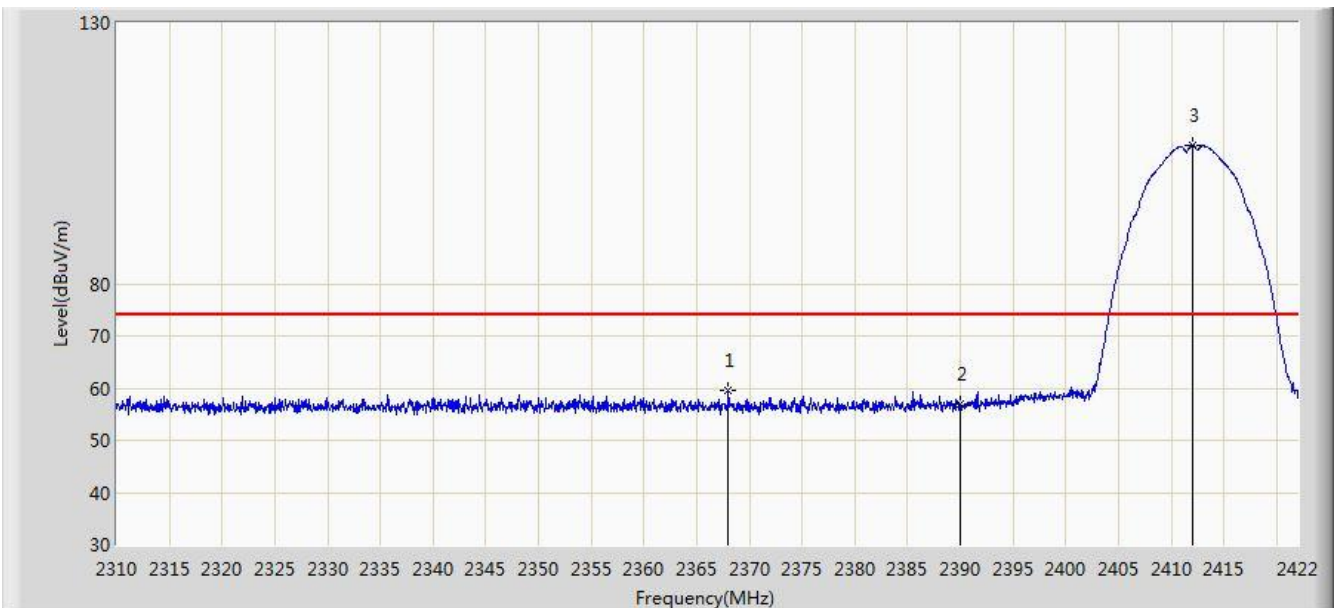


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2368.016	59.456	26.871	-14.544	74.000	32.585	PK
2			2390.000	56.889	24.335	-17.111	74.000	32.554	PK
3			2412.032	106.629	74.103	N/A	N/A	32.526	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 11:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0 + 1	

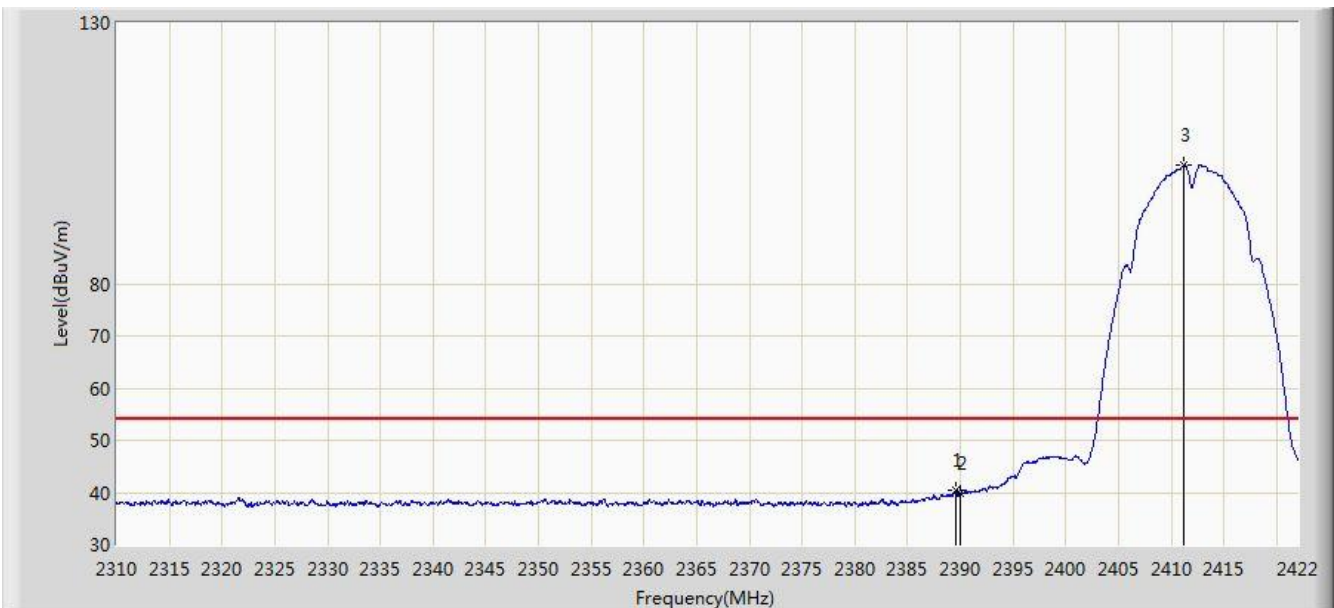


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.520	40.298	7.743	-13.702	54.000	32.556	AV
2			2390.000	39.935	7.381	-14.065	54.000	32.554	AV
3			2411.136	102.665	70.138	N/A	N/A	32.527	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 11:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz Ant 0 + 1	

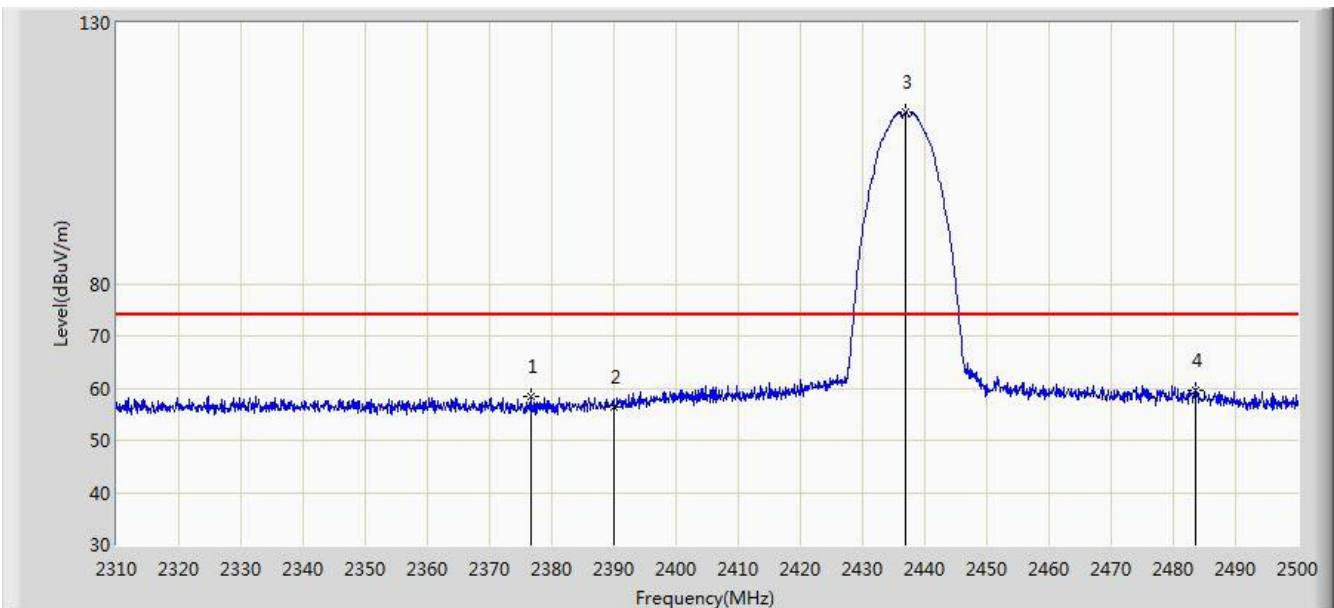


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2376.785	58.261	25.688	-15.739	74.000	32.573	PK
2			2390.000	56.357	23.803	-17.643	74.000	32.554	PK
3			2436.825	112.846	80.350	N/A	N/A	32.496	PK
4			2483.500	59.503	26.922	-14.497	74.000	32.580	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 11:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz Ant 0 + 1	

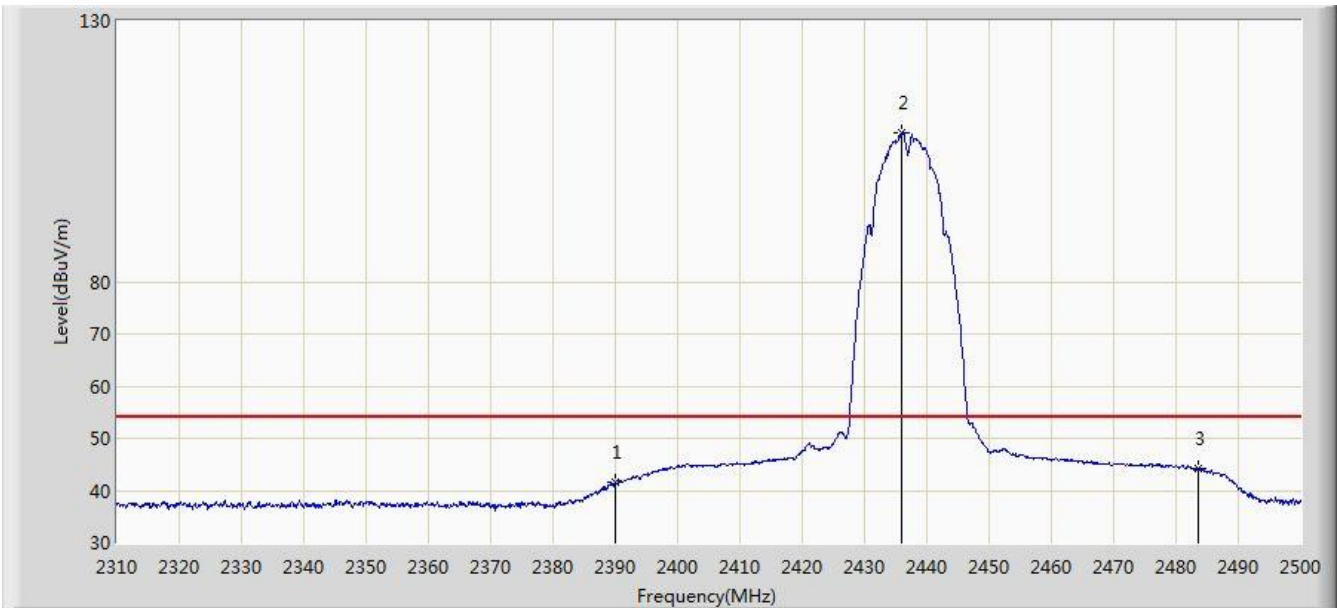


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	41.565	9.011	-12.435	54.000	32.554	AV
2	X		2436.065	108.456	75.959	N/A	N/A	32.497	AV
3			2483.500	44.118	11.537	-9.882	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 13:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz Ant 0 + 1	

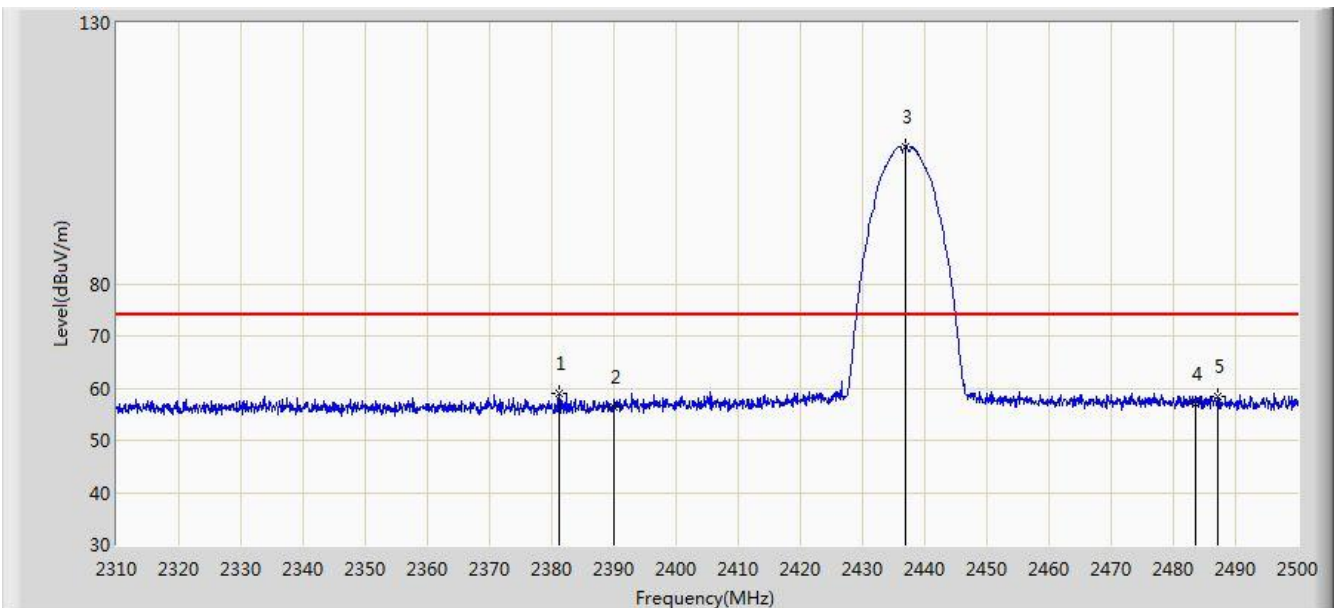


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2381.250	58.983	26.417	-15.017	74.000	32.566	PK
2			2390.000	56.349	23.795	-17.651	74.000	32.554	PK
3			2436.825	106.277	73.781	N/A	N/A	32.496	PK
4			2483.500	56.995	24.414	-17.005	74.000	32.580	PK
5			2487.175	58.423	25.831	-15.577	74.000	32.592	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 13:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz Ant 0 + 1	

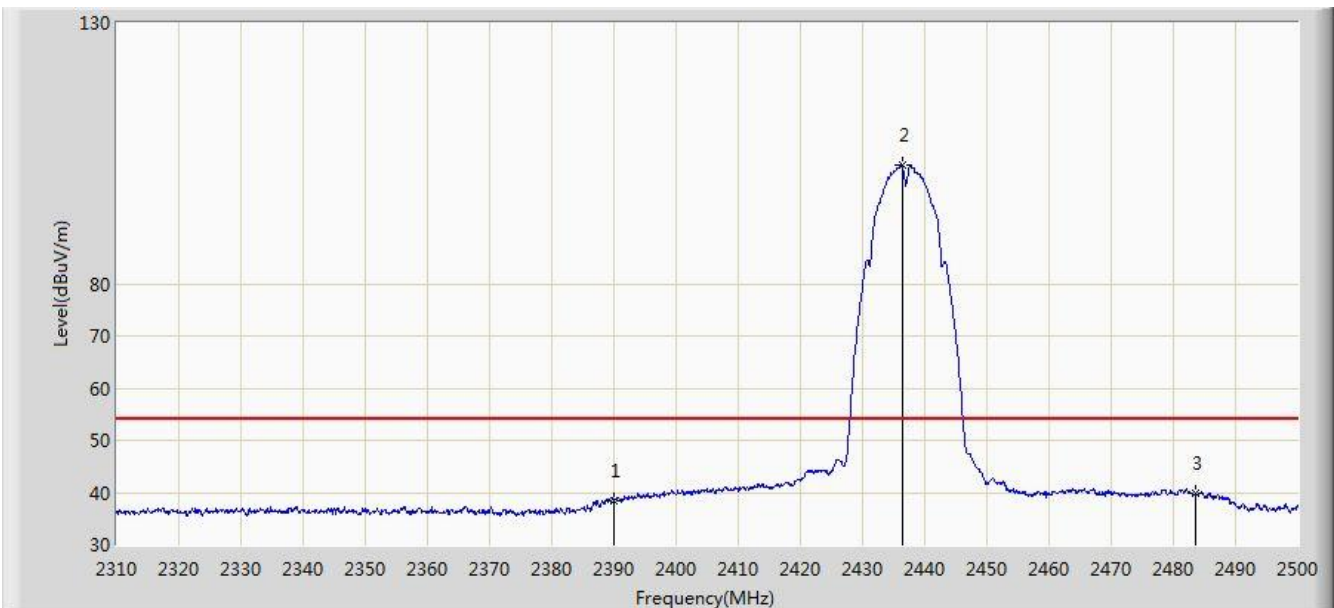


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	38.473	5.919	-15.527	54.000	32.554	AV
2			2436.350	102.846	70.349	N/A	N/A	32.497	AV
3			2483.500	39.822	7.241	-14.178	54.000	32.580	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 13:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0 + 1	

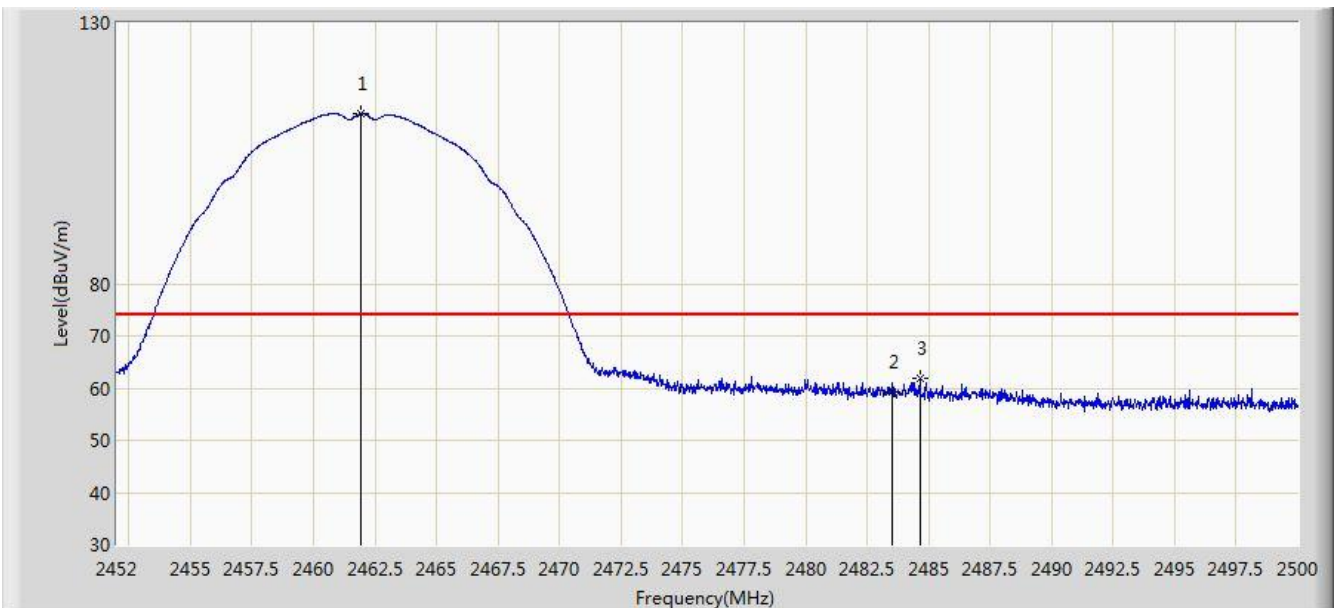

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2461.912	112.533	80.017	N/A	N/A	32.516	PK
2			2483.500	59.336	26.755	-14.664	74.000	32.580	PK
3			2484.664	61.759	29.175	-12.241	74.000	32.584	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 13:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2461.168	109.367	76.852	N/A	N/A	32.515	AV
2			2483.500	45.884	13.303	-8.116	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 13:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0 + 1	

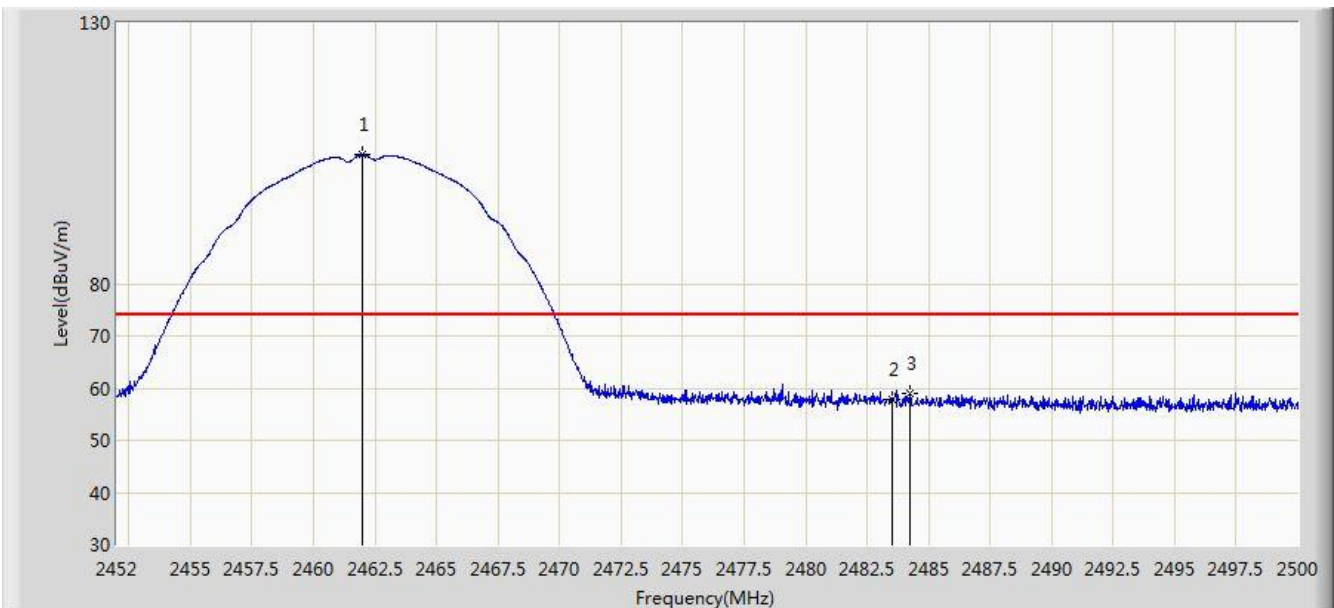


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2461.984	104.734	72.218	N/A	N/A	32.516	PK
2			2483.500	57.850	25.269	-16.150	74.000	32.580	PK
3			2484.256	59.113	26.530	-14.887	74.000	32.583	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 13:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0 + 1	

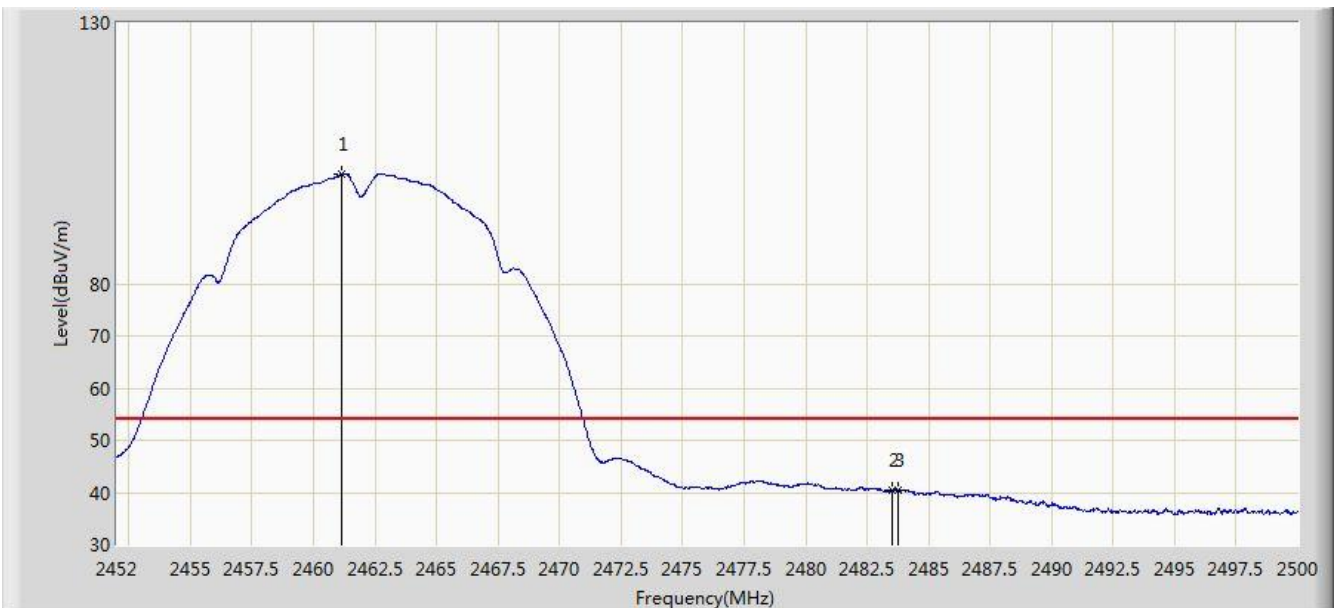


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2461.144	100.976	68.461	N/A	N/A	32.514	AV
2			2483.500	40.338	7.757	-13.662	54.000	32.580	AV
3			2483.776	40.515	7.934	-13.485	54.000	32.582	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 14:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0 + 1	

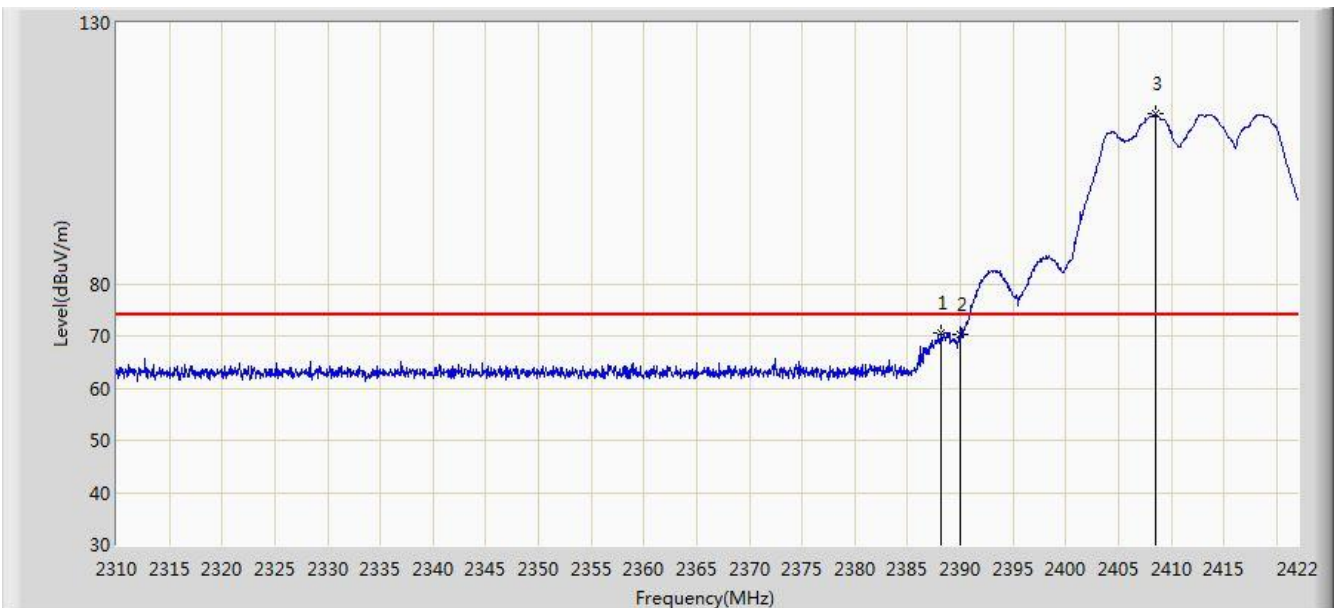


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.232	70.552	37.995	-3.448	74.000	32.557	PK
2			2390.000	70.187	37.633	-3.813	74.000	32.554	PK
3			2408.560	112.503	79.973	N/A	N/A	32.530	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 14:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0 + 1	

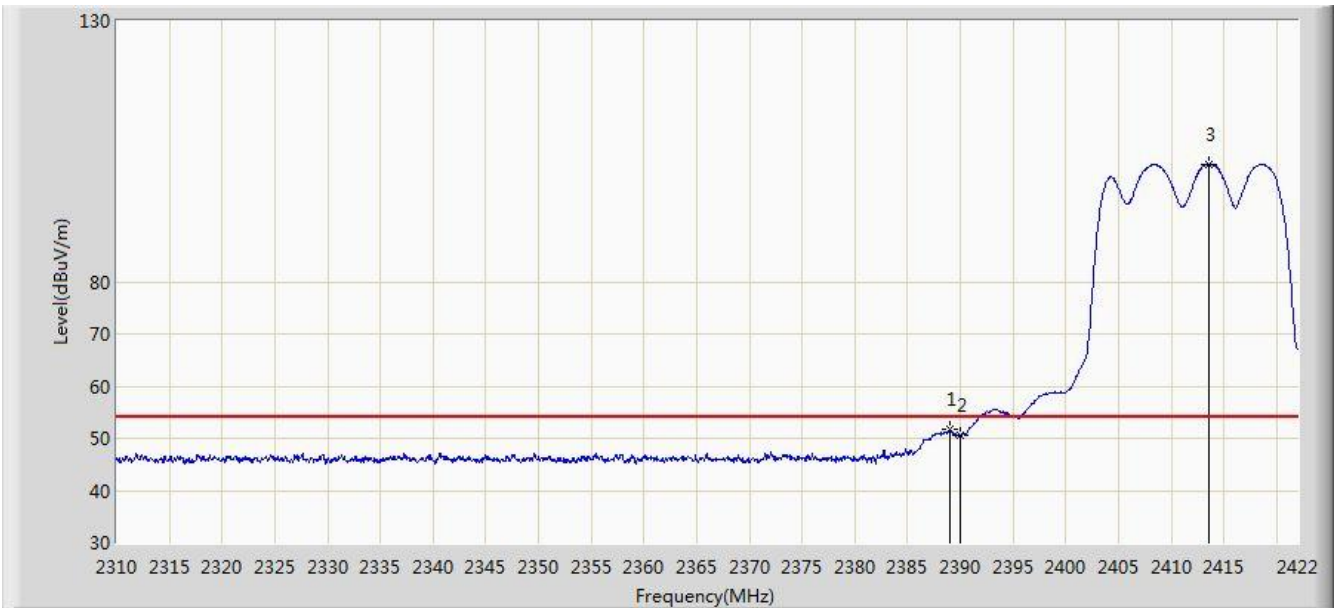


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.016	51.625	19.069	-2.375	54.000	32.556	AV
2			2390.000	50.511	17.957	-3.489	54.000	32.554	AV
3			2413.544	102.540	70.016	N/A	N/A	32.524	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 14:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0 + 1	

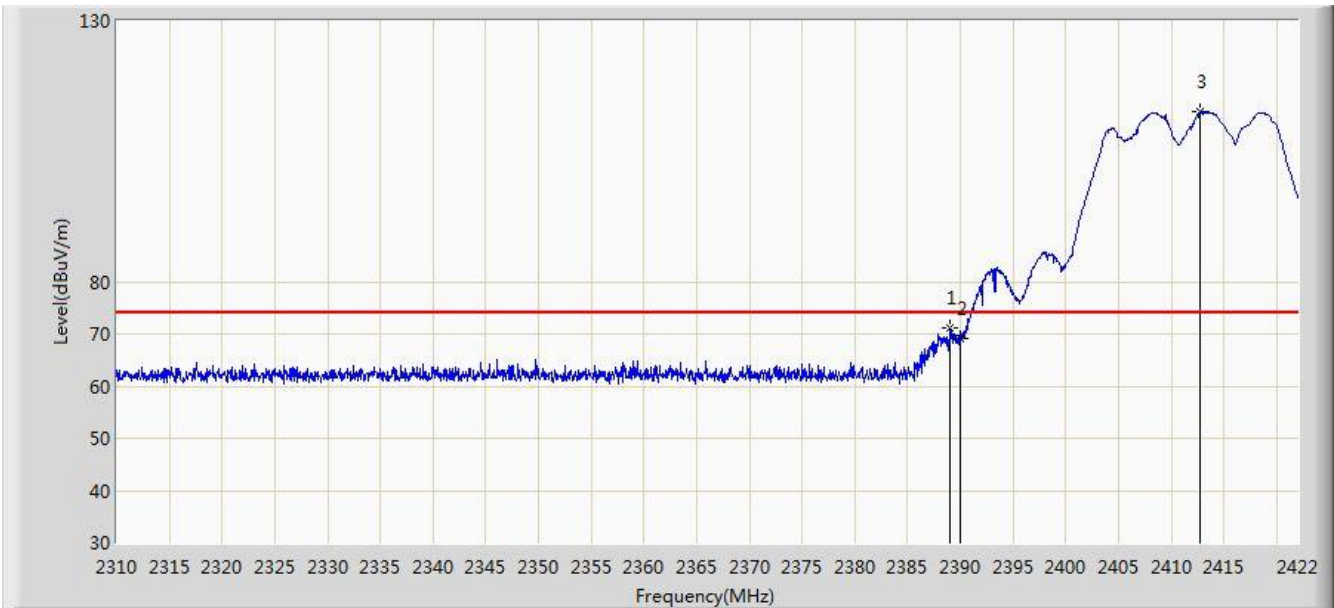


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.960	71.254	38.698	-2.746	74.000	32.556	PK
2			2390.000	69.220	36.666	-4.780	74.000	32.554	PK
3			2412.704	112.469	79.944	N/A	N/A	32.525	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 14:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0 + 1	

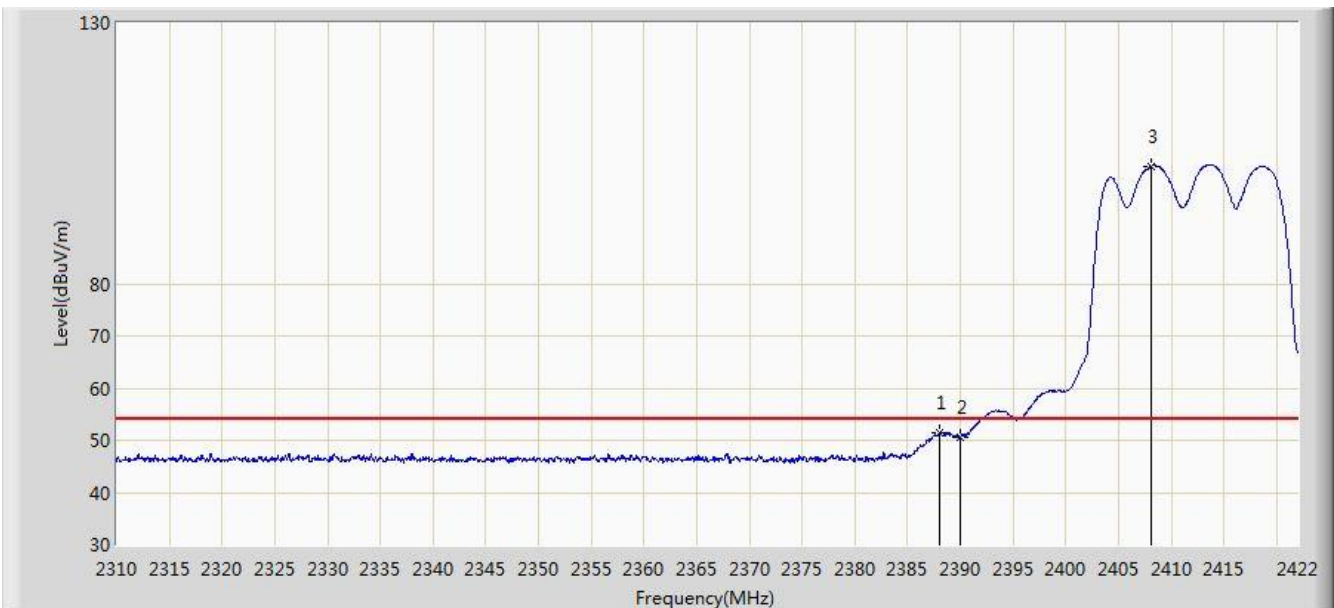


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.008	51.351	18.794	-2.649	54.000	32.558	AV
2			2390.000	50.454	17.900	-3.546	54.000	32.554	AV
3			2408.168	102.599	70.068	N/A	N/A	32.531	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 14:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz Ant 0 + 1	

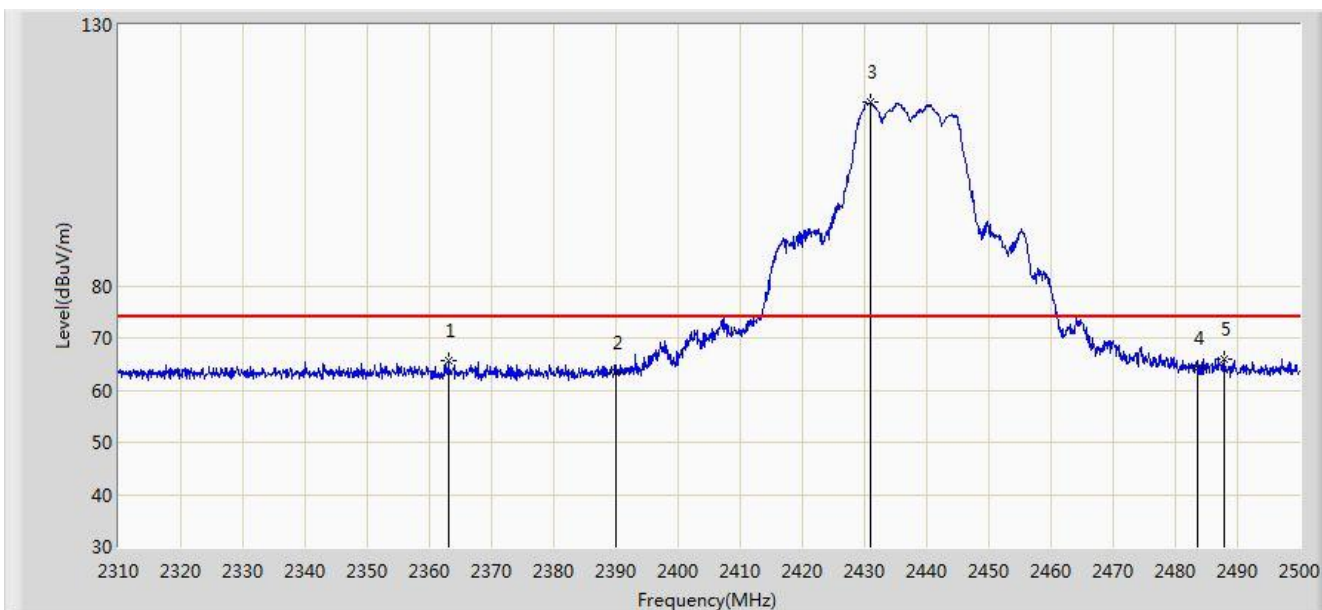


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2363.010	65.548	32.956	-8.452	74.000	32.592	PK
2			2390.000	63.470	30.916	-10.530	74.000	32.554	PK
3			2430.840	115.286	82.783	N/A	N/A	32.503	PK
4			2483.500	64.295	31.714	-9.705	74.000	32.580	PK
5			2487.840	66.047	33.453	-7.953	74.000	32.593	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 14:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz Ant 0 + 1	

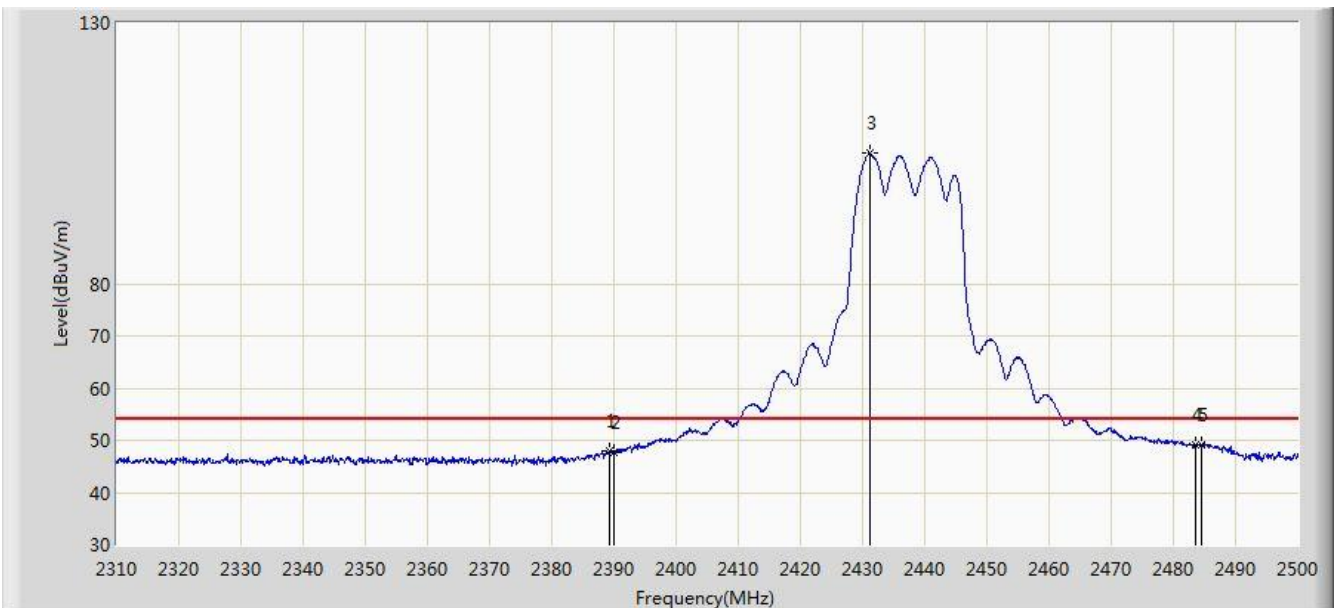


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.325	47.902	15.347	-6.098	54.000	32.555	AV
2			2390.000	47.687	15.133	-6.313	54.000	32.554	AV
3			2431.125	105.037	72.534	N/A	N/A	32.502	AV
4			2483.500	49.071	16.490	-4.929	54.000	32.580	AV
5			2484.515	49.107	16.523	-4.893	54.000	32.584	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 14:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz Ant 0 + 1	

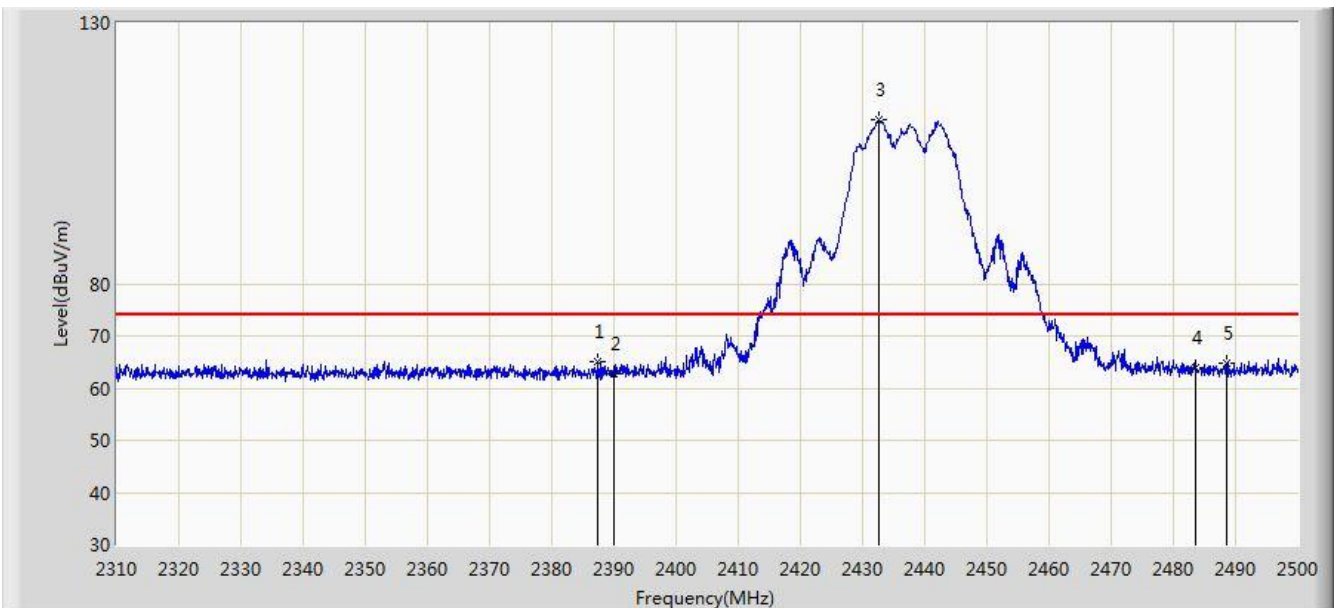


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.425	65.011	32.453	-8.989	74.000	32.558	PK
2			2390.000	62.847	30.293	-11.153	74.000	32.554	PK
3			2432.645	111.332	78.831	N/A	N/A	32.501	PK
4			2483.500	63.822	31.241	-10.178	74.000	32.580	PK
5			2488.505	64.846	32.250	-9.154	74.000	32.595	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 14:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2437MHz Ant 0 + 1	

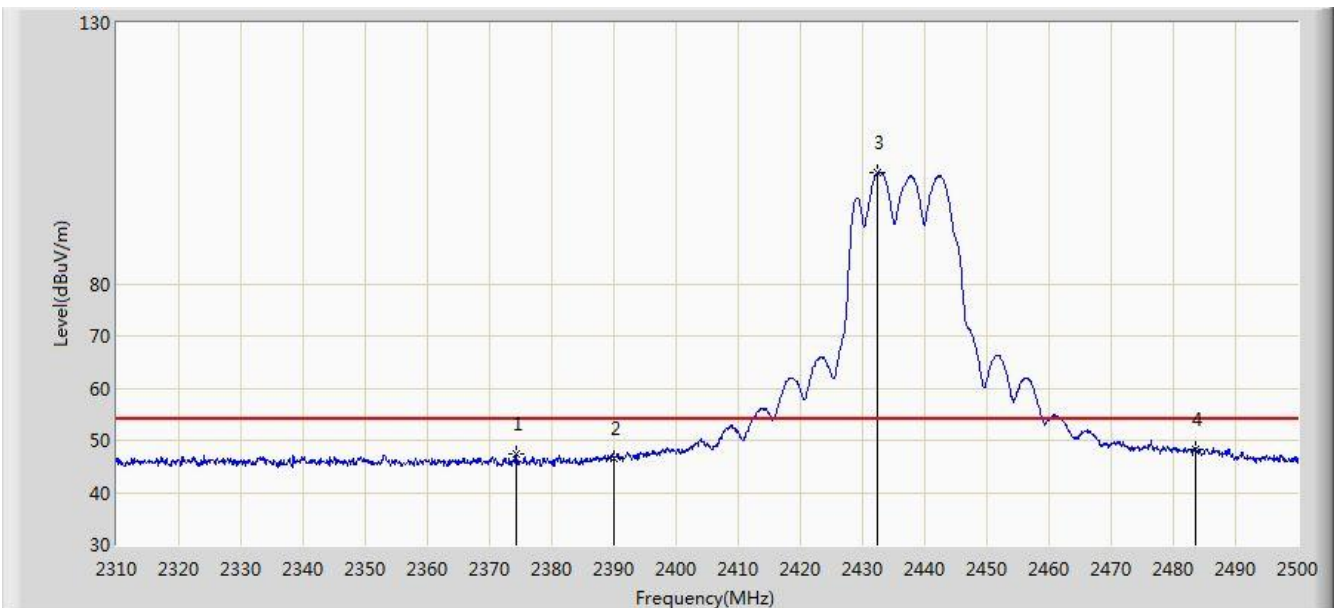

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2374.220	47.262	14.686	-6.738	54.000	32.576	AV
2			2390.000	46.655	14.101	-7.345	54.000	32.554	AV
3			2432.360	101.343	68.842	N/A	N/A	32.501	AV
4			2483.500	48.399	15.818	-5.601	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/08/10 - 17:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.576	112.839	80.334	38.839	74.000	32.505	PK
2			2483.500	72.626	40.045	-1.374	74.000	32.580	PK
3			2483.656	73.364	40.783	-0.636	74.000	32.581	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/08/10 - 17:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0 + 1	

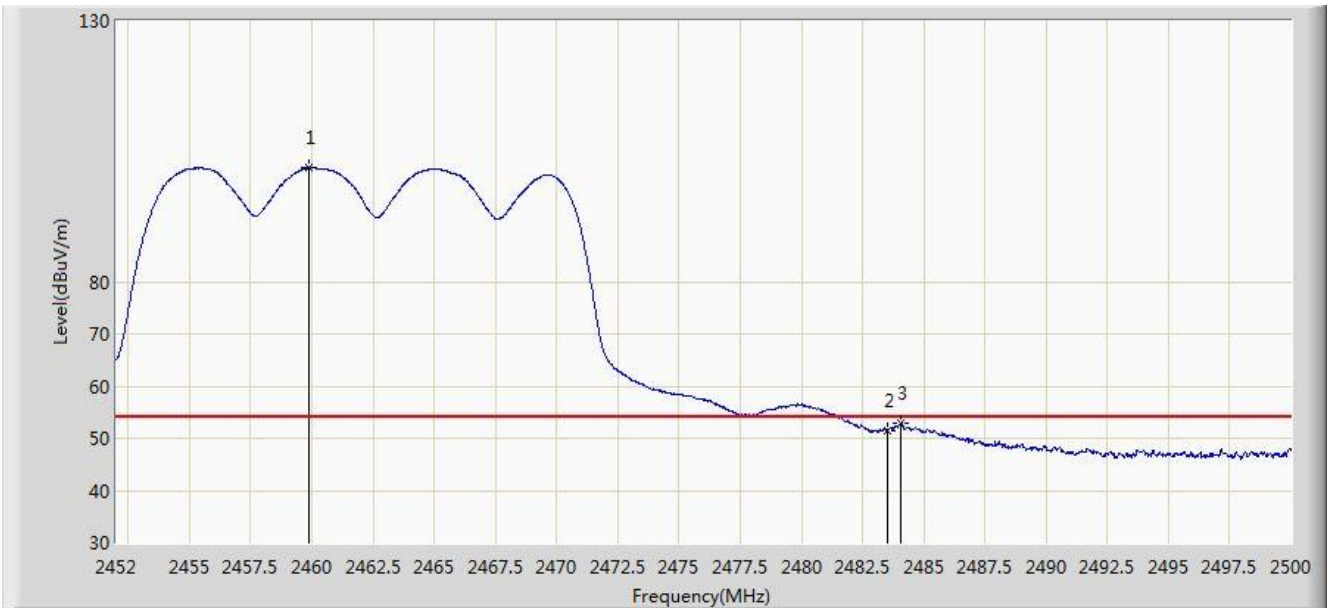


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.872	101.912	69.399	47.912	54.000	32.513	AV
2			2483.500	51.503	18.922	-2.497	54.000	32.580	AV
3			2484.064	52.857	20.275	-1.143	54.000	32.582	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/08/10 - 17:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0 + 1	

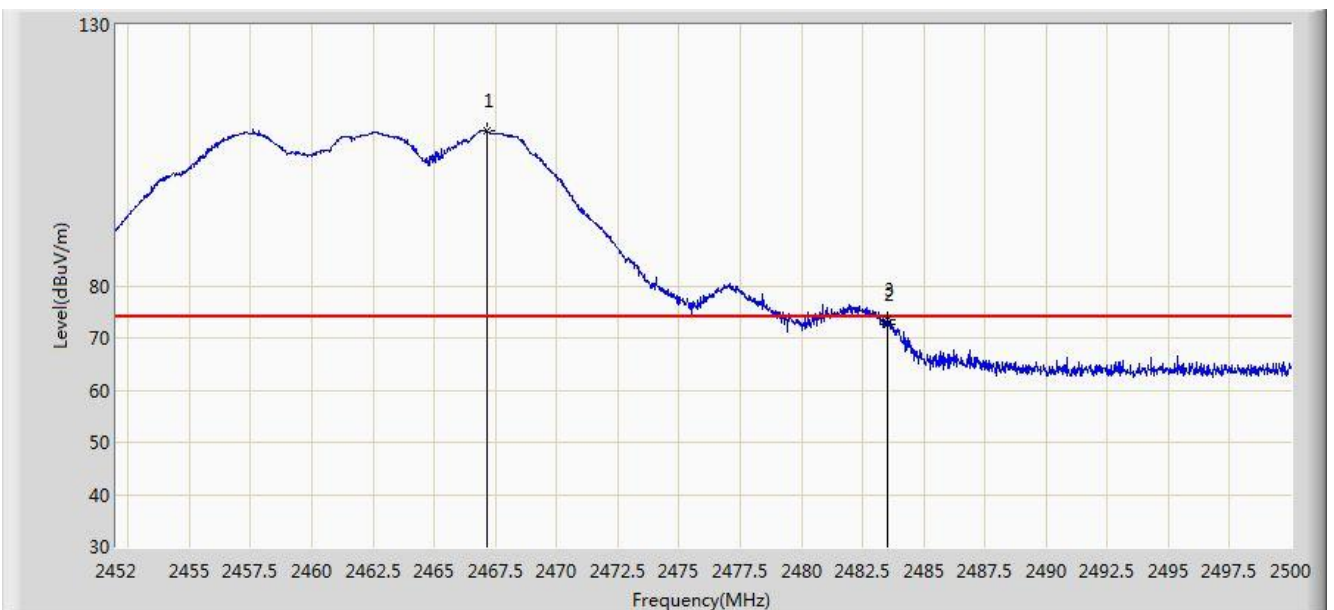


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.144	109.674	77.143	35.674	74.000	32.531	PK
2			2483.500	72.576	39.995	-1.424	74.000	32.580	PK
3			2483.536	73.450	40.869	-0.550	74.000	32.580	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/08/10 - 17:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0 + 1	

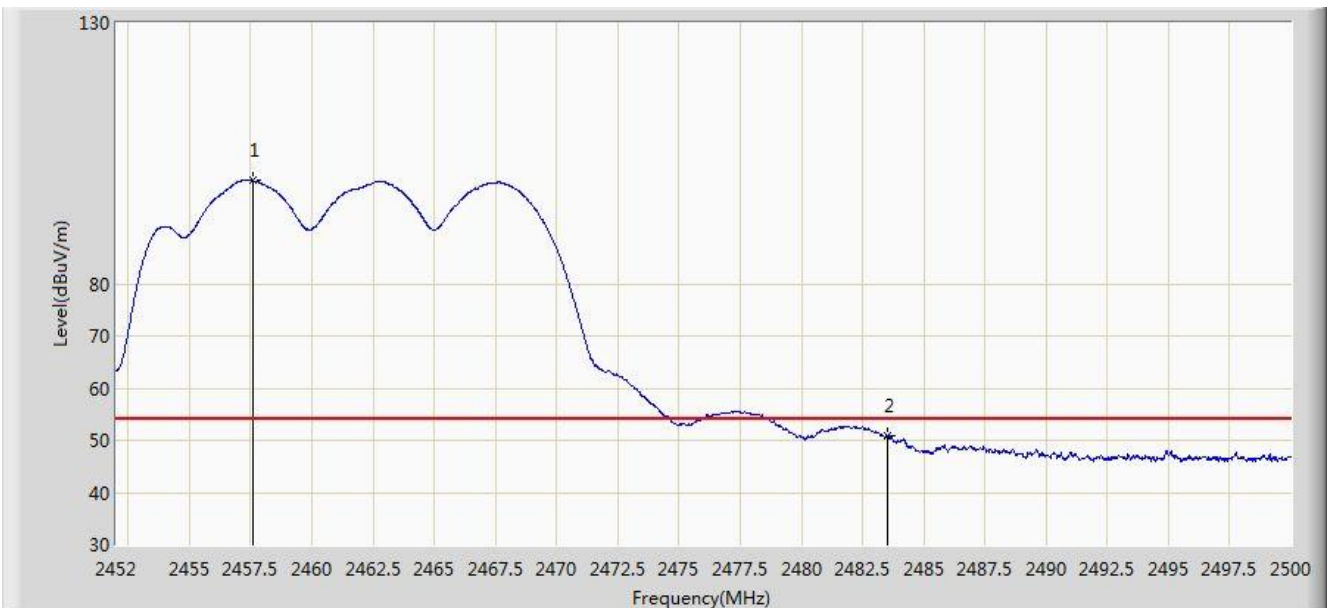


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.568	99.797	67.288	45.797	54.000	32.508	AV
2			2483.500	50.806	18.225	-3.194	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 14:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0 + 1	

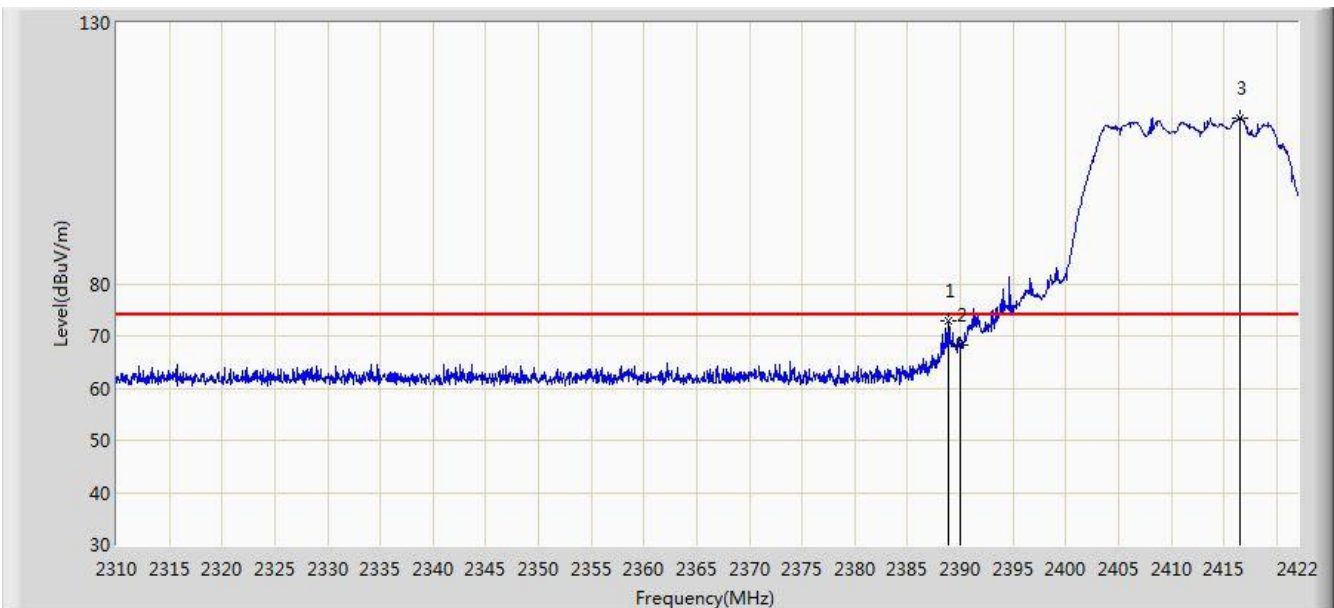


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.848	73.004	40.448	-0.996	74.000	32.556	PK
2			2390.000	68.404	35.850	-5.596	74.000	32.554	PK
3			2416.512	111.849	79.329	N/A	N/A	32.521	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 14:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0 + 1	

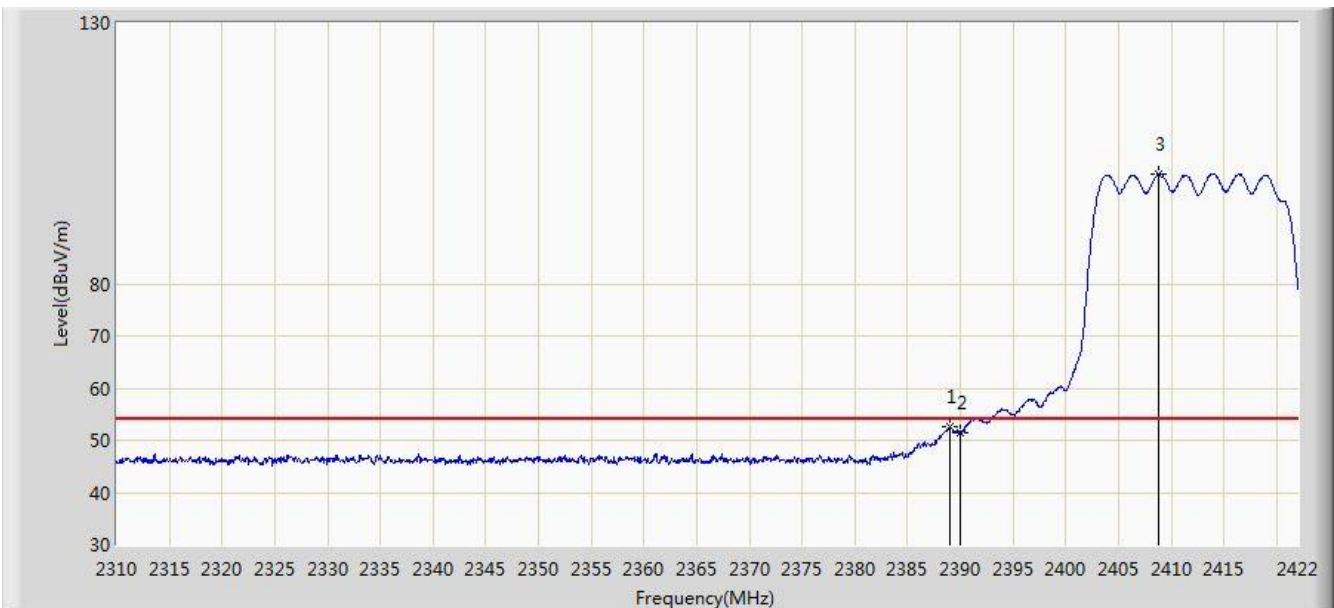


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.960	52.525	19.969	-1.475	54.000	32.556	AV
2			2390.000	51.539	18.985	-2.461	54.000	32.554	AV
3			2408.840	100.978	68.448	N/A	N/A	32.529	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 14:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0 + 1	

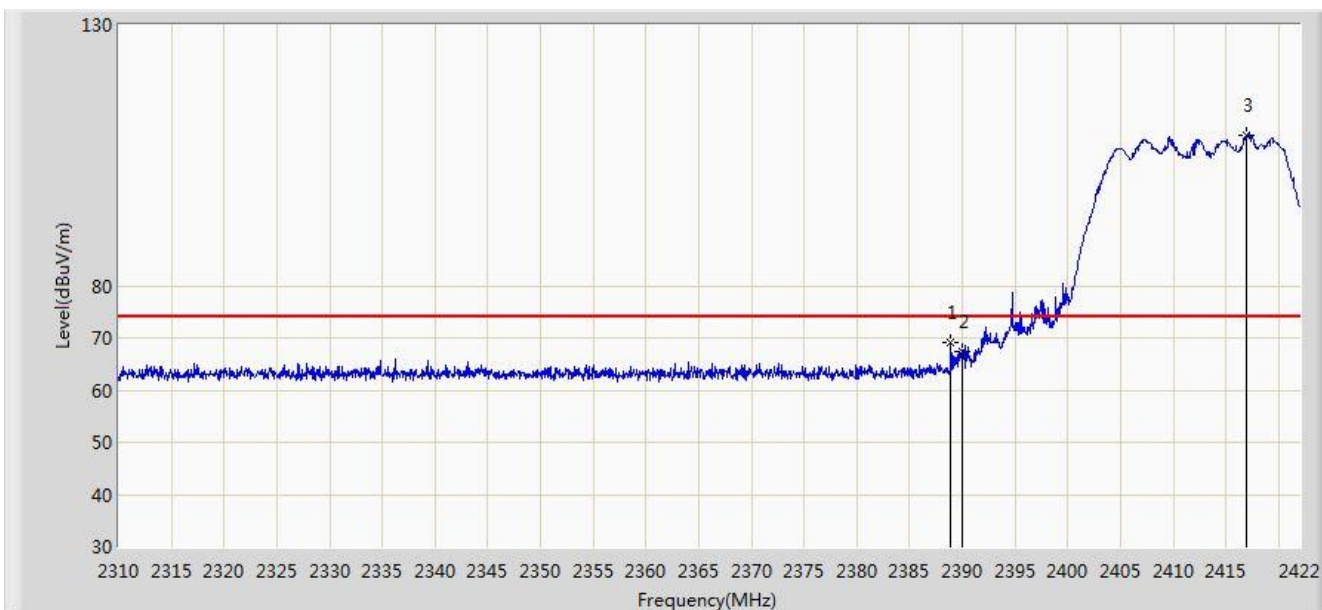


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.904	69.014	36.458	-4.986	74.000	32.556	PK
2			2390.000	67.440	34.886	-6.560	74.000	32.554	PK
3			2416.960	108.810	76.290	N/A	N/A	32.520	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 14:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0 + 1	

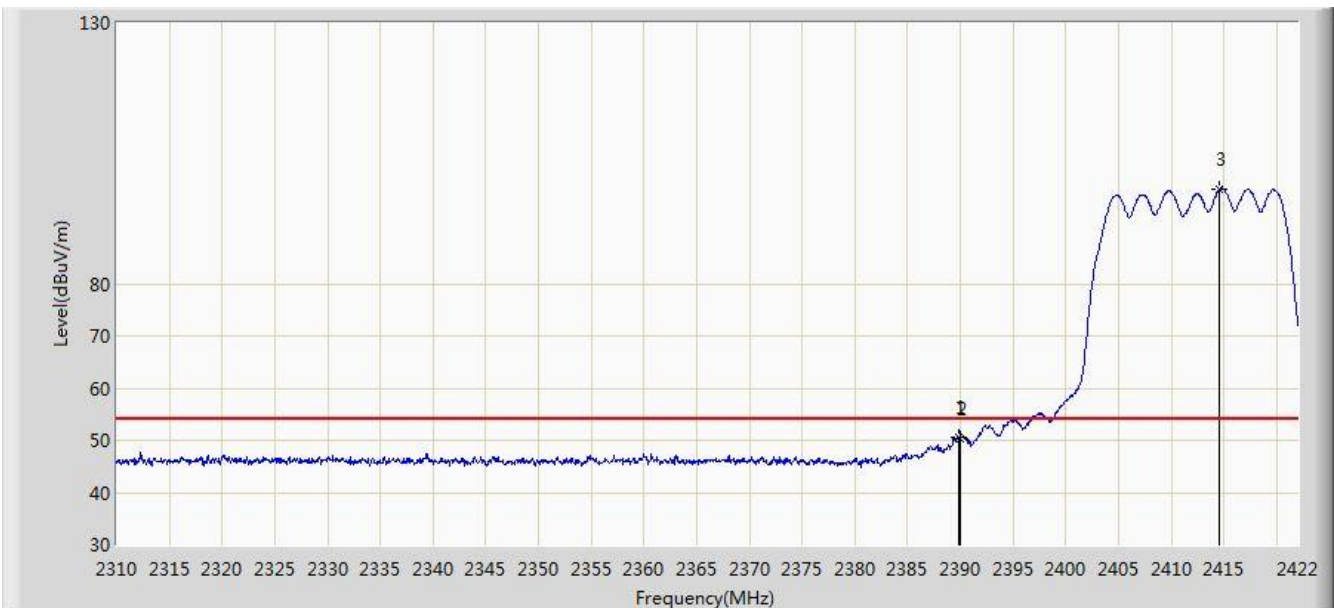


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.856	50.665	18.110	-3.335	54.000	32.555	AV
2			2390.000	50.433	17.879	-3.567	54.000	32.554	AV
3			2414.608	98.229	65.707	N/A	N/A	32.522	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 14:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz Ant 0 + 1	

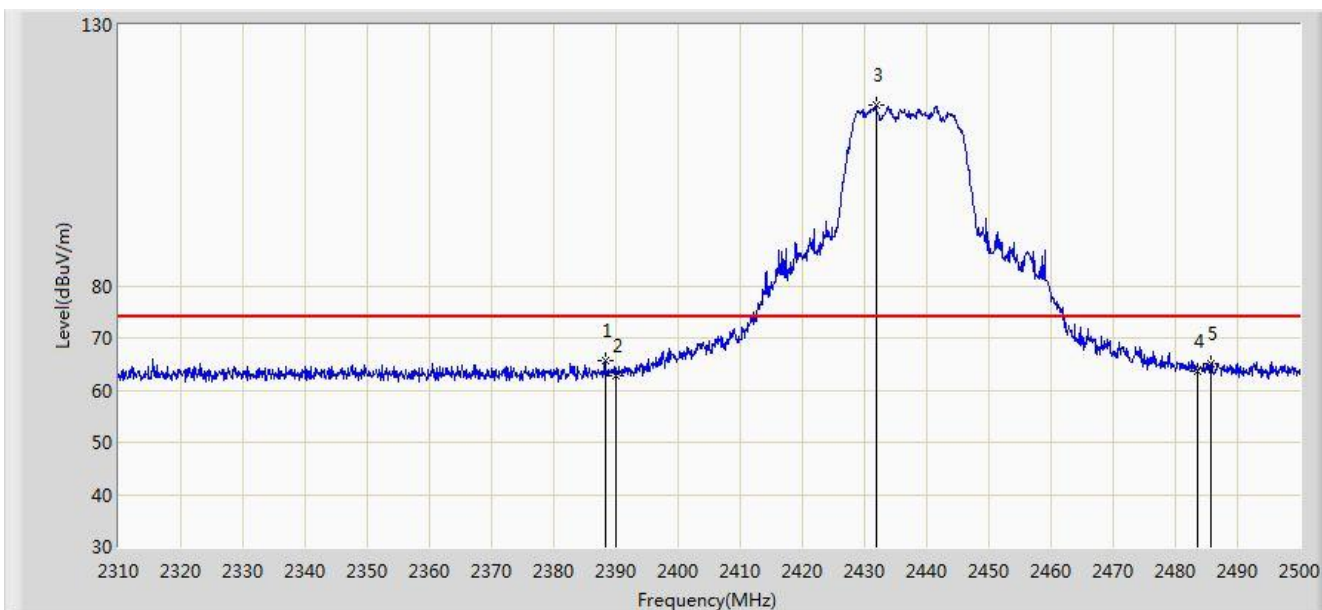


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.280	65.512	32.955	-8.488	74.000	32.557	PK
2			2390.000	62.896	30.342	-11.104	74.000	32.554	PK
3			2431.885	114.780	82.278	N/A	N/A	32.502	PK
4			2483.500	63.679	31.098	-10.321	74.000	32.580	PK
5			2485.750	65.137	32.550	-8.863	74.000	32.587	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 14:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz Ant 0 + 1	

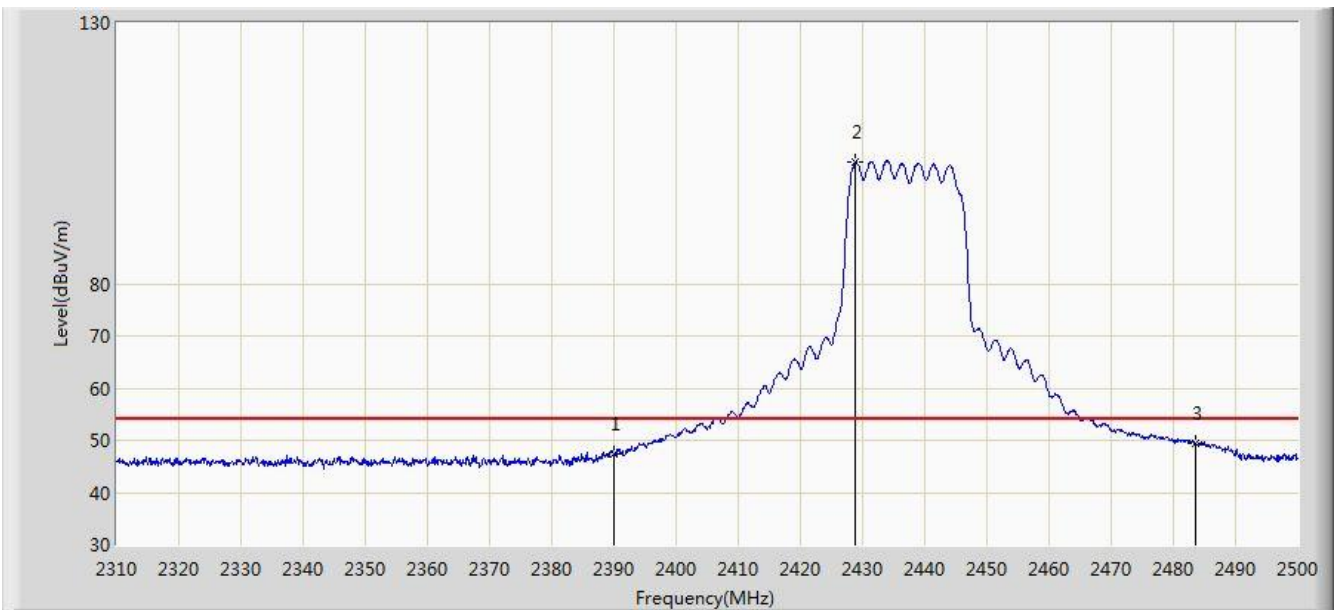


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.372	14.818	-6.628	54.000	32.554	AV
2			2428.845	103.201	70.695	N/A	N/A	32.506	AV
3			2483.500	49.420	16.839	-4.580	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 14:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz Ant 0 + 1	

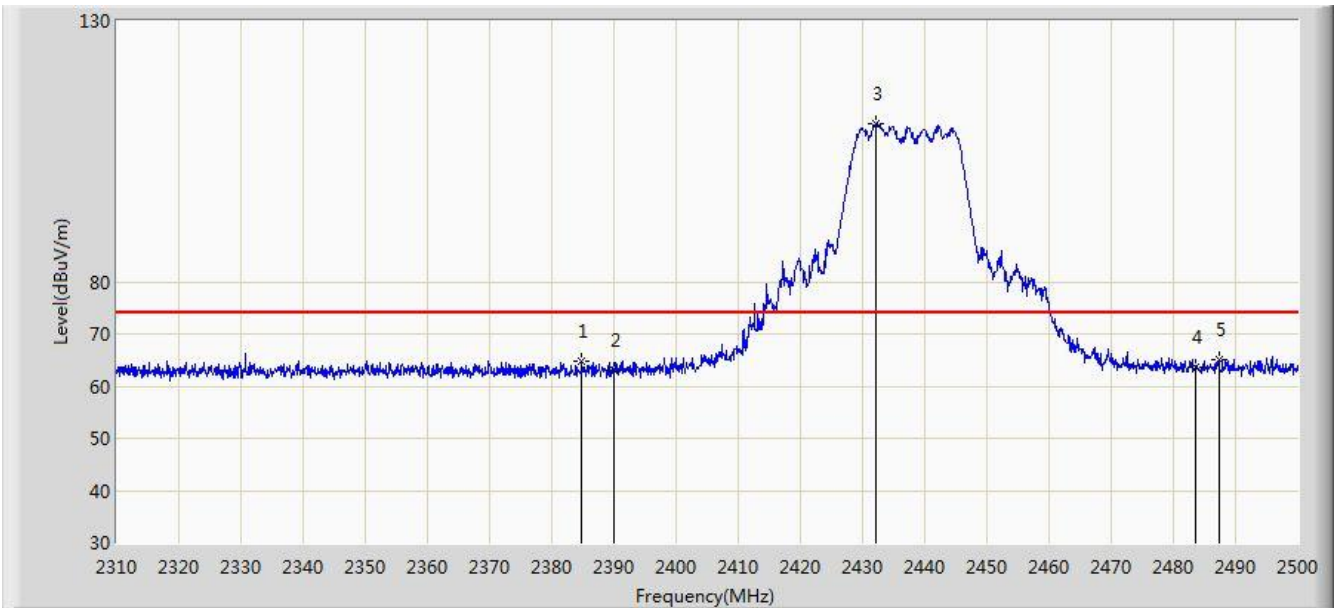


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.860	64.662	32.101	-9.338	74.000	32.562	PK
2			2390.000	62.991	30.437	-11.009	74.000	32.554	PK
3			2432.075	110.384	77.882	N/A	N/A	32.502	PK
4			2483.500	63.666	31.085	-10.334	74.000	32.580	PK
5			2487.270	65.144	32.552	-8.856	74.000	32.592	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 15:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2437MHz Ant 0 + 1	

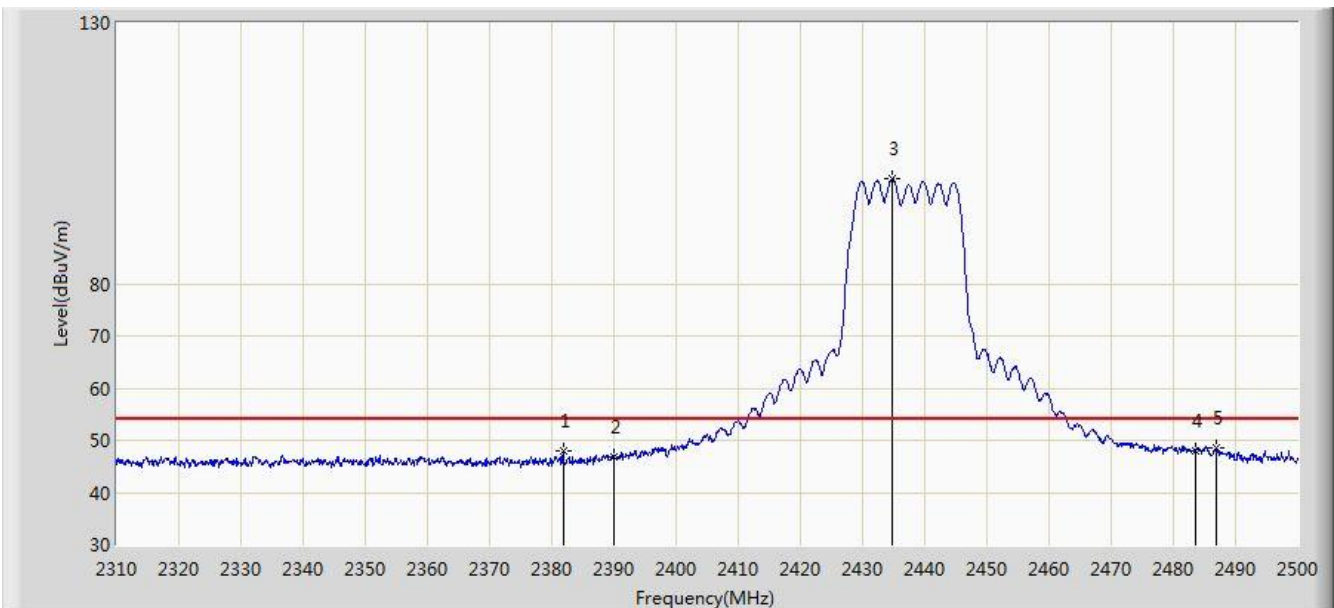


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2381.820	48.111	15.545	-5.889	54.000	32.566	AV
2			2390.000	46.752	14.198	-7.248	54.000	32.554	AV
3			2434.735	100.096	67.597	N/A	N/A	32.499	AV
4			2483.500	48.024	15.443	-5.976	54.000	32.580	AV
5			2486.890	48.504	15.913	-5.496	54.000	32.590	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 15:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0 + 1	

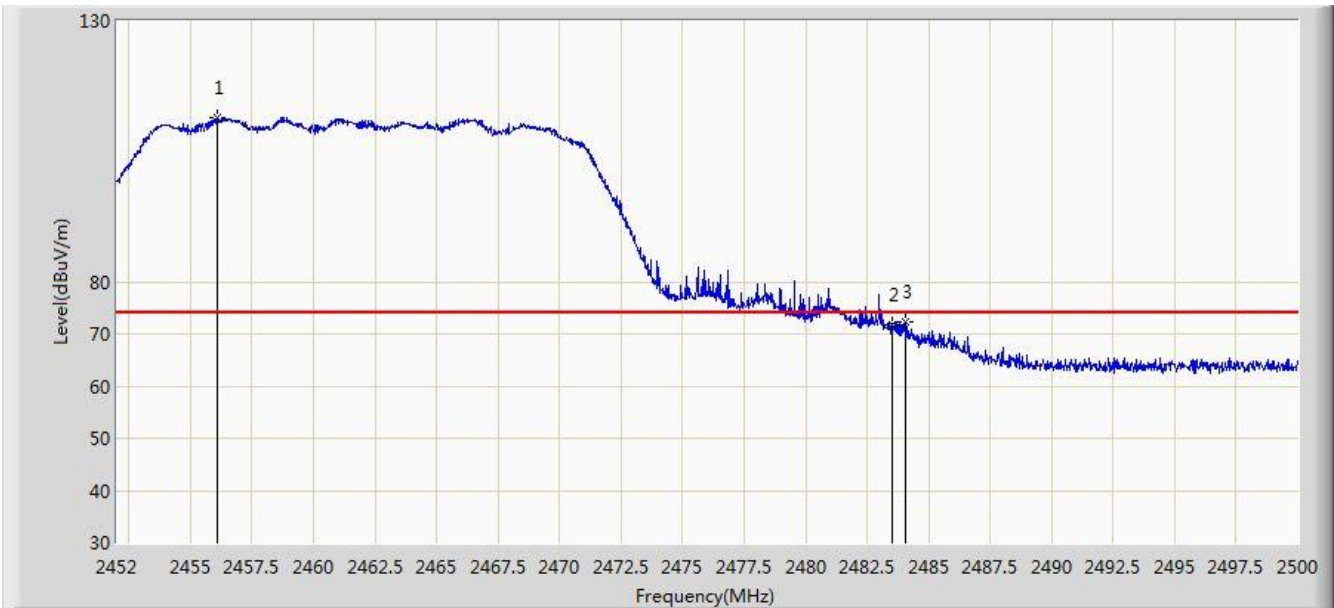


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2456.080	111.490	78.984	N/A	N/A	32.506	PK
2			2483.500	71.664	39.083	-2.336	74.000	32.580	PK
3			2484.088	72.432	39.850	-1.568	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 15:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0 + 1	

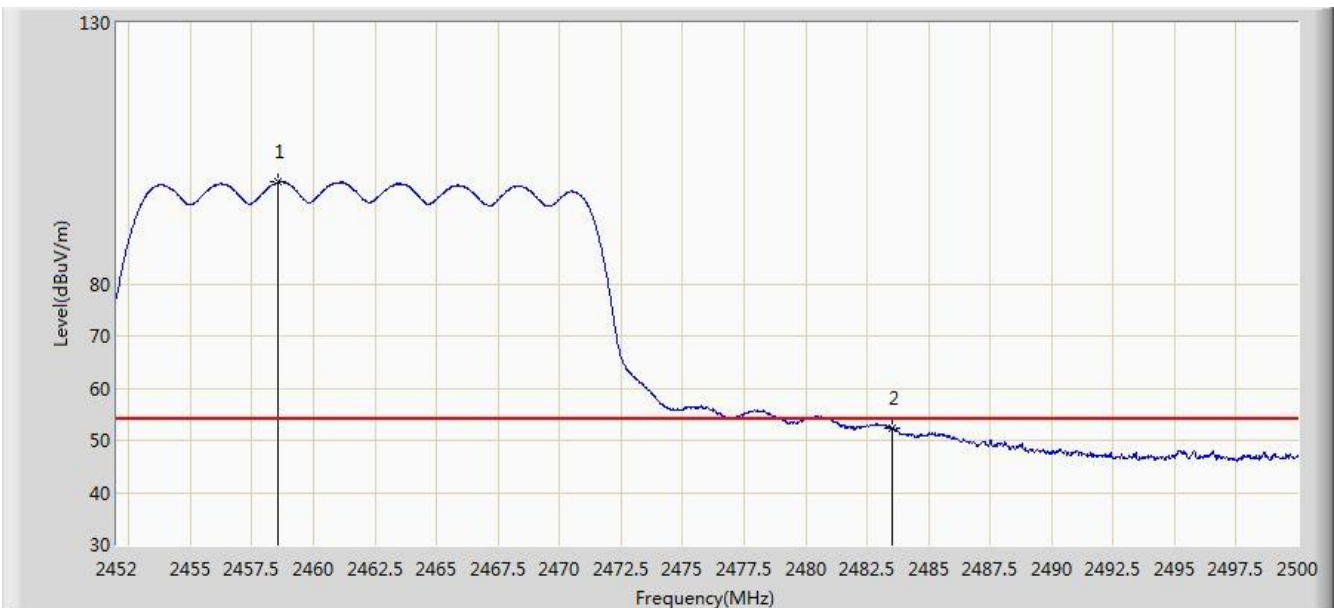

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2458.528	99.453	66.943	N/A	N/A	32.510	AV
2			2483.500	52.269	19.688	-1.731	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 15:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2462.128	108.473	75.956	N/A	N/A	32.516	PK
2			2483.500	66.519	33.938	-7.481	74.000	32.580	PK
3			2484.232	69.043	36.460	-4.957	74.000	32.583	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 15:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0 + 1	

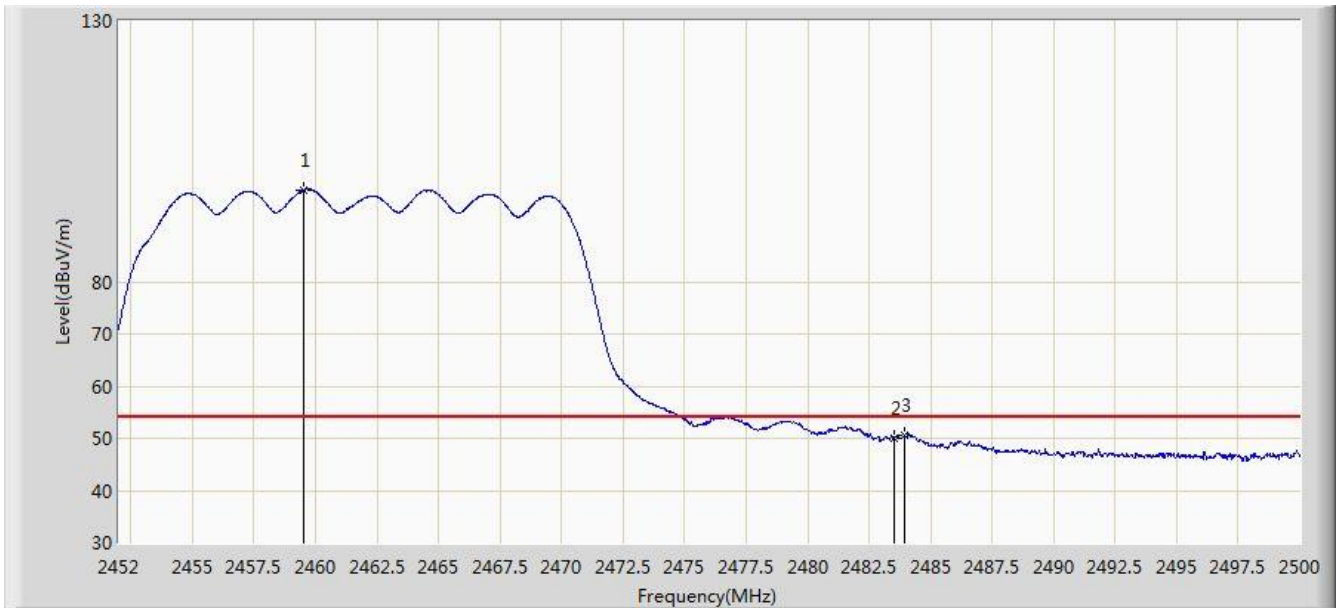


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2459.512	97.600	65.088	N/A	N/A	32.512	AV
2			2483.500	50.086	17.505	-3.914	54.000	32.580	AV
3			2483.920	50.709	18.127	-3.291	54.000	32.582	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/08/10 - 16:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0 + 1	

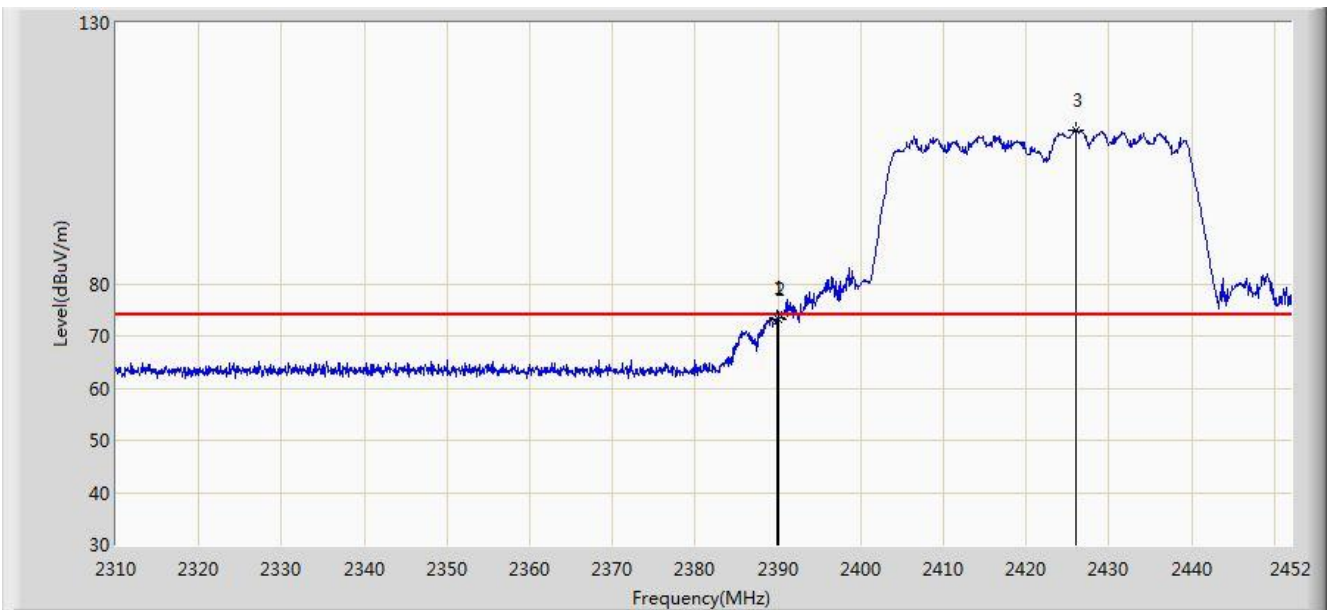


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.875	73.560	41.005	-0.440	74.000	32.555	PK
2			2390.000	73.181	40.627	-0.819	74.000	32.554	PK
3		*	2426.085	109.485	76.976	35.485	74.000	32.509	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/08/10 - 16:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0 + 1	

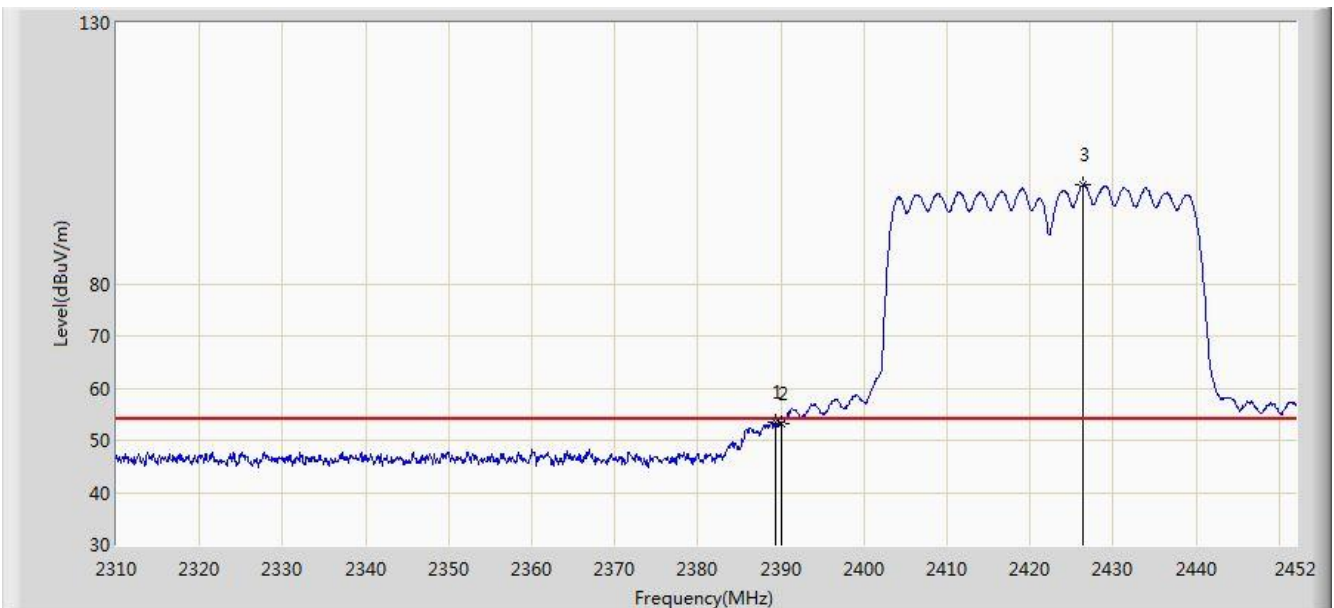


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.307	53.401	20.846	-0.599	54.000	32.555	AV
2			2390.000	53.113	20.559	-0.887	54.000	32.554	AV
3		*	2426.298	98.973	66.464	44.973	54.000	32.508	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/08/10 - 16:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0 + 1	

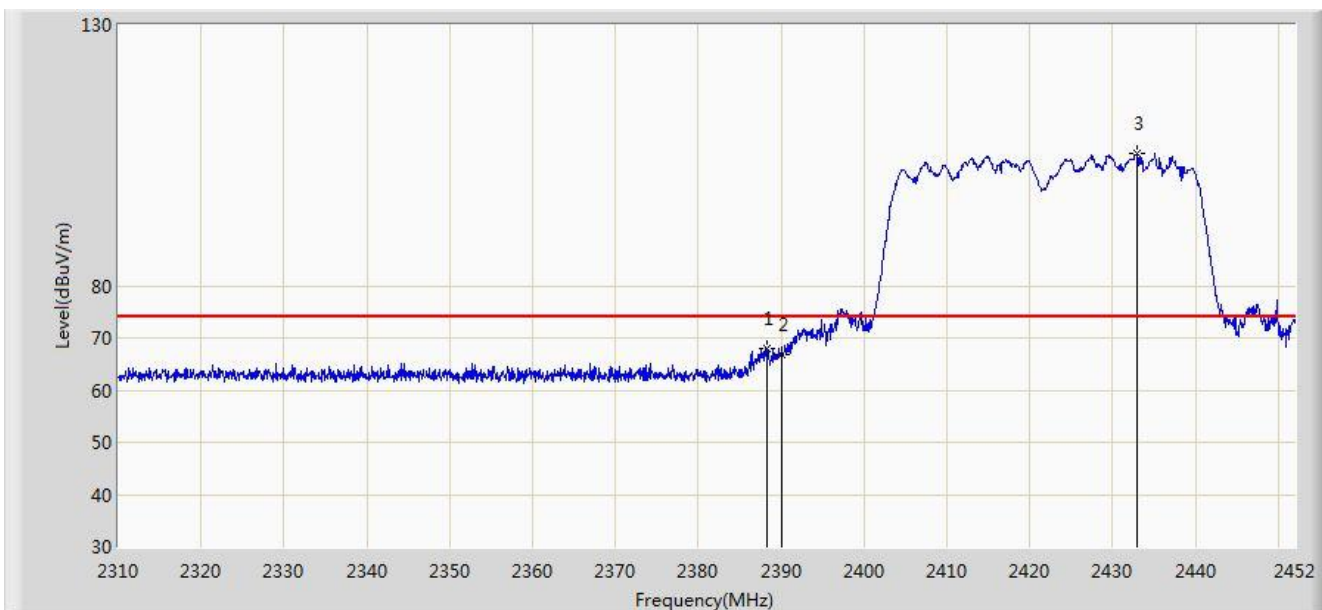


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.242	68.103	35.546	-5.897	74.000	32.557	PK
2			2390.000	66.847	34.293	-7.153	74.000	32.554	PK
3		*	2432.901	105.343	72.842	31.343	74.000	32.501	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/08/10 - 16:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0 + 1	

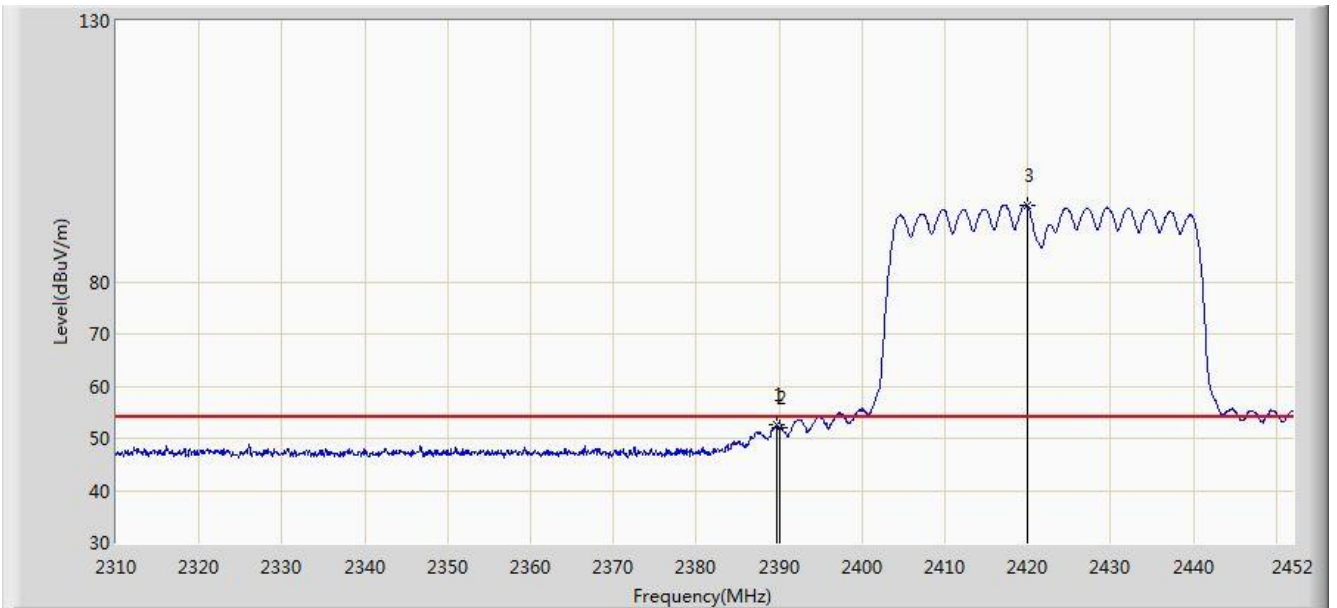


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.733	52.549	19.994	-1.451	54.000	32.555	AV
2			2390.000	52.075	19.521	-1.925	54.000	32.554	AV
3		*	2419.908	94.538	62.022	40.538	54.000	32.517	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/08/13 - 20:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz Ant 0 + 1	

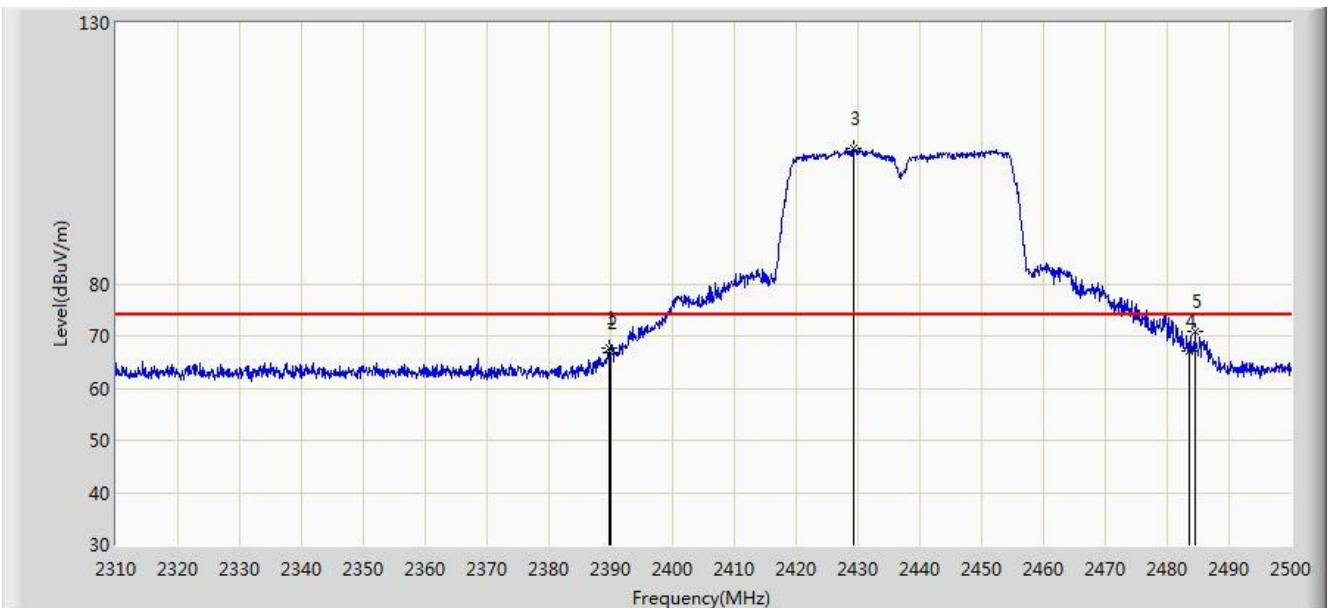


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	67.573	35.018	-6.427	74.000	32.555	PK
2			2390.000	66.755	34.201	-7.245	74.000	32.554	PK
3			2429.320	105.940	73.435	N/A	N/A	32.505	PK
4			2483.500	67.207	34.626	-6.793	74.000	32.580	PK
5			2484.420	70.959	38.376	-3.041	74.000	32.583	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 15:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz Ant 0 + 1	

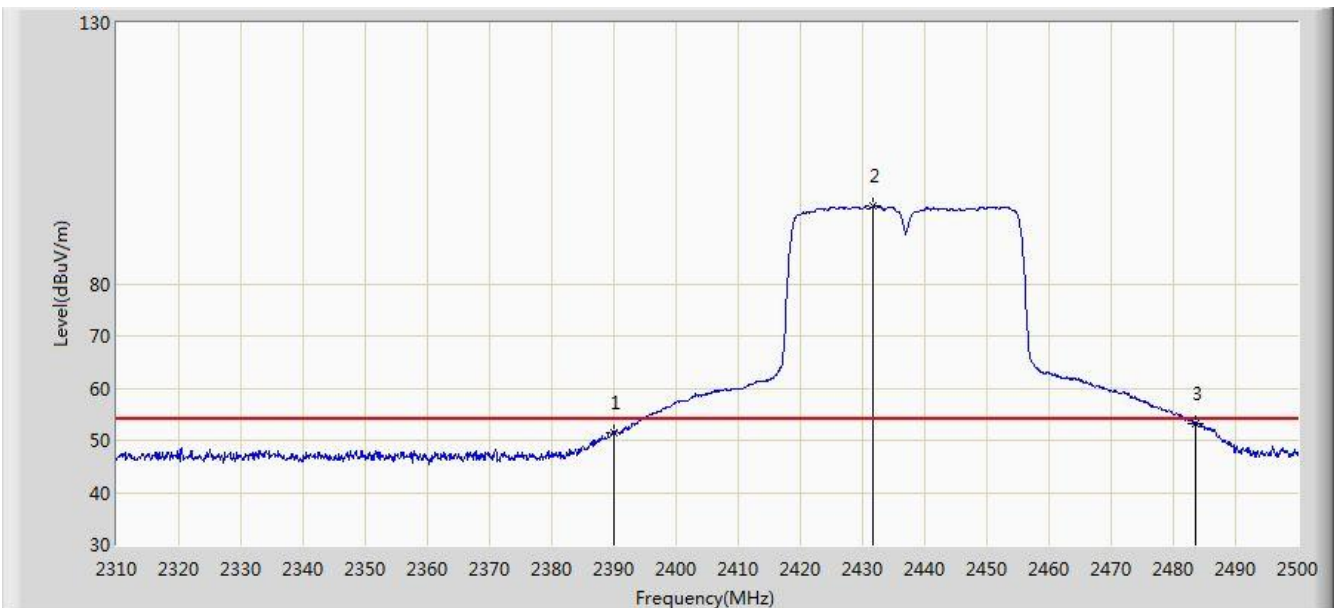


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.307	18.753	-2.693	54.000	32.554	AV
2			2431.695	94.857	62.355	N/A	N/A	32.502	AV
3			2483.500	53.179	20.598	-0.821	54.000	32.580	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 15:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz Ant 0 + 1	

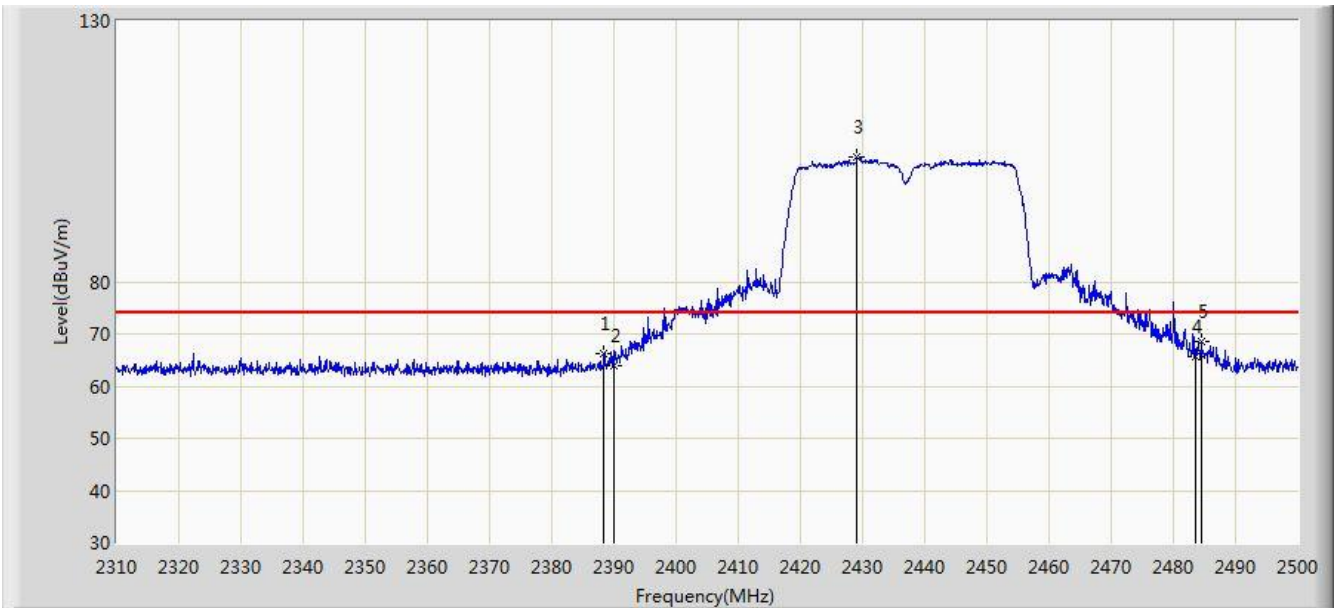


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.375	66.242	33.685	-7.758	74.000	32.557	PK
2			2390.000	63.875	31.321	-10.125	74.000	32.554	PK
3			2429.130	103.777	71.272	N/A	N/A	32.505	PK
4			2483.500	65.692	33.111	-8.308	74.000	32.580	PK
5			2484.515	68.554	35.970	-5.446	74.000	32.584	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 15:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2437MHz Ant 0 + 1	

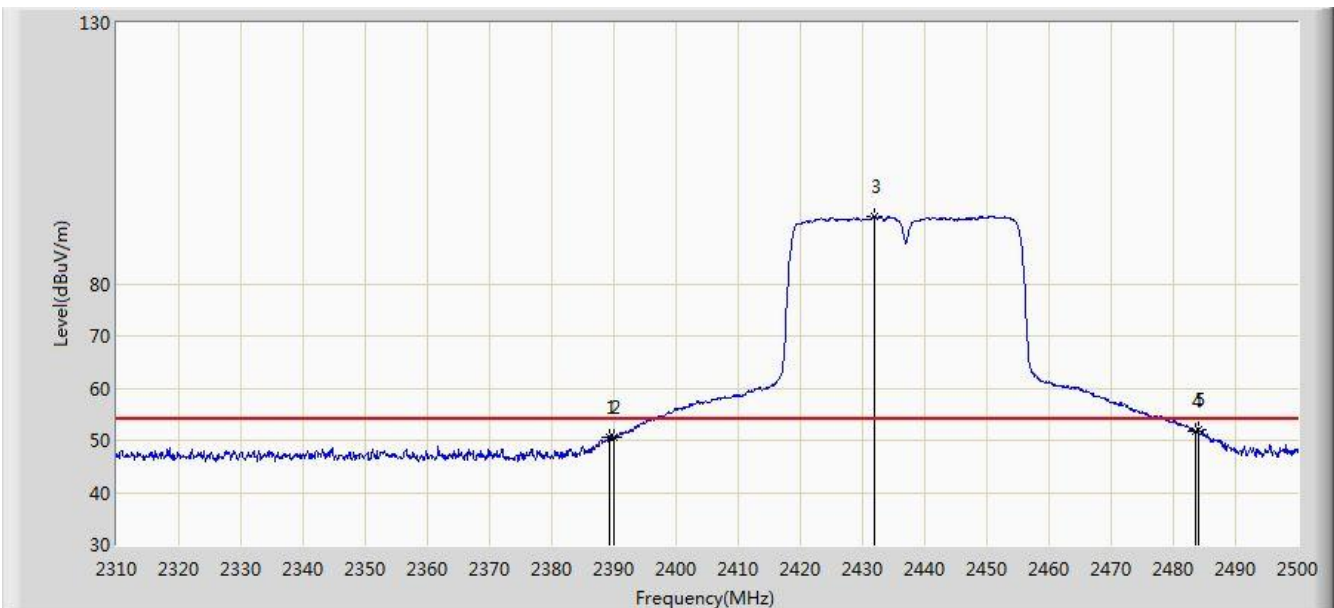


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.230	50.673	18.117	-3.327	54.000	32.555	AV
2			2390.000	50.655	18.101	-3.345	54.000	32.554	AV
3			2431.885	92.922	60.420	N/A	N/A	32.502	AV
4			2483.500	51.727	19.146	-2.273	54.000	32.580	AV
5			2483.945	51.920	19.338	-2.080	54.000	32.582	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 16:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0 + 1	

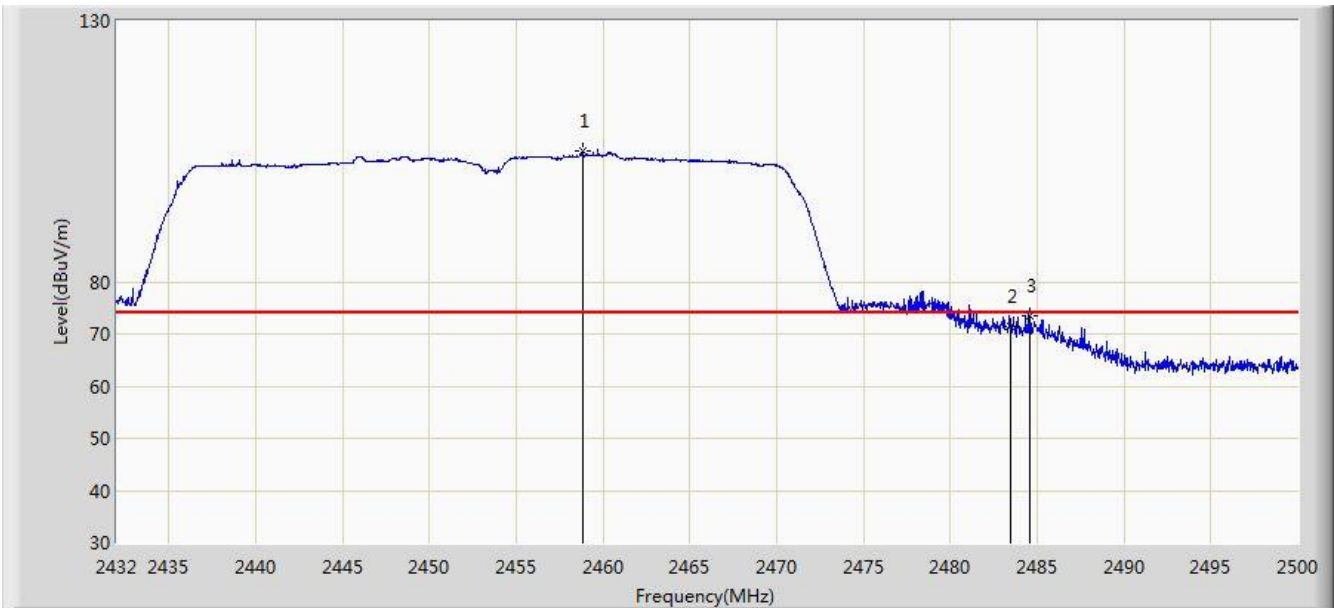


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2458.826	105.011	72.500	N/A	N/A	32.511	PK
2			2483.500	71.348	38.767	-2.652	74.000	32.580	PK
3			2484.598	73.348	40.764	-0.652	74.000	32.584	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 16:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0 + 1	

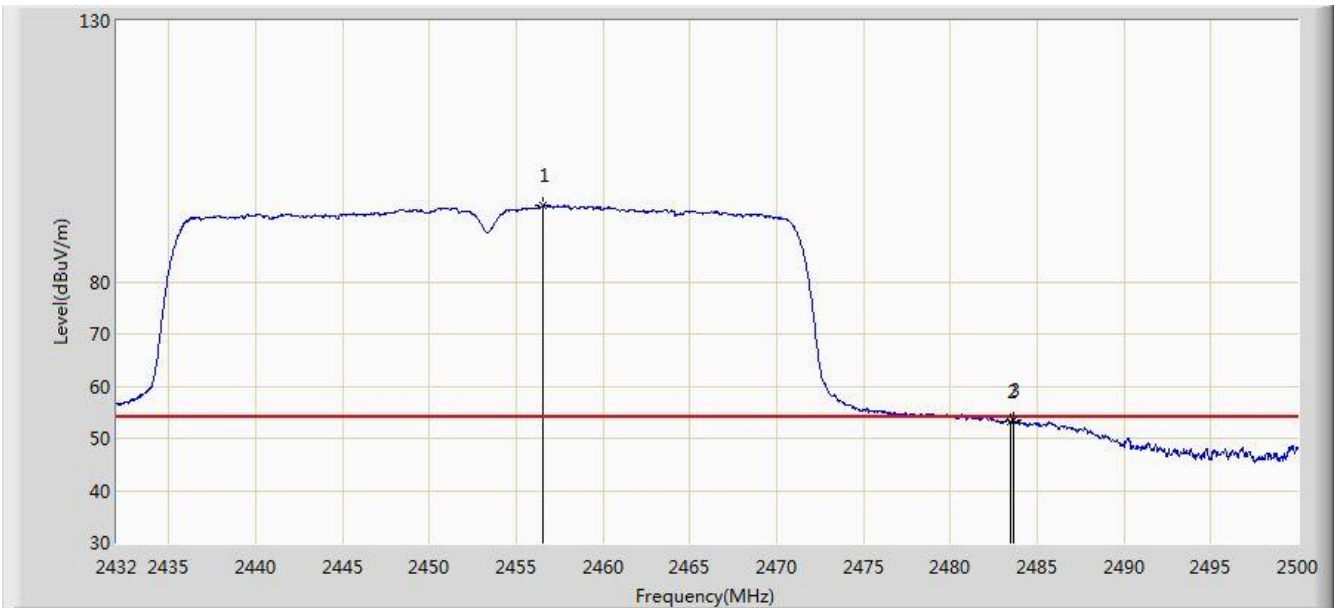


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2456.582	94.523	62.016	N/A	N/A	32.507	AV
2			2483.500	53.192	20.611	-0.808	54.000	32.580	AV
3			2483.612	53.518	20.937	-0.482	54.000	32.581	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 16:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0 + 1	

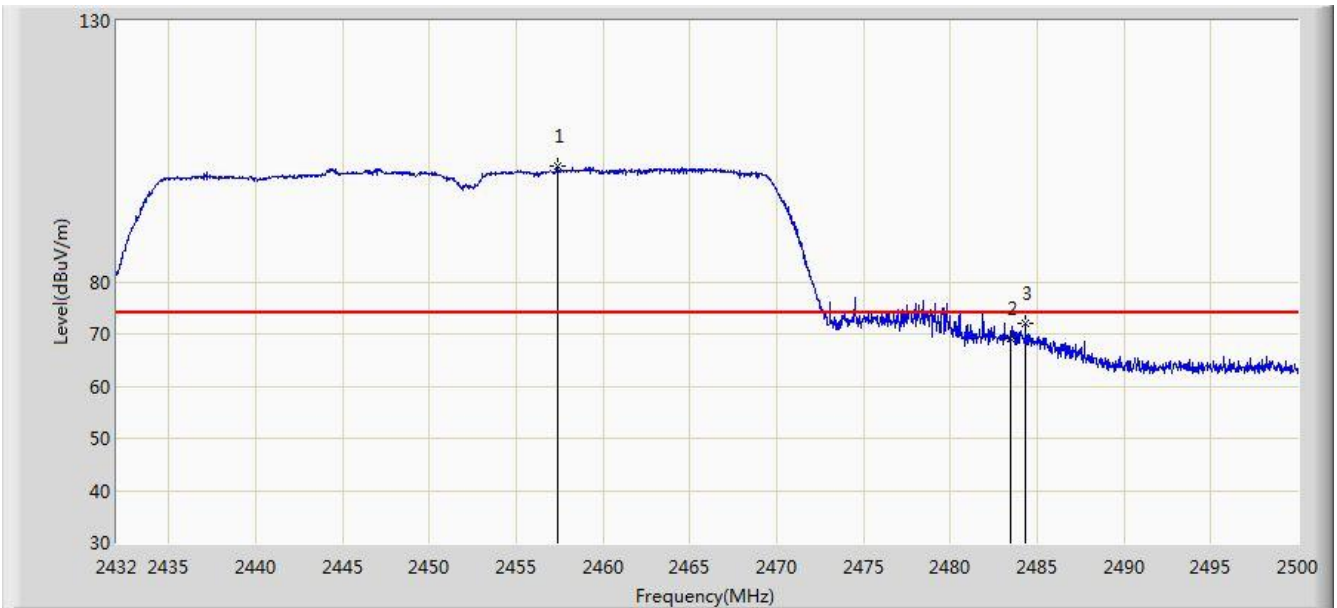


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2457.364	102.209	69.701	N/A	N/A	32.508	PK
2			2483.500	69.031	36.450	-4.969	74.000	32.580	PK
3			2484.360	71.919	39.336	-2.081	74.000	32.583	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 16:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0 + 1	

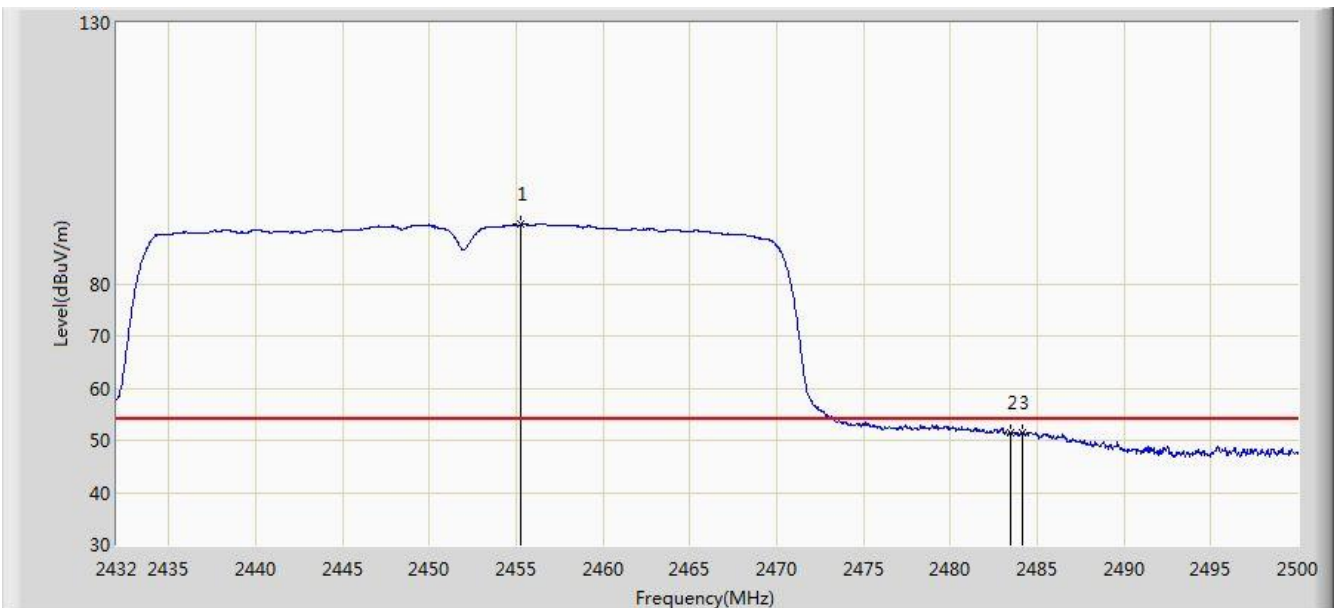


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2455.256	91.345	58.841	N/A	N/A	32.504	AV
2			2483.500	51.387	18.806	-2.613	54.000	32.580	AV
3			2484.190	51.533	18.950	-2.467	54.000	32.582	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 16:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz Ant 0 + 1	

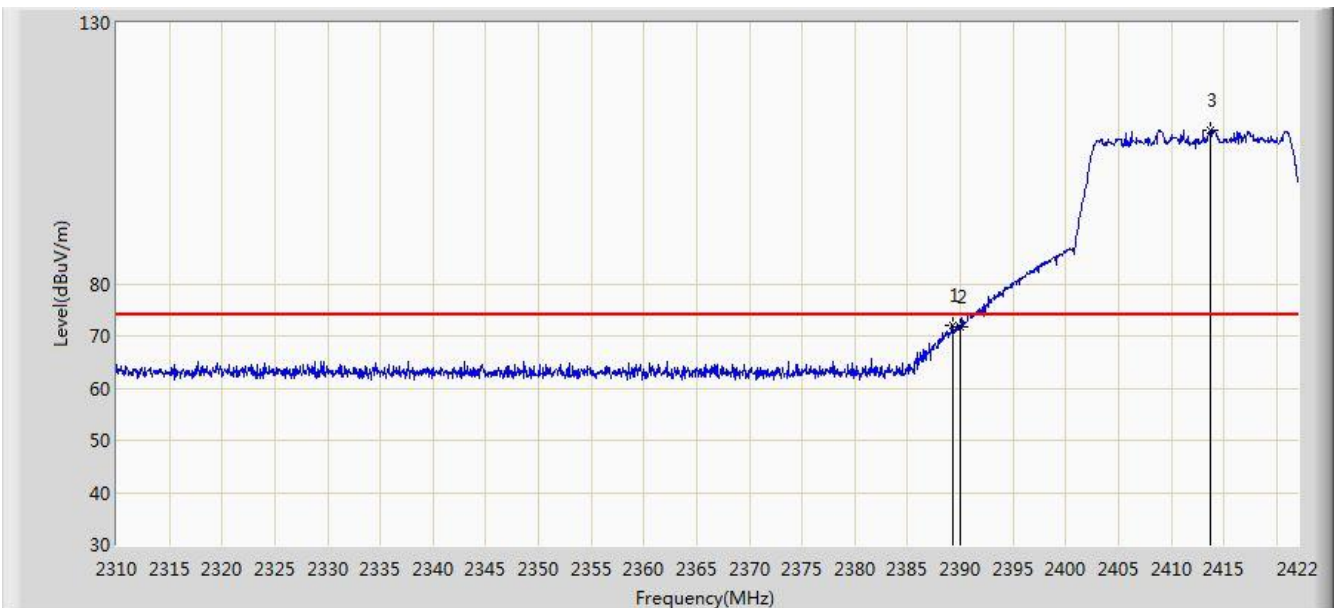


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.296	72.022	39.467	-1.978	74.000	32.555	PK
2			2390.000	71.859	39.305	-2.141	74.000	32.554	PK
3			2413.768	109.393	76.870	N/A	N/A	32.523	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 16:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz Ant 0 + 1	

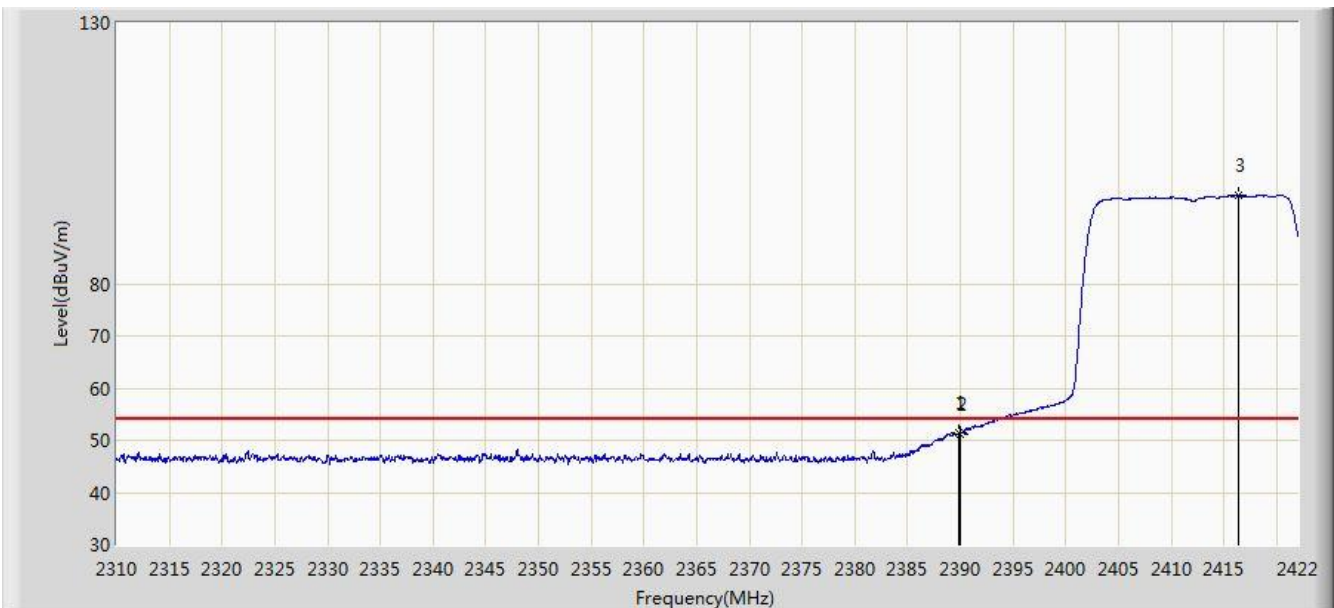


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.856	51.549	18.994	-2.451	54.000	32.555	AV
2			2390.000	51.299	18.745	-2.701	54.000	32.554	AV
3			2416.344	96.946	64.426	N/A	N/A	32.520	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 16:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz Ant 0 + 1	

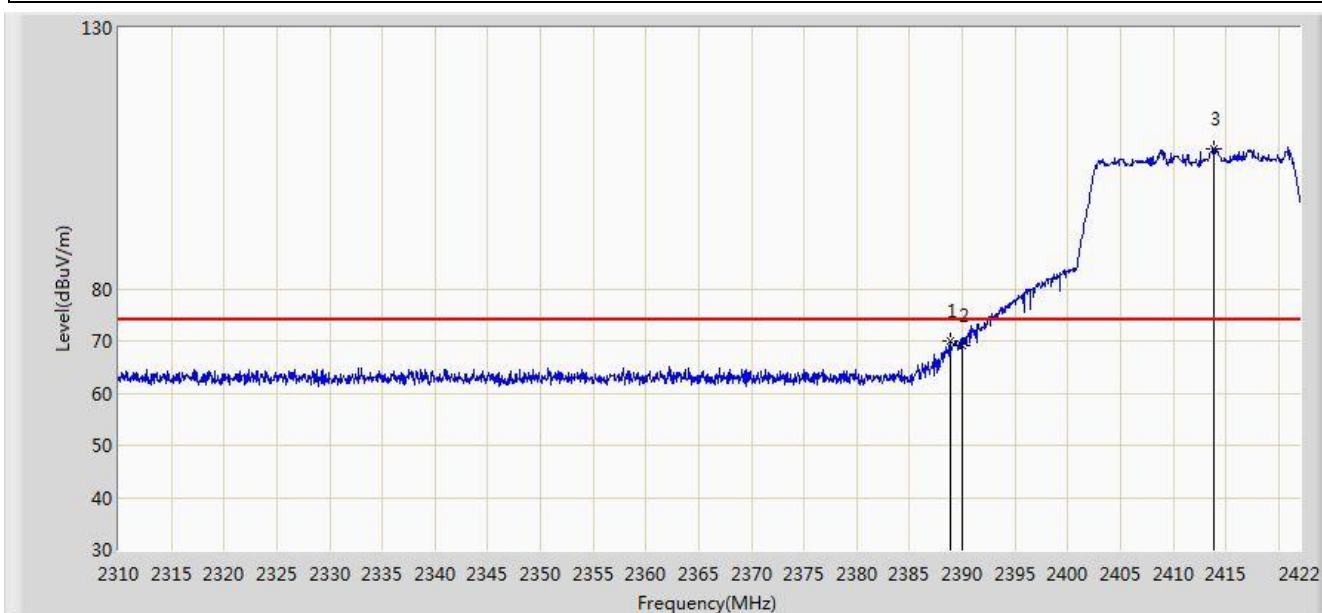


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.848	70.002	37.446	-3.998	74.000	32.556	PK
2			2390.000	69.206	36.652	-4.794	74.000	32.554	PK
3			2413.824	106.930	74.407	N/A	N/A	32.523	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 16:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz Ant 0 + 1	

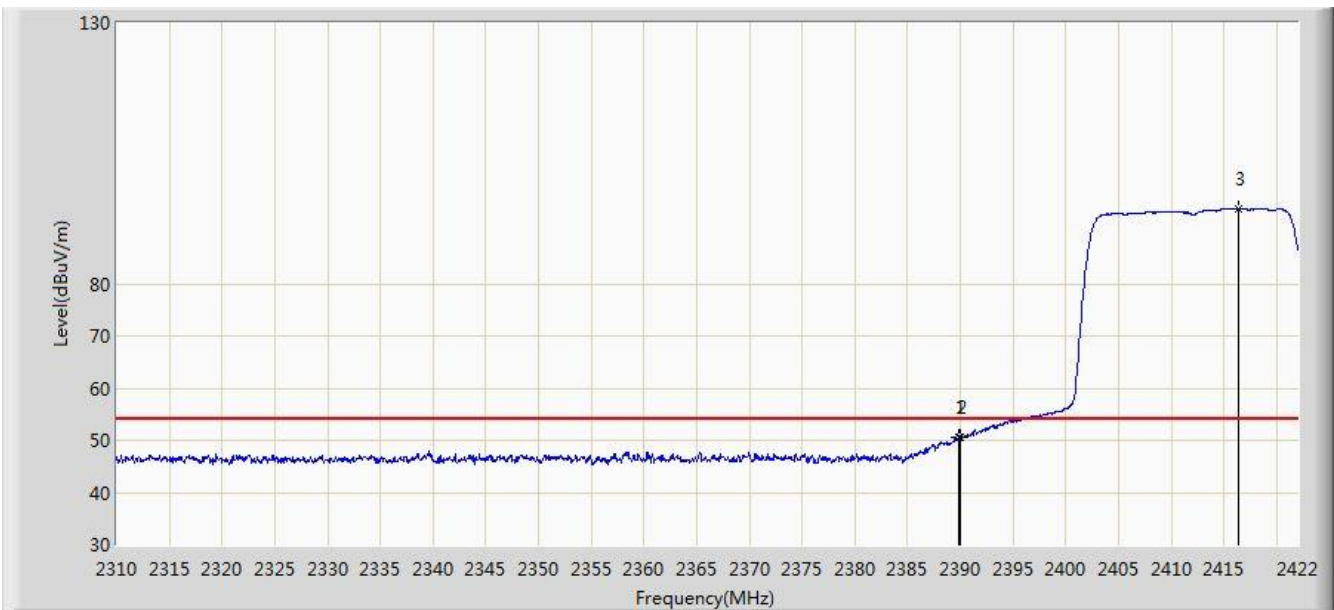


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	50.576	18.021	-3.424	54.000	32.555	AV
2			2390.000	50.466	17.912	-3.534	54.000	32.554	AV
3			2416.344	94.472	61.952	N/A	N/A	32.520	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 16:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2437MHz Ant 0 + 1	

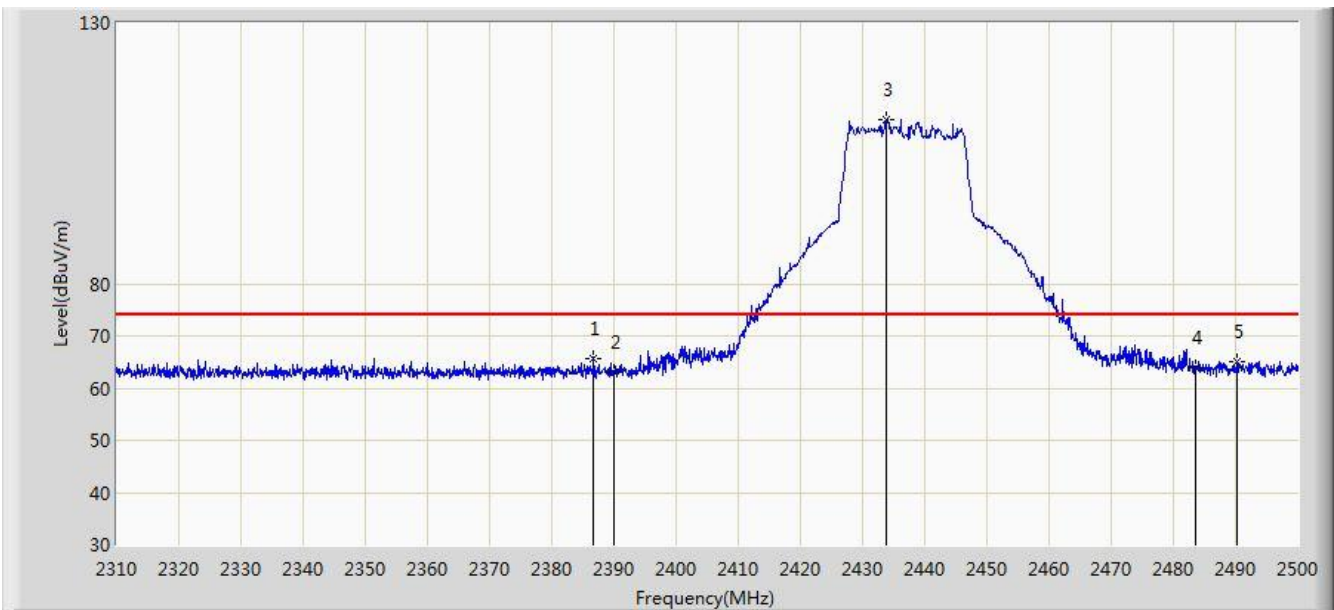


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.665	65.797	33.238	-8.203	74.000	32.559	PK
2			2390.000	63.145	30.591	-10.855	74.000	32.554	PK
3			2433.880	111.493	78.993	N/A	N/A	32.500	PK
4			2483.500	63.989	31.408	-10.011	74.000	32.580	PK
5			2490.215	64.940	32.339	-9.060	74.000	32.600	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 16:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2437MHz Ant 0 + 1	

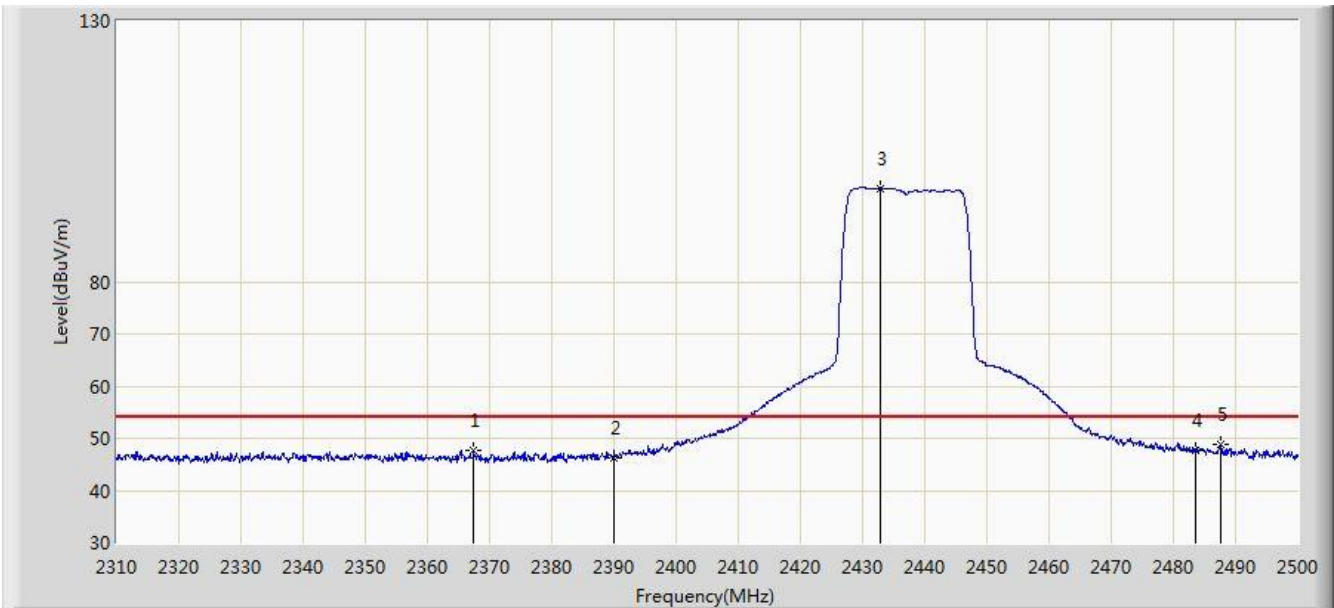


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2367.475	47.626	15.040	-6.374	54.000	32.586	AV
2			2390.000	46.259	13.705	-7.741	54.000	32.554	AV
3			2432.835	97.971	65.470	N/A	N/A	32.500	AV
4			2483.500	47.697	15.116	-6.303	54.000	32.580	AV
5			2487.555	48.744	16.151	-5.256	54.000	32.593	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 16:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2437MHz Ant 0 + 1	

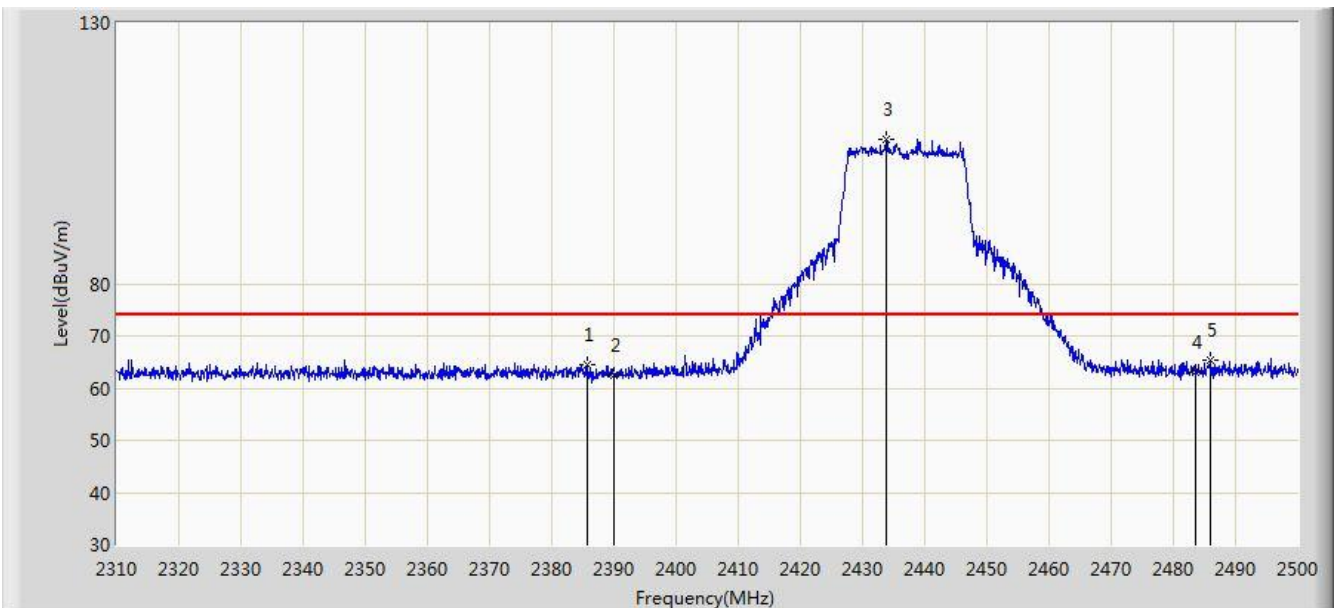


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.810	64.394	31.834	-9.606	74.000	32.560	PK
2			2390.000	62.488	29.934	-11.512	74.000	32.554	PK
3			2433.785	107.725	75.225	N/A	N/A	32.500	PK
4			2483.500	63.168	30.587	-10.832	74.000	32.580	PK
5			2486.035	65.493	32.905	-8.507	74.000	32.588	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 16:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2437MHz Ant 0 + 1	

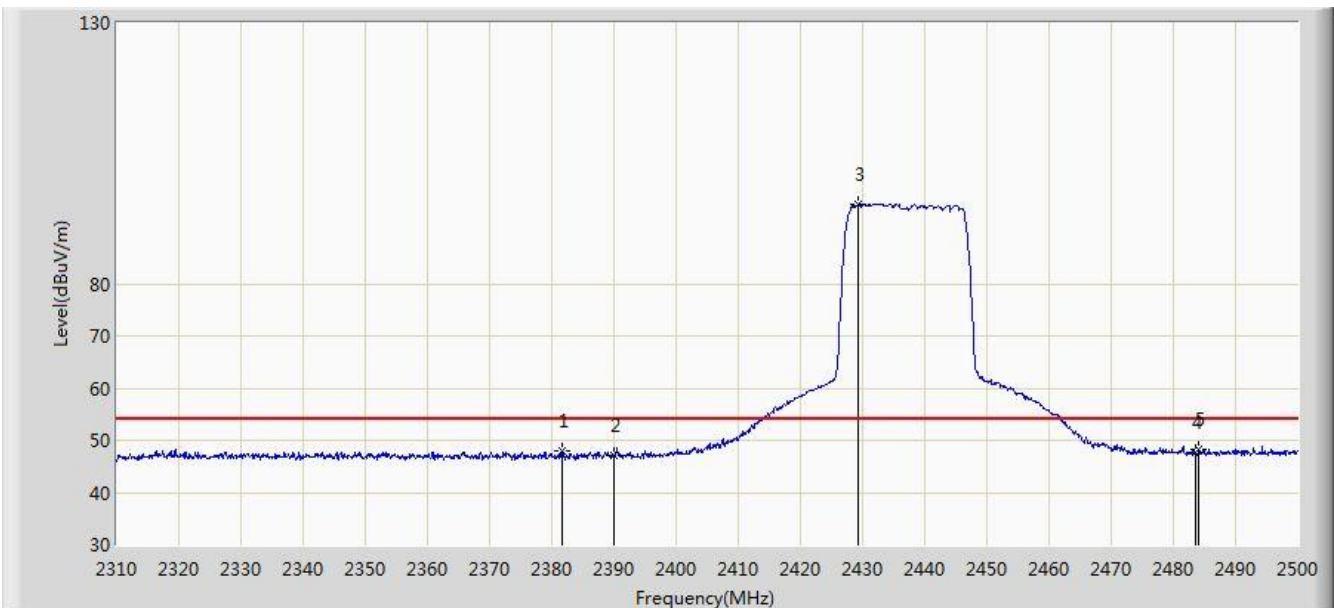


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2381.630	47.973	15.407	-6.027	54.000	32.566	AV
2			2390.000	47.009	14.455	-6.991	54.000	32.554	AV
3			2429.225	95.084	62.579	N/A	N/A	32.505	AV
4			2483.500	47.602	15.021	-6.398	54.000	32.580	AV
5			2484.135	48.187	15.604	-5.813	54.000	32.582	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 16:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz Ant 0 + 1	

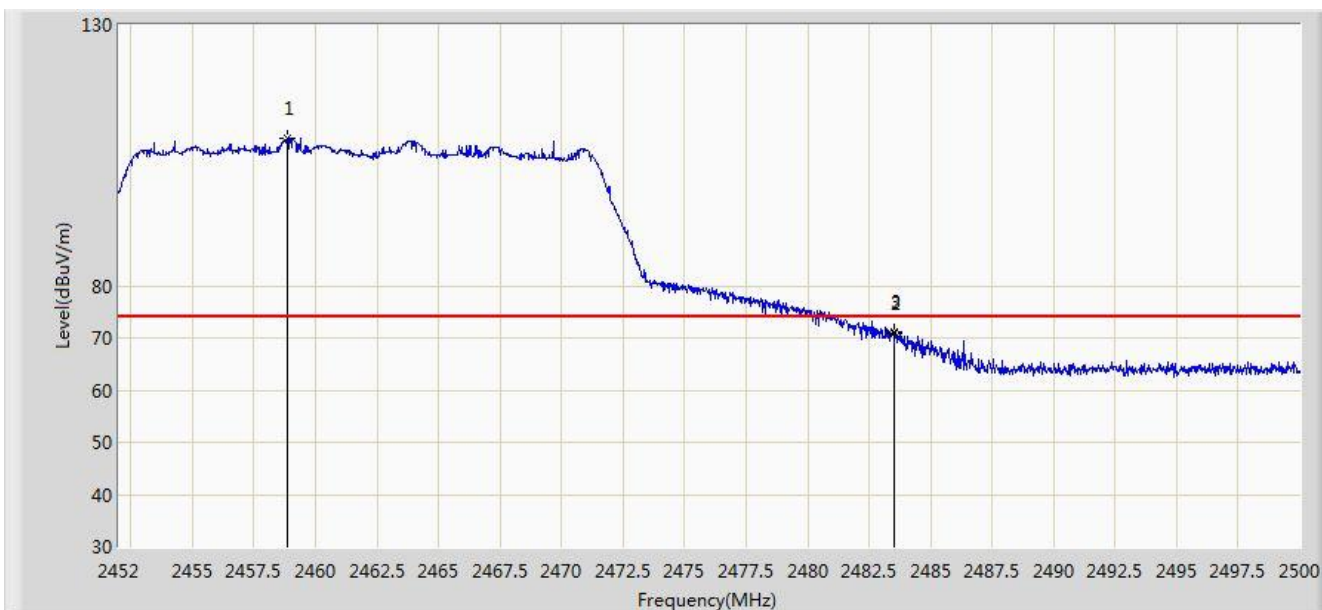


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2458.864	108.144	75.633	N/A	N/A	32.511	PK
2			2483.500	70.900	38.319	-3.100	74.000	32.580	PK
3			2483.512	71.118	38.537	-2.882	74.000	32.580	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 17:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz Ant 0 + 1	

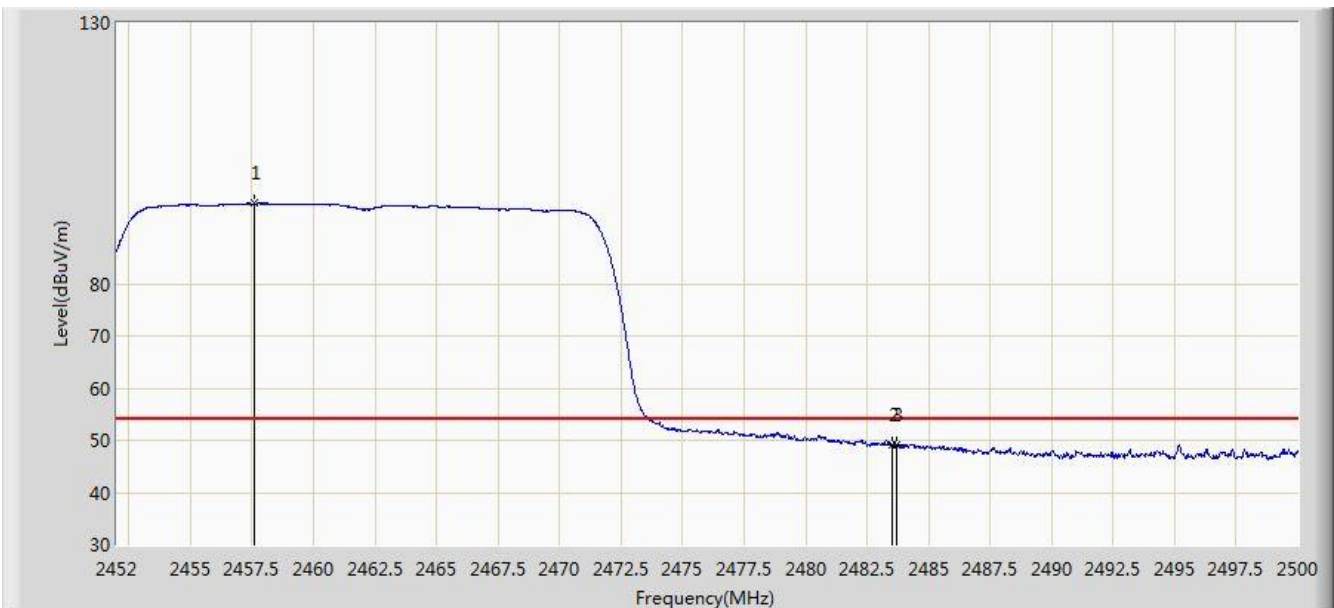


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2457.568	95.377	62.868	N/A	N/A	32.508	AV
2			2483.500	49.171	16.590	-4.829	54.000	32.580	AV
3			2483.680	49.253	16.672	-4.747	54.000	32.582	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 17:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz Ant 0 + 1	

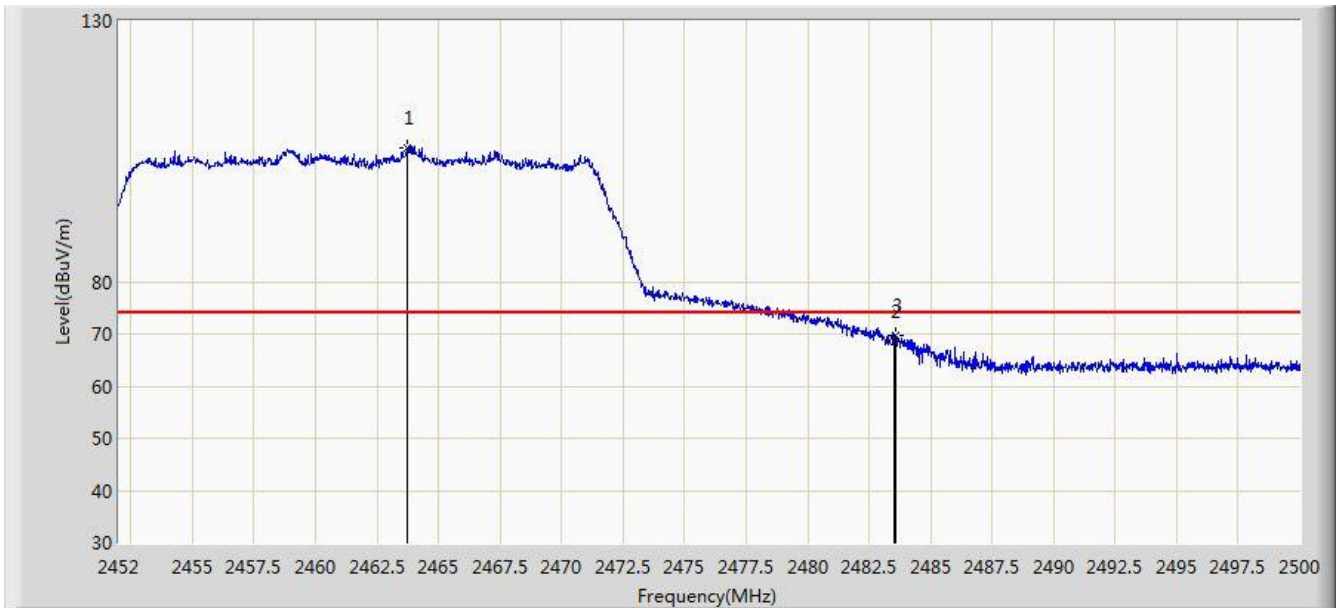


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2463.712	105.705	73.184	N/A	N/A	32.521	PK
2			2483.500	68.677	36.096	-5.323	74.000	32.580	PK
3			2483.584	69.755	37.174	-4.245	74.000	32.580	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 17:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz Ant 0 + 1	

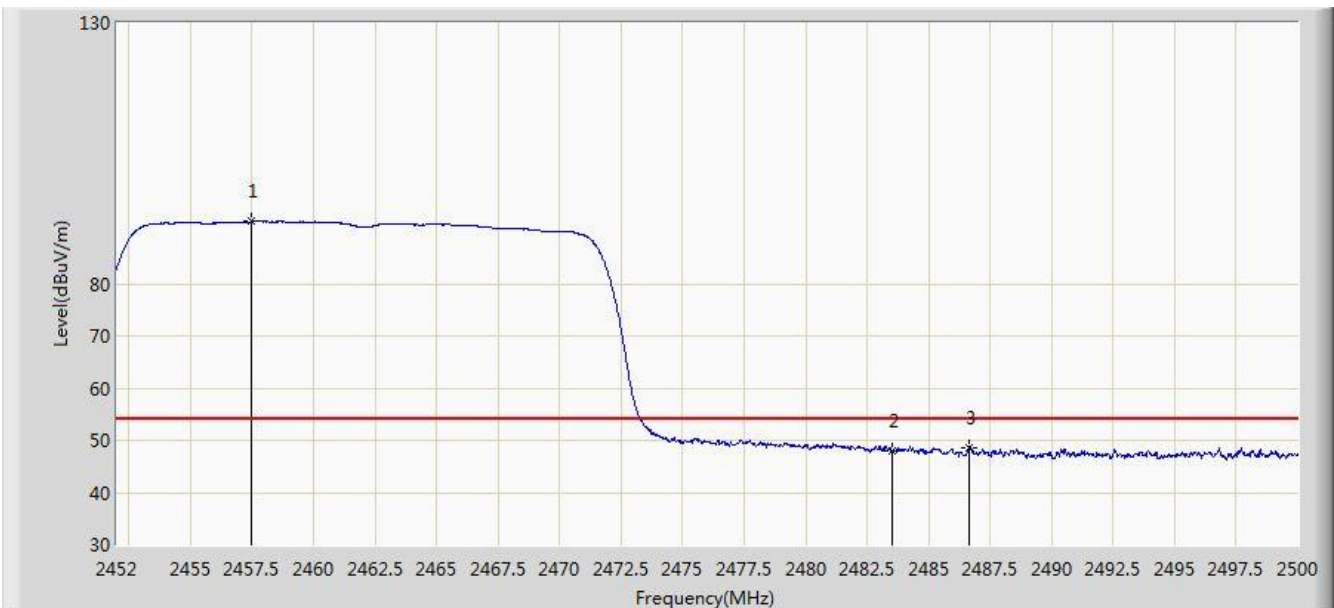


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2457.472	91.963	59.455	N/A	N/A	32.508	AV
2			2483.500	47.989	15.408	-6.011	54.000	32.580	AV
3			2486.632	48.504	15.914	-5.496	54.000	32.590	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 17:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz Ant 0 + 1	

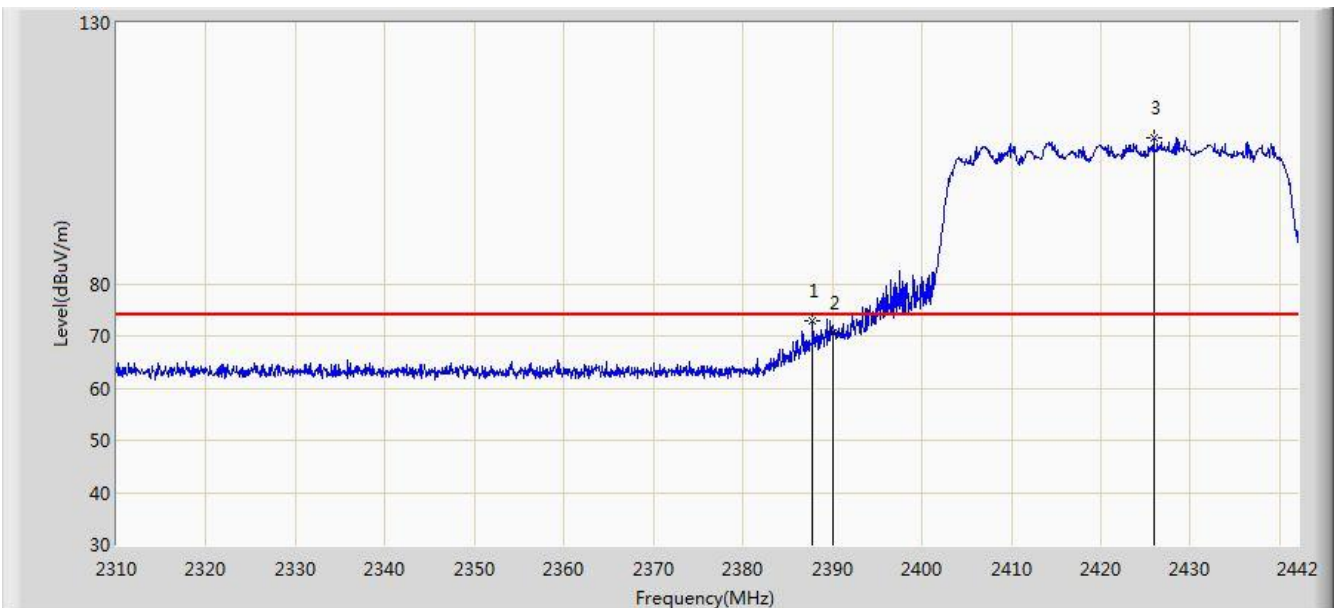


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.748	72.834	40.276	-1.166	74.000	32.557	PK
2			2390.000	70.671	38.117	-3.329	74.000	32.554	PK
3			2425.962	108.001	75.492	N/A	N/A	32.509	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 17:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz Ant 0 + 1	

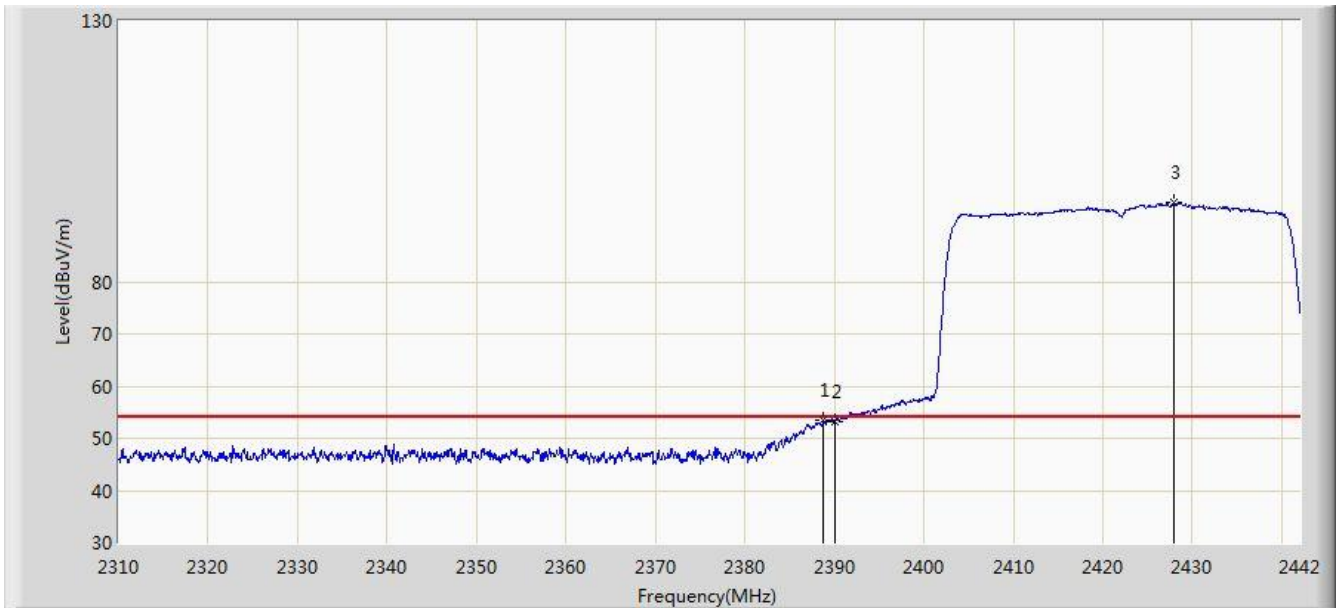


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.738	53.524	20.968	-0.476	54.000	32.557	AV
2			2390.000	53.187	20.633	-0.813	54.000	32.554	AV
3			2427.876	95.074	62.567	N/A	N/A	32.506	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 17:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz Ant 0 + 1	

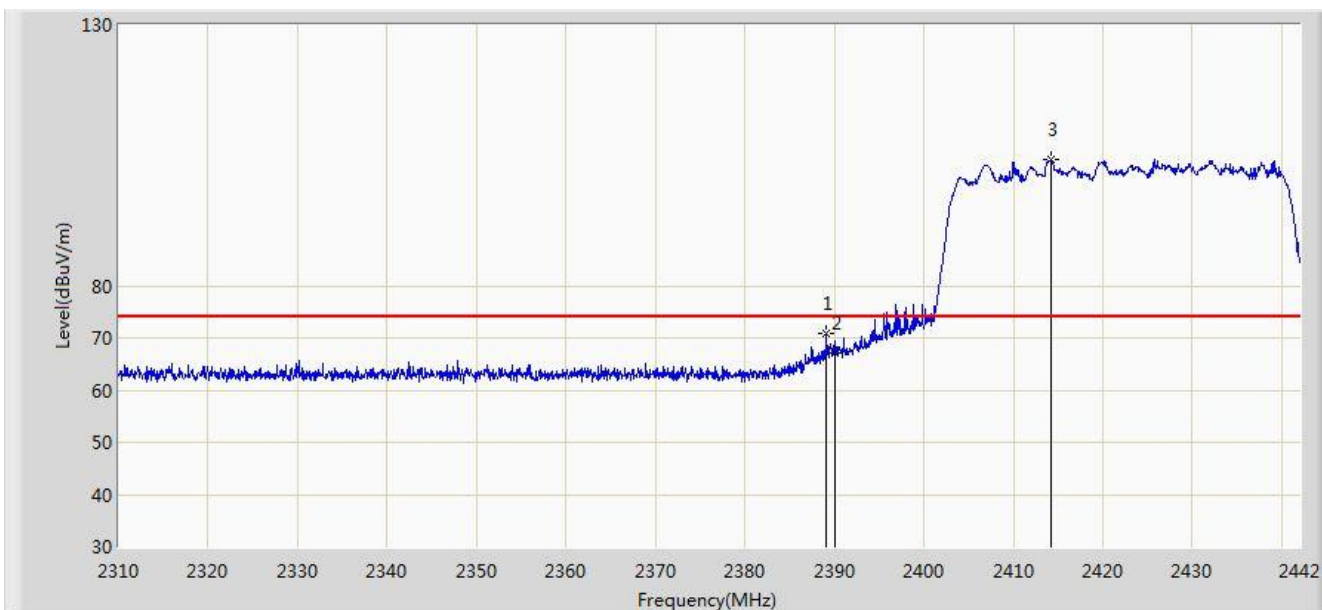


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.134	70.759	38.203	-3.241	74.000	32.556	PK
2			2390.000	67.166	34.612	-6.834	74.000	32.554	PK
3			2414.148	104.116	71.593	N/A	N/A	32.523	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 17:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz Ant 0 + 1	

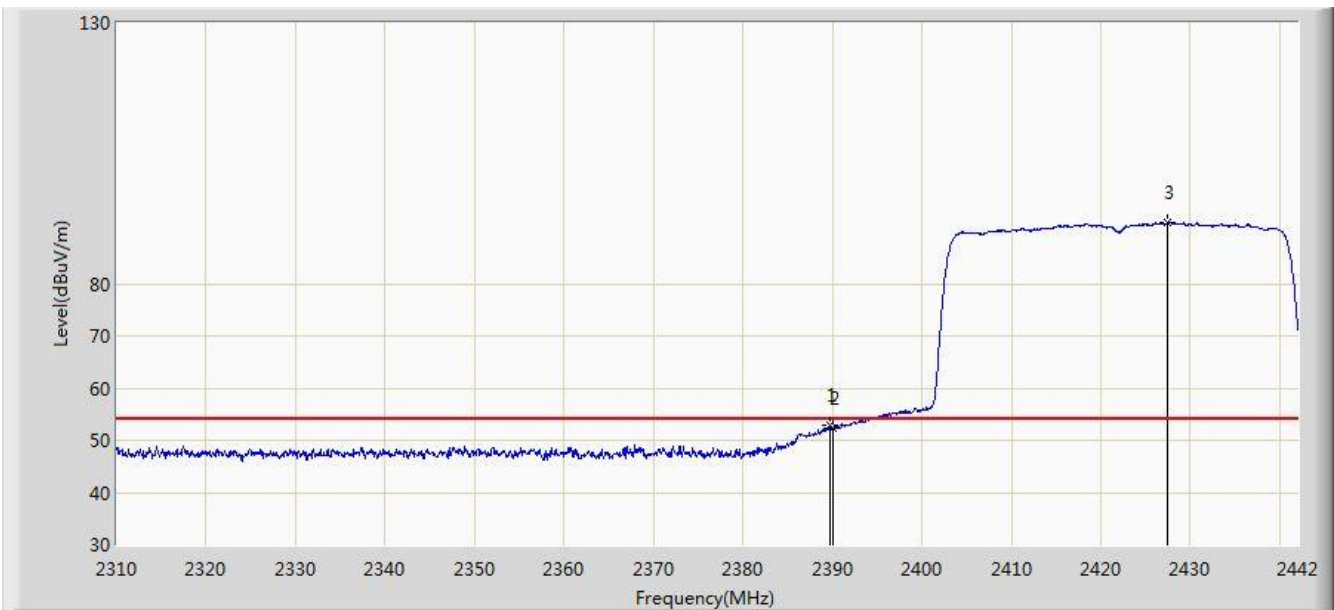


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.794	52.835	20.280	-1.165	54.000	32.555	AV
2			2390.000	52.198	19.644	-1.802	54.000	32.554	AV
3			2427.480	91.651	59.144	N/A	N/A	32.507	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 17:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2437MHz Ant 0 + 1	

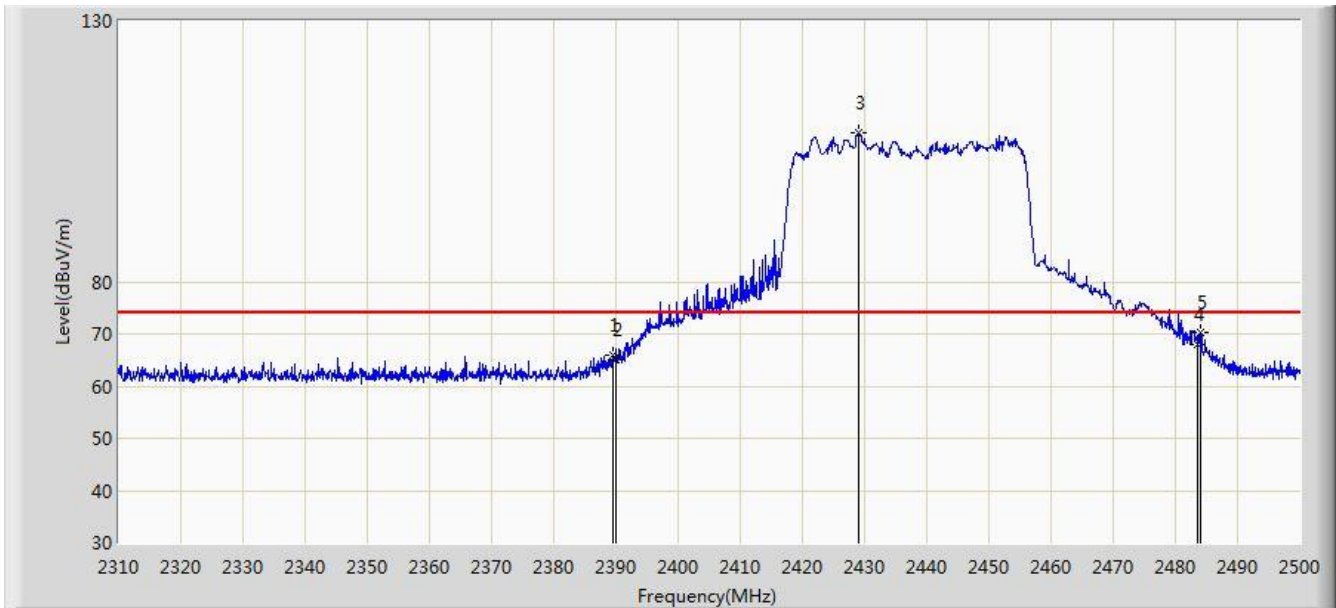


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.515	65.912	33.357	-8.088	74.000	32.556	PK
2			2390.000	65.087	32.533	-8.913	74.000	32.554	PK
3			2428.940	108.435	75.930	N/A	N/A	32.506	PK
4			2483.500	67.856	35.275	-6.144	74.000	32.580	PK
5			2483.945	70.406	37.824	-3.594	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 17:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2437MHz Ant 0 + 1	

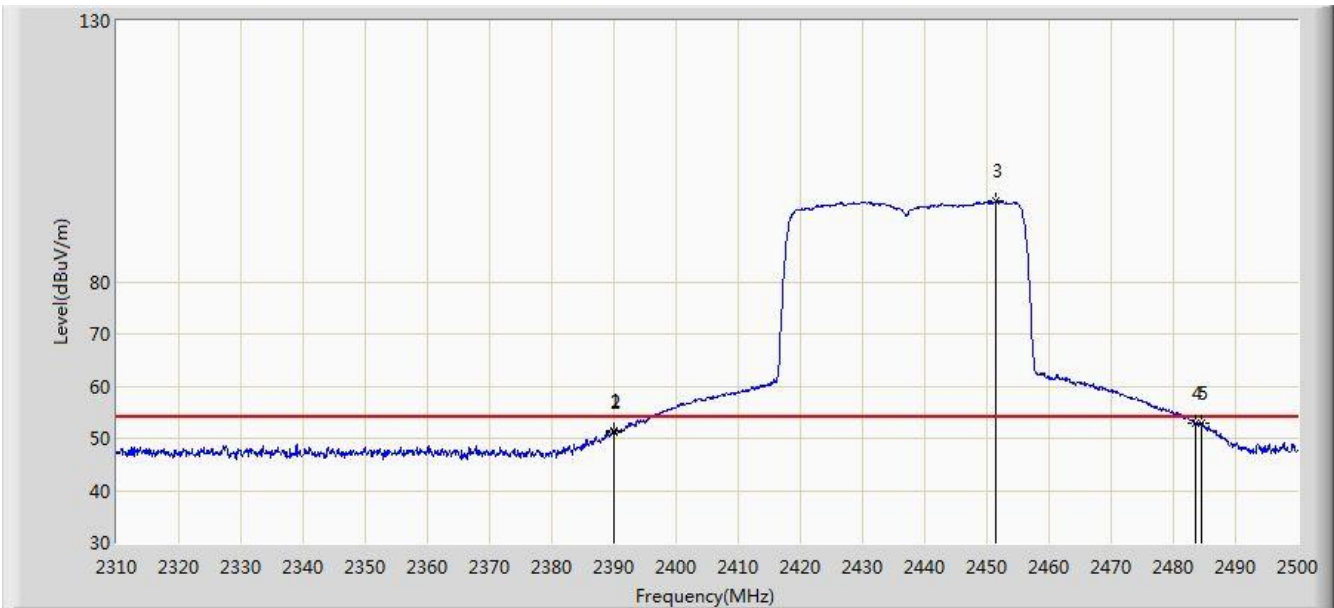


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.895	51.403	18.848	-2.597	54.000	32.555	AV
2			2390.000	51.131	18.577	-2.869	54.000	32.554	AV
3			2451.455	95.473	62.975	N/A	N/A	32.498	AV
4			2483.500	52.773	20.192	-1.227	54.000	32.580	AV
5			2484.515	52.838	20.254	-1.162	54.000	32.584	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 17:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2437MHz Ant 0 + 1	

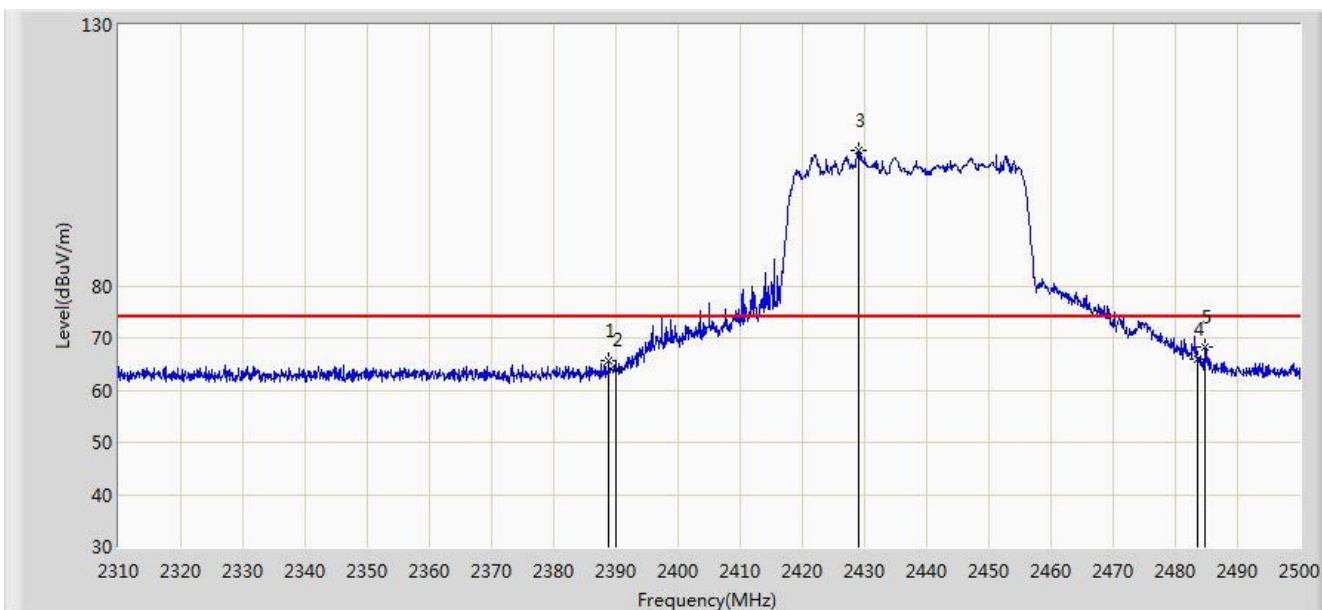


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.850	65.732	33.176	-8.268	74.000	32.556	PK
2			2390.000	64.035	31.481	-9.965	74.000	32.554	PK
3			2429.130	105.861	73.356	N/A	N/A	32.505	PK
4			2483.500	65.825	33.244	-8.175	74.000	32.580	PK
5			2484.705	68.156	35.572	-5.844	74.000	32.584	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 17:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2437MHz Ant 0 + 1	

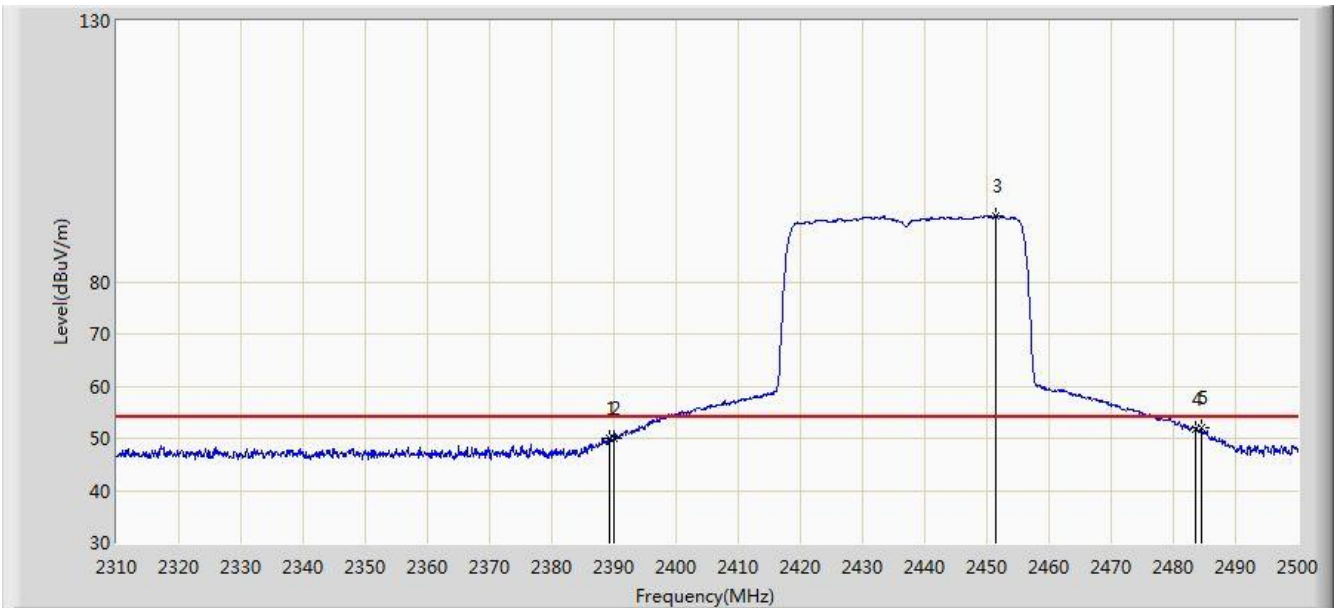


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.325	50.111	17.556	-3.889	54.000	32.555	AV
2			2390.000	50.097	17.543	-3.903	54.000	32.554	AV
3			2451.360	92.607	60.109	N/A	N/A	32.498	AV
4			2483.500	51.690	19.109	-2.310	54.000	32.580	AV
5			2484.515	52.009	19.425	-1.991	54.000	32.584	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 17:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz Ant 0 + 1	

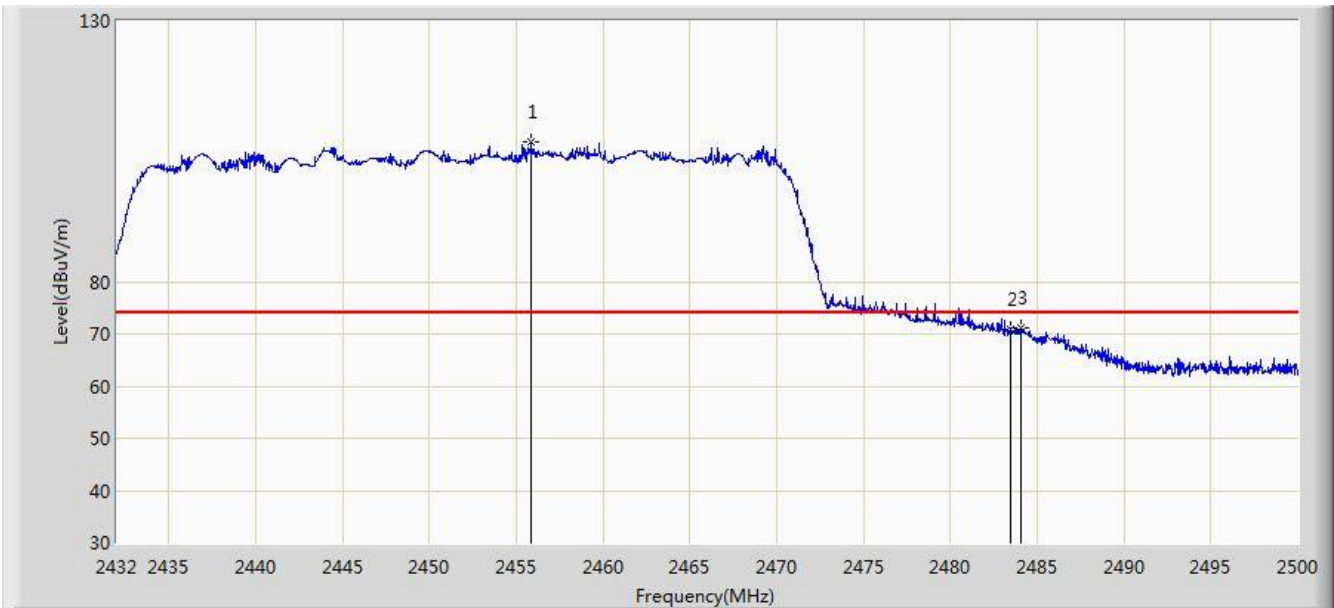


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2455.902	106.747	74.241	N/A	N/A	32.505	PK
2			2483.500	70.904	38.323	-3.096	74.000	32.580	PK
3			2484.088	71.167	38.585	-2.833	74.000	32.582	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 17:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz Ant 0 + 1	

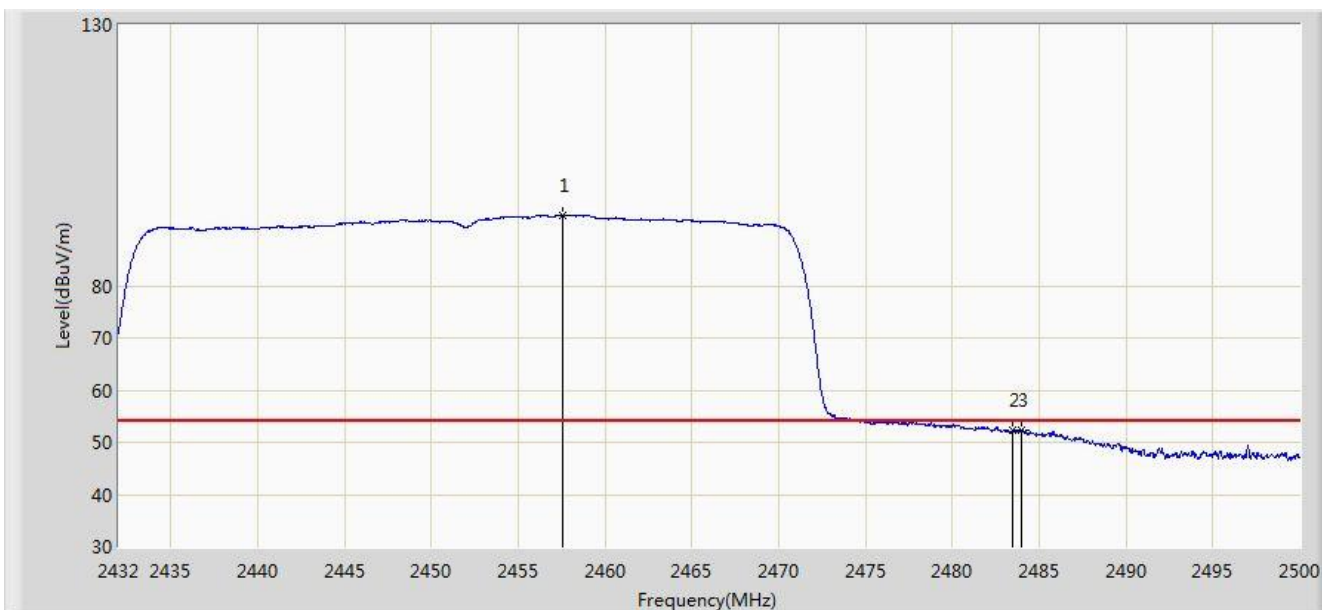


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2457.534	93.524	61.016	N/A	N/A	32.508	AV
2			2483.500	52.338	19.757	-1.662	54.000	32.580	AV
3			2483.986	52.395	19.813	-1.605	54.000	32.582	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 17:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz Ant 0 + 1	

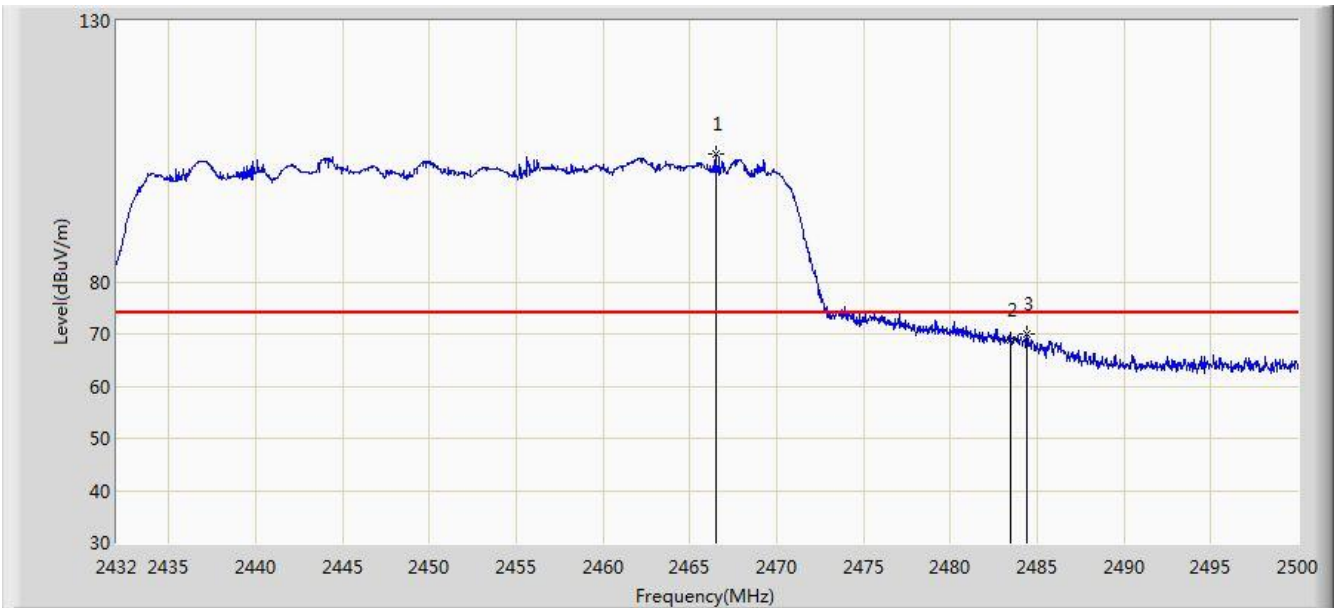


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2466.476	104.555	72.026	N/A	N/A	32.530	PK
2			2483.500	68.742	36.161	-5.258	74.000	32.580	PK
3			2484.428	69.908	37.325	-4.092	74.000	32.583	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/29 - 17:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz Ant 0 + 1	

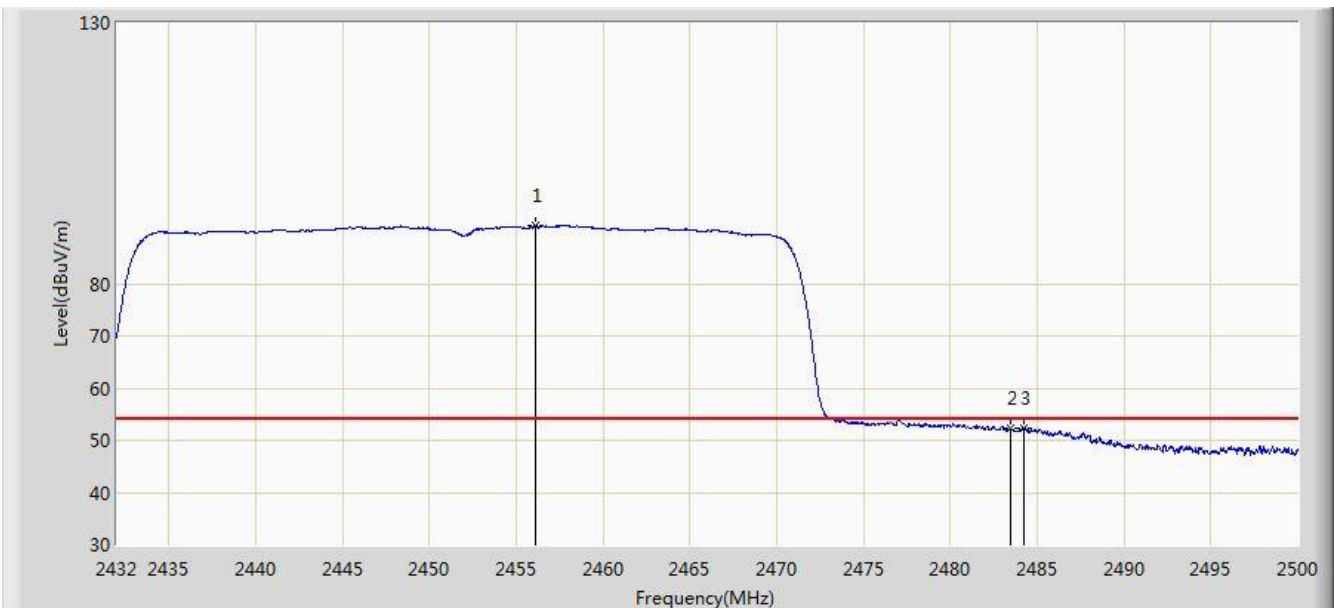


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2456.106	91.043	58.537	N/A	N/A	32.506	AV
2			2483.500	52.232	19.651	-1.768	54.000	32.580	AV
3			2484.224	52.371	19.788	-1.629	54.000	32.583	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

For APIN0514 - Directional Antenna (AP-ANT-48)

Site: AC1	Time: 2018/06/27 - 08:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0 + 1	

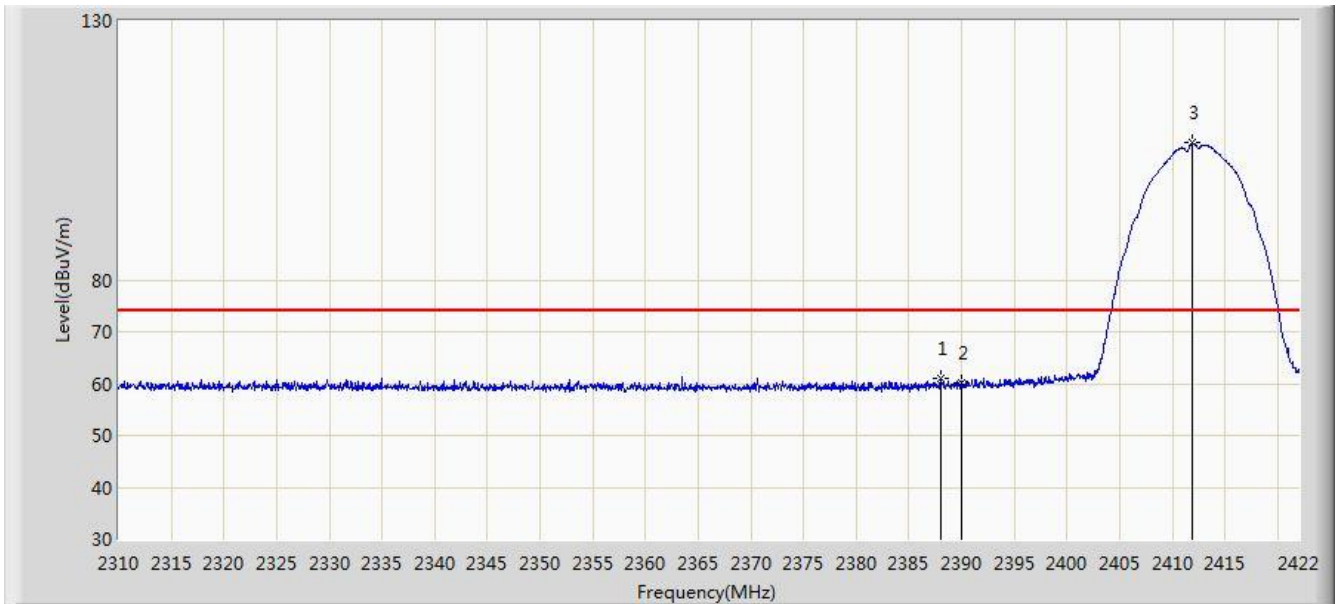


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.064	61.066	28.509	-12.934	74.000	32.557	PK
2			2390.000	60.276	27.722	-13.724	74.000	32.554	PK
3		*	2411.920	106.379	73.853	N/A	N/A	32.526	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC1	Time: 2018/06/27 - 08:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0 + 1	

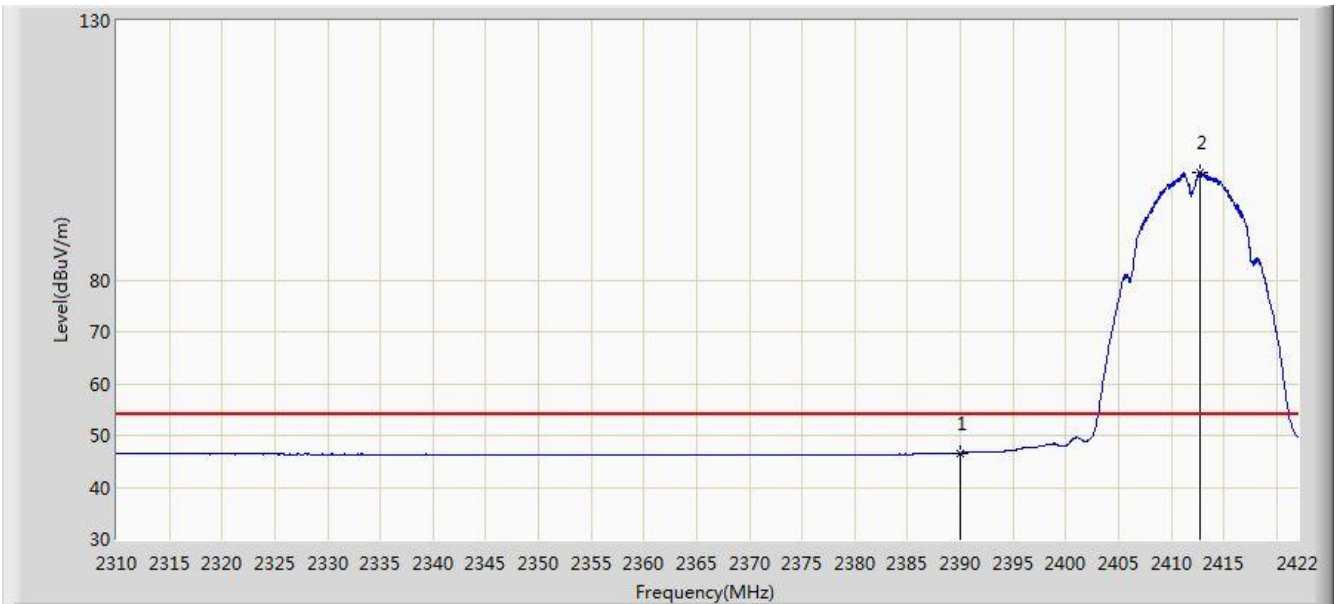


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.615	14.061	-7.385	54.000	32.554	AV
2		*	2412.704	100.756	68.231	N/A	N/A	32.525	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/27 - 08:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0 + 1	

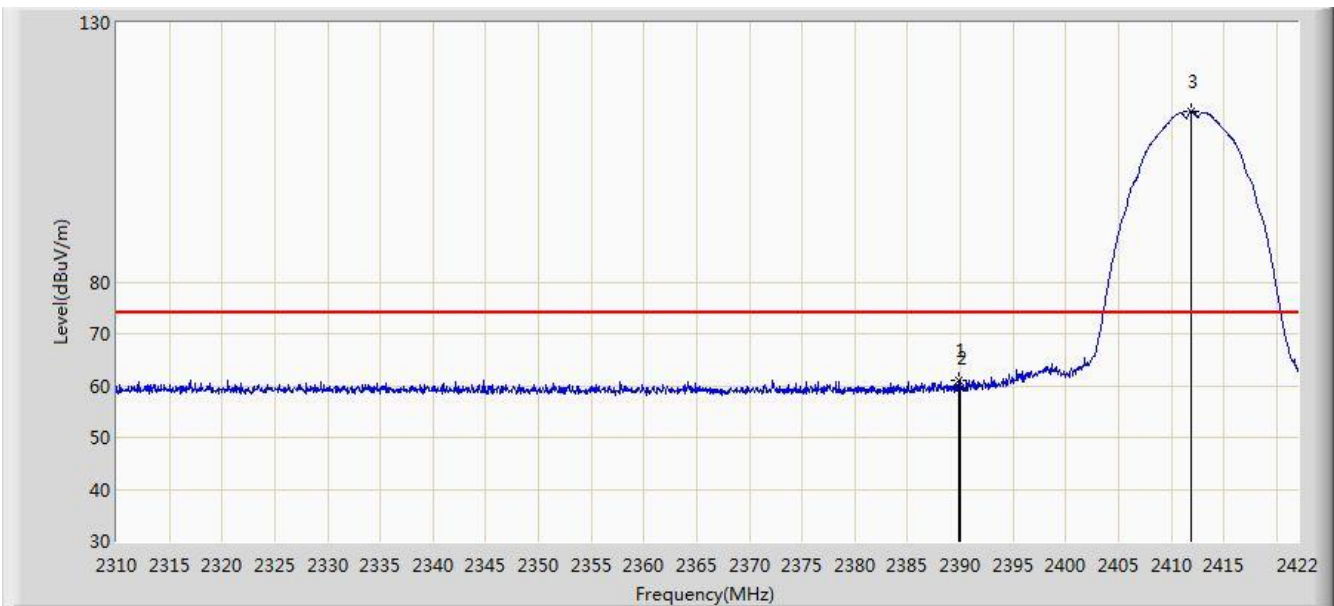

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	61.036	28.481	-12.964	74.000	32.555	PK
2			2390.000	59.469	26.915	-14.531	74.000	32.554	PK
3		*	2411.920	112.940	80.414	N/A	N/A	32.526	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/27 - 08:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	47.050	14.495	-6.950	54.000	32.555	AV
2			2390.000	47.041	14.487	-6.959	54.000	32.554	AV
3		*	2411.192	106.828	74.301	N/A	N/A	32.527	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/27 - 08:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0 + 1	

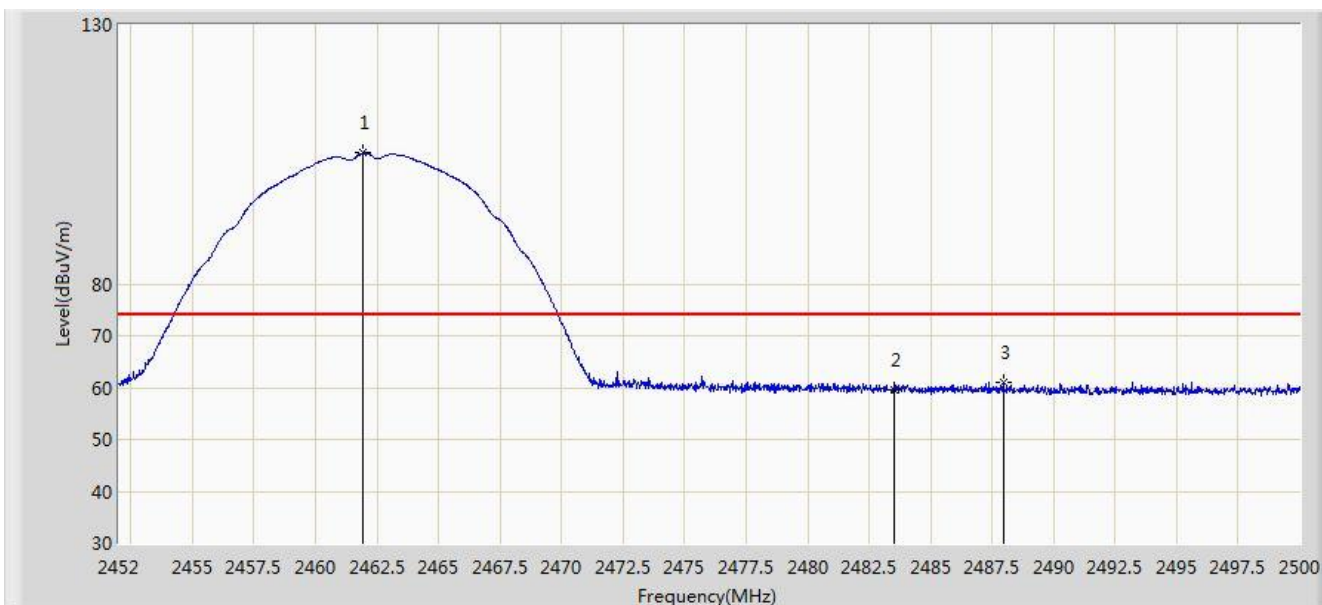

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.936	105.246	72.730	N/A	N/A	32.516	PK
2			2483.500	59.655	27.074	-14.345	74.000	32.580	PK
3			2487.952	61.075	28.481	-12.925	74.000	32.594	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/27 - 08:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.704	99.736	67.218	N/A	N/A	32.518	AV
2			2483.500	46.764	14.183	-7.236	54.000	32.580	AV
3			2483.584	46.779	14.198	-7.221	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/27 - 08:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0 + 1	

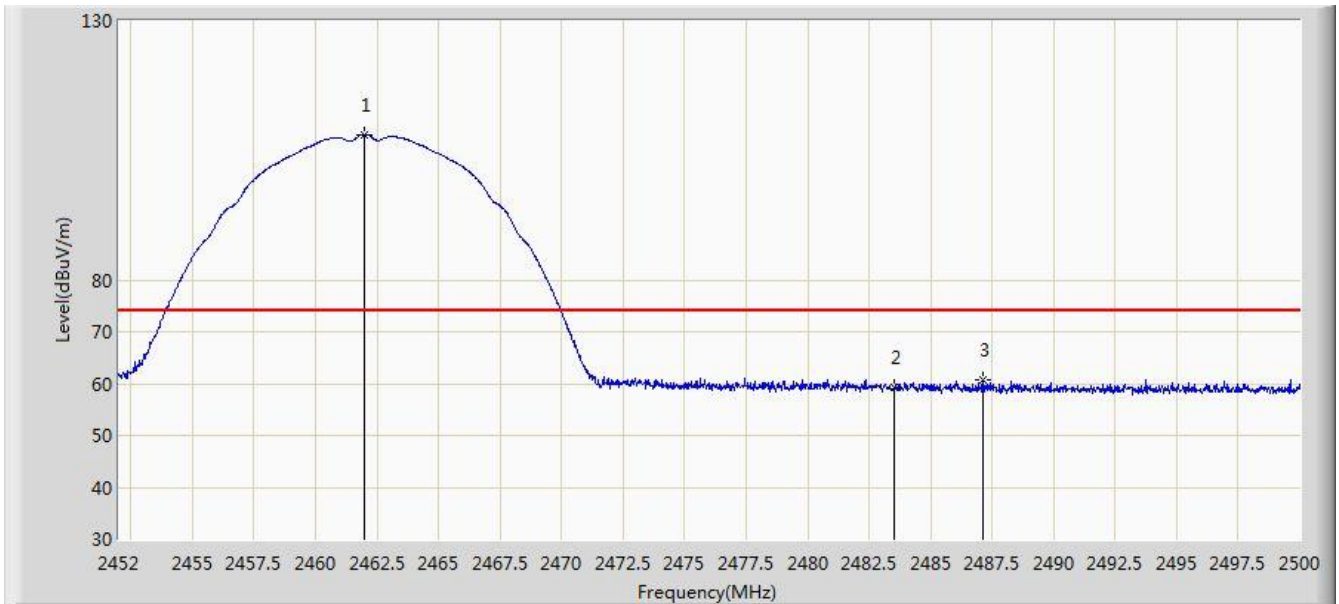

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.960	108.048	75.532	N/A	N/A	32.516	PK
2			2483.500	59.160	26.579	-14.840	74.000	32.580	PK
3			2487.112	60.862	28.271	-13.138	74.000	32.592	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/27 - 08:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2462MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.144	102.467	69.952	N/A	N/A	32.514	AV
2			2483.500	46.986	14.405	-7.014	54.000	32.580	AV
3			2483.512	46.988	14.407	-7.012	54.000	32.580	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/28 - 02:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0 + 1	

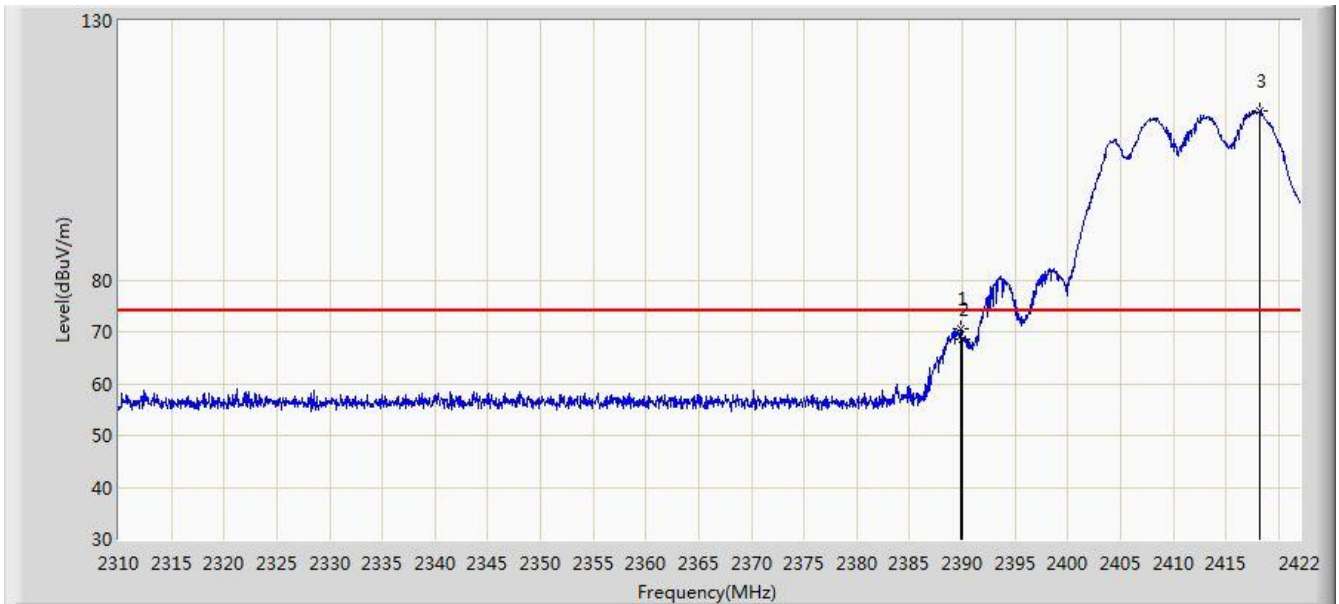


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	70.514	37.959	-3.486	74.000	32.555	PK
2			2390.000	68.677	36.123	-5.323	74.000	32.554	PK
3		*	2418.192	112.542	80.024	N/A	N/A	32.519	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/28 - 02:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0 + 1	

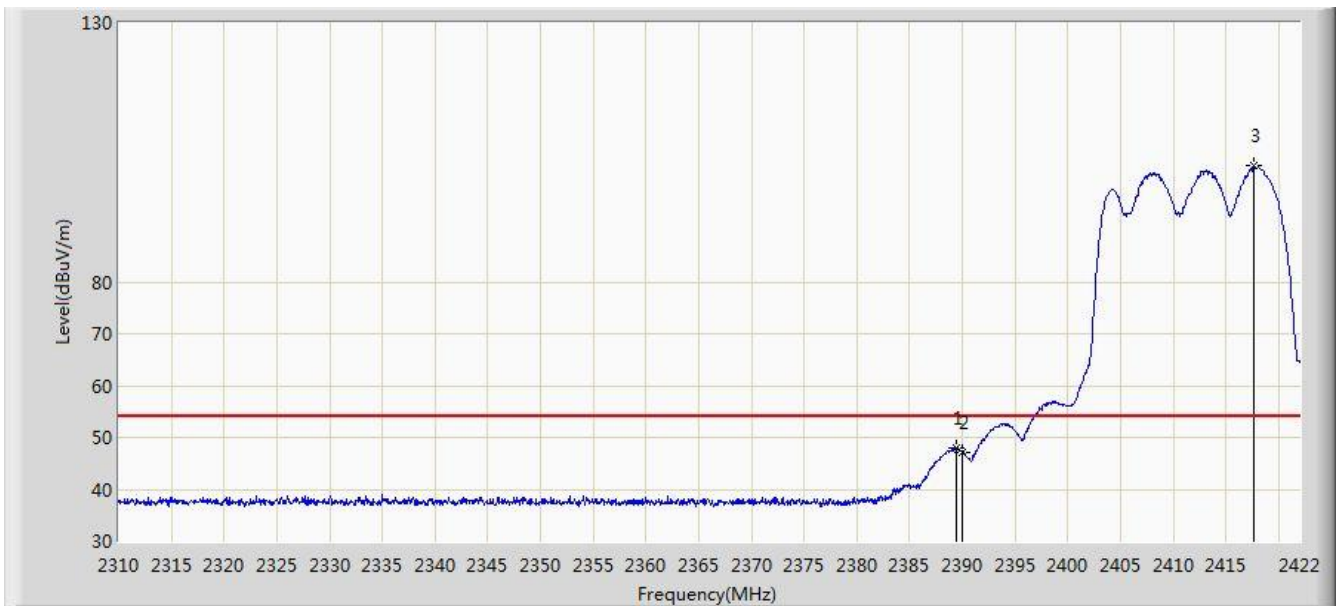


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.464	47.892	15.337	-6.108	54.000	32.555	AV
2			2390.000	47.188	14.634	-6.812	54.000	32.554	AV
3		*	2417.688	102.330	69.811	48.330	N/A	N/A	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/28 - 02:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0 + 1	

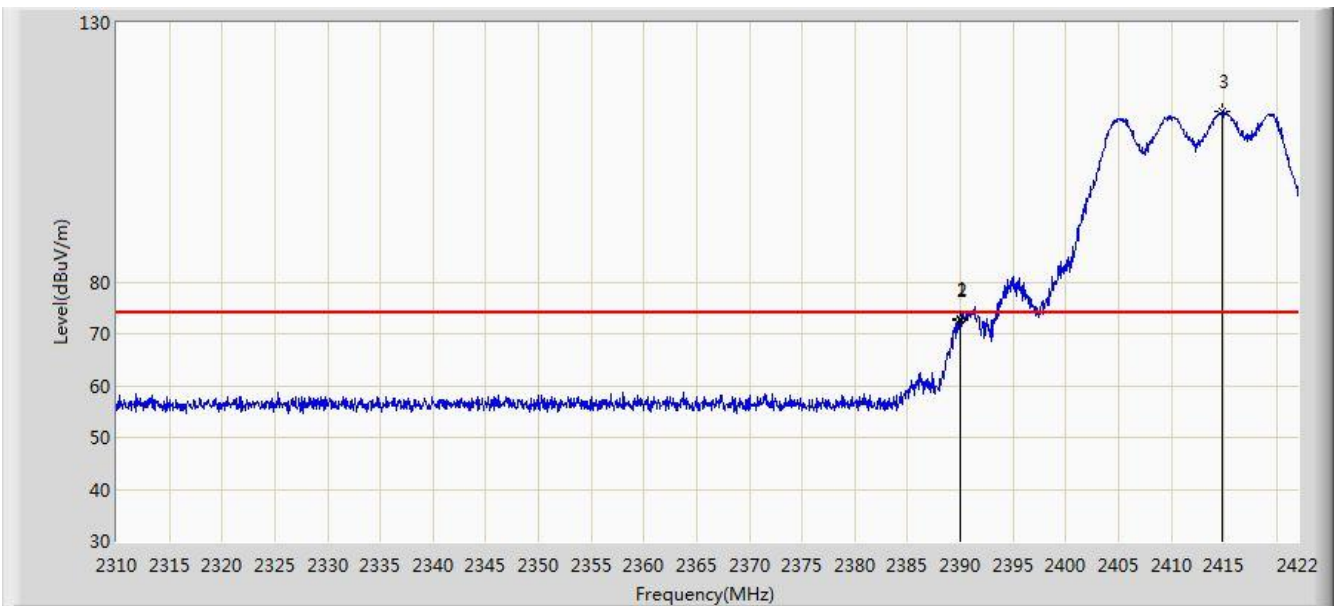


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.968	72.799	40.245	-1.201	74.000	32.554	PK
2			2390.000	72.732	40.178	-1.268	74.000	32.554	PK
3		*	2414.832	112.814	80.292	N/A	N/A	32.522	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/28 - 02:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2412MHz Ant 0 + 1	

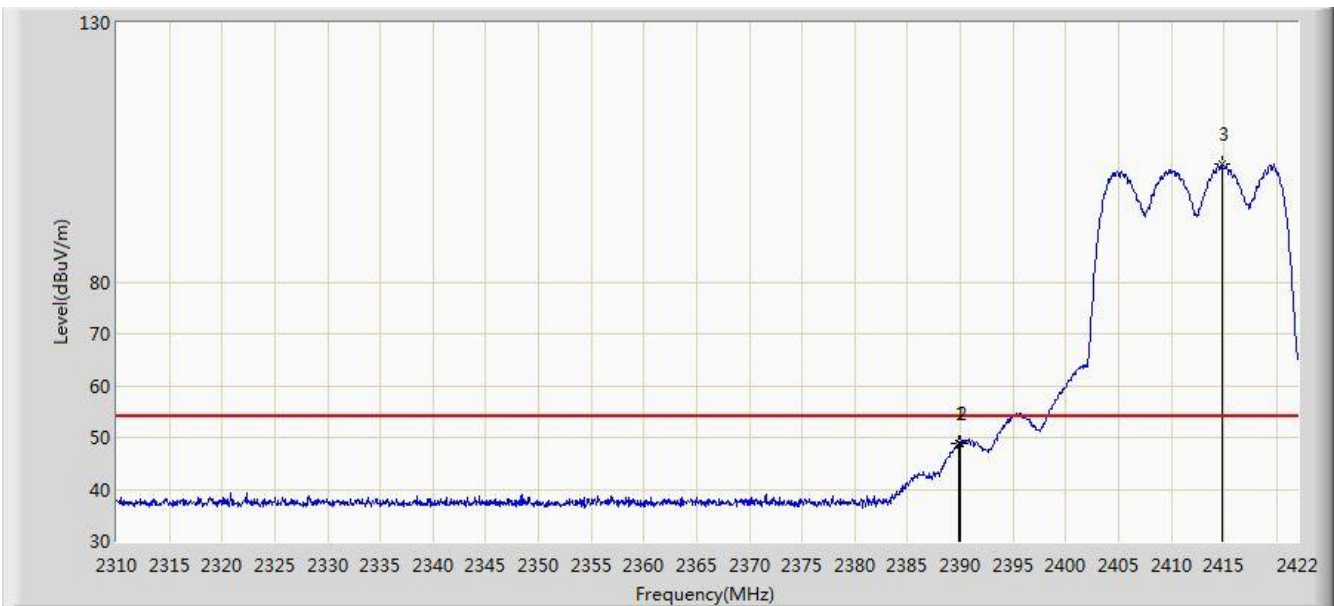


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.912	48.870	16.315	-5.130	54.000	32.555	AV
2			2390.000	48.778	16.224	-5.222	54.000	32.554	AV
3		*	2414.832	102.640	70.118	N/A	N/A	32.522	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/28 - 02:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0 + 1	

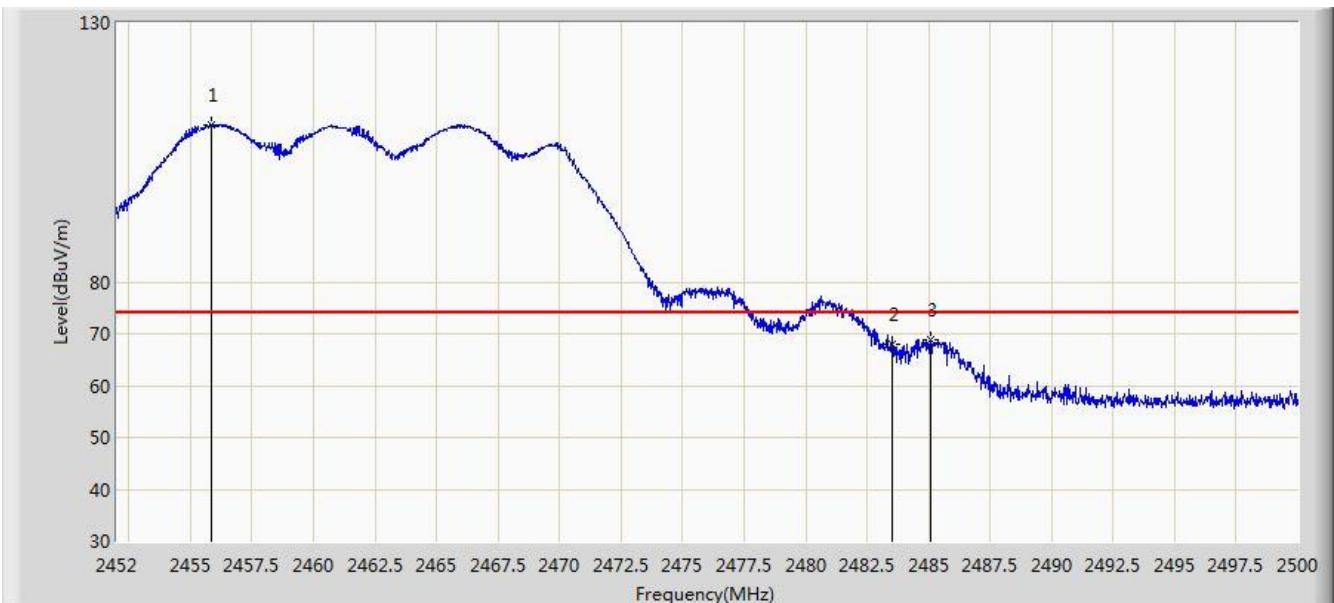

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.840	110.430	77.924	N/A	N/A	32.505	PK
2			2483.500	67.972	35.391	-6.028	74.000	32.580	PK
3			2485.096	68.981	36.396	-5.019	74.000	32.585	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/28 - 02:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2455.768	100.214	67.709	N/A	N/A	32.505	AV
2			2483.500	46.166	13.585	-7.834	54.000	32.580	AV
3			2485.312	46.558	13.972	-7.442	54.000	32.587	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/28 - 02:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0 + 1	

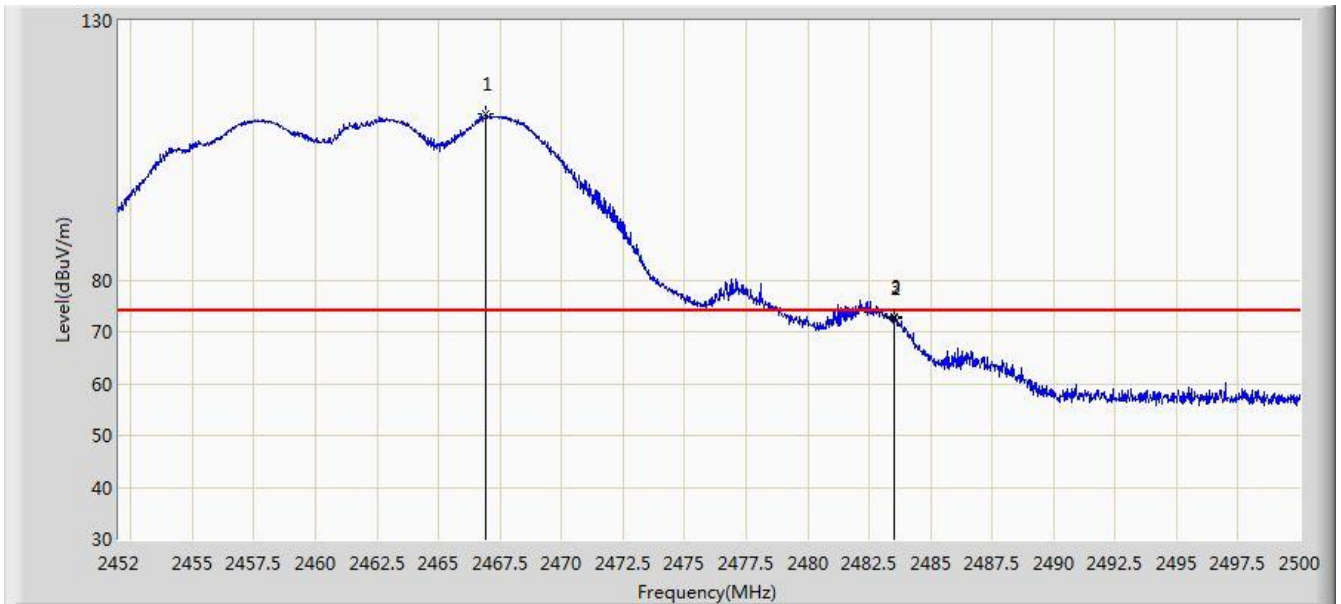


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.928	111.914	79.383	N/A	N/A	32.531	PK
2			2483.500	72.513	39.932	-1.487	74.000	32.580	PK
3			2483.512	72.910	40.329	-1.090	74.000	32.580	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/28 - 02:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at Channel 2462MHz Ant 0 + 1	

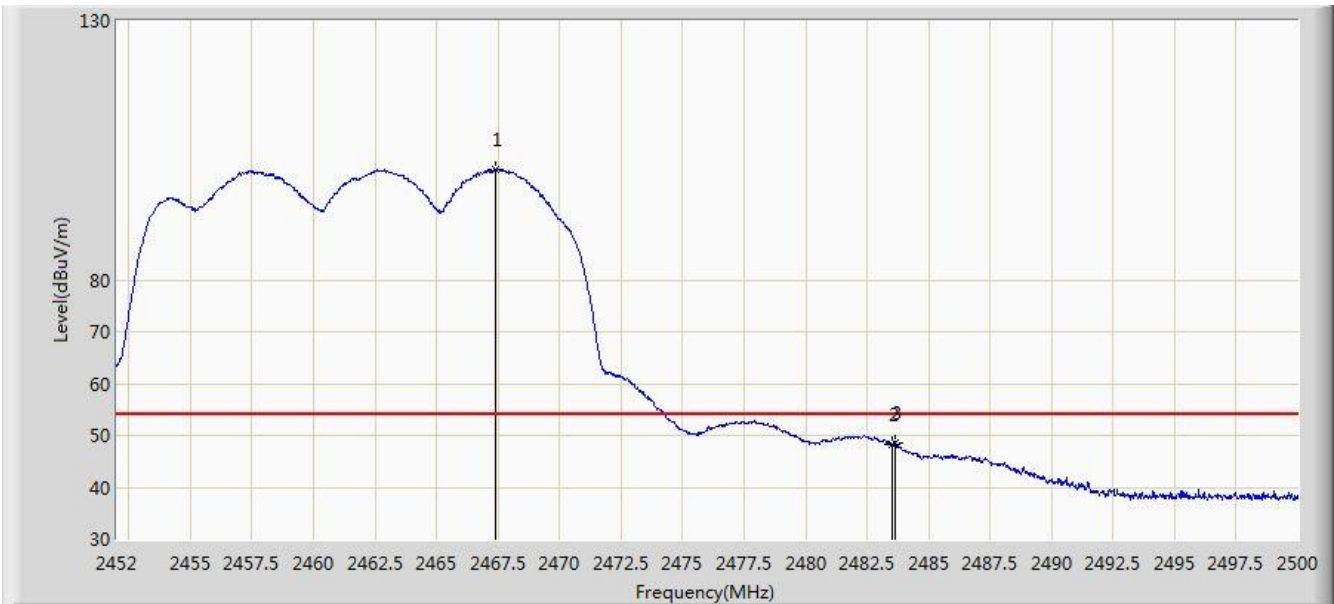

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.384	101.329	68.797	N/A	N/A	32.533	AV
2			2483.500	48.394	15.813	-5.606	54.000	32.580	AV
3			2483.632	48.509	15.928	-5.491	54.000	32.581	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/28 - 02:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0 + 1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.744	73.155	40.600	-0.845	74.000	32.555	PK
2			2390.000	70.988	38.434	-3.012	74.000	32.554	PK
3		*	2417.352	112.214	79.695	N/A	N/A	32.520	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/28 - 02:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0 + 1	

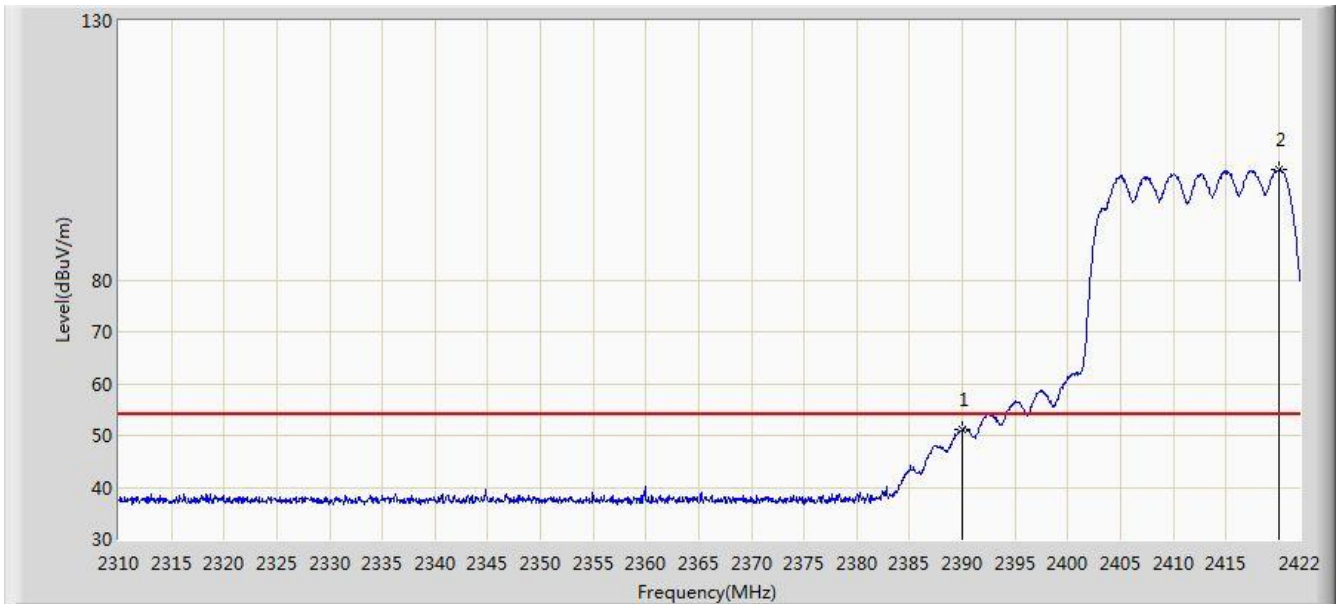


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.186	18.632	-2.814	54.000	32.554	AV
2		*	2420.096	101.402	68.886	N/A	N/A	32.516	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/28 - 02:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0 + 1	

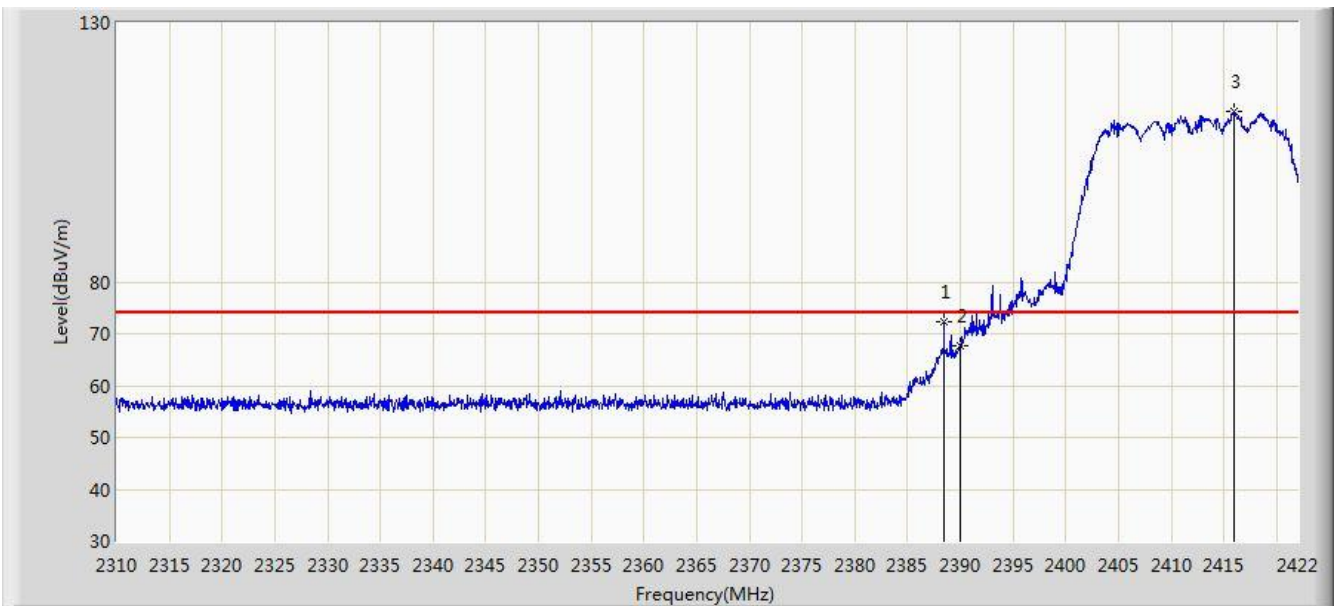


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.456	72.425	39.868	-1.575	74.000	32.556	PK
2			2390.000	67.814	35.260	-6.186	74.000	32.554	PK
3		*	2416.008	112.888	80.367	N/A	N/A	32.521	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/06/28 - 02:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0 + 1	

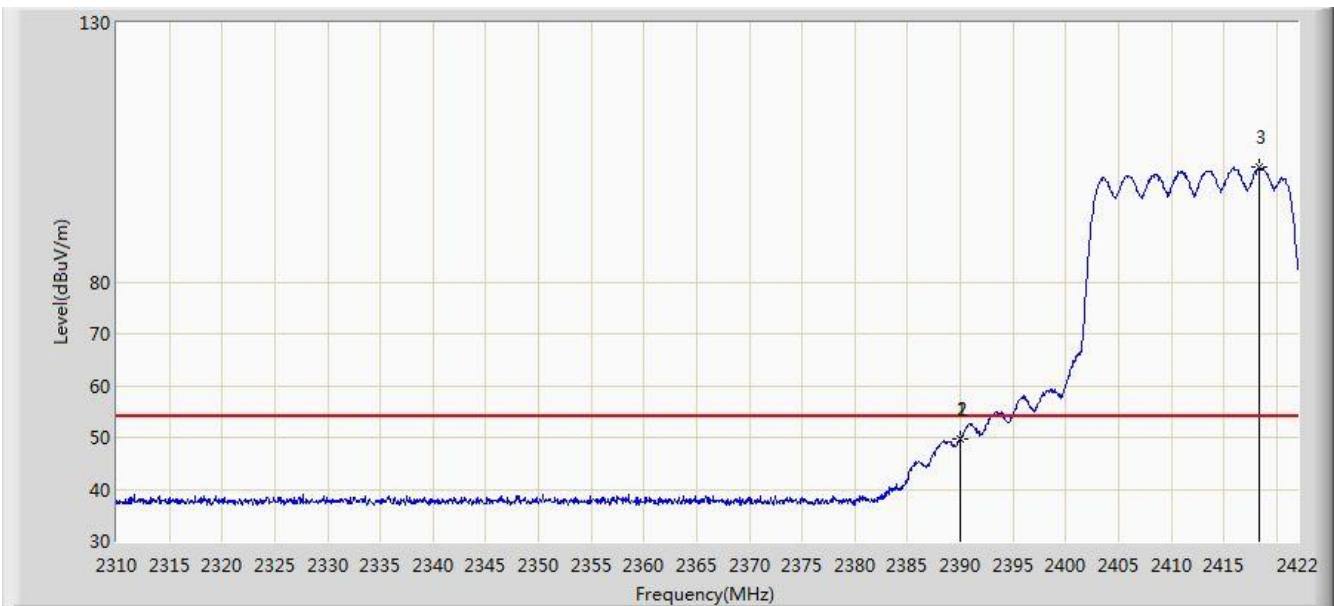

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.968	49.666	17.112	-4.334	54.000	32.554	AV
2			2390.000	49.656	17.102	-4.344	54.000	32.554	AV
3		*	2418.416	102.265	69.747	N/A	N/A	32.518	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)