
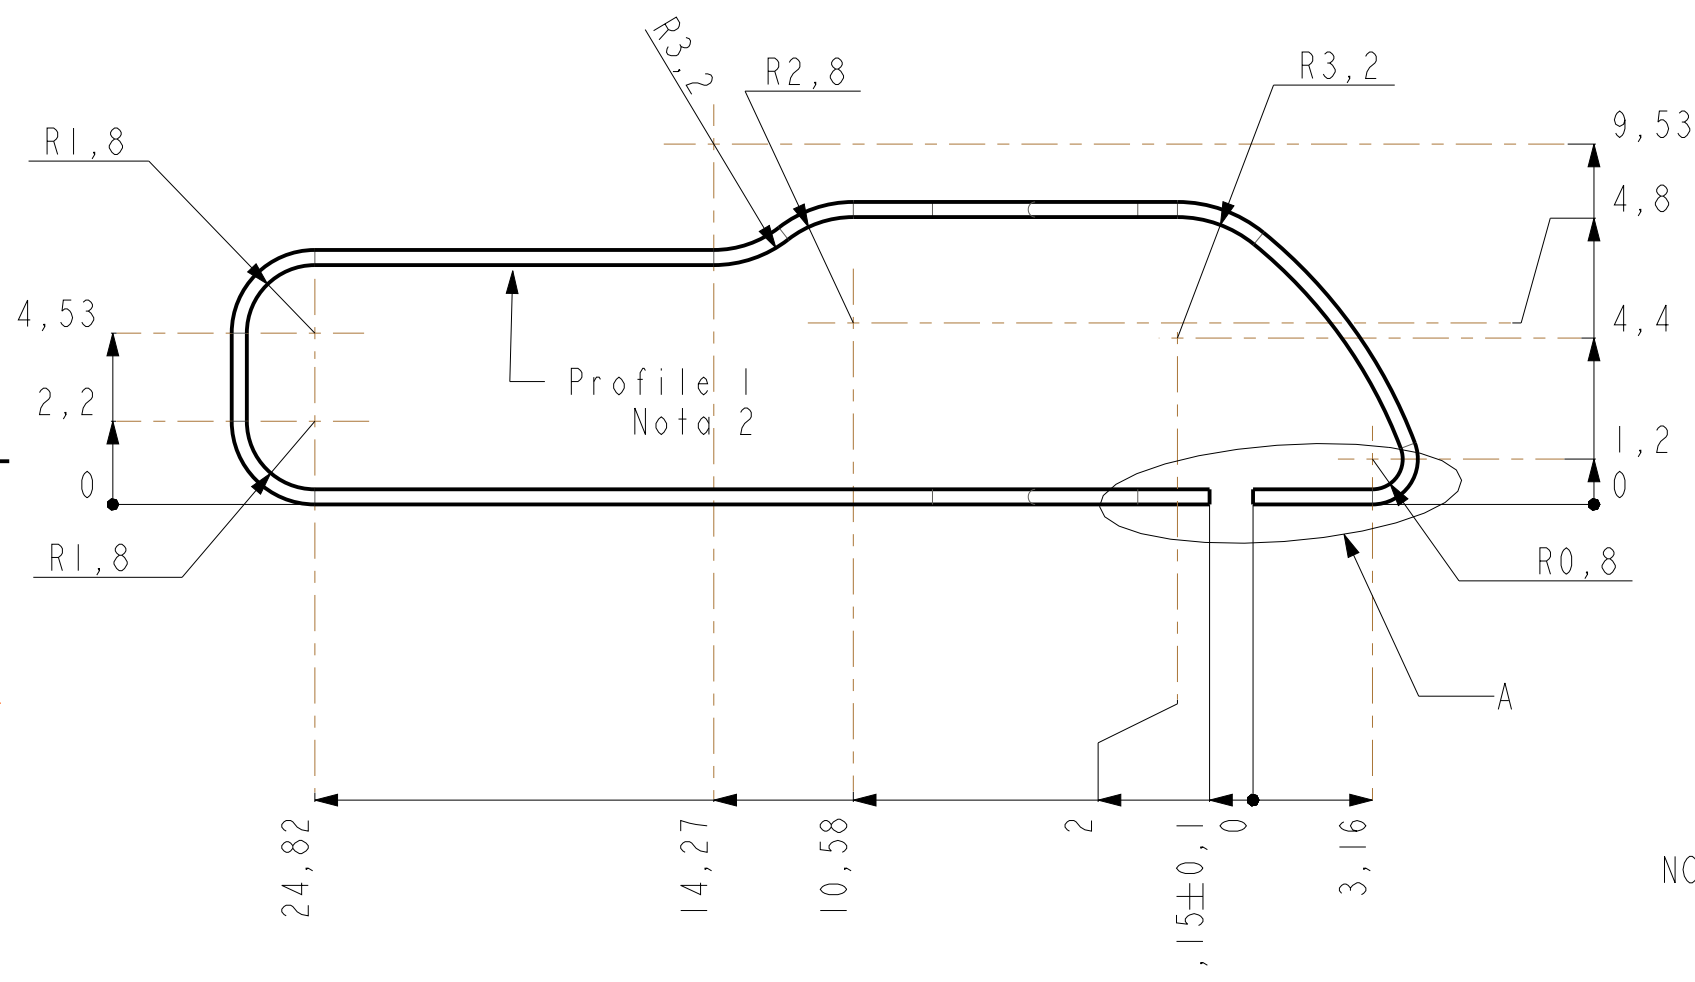


Profile 2
Nota 2


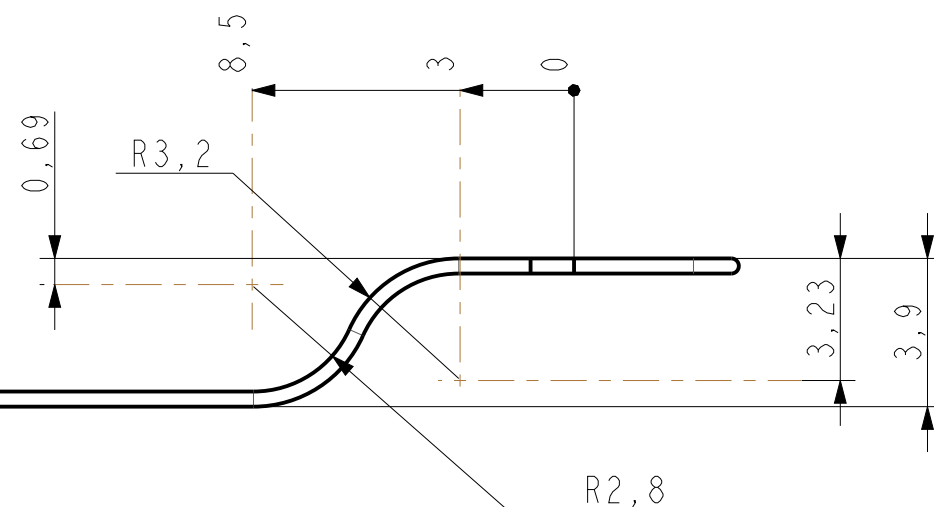


NOTA 1: Hatched area free of gold coating.

Gold plating: plate per ASTM B488-01, Type I, Code C, Class 5.0. thickness 5 microns minimum, 11 microns maximum. The hatched areas (2,5 mm and 2,5 mm unplated areas) must be free of gold plating and any deposit used for surface preparation such as nickel strikes.

NOTA 2: Dimensional control of the antenna profil 1 and profil 2 will be realized after final molding in the header.

NOTA 3: Scratches in the plating allowed except where the continuity of the plating around the circumference is no maintaining.

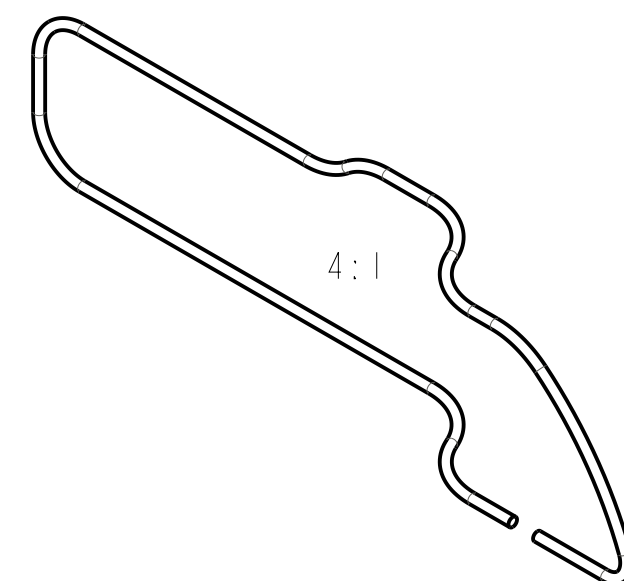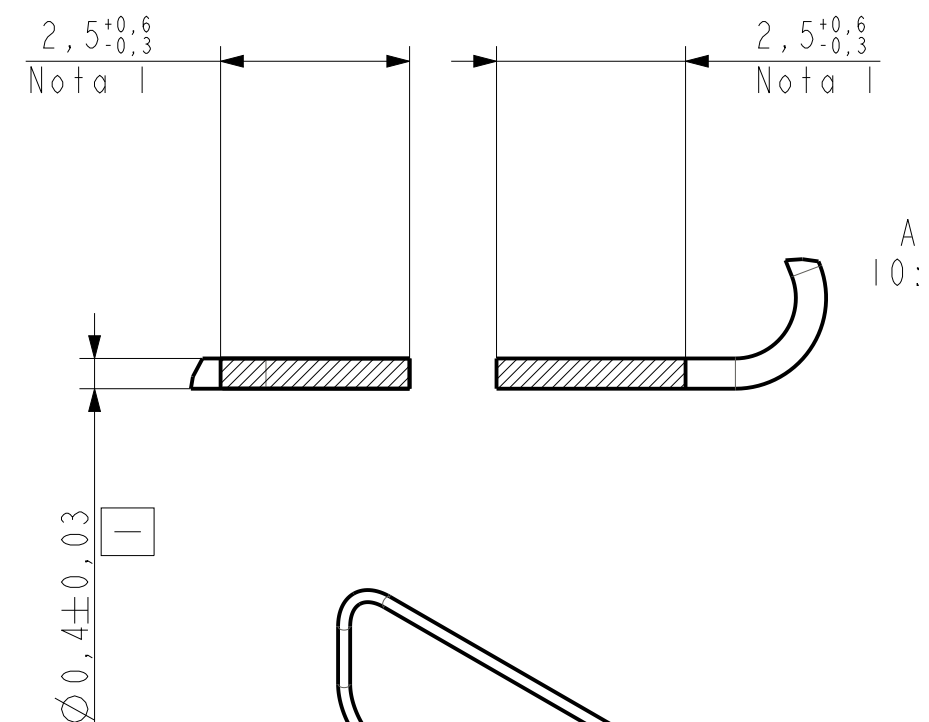

NOTA 3

SCALE 8:1

This document is SORIN's property. It can not be copied or forwarded without prior agreement of SORIN group.

A	12/06/2013	B	C	D	E	F	G
AM019151							
MATERIAL : Inox following SMCS711				REMARKS : For dimension modified, the text must be : Bold, Italic and in Red Color. <i>α: 2.66±0.05</i>			
OVERALL TOLERANCES : ± 0,1				ANGLES : ± 2°			
CARDIAC RHYTHM MANAGEMENT				SMALL ANTENNA DF4			
				Mechanical Studies and Development (MSD)			
PREPARED BY: LUCAS DATE	CHECKED BY: PASTORE DATE	APPROVED BY: BOUTAUD DATE	Scale 5:1	A3	G731	A	1/1

FF00892A