



# **FCC RADIO TEST REPORT**

## **FCC ID:2ACNECL1839**

**Product :** ASTRO

**Trade Name :** TAG Mobile

**Model Number :** CL1839

**Serial Model :** N/A

**Report No. :** NTEK-2015NT03091280R2

### **Prepared for**

TAG Mobile, LLC

1330 Capital Parkway Carrollton, TX 75006, USA

### **Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street

Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website: [www.ntek.org.cn](http://www.ntek.org.cn)

## TEST RESULT CERTIFICATION

**Applicant's name**.....: TAG Mobile, LLC  
**Address** .....: 1330 Capital Parkway Carrollton, TX 75006, USA  
**Manufacture's Name** .....: CETRIX Technologies Limited.  
**Address** .....: 13A/F South Tower, World Finance Center Harbour City, 17 Canton Road, TST KLN, Hong Kong  
**Product name**.....: ASTRO  
**Model and/or type reference** .: CL1839  
**Serial Model:** N/A  
**Standards** .....: FCC Part 22H and 24E: 01 Oct. 2014  
**Test procedure** .....: ANSI C63.4-2003, TIA/EIA 603 D

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.


**Date of Test**.....

Date (s) of performance of tests ..... 09 Mar. 2015 ~18 Mar. 2015

Date of Issue ..... 18 Mar. 2015


Test Result ..... **Pass**

Testing Engineer :



(Denny Huang)

Technical Manager :



(Brown Lu)

Authorized Signatory :



(Bill Yao)

## TABLE OF CONTENTS

|   |    |
|---|----|
| 1.1 PRODUCT DESCRIPTION .....             | 5  |
| 1.2 RELATED SUBMITTAL(S) / GRANT (S)..... | 6  |
| 1.3 TEST METHODOLOGY .....                | 6  |
| 1.4 TEST FACILITY .....                   | 6  |
| 1.5 MEASUREMENT INSTRUMENTS .....         | 6  |
| 1.6 SPECIAL ACCESSORIES.....              | 7  |
| 1.7 EQUIPMENT MODIFICATIONS .....         | 7  |
| 2. SYSTEM TEST CONFIGURATION .....        | 8  |
| 2.1 EUT CONFIGURATION.....                | 8  |
| 2.2 EUT EXERCISE .....                    | 8  |
| 2.3 GENERAL TECHNICAL REQUIREMENTS .....  | 8  |
| 2.4 CONFIGURATION OF EUT SYSTEM.....      | 9  |
| 3. SUMMARY OF TEST RESULTS .....          | 10 |
| 4. DESCRIPTION OF TEST MODES .....        | 10 |
| 5. OUTPUT POWER.....                      | 11 |
| 5.1 Conducted Output Power.....           | 11 |
| 5.2 Radiated Output Power.....            | 13 |
| 6. SPURIOUS EMISSION.....                 | 16 |
| 6.1 CONDUCTED SPURIOUS EMISSION.....      | 16 |
| 6.2 Radiated Spurious Emission .....      | 18 |
| 7. FREQUENCY STABILITY .....              | 22 |
| 7.1 MEASUREMENT METHOD .....              | 22 |
| 7.2 PROVISIONS APPLICABLE.....            | 22 |
| 7.3 MEASUREMENT RESULT .....              | 23 |
| 8. OCCUPIED BANDWIDTH .....               | 25 |

|   |           |
|---|-----------|
| <b>8.1 MEASUREMENT METHOD .....</b>                   | <b>25</b> |
| <b>8.2 PROVISIONS APPLICABLE.....</b>                 | <b>25</b> |
| <b>8.3 MEASUREMENT RESULT .....</b>                   | <b>25</b> |
| <b>9. EMISSION BANDWIDTH .....</b>                    | <b>26</b> |
| <b>9.1 MEASUREMENT METHOD .....</b>                   | <b>26</b> |
| <b>9.2 PROVISIONS APPLICABLE.....</b>                 | <b>26</b> |
| <b>9.3 MEASUREMENT RESULT .....</b>                   | <b>26</b> |
| <b>10. BAND EDGE .....</b>                            | <b>27</b> |
| <b>10.1 MEASUREMENT METHOD.....</b>                   | <b>27</b> |
| <b>10.2 PROVISIONS APPLICABLE .....</b>               | <b>27</b> |
| <b>10.3 MEASUREMENT RESULT.....</b>                   | <b>27</b> |
| <b>11. PEAK-TO-AVERAGE RATIO.....</b>                 | <b>27</b> |
| <b>11.1 MEASURING INSTRUMENTS.....</b>                | <b>27</b> |
| <b>11.2 TEST PROCEDURES .....</b>                     | <b>27</b> |
| <b>11.3 TEST SETUP .....</b>                          | <b>28</b> |
| <b>11.4 TEST RESULT OF PEAK-TO-AVERAGE RATIO.....</b> | <b>28</b> |

## 1. GENERAL INFORMATION

### 1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

|  |  |
|--|--|
| Product Designation:   | ASTRO  |
| Model Name   | CL1839   |
| Serial Model   | N/A  |
| Model Difference   | N/A  |
| Frequency Bands:   | <input checked="" type="checkbox"/> GSM 850 <input checked="" type="checkbox"/> PCS 1900 (U.S. Bands)<br><input type="checkbox"/> GSM 900 <input type="checkbox"/> DCS 1800 (Non-U.S. Bands)<br>U.S. Bands:<br><input type="checkbox"/> UMTS FDD Band II <input type="checkbox"/> UMTS FDD Band V<br>Non-U.S. Bands:<br><input type="checkbox"/> UMTS FDD Band I <input type="checkbox"/> UMTS FDD Band VIII |
| Antenna:   | FPCB Antenna   |
| Modulation Type:   | GSM/GPRS: GMSK   |
| Antenna gain:  | 1.0 dBi  |
| Power Supply:  | DC 3.7V by battery or DC 5.0V supplied by adapter  |
| Battery parameter:   | DC 3.7V/800mAh   |
| Adapter  | Mode: ASTRO CL1839<br>Input: 100-240V~, 50/60Hz, 0.12A<br>Output: 5V $\overline{\text{---}}$ , 350mA   |
| GPRS Class   | Multi-Class12<br>4 timeslots are used for GPRS   |
| Extreme Vol. Limits:   | DC3.5 V to 4.2 V (Nominal DC3.7 V)   |
| Extreme Temp. Tolerance  | -10°C to +50°C   |
| SIM CARD   | One SIM Card   |
| ** Note: The High Voltage 4.2V and Low Voltage 3.5V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage. |  |

## 1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID:2ACNECL1839** filing to comply with the FCC Part 22H&24E .

## 1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 D and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

## 1.4 TEST FACILITY

NTEK Testing Technology Co., Ltd.

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China

FCC Registered No.: 238937 IC Registered No.:9270A-1

CNAS Registration No.:L5516

## 1.5 MEASUREMENT INSTRUMENTS

| Item | Kind of Equipment    | Manufacturer      | Type No.    | Serial No. | Last calibration | Calibrated until | Calibration period |
|------|----------------------|-------------------|-------------|------------|------------------|------------------|--------------------|
| 1    | SPECTRUM ANALYZER    | AGILENT           | E4440A      | US44300399 | 2014.07.06       | 2015.07.05       | 1 YEAR             |
| 2    | TEST RECEIVER        | R&S               | ESCI        | A0304218   | 2014.07.06       | 2015.07.05       | 1 YEAR             |
| 3    | COMMUNICATION TESTER | AGILENT           | 8960        | 3104A03367 | 2014.07.06       | 2015.07.05       | 1 YEAR             |
| 4    | COMMUNICATION TESTER | R&S               | CMU200      | A0304247   | 2014.07.06       | 2015.07.05       | 1 YEAR             |
| 5    | TEST RECEIVER        | R&S               | FCKL1528    | A0304230   | 2014.07.06       | 2015.07.05       | 1 YEAR             |
| 6    | LISN                 | SCHWARZBECK       | NSLK8127    | A0304233   | 2014.07.06       | 2015.07.05       | 1 YEAR             |
| 7    | CLIMATE CHAMBER      | ALBATROSS         | --          | --         | 2014.07.06       | 2015.07.05       | 1 YEAR             |
| 8    | Loop Antenna         | Daze              | ZN30900N    | SEL0097    | 2014.07.06       | 2015.07.05       | 1 YEAR             |
| 9    | Bilogical Antenna    | A.H. Systems Inc. | SAS-521-4   | N/A        | 2014.07.06       | 2015.07.05       | 1 YEAR             |
| 10   | Horn Antenna         | EM                | EM-AH-10180 | N/A        | 2014.07.06       | 2015.07.05       | 1 YEAR             |
| 11   | Horn Antenna         | TDK RF            | 3115        | 00052735   | 2014.07.06       | 2015.07.05       | 1 YEAR             |

**1.6 SPECIAL ACCESSORIES**

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

**1.7 EQUIPMENT MODIFICATIONS**

Not available for this EUT intended for grant.

## 2. SYSTEM TEST CONFIGURATION

### 2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

### 2.3 GENERAL TECHNICAL REQUIREMENTS

| Item Number | Item Description      |                             | FCC Rules                |
|-------------|-----------------------|-----------------------------|--------------------------|
| 1           | Output Power          | Conducted output power      | 22.913(a) / 24.232 (b)   |
|             |                       | Radiated output power       |                          |
| 2           | Spurious Emission     | Conducted spurious emission | 2.1051 / 22.917 / 24.238 |
|             |                       | Radiated spurious emission  |                          |
| 3           | Frequency Stability   |                             | 2.1055 /24.235           |
| 4           | Occupied Bandwidth    |                             | 2.1049 (h)(i)            |
| 5           | Emission Bandwidth    |                             | 22.917(b) / 24.238 (b)   |
| 6           | Band Edge             |                             | 22.917(b) / 24.238 (b)   |
| 7           | Peak-to-Average Ratio |                             | 24.232(d)                |



## 2.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

| Item | Equipment | Model No. | ID or Specification        | Note |
|------|-----------|-----------|----------------------------|------|
| 1    | ASTRO     | CL1839    | <b>FCC ID: 2ACNECL1839</b> | EUT  |
|      |           |           |                            |      |
|      |           |           |                            |      |
|      |           |           |                            |      |
|      |           |           |                            |      |

*Note: All the accessories have been used during the test.  
the following "EUT" in setup diagram means EUT system.*

### 3. SUMMARY OF TEST RESULTS

| Item Number | Item Description      |                             | FCC Rules                | Result |
|-------------|-----------------------|-----------------------------|--------------------------|--------|
| 1           | Output Power          | Conducted Output Power      | 22.913(a) / 24.232 (b)   | Pass   |
|             |                       | Radiated Output Power       |                          |        |
| 2           | Spurious Emission     | Conducted Spurious Emission | 2.1051 / 22.917 / 24.238 | Pass   |
|             |                       | Radiated Spurious Emission  |                          |        |
| 3           | Frequency Stability   |                             | 2.1055 /24.235           | Pass   |
| 4           | Occupied Bandwidth    |                             | 2.1049 (h)(i)            | Pass   |
| 5           | Emission Bandwidth    |                             | 22.917(b) / 24.238 (b)   | Pass   |
| 6           | Band Edge             |                             | 22.917(b) / 24.238 (b)   | Pass   |
| 7           | Peak-to-Average Ratio |                             | 24.232(d)                | Pass   |

### 4. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

**Note:** GSM/GPRS850, GSM/GPRS1900 modes have been tested during the test.

the worst condition (GSM850, GSM1900) be recorded in the test report if no other modes test data.

## 5. OUTPUT POWER

### 5.1 Conducted Output Power

#### 5.1.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GPRS/EDGE850, GPRS/EDGE1900, HSDPA band II) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

#### 5.1.2 MEASUREMENT RESULT

##### GSM 850:

| Mode             | Frequency (MHz) | Maximum Burst-Average Output Power |
|------------------|-----------------|------------------------------------|
| GSM850           | 824.2           | 32.75                              |
|                  | 836.6           | 32.56                              |
|                  | 848.8           | 32.58                              |
| GPRS850 (1 Slot) | 824.2           | 32.86                              |
|                  | 836.6           | 32.59                              |
|                  | 848.8           | 32.55                              |
| GPRS850 (2 Slot) | 824.2           | 32.02                              |
|                  | 836.6           | 31.84                              |
|                  | 848.8           | 31.74                              |
| GPRS850 (3 Slot) | 824.2           | 30.34                              |
|                  | 836.6           | 30.06                              |
|                  | 848.8           | 29.94                              |
| GPRS850 (4 Slot) | 824.2           | 29.24                              |
|                  | 836.6           | 28.93                              |
|                  | 848.8           | 28.69                              |

**PCS 1900:**

| Mode                 | Frequency<br>(MHz) | Maximum Burst-Average<br>Output Power |
|----------------------|--------------------|---------------------------------------|
| GSM1900              | 1850.2             | 29.71                                 |
|                      | 1880               | 29.47                                 |
|                      | 1909.8             | 29.37                                 |
| GPRS1900<br>(1 Slot) | 1850.2             | 29.72                                 |
|                      | 1880               | 29.51                                 |
|                      | 1909.8             | 29.56                                 |
| GPRS1900<br>(2 Slot) | 1850.2             | 28.97                                 |
|                      | 1880               | 28.82                                 |
|                      | 1909.8             | 28.77                                 |
| GPRS1900<br>(3 Slot) | 1850.2             | 27.26                                 |
|                      | 1880               | 27.24                                 |
|                      | 1909.8             | 27.32                                 |
| GPRS1900<br>(4 Slot) | 1850.2             | 26.23                                 |
|                      | 1880               | 26.22                                 |
|                      | 1909.8             | 26.41                                 |

## 5.2 Radiated Output Power

### 5.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603D-2010 were applied.

- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power ( $P_{in}$ ) is applied to the input of the dipole, and the power received ( $P_r$ ) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as  $AR_{pl} = P_{in} + 2.15 - P_r$ . The  $AR_{pl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below:  $Power = P_{Mea} + AR_{pl}$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power ( $P_{in}$ ).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15 \text{ dBi}$ .
9. Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 5.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

| Mode     | Nominal Peak Power            |
|----------|-------------------------------|
| GSM 850  | $\leq 38.45 \text{ dBm (7W)}$ |
| PCS 1900 | $\leq 33 \text{ dBm (2W)}$    |

### 5.2.3 MEASUREMENT RESULT

| Radiated Power (ERP) for GSM 850 MHZ |           |                     |                          |            |
|--------------------------------------|-----------|---------------------|--------------------------|------------|
| Mode                                 | Frequency | Result              |                          | Conclusion |
|                                      |           | Max. Peak ERP (dBm) | Polarization Of Max. ERP |            |
| GSM850                               | 824.2     | 30.05               | Horizontal               | Pass       |
|                                      | 824.2     | 29.83               | Vertical                 | Pass       |
|                                      | 836.6     | 29.98               | Horizontal               | Pass       |
|                                      | 836.6     | 29.93               | Vertical                 | Pass       |
|                                      | 848.8     | 30.68               | Horizontal               | Pass       |
|                                      | 848.8     | 29.99               | Vertical                 | Pass       |

| Radiated Power (ERP) for GPRS 850 MHZ |           |                     |                          |            |
|---------------------------------------|-----------|---------------------|--------------------------|------------|
| Mode                                  | Frequency | Result              |                          | Conclusion |
|                                       |           | Max. Peak ERP (dBm) | Polarization Of Max. ERP |            |
| GPRS850                               | 824.2     | 29.68               | Horizontal               | Pass       |
|                                       | 824.2     | 30.53               | Vertical                 | Pass       |
|                                       | 836.6     | 30.64               | Horizontal               | Pass       |
|                                       | 836.6     | 30.16               | Vertical                 | Pass       |
|                                       | 848.8     | <b>30.69</b>        | Horizontal               | Pass       |
|                                       | 848.8     | 29.93               | Vertical                 | Pass       |

| Radiated Power (E.I.R.P) for PCS 1900 MHZ |           |                         |                               |            |
|---|-----------|-------------------------|-------------------------------|------------|
| Mode                                      | Frequency | Result                  |                               | Conclusion |
|   |           | Max. Peak E.I.R.P.(dBm) | Polarization Of Max. E.I.R.P. |            |
| PCS1900                                   | 1850.2    | 28.67                   | Horizontal                    | Pass       |
|   | 1850.2    | 27.47                   | Vertical                      | Pass       |
|   | 1880.0    | 29.52                   | Horizontal                    | Pass       |
|   | 1880.0    | 27.32                   | Vertical                      | Pass       |
|   | 1909.8    | 29.54                   | Horizontal                    | Pass       |
|   | 1909.8    | 28.29                   | Vertical                      | Pass       |

| Radiated Power (E.I.R.P) for GPRS 1900 MHZ |           |                            |                                  |            |
|--|-----------|----------------------------|----------------------------------|------------|
| Mode                                       | Frequency | Result                     |                                  | Conclusion |
|  |           | Max. Peak<br>E.I.R.P.(dBm) | Polarization<br>Of Max. E.I.R.P. |            |
| GPRS<br>1900                               | 1850.2    | 29.69                      | Horizontal                       | Pass       |
|  | 1850.2    | 28.95                      | Vertical                         | Pass       |
|  | 1880.0    | 29.08                      | Horizontal                       | Pass       |
|  | 1880.0    | 28.67                      | Vertical                         | Pass       |
|  | 1909.8    | 28.81                      | Horizontal                       | Pass       |
|  | 1909.8    | 28.76                      | Vertical                         | Pass       |

NOTE 1: in the part, result the worst case GPRS 1slot for GSM 850 and PCS1900

## 6. SPURIOUS EMISSION

### 6.1 CONDUCTED SPURIOUS EMISSION

#### 6.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.

2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

| Typical Channels for testing of GSM/GPRS |                 |
|--|-----------------|
| Channel                                  | Frequency (MHz) |
| 128                                      | 824.2           |
| 190                                      | 836.6           |
| 251                                      | 848.8           |

| Typical Channels for testing of PCS/ GPRS |                 |
|---|-----------------|
| Channel                                   | Frequency (MHz) |
| 512                                       | 1850.2          |
| 661                                       | 1880.0          |
| 810                                       | 1909.8          |



### 6.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

### 6.1.3 MEASUREMENT RESULT

**PLEASE REFER TO : APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION**

- Note:**
1. Below 30MHZ no Spurious found and The GSM modes is the worst condition.
  2. As no emission found in standby or receive mode, no recording in this report.


## 6.2 Radiated Spurious Emission

### 6.2.1 MEASUREMENT METHOD


The measurements procedures specified in TIA-603D-2010 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS850, GPRS1900,) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.Only shown the worst data.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as,  $RSE = R_x \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107 \text{ (dBuV to dBm)}$  The SA is calibrated using following setup.

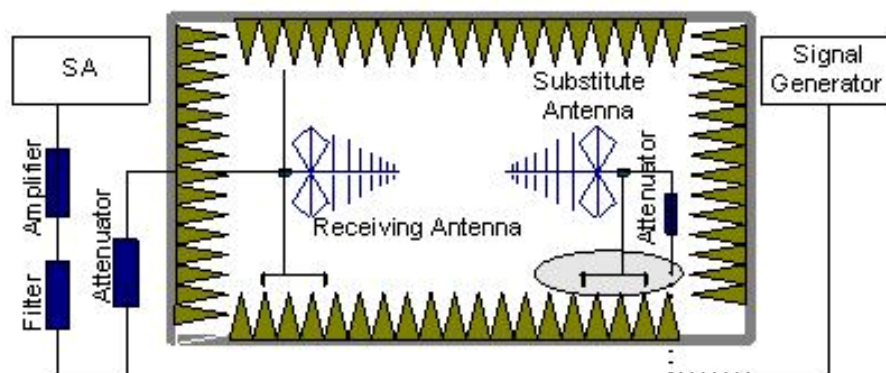

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

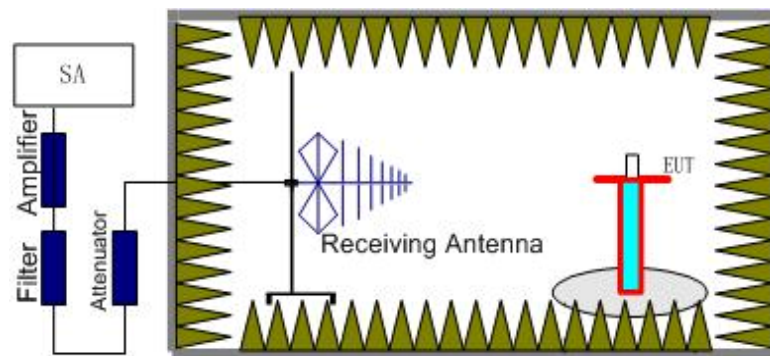

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the  $AR_{pl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below:  $Power = P_{Mea} + AR_{pl}$

### 6.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power ( $P$ , in Watts) by at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Note:** only result the worst condition of each test mode:

### 6.2.3 MEASUREMENT RESULT

GSM 850:

| Test Results for Channel 128/824.2 MHz |            |                        |                        |             |            |
|--|------------|------------------------|------------------------|-------------|------------|
| Frequency(MHz)                         | Power(dBm) | A <sub>Rpl</sub> (dBm) | P <sub>Mea</sub> (dBm) | Limit (dBm) | Polarity   |
| 1648.4                                 | -27.47     | 7.8                    | -19.67                 | -13         | Vertical   |
| 1648.4                                 | -31.94     | 7.8                    | -24.14                 | -13         | Horizontal |
| 2472.6                                 | -31.44     | 11                     | -20.44                 | -13         | Vertical   |
| 2472.6                                 | -31.65     | 11                     | -20.65                 | -13         | Horizontal |
| 3296.8                                 | -30.38     | 12.3                   | -18.08                 | -13         | Horizontal |
| 3296.8                                 | -33.75     | 12.3                   | -21.45                 | -13         | Vertical   |
| Test Results for Channel 190/836.6 MHz |            |                        |                        |             |            |
| 1673.2                                 | -29.85     | 8                      | -21.85                 | -13         | Vertical   |
| 1673.2                                 | -34.27     | 8                      | -26.27                 | -13         | Horizontal |
| 2509.8                                 | -30.16     | 11.2                   | -18.96                 | -13         | Vertical   |
| 2509.8                                 | -32.49     | 11.2                   | -21.29                 | -13         | Horizontal |
| 3346.4                                 | -32.25     | 12.6                   | -19.65                 | -13         | Horizontal |
| 3346.4                                 | -30.96     | 12.6                   | -18.36                 | -13         | Vertical   |
| Test Results for Channel 251/848.8 MHz |            |                        |                        |             |            |
| 1697.6                                 | -26.72     | 8.1                    | -18.62                 | -13         | Vertical   |
| 1697.6                                 | -29.91     | 8.1                    | -21.81                 | -13         | Horizontal |
| 2546.4                                 | -30.8      | 11.69                  | -19.11                 | -13         | Vertical   |
| 2546.4                                 | -32.13     | 11.69                  | -20.44                 | -13         | Horizontal |
| 3395.2                                 | -31.08     | 12.92                  | -18.16                 | -13         | Horizontal |
| 3395.2                                 | -32.14     | 12.92                  | -19.22                 | -13         | Vertical   |

PCS 1900:

| Test Results for Channel 512/1850.2MHz |            |                        |                        |             |            |
|--|------------|------------------------|------------------------|-------------|------------|
| Frequency(MHz)                         | Power(dBm) | A <sub>Rpl</sub> (dBm) | P <sub>Mea</sub> (dBm) | Limit (dBm) | Polarity   |
| 3700.4                                 | -35.98     | 13.42                  | -22.56                 | -13         | Horizontal |
| 3700.4                                 | -36.91     | 13.42                  | -23.49                 | -13         | Vertical   |
| 5550.6                                 | -36.76     | 17.12                  | -19.64                 | -13         | Vertical   |
| 5550.6                                 | -40.31     | 17.12                  | -23.19                 | -13         | Horizontal |
| 7400.8                                 | -38.65     | 19.26                  | -19.39                 | -13         | Horizontal |
| 7400.8                                 | -40.13     | 19.26                  | -20.87                 | -13         | Vertical   |
| Test Results for Channel 661/1880.0MHz |            |                        |                        |             |            |
| 3760                                   | -32.63     | 13.76                  | -18.87                 | -13         | Horizontal |
| 3760                                   | -35.81     | 13.76                  | -22.05                 | -13         | Vertical   |
| 5640                                   | -38.61     | 17.56                  | -21.05                 | -13         | Vertical   |
| 5640                                   | -42.64     | 17.56                  | -25.08                 | -13         | Horizontal |
| 7520                                   | -42.37     | 19.6                   | -22.77                 | -13         | Horizontal |
| 7520                                   | -42.92     | 19.6                   | -23.32                 | -13         | Vertical   |
| Test Results for Channel 810/1909.8MHz |            |                        |                        |             |            |
| 3819.6                                 | -34.54     | 13.87                  | -20.67                 | -13         | Horizontal |
| 3819.6                                 | -35.51     | 13.87                  | -21.64                 | -13         | Vertical   |
| 5729.4                                 | -38.89     | 17.66                  | -21.23                 | -13         | Vertical   |
| 5729.4                                 | -37.06     | 17.66                  | -19.4                  | -13         | Horizontal |
| 7639.2                                 | -38.19     | 19.75                  | -18.44                 | -13         | Horizontal |
| 7639.2                                 | -38.87     | 19.75                  | -19.12                 | -13         | Vertical   |

**Note:** Below 30MHZ no Spurious found and The GSM/PCS modes is the worst condition.

## 7. FREQUENCY STABILITY

### 7.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -10°C.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GSM 850 band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +50°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10°C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### 7.2 PROVISIONS APPLICABLE

#### 7.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

### 7.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

### 7.3 MEASUREMENT RESULT

| Frequency Error Against Voltage for GSM 850 band |                      |                       |
|--|----------------------|-----------------------|
| Voltage (V)                                      | Frequency Error (Hz) | Frequency Error (ppm) |
| 3.5  | 20                   | 0.024                 |
| 3.7  | 22                   | 0.026                 |
| 4.2  | 21                   | 0.025                 |

| Frequency Error Against Temperature for GSM 850 band |                      |                       |
|--|----------------------|-----------------------|
| Temperature (°C)                                     | Frequency Error (Hz) | Frequency Error (ppm) |
| -10  | 41                   | 0.049                 |
| 0  | 45                   | 0.054                 |
| 10   | 34                   | 0.041                 |
| 20   | 27                   | 0.032                 |
| 30   | 26                   | 0.031                 |
| 40   | 39                   | 0.047                 |
| 50   | 42                   | 0.050                 |

Note: The EUT doesn't work below -10°C

| Frequency Error Against Voltage for GSM 1900 band |                      |                       |
|---|----------------------|-----------------------|
| Voltage (V)                                       | Frequency Error (Hz) | Frequency Error (ppm) |
| 3.5   | 27                   | 0.014                 |
| 3.7   | 33                   | 0.018                 |
| 4.2   | 35                   | 0.019                 |

| Frequency Error Against Temperature for GSM 1900 band |                      |                       |
|---|----------------------|-----------------------|
| Temperature (°C)                                      | Frequency Error (Hz) | Frequency Error (ppm) |
| -10   | 36                   | 0.019                 |
| 0   | 25                   | 0.013                 |
| 10  | 24                   | 0.013                 |
| 20  | 34                   | 0.018                 |
| 30  | 37                   | 0.020                 |
| 40  | 43                   | 0.023                 |
| 50  | 45                   | 0.024                 |

Note: The EUT doesn't work below -10°C



## 8. OCCUPIED BANDWIDTH

### 8.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### 8.2 PROVISIONS APPLICABLE

The occupied bandwidth (99%) shall not exceed 300 KHz.

### 8.3 MEASUREMENT RESULT

| Occupied Bandwidth (99%) for GSM 850 band |                |                                |
|---|----------------|--------------------------------|
| Mode                                      | Frequency(MHz) | Occupied Bandwidth (99%)( kHz) |
| Low Channel                               | 824.2          | 244.176                        |
| Middle Channel                            | 836.6          | 244.496                        |
| High Channel                              | 848.8          | 248.990                        |

| Occupied Bandwidth (99%) for GSM1900 band |                |                                |
|---|----------------|--------------------------------|
| Mode                                      | Frequency(MHz) | Occupied Bandwidth (99%)( kHz) |
| Low Channel                               | 1850.2         | 244.878                        |
| Middle Channel                            | 1880.0         | 242.916                        |
| High Channel                              | 1909.8         | 244.540                        |

## 9. EMISSION BANDWIDTH

### 9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### 9.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

### 9.3 MEASUREMENT RESULT

| Emission Bandwidth (-26dBc) for GSM850 band |                |                                   |
|---|----------------|-----------------------------------|
| Mode  | Frequency(MHz) | Emission Bandwidth (-26dBc)( kHz) |
| Low Channel                                 | 824.2          | 316.435                           |
| Middle Channel                              | 836.6          | 318.680                           |
| High Channel                                | 848.8          | 325.260                           |

| Emission Bandwidth (-26dBc) for GSM1900 band |                |                                   |
|--|----------------|-----------------------------------|
| Mode   | Frequency(MHz) | Emission Bandwidth (-26dBc)( kHz) |
| Low Channel                                  | 1850.2         | 318.400                           |
| Middle Channel                               | 1880.0         | 312.624                           |
| High Channel                                 | 1909.8         | 319.914                           |

## **10. BAND EDGE**

### **10.1 MEASUREMENT METHOD**

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### **10.2 PROVISIONS APPLICABLE**

as Specified in FCC rules of 22.917(b) and 24.238(b)

### **10.3 MEASUREMENT RESULT**

Please refers to Appendix III for compliance test plots for band edges

## **11. Peak-to-Average Ratio**

### **DESCRIPTION OF THE PAR MEASUREMENT**

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


### **11.1 MEASURING INSTRUMENTS**

See list of measuring instruments of this test report.

### **11.2 TEST PROCEDURES**

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
  - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
  - b. Set EUT in maximum power output, and triggered the burst signal.
  - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.

### 11.3 TEST SETUP

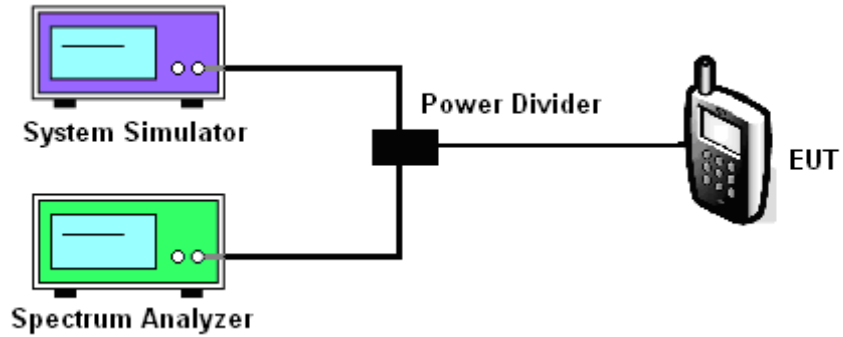

### 11.4 TEST RESULT OF PEAK-TO-AVERAGE RATIO


| Cellular Band                 |              |              |               |              |              |               |
|-------------------------------|--------------|--------------|---------------|--------------|--------------|---------------|
| Modes                         | GSM850(GSM)  |              |               | GSM1900(GSM) |              |               |
| Channel                       | 129<br>(Low) | 190<br>(Mid) | 251<br>(High) | 512<br>(Low) | 661<br>(Mid) | 810<br>(High) |
| Frequency(MHz)                | 824.2        | 836.6        | 848.8         | 1850.2       | 1880         | 1909.8        |
| Peak-to-Average Ratio<br>(dB) | 0.03         | 0.04         | 0.05          | 0.01         | 0.03         | 0.02          |

# **APPENDIX I**


## **TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION**

# CONDUCTED EMISSION IN GSM 850 BAND


Conducted Emission Transmitting Mode CH 128 30MHz – 5GHz

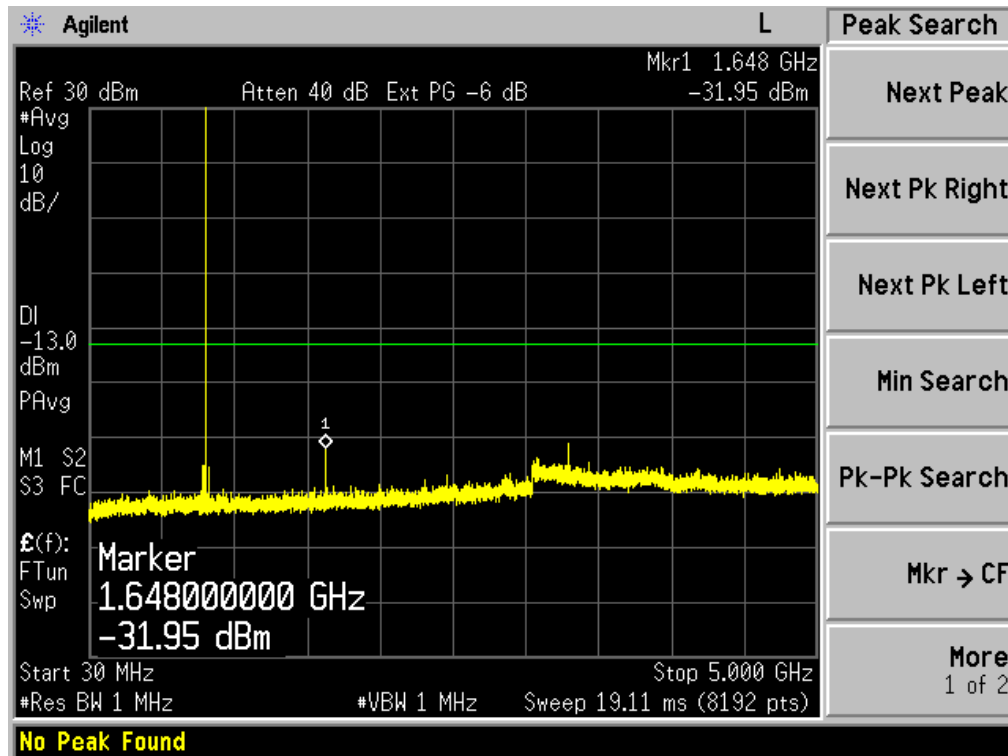


Conducted Emission Transmitting Mode CH 128 5GHz – 10GHz

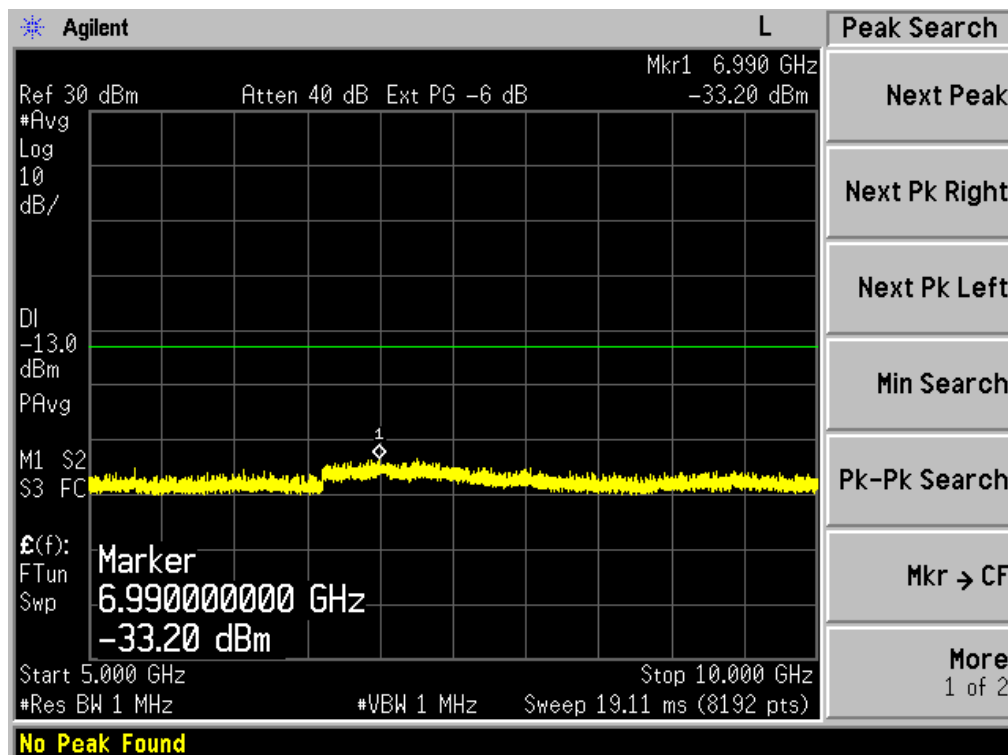


Conducted Emission Transmitting Mode CH 190 30MHz – 5GHz

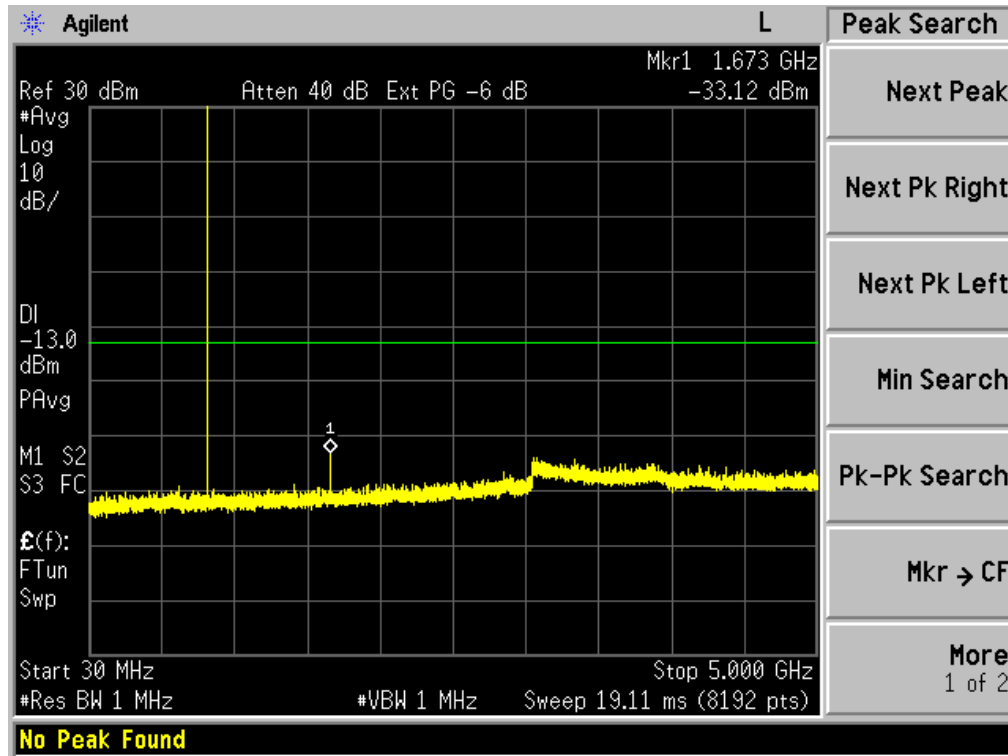


Conducted Emission Transmitting Mode CH 190 5GHz – 10GHz

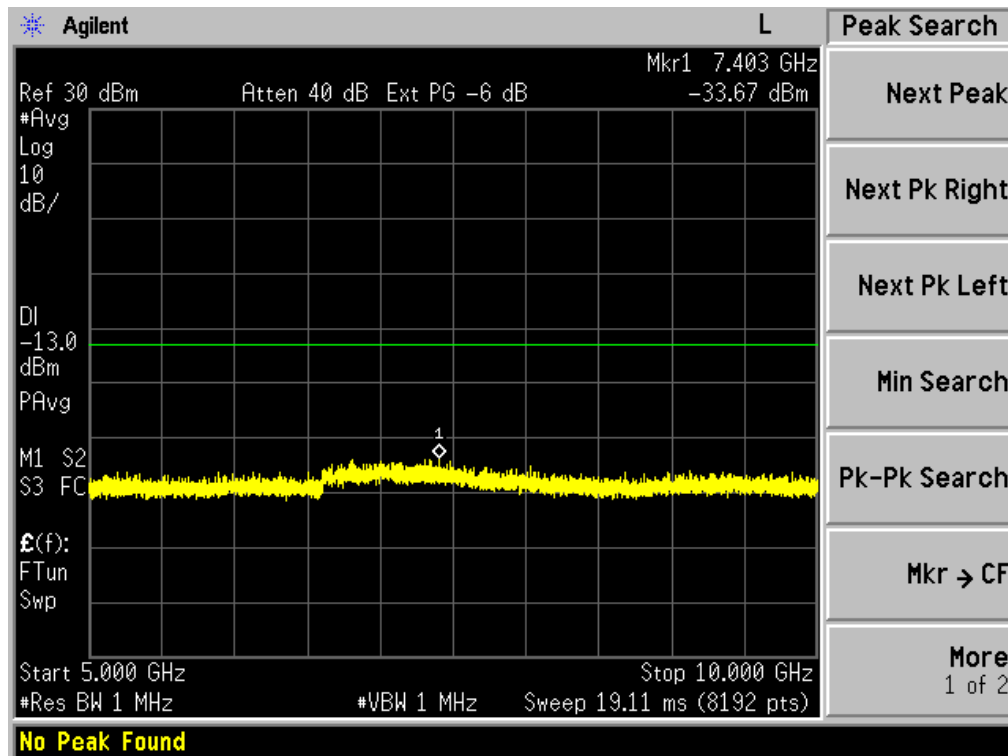

Conducted Emission Transmitting Mode CH 251 30MHz – 5GHz

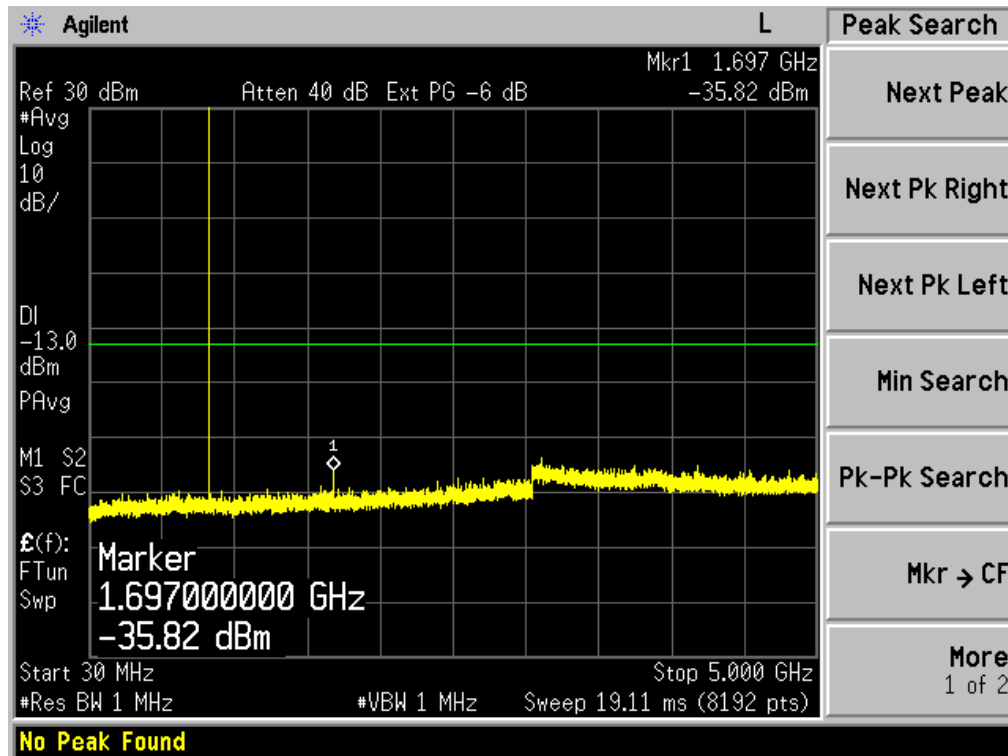


Conducted Emission Transmitting Mode CH 251 5GHz – 10GHz

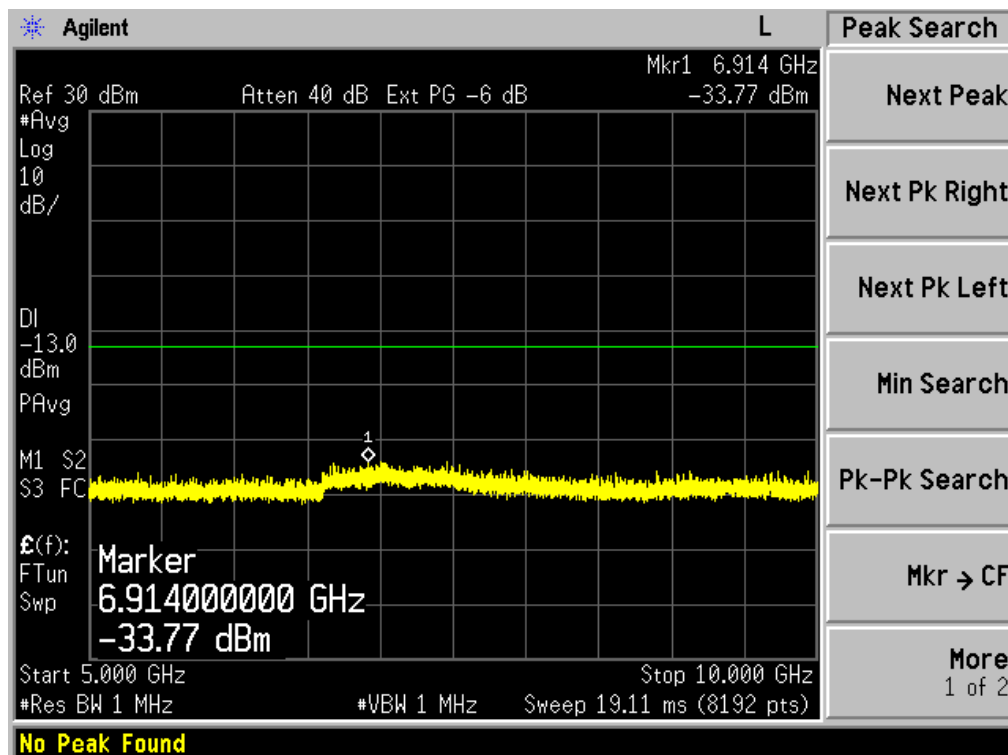




CONDUCTED EMISSION IN GSM1900 BAND


Conducted Emission Transmitting Mode CH 512 30MHz – 10GHz

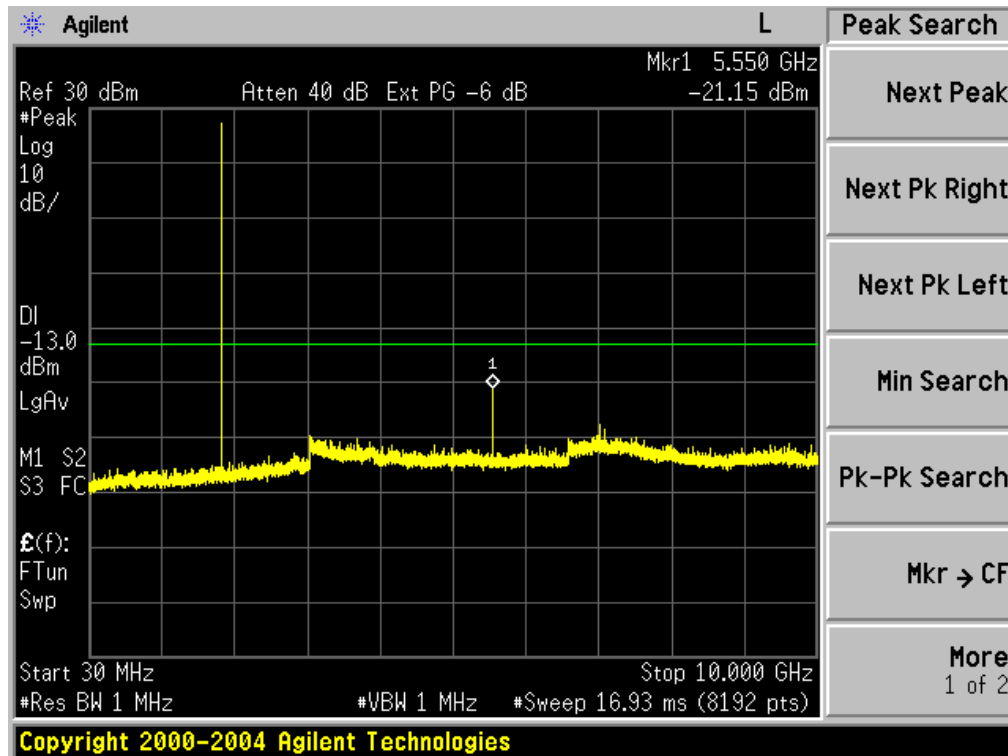


Conducted Emission Transmitting Mode CH 512 10GHz – 20GHz

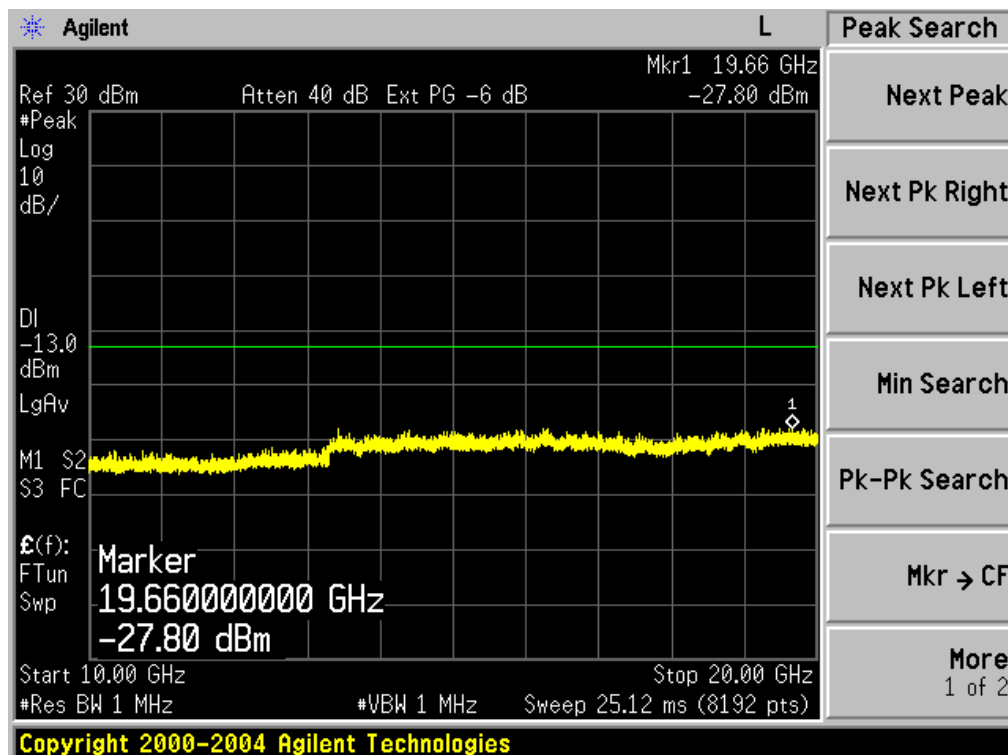


Conducted Emission Transmitting Mode CH 661 30MHz – 10GHz

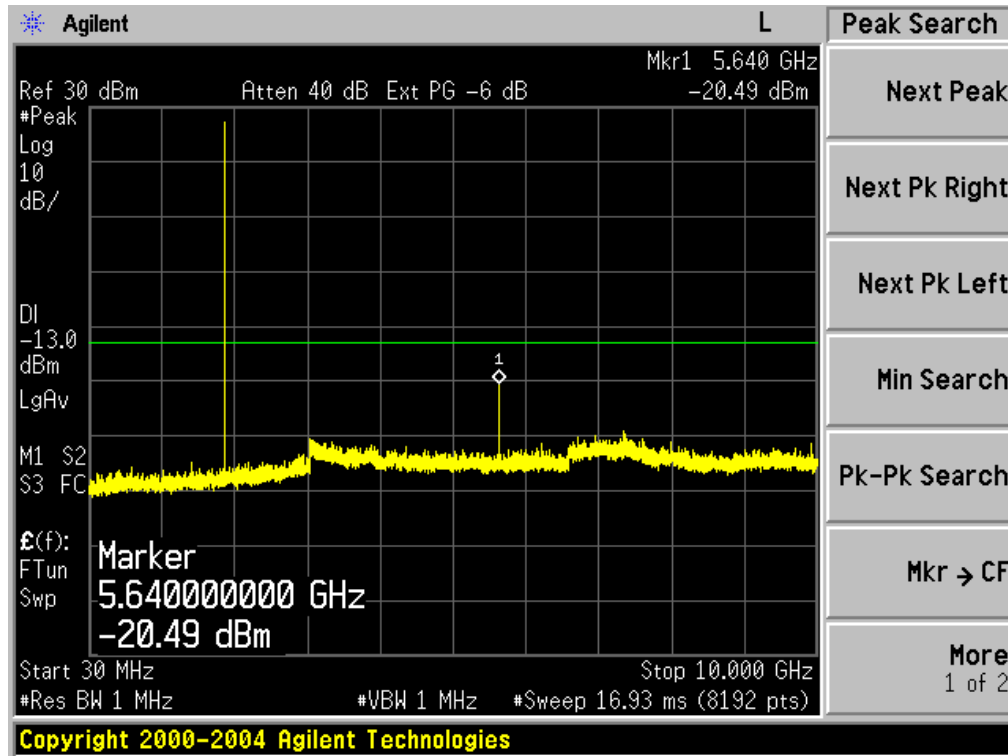


Conducted Emission Transmitting Mode CH 661 10GHz – 20GHz

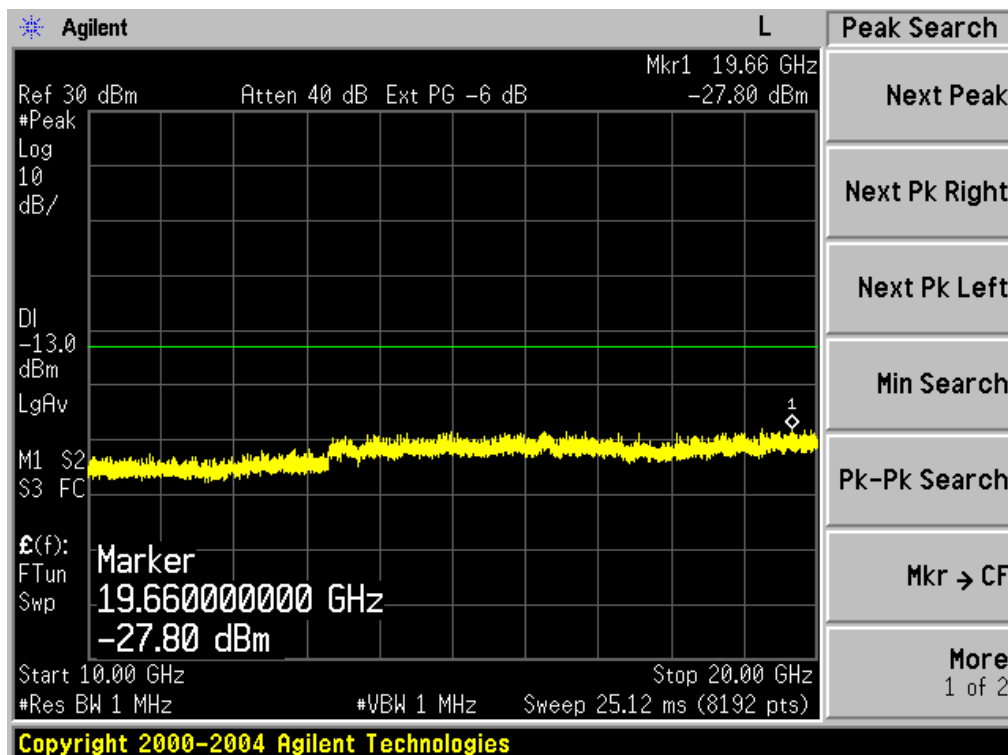

Conducted Emission Transmitting Mode CH 810 30MHz – 10GHz

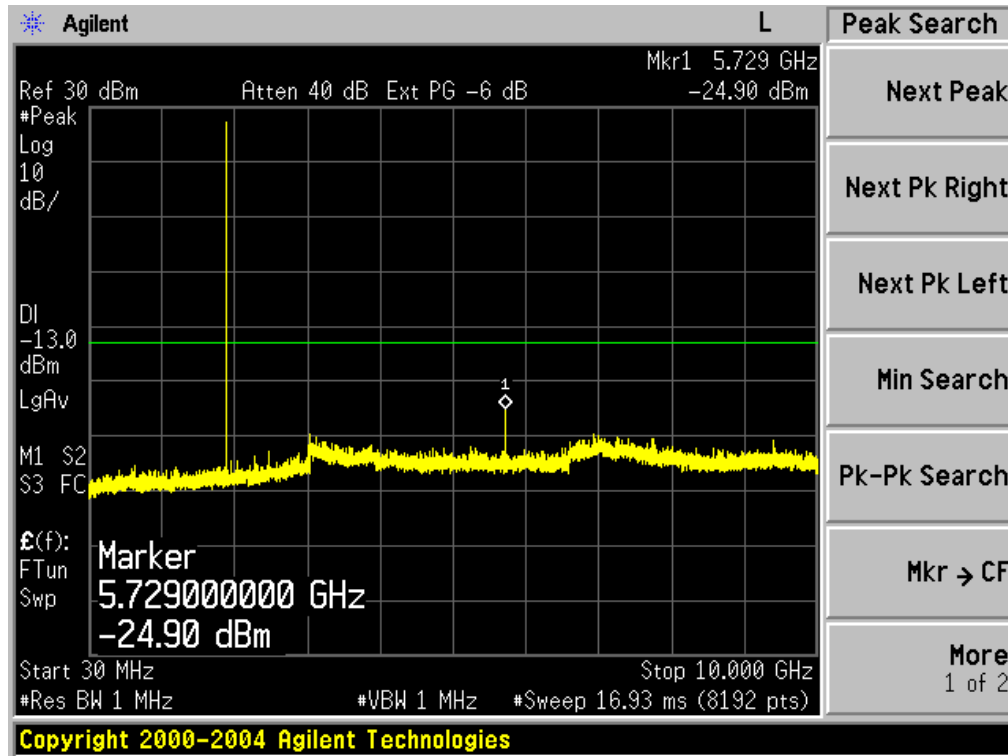

Conducted Emission Transmitting Mode CH 810 10GHz – 20GHz

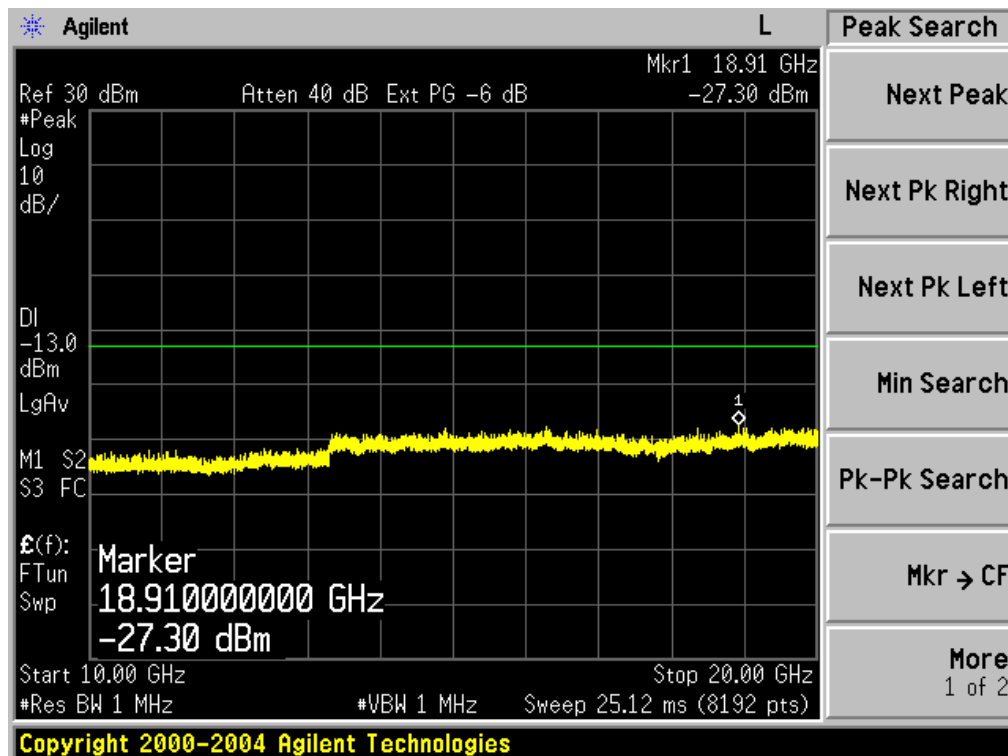


**APPENDIX II**


**TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)**

**EMISSION BANDWIDTH (-26dBC)**


Occupied Bandwidth (99%) GSM 850 BAND CH 128

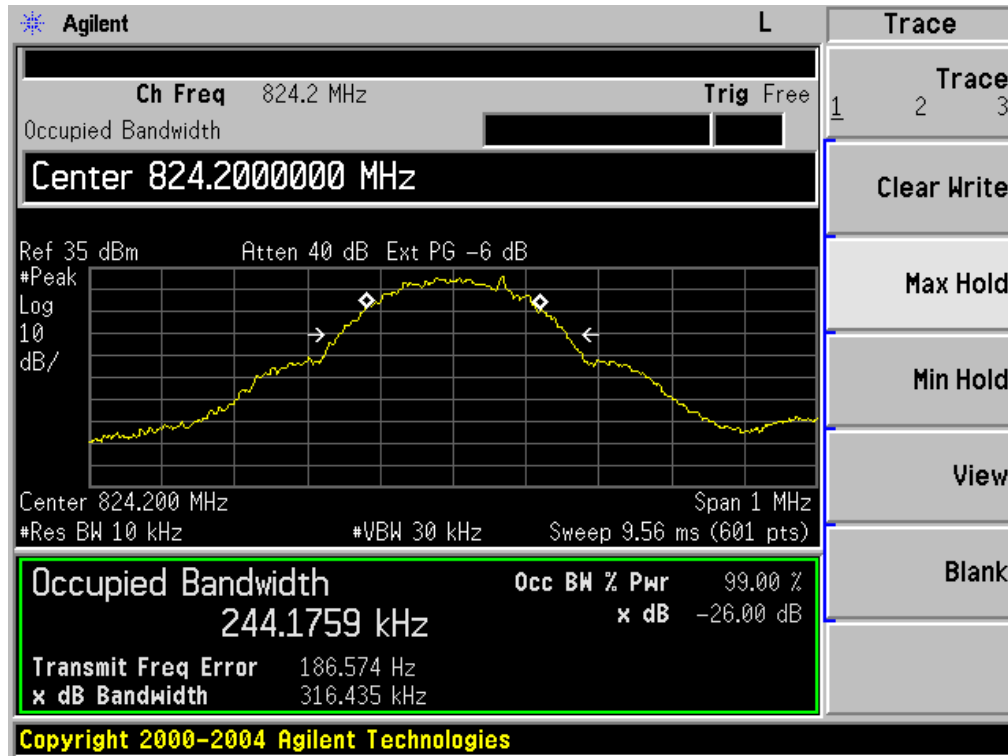


Occupied Bandwidth (99%) GSM 850 BAND CH 190

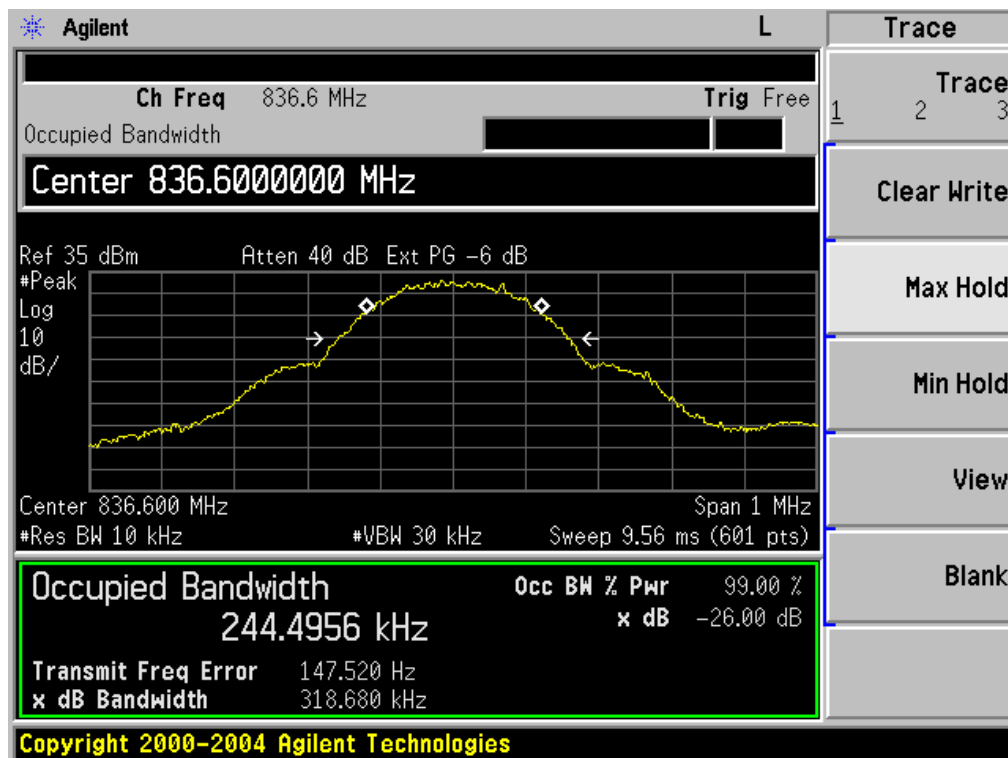


Occupied Bandwidth (99%) GSM 850 BAND CH 251

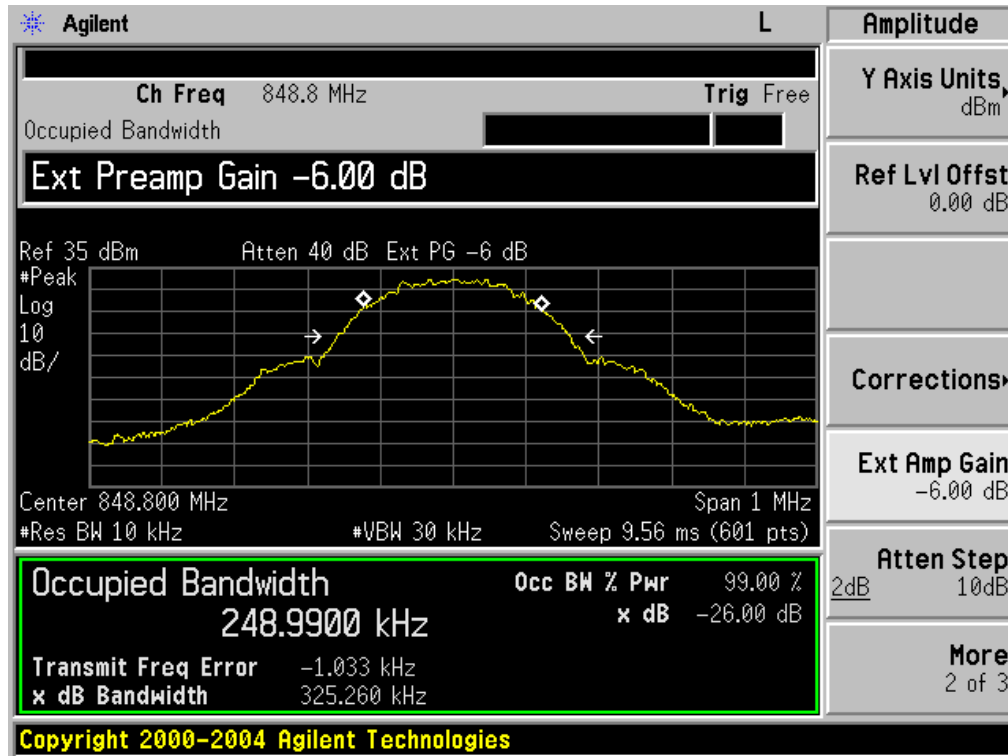


Occupied Bandwidth (99%) PCS 1900 BAND CH 512

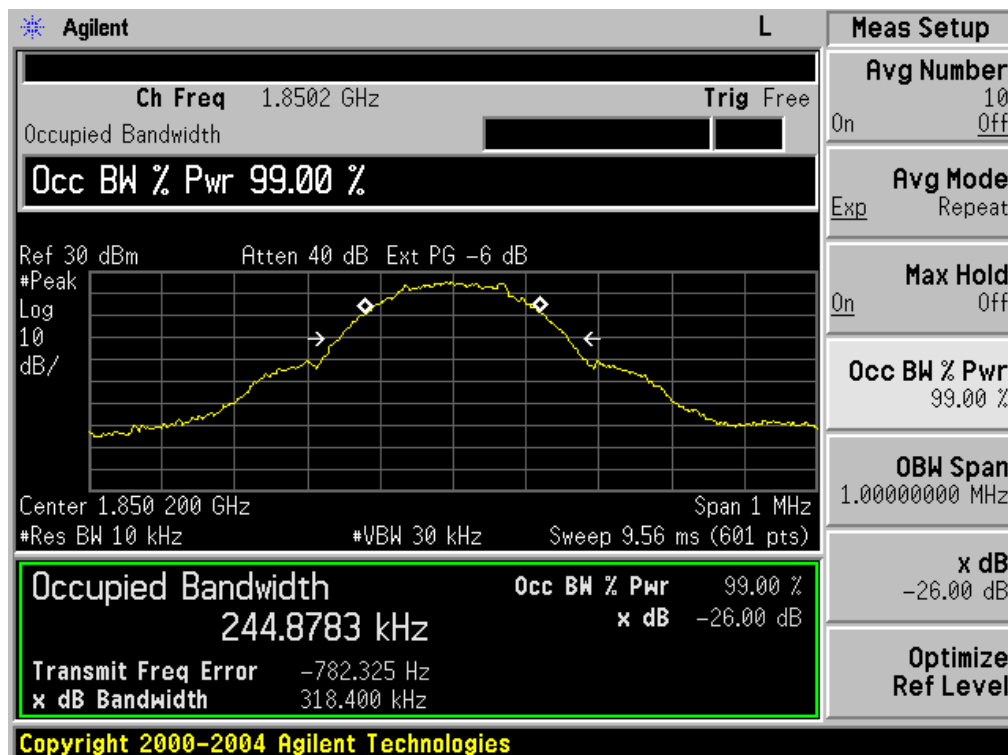

Occupied Bandwidth (99%) PCS 1900 BAND CH 661

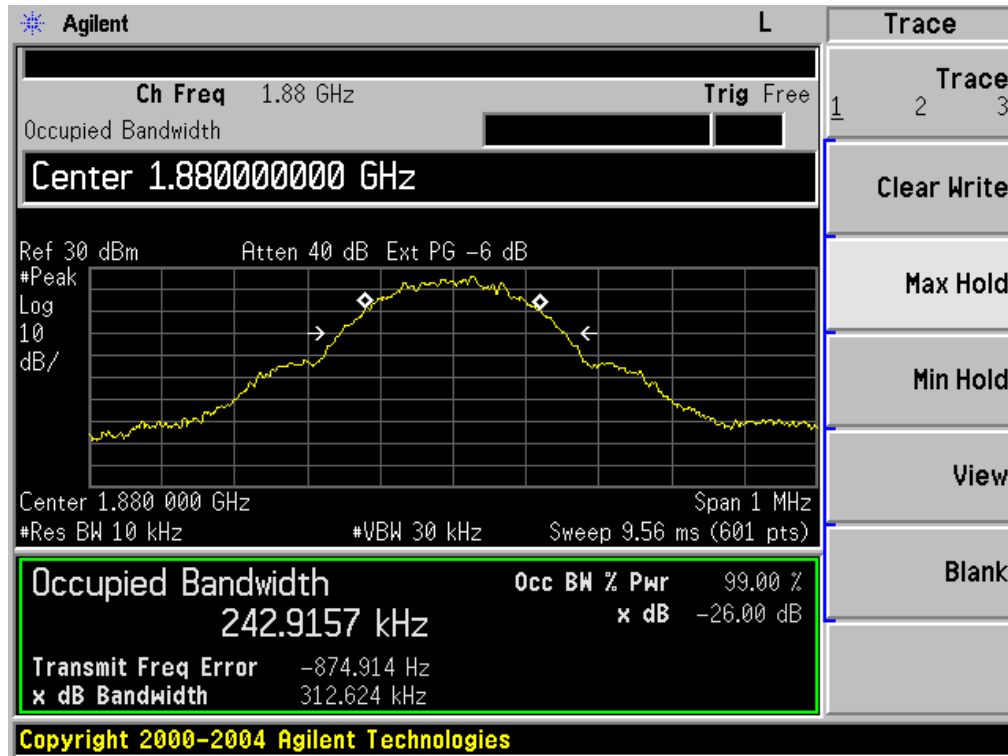

Occupied Bandwidth (99%) PCS 1900 BAND CH 810

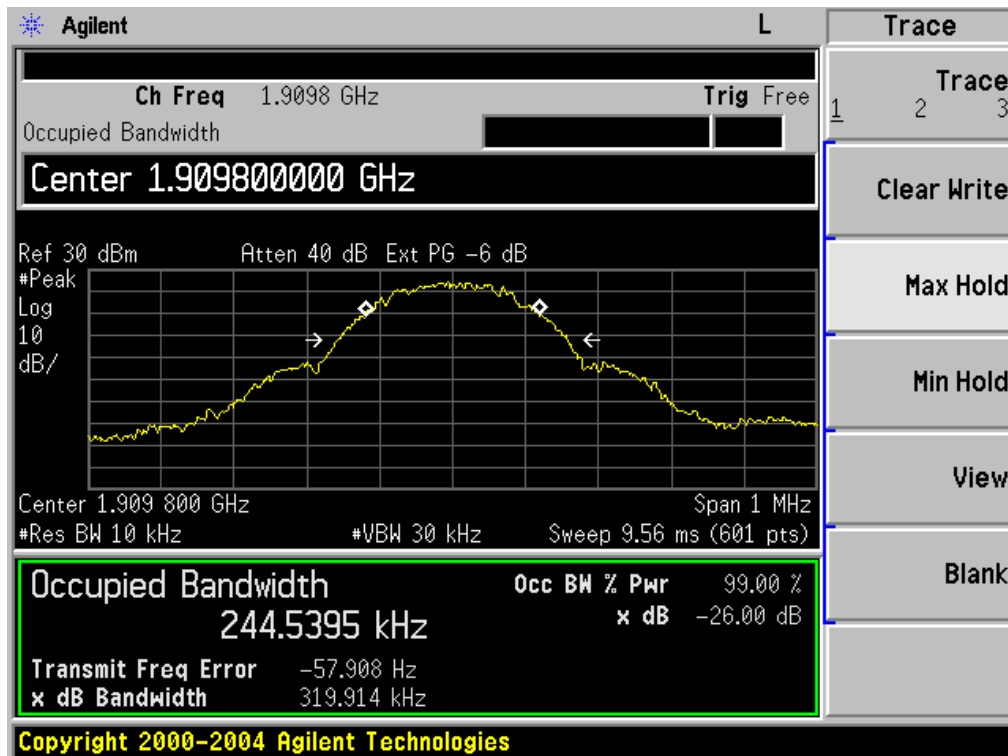


## **APPENDIX III**


### **TEST PLOTS FOR BAND EDGES**




Low Band Edge GSM 850 BAND CH 128

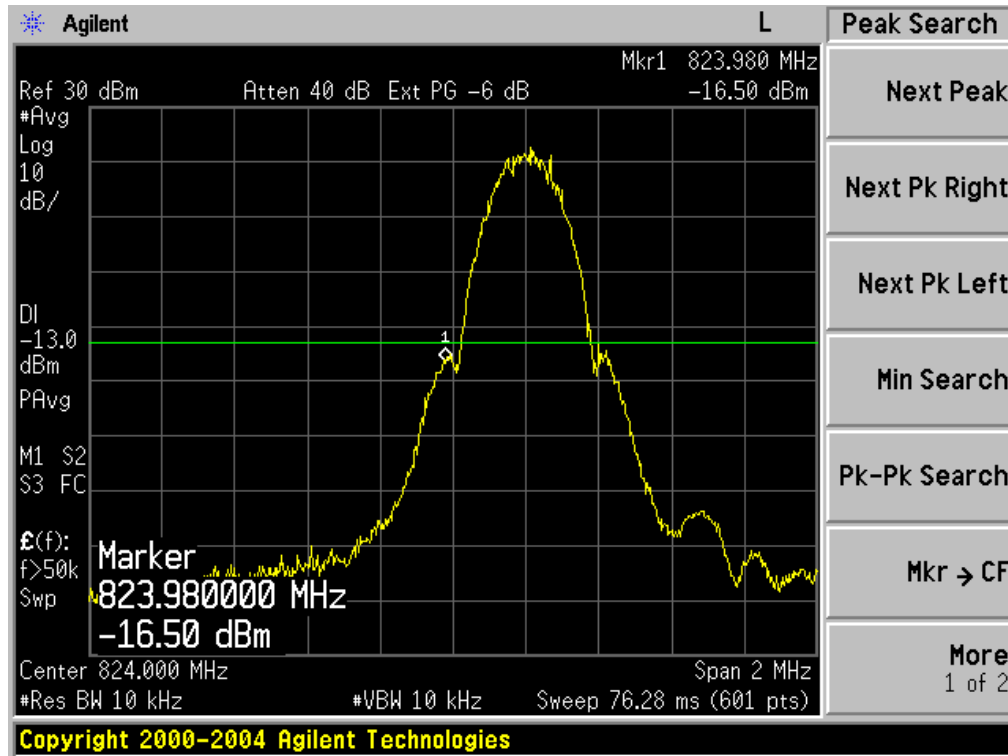


High Band Edge GSM 850 BAND CH 251

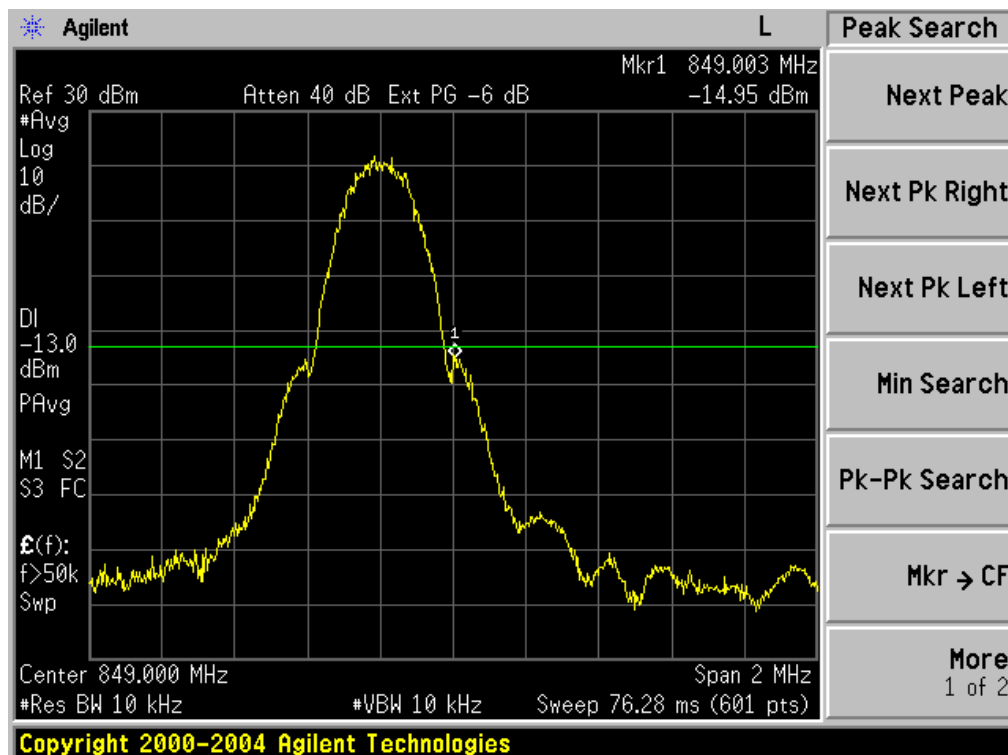



Low Band Edge PCS 1900 BAND CH 512

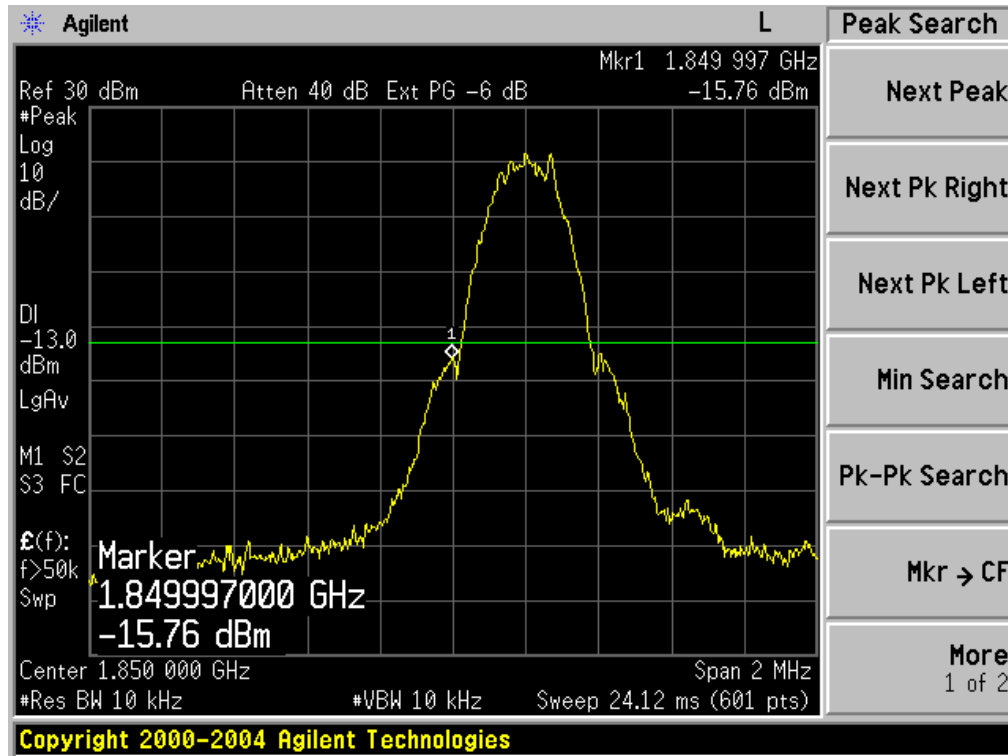

High Band Edge PCS 1900 BAND CH 810

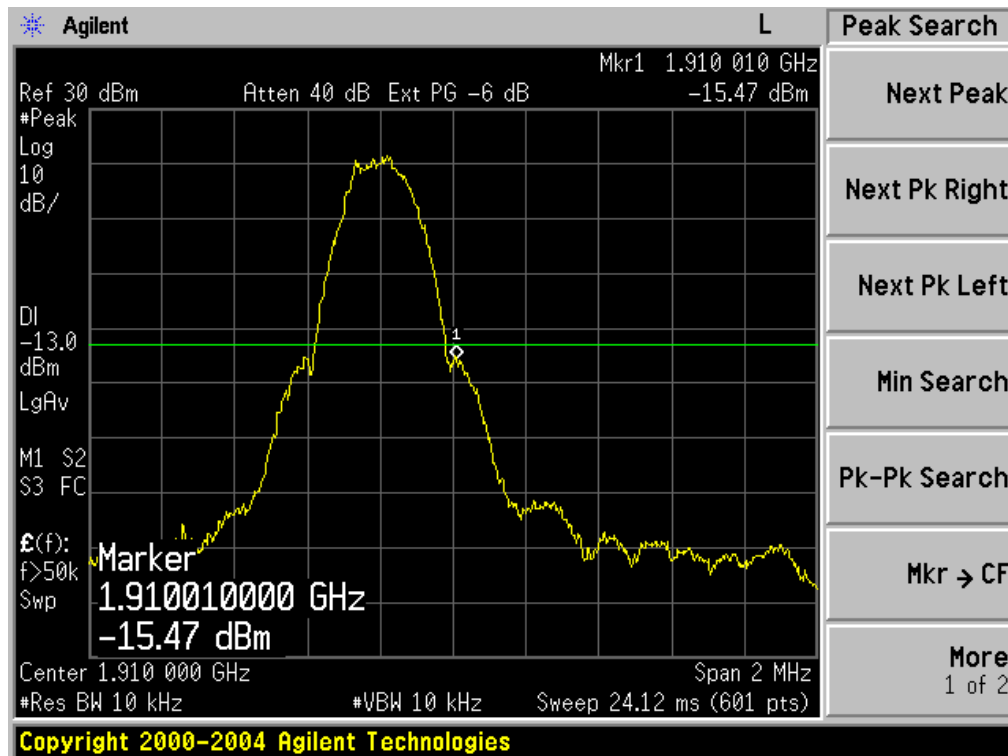

**PHOTOGRAPHS OF TEST SETUP**  
**RADIATED SPURIOUS EMISSION**

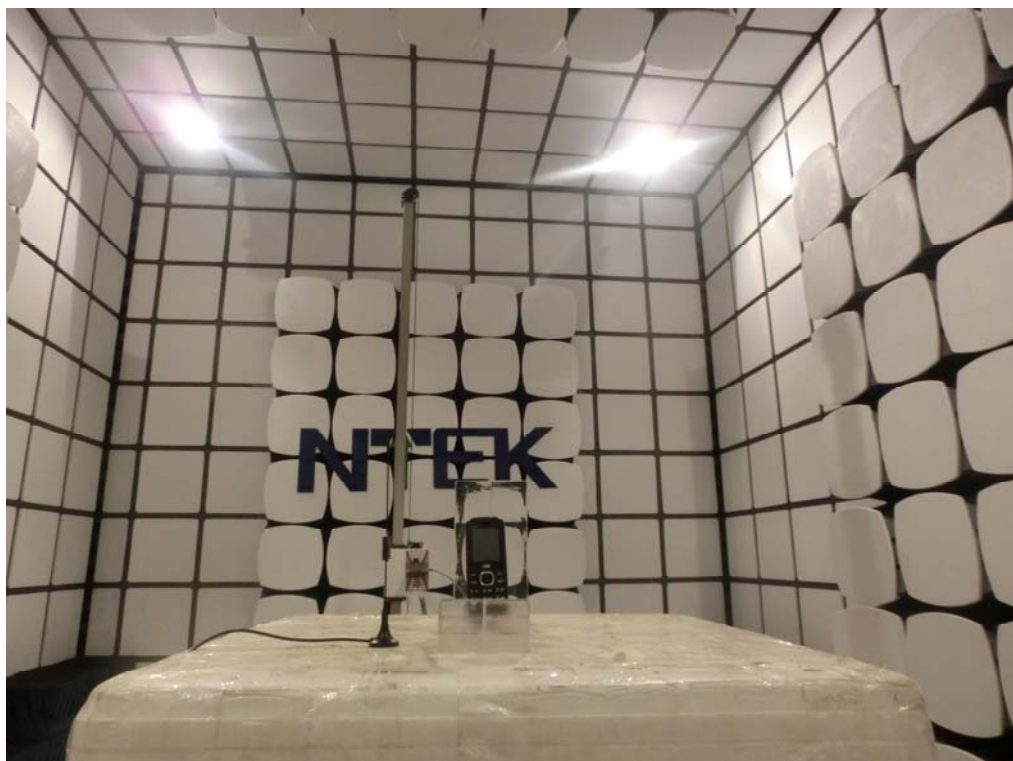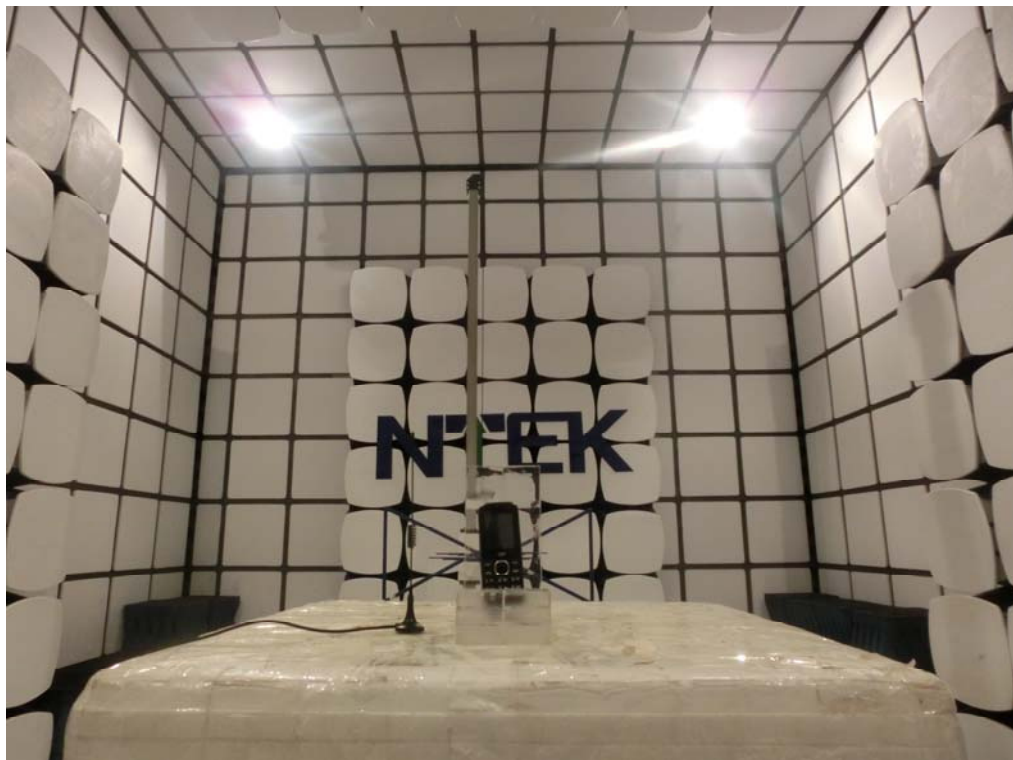

**----END OF REPORT----**