

FCC RADIO TEST REPORT

FCC ID : PY7-47198F
Equipment : GSM/WCDMA/LTE Phone with BT, DTS/UNII
a/b/g/n/ac, GPS, FM Receiver and NFC
Brand Name : SONY
Applicant : Sony Corporation
1-7-1 Konan Minato-ku Tokyo, 108-0076 Japan
Manufacturer : Sony Corporation
1-7-1 Konan Minato-ku Tokyo, 108-0076 Japan
Standard : FCC Part 15 Subpart C §15.247
Test Date(s) : Nov. 24, 2021

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

Alex Wang

Approved by: Alex Wang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	5
2 Test Configuration of Equipment Under Test	6
2.1 Test Mode.....	6
2.2 Connection Diagram of Test System.....	6
2.3 EUT Operation Test Setup	6
3 Spot Check Evaluation	7
3.1 Introduction Section	7
3.2 Difference Section	7
3.3 Spot Check Verification Data Section.....	7
3.4 Reference detail Section	7
4 Test Result.....	8
4.1 Output Power Measurement.....	8
4.2 Radiated Band Edges and Spurious Emission Measurement	9
4.3 Antenna Requirements	12
5 List of Measuring Equipment	13
6 Uncertainty of Evaluation.....	14
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission	
Appendix C. Radiated Spurious Emission Plots	
Appendix D. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issued Date
FR1O1907D	01	Initial issue of report	Dec. 28, 2021

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.247(a)(2)	6dB Bandwidth	-	See Note
-	2.1049	99% Occupied Bandwidth	-	See Note
4.1	15.247(b)(3)	Output Power	Pass	-
-	15.247(e)	Power Spectral Density	-	See Note
-	15.247(d)	Conducted Band Edges and Spurious Emission	-	See Note
4.2	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	Under limit 4.00 dB at 2483.500 MHz
-	15.207	AC Conducted Emission	-	See Note
4.3	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Note: Refer to information of Section 3 Spot Check Evaluation.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, NFC, FM Receiver and GNSS.

Standards-related Product Specification	
Antenna Type / Gain	PIFA Antenna with gain -1.5 dBi

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH05-KS TH01-KS	CN1257	314309

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find Z plane as worst plane.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Radiated Test Cases	Mode 1: Bluetooth Tx CH39_2480 MHz_2Mbps

2.2 Connection Diagram of Test System



2.3 EUT Operation Test Setup

The RF test items, utility “FTM” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



3 Spot Check Evaluation

3.1 Introduction Section

Sony Corporation, hereby declares that the WLAN and Bluetooth hardware of PY7-47198F (this model) are HW identical to PY7-15465A (lead). In addition, PY7-47198F (this model) digital circuit/antenna is identical to PY7-15465A (lead). Therefore the following report of PY7-15465A (lead) may be used as reference test data for PY7-47198F (this model), along with the spot check verification data following the FCC KDB 484596 D01 v01, and takes full responsibility that the test data as referenced in this report represent compliance for the new FCC ID PY7-47198F.

3.2 Difference Section

Difference between PY7-15465A (lead) and PY7-47198F (this model):

Sony Corporation, hereby declares the differences between PY7-15465A (lead) and PY7-47198F (this model) are related only to the cellular part. Therefore the WLAN and Bluetooth report/data of PY7-15465A (lead) may represent for PY7-47198F (this model).

3.3 Spot Check Verification Data Section

Conducted power test and radiated spurious emission test against the variant model based on the worst-case condition from the original model was performed in this filing and the verification test results similar to the original FCC ID. All tests meet FCC technical limits. Detail spot check test result can be found in the variant model report, please refer to the detail section table in section 3.4.

Summary of the spot check:

Test Item	Mode	PY7-15465A Worst Result	PY7-47198F Worst Result	Difference (dB)
Average Conducted Power (dBm)	BLE	9.01	8.78	0.23
Radiated Spurious Emission (dBuV/m) @ 3m	BLE	48.53	50.00	1.47

3.4 Reference detail Section

Rule Part	Equipment Class	Wireless Technology	Frequency Band (MHz)	Original FCC ID	Original Report	Variant Model FCC ID	Variant Model Report
15C	DTS	Bluetooth LE	2400~2483.5	PY7-15465A	Part 15C (FR1O1906B)	PY7-47198F	Part 15C (FR1O1907D)

4 Test Result

4.1 Output Power Measurement

4.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


4.1.2 Measuring Instruments

See list of measuring equipment of this test report.

4.1.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator.
3. The path loss was compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

4.1.4 Test Setup

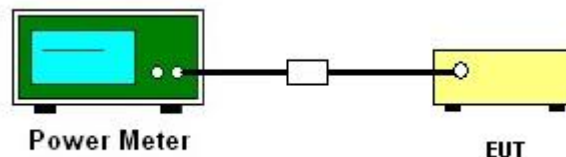

4.1.5 Test Result of Peak Output Power

Please refer to Appendix A.

4.2 Radiated Band Edges and Spurious Emission Measurement

4.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

4.2.2 Measuring Instruments


See list of measuring equipment of this test report.

4.2.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1 GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and be reported.
7. For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and be reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

4.2.4 Test Setup

For radiated test from 1GHz to 18GHz

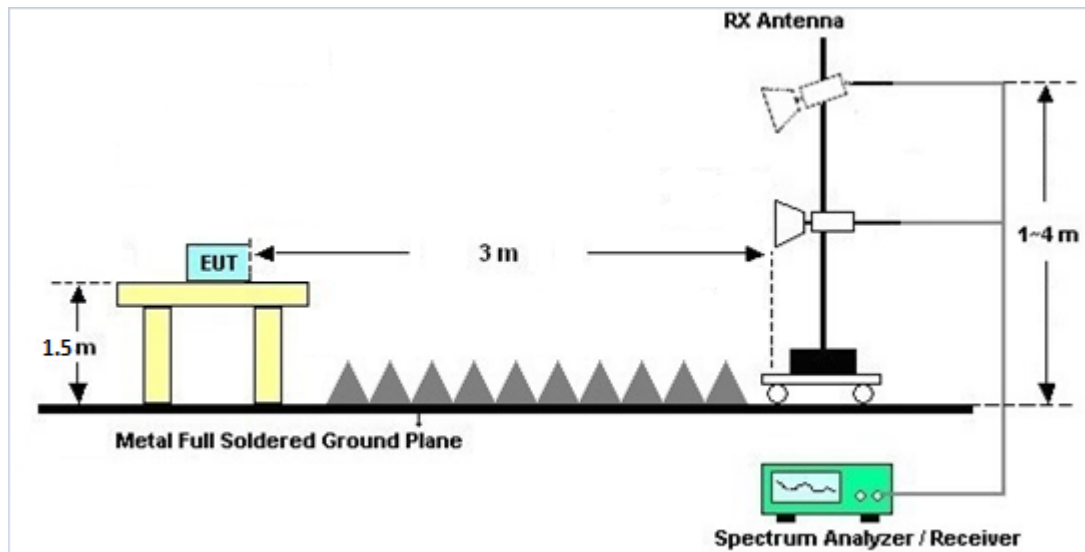

4.2.5 Test Result of Radiated Spurious Emissions

Please refer to Appendix B and C.

4.2.6 Duty Cycle

Please refer to Appendix D.



4.3 Antenna Requirements

4.3.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

4.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

4.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 07, 2021	Nov. 24, 2021	Jan. 06, 2022	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2021	Nov. 24, 2021	Jan. 06, 2022	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 16, 2021	Nov. 24, 2021	Oct. 15, 2022	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Apr. 13, 2021	Nov. 24, 2021	Apr. 12, 2022	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 24, 2021	Nov. 24, 2021	Apr. 23, 2022	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Apr. 12, 2021	Nov. 24, 2021	Apr. 11, 2022	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2012228	1Ghz-18Ghz	Oct. 16, 2021	Nov. 24, 2021	Oct. 15, 2022	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 24, 2021	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 24, 2021	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 24, 2021	NCR	Radiation (03CH05-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
--	-------



Appendix A. Conducted Test Results

Test Engineer:	Smile Wang	Temperature:	20~26	°C
Test Date:	2021/11/24	Relative Humidity:	40~51	%

BLE 2M

<u>TEST RESULTS DATA</u>										
<u>Peak Power Table</u>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	8.65	30.00	-1.50	7.15	36.00	Pass
BLE	2Mbps	1	19	2440	8.46	30.00	-1.50	6.96	36.00	Pass
BLE	2Mbps	1	39	2480	8.78	30.00	-1.50	7.28	36.00	Pass



Appendix B. Radiated Spurious Emission

Test Engineer :	Henry Li	Temperature :	22~23°C
		Relative Humidity :	41~42%

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 39 2480MHz		2493.64	53.86	-20.14	74	49.27	30.93	7.89	34.23	321	138	P	H
		2483.5	46.19	-7.81	54	41.73	30.86	7.86	34.26	321	138	A	H
		2480	95.71	-	-	91.25	30.86	7.86	34.26	321	138	P	H
		2480	94.25	-	-	89.79	30.86	7.86	34.26	321	138	A	H
		2483.5	56.89	-17.11	74	52.43	30.86	7.86	34.26	101	290	P	V
		2483.5	50	-4	54	45.54	30.86	7.86	34.26	101	290	A	V
		2480	101.13	-	-	96.67	30.86	7.86	34.26	101	290	P	V
		2480	100.32	-	-	95.86	30.86	7.86	34.26	101	290	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 39 2480MHz		4962	41.16	-32.84	74	54.96	34.82	11.39	60.01	300	0	P	H
		7440	44.13	-29.87	74	54.2	36.62	13.85	60.54	300	0	P	H
		4962	42.17	-31.83	74	55.97	34.82	11.39	60.01	300	0	P	V
		7440	43.82	-30.18	74	53.89	36.62	13.85	60.54	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Note symbol

-L	Low channel location
-R	High channel location



2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																					
ANT	BLE CH39 2480MHz																																																																					
1	Horizontal	Fundamental																																																																				
Peak	<div><p>Site : OX3005-E5 Condition : FCC PART 15C 3m 3117 00218052 HORIZONTAL RFW 1000.000000Hz YSW 3000.000000Hz ZPT Auto</p><p>Plane : I</p><table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2493.64</td><td>53.86</td><td>-20.14</td><td>74.00</td><td>49.27</td><td>30.93</td><td>7.89</td><td>34.23</td><td>321</td><td>138 Peak</td><td>HORIZONTAL</td></tr></table></div>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	2493.64	53.86	-20.14	74.00	49.27	30.93	7.89	34.23	321	138 Peak	HORIZONTAL	<div><p>Site : OX3005-E5 Condition : FCC PART 15C 3m 3117 00218052 HORIZONTAL RFW 1000.000000Hz YSW 3000.000000Hz ZPT Auto</p><p>Plane : I</p><table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 *</td><td>2480.00</td><td>95.71</td><td>21.71</td><td>74.00</td><td>91.25</td><td>38.86</td><td>7.86</td><td>34.26</td><td>321</td><td>138 Peak</td><td>HORIZONTAL</td></tr></table></div>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1 *	2480.00	95.71	21.71	74.00	91.25	38.86	7.86	34.26	321	138 Peak	HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																														
1	2493.64	53.86	-20.14	74.00	49.27	30.93	7.89	34.23	321	138 Peak	HORIZONTAL																																																											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																														
1 *	2480.00	95.71	21.71	74.00	91.25	38.86	7.86	34.26	321	138 Peak	HORIZONTAL																																																											
Avg.	<div><p>Site : OX3005-E5 Condition : FCC PART 15C (AVG) 3m 3117 00218052 HORIZONTAL RFW 1000.000000Hz YSW 5.100000Hz ZPT Auto</p><p>Plane : I</p><table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2483.58</td><td>46.19</td><td>-7.81</td><td>54.00</td><td>41.73</td><td>30.86</td><td>7.86</td><td>34.26</td><td>321</td><td>138 Average</td><td>HORIZONTAL</td></tr></table></div>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	2483.58	46.19	-7.81	54.00	41.73	30.86	7.86	34.26	321	138 Average	HORIZONTAL	<div><p>Site : OX3005-E5 Condition : FCC PART 15C (AVG) 3m 3117 00218052 HORIZONTAL RFW 1000.000000Hz YSW 5.100000Hz ZPT Auto</p><p>Plane : I</p><table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 *</td><td>2480.00</td><td>94.25</td><td>40.25</td><td>54.00</td><td>89.79</td><td>38.86</td><td>7.86</td><td>34.26</td><td>321</td><td>138 Average</td><td>HORIZONTAL</td></tr></table></div>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1 *	2480.00	94.25	40.25	54.00	89.79	38.86	7.86	34.26	321	138 Average	HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																														
1	2483.58	46.19	-7.81	54.00	41.73	30.86	7.86	34.26	321	138 Average	HORIZONTAL																																																											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																														
1 *	2480.00	94.25	40.25	54.00	89.79	38.86	7.86	34.26	321	138 Average	HORIZONTAL																																																											





BLE		2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																										
ANT		BLE CH39 2480MHz																																																																										
1	Vertical					Fundamental																																																																						
Peak	<div><p>Site : OX305-E5 Condition : FCC PART 15C 3a 3117 00218652 VERTICAL Project : RFW 1000.000MHz YFW S.100MHz SWT Auto Mode : S Plane : Z</p><table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2483.58</td><td>56.89</td><td>-17.11</td><td>74.00</td><td>52.43</td><td>30.86</td><td>7.86</td><td>34.26</td><td>181</td><td>290 Peak VERTICAL</td></tr></table></div>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	2483.58	56.89	-17.11	74.00	52.43	30.86	7.86	34.26	181	290 Peak VERTICAL	<div><p>Site : OX305-E5 Condition : FCC PART 15C 3a 3117 00218652 VERTICAL Project : RFW 1000.000MHz YFW S.100MHz SWT Auto Mode : S Plane : Z</p><table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 *</td><td>2480.00</td><td>181.13</td><td>27.13</td><td>74.00</td><td>96.67</td><td>30.86</td><td>7.86</td><td>34.26</td><td>181</td><td>290 Peak VERTICAL</td></tr></table></div>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1 *	2480.00	181.13	27.13	74.00	96.67	30.86	7.86	34.26	181	290 Peak VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																				
1	2483.58	56.89	-17.11	74.00	52.43	30.86	7.86	34.26	181	290 Peak VERTICAL																																																																		
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																				
1 *	2480.00	181.13	27.13	74.00	96.67	30.86	7.86	34.26	181	290 Peak VERTICAL																																																																		
Avg.	<div><p>Site : OX305-E5 Condition : FCC PART 15C (AVG) 3a 3117 00218652 VERTICAL Project : RFW 1000.000MHz YFW S.100MHz SWT Auto Mode : S Plane : Z IME1 : Single-directivity</p><table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>2483.58</td><td>58.00</td><td>-4.00</td><td>54.00</td><td>45.54</td><td>30.86</td><td>7.86</td><td>34.26</td><td>181</td><td>290 Average VERTICAL</td></tr></table></div>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1	2483.58	58.00	-4.00	54.00	45.54	30.86	7.86	34.26	181	290 Average VERTICAL	<div><p>Site : OX305-E5 Condition : FCC PART 15C (AVG) 3a 3117 00218652 VERTICAL Project : RFW 1000.000MHz YFW S.100MHz SWT Auto Mode : S Plane : Z IME1 : Single-directivity</p><table><tr><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 *</td><td>2480.00</td><td>180.32</td><td>46.32</td><td>54.00</td><td>95.86</td><td>30.86</td><td>7.86</td><td>34.26</td><td>181</td><td>290 Average VERTICAL</td></tr></table></div>					Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg			1 *	2480.00	180.32	46.32	54.00	95.86	30.86	7.86	34.26	181	290 Average VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																				
1	2483.58	58.00	-4.00	54.00	45.54	30.86	7.86	34.26	181	290 Average VERTICAL																																																																		
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																				
1 *	2480.00	180.32	46.32	54.00	95.86	30.86	7.86	34.26	181	290 Average VERTICAL																																																																		




2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

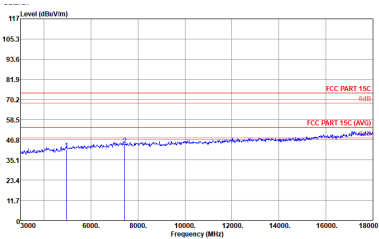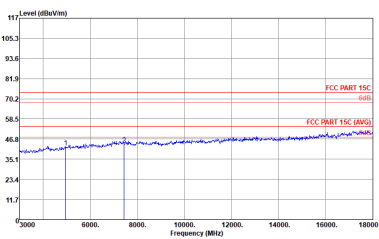BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																										
ANT	BLE CH39 2480MHz																																																										
1	Horizontal						Vertical																																																				
Peak																																																											
	Site : 03X805-KS Condition : FCC PART 15C 3m 0117 00218052 HORIZONTAL RFW 1000.000MHz TWR 3000.000Hz SWT Auto						Site : 03X805-KS Condition : FCC PART 15C 3m 0117 00218052 VERTICAL RFW 1000.000MHz TWR 3000.000Hz SWT Auto																																																				
	Plane : I						Plane : I																																																				
<table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4962.00</td><td>41.16</td><td>-32.84</td><td>74.00</td><td>54.96</td><td>34.82</td><td>11.39</td><td>68.01</td><td>300</td><td>0 Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>7460.00</td><td>44.13</td><td>-29.87</td><td>74.00</td><td>54.29</td><td>35.62</td><td>13.00</td><td>68.54</td><td>300</td><td>0 Peak</td><td>HORIZONTAL</td></tr></table>													Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	4962.00	41.16	-32.84	74.00	54.96	34.82	11.39	68.01	300	0 Peak	HORIZONTAL	2	7460.00	44.13	-29.87	74.00	54.29	35.62	13.00	68.54	300	0 Peak	HORIZONTAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																	
1	4962.00	41.16	-32.84	74.00	54.96	34.82	11.39	68.01	300	0 Peak	HORIZONTAL																																																
2	7460.00	44.13	-29.87	74.00	54.29	35.62	13.00	68.54	300	0 Peak	HORIZONTAL																																																
<table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4962.00</td><td>42.17</td><td>-31.83</td><td>74.00</td><td>55.97</td><td>34.82</td><td>11.39</td><td>68.01</td><td>300</td><td>0 Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>7460.00</td><td>43.62</td><td>-30.38</td><td>74.00</td><td>55.69</td><td>35.62</td><td>13.00</td><td>68.54</td><td>300</td><td>0 Peak</td><td>VERTICAL</td></tr></table>													Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	4962.00	42.17	-31.83	74.00	55.97	34.82	11.39	68.01	300	0 Peak	VERTICAL	2	7460.00	43.62	-30.38	74.00	55.69	35.62	13.00	68.54	300	0 Peak	VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																	
1	4962.00	42.17	-31.83	74.00	55.97	34.82	11.39	68.01	300	0 Peak	VERTICAL																																																
2	7460.00	43.62	-30.38	74.00	55.69	35.62	13.00	68.54	300	0 Peak	VERTICAL																																																

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 2Mbps	32.48	204.6	4.902	5.1kHz

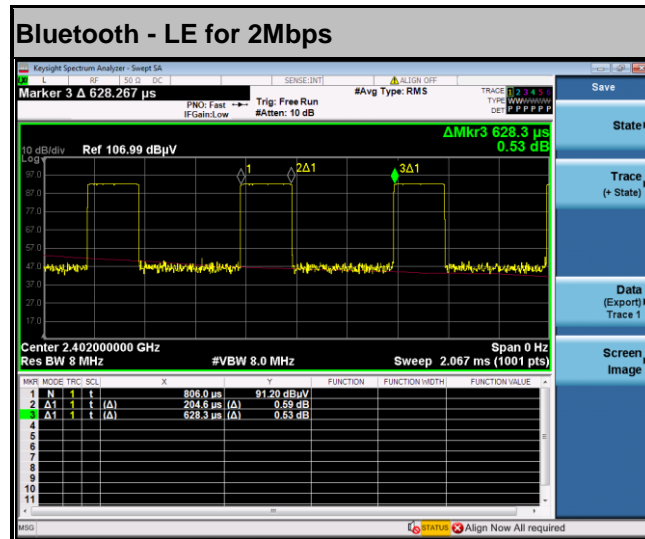

—THE END—