

MEASUREMENT REPORT

FCC PART 15 Subpart E WLAN 802.11a/n/ac/ax



FCC ID: Q9DAPINH503

Applicant: Hewlett Packard Enterprise Company

Application Type: Certification

Product: ACCESS POINT

Model No.: APINH503

Brand Name:  


FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s): Part15 Subpart E (Section 15.407)

Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02v02r01,
KDB 662911 D01v02r01

Test Date: July 15 ~ August 06, 2020

Reviewed By:


(Paddy Chen)

Approved By:


(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02v02r01. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2007TW0002-U4	Rev. 01	Initial Report	08-06-2020	Valid

CONTENTS

Description	Page
General Information	6
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location	7
2. PRODUCT INFORMATION	8
2.1. Equipment Description.....	8
2.2. Product Specification Subjective to this Report.....	8
2.3. Working Frequencies for this report	9
2.4. Test Mode	9
2.5. Description of Available Antennas.....	10
2.6. Description of Antenna RF Port	10
2.7. Description of Test Configuration and Software	11
2.8. Duty Cycle	11
2.9. EMI Suppression Device(s)/Modifications	13
2.10. Labeling Requirements.....	13
2.11. Test Environment Condition	13
3. DESCRIPTION OF TEST	14
3.1. Evaluation Procedure	14
3.2. AC Line Conducted Emissions	14
3.3. Radiated Emissions	15
4. ANTENNA REQUIREMENTS.....	16
5. TEST EQUIPMENT CALIBRATION DATE	17
6. MEASUREMENT UNCERTAINTY.....	18
7. TEST RESULT	19
7.1. Summary	19
7.2. 26dB Bandwidth Measurement.....	20
7.2.1. Test Limit	20
7.2.2. Test Procedure used.....	20
7.2.3. Test Setting.....	20
7.2.4. Test Setup	20
7.2.5. Test Result.....	21
7.3. 6dB Bandwidth Measurement.....	39
7.3.1. Test Limit	39

7.3.2. Test Procedure used.....	39
7.3.3. Test Setting.....	39
7.3.4. Test Setup	39
7.3.5. Test Result.....	40
7.4. Output Power Measurement	46
7.4.1. Test Limit	46
7.4.2. Test Procedure Used	46
7.4.3. Test Setting.....	46
7.4.4. Test Setup	47
7.4.5. Test Result.....	48
7.5. Transmit Power Control	52
7.5.1. Test Limit	52
7.5.2. Test Procedure Used	52
7.5.3. Test Setting.....	52
7.5.4. Test Setup	52
7.5.5. Test Result.....	52
7.6. Power Spectral Density Measurement	53
7.6.1. Test Limit	53
7.6.2. Test Procedure Used	53
7.6.3. Test Setting.....	53
7.6.4. Test Setup	54
7.6.5. Test Result.....	55
7.7. Frequency Stability Measurement.....	89
7.7.1. Test Limit	89
7.7.2. Test Procedure Used	89
7.7.3. Test Setup	90
7.7.4. Test Result.....	91
7.8. Radiated Spurious Emission Measurement	92
7.8.1. Test Limit	92
7.8.2. Test Procedure Used	92
7.8.3. Test Setting.....	92
7.8.4. Test Setup	94
7.8.5. Test Result.....	95
7.9. Radiated Restricted Band Edge Measurement	172
7.9.1. Test Limit	172
7.9.2. Test Procedure Used	173
7.9.3. Test Setting.....	173
7.9.4. Test Setup	174
7.9.5. Test Result.....	175

7.10. AC Conducted Emissions Measurement.....	297
7.10.1. Test Limit	297
7.10.2. Test Setup	297
7.10.3. Test Result.....	298
8. CONCLUSION.....	300
Appendix A – Test Setup Photograph.....	301
Appendix B – EUT Photograph	302

General Information

Applicant:	Hewlett Packard Enterprise Company
Applicant Address:	3333 Scott Blvd, Santa Clara, CA 95054, USA
Manufacturer:	Hewlett Packard Enterprise Company
Manufacturer Address:	3333 Scott Blvd, Santa Clara, CA 95054, USA
Test Site:	MRT Technology (Taiwan) Co., Ltd
Test Site Address:	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Fuxing Rd., Taoyuan, Taiwan (R.O.C)

- MRT facility is a FCC registered (Reg. No. 291082 and 153292) test facility with the site description report on file and is designated by the FCC as an Accredited Test Film.
- MRT facility is an IC registered (MRT Reg. No. 21723-1) test laboratory with the site description on file at Industry Canada.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (TAF) under the American Association for Laboratory Accreditation Program (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, Taiwan, EU and TELEC Rules.

TAF certificate here




1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

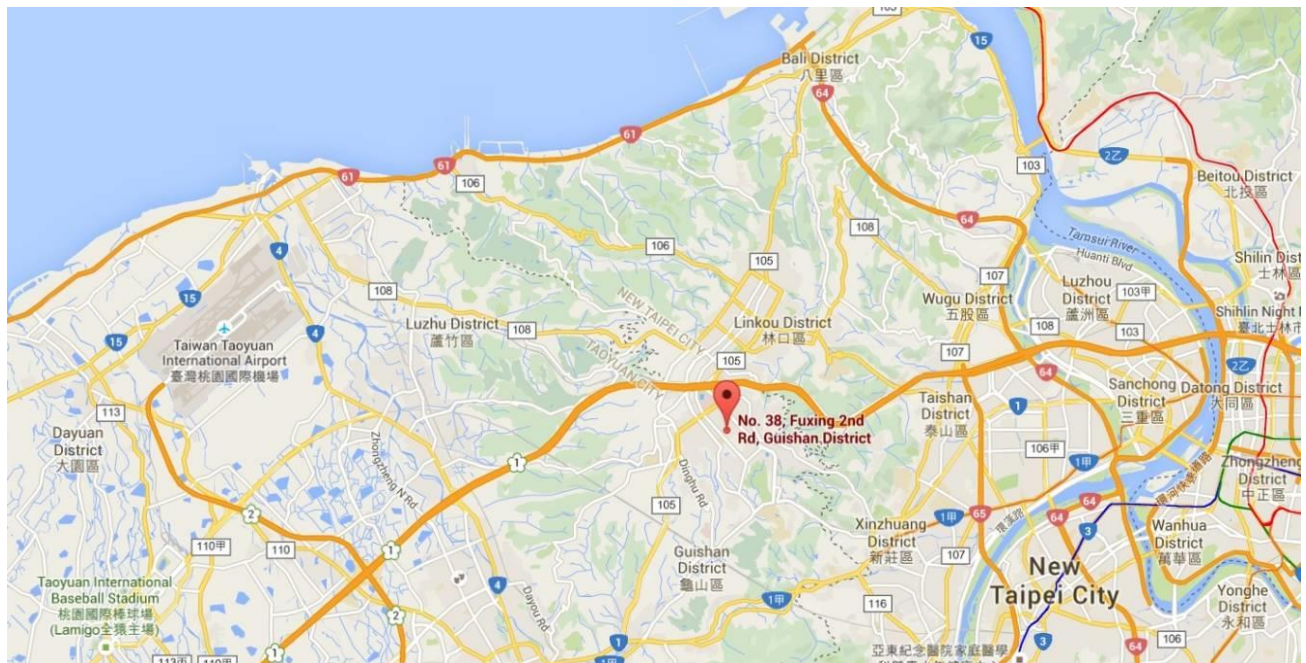

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	ACCESS POINT
Model No.	APINH503
Wi-Fi Specification	802.11a/b/g/n/ac/ax
Bluetooth Specification	v5.0 single mode, BLE only
Zigbee Specification	802.15.4
Software Version	V1.84
Serial No.	CNKHKS02B
Operating Temperature	0 ~ 40°C
Power Type	AC Adapter or PoE input
Operating Environment	Indoor Use

2.2. Product Specification Subjective to this Report

Frequency Range	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80/ax-HE80: 5210MHz, 5290MHz, 5530MHz, 5610MHz, 5690MHz, 5775MHz
Type of Modulation	802.11a/n/ac: OFDM 802.11ax: OFDMA
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.6Mbps 802.11ax: up to 1201Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550 MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

2.4. Test Mode

Test Mode	Mode 1: Transmit by 802.11a (6Mbps)
	Mode 2: Transmit by 802.11ac-VHT20 (MCS0)
	Mode 3: Transmit by 802.11ac-VHT40 (MCS0)
	Mode 4: Transmit by 802.11ac-VHT80 (MCS0)
	Mode 5: Transmit by 802.11ax-HE20 (MCS0)
	Mode 6: Transmit by 802.11ax-HE40 (MCS0)
	Mode 7: Transmit by 802.11ax-HE80 (MCS0)

Note: 802.11n and 802.11ac have same modulation type and same power parameter, so we only show 802.11ac test data in report.


2.5. Description of Available Antennas

Antenna Type	Frequency Band (GHz)	Max Peak Gain (dBi)	BF Directional Gain (dBi)	CDD Directional Gain (dBi)	
				For Power	For PSD
Wi-Fi Internal Antenna (2.4GHz 2*2 MIMO, 5GHz 2*2 MIMO)					
PIFA	2.4	1.73	4.71	1.73	4.71
	5	5.04	8.05	5.04	8.05
Bluetooth / ZigBee Internal Antenna					
Monopole	2.4	2.49			

Note:


- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
For CDD transmissions, directional gain is calculated as follows, $N_{ANT} = 2$, $N_{SS} = 1$.
If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.
 - For power spectral density (PSD) measurements on all devices,
Array Gain = $10 \log (N_{ANT} / N_{SS}) \text{ dB} = 3.01$;
 - For power measurements on IEEE 802.11 devices,
Array Gain = 0 dB for $N_{ANT} \leq 4$;
- The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax, not include 802.11a/b/g. Directional gain = $G_{ANT} + \text{BF Gain}$, BF Gain was declared by the applicant.
- Antenna type and antenna gain are provided by the manufacturer.

2.6. Description of Antenna RF Port

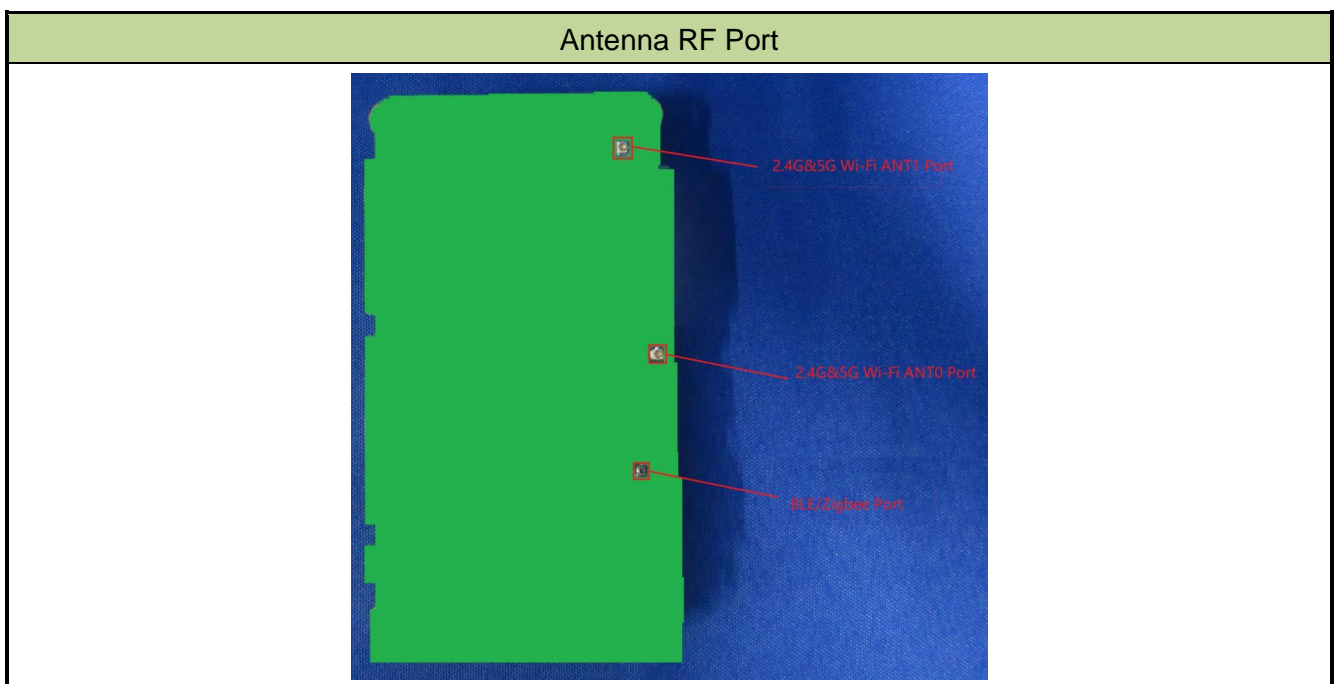

2.7. Description of Test Configuration and Software

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

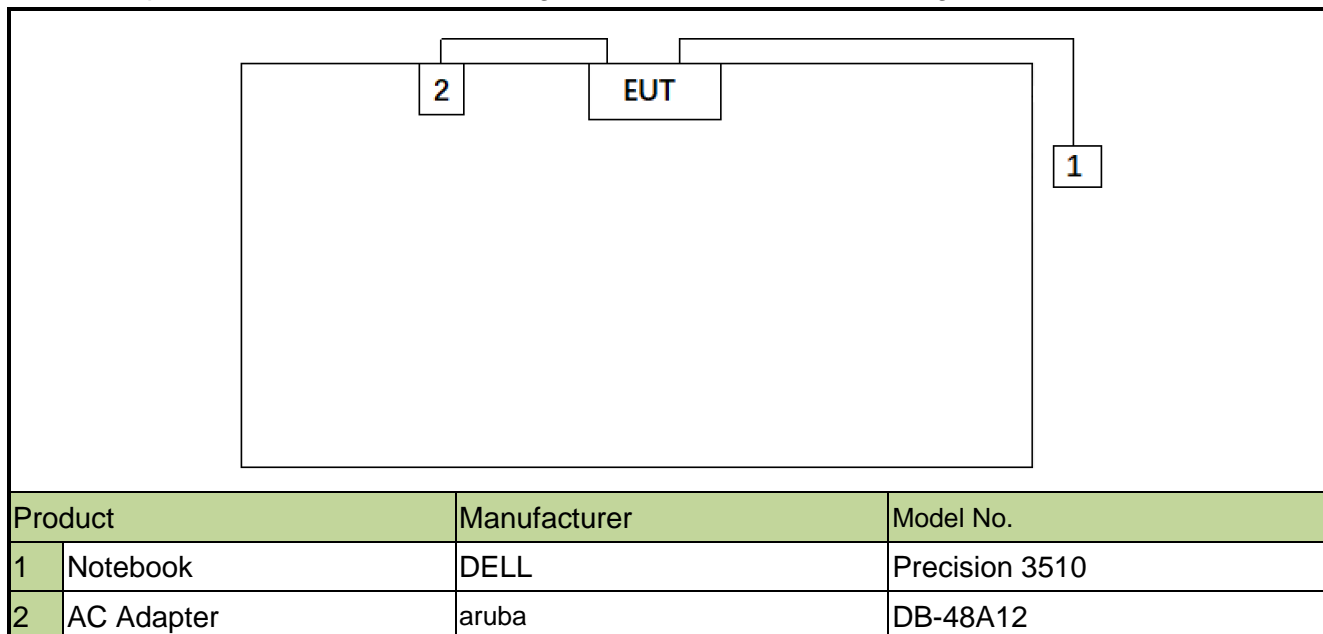

Note 1: The test utility software used during testing was “accessMTool”, and the version was “v3.1.0.5”.


Note 2: Detail power setting refer to operation description.

2.8. Duty Cycle


5GHz (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = average. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle	Test Mode	Duty Cycle
802.11a	94.70%	802.11ax-HE20	97.50%
802.11ac-VHT20	98.26%	802.11ax-HE40	95.85%
802.11ac-VHT40	96.65%	802.11ax-HE80	92.36%
802.11ac-VHT80	93.67%	--	--


802.11a (T = 2.055ms)

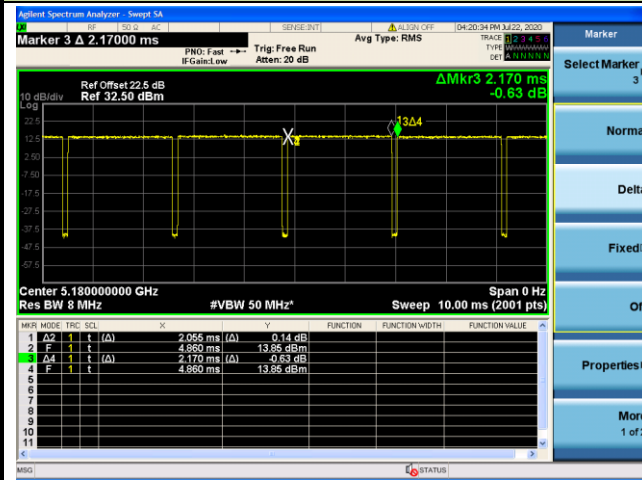


802.11ac-VHT20 (T = 1.923ms)

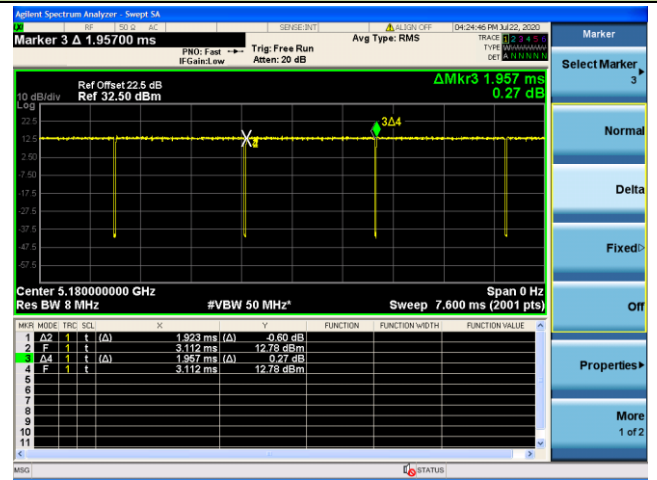


802.11ac-VHT40 (T = 950.0us)

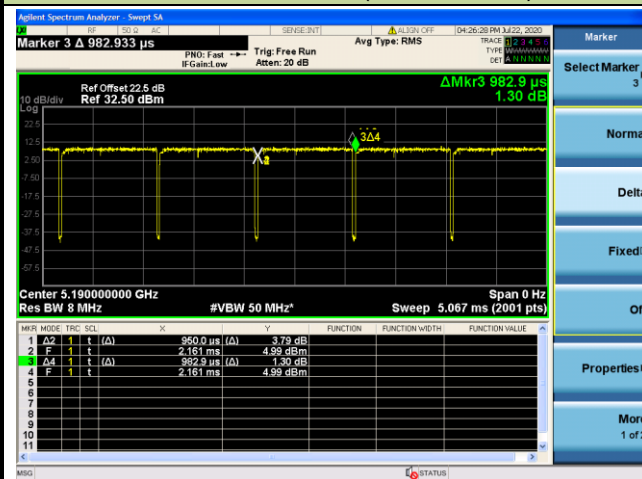


802.11ac-VHT80 (T = 459.0us)

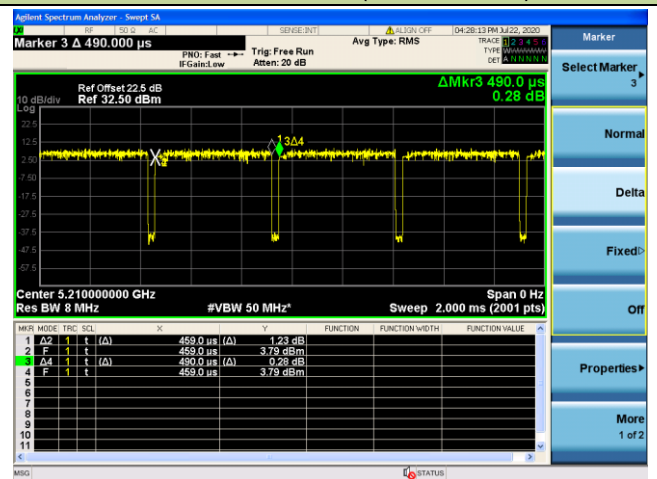


802.11ax-HE20 (T = 1.482ms)

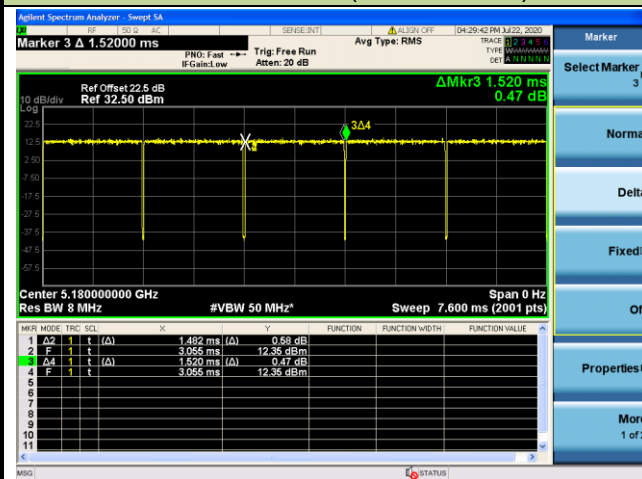

802.11ax-HE40 (T = 777.4us)

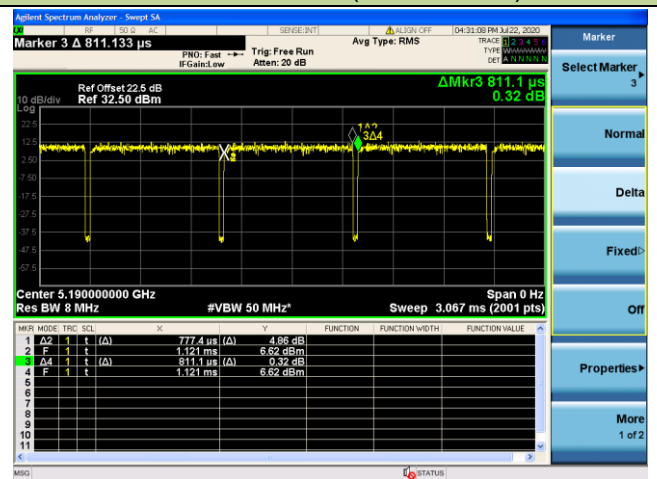

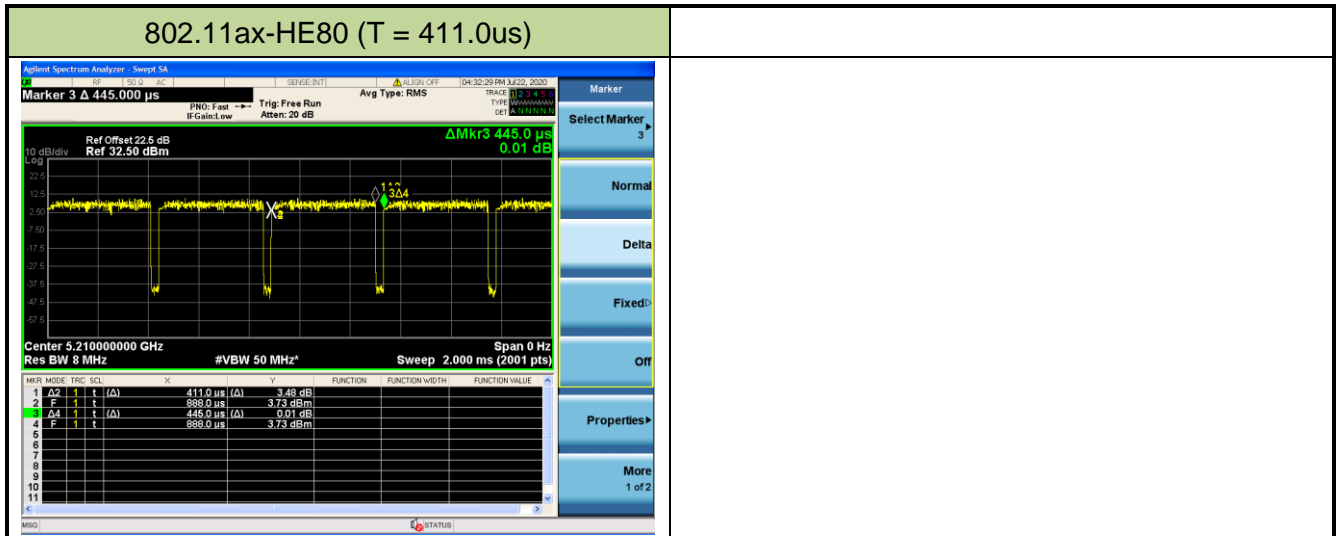

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlets supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

2.11. Test Environment Condition

Ambient Temperature	15°C~35°C
Relative Humidity	20%RH ~75%RH

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in the measurement.

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50 Ω /50 μ H Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remotecontrolled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Two-Line V-Network	R&S	ENV216	MRTTWA00019	1 year	2021/03/26
Two-Line V-Network	R&S	ENV216	MRTTWA00020	1 year	2021/04/24
EMI Test Receiver	R&S	ESR3	MRTTWA00045	1 year	2021/05/26
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2021/05/28

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2021/4/27
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2020/9/4
Broadband Horn antenna	SCHWARZBECK	BBHA 9120D	MRTTWA00003	1 year	2021/4/24
Breitband Horn antenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2021/4/24
Broadband Preamplifier	SCHWARZBECK	BBV 9718	MRTTWA00005	1 year	2021/4/24
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2021/4/24
Signal Analyzer	R&S	FSV40	MRTTWA00007	1 year	2021/3/24
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2021/3/25
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2020/10/2
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00010	1 year	2021/6/16
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00032	1 year	2021/5/28

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2021/4/24
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2020/10/2
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2021/7/11
Attenuator	WTI	218FS-20	MRTTWE00026	1 year	2021/5/30
Attenuator	WTI	218FS-10	MRTTWE00027	1 year	2021/5/30
Attenuator	WTI	218FS-06	MRTTWE00028	1 year	2021/5/30
Temperature/Humidity Meter	TFA	35.1078.10.IT	MRTTWA00033	1 year	2021/5/28

Software	Version	Function
v3	9.160520a	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 150kHz~30MHz: 2.53dB
Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz ~ 1GHz: 4.25dB 1GHz ~ 40GHz: 4.45dB
Conducted Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): ± 0.84 dB
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): ± 2.65 dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 3.3%
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.82^{\circ}\text{C} / \pm 3\%$

7. TEST RESULT

7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	$\geq 500\text{kHz}$		Pass	Section 7.3
15.407(a)(1)(ii), (2), (3)	Maximum Conducted Output Power	< 1Watt for UNII-1 & UNII-3 < 250mW for UNII-2		Pass	Section 7.4
15.407(h)(1)	Transmit Power Control	< 24 dBm		N/A	Section 7.5
15.407(a)(1)(ii), (2), (3), (5)	Peak Power Spectral Density	< 17dBm/MHz for UNII-1 < 11dBm/MHz for UNII-2 < 30dBm/500kHz for UNII-3		Pass	Section 7.6
15.407(g)	Frequency Stability	± 20 ppm		Pass	Section 7.7
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	Refer to Section 7.8	Radiated	Pass	Section 7.8 & 7.9
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits(Restricted Bands andRadiated Emission Limits)	Emissions in restrictedbands must meet theradiated limits detailed in15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) Test Items "26dB Bandwidth" & "6dB Bandwidth" have been assessed MIMO transmission, and showed the worst test data in this report.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

KDB 789033 D02v02r01 - Section C.1

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

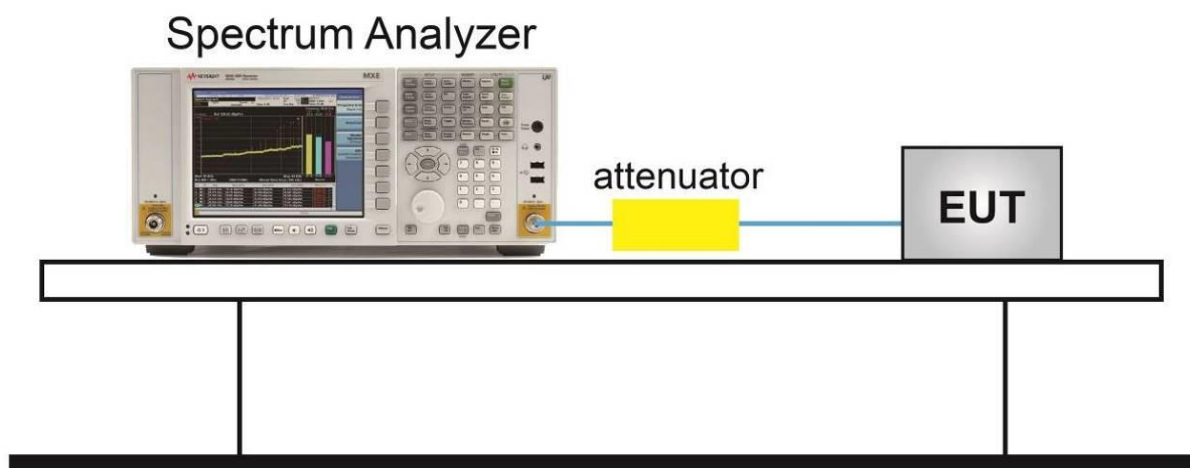

7.2.5.Test Result

Product	ACCESS POINT	Test Engineer	Eric Lin
Test Site	SR2	Test Date	2020/07/22

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1 / Ant 0 + 1					
802.11a	6Mbps	36	5180	22.17	16.83
802.11a	6Mbps	44	5220	22.18	16.76
802.11a	6Mbps	48	5240	22.13	16.76
802.11a	6Mbps	52	5260	21.44	16.74
802.11a	6Mbps	60	5300	21.54	16.73
802.11a	6Mbps	64	5320	21.78	16.73
802.11a	6Mbps	100	5500	21.88	16.75
802.11a	6Mbps	116	5580	21.94	16.77
802.11a	6Mbps	140	5700	21.35	16.71
802.11a	6Mbps	144	5720	21.99	16.76
802.11a	6Mbps	149	5745	21.72	16.75
802.11a	6Mbps	157	5785	21.64	16.74
802.11a	6Mbps	165	5825	21.78	16.76
802.11ac-VHT20	MCS0	36	5180	22.04	17.89
802.11ac-VHT20	MCS0	44	5220	21.68	17.84
802.11ac-VHT20	MCS0	48	5240	21.67	17.89
802.11ac-VHT20	MCS0	52	5260	21.76	17.86
802.11ac-VHT20	MCS0	60	5300	21.77	17.86
802.11ac-VHT20	MCS0	64	5320	21.74	17.86
802.11ac-VHT20	MCS0	100	5500	21.30	17.87
802.11ac-VHT20	MCS0	116	5580	21.87	17.86
802.11ac-VHT20	MCS0	140	5700	21.53	17.84
802.11ac-VHT20	MCS0	144	5720	21.37	17.87
802.11ac-VHT20	MCS0	149	5745	21.55	17.87
802.11ac-VHT20	MCS0	157	5785	21.61	17.85
802.11ac-VHT20	MCS0	165	5825	21.56	17.83

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1 / Ant 0 + 1					
802.11ac-VHT40	MCS0	38	5190	39.75	36.26
802.11ac-VHT40	MCS0	46	5230	39.80	36.31
802.11ac-VHT40	MCS0	54	5270	39.87	36.29
802.11ac-VHT40	MCS0	62	5310	39.65	36.24
802.11ac-VHT40	MCS0	102	5510	39.48	36.23
802.11ac-VHT40	MCS0	110	5550	39.93	36.33
802.11ac-VHT40	MCS0	134	5670	39.37	36.25
802.11ac-VHT40	MCS0	142	5710	39.83	36.32
802.11ac-VHT40	MCS0	151	5755	39.85	36.28
802.11ac-VHT40	MCS0	159	5795	39.50	36.28
802.11ac-VHT80	MCS0	42	5210	81.13	75.69
802.11ac-VHT80	MCS0	58	5290	81.10	75.68
802.11ac-VHT80	MCS0	106	5530	81.35	75.68
802.11ac-VHT80	MCS0	122	5610	89.96	75.96
802.11ac-VHT80	MCS0	138	5690	83.94	75.86
802.11ac-VHT80	MCS0	155	5775	84.11	75.79
802.11ax-HE20	MCS0	36	5180	21.41	19.12
802.11ax-HE20	MCS0	44	5220	21.42	19.12
802.11ax-HE20	MCS0	48	5240	21.55	19.11
802.11ax-HE20	MCS0	52	5260	21.53	19.11
802.11ax-HE20	MCS0	60	5300	21.59	17.90
802.11ax-HE20	MCS0	64	5320	21.28	19.03
802.11ax-HE20	MCS0	100	5500	20.97	19.02
802.11ax-HE20	MCS0	116	5580	21.27	19.06
802.11ax-HE20	MCS0	140	5700	21.43	19.08
802.11ax-HE20	MCS0	144	5720	21.39	19.06
802.11ax-HE20	MCS0	149	5745	21.52	19.04
802.11ax-HE20	MCS0	157	5785	21.95	17.92
802.11ax-HE20	MCS0	165	5825	21.02	19.06


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 1 / Ant 0 + 1					
802.11ax-HE40	MCS0	38	5190	39.52	37.60
802.11ax-HE40	MCS0	46	5230	39.51	37.58
802.11ax-HE40	MCS0	54	5270	39.79	37.54
802.11ax-HE40	MCS0	62	5310	39.64	37.57
802.11ax-HE40	MCS0	102	5510	39.68	37.55
802.11ax-HE40	MCS0	110	5550	39.61	37.63
802.11ax-HE40	MCS0	134	5670	39.65	37.54
802.11ax-HE40	MCS0	142	5710	39.77	37.66
802.11ax-HE40	MCS0	151	5755	39.53	37.62
802.11ax-HE40	MCS0	159	5795	39.57	37.54
802.11ax-HE80	MCS0	42	5210	80.77	76.76
802.11ax-HE80	MCS0	58	5290	80.74	76.78
802.11ax-HE80	MCS0	106	5530	80.92	76.79
802.11ax-HE80	MCS0	122	5610	80.80	76.95
802.11ax-HE80	MCS0	138	5690	81.41	77.05
802.11ax-HE80	MCS0	155	5775	81.02	76.81

802.11a 26dB Bandwidth - Ant 1 / Ant 0 + 1


Channel 36 (5180MHz)




Channel 44 (5220MHz)

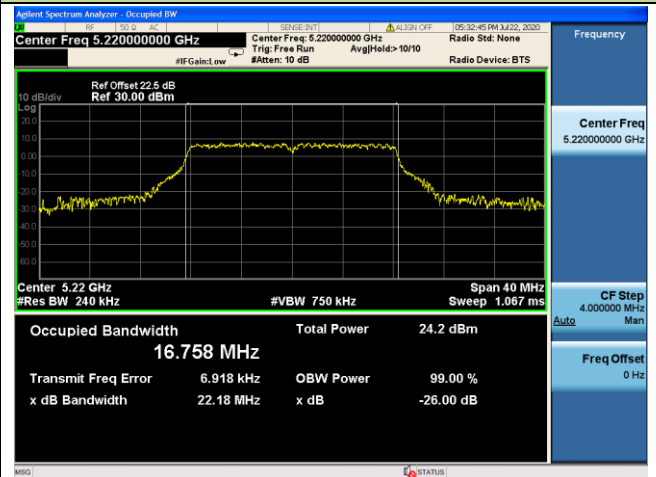


Channel 48 (5240MHz)

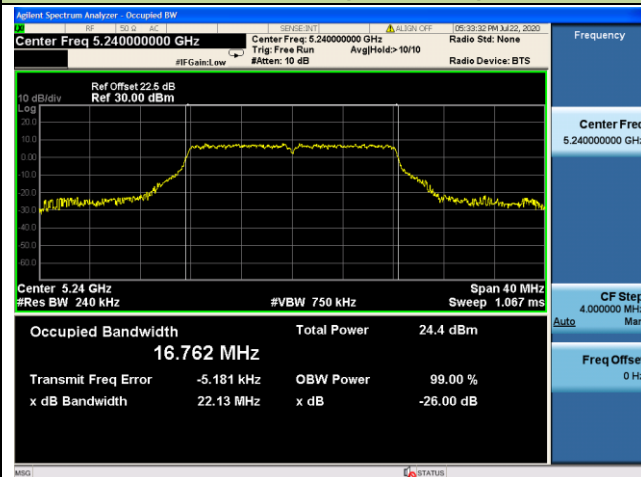


Channel 52 (5260MHz)

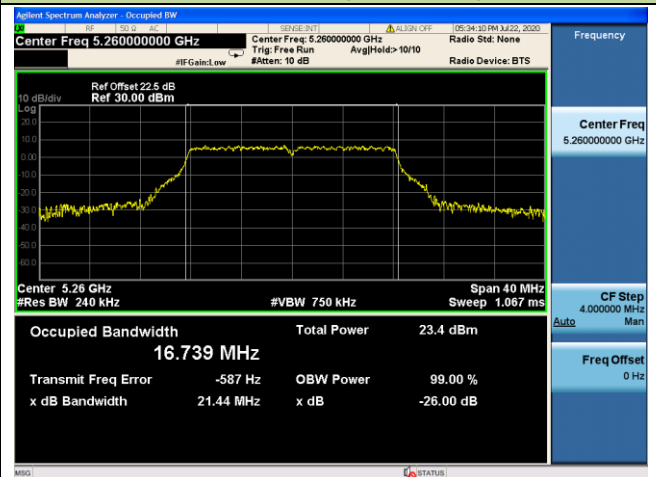


Channel 60 (5300MHz)

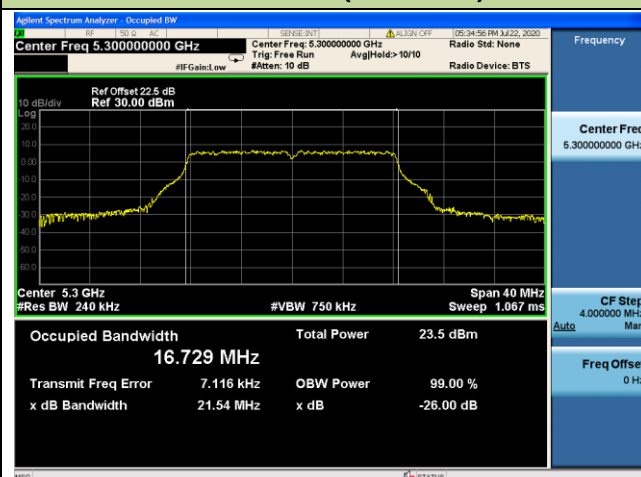


Channel 64 (5320MHz)

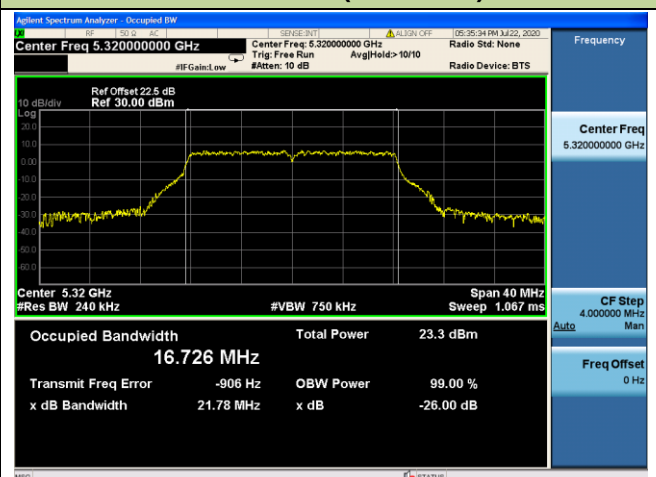


Channel 100 (5500MHz)

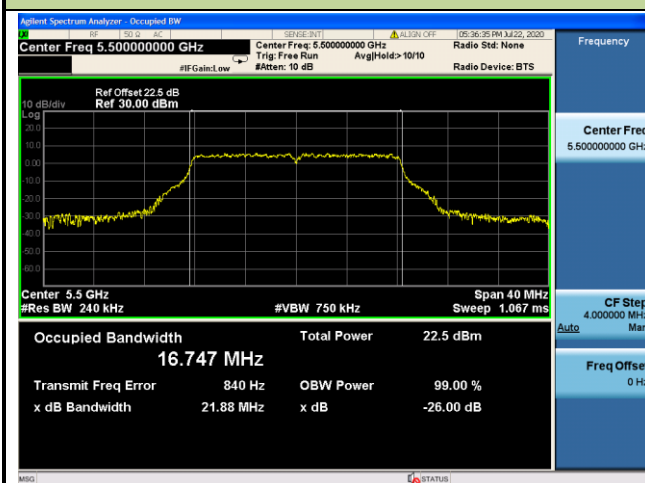


Channel 116 (5580MHz)

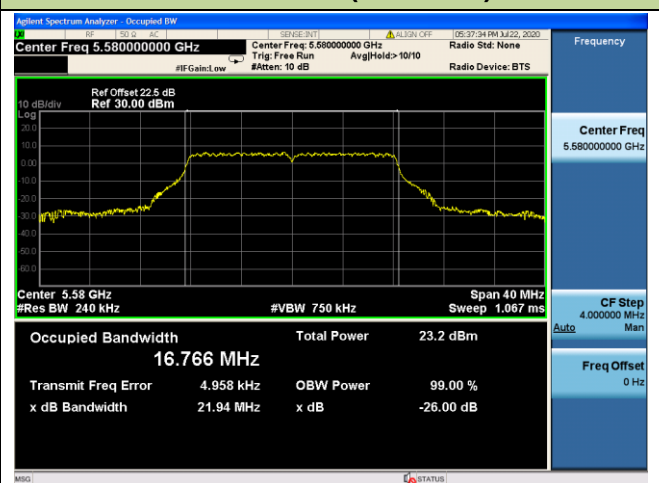


Channel 140 (5700MHz)

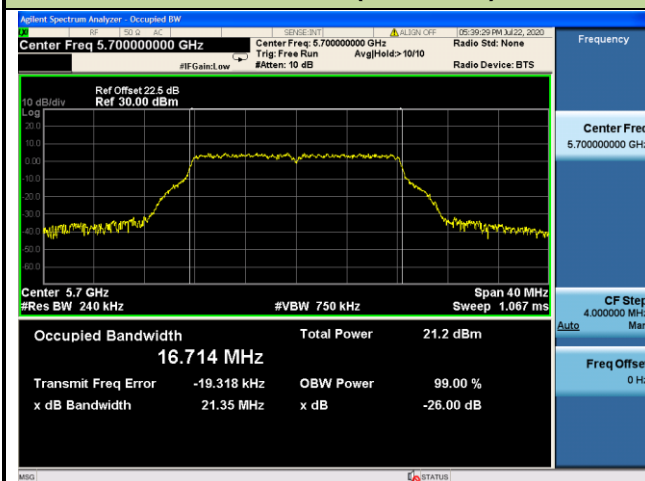


Channel 144 (5720MHz)

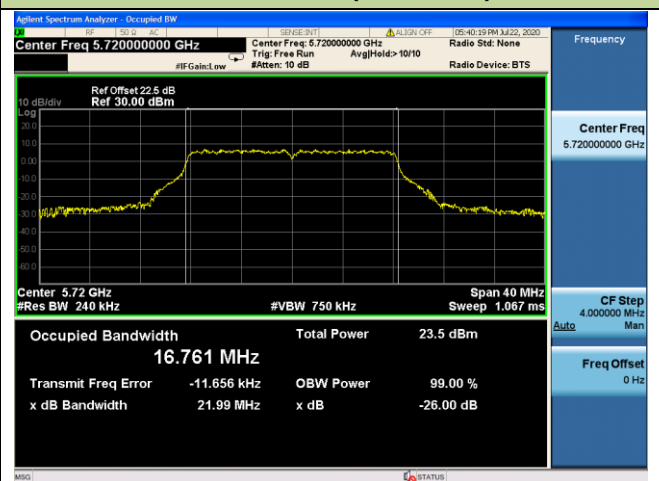


Channel 149 (5745MHz)

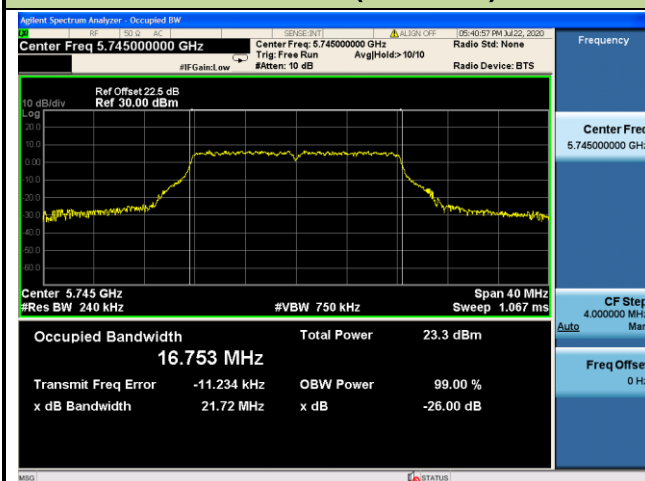


Channel 157 (5785MHz)

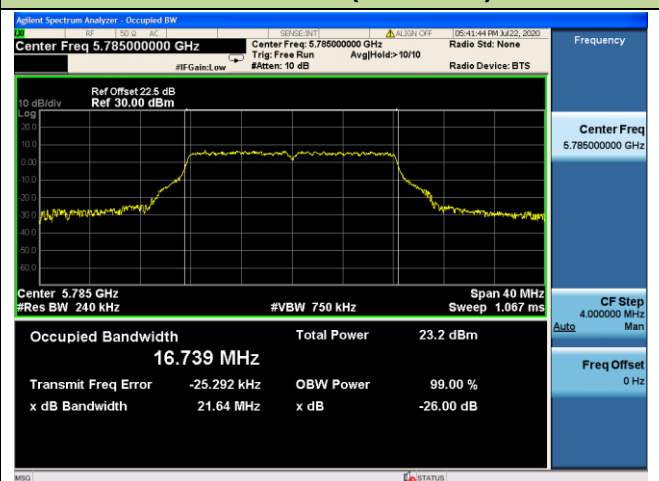

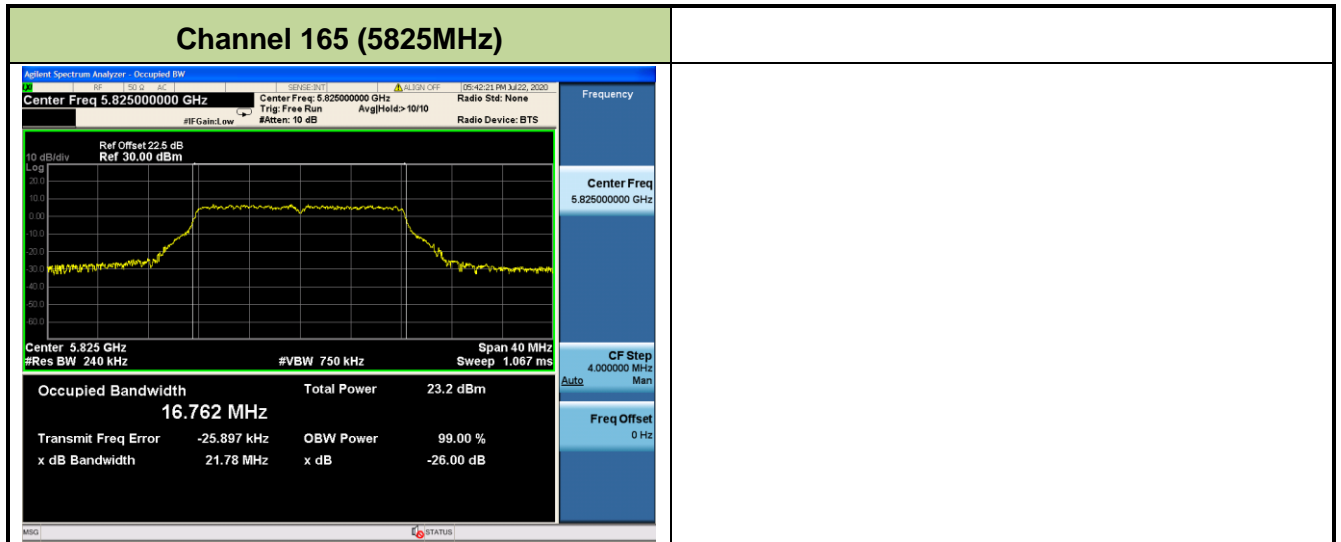


802.11ac-VHT20 26dB Bandwidth - Ant 1 / Ant 0 + 1


Channel 36 (5180MHz)

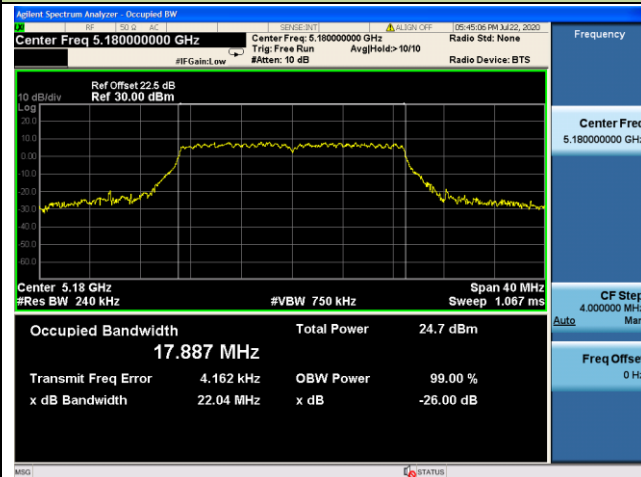


Channel 44 (5220MHz)

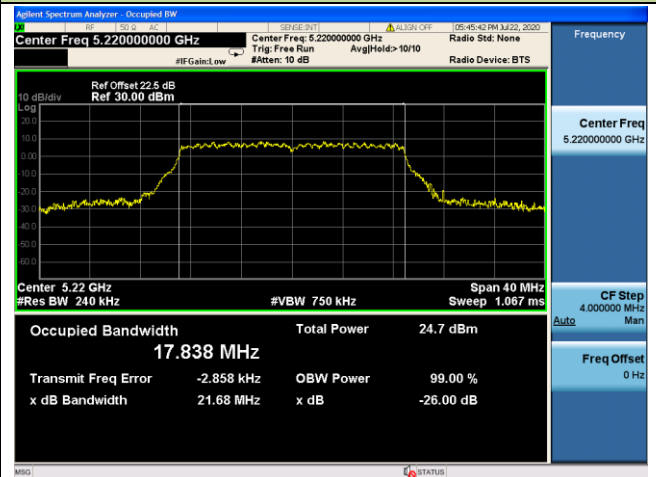


Channel 48 (5240MHz)

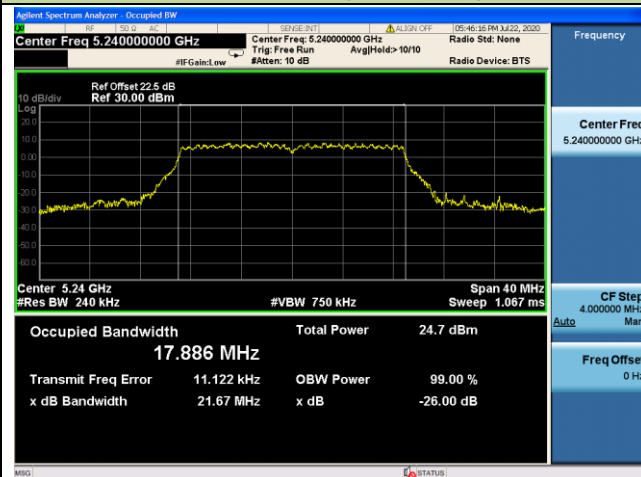


Channel 52 (5260MHz)

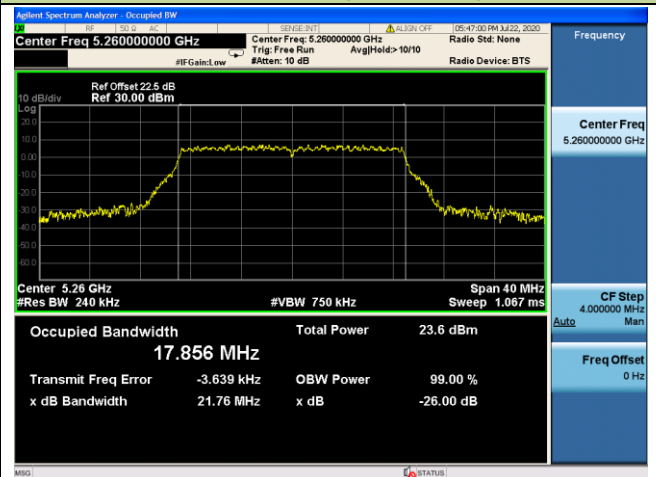


Channel 60 (5300MHz)

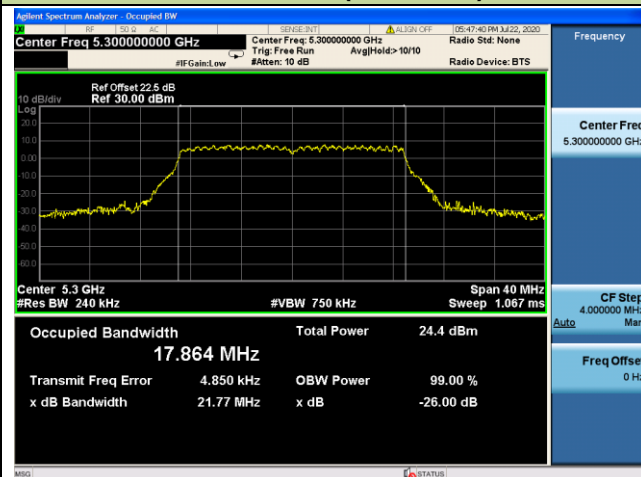


Channel 64 (5320MHz)

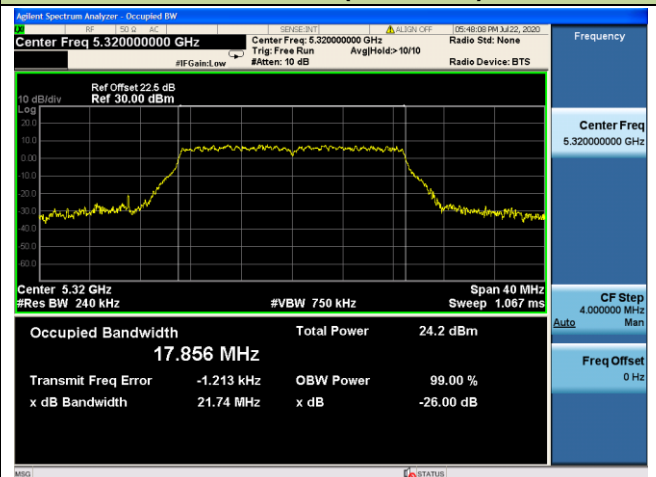


Channel 100 (5500MHz)

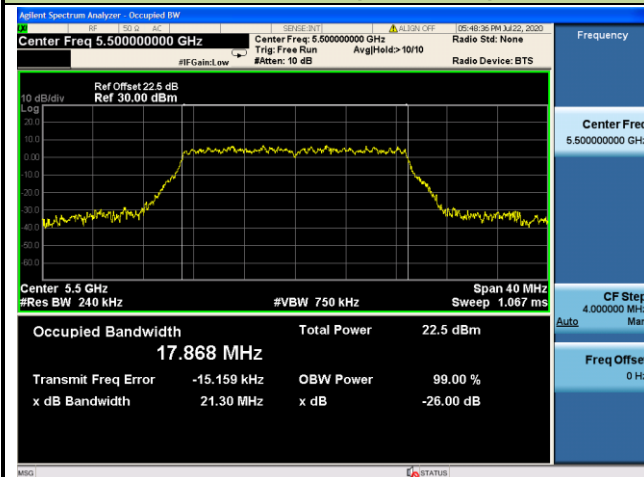


Channel 116 (5580MHz)

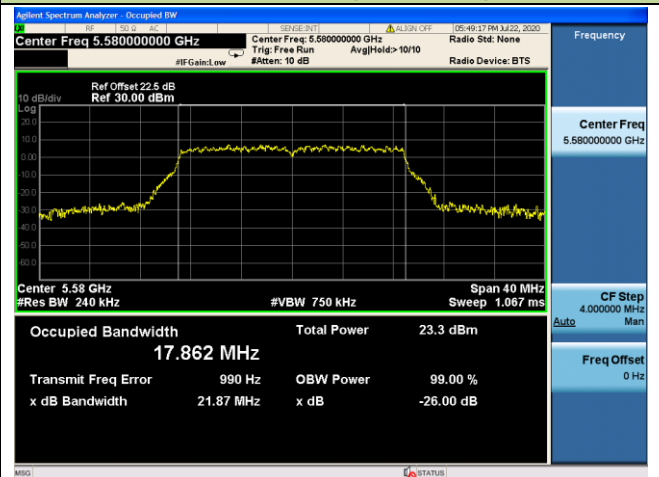


Channel 140 (5700MHz)

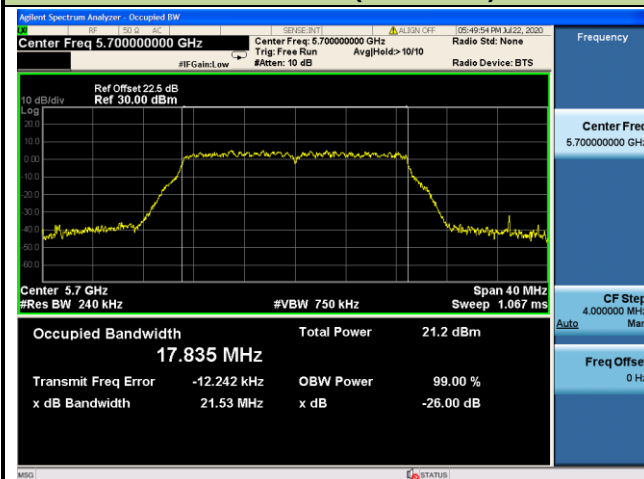


Channel 144 (5720MHz)

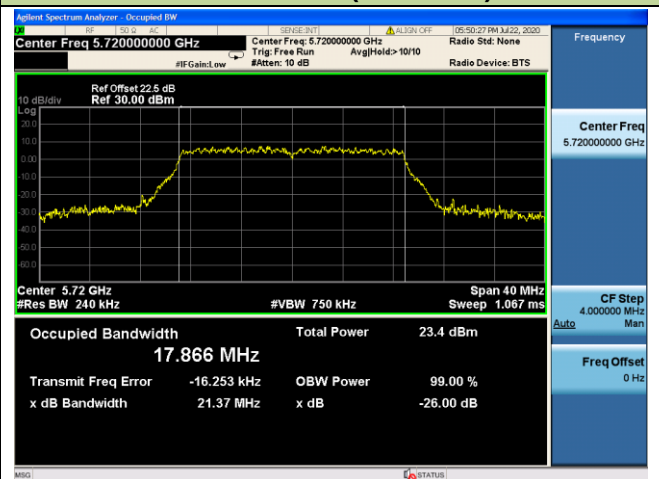


Channel 149 (5745MHz)

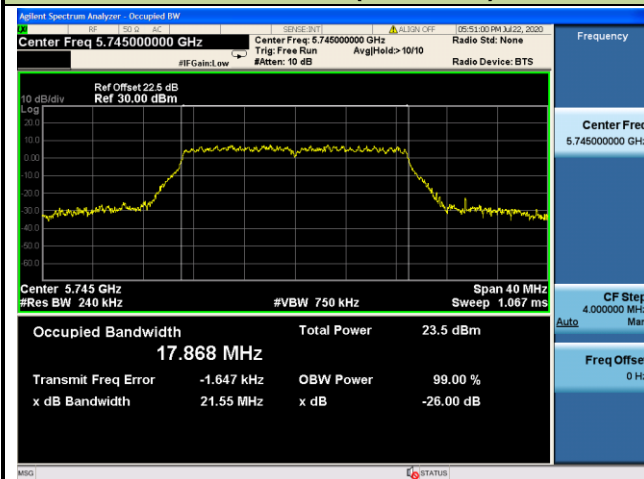


Channel 157 (5785MHz)

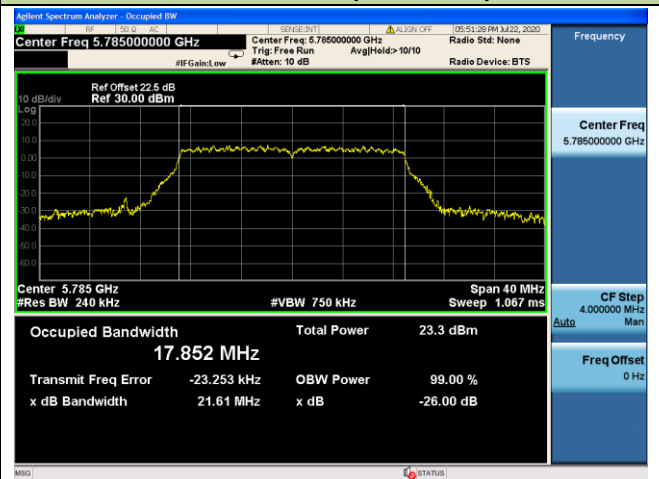

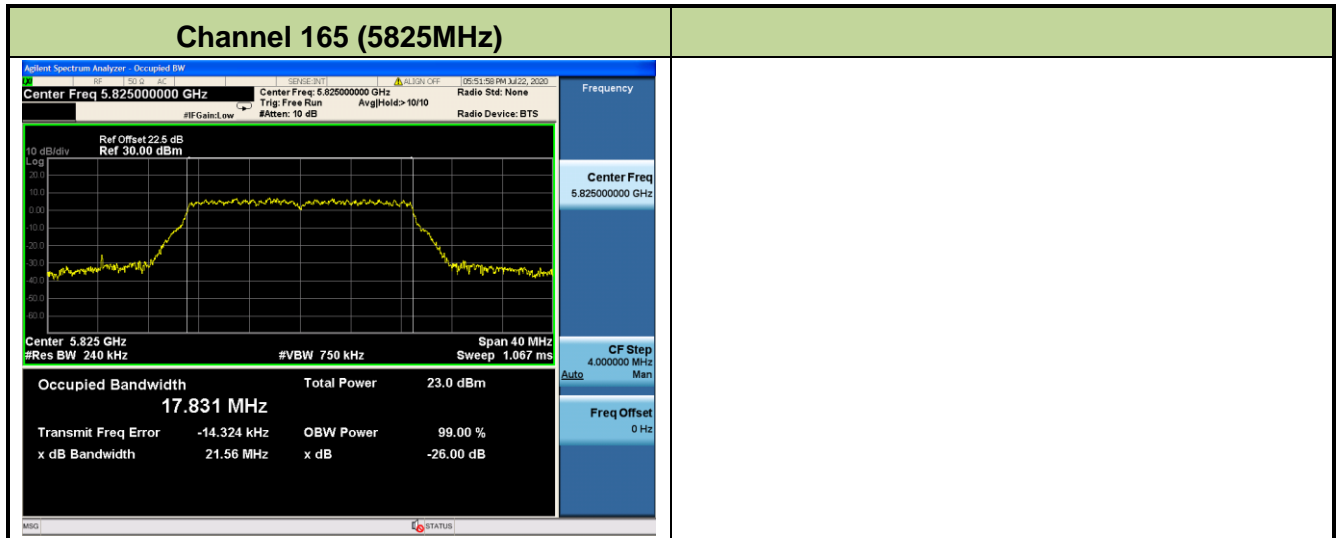


802.11ac-VHT40 26dB Bandwidth - Ant 1 / Ant 0 + 1


Channel 38 (5190MHz)

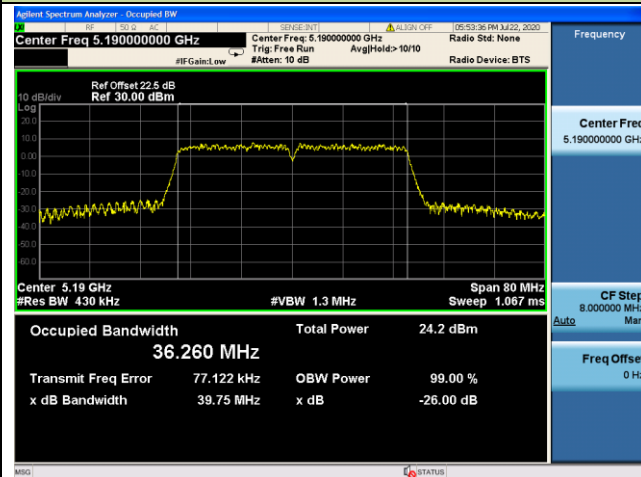


Channel 46 (5230MHz)

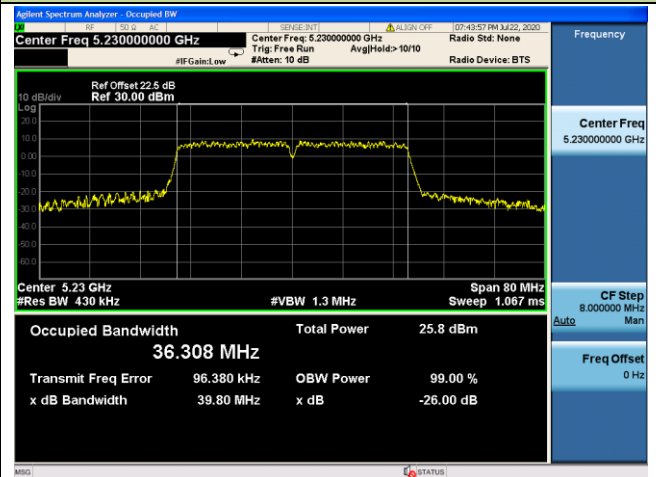


Channel 54 (5270MHz)

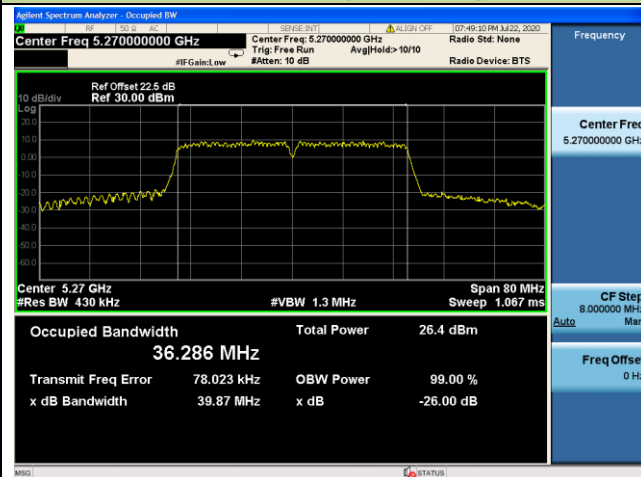


Channel 62 (5310MHz)

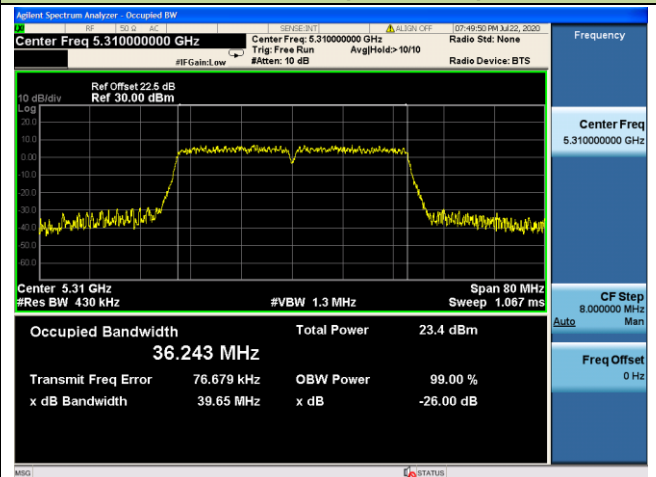


Channel 102 (5510MHz)

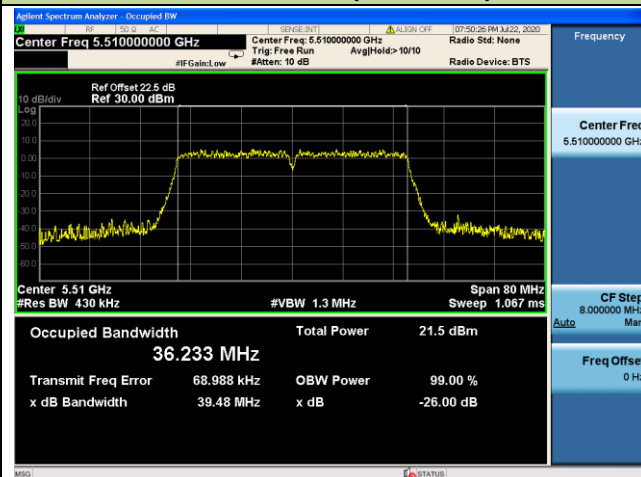


Channel 110 (5550MHz)

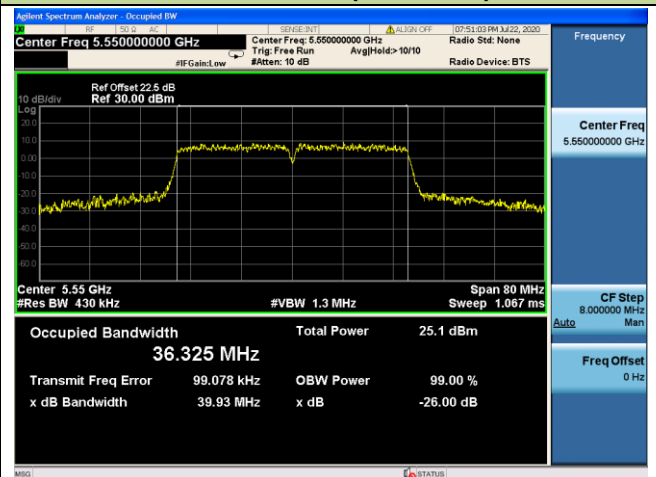


Channel 134 (5670MHz)

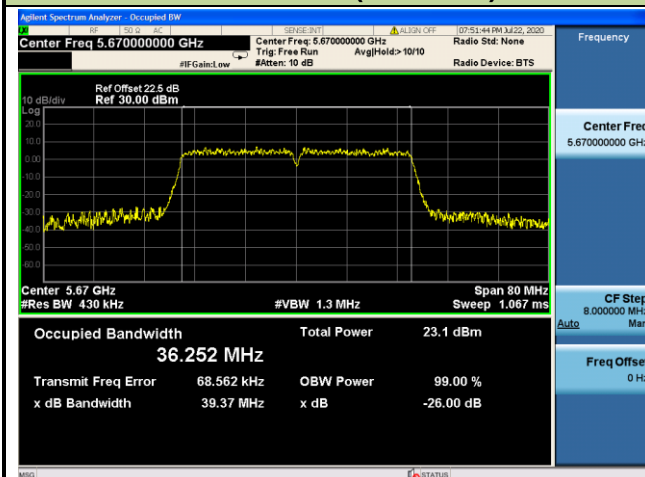


Channel 142 (5710MHz)

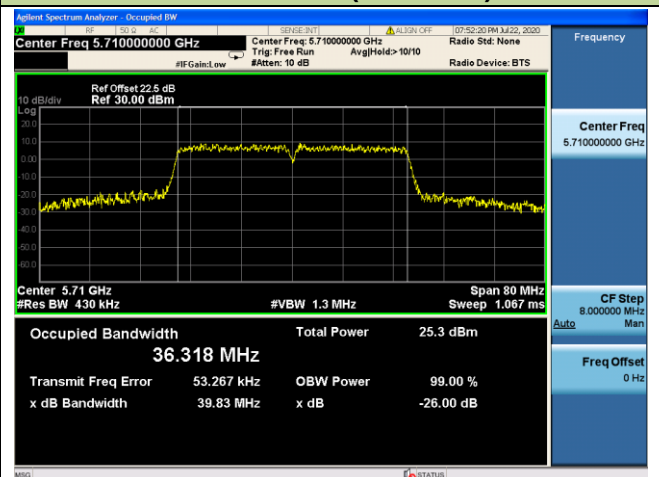

Channel 151 (5755MHz)

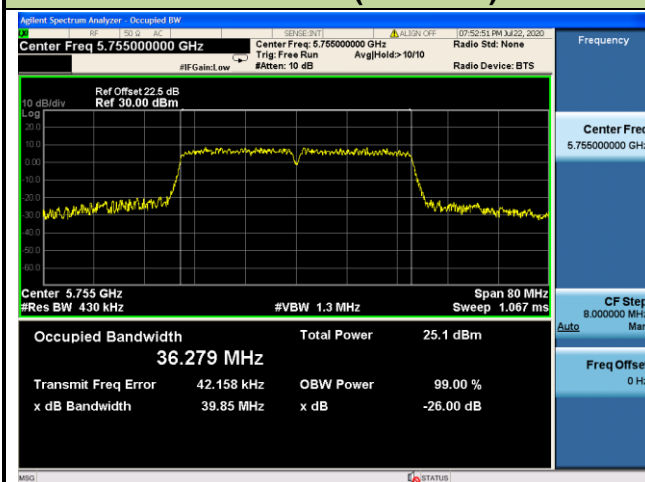

Channel 159 (5795MHz)

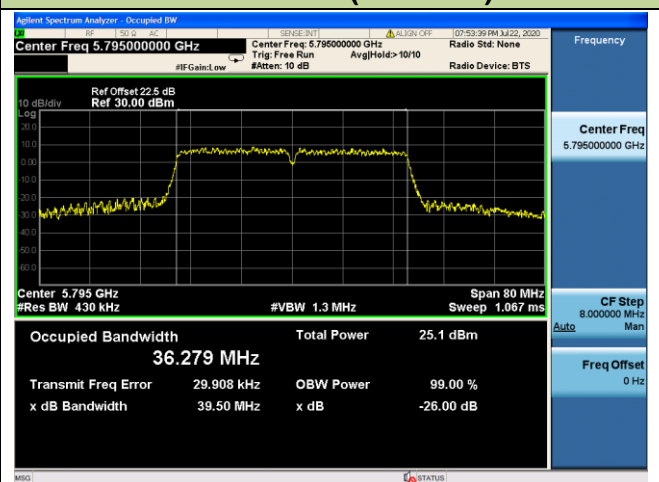

802.11ac-VHT80 26dB Bandwidth - Ant 1 / Ant 0 + 1

Channel 42 (5210MHz)




Channel 58 (5290MHz)




Channel 106 (5530MHz)



Channel 122 (5610MHz)

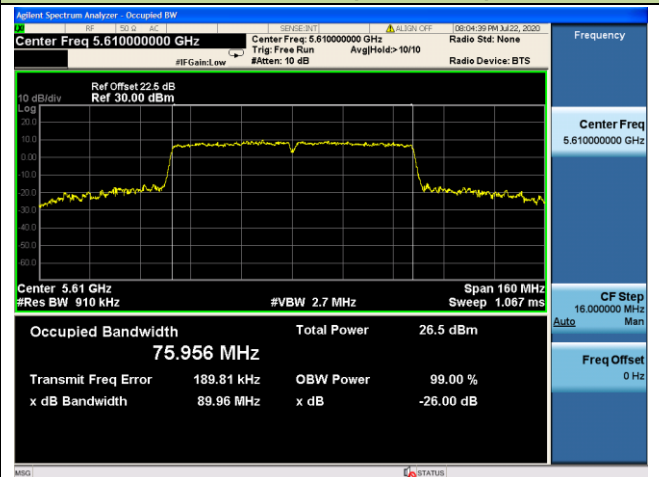

Channel 138 (5690MHz)

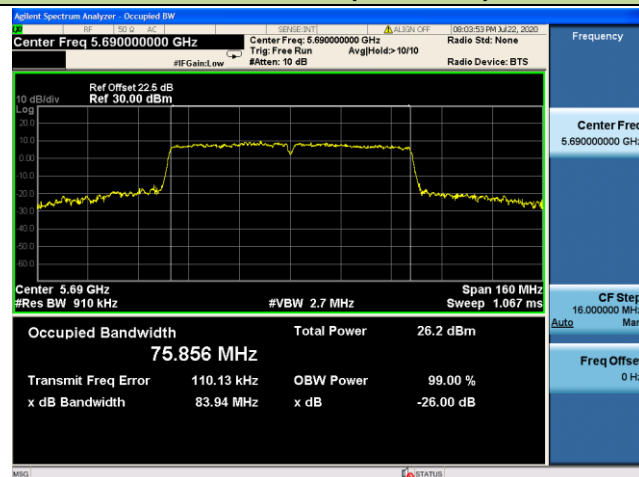

Channel 155 (5775MHz)

