



PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.pctestlab.com>



MEASUREMENT REPORT

FCC Part 22, 24, 27 LTE

Applicant Name:

LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:

07/08 - 07/11; 07/26/2013

Test Site/Location:

PCTEST Lab., Columbia, MD, USA

Test Report Serial No.:

0Y1306241073.ZNF

FCC ID :

ZNFD800

APPLICANT:

LG ELECTRONICS MOBILECOMM U.S.A

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s): §2; §22; §24; §27

EUT Type: Portable Handset

Model(s): LG-D800, D800, LGD800

Test Device Serial No.: identical prototype [S/N: RF Radiated, RF Cond]

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	ERP/EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE Band 17	706.5 - 713.5	4M53G7D	QPSK	0.056	17.49
LTE Band 17	706.5 - 713.5	4M52W7D	16QAM	0.043	16.38
LTE Band 17	709 - 711	9M03G7D	QPSK	0.064	18.03
LTE Band 17	709 - 711	9M01W7D	16QAM	0.050	16.98
LTE Band 5	826.5 - 846.5	4M50G7D	QPSK	0.125	20.98
LTE Band 5	826.5 - 846.5	4M51W7D	16QAM	0.093	19.70
LTE Band 5	829 - 844	8M96G7D	QPSK	0.115	20.60
LTE Band 5	829 - 844	8M96W7D	16QAM	0.090	19.55
LTE Band 4	1712.5 - 1752.5	4M52G7D	QPSK	0.333	25.23
LTE Band 4	1712.5 - 1752.5	4M52W7D	16QAM	0.265	24.23
LTE Band 4	1715 - 1750	8M98G7D	QPSK	0.245	23.89
LTE Band 4	1715 - 1750	8M96W7D	16QAM	0.198	22.97
LTE Band 2	1852.5 - 1907.5	4M51G7D	QPSK	0.449	26.52
LTE Band 2	1852.5 - 1907.5	4M52W7D	16QAM	0.357	25.52
LTE Band 2	1855 - 1905	8M97G7D	QPSK	0.445	26.48
LTE Band 2	1855 - 1905	8M98W7D	16QAM	0.359	25.55

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested. I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortaez
President




FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 1 of 88

T A B L E O F C O N T E N T S

FCC PART 22, 24, 27 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 SCOPE	4
1.2 TESTING FACILITY	4
2.0 PRODUCT INFORMATION.....	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 DEVICE CAPABILITIES.....	5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
2.4 LABELING REQUIREMENTS.....	5
3.0 DESCRIPTION OF TESTS.....	6
3.1 MEASUREMENT PROCEDURE	6
3.2 BLOCK A FREQUENCY RANGE	6
3.3 CELLULAR - BASE FREQUENCY BLOCKS.....	6
3.4 CELLULAR - MOBILE FREQUENCY BLOCKS.....	6
3.5 PCS - BASE FREQUENCY BLOCKS	7
3.6 PCS - MOBILE FREQUENCY BLOCKS.....	7
3.7 AWS - BASE FREQUENCY BLOCKS	7
3.8 AWS - MOBILE FREQUENCY BLOCKS	7
3.9 OCCUPIED BANDWIDTH.....	8
3.10 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	8
3.11 PEAK-AVERAGE RATIO	8
3.12 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS	9
3.13 FREQUENCY STABILITY / TEMPERATURE VARIATION	10
4.0 TEST EQUIPMENT CALIBRATION DATA	11
5.0 SAMPLE CALCULATIONS	12
6.0 TEST RESULTS	13
6.1 SUMMARY	13
6.2 EFFECTIVE RADIATED POWER (ERP)	14
6.3 EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)	15
6.4 BAND 17 RADIATED SPURIOUS EMISSIONS	16
6.5 BAND 5 RADIATED SPURIOUS EMISSIONS	19
6.6 BAND 4 RADIATED SPURIOUS EMISSIONS	22
6.7 BAND 2 RADIATED SPURIOUS EMISSIONS	25
6.8 BAND 17 FREQUENCY STABILITY MEASUREMENTS	28
6.9 BAND 5 FREQUENCY STABILITY MEASUREMENTS	30
6.10 BAND 4 FREQUENCY STABILITY MEASUREMENTS	32
6.11 BAND 2 FREQUENCY STABILITY MEASUREMENTS	34
7.0 BAND 17 PLOTS OF EMISSIONS	36
8.0 BAND 5 PLOTS OF EMISSIONS	47
9.0 BAND 4 PLOTS OF EMISSIONS	58
10.0 BAND 2 PLOTS OF EMISSIONS	73
11.0 CONCLUSION.....	88

FCC ID: ZNFD800	 FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset



MEASUREMENT REPORT

FCC Part 22, 24, 27



§2.1033 General Information

APPLICANT: LG Electronics MobileComm U.S.A
APPLICANT ADDRESS: 1000 Sylvan Avenue
TEST SITE: Englewood Cliffs, NJ 07632, United States
TEST SITE ADDRESS: PCTEST ENGINEERING LABORATORY, INC.
FCC RULE PART(S): 7185 Oakland Mills Road, Columbia, MD 21045 USA
BASE MODEL: §2; §22; §24; §27
FCC ID: LG-D800
FCC CLASSIFICATION: ZNFD800
FREQUENCY TOLERANCE: PCS Licensed Transmitter Held to Ear (PCE)
Test Device Serial No.: ±0.00025 % (2.5 ppm)
DATE(S) OF TEST: RF Radiated, RF Cond Production Pre-Production Engineering
TEST REPORT S/N: 07/08 - 07/11; 07/26/2013
TEST REPORT S/N: 0Y1306241073.ZNF

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: ZNFD800	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)				Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 3 of 88

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Interntl (BWI) airport, the city of Baltimore and the Washington, DC area. (See *Figure 1-1*).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on February 15, 2012.

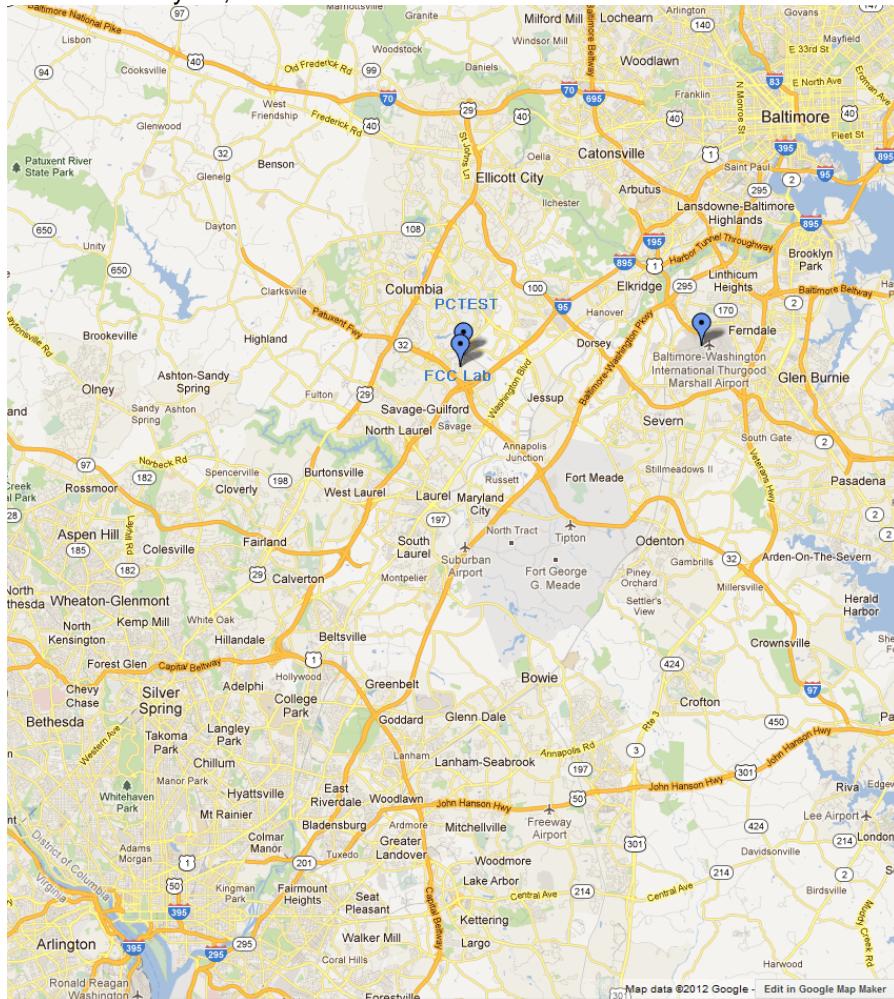


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFD800	 PCTEST ENGINEERING LABORATORIES, INC.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 4 of 88

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFD800**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Band 2, 4, 5, 17 (5, 10MHz BW) LTE, 802.11a/b/g/n/ac WLAN (DTS/NII), Bluetooth (1x, EDR, LE), NFC

2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.4 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

FCC ID: ZNFD800	 PCTEST Engineering Laboratory, Inc.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 5 of 88

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168) were used in the measurement of the **LG Portable Handset** **FCC ID: ZNFD800**.

3.2 Block A Frequency Range


§27.5(c)

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
 Block B: 704-710 MHz and 734-740 MHz; and
 Block C: 710-716 MHz and 740-746 MHz.

3.3 Cellular - Base Frequency Blocks

§24.905

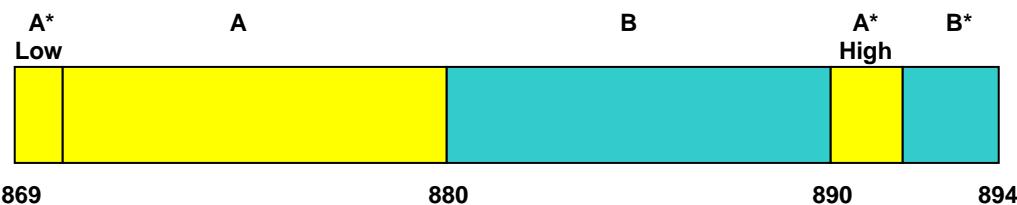


BLOCK 1: 869 – 880 MHz (A* Low + A)
 BLOCK 2: 880 – 890 MHz (B)

BLOCK 3: 890 – 891.5 MHz (A* High)
 BLOCK 4: 891.5 – 894 MHz (B*)

3.4 Cellular - Mobile Frequency Blocks

§24.905

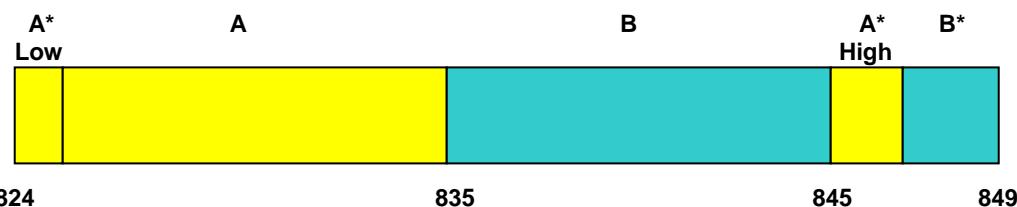


BLOCK 1: 824 – 835 MHz (A* Low + A)
 BLOCK 2: 835 – 845 MHz (B)

BLOCK 3: 845 – 846.5 MHz (A* High)
 BLOCK 4: 846.5 – 849 MHz (B*)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 6 of 88


3.5 PCS - Base Frequency Blocks

§24.229

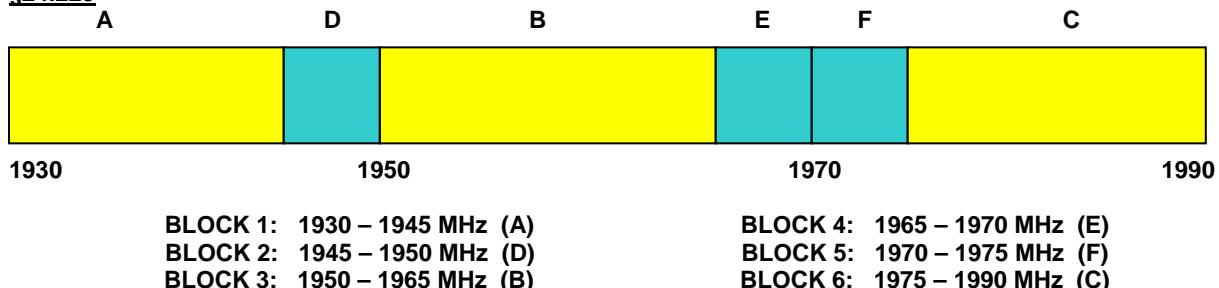


3.6 PCS - Mobile Frequency Blocks

§24.229

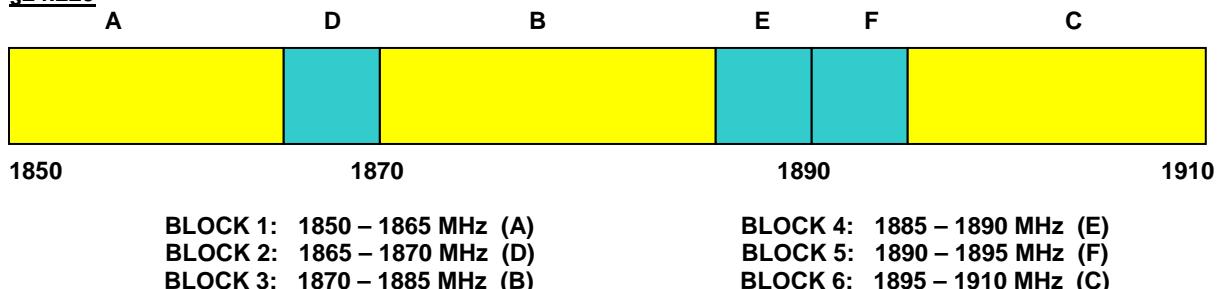


3.7 AWS - Base Frequency Blocks


§27.5(h)

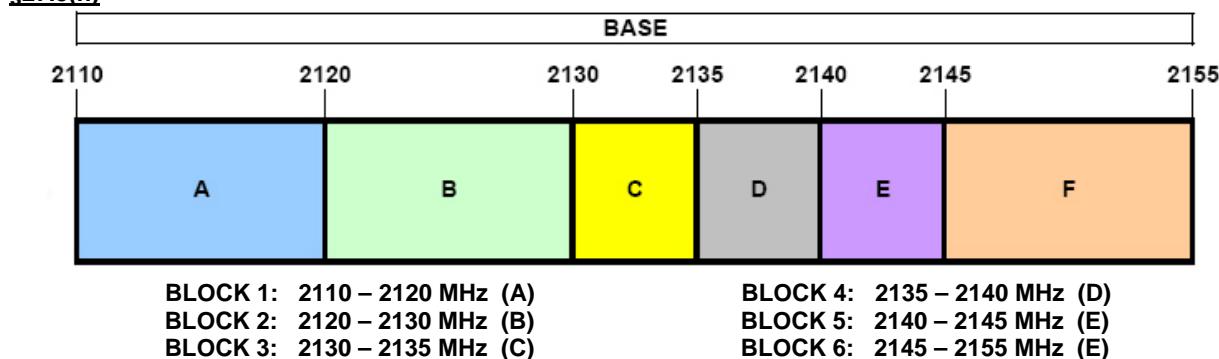

3.8 AWS - Mobile Frequency Blocks

§27.5(h)

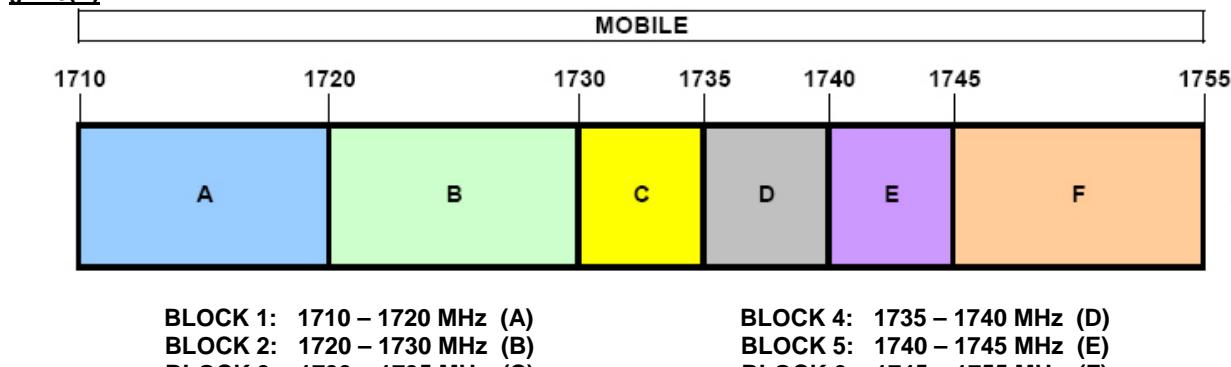

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 7 of 88

3.9 Occupied Bandwidth

§2.1049 RSS-Gen(4.6.1) RSS-133(2.3) RSS-139(2.3)

The implementation of this test is performed by the spectrum analyzer's occupied bandwidth function. The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

3.10 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §22.917(a)(b) §24.238(a)(b) §27.53(g) §27.53(h) RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Cell band, 698–746 MHz band, or 1 MHz or greater for PCS band, AWS band. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed for PCS band, AWS band. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

3.11 Peak-Average Ratio

§24.232(d) §27.50(d.5) RSS-132(5.4) RSS-133(6.4) RSS-139(6.4)

A peak to average ratio measurement is performed at the conducted port of the EUT. For LTE signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

FCC ID: ZNFD800	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: LG Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 8 of 88

3.12 Radiated Power and Radiated Spurious Emissions

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a) §27.50(c.10) §27.50(d.4) §27.53(g) RSS-132(4.4) RSS-132(4.5.1) RSS-133(6.4) RSS-133(6.5.1) RSS-139(6.5.1)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A $\frac{3}{4}$ " (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss} \text{ [dB]} + \text{antenna gain} \text{ [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss} \text{ [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$ specified in 22.917(a) and 24.238(a).

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 9 of 88

3.13 Frequency Stability / Temperature Variation

§2.1055 §22.863 §22.905 §24.229 §24.235 §27.5(c) §27.5(h) §27.54 RSS-132(4.3) RSS-133(6.3) RSS-139(6.3)

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block for Part 24 and 27. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency for Part 22.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 10 of 88

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	1/17/2013	Annual	1/17/2014	N/A
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	3/29/2013	Annual	3/29/2014	N/A
Agilent	8447D	Broadband Amplifier	5/31/2013	Annual	5/31/2014	2443A01900
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Espec	ESX-2CA	Environmental Chamber	4/16/2013	Annual	4/16/2014	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Biennial	7/22/2013	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	11/7/2012	Biennial	11/7/2014	128338
Mini-Circuits	VHF-1300+	High Pass Filter	1/21/2013	Annual	1/21/2014	30716
Mini-Circuits	VHF-3100+	High Pass Filter	1/17/2013	Annual	1/17/2014	30841
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	10/7/2011	Biennial	10/7/2013	103962
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100040
Rohde & Schwarz	ESU26	EMI Test Receiver	2/25/2013	Annual	2/25/2014	100342
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	10/3/2011	Biennial	10/3/2013	91052523RX
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107
Sunol	DRH-118	Horn Antenna (1-18 GHz)	6/19/2013	Biennial	6/19/2015	A042511

Table 4-1. Test Equipment

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 11 of 88	

5.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Amplitude/Angle Modulated

16QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Combination (Audio/Data)

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 12 of 88

6.0 TEST RESULTS

6.1 Summary

Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFD800
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Result	Reference
TRANSMITTER MODE (TX)					
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0, 8.0, 9.0, 10.0
2.1051 22.917(a) 24.238(a) 27.53(g) 27.53(h)	Band Edge / Conducted Spurious Emissions	> 43 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Section 7.0, 8.0, 9.0, 10.0
24.232(d) 27.50(d.5)	Peak-Average Ratio	< 13 dB		PASS	Section 9.0, 10.0
2.1046	Transmitter Conducted Output Power	N/A		PASS	See RF Exposure Report
22.913(a.2)	Effective Radiated Power (Band 5)	< 7 Watts max. ERP	RADIATED	PASS	Section 6.2
27.50(c.10)	Effective Radiated Power (Band 17)	< 3 Watts max. ERP		PASS	Section 6.2
24.232(c)	Equivalent Isotropic Radiated Power (Band 2)	< 2 Watts max. EIRP		PASS	Section 6.3
27.50(d.4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 6.3
2.1053 22.917(a) 24.238(a) 27.53(g) 27.53(h)	Undesirable Emissions	> 43 + 10log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 6.4, 6.5, 6.6, 6.7
2.1055. 22.355 24.235 27.54	Frequency Stability	< 2.5 ppm (Part 22) and fundamental emissions stay within authorized frequency block (Part 24, 27)		PASS	Section 6.8, 6.9, 6.10, 6.11

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 8.0 9.0 10.0 were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 13 of 88

6.2 Effective Radiated Power (ERP)

§22.913(a.2) §27.50(c.10) RSS-132(4.4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
706.50	5	QPSK	Standard	1/24	15.02	2.35	V	17.37	0.055	-17.40
710.00	5	QPSK	Standard	1/0	15.07	2.42	V	17.49	0.056	-17.28
713.50	5	QPSK	Standard	1/24	14.96	2.49	V	17.45	0.056	-17.32
706.50	5	16-QAM	Standard	1/24	13.81	2.35	V	16.16	0.041	-18.61
710.00	5	16-QAM	Standard	1/0	13.92	2.42	V	16.34	0.043	-18.43
713.50	5	16-QAM	Standard	1/24	13.89	2.49	V	16.38	0.043	-18.39
709.00	10	QPSK	Standard	1/25	15.54	2.35	V	17.89	0.062	-16.88
710.00	10	QPSK	Standard	1/25	15.61	2.42	V	18.03	0.064	-16.74
711.00	10	QPSK	Standard	1/25	15.22	2.49	V	17.71	0.059	-17.06
709.00	10	16-QAM	Standard	1/25	14.63	2.35	V	16.98	0.050	-17.79
710.00	10	16-QAM	Standard	1/25	14.52	2.42	V	16.94	0.049	-17.83
711.00	10	16-QAM	Standard	1/25	14.14	2.49	V	16.63	0.046	-18.14

Table 6-2. ERP Data (Band 17)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Margin [dB]
826.50	5	QPSK	Standard	1/0	16.30	4.68	V	20.98	0.125	-17.47
836.50	5	QPSK	Standard	1/24	15.78	4.82	V	20.60	0.115	-17.85
846.50	5	QPSK	Standard	1/0	15.43	4.96	V	20.39	0.109	-18.06
826.50	5	16-QAM	Standard	1/0	15.02	4.68	V	19.70	0.093	-18.75
836.50	5	16-QAM	Standard	1/24	14.84	4.82	V	19.66	0.093	-18.79
846.50	5	16-QAM	Standard	1/0	14.34	4.96	V	19.30	0.085	-19.15
829.00	10	QPSK	Standard	1/25	15.71	4.68	V	20.39	0.109	-18.06
836.50	10	QPSK	Standard	1/0	15.78	4.82	V	20.60	0.115	-17.85
844.00	10	QPSK	Standard	1/0	15.62	4.96	V	20.58	0.114	-17.87
829.00	10	16-QAM	Standard	1/25	14.87	4.68	V	19.55	0.090	-18.90
836.50	10	16-QAM	Standard	1/0	14.70	4.82	V	19.52	0.090	-18.93
844.00	10	16-QAM	Standard	1/0	14.29	4.96	V	19.25	0.084	-19.20

Table 6-3. ERP Data (Band 5)

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The data reported in the table above was measured in this test setup.

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)					Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset					Page 14 of 88

6.3 Equivalent Isotropic Radiated Power (EIRP)

§24.232(c) §27.50(d.4) RSS-133(6.4) RSS-139(6.4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1712.50	5	QPSK	Standard	1/0	14.54	9.89	H2	24.43	0.277	-5.57
1732.50	5	QPSK	Standard	1/0	15.38	9.85	H2	25.23	0.333	-4.77
1752.50	5	QPSK	Standard	1/0	12.75	9.80	H2	22.55	0.180	-7.45
1712.50	5	16-QAM	Standard	1/0	13.49	9.89	H2	23.38	0.218	-6.62
1732.50	5	16-QAM	Standard	1/0	14.38	9.85	H2	24.23	0.265	-5.77
1752.50	5	16-QAM	Standard	1/0	11.69	9.80	H2	21.49	0.141	-8.51
1715.00	10	QPSK	Standard	1/25	12.81	9.89	H2	22.70	0.186	-7.30
1732.50	10	QPSK	Standard	1/49	14.04	9.85	H2	23.89	0.245	-6.11
1750.00	10	QPSK	Standard	1/49	13.57	9.80	H2	23.37	0.217	-6.63
1715.00	10	16-QAM	Standard	1/25	11.49	9.89	H2	21.38	0.137	-8.62
1732.50	10	16-QAM	Standard	1/49	13.12	9.85	H2	22.97	0.198	-7.03
1750.00	10	16-QAM	Standard	1/49	12.74	9.80	H2	22.54	0.180	-7.46

Table 6-4. EIRP Data (Band 4)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1852.50	5	QPSK	Standard	1/12	15.59	9.59	H2	25.18	0.329	-7.83
1880.00	5	QPSK	Standard	1/12	16.99	9.53	H2	26.52	0.449	-6.49
1907.50	5	QPSK	Standard	1/12	16.01	9.48	H2	25.49	0.354	-7.52
1852.50	5	16-QAM	Standard	1/12	14.59	9.59	H2	24.18	0.262	-8.83
1880.00	5	16-QAM	Standard	1/12	15.99	9.53	H2	25.52	0.357	-7.49
1907.50	5	16-QAM	Standard	1/12	14.68	9.48	H2	24.16	0.261	-8.85
1855.00	10	QPSK	Standard	1/49	15.94	9.59	H2	25.53	0.357	-7.48
1880.00	10	QPSK	Standard	1/25	16.95	9.53	H2	26.48	0.445	-6.53
1905.00	10	QPSK	Standard	1/0	16.59	9.48	H2	26.07	0.405	-6.94
1855.00	10	16-QAM	Standard	1/49	14.75	9.59	H2	24.34	0.272	-8.67
1880.00	10	16-QAM	Standard	1/25	16.02	9.53	H2	25.55	0.359	-7.46
1905.00	10	16-QAM	Standard	1/0	15.61	9.48	H2	25.09	0.323	-7.92

Table 6-5. EIRP Data (Band 2)

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The data reported in the table above was measured in this test setup.

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)					Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset					Page 15 of 88

6.4 Band 17 Radiated Spurious Emissions

§2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 709.00 MHz
 MEASURED OUTPUT POWER: 17.89 dBm = 0.062 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 30.89 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1418.00	-56.32	3.63	-52.69	H	70.59
2127.00	-56.06	3.90	-52.17	H	70.06
2836.00	-79.71	5.01	-74.70	H	92.59
3545.00	-80.21	6.25	-73.96	H	91.86
4254.00	-79.64	7.23	-72.41	H	90.30
4963.00	-78.83	7.86	-70.97	H	88.86

Table 6-6. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The data reported in the table above was measured in this test setup.

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 16 of 88

Band 17 Radiated Spurious Measurements (continued)

§2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 710.00 MHz
 MEASURED OUTPUT POWER: 18.03 dBm = 0.064 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 31.03 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1420.00	-56.35	3.68	-52.67	H	70.71
2130.00	-56.44	3.92	-52.52	H	70.55
2840.00	-79.65	5.02	-74.63	H	92.66
3550.00	-80.13	6.25	-73.88	H	91.91
4260.00	-79.63	7.25	-72.38	H	90.42
4970.00	-78.87	7.90	-70.97	H	89.00

Table 6-7. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The data reported in the table above was measured in this test setup.

FCC ID: ZNFD800	 PCTEST Engineering Laboratory, Inc.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 17 of 88

Band 17 Radiated Spurious Measurements (continued)

§2.1053 §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 711.00 MHz
 MEASURED OUTPUT POWER: 17.71 dBm = 0.059 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 30.71 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1422.00	-57.21	3.73	-53.48	H	71.20
2133.00	-57.03	3.94	-53.09	H	70.81
2844.00	-79.59	5.04	-74.55	H	92.26
3555.00	-80.04	6.25	-73.79	H	91.50
4266.00	-79.57	7.25	-72.32	H	90.03
4977.00	-78.91	7.94	-70.97	H	88.68

Table 6-8. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The data reported in the table above was measured in this test setup.

FCC ID: ZNFD800	 PCTEST Engineering Laboratory, Inc.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 18 of 88

6.5 Band 5 Radiated Spurious Emissions

§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 826.50 MHz
 MEASURED OUTPUT POWER: 20.98 dBm = 0.125 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.98 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1653.00	-42.17	2.50	-39.68	H	60.66
2479.50	-49.59	2.82	-46.78	H	67.76
3306.00	-54.25	5.52	-48.72	H	69.71
4132.50	-54.00	7.08	-46.92	H	67.90
4959.00	-78.88	7.91	-70.97	H	91.95
5785.50	-76.96	8.51	-68.45	H	89.44

Table 6-9. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The data reported in the table above was measured in this test setup.

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 19 of 88

Band 5 Radiated Spurious Measurements (continued)

§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.50 MHz
 MEASURED OUTPUT POWER: 20.60 dBm = 0.115 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.60 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.00	-49.00	2.34	-46.67	H	67.27
2509.50	-49.82	2.84	-46.98	H	67.58
3346.00	-51.32	5.64	-45.68	H	66.28
4182.50	-54.52	7.14	-47.38	H	67.98
5019.00	-78.86	7.97	-70.89	H	91.50
5855.50	-76.66	8.46	-68.20	H	88.80

Table 6-10. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The data reported in the table above was measured in this test setup.

FCC ID: ZNFD800	 PCTEST Engineering Laboratory, Inc.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 20 of 88

Band 5 Radiated Spurious Measurements (continued)

§2.1053 §22.917(a) RSS-132(4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 846.50 MHz
 MEASURED OUTPUT POWER: 20.39 dBm = 0.109 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.39 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1693.00	-45.16	2.18	-42.98	H	63.37
2539.50	-50.34	3.04	-47.30	H	67.69
3386.00	-53.34	5.76	-47.58	H	67.97
4232.50	-53.99	7.20	-46.79	H	67.18
5079.00	-78.72	8.00	-70.72	H	91.11
5925.50	-76.37	8.42	-67.95	H	88.34

Table 6-11. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The data reported in the table above was measured in this test setup.

FCC ID: ZNFD800	 PCTEST Engineering Laboratory, Inc.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 21 of 88

6.6 Band 4 Radiated Spurious Emissions

§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1712.50 MHz
 MEASURED OUTPUT POWER: 24.43 dBm = 0.277 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 37.43 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3425.00	-52.51	8.09	-44.41	H2	68.84
5137.50	-41.38	10.21	-31.17	H2	55.60
6850.00	-40.59	11.31	-29.28	H2	53.71
8562.50	-45.89	13.02	-32.87	H2	57.30
10275.00	-51.92	13.01	-38.91	H2	63.34
11987.50	-43.76	13.21	-30.55	H2	54.98

Table 6-12. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The data reported in the table above was measured in this test setup.

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 22 of 88

Band 4 Radiated Spurious Measurements (continued)

§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1732.50 MHz
 MEASURED OUTPUT POWER: 25.23 dBm = 0.333 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.23 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3465.00	-50.81	8.26	-42.54	H2	67.77
5197.50	-40.26	10.26	-30.00	H2	55.23
6930.00	-37.56	11.42	-26.14	H2	51.37
8662.50	-46.85	13.07	-33.79	H2	59.01
10395.00	-50.74	13.12	-37.63	H2	62.85
12127.50	-43.75	13.25	-30.50	H2	55.73

Table 6-13. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The data reported in the table above was measured in this test setup.

FCC ID: ZNFD800	 PCTEST Engineering Laboratory, Inc.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 23 of 88

Band 4 Radiated Spurious Measurements (continued)

§2.1053 §27.53(h) RSS-139(6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1752.50 MHz
 MEASURED OUTPUT POWER: 22.55 dBm = 0.180 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 35.55 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3505.00	-51.74	8.40	-43.34	H2	65.89
5257.50	-40.79	10.32	-30.47	H2	53.03
7010.00	-40.14	11.51	-28.63	H2	51.18
8762.50	-45.94	13.11	-32.83	H2	55.39
10515.00	-53.05	13.20	-39.85	H2	62.41
12267.50	-43.97	13.31	-30.66	H2	53.21

Table 6-14. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The data reported in the table above was measured in this test setup.

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 24 of 88

6.7 Band 2 Radiated Spurious Emissions

§2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1852.50 MHz
 MEASURED OUTPUT POWER: 25.18 dBm = 0.329 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.18 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3705.00	-49.98	8.40	-41.58	H2	66.76
5557.50	-39.81	10.63	-29.18	H2	54.36
7410.00	-32.60	11.84	-20.76	H2	45.94
9262.50	-53.12	13.29	-39.83	H2	65.01
11115.00	-51.12	13.50	-37.62	H2	62.79
12967.50	-72.44	13.68	-58.76	H2	83.94

Table 6-15. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The data reported in the table above was measured in this test setup.

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 25 of 88

Band 2 Radiated Spurious Measurements (continued)

§2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
 MEASURED OUTPUT POWER: 26.52 dBm = 0.449 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 39.52 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-50.64	8.42	-42.21	H2	68.73
5640.00	-38.82	10.66	-28.16	H2	54.68
7520.00	-38.02	11.92	-26.09	H2	52.62
9400.00	-54.45	13.24	-41.21	H2	67.73
11280.00	-75.76	13.49	-62.28	H2	88.80
13160.00	-72.08	13.83	-58.25	H2	84.77

Table 6-16. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The data reported in the table above was measured in this test setup.

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 26 of 88

Band 2 Radiated Spurious Measurements (continued)

§2.1053 §24.238(a) RSS-133(6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1907.50 MHz
 MEASURED OUTPUT POWER: 25.49 dBm = 0.354 W
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 38.49 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3815.00	-50.38	8.55	-41.84	H2	67.33
5722.50	-38.50	10.69	-27.81	H2	53.30
7630.00	-36.26	12.05	-24.22	H2	49.71
9537.50	-52.98	13.20	-39.78	H2	65.26
11445.00	-75.71	13.43	-62.28	H2	87.77
13352.50	-72.37	14.00	-58.36	H2	83.85

Table 6-17. Radiated Spurious Data

NOTES:

1. This device was tested under all bandwidths, and RB configurations, and modulations.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The data reported in the table above was measured in this test setup.

FCC ID: ZNFD800	 PCTEST Engineering Laboratory, Inc.	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 27 of 88

6.8 Band 17 Frequency Stability Measurements

§2.1055 §22.355 §27.54

OPERATING FREQUENCY: 710,000,000 Hz

CHANNEL: 23090

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	710,000,014	14	0.0000020
100 %		- 30	709,999,980	-20	-0.0000028
100 %		- 20	710,000,020	20	0.0000028
100 %		- 10	710,000,025	25	0.0000035
100 %		0	709,999,985	-15	-0.0000021
100 %		+ 10	710,000,001	1	0.0000001
100 %		+ 20	709,999,975	-25	-0.0000035
100 %		+ 30	710,000,013	13	0.0000018
100 %		+ 40	709,999,982	-18	-0.0000025
100 %		+ 50	710,000,011	11	0.0000015
115 %		+ 20	710,000,024	24	0.0000034
BATT. ENDPOINT	3.25	+ 20	709,999,983	-17	-0.0000024

Table 6-18. Frequency Stability Data (Band 17)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 28 of 88	

Band 17 Frequency Stability Measurements (Cont'd)

§2.1055 §22.355 §27.54

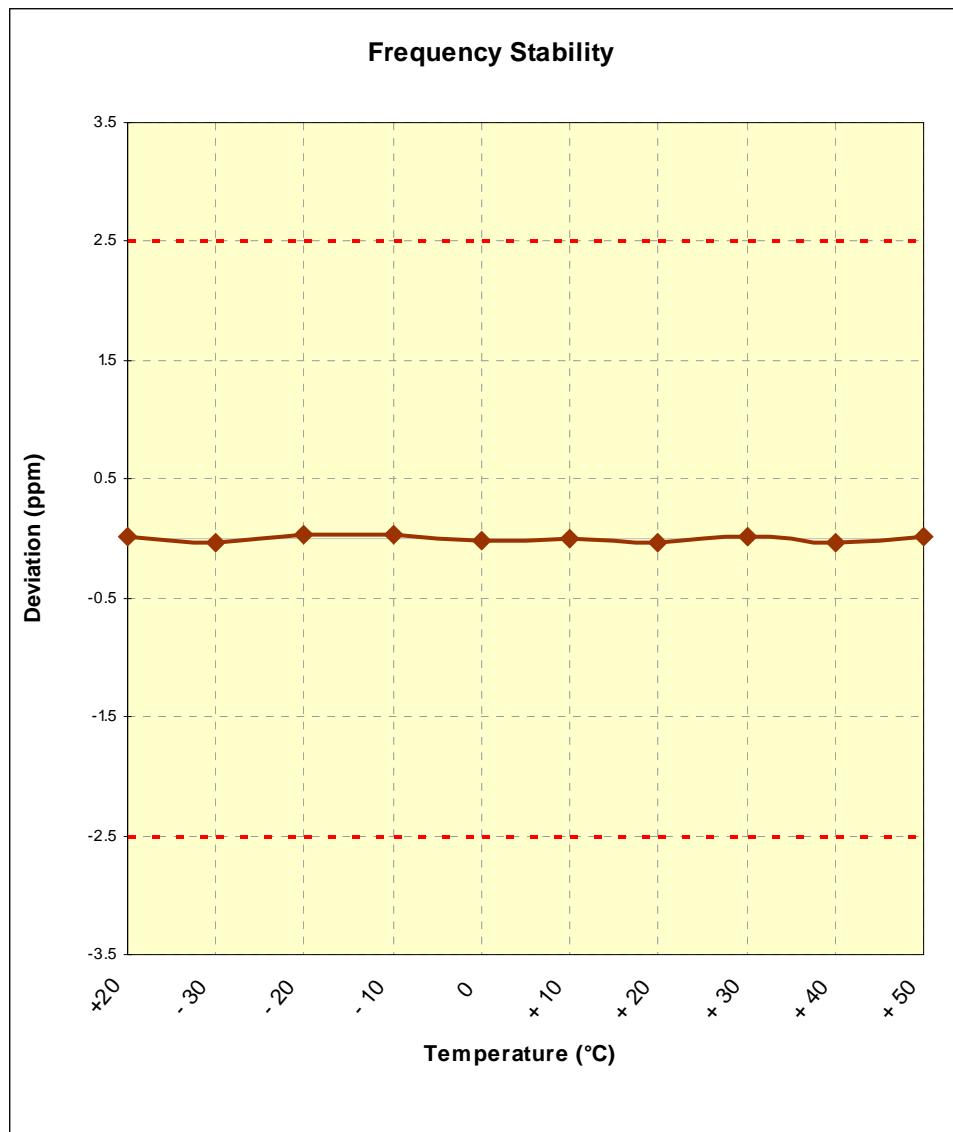


Figure 6-1. Frequency Stability Graph (Band 17)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 29 of 88

6.9 Band 5 Frequency Stability Measurements

§2.1055 §22.355 RSS-132(4.3)

OPERATING FREQUENCY: 836,500,000 Hz

CHANNEL: 20525

REFERENCE VOLTAGE: 3.8 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,500,014	14	0.0000017
100 %		- 30	836,500,000	0	0.0000000
100 %		- 20	836,499,978	-22	-0.0000026
100 %		- 10	836,500,013	13	0.0000016
100 %		0	836,500,002	2	0.0000002
100 %		+ 10	836,499,984	-16	-0.0000019
100 %		+ 20	836,500,016	16	0.0000019
100 %		+ 30	836,499,976	-24	-0.0000029
100 %		+ 40	836,499,993	-7	-0.0000008
100 %		+ 50	836,500,020	20	0.0000024
115 %		+ 20	836,499,971	-29	-0.0000035
BATT. ENDPOINT	3.25	+ 20	836,499,981	-19	-0.0000023

Table 6-19. Frequency Stability Data (Band 5)

Note:

None.

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 30 of 88

Band 5 Frequency Stability Measurements (Cont'd)

§2.1055 §22.355 RSS-132(4.3)

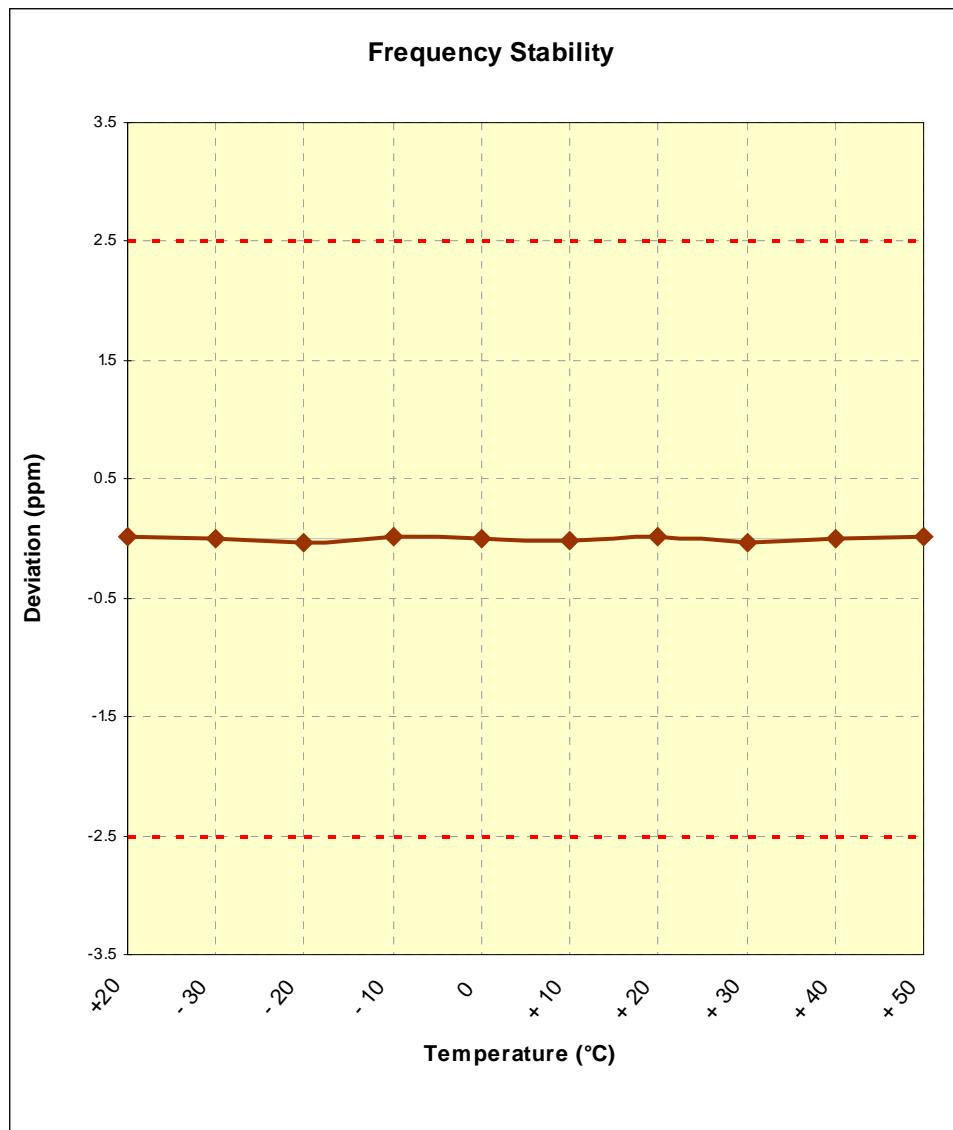


Figure 6-2. Frequency Stability Graph (Band 5)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 31 of 88

6.10 Band 4 Frequency Stability Measurements

§2.1055 §§27.54 RSS-139(6.3)

OPERATING FREQUENCY: 1,732,500,000 Hz

CHANNEL: 20175

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,732,499,991	-9	-0.0000005
100 %		- 30	1,732,500,014	14	0.0000008
100 %		- 20	1,732,499,976	-24	-0.0000014
100 %		- 10	1,732,499,991	-9	-0.0000005
100 %		0	1,732,500,026	26	0.0000015
100 %		+ 10	1,732,499,991	-9	-0.0000005
100 %		+ 20	1,732,499,986	-14	-0.0000008
100 %		+ 30	1,732,499,971	-29	-0.0000017
100 %		+ 40	1,732,500,010	10	0.0000006
100 %		+ 50	1,732,500,027	27	0.0000016
115 %		+ 20	1,732,500,028	28	0.0000016
BATT. ENDPOINT	3.25	+ 20	1,732,499,970	-30	-0.0000017

Table 6-20. Frequency Stability Data (Band 4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 32 of 88	

Band 4 Frequency Stability Measurements (Cont'd)

§2.1055 §§27.54 RSS-139(6.3)

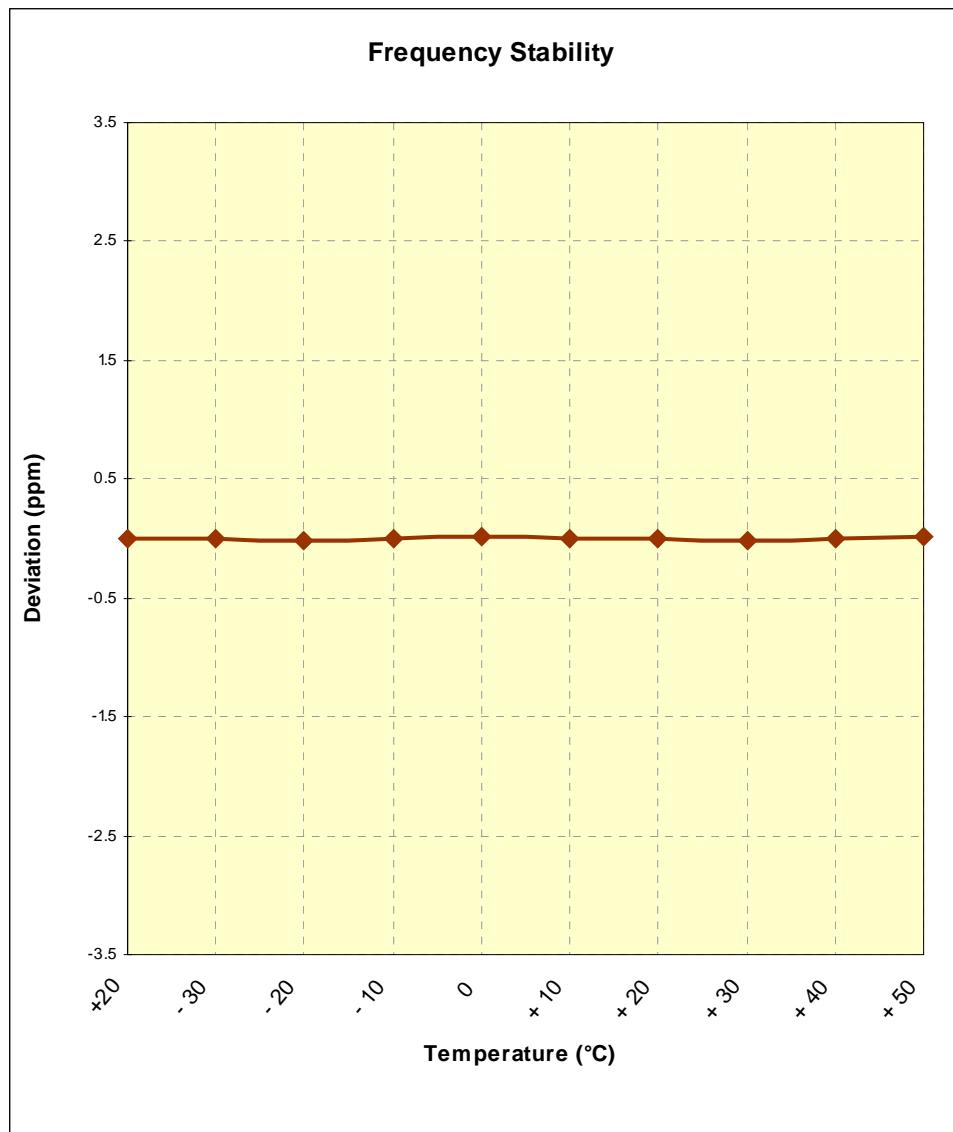


Figure 6-3. Frequency Stability Graph (Band 4)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 33 of 88

6.11 Band 2 Frequency Stability Measurements

§2.1055 §24.235 RSS-133(6.3)

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 18900

REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,981	-19	-0.0000010
100 %		- 30	1,880,000,023	23	0.0000012
100 %		- 20	1,879,999,980	-20	-0.0000011
100 %		- 10	1,880,000,005	5	0.0000003
100 %		0	1,880,000,001	1	0.0000001
100 %		+ 10	1,879,999,997	-3	-0.0000002
100 %		+ 20	1,880,000,023	23	0.0000012
100 %		+ 30	1,880,000,017	17	0.0000009
100 %		+ 40	1,880,000,014	14	0.0000007
100 %		+ 50	1,880,000,028	28	0.0000015
115 %		+ 20	1,879,999,995	-5	-0.0000003
BATT. ENDPOINT	3.25	+ 20	1,880,000,005	5	0.0000003

Table 6-21. Frequency Stability Data (Band 2)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 34 of 88	

Band 2 Frequency Stability Measurements (Cont'd)

§2.1055 §24.235 RSS-133(6.3)


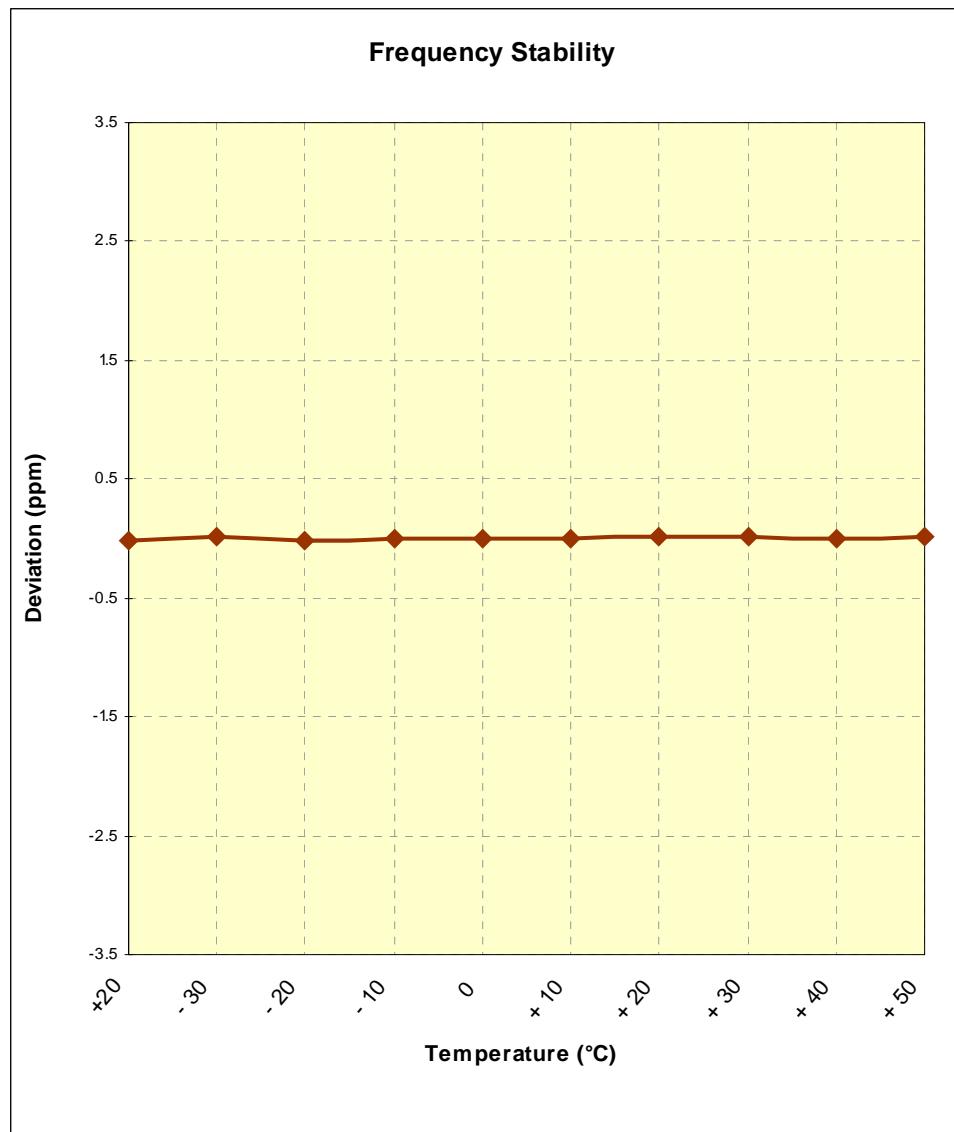


Figure 6-4. Frequency Stability Graph (Band 2)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 35 of 88


7.0 BAND 17 PLOTS OF EMISSIONS

Note: All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.

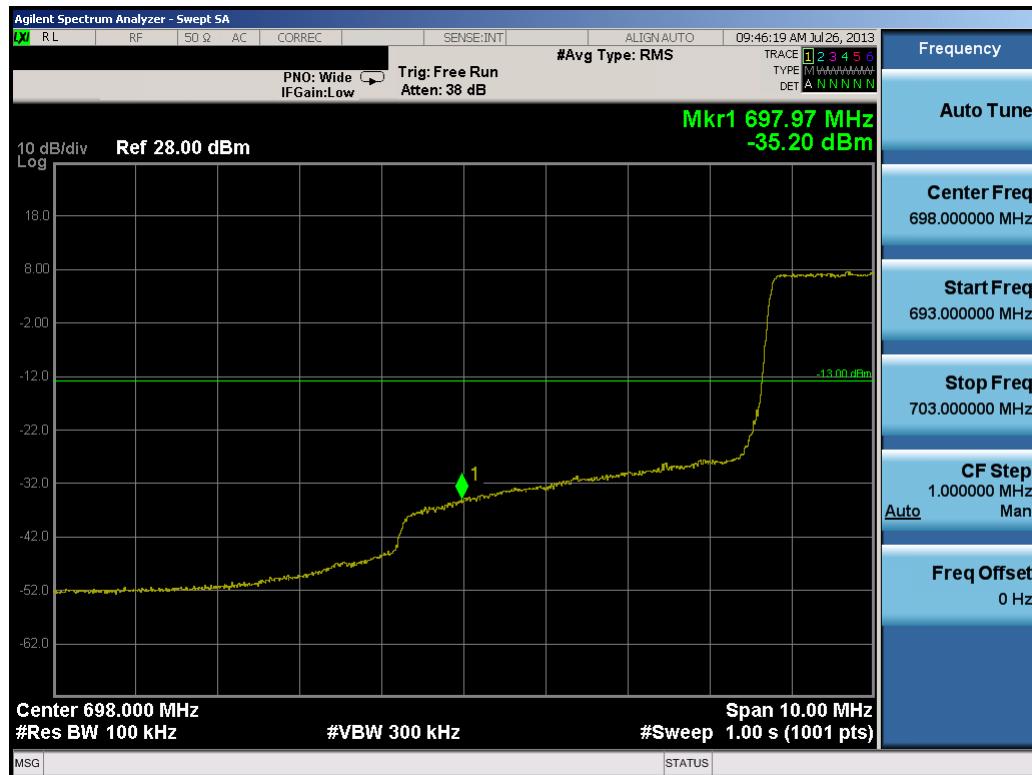


Plot 7-1. Lower Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFD800	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			

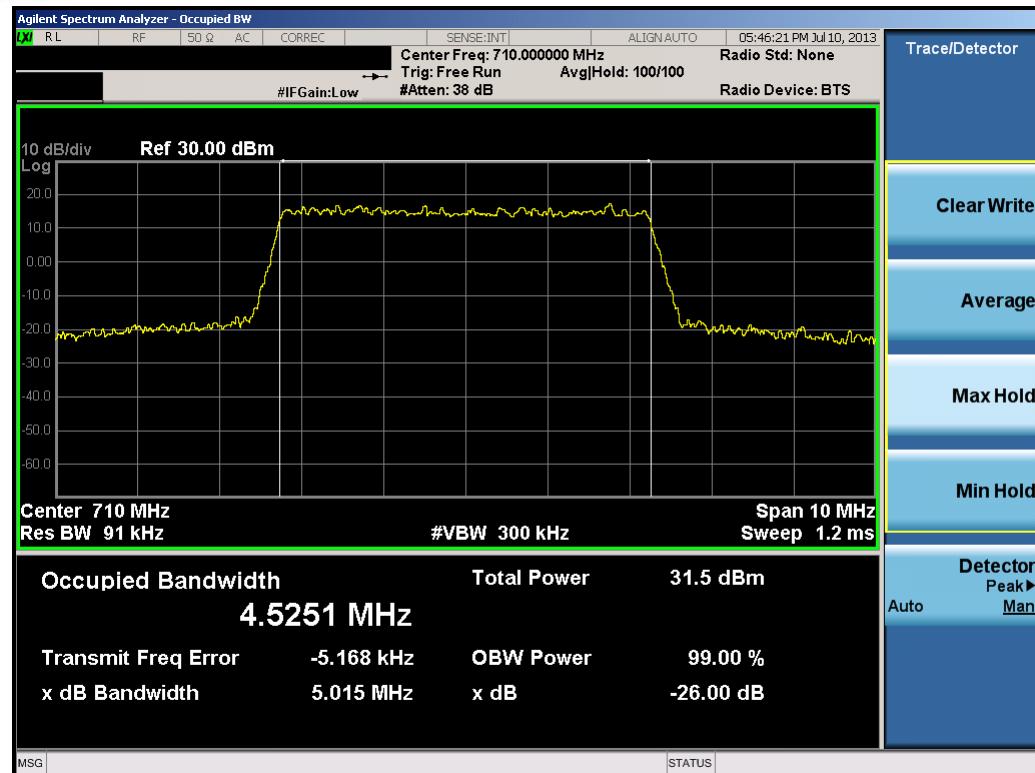


Plot 7-2. Occupied Bandwidth Plot (5.0MHz QPSK – RB Size 25)

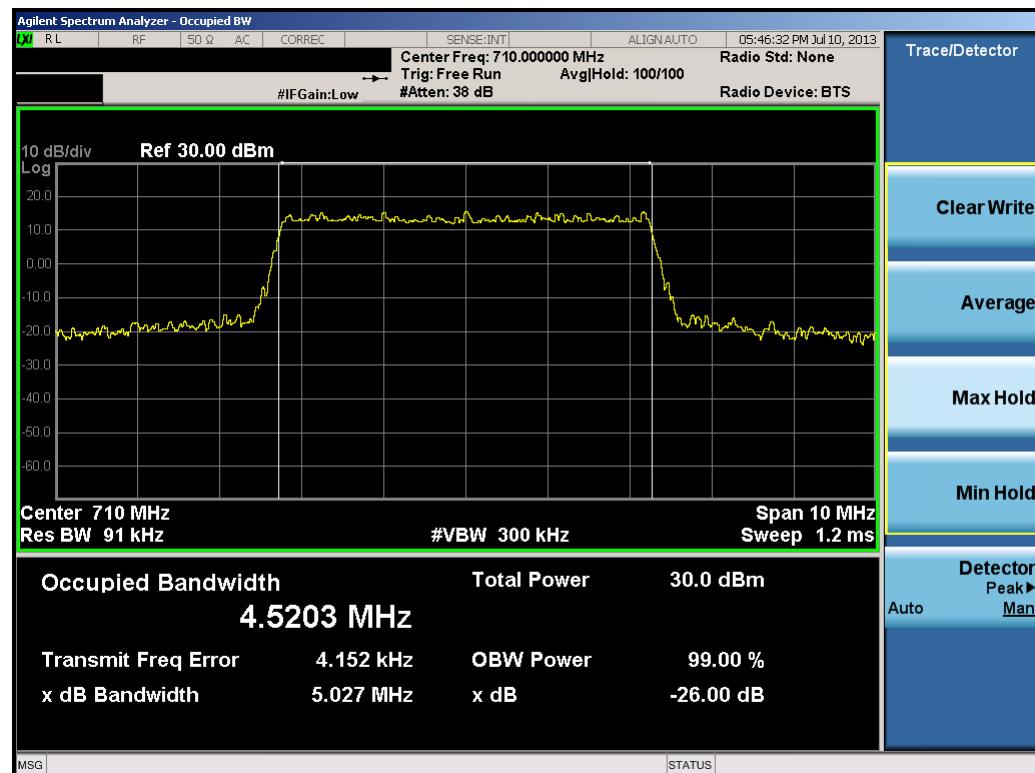


Plot 7-3. Occupied Bandwidth Plot (5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFD800	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)				Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			

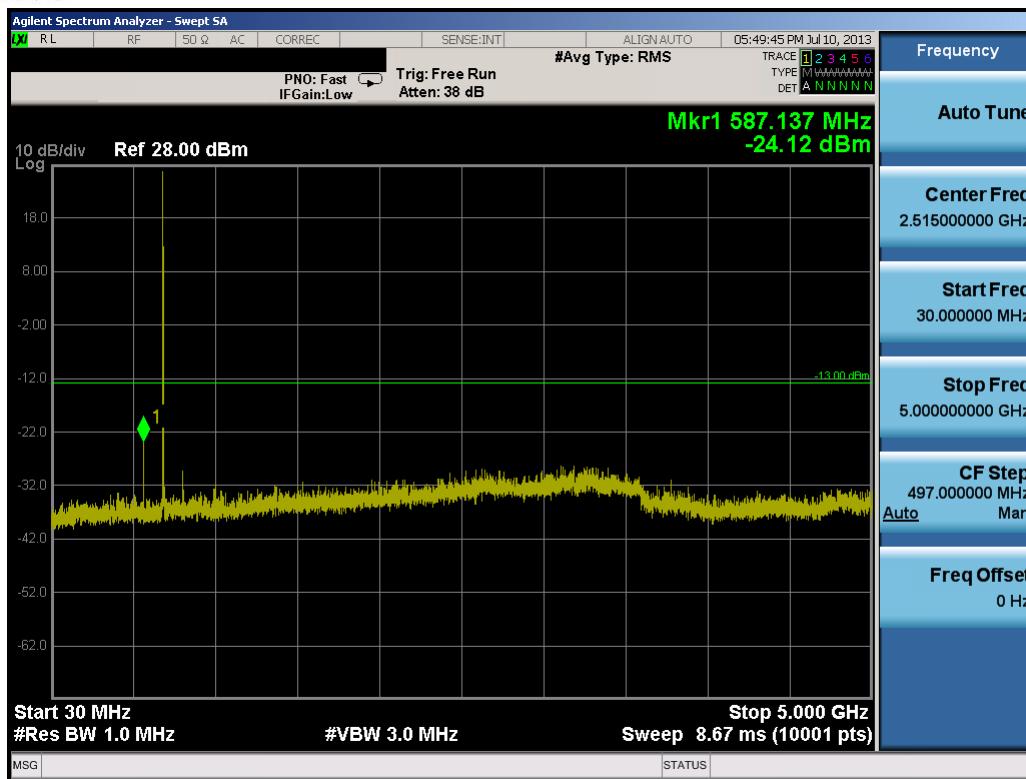


Plot 7-4. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

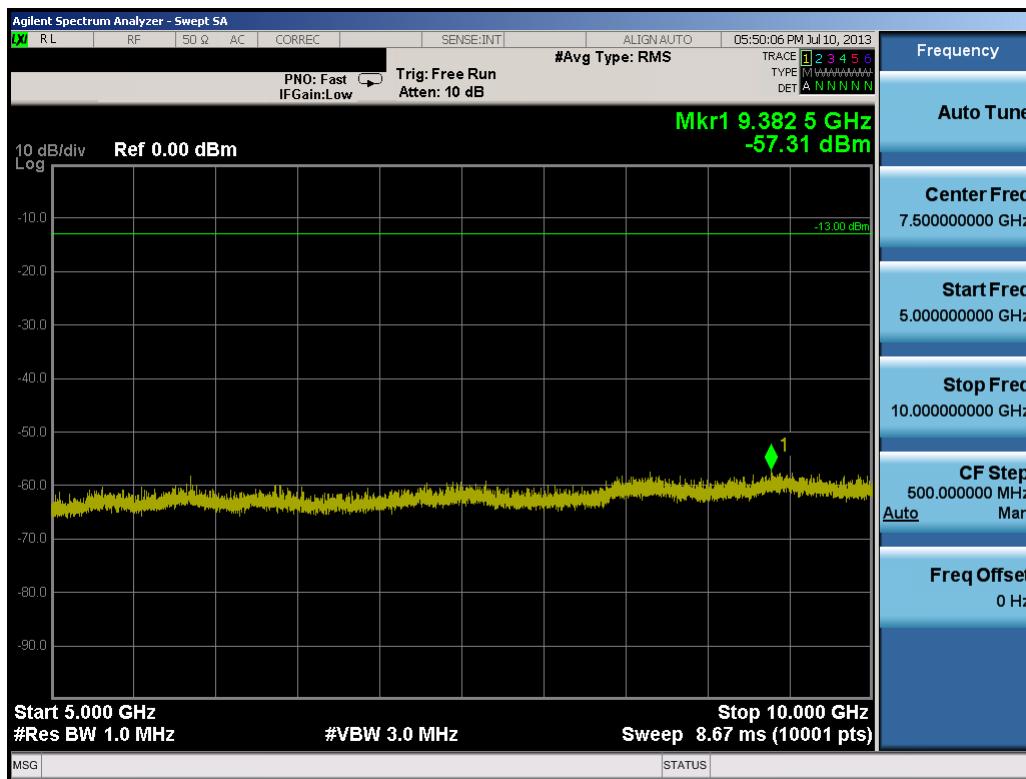


Plot 7-5. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 38 of 88

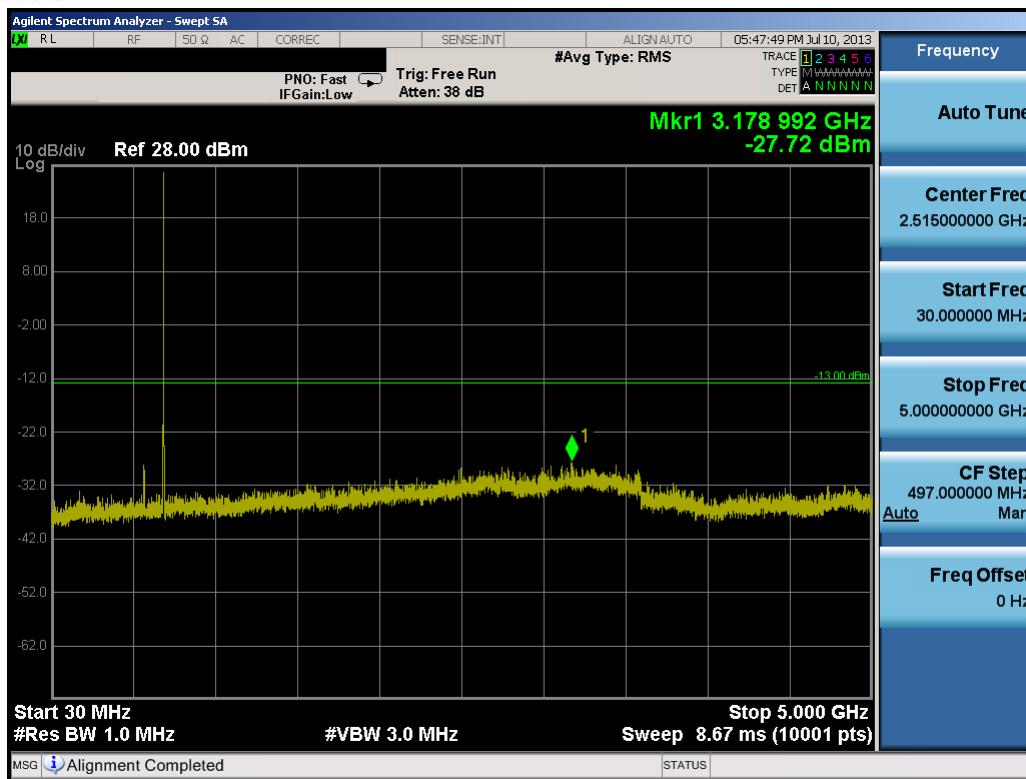


Plot 7-6. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

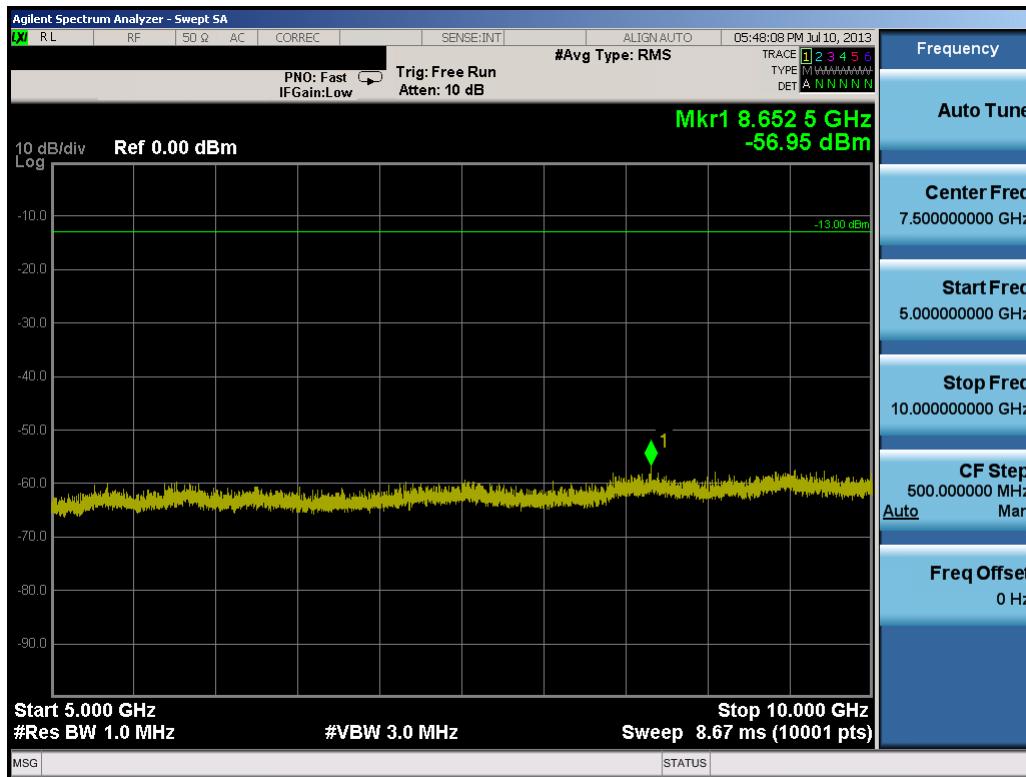


Plot 7-7. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 39 of 88

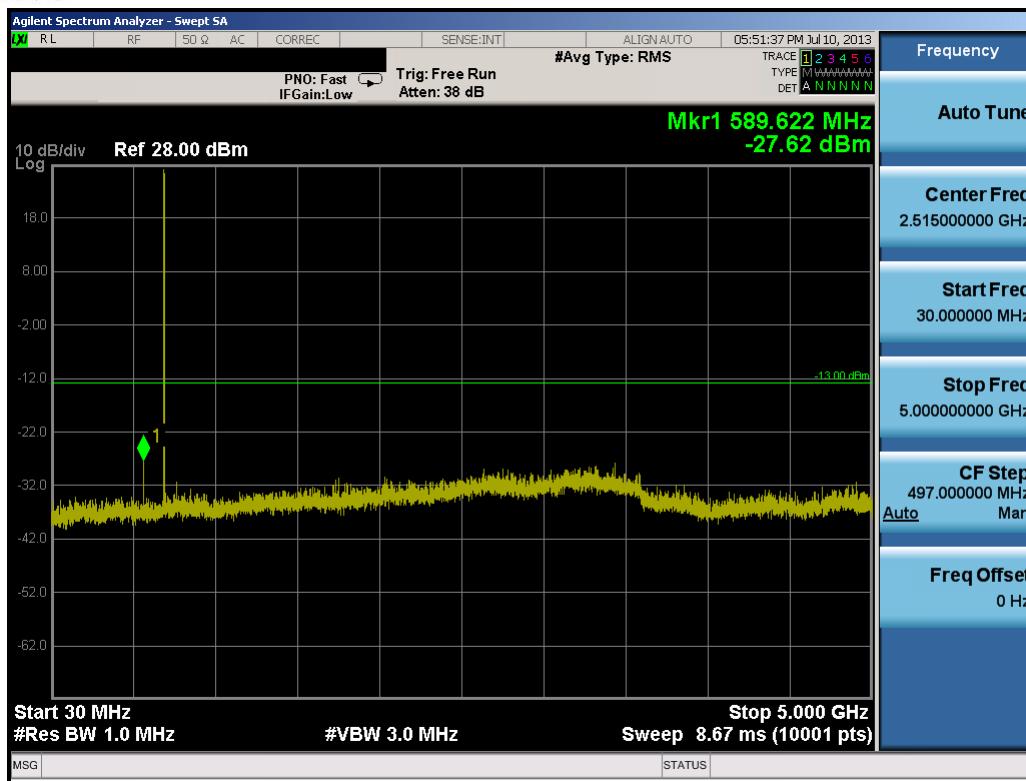


Plot 7-8. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

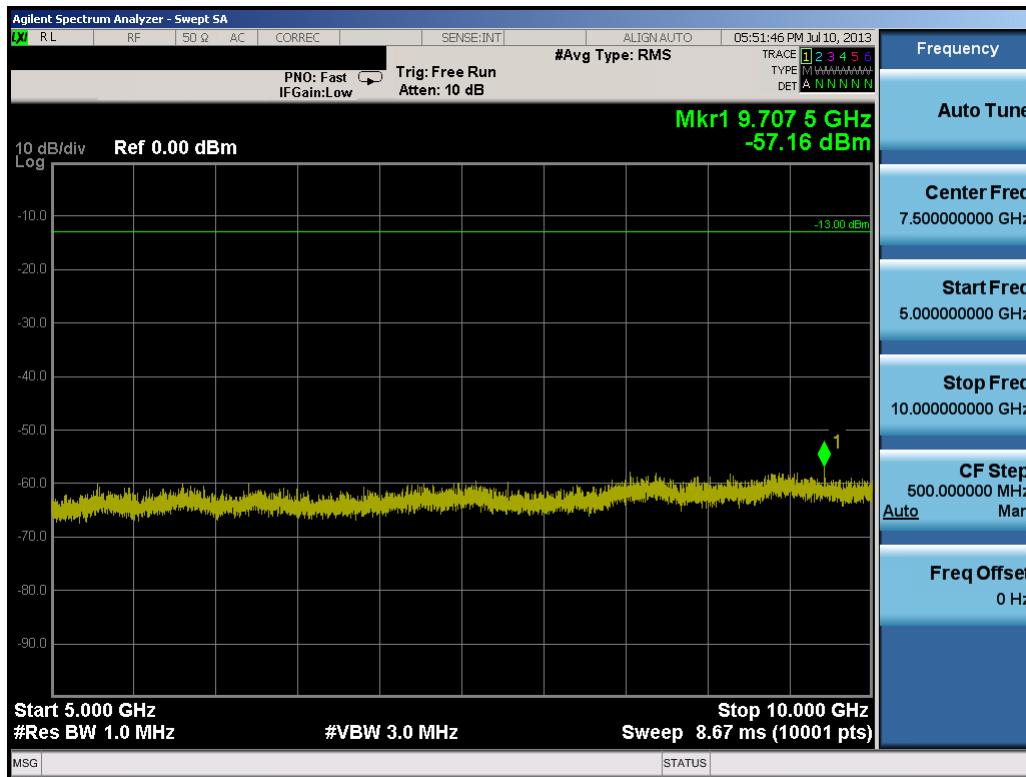


Plot 7-9. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 40 of 88

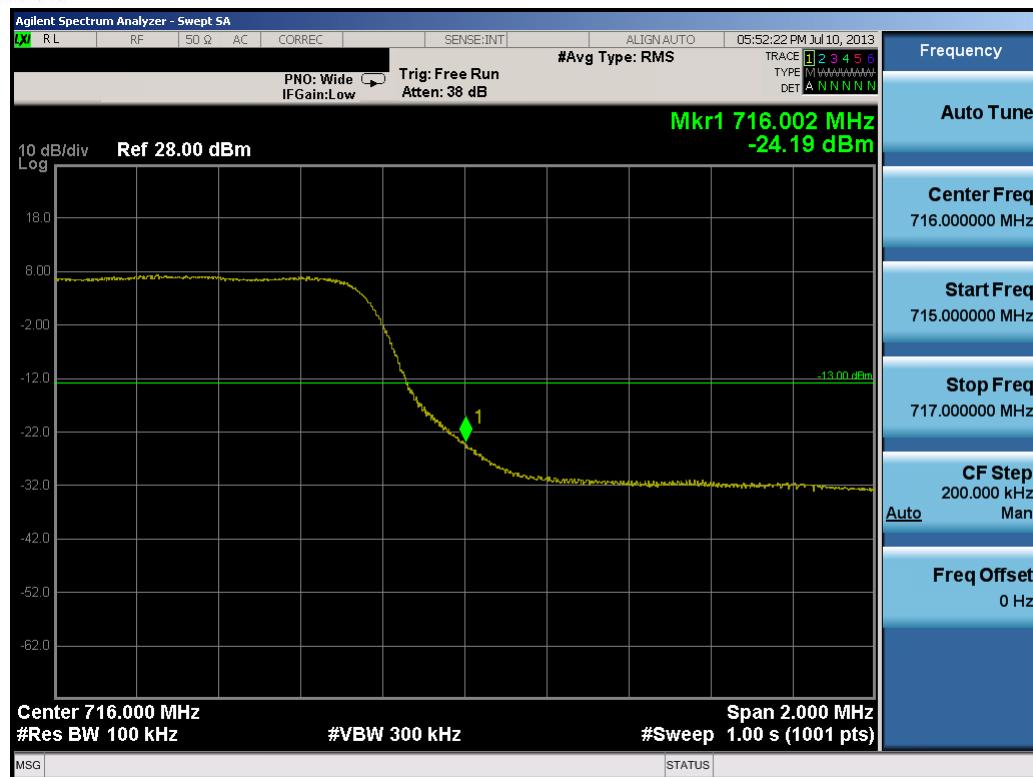


Plot 7-10. Upper Band Edge Plot (5.0MHz QPSK – RB Size 25)

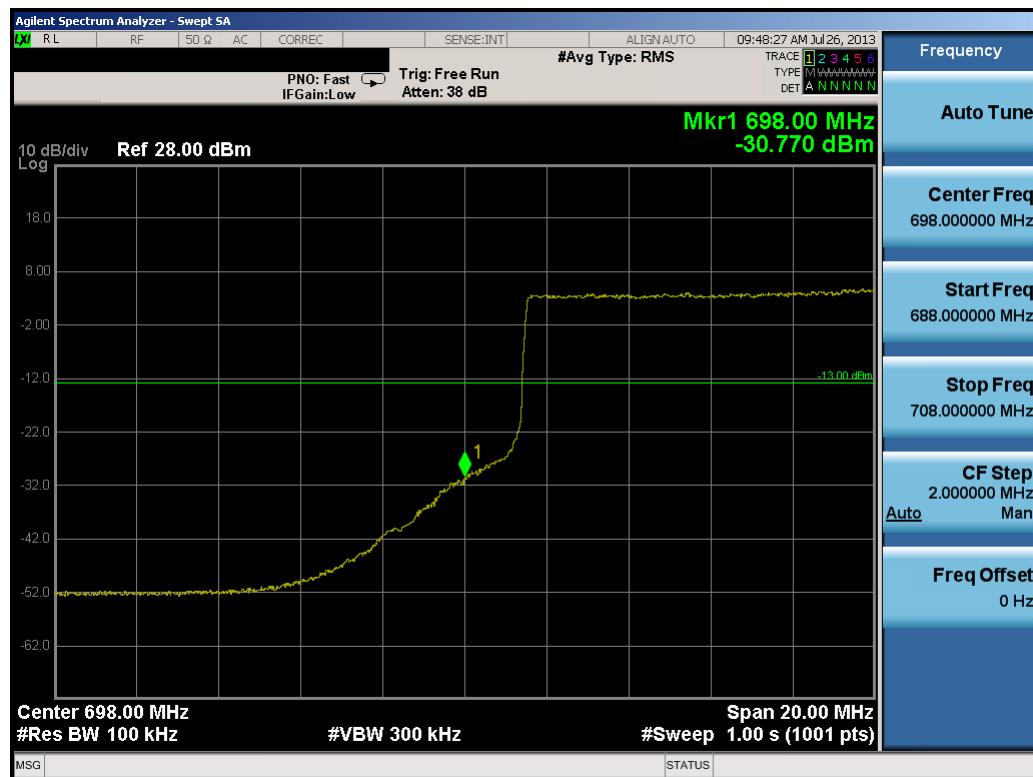

Plot 7-11. Lower Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 41 of 88

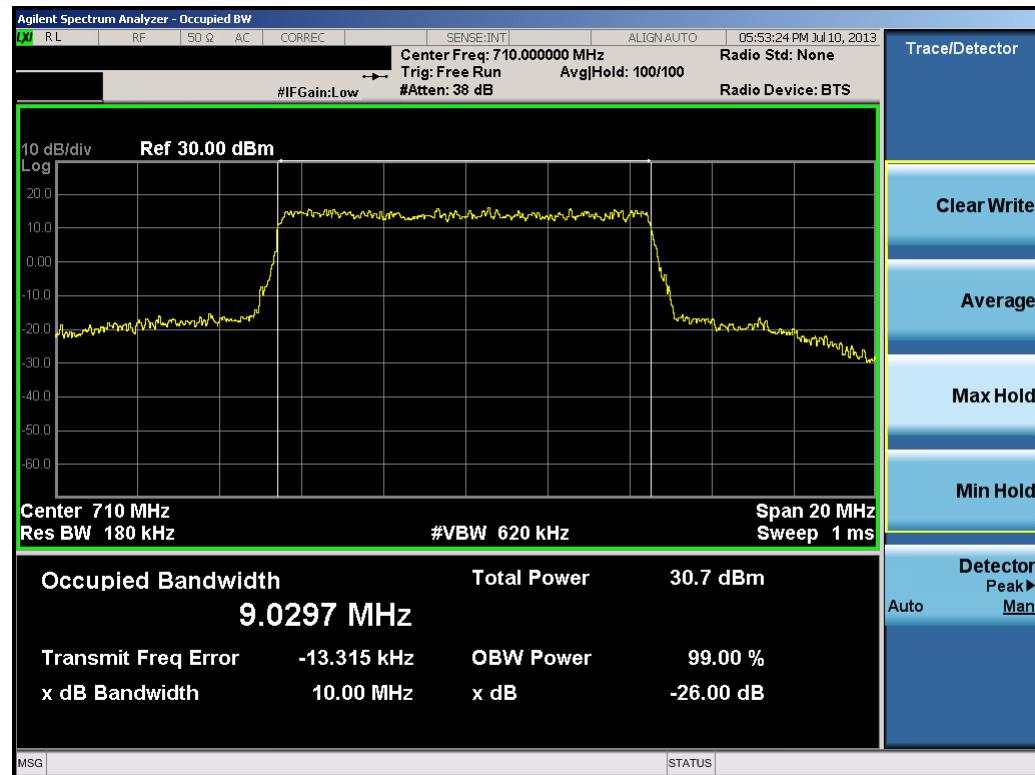


Plot 7-12. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)




Plot 7-13. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 42 of 88

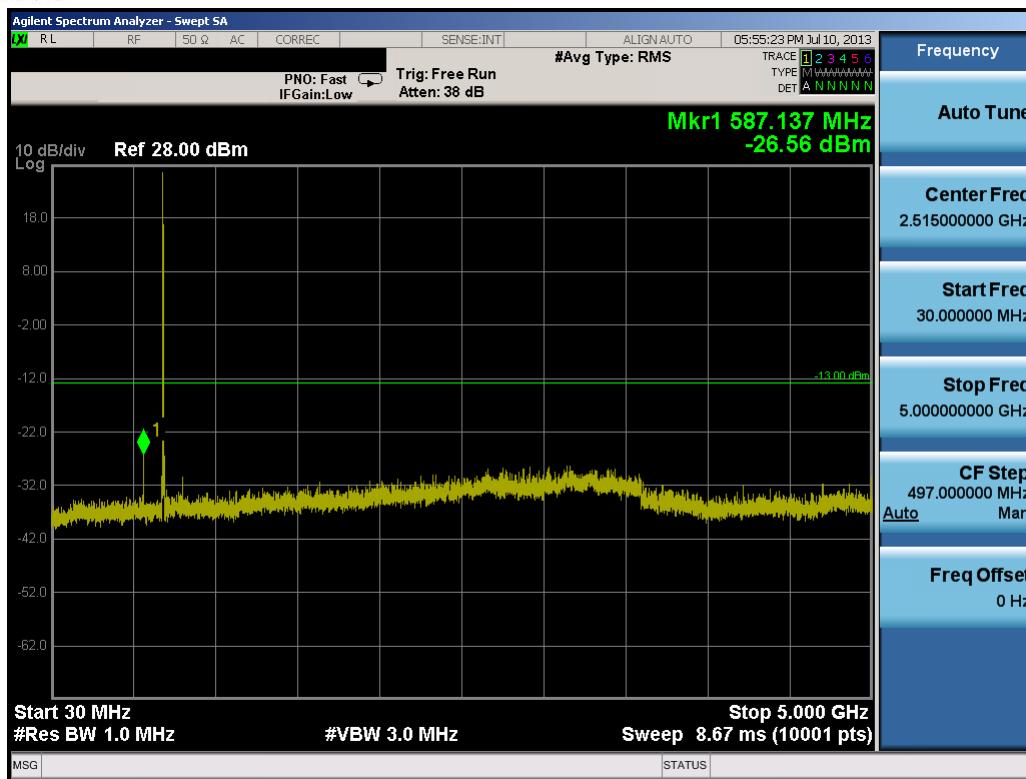


Plot 7-14. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

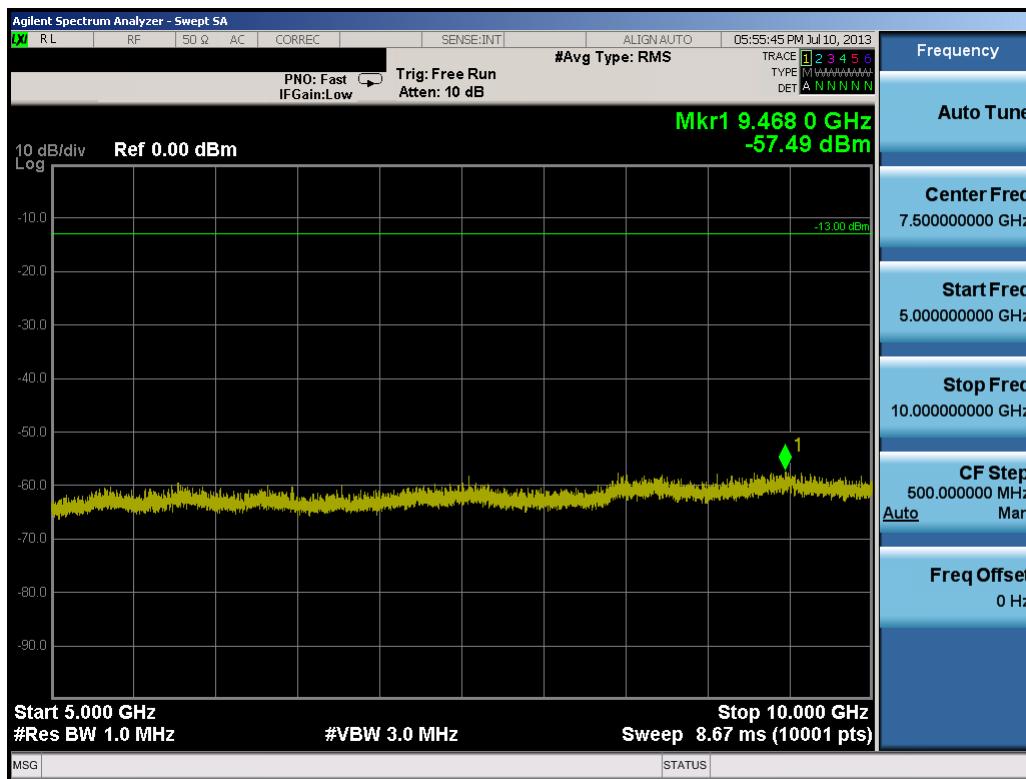


Plot 7-15. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 43 of 88

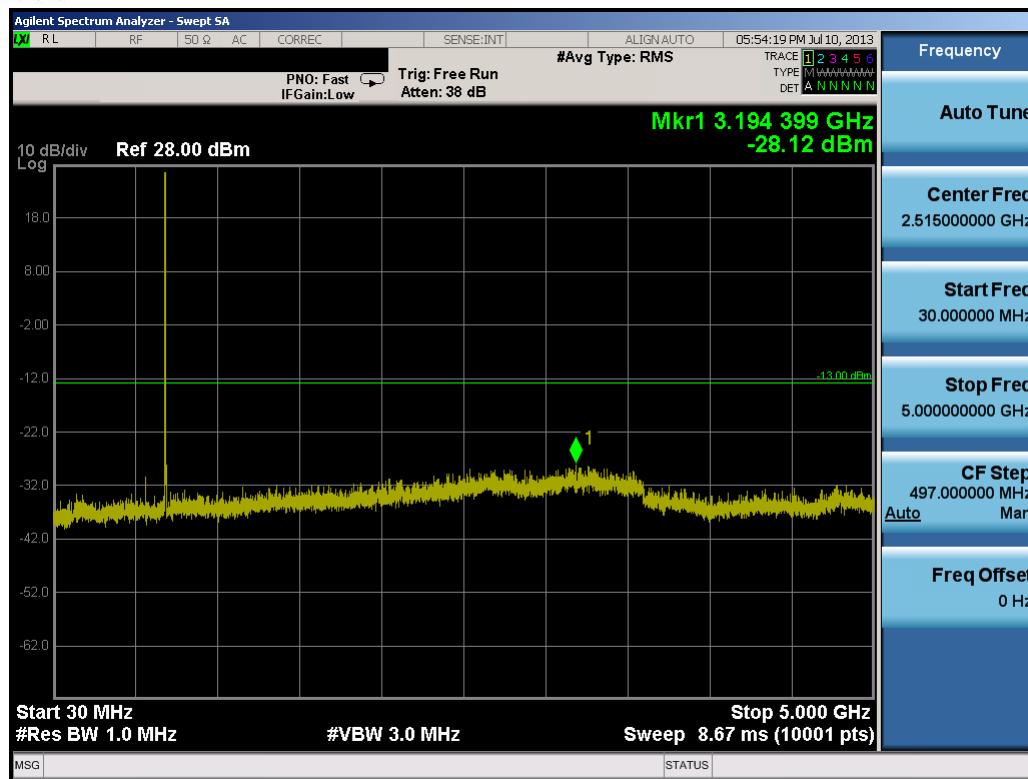


Plot 7-16. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

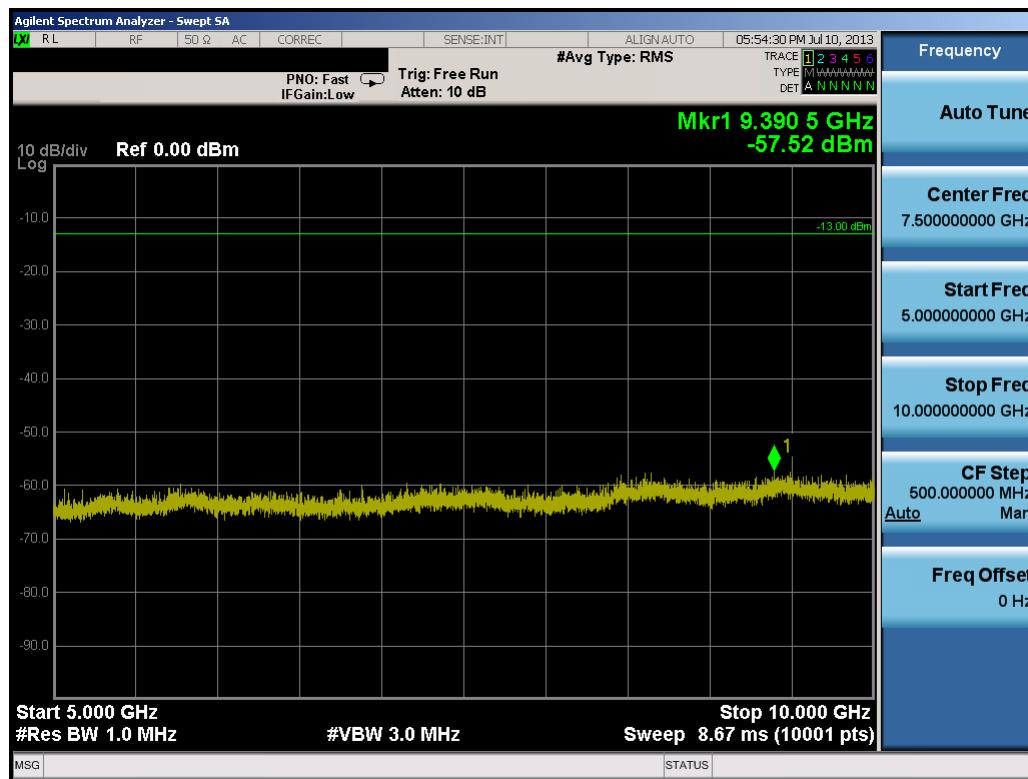


Plot 7-17. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 44 of 88

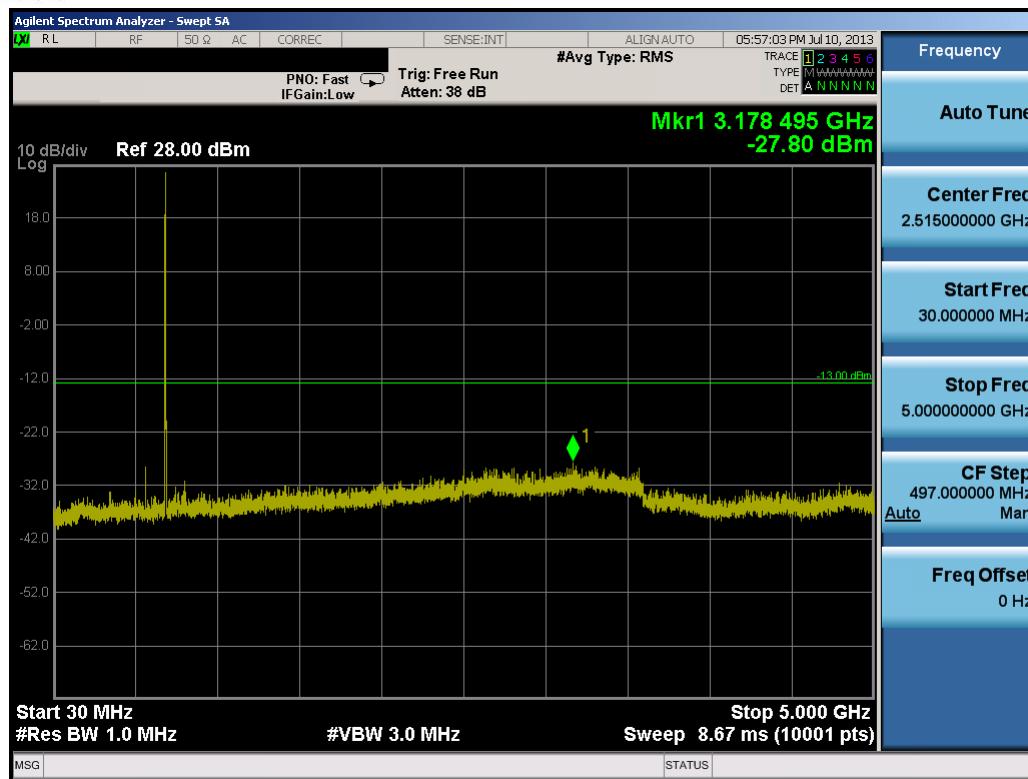


Plot 7-18. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

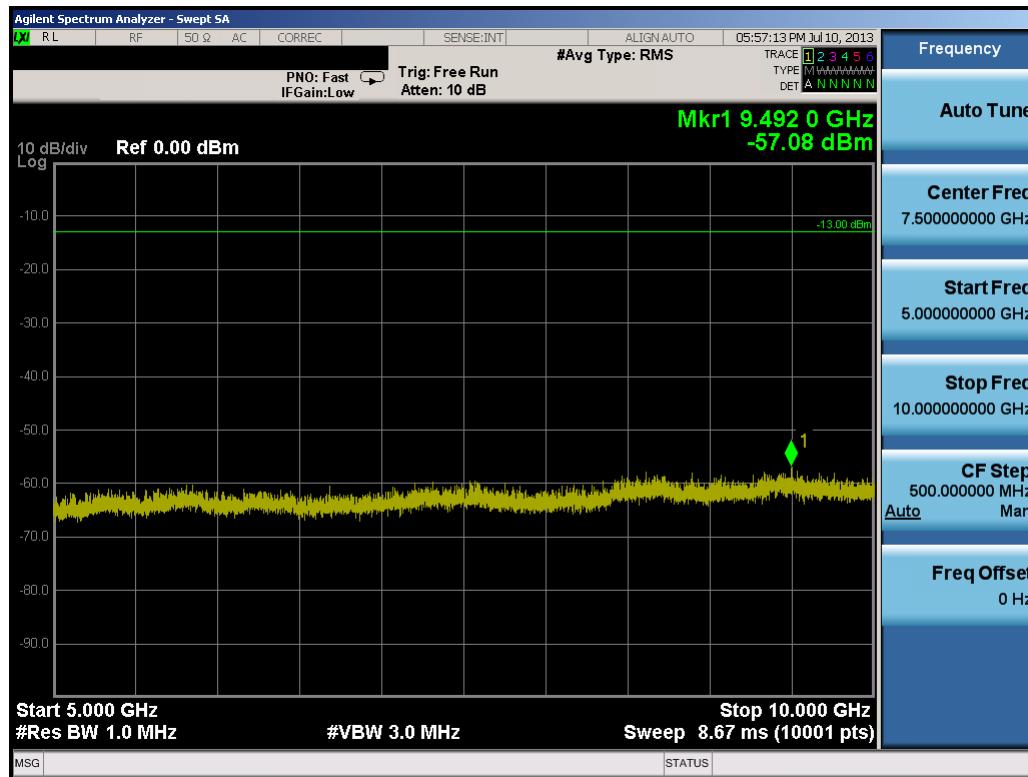

Plot 7-19. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 45 of 88

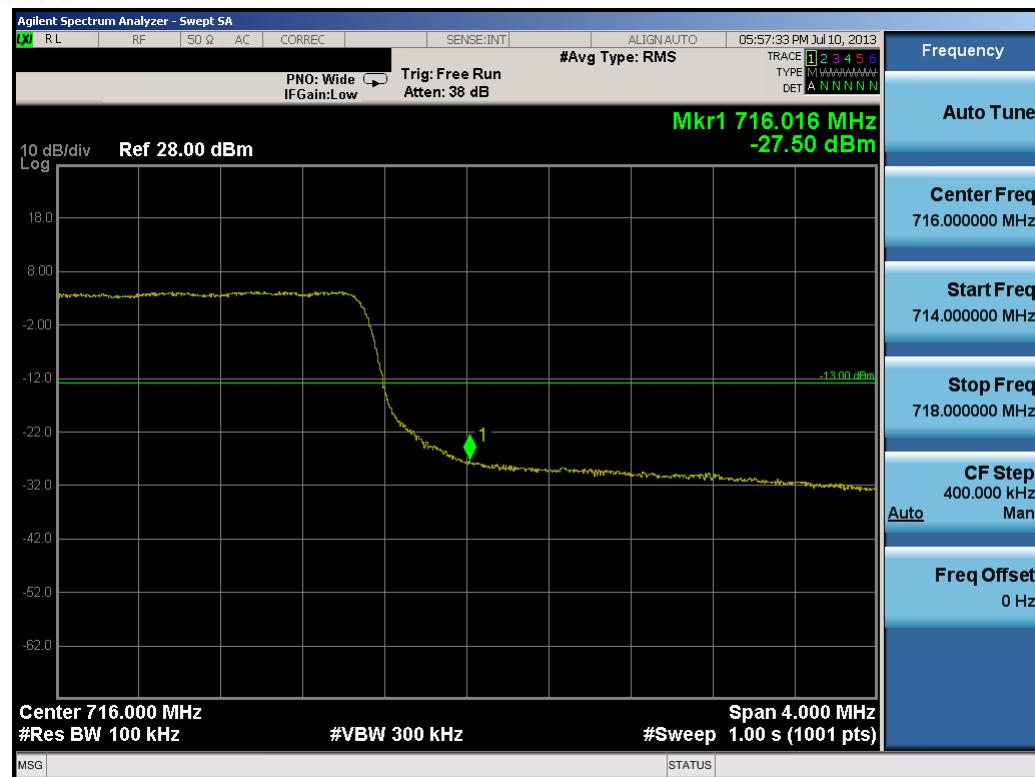


Plot 7-20. Upper Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 46 of 88


8.0 BAND 5 PLOTS OF EMISSIONS

Note: All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.

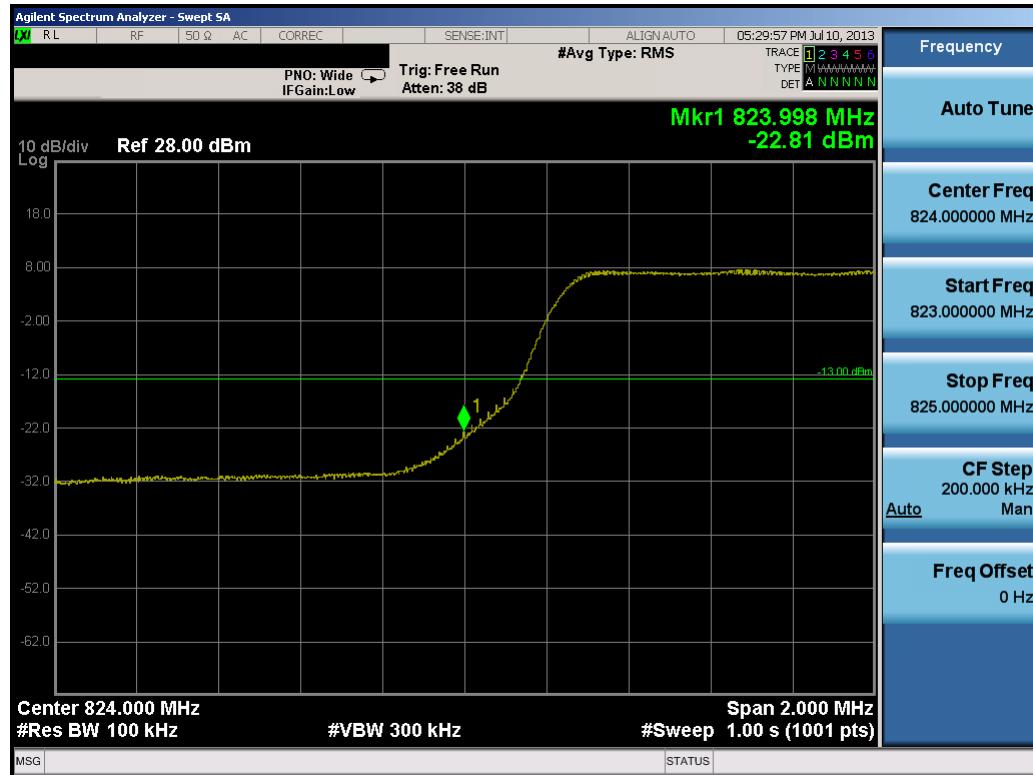


Plot 8-1. Lower Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFD800	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: 
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset	Quality Manager	

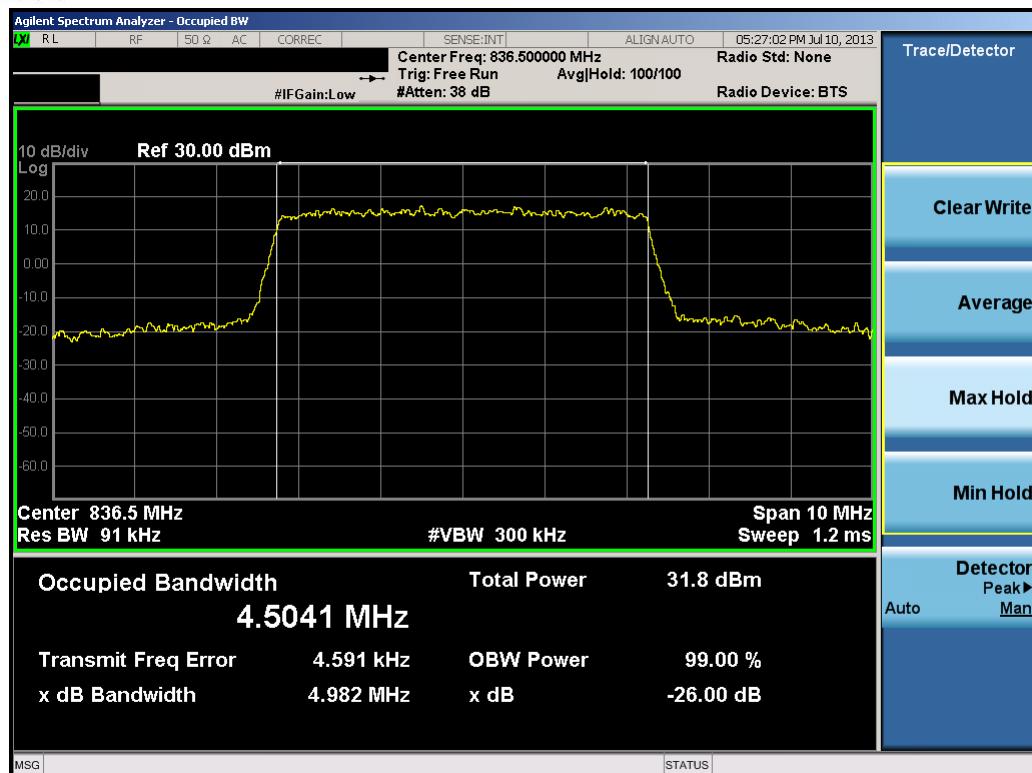


Plot 8-2. Occupied Bandwidth Plot (5.0MHz QPSK – RB Size 25)

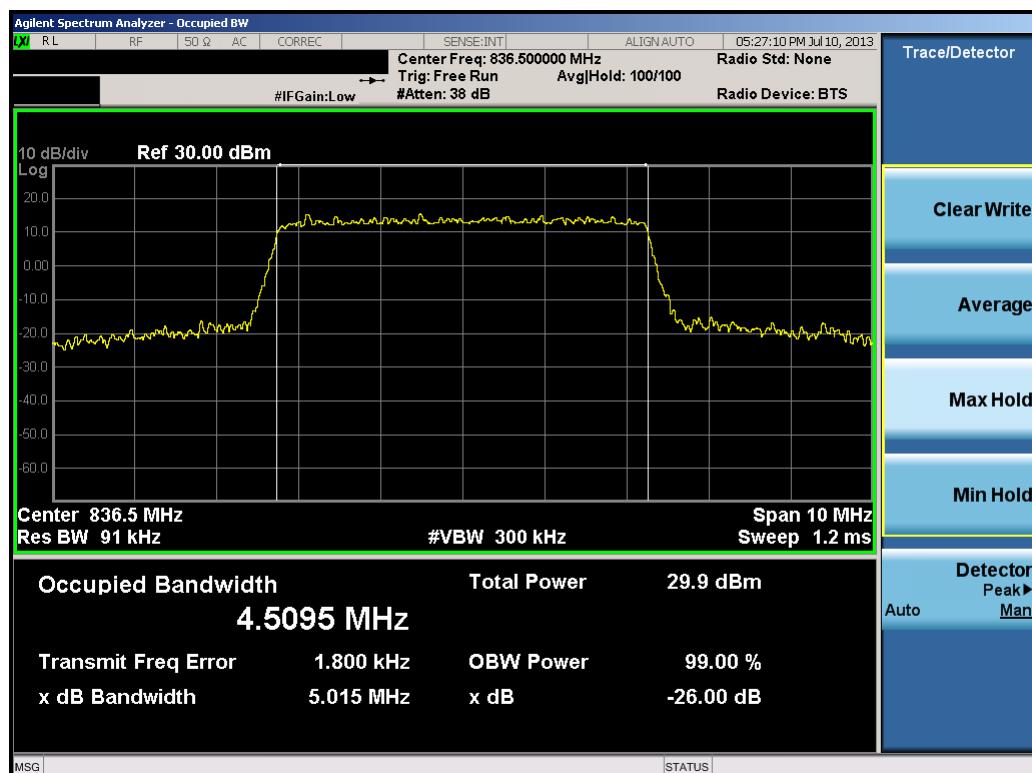


Plot 8-3. Occupied Bandwidth Plot (5.0MHz 16-QAM – RB Size 25)

FCC ID: ZNFD800	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset	Page 48 of 88	

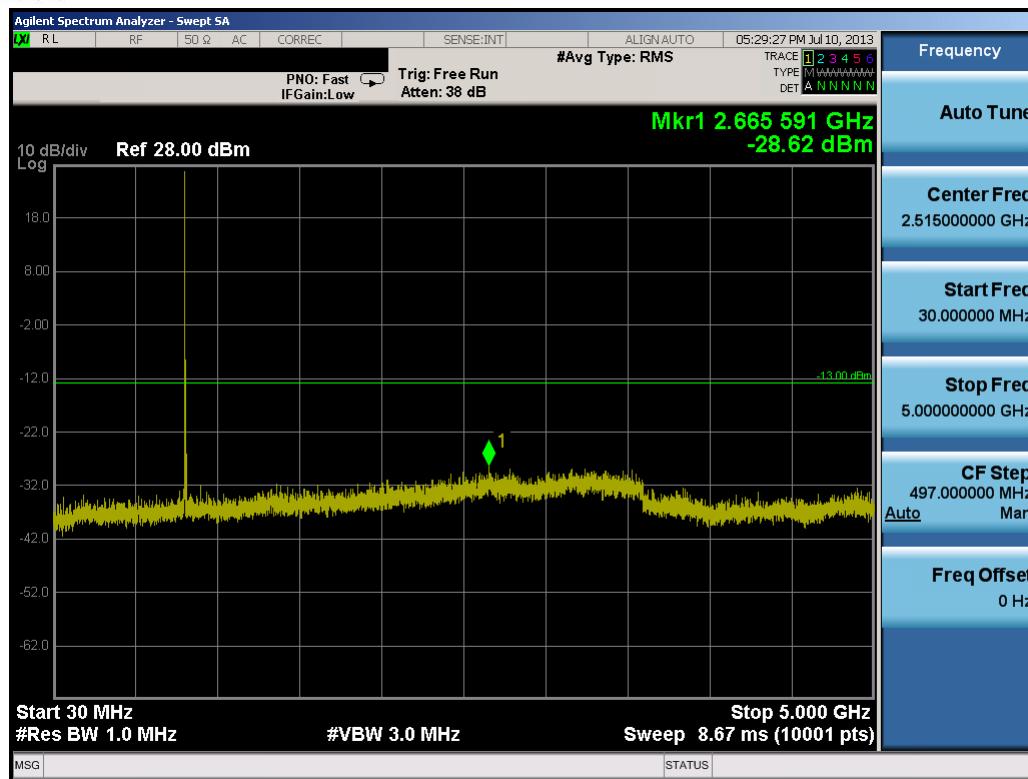


Plot 8-4. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

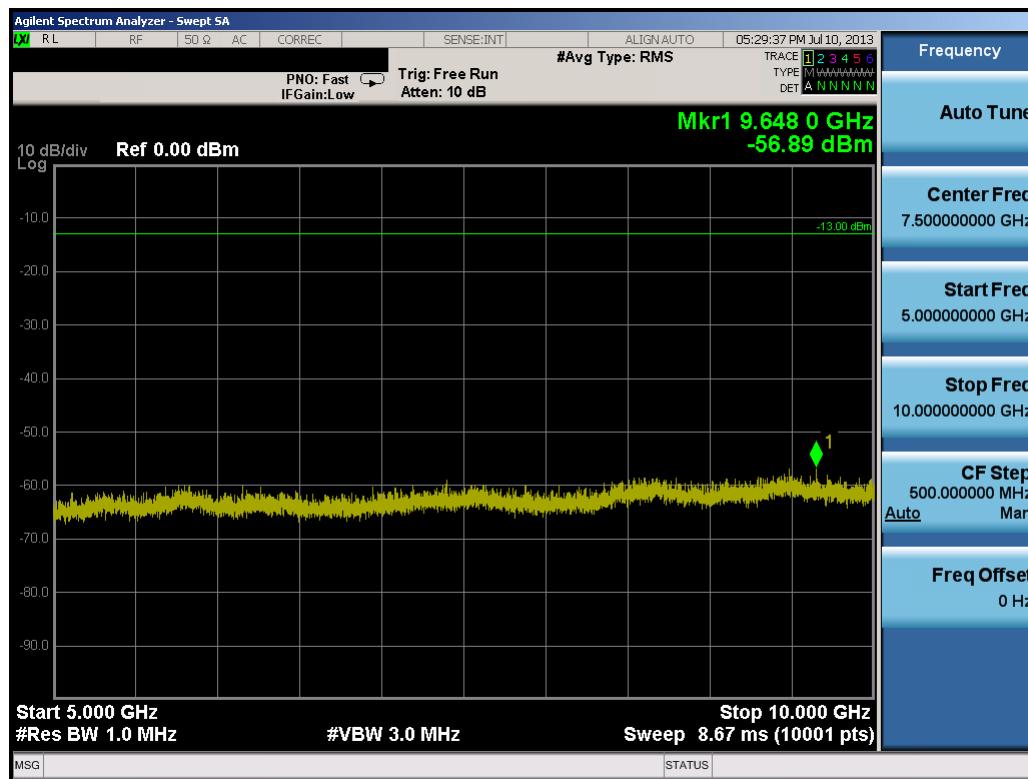


Plot 8-5. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 49 of 88

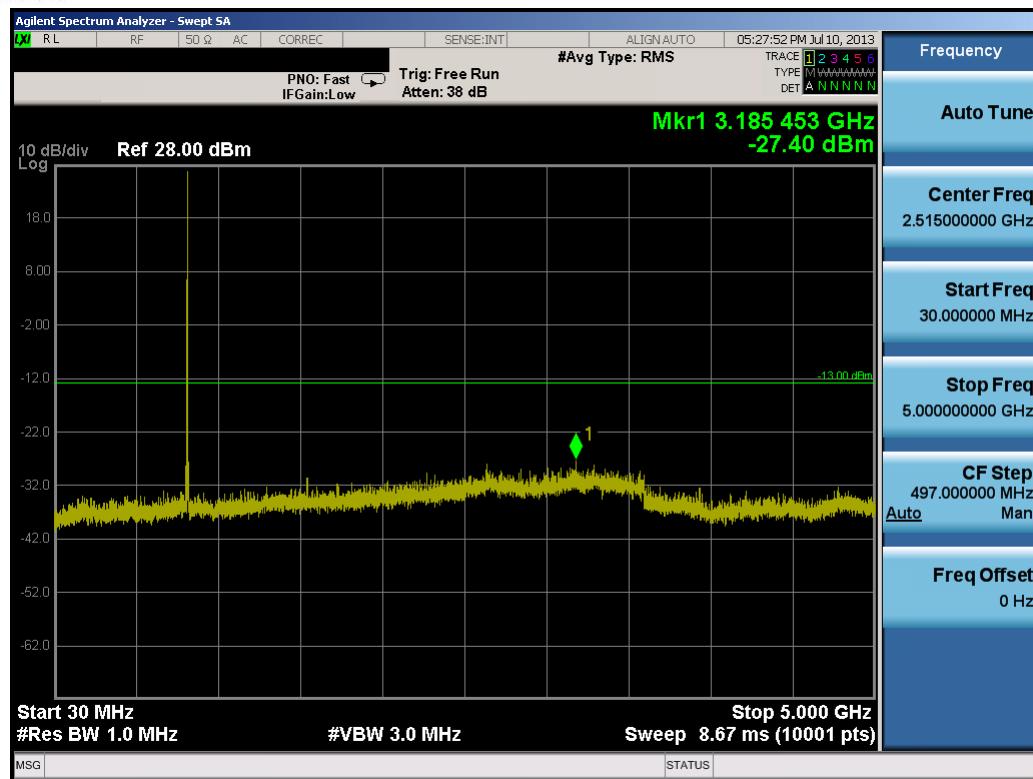


Plot 8-6. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

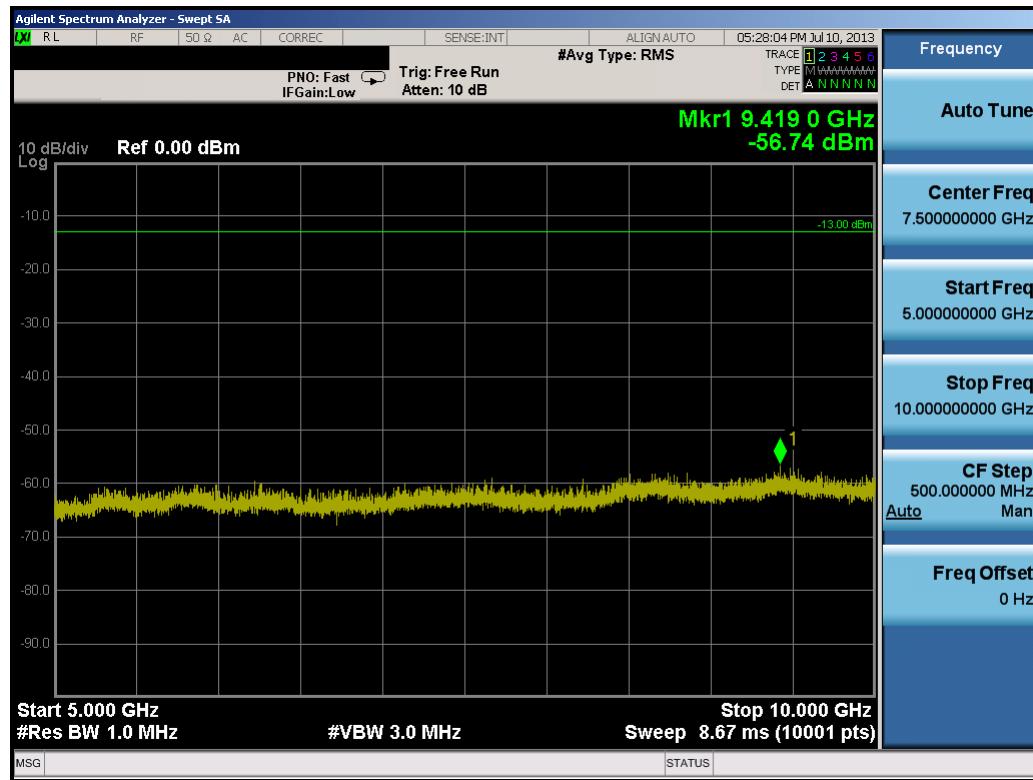


Plot 8-7. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 50 of 88

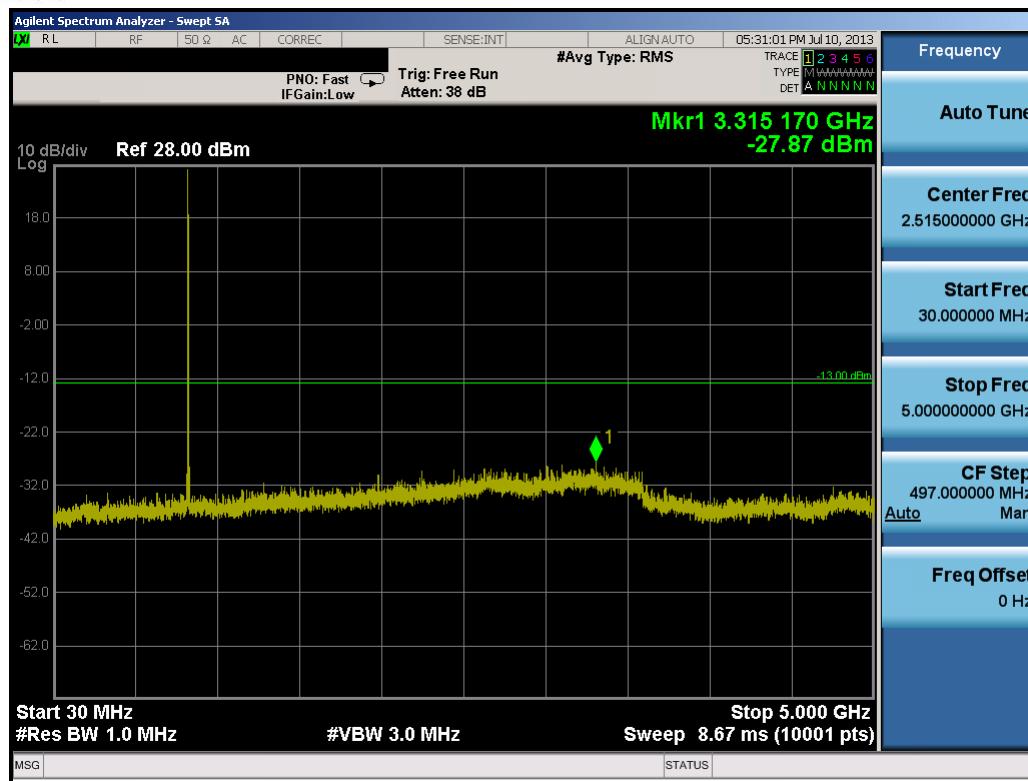

Plot 8-8. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

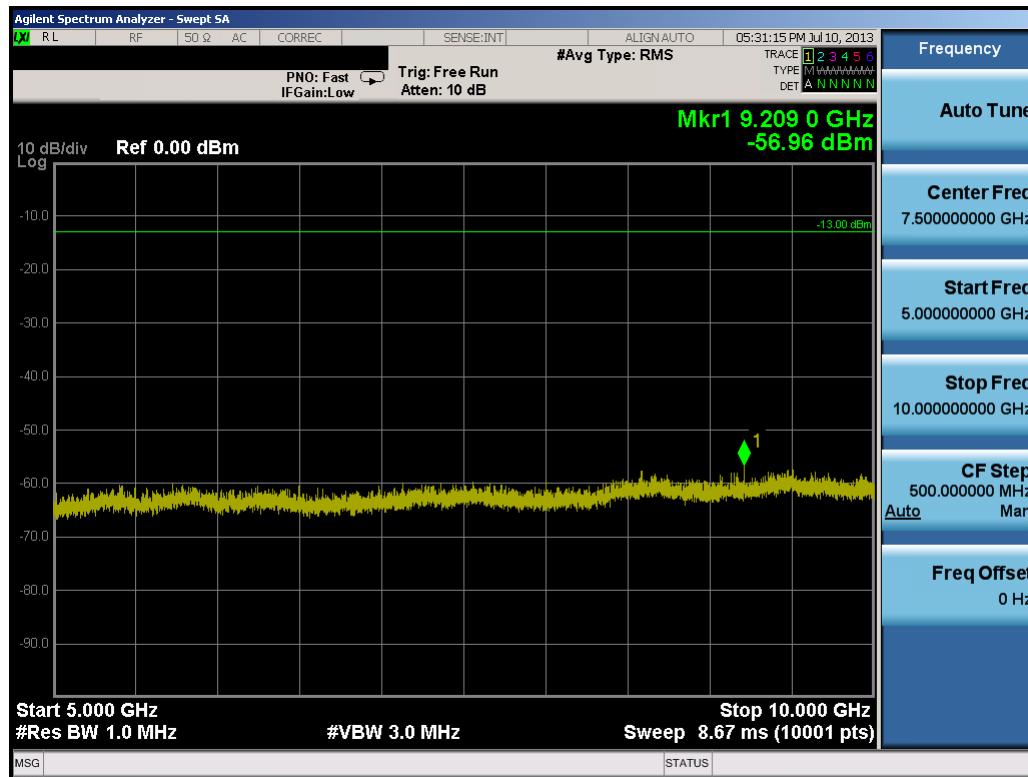


Plot 8-9. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 51 of 88




Plot 8-10. Upper Band Edge Plot (5.0MHz QPSK – RB Size 25)

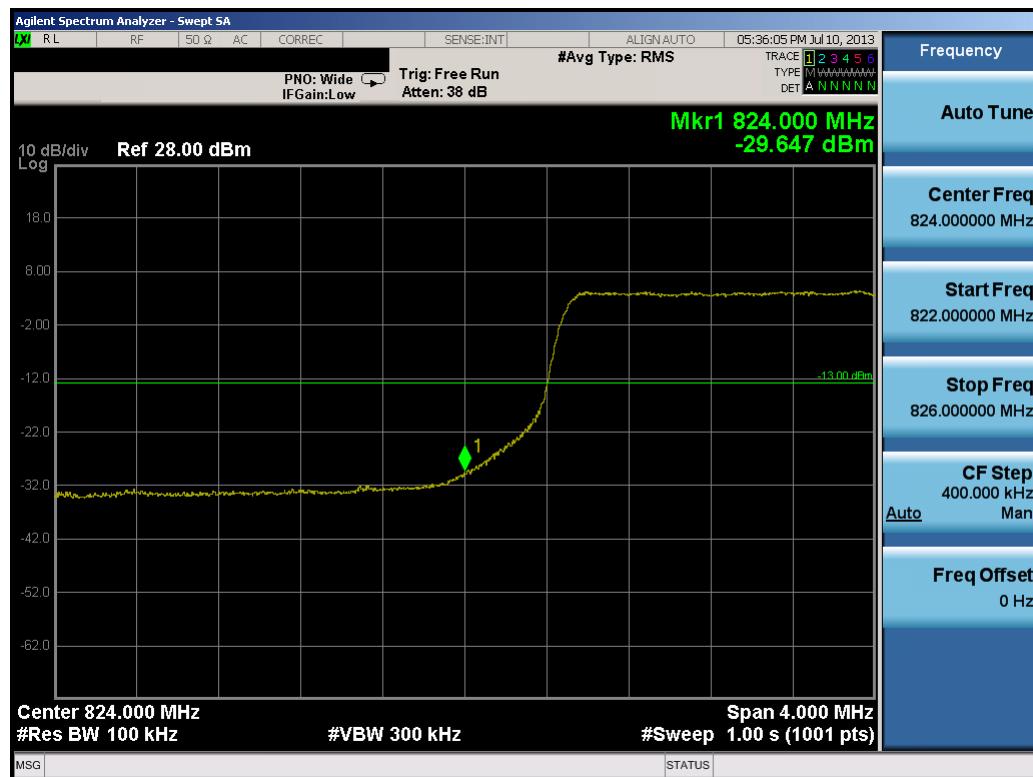


Plot 8-11. Lower Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 52 of 88

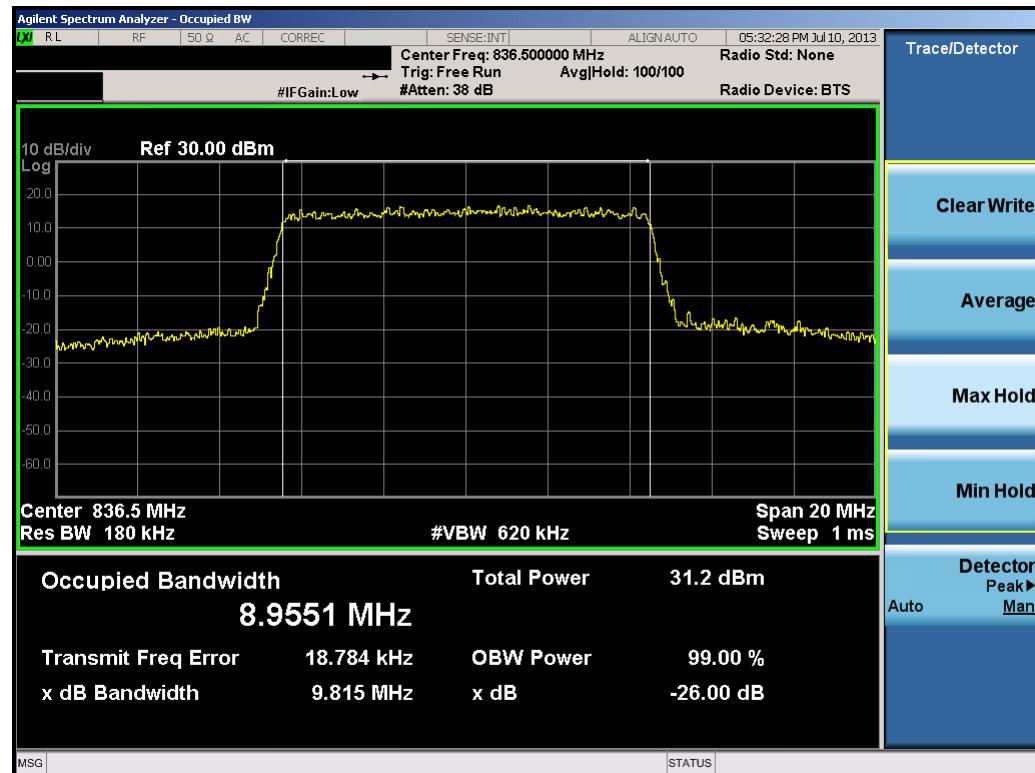


Plot 8-12. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)

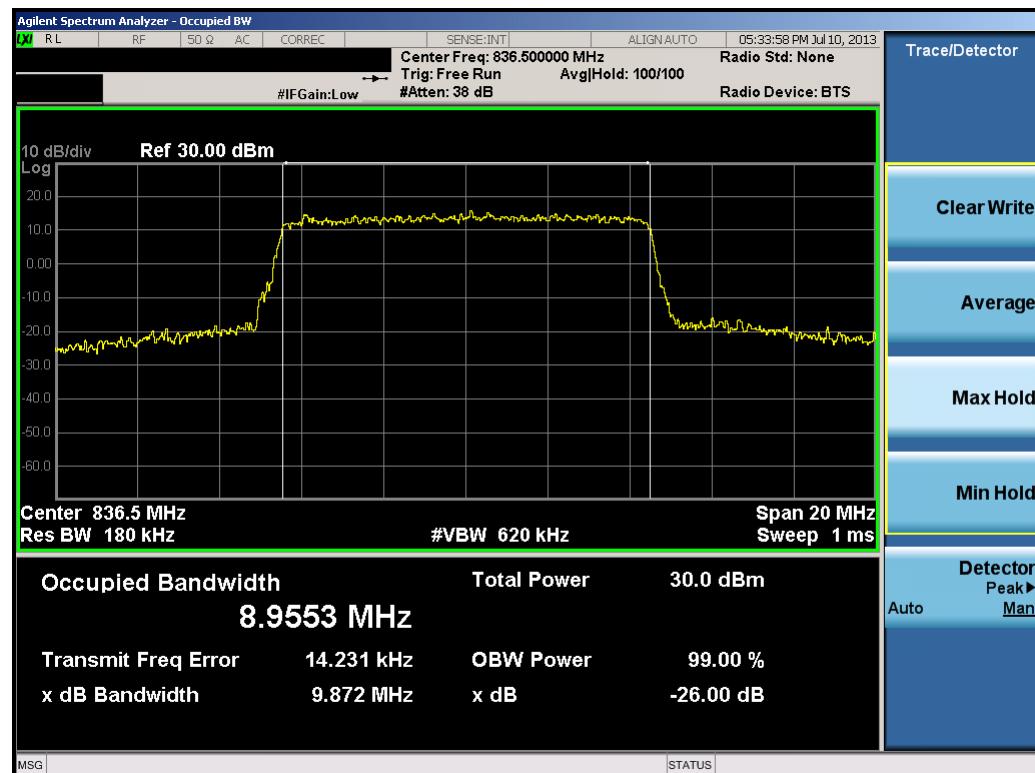


Plot 8-13. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 53 of 88

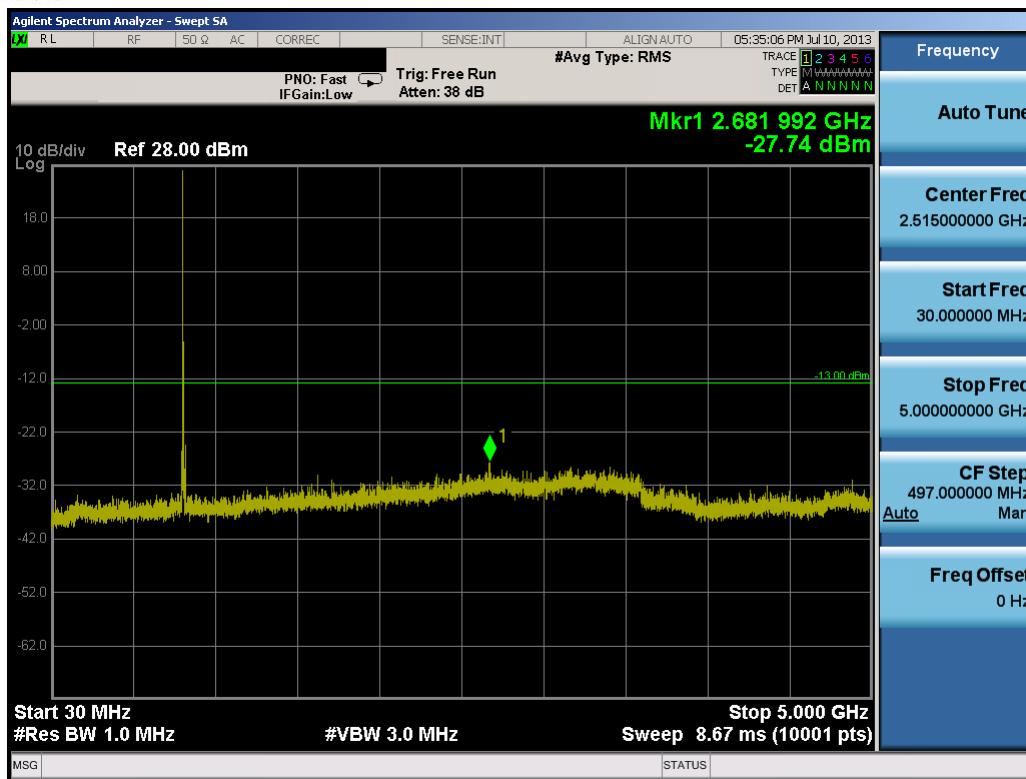


Plot 8-14. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

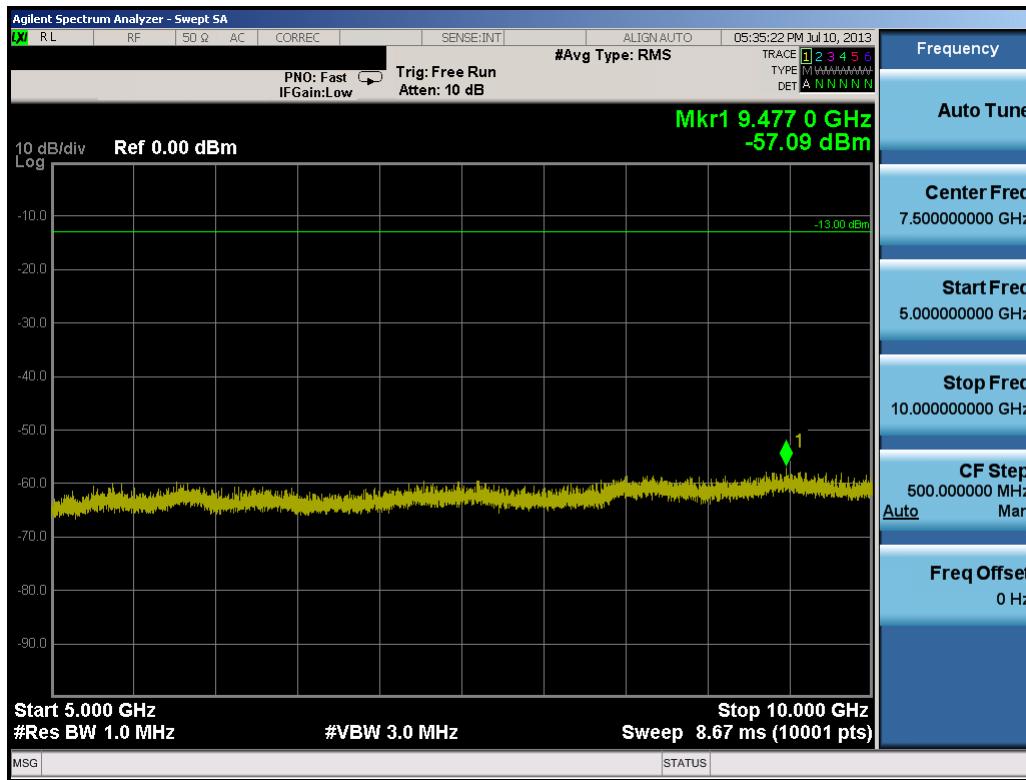


Plot 8-15. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 54 of 88

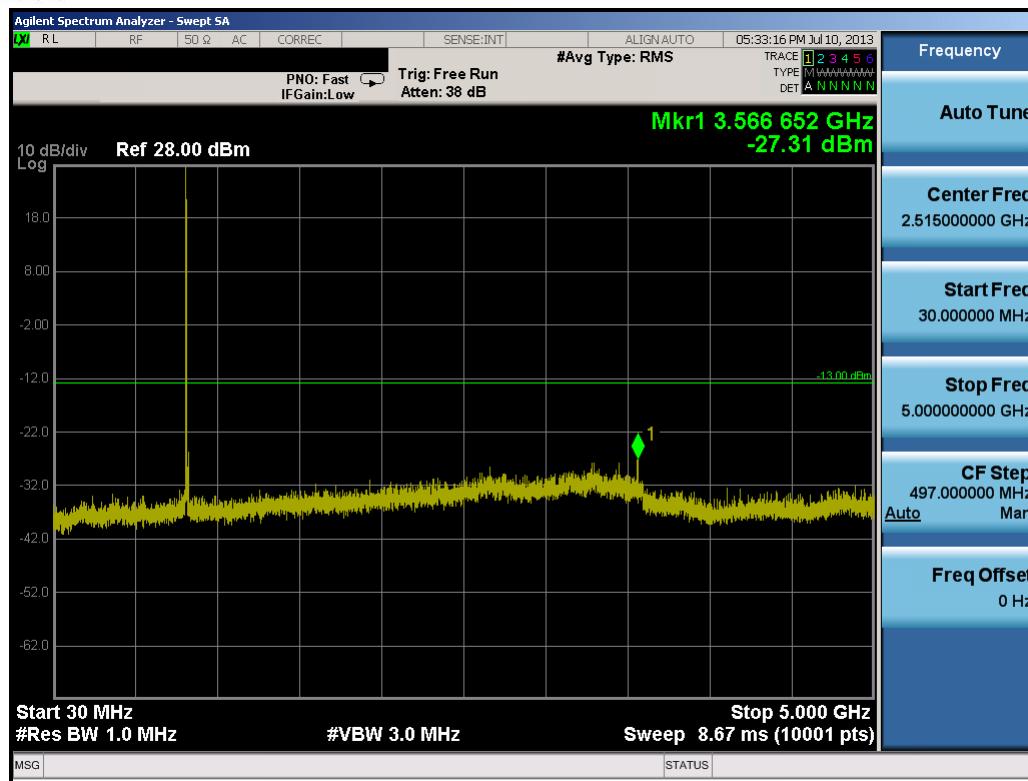


Plot 8-16. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

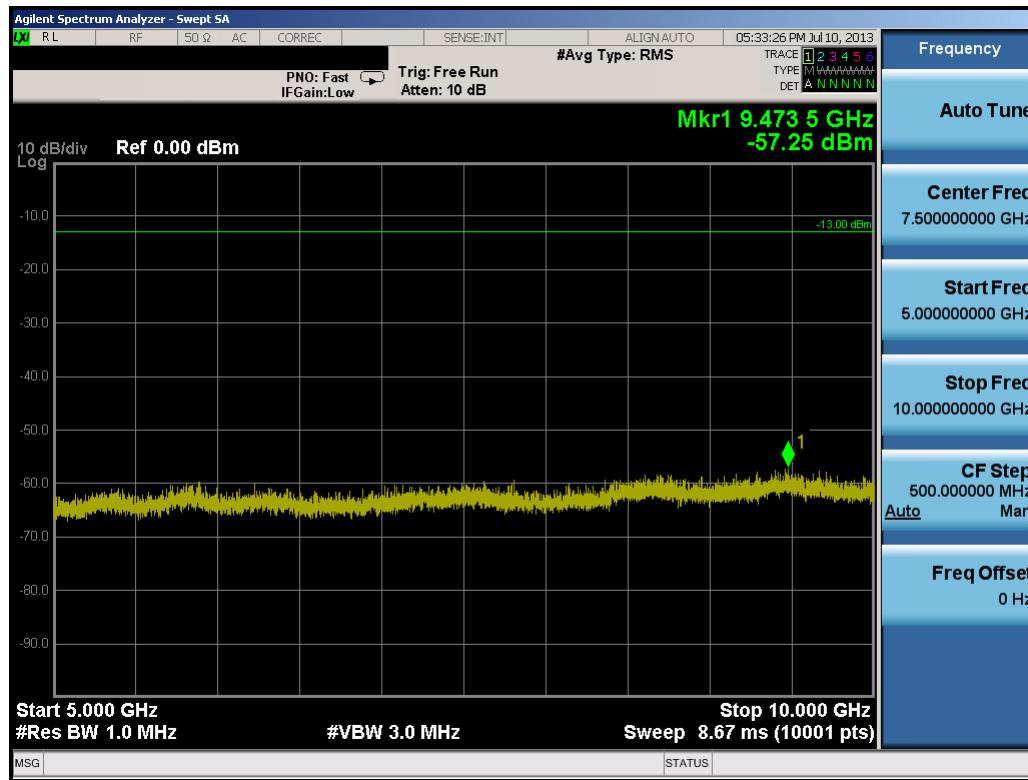


Plot 8-17. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFD800	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: 
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Quality Manager

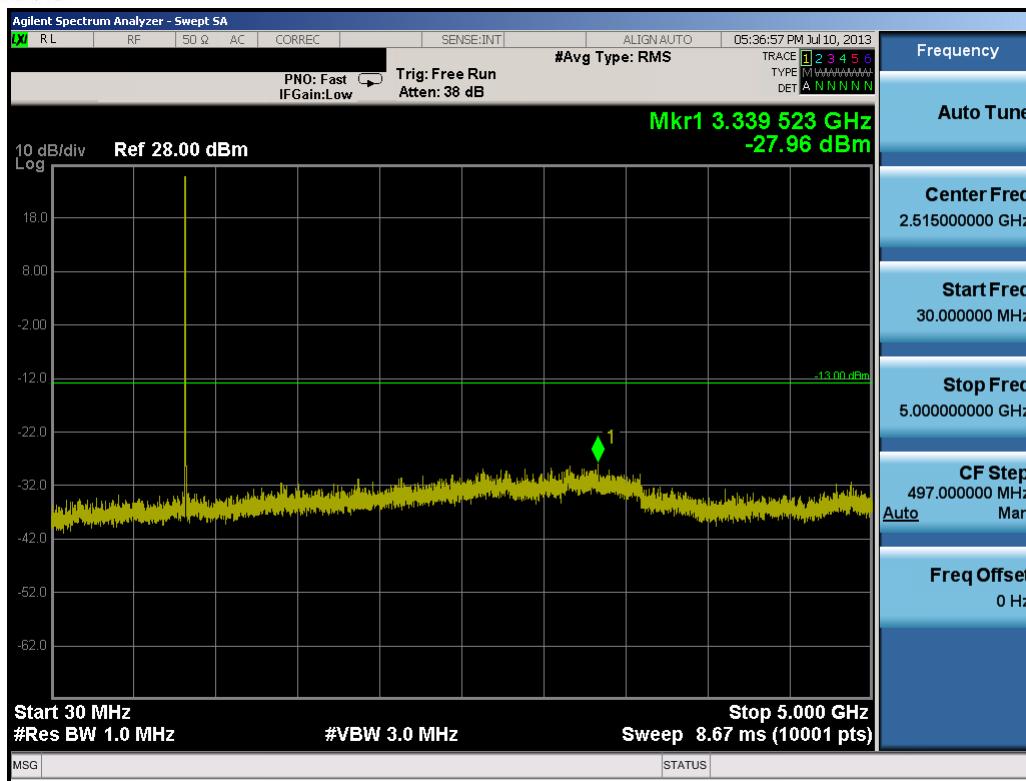

Plot 8-18. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

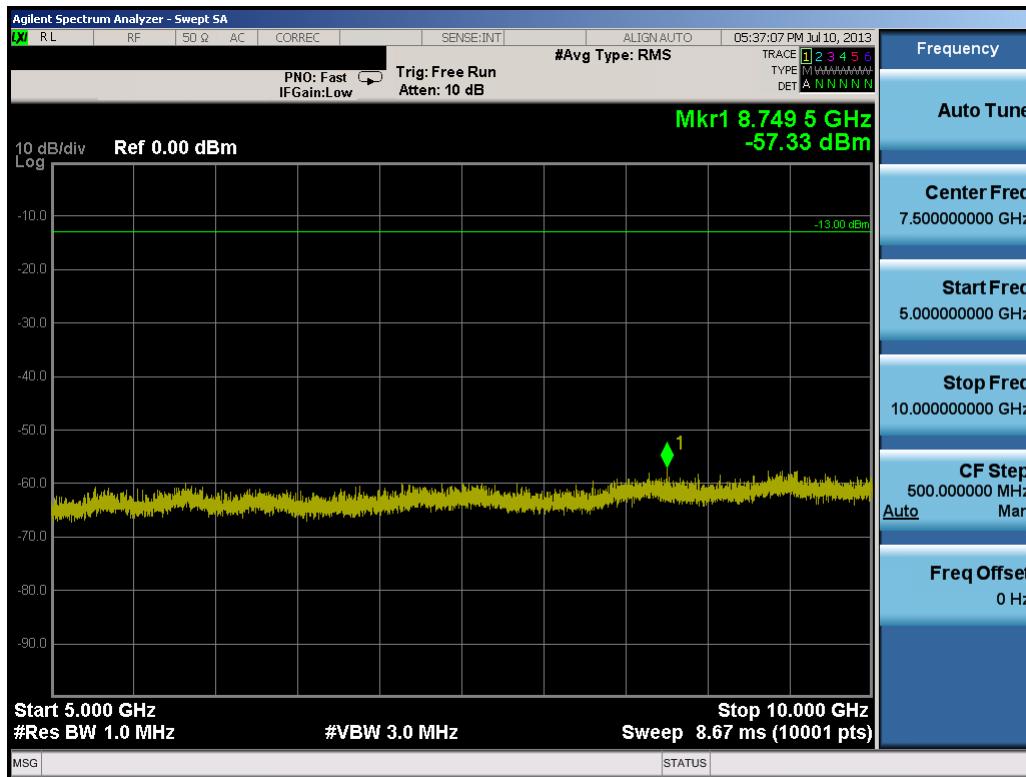

Plot 8-19. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 56 of 88




Plot 8-20. Upper Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFD800	 FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset


9.0 BAND 4 PLOTS OF EMISSIONS

Note: All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.

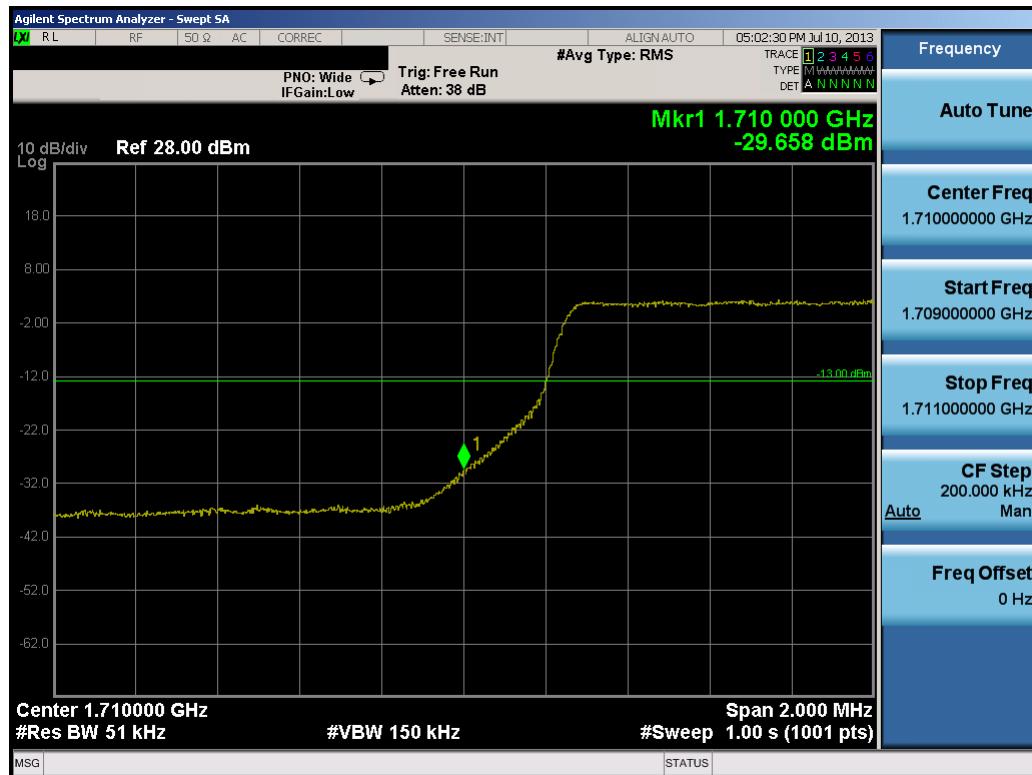


Plot 9-1. Lower Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 58 of 88

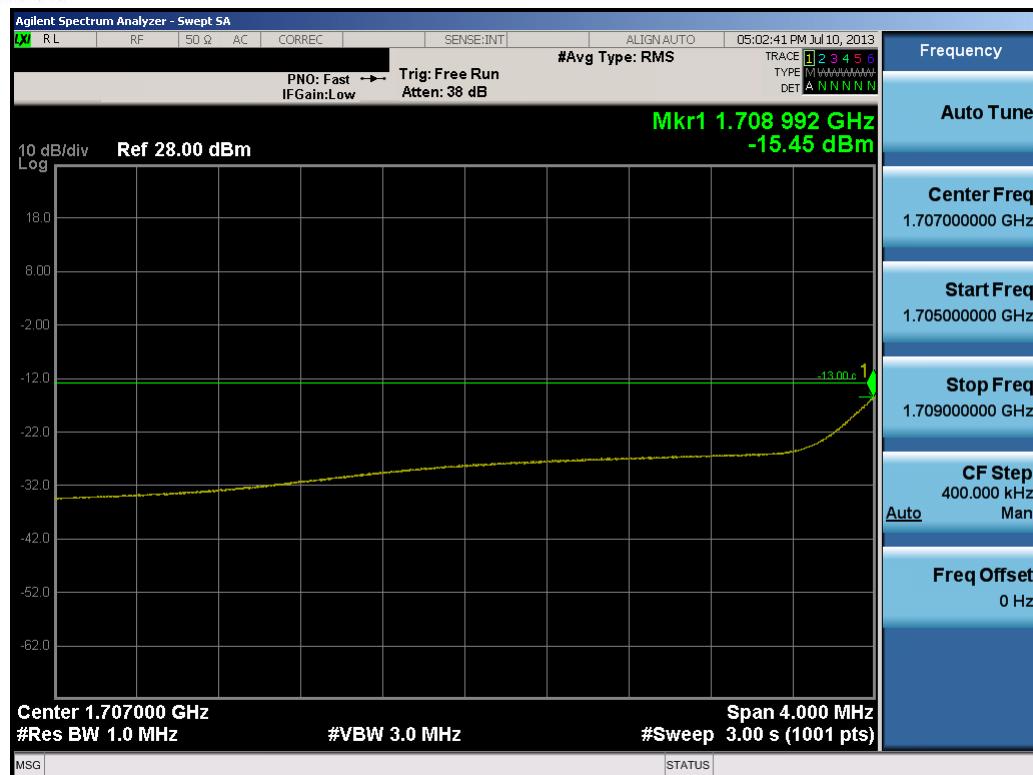


Plot 9-2. Lower Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

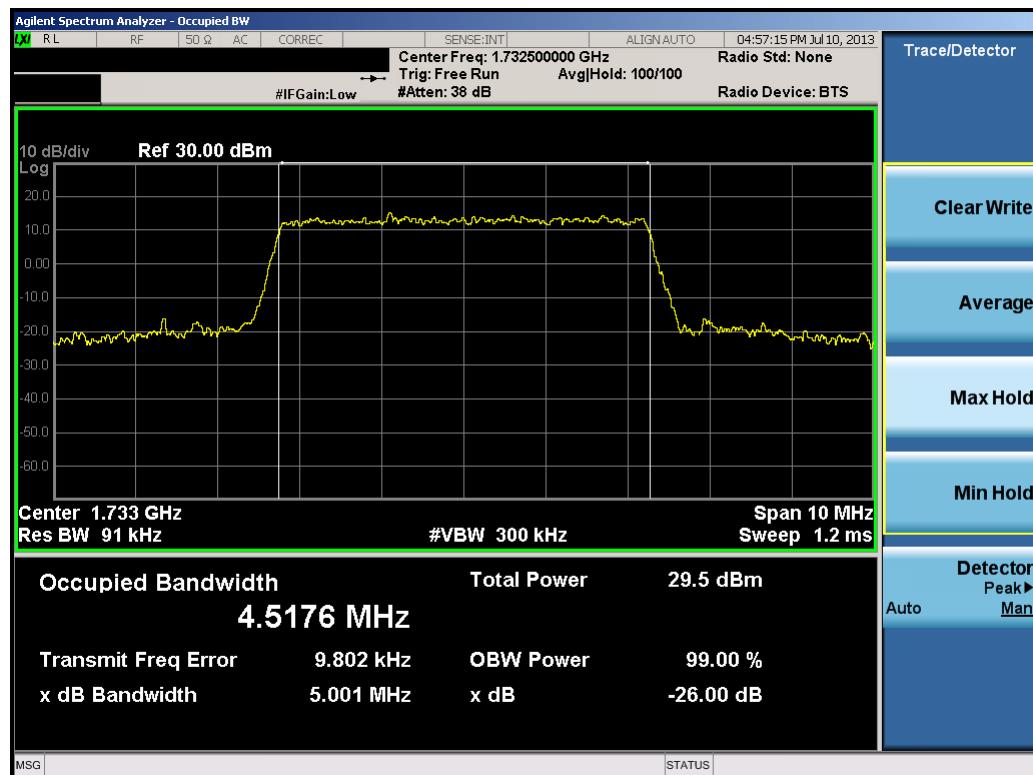


Plot 9-3. Occupied Bandwidth Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 59 of 88

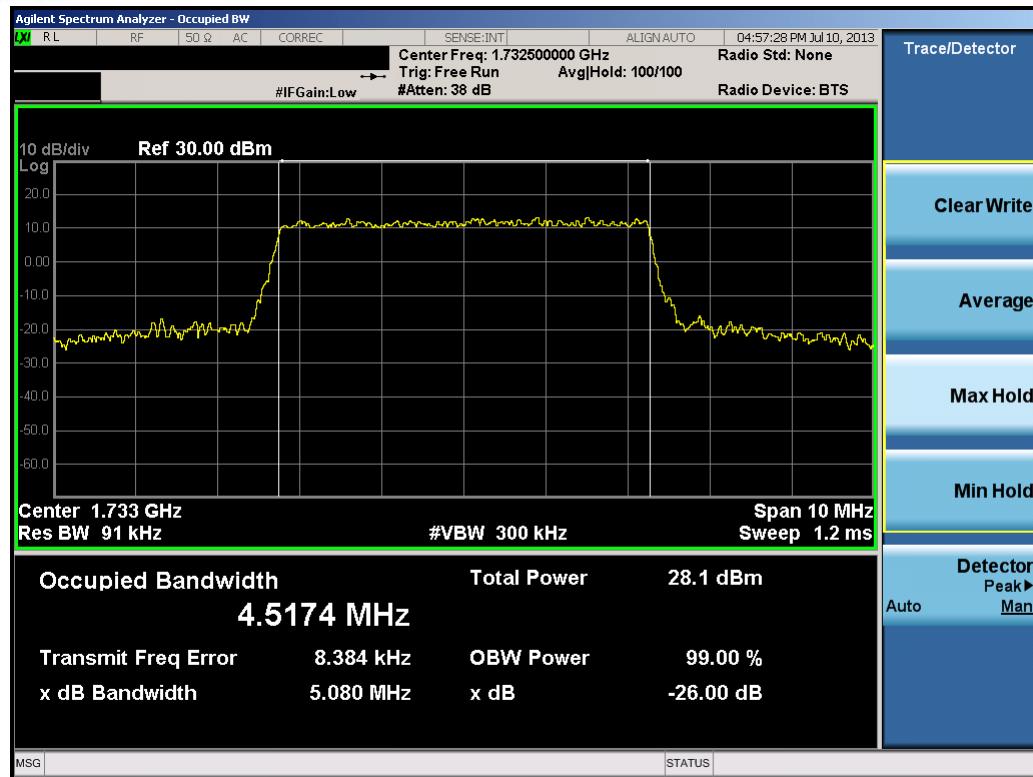


Plot 9-4. Occupied Bandwidth Plot (5.0MHz 16-QAM – RB Size 25)

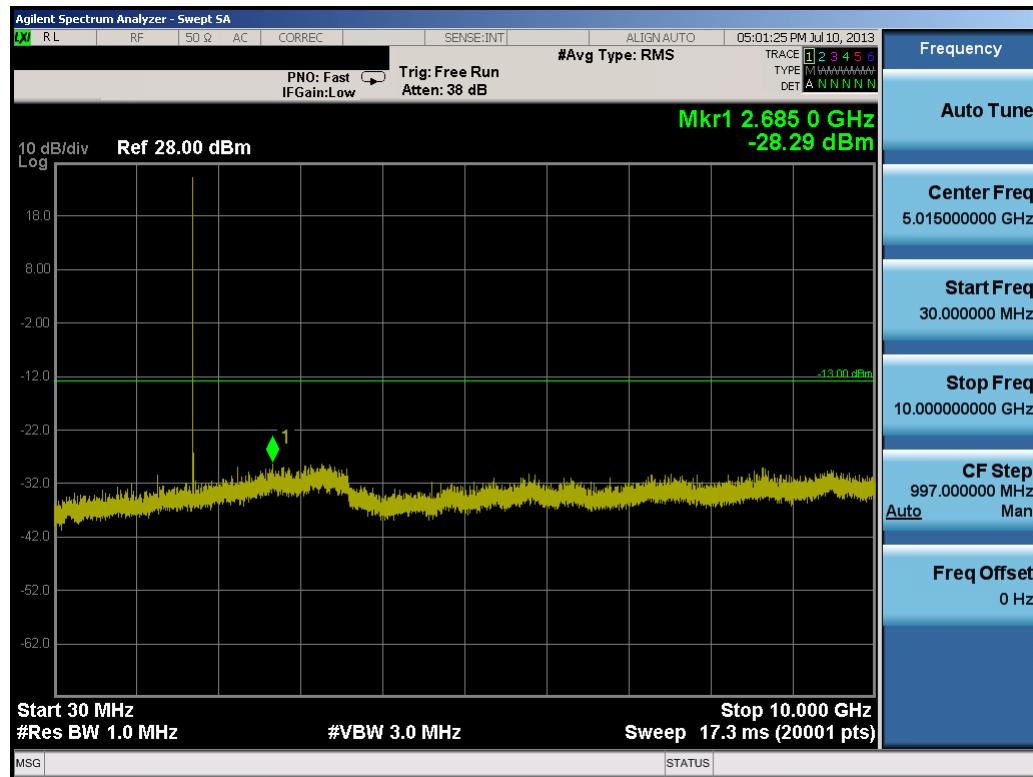


Plot 9-5. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 60 of 88

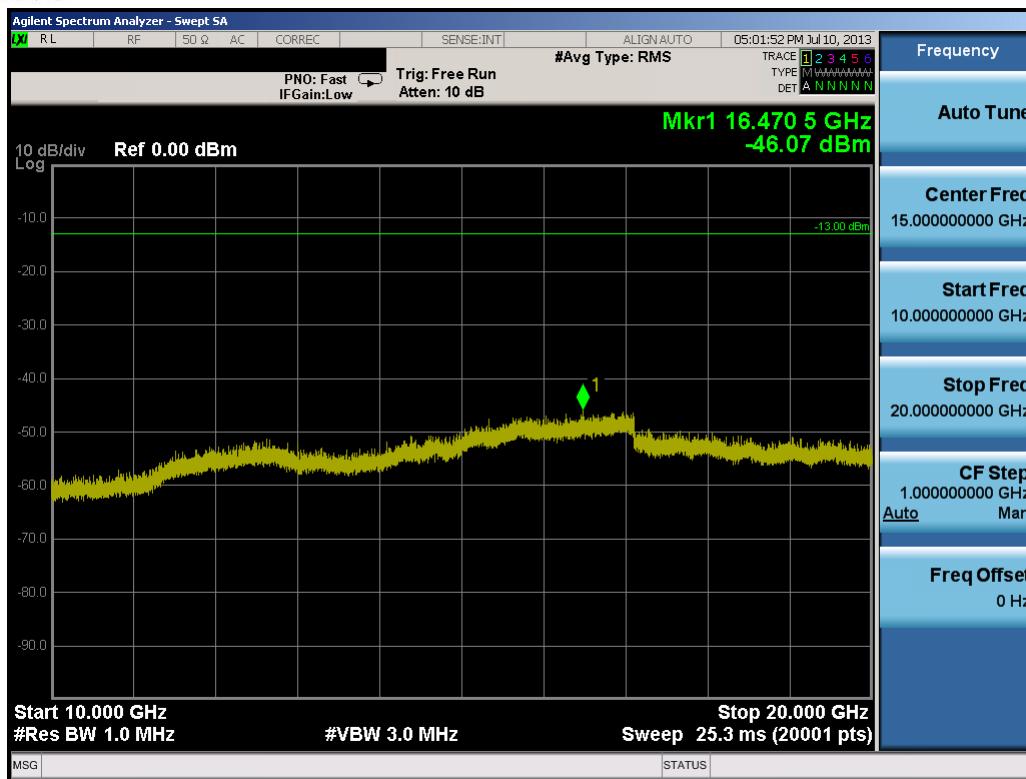


Plot 9-6. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

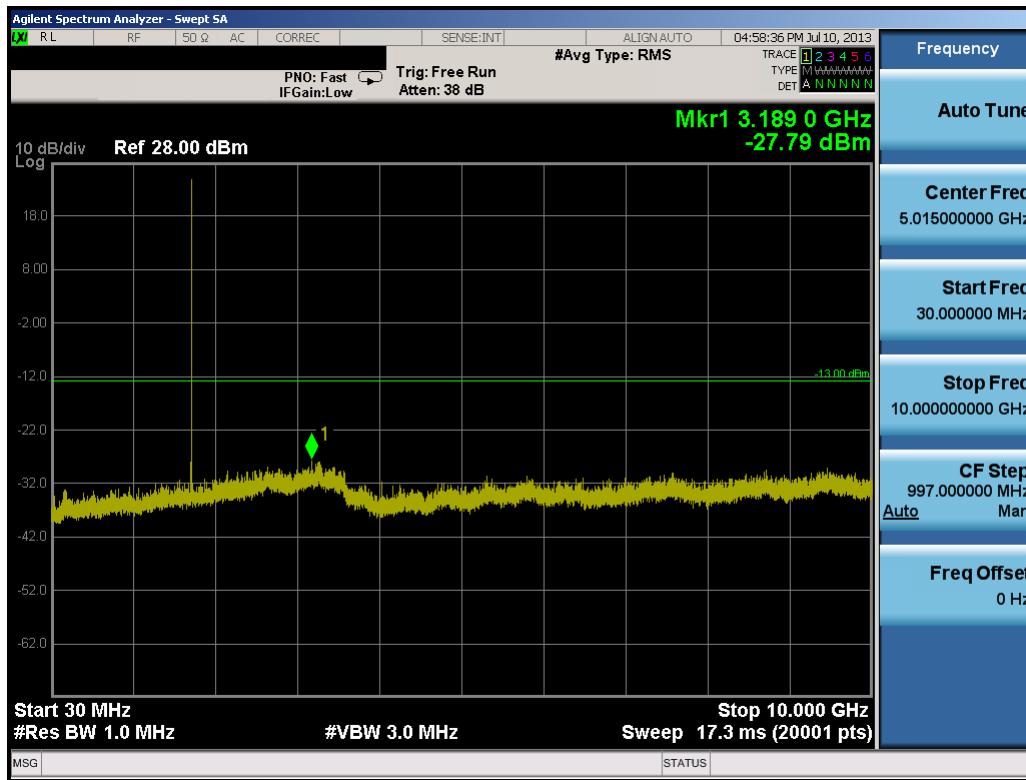


Plot 9-7. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 61 of 88

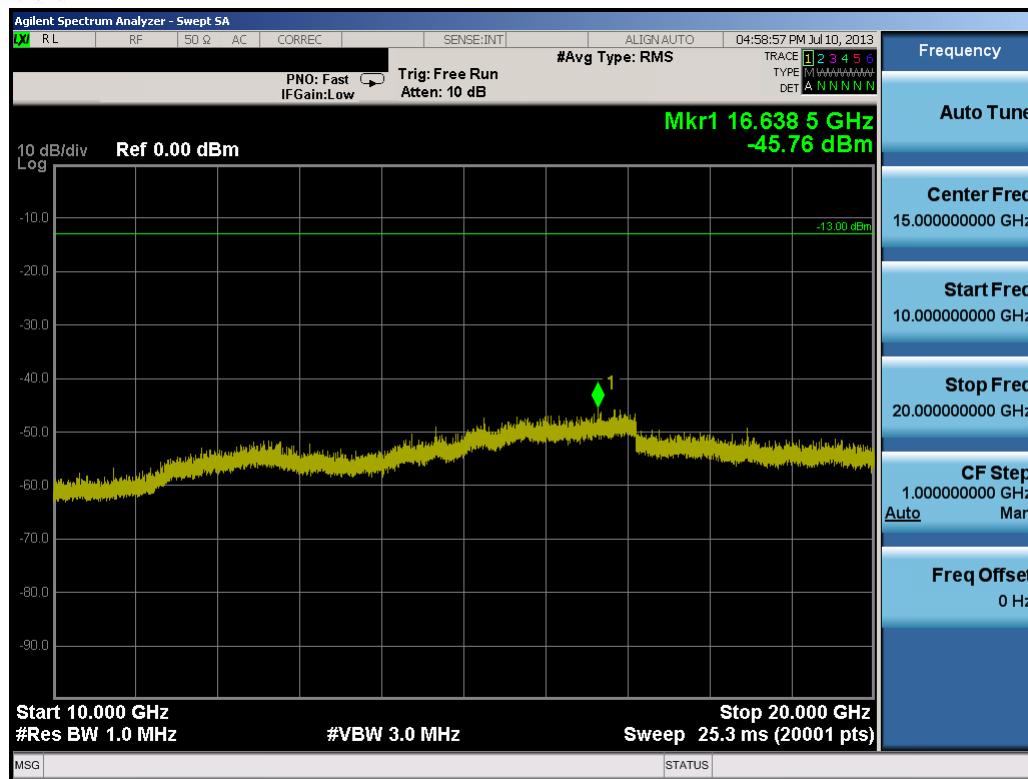


Plot 9-8. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

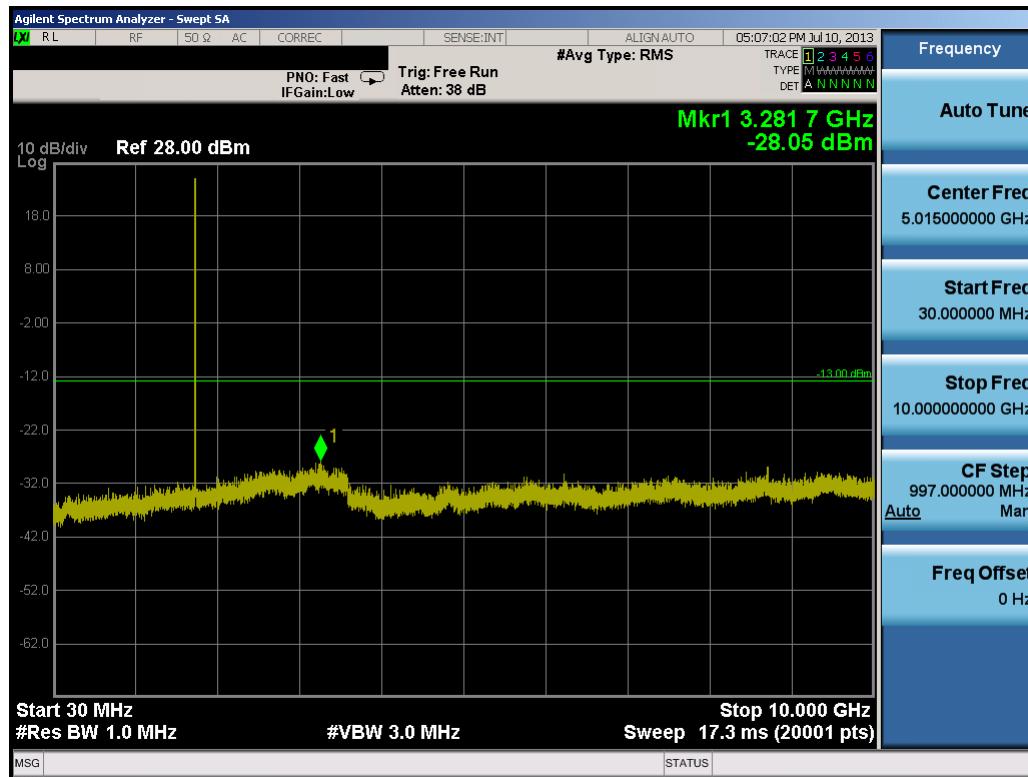


Plot 9-9. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 62 of 88

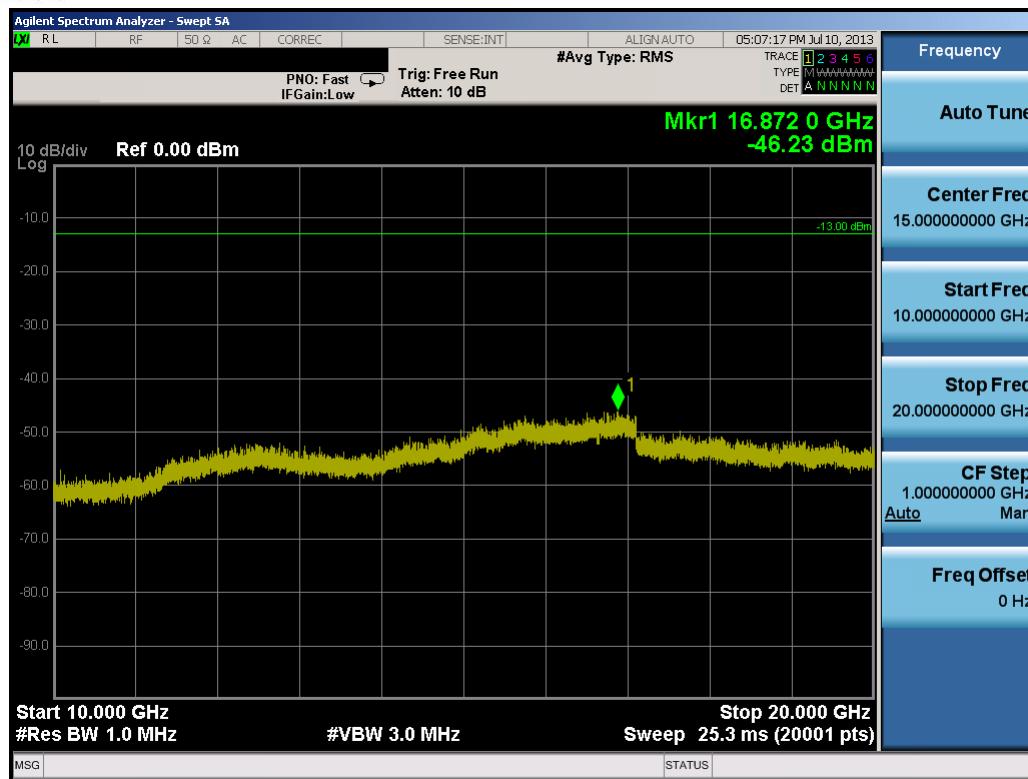

Plot 9-10. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

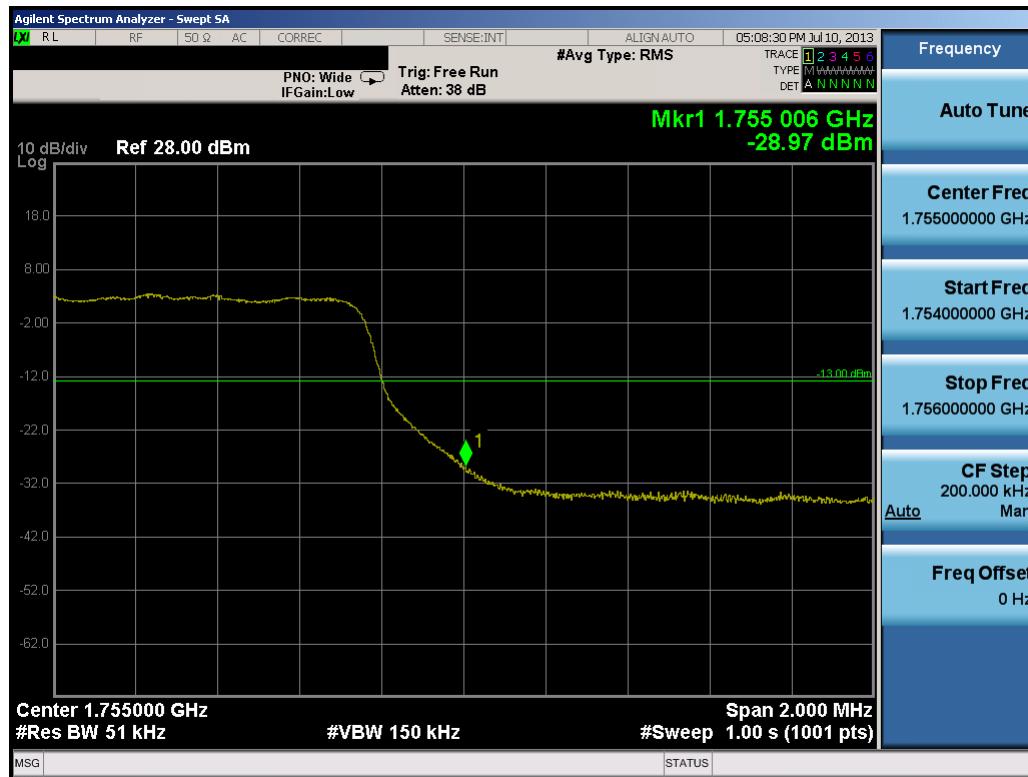


Plot 9-11. Upper Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 63 of 88




Plot 9-12. Upper Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

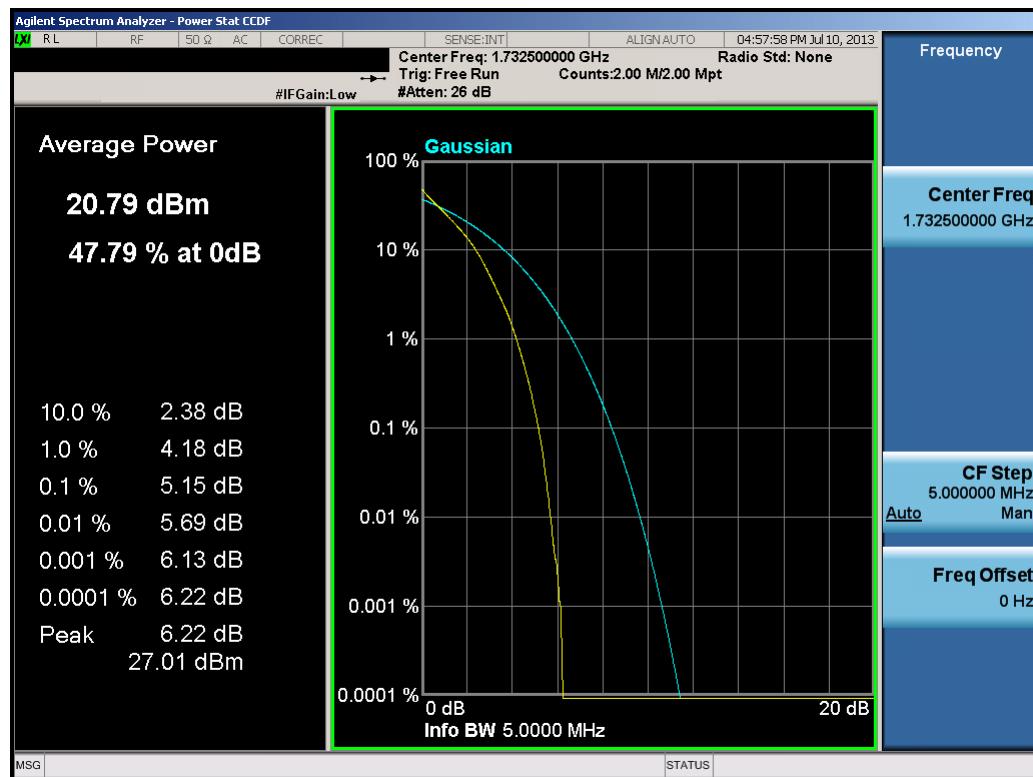

Plot 9-13. PAR Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 64 of 88

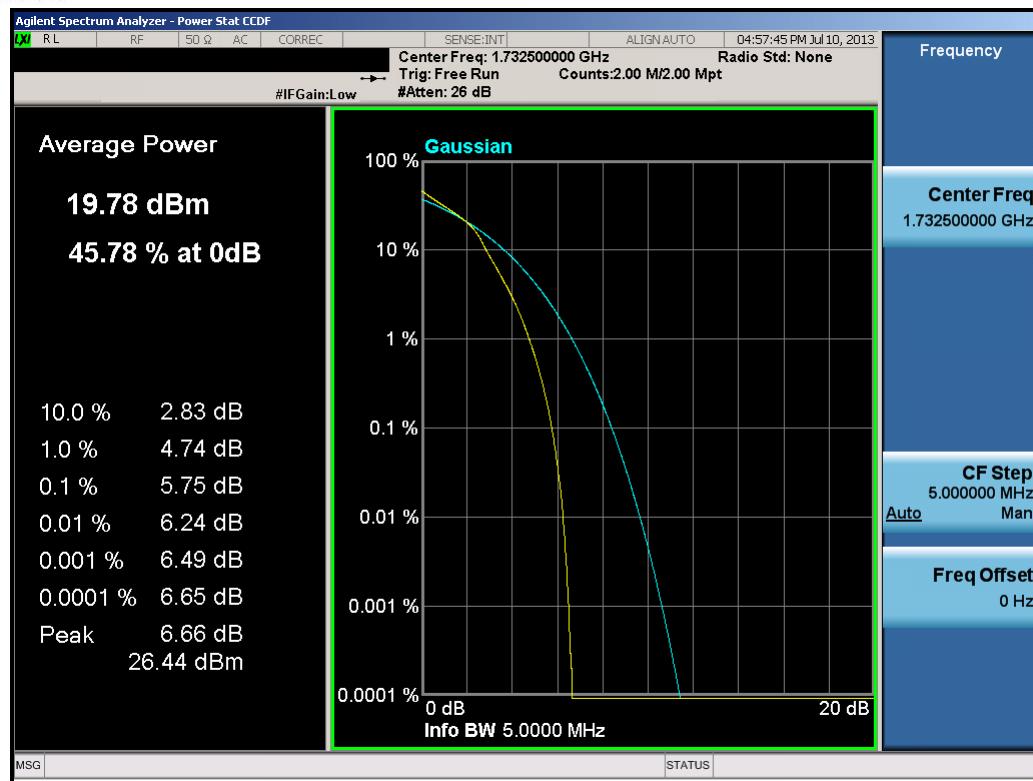


Plot 9-14. PAR Plot (5.0MHz 16-QAM – RB Size 25)




Plot 9-15. Lower Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 65 of 88

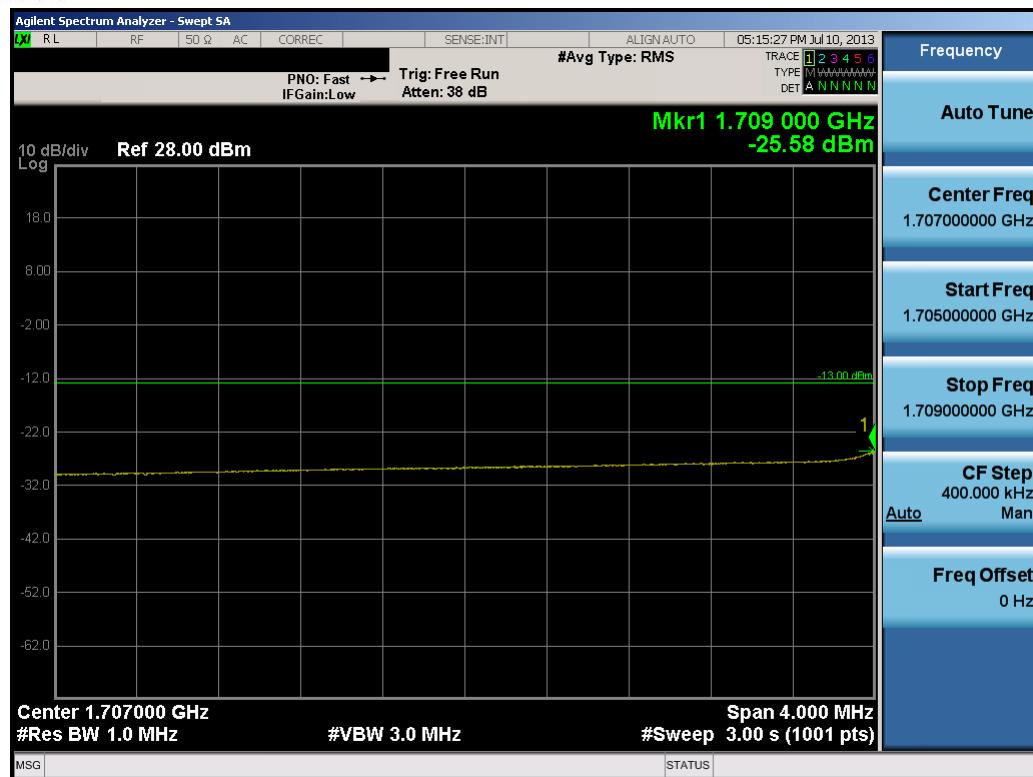


Plot 9-16. Lower Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

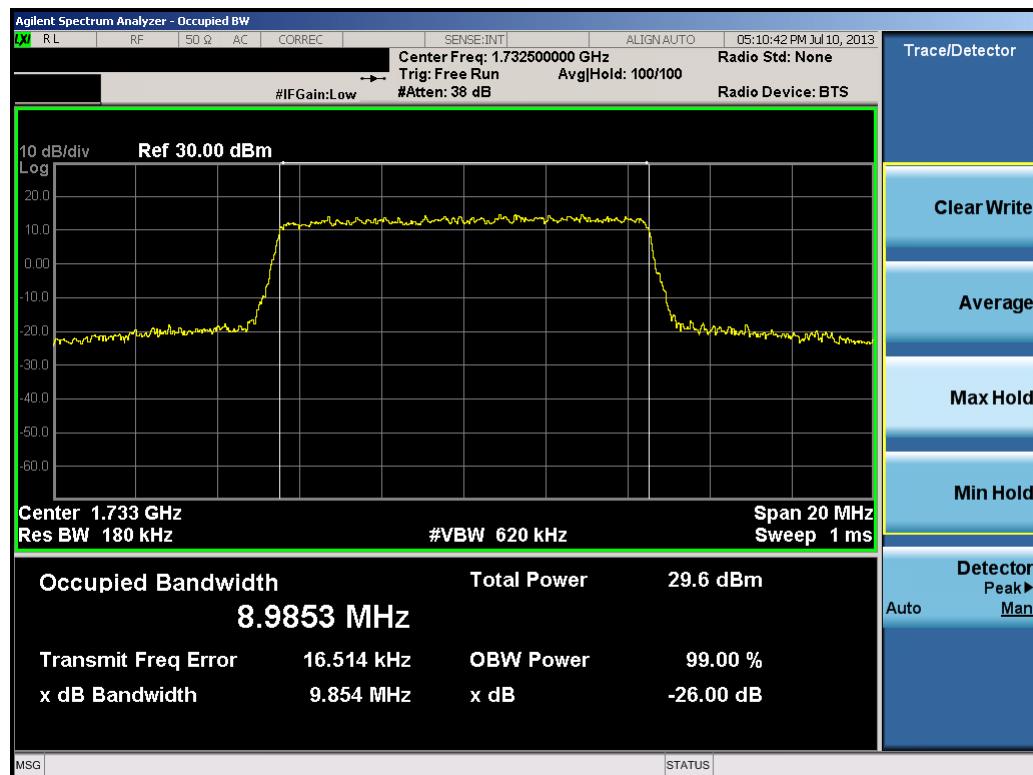


Plot 9-17. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFD800	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by:  LG
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Quality Manager

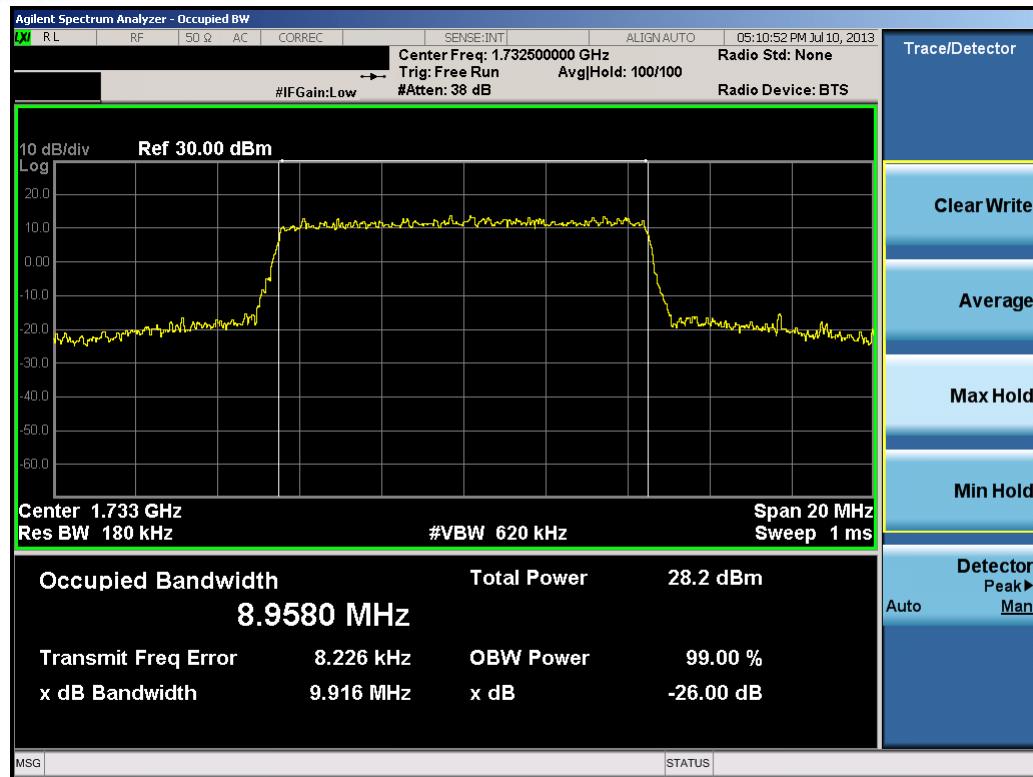


Plot 9-18. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

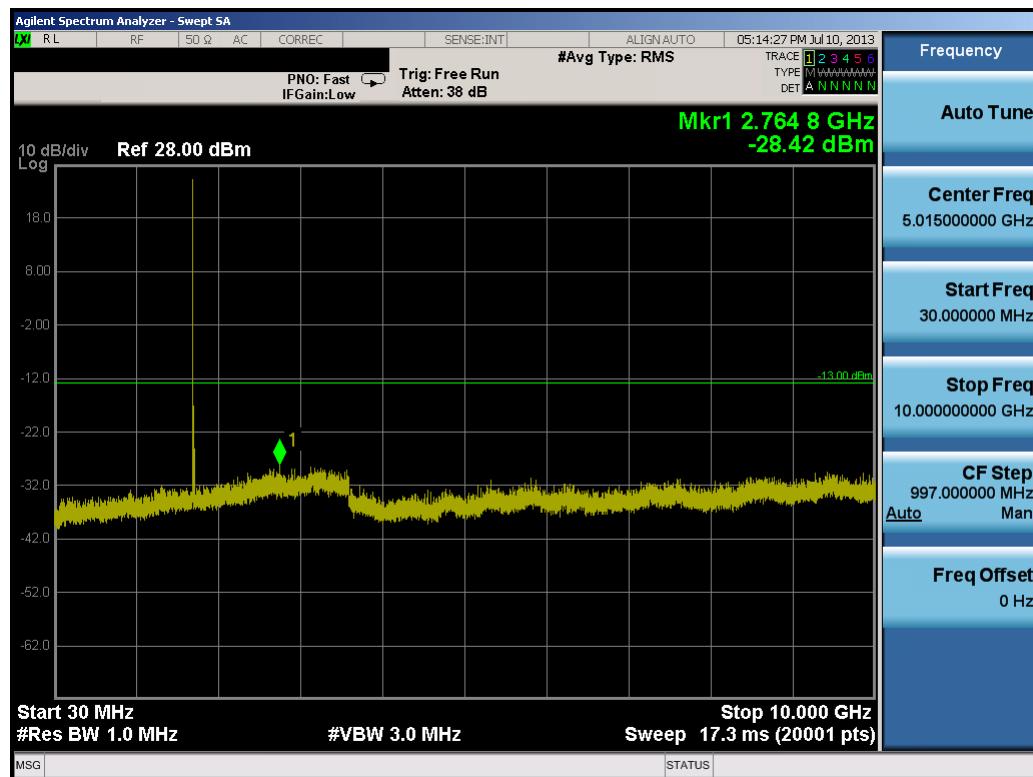


Plot 9-19. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 67 of 88

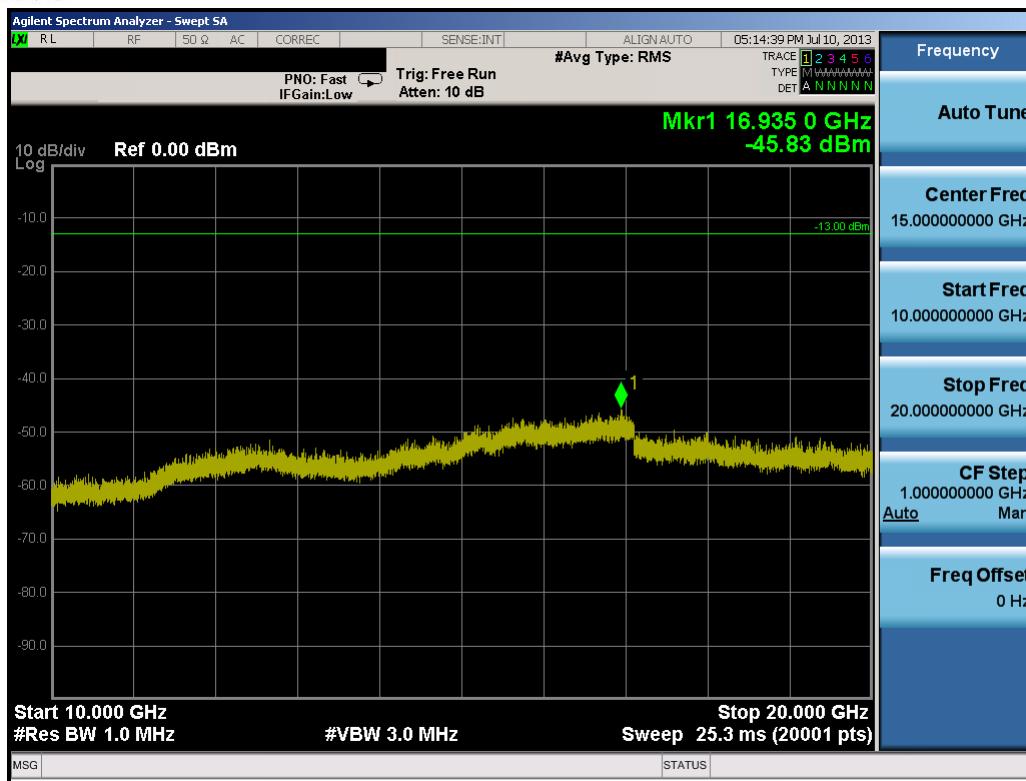


Plot 9-20. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

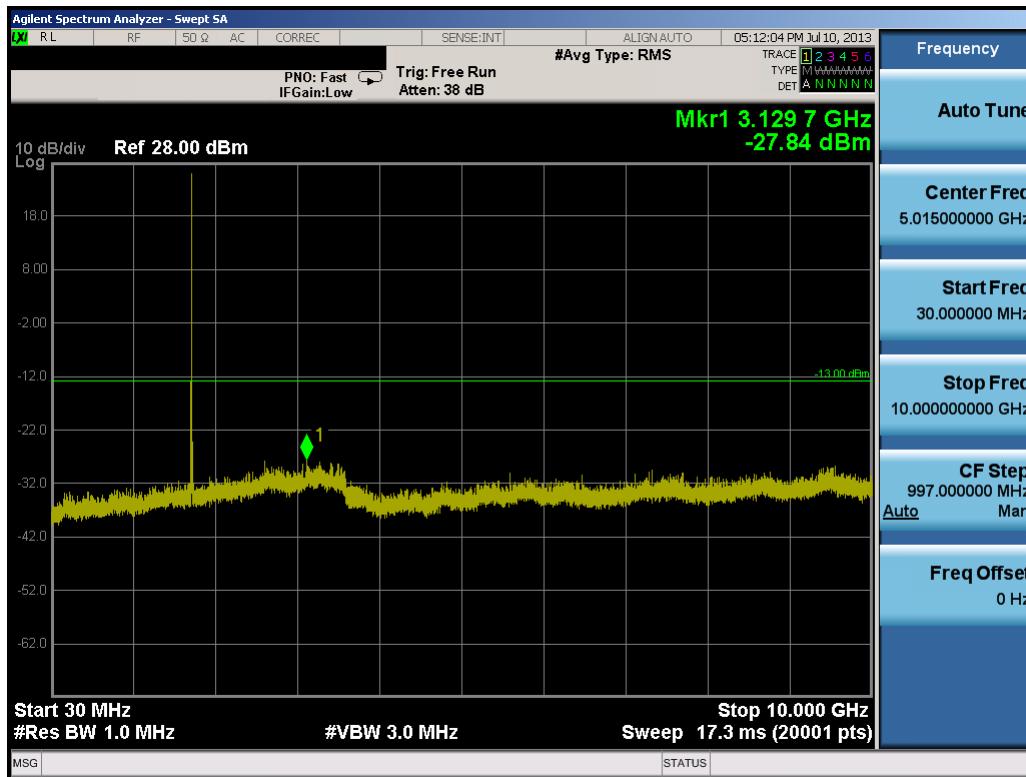


Plot 9-21. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 68 of 88

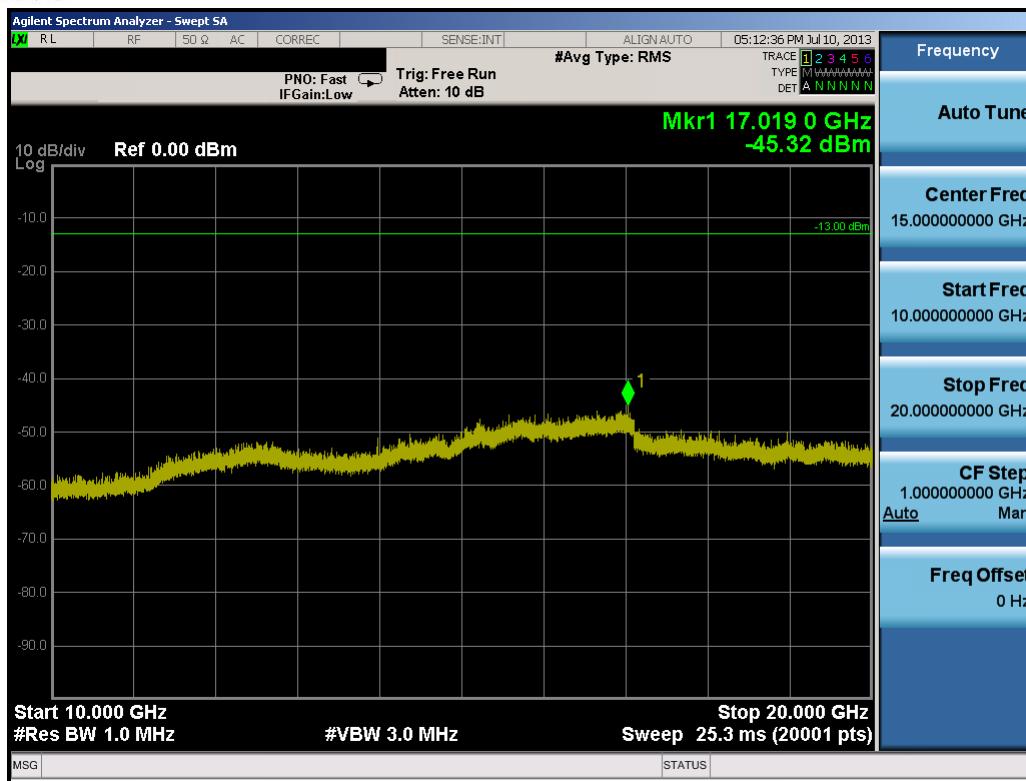


Plot 9-22. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

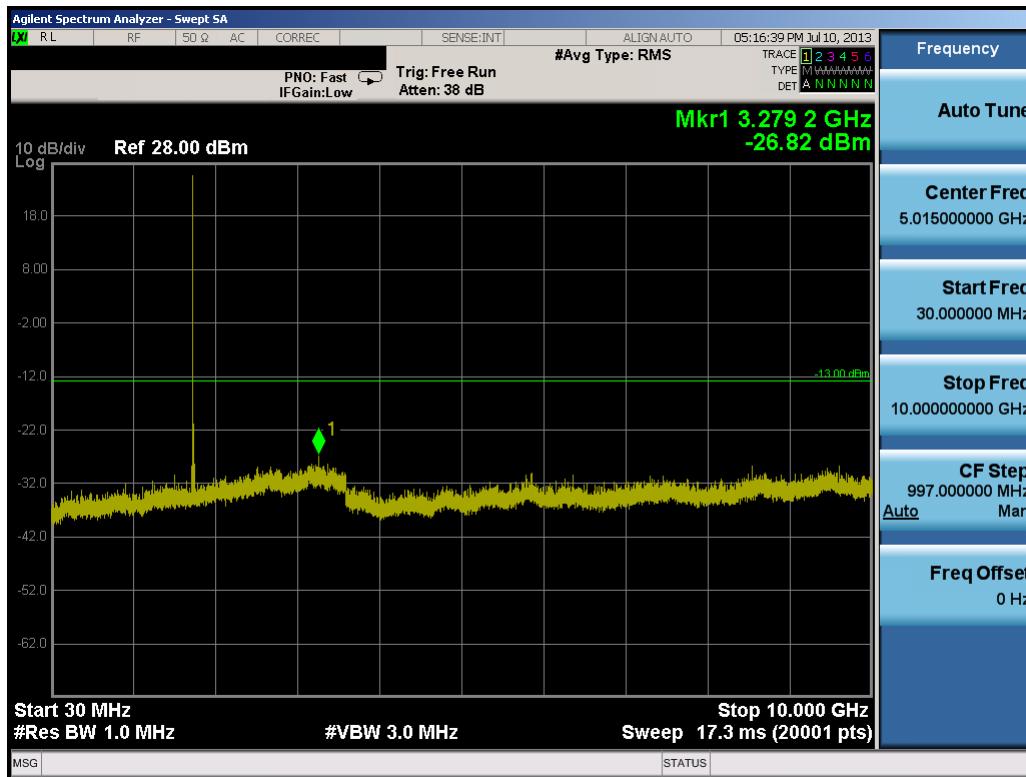


Plot 9-23. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 69 of 88

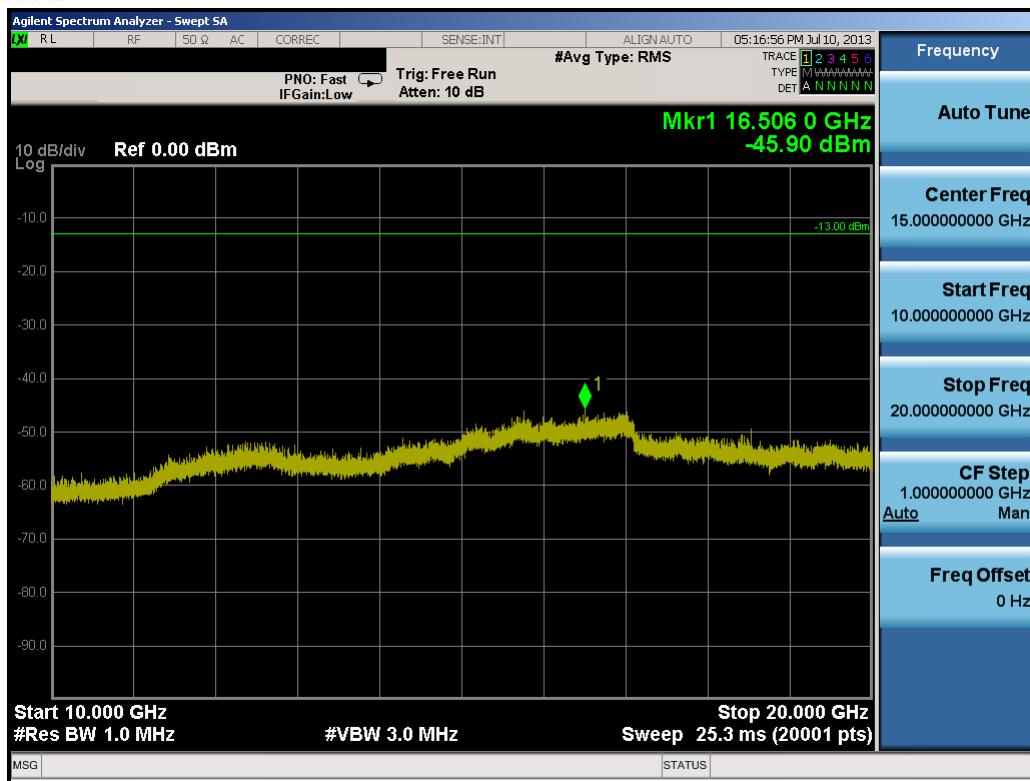


Plot 9-24. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

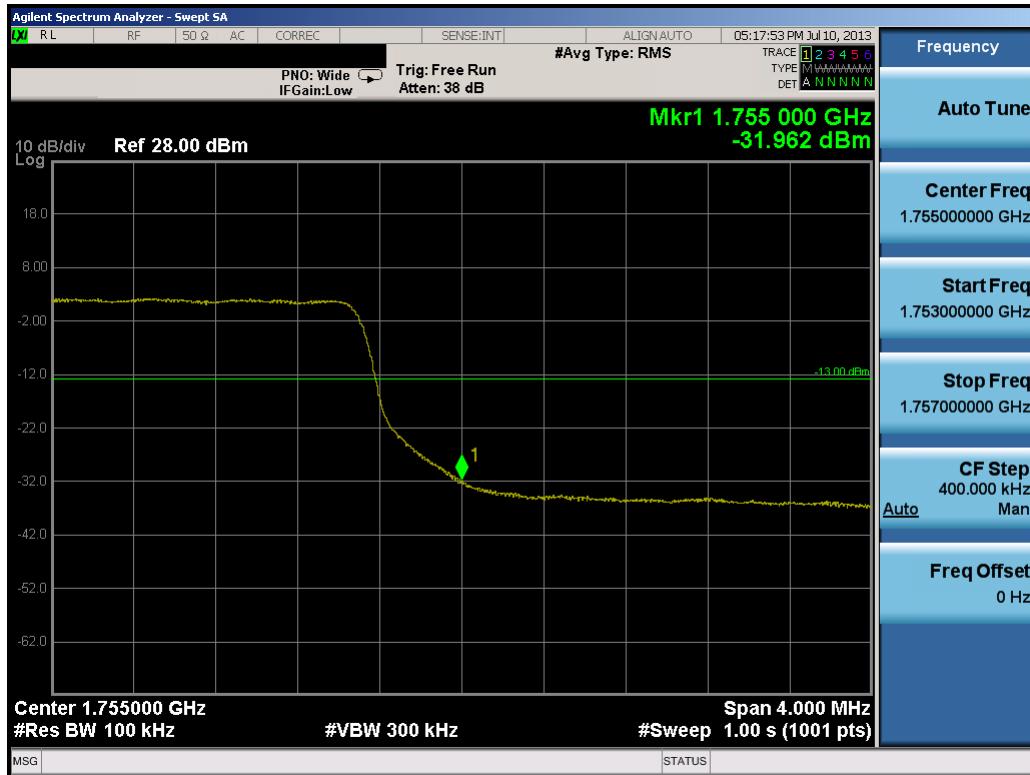


Plot 9-25. Upper Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 70 of 88

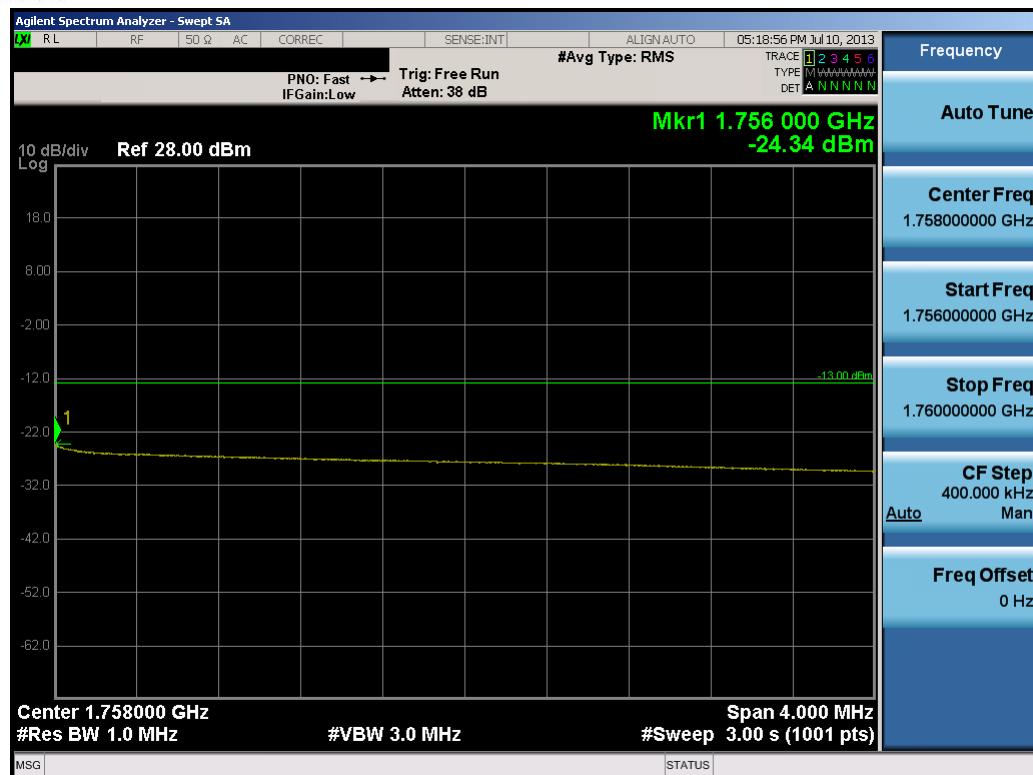


Plot 9-26. Upper Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

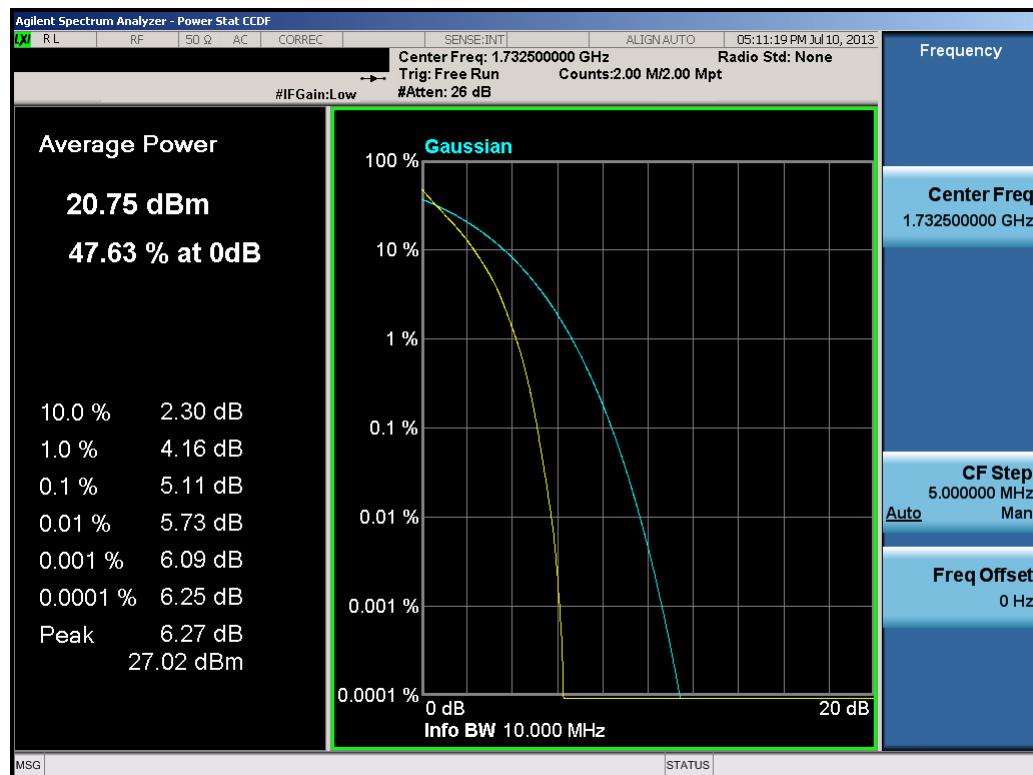

Plot 9-27. PAR Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 71 of 88

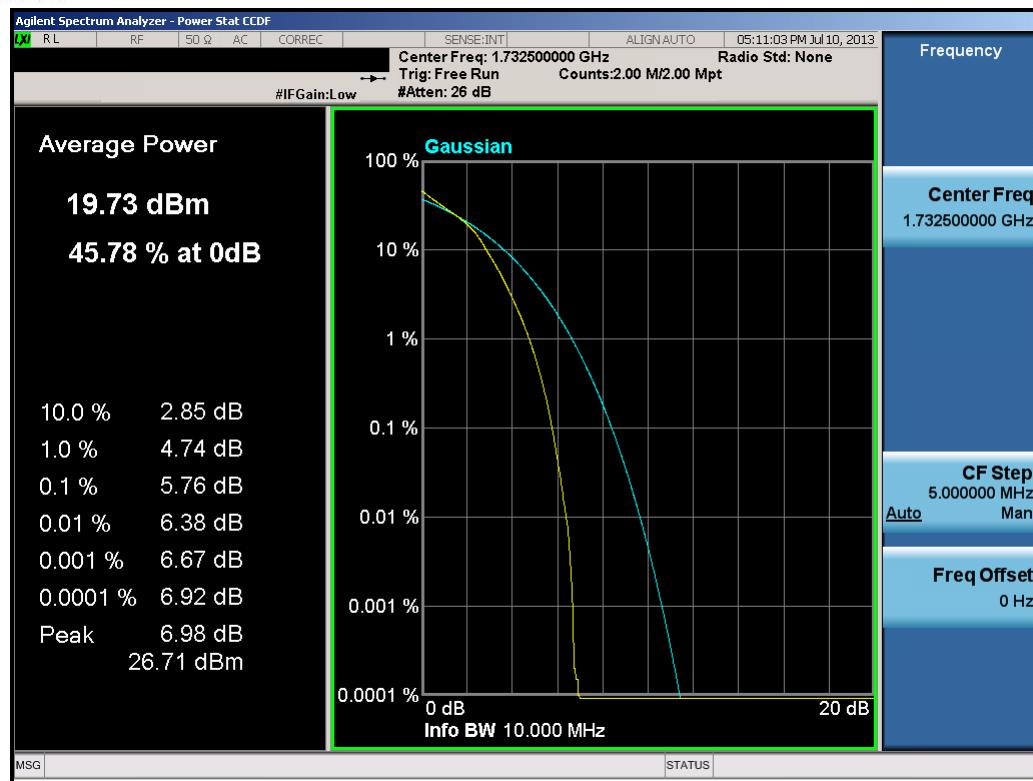


Plot 9-28. PAR Plot (10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 72 of 88


10.0 BAND 2 PLOTS OF EMISSIONS

Note: All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.

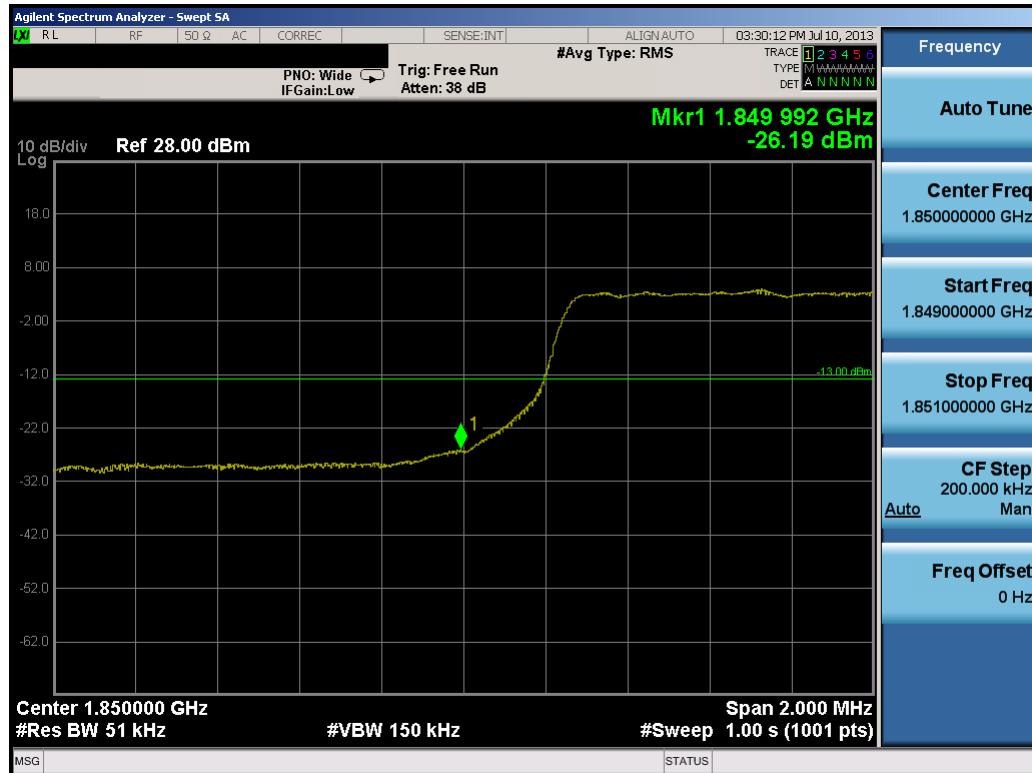


Plot 10-1. Lower Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFD800	PCTEST®	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)	Reviewed by: 
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset	Page 73 of 88

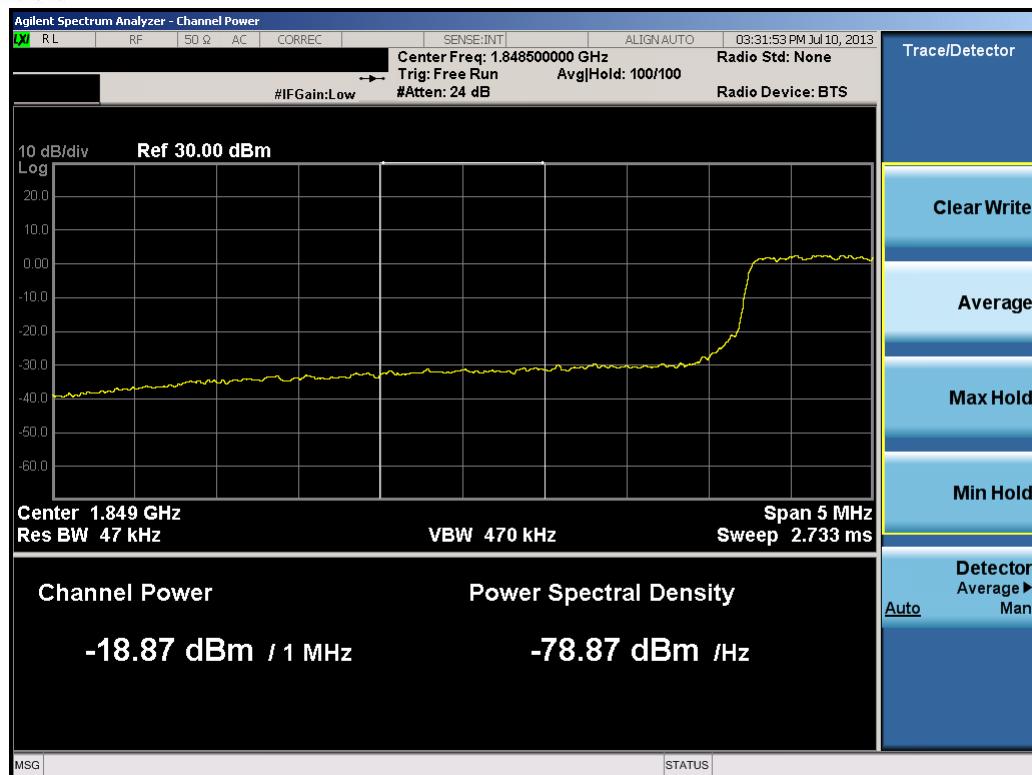


Plot 10-2. Lower Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

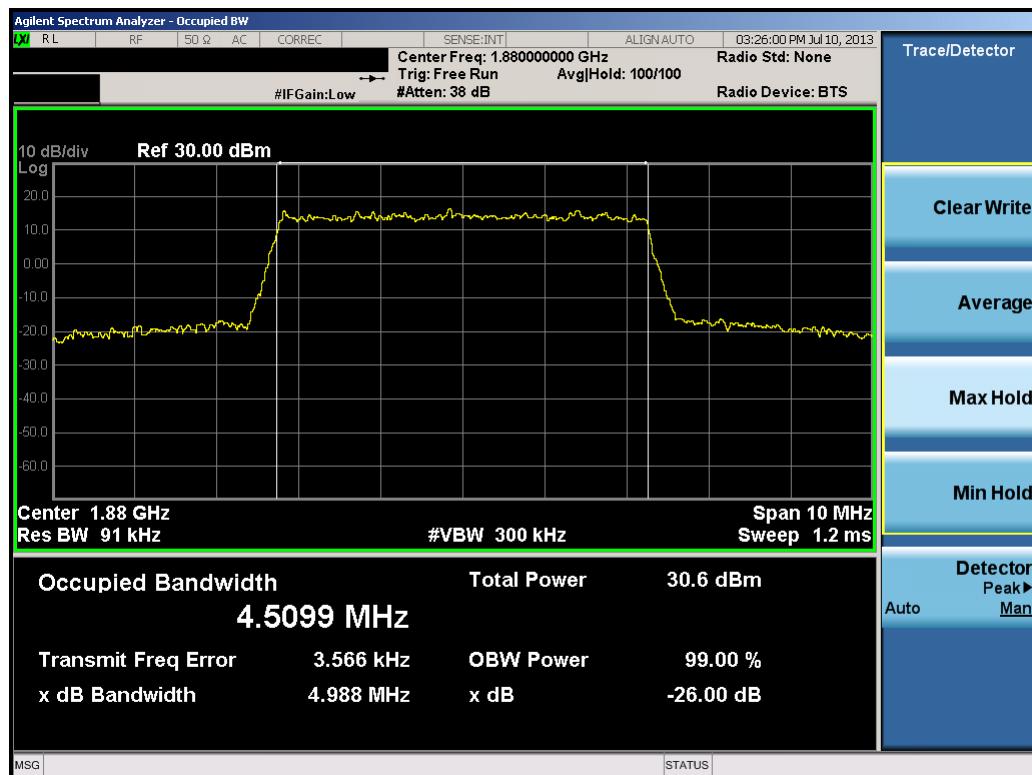


Plot 10-3. Occupied Bandwidth Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 74 of 88

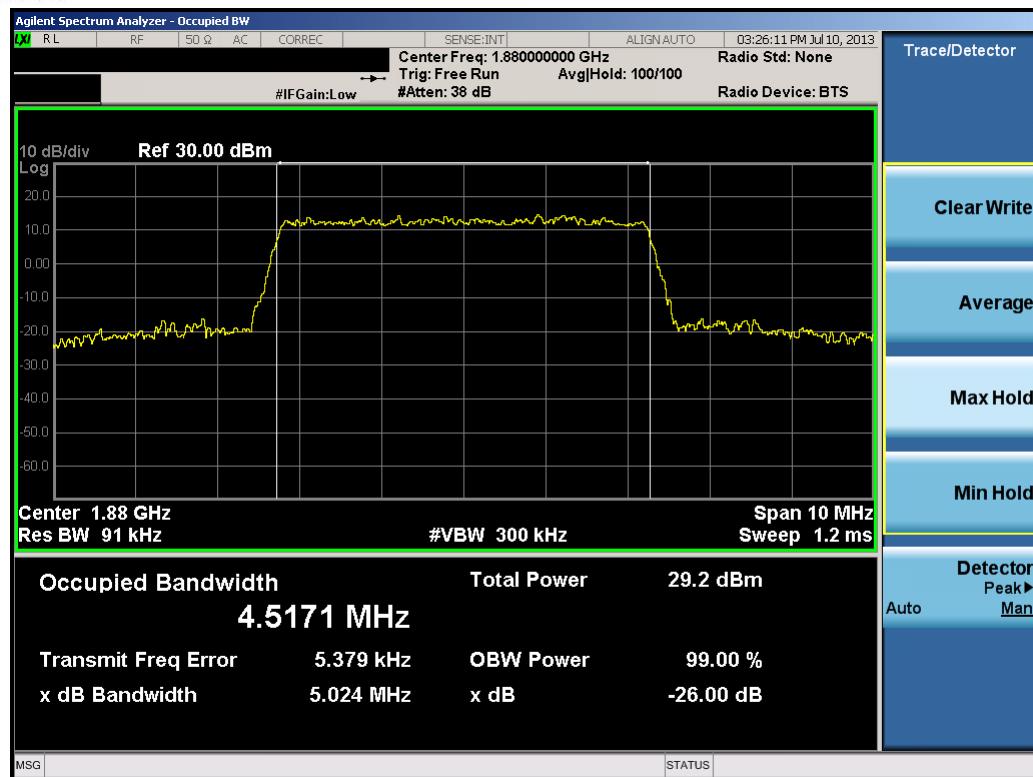


Plot 10-4. Occupied Bandwidth Plot (5.0MHz 16-QAM – RB Size 25)

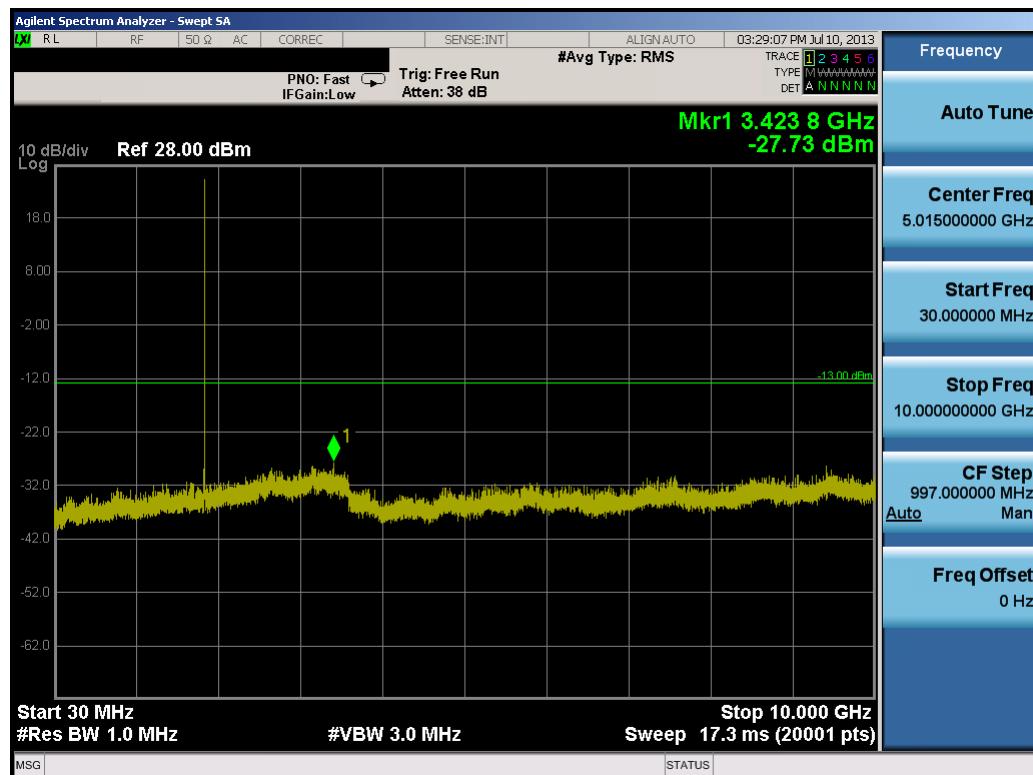


Plot 10-5. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 75 of 88

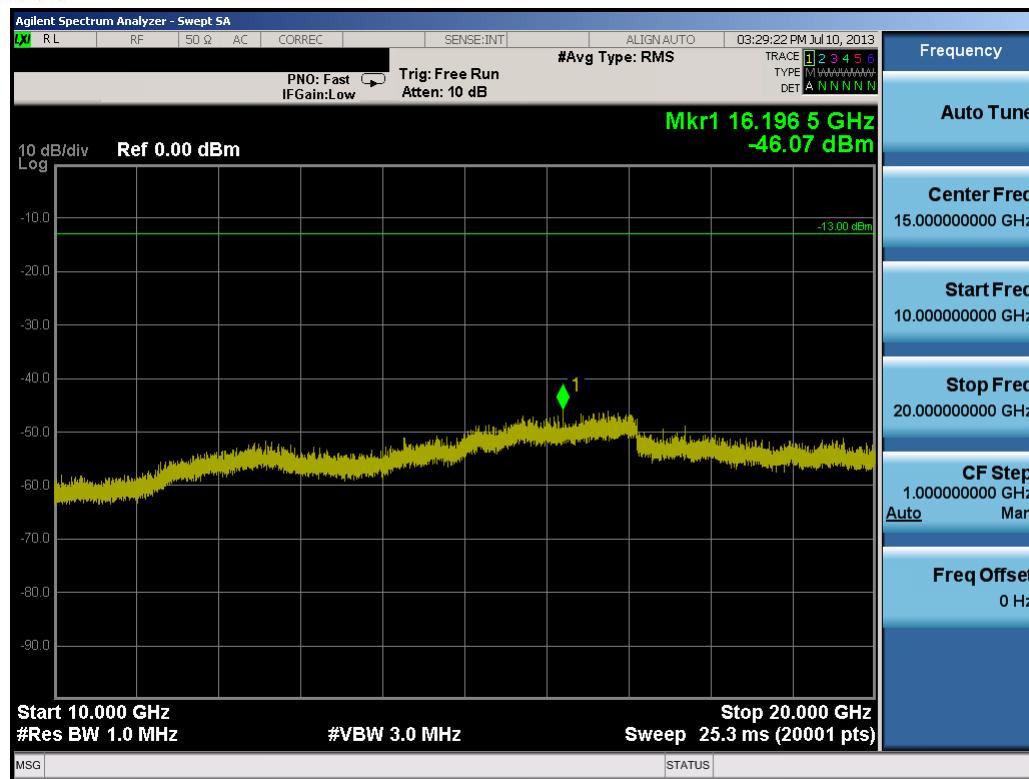


Plot 10-6. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

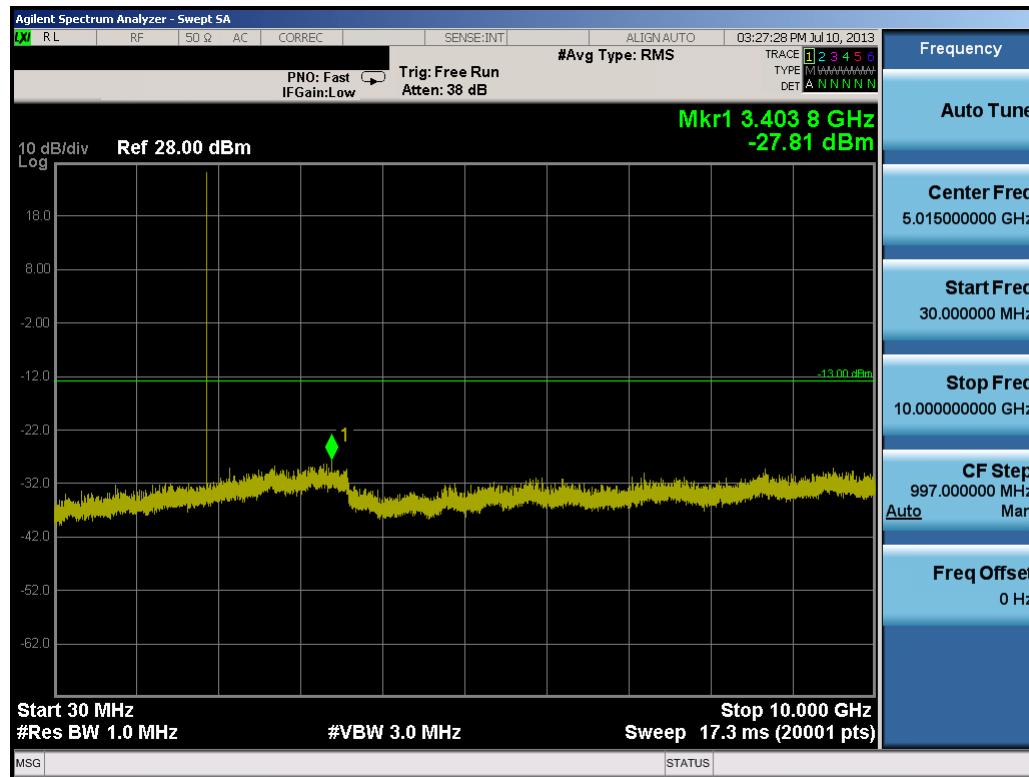


Plot 10-7. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFD800	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)				Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 76 of 88

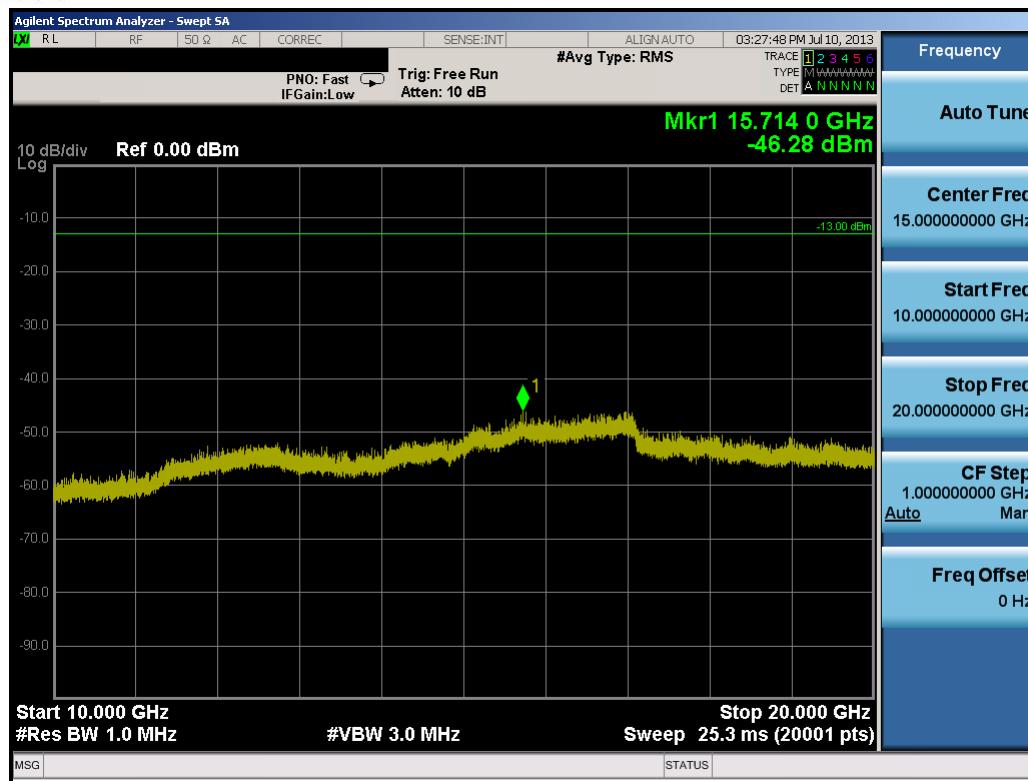


Plot 10-8. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

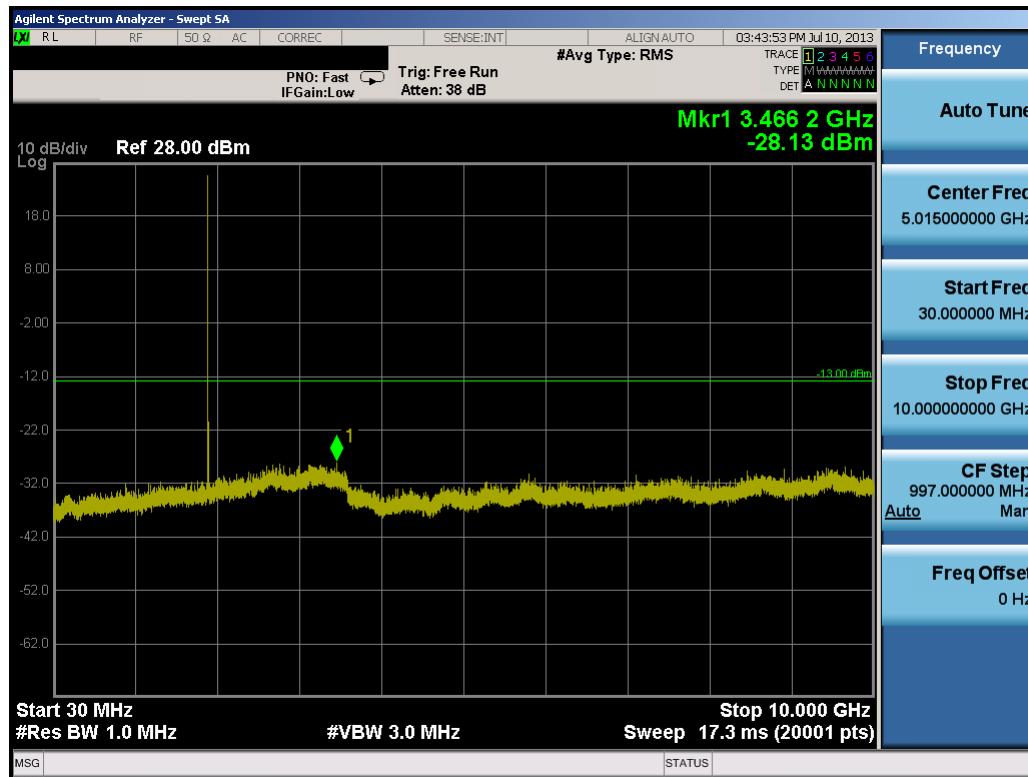

Plot 10-9. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 77 of 88

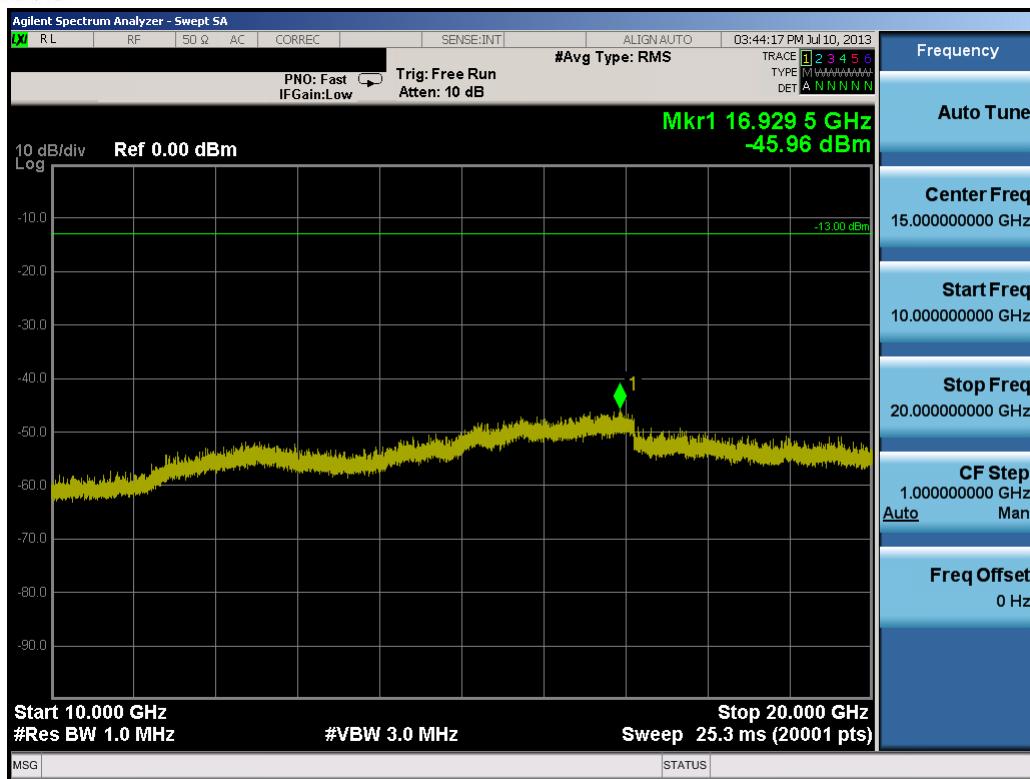

Plot 10-10. Conducted Spurious Plot (5.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)




Plot 10-11. Upper Band Edge Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 78 of 88




Plot 10-12. Upper Extended Band Edge Plot (5.0MHz QPSK – RB Size 25)

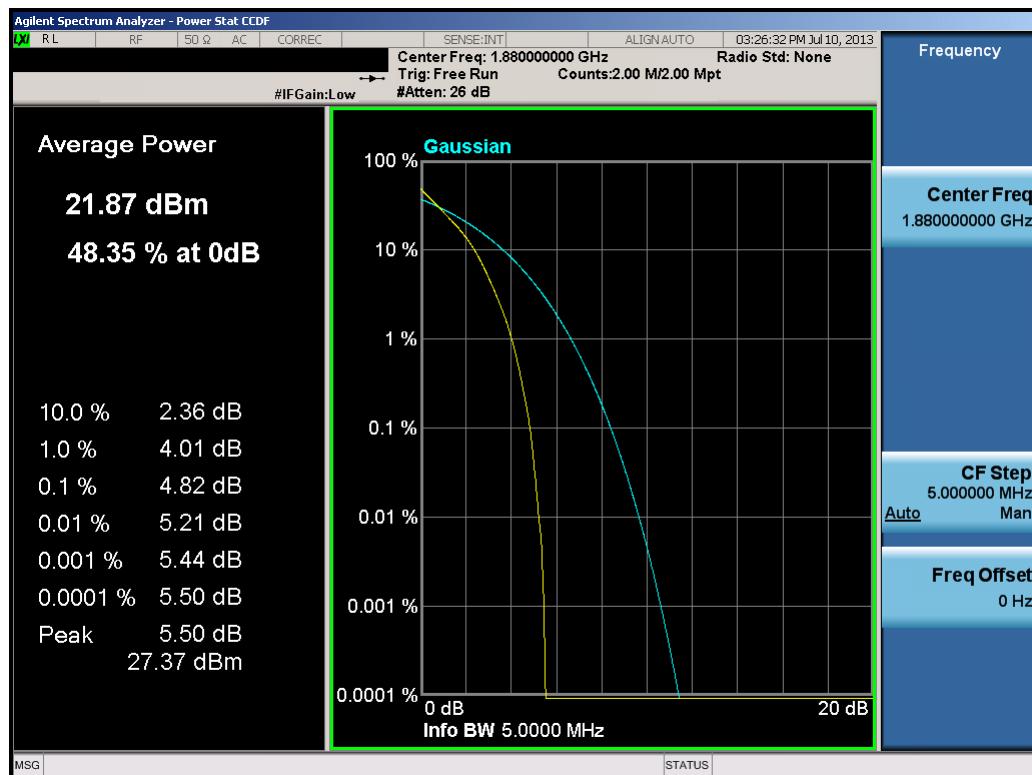


Plot 10-13. PAR Plot (5.0MHz QPSK – RB Size 25)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 79 of 88

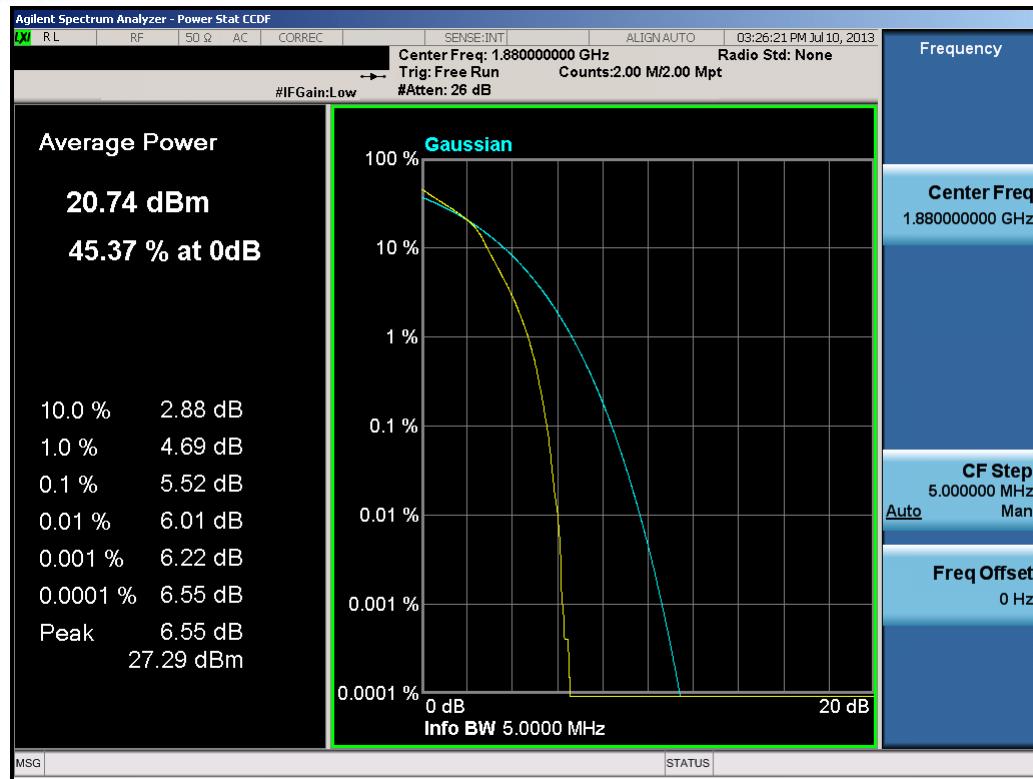


Plot 10-14. PAR Plot (5.0MHz 16-QAM – RB Size 25)

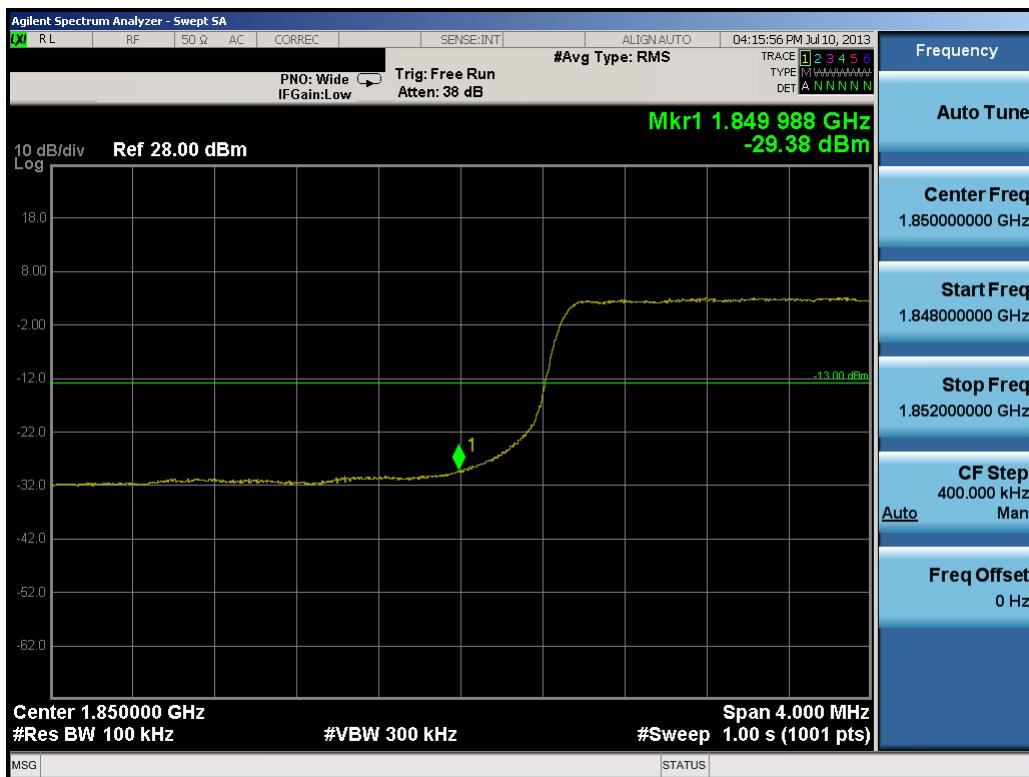


Plot 10-15. Lower Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 80 of 88

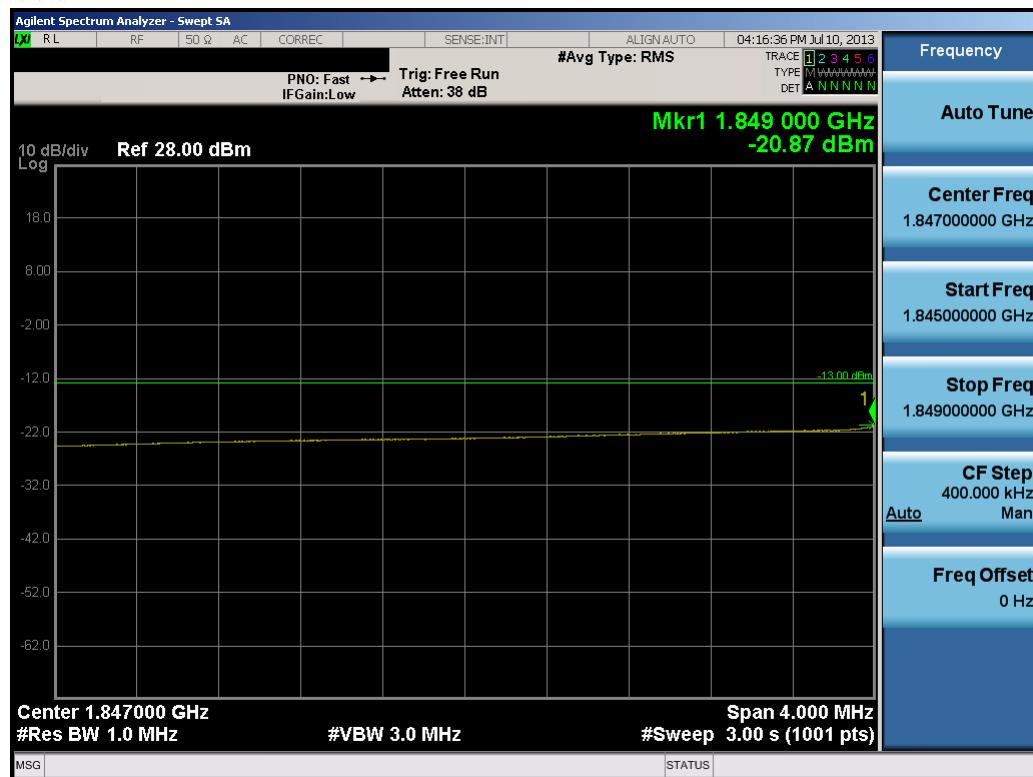


Plot 10-16. Lower Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

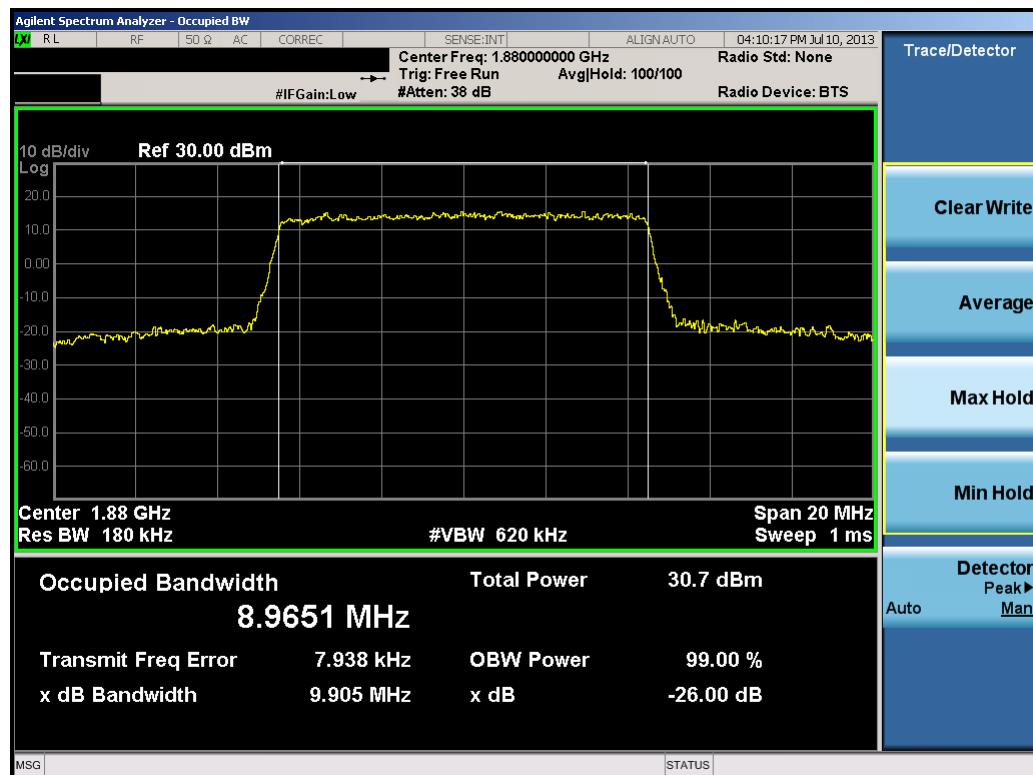


Plot 10-17. Occupied Bandwidth Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 81 of 88

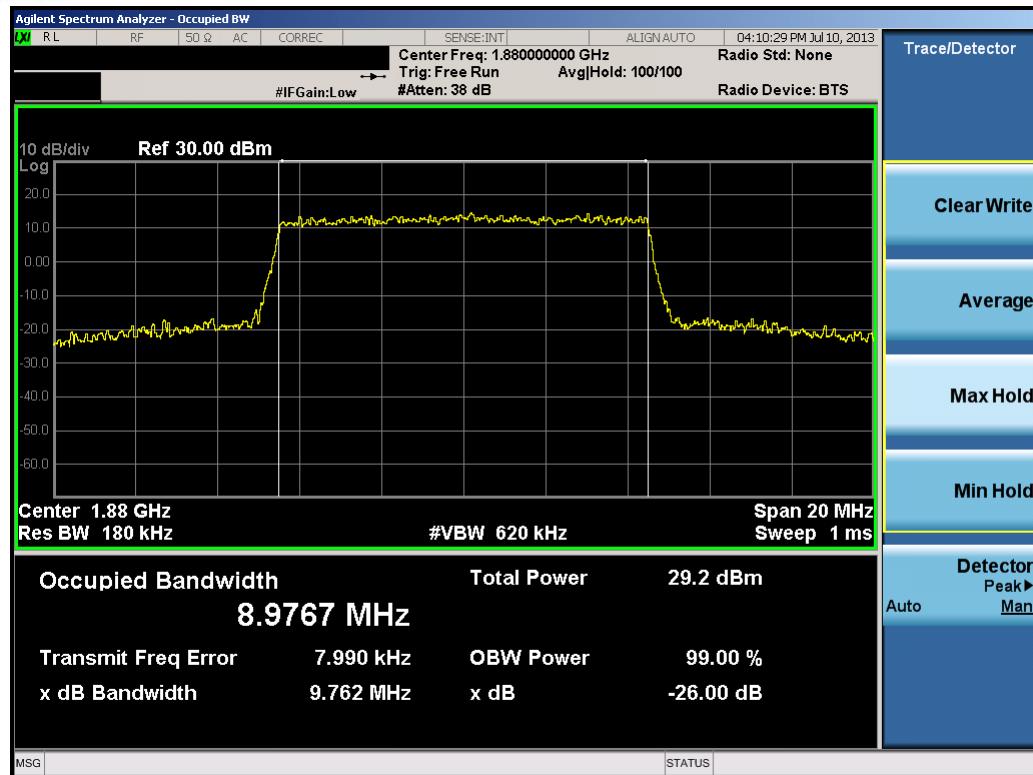


Plot 10-18. Occupied Bandwidth Plot (10.0MHz 16-QAM – RB Size 50)

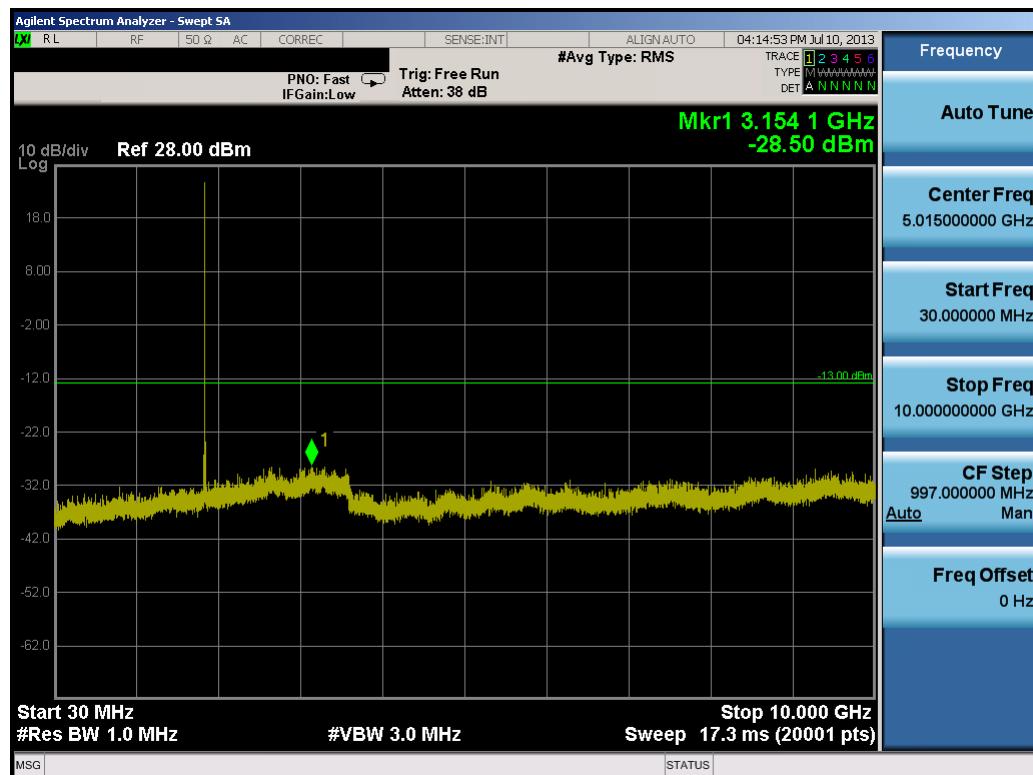


Plot 10-19. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0– Low Channel)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 82 of 88

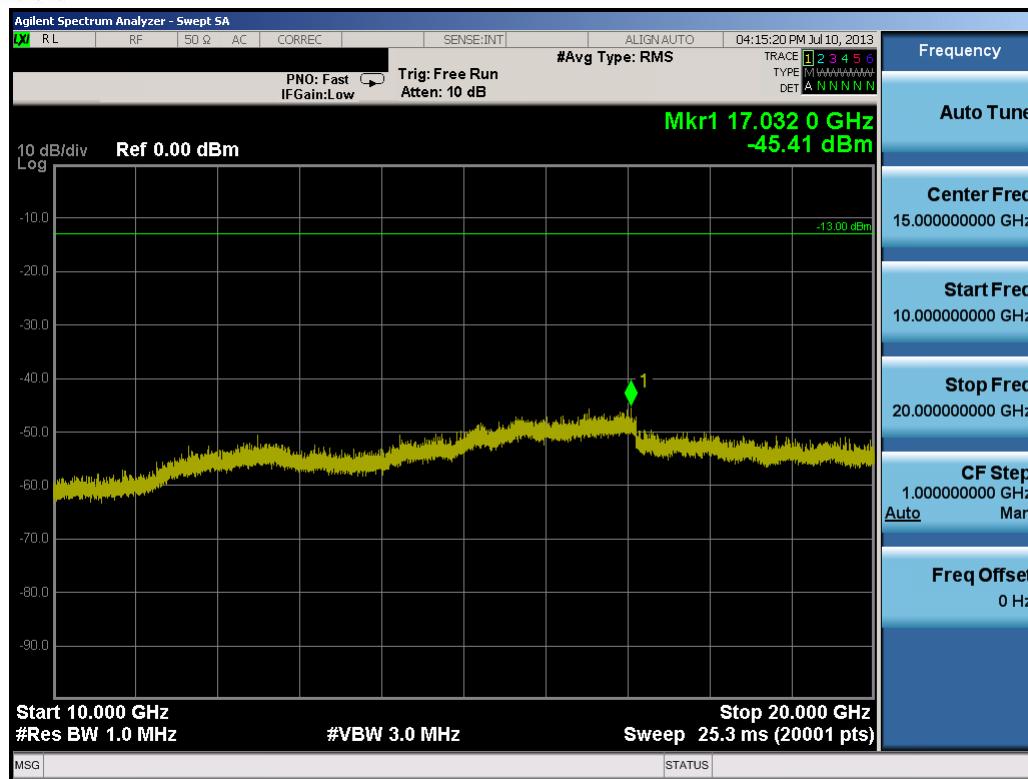


Plot 10-20. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

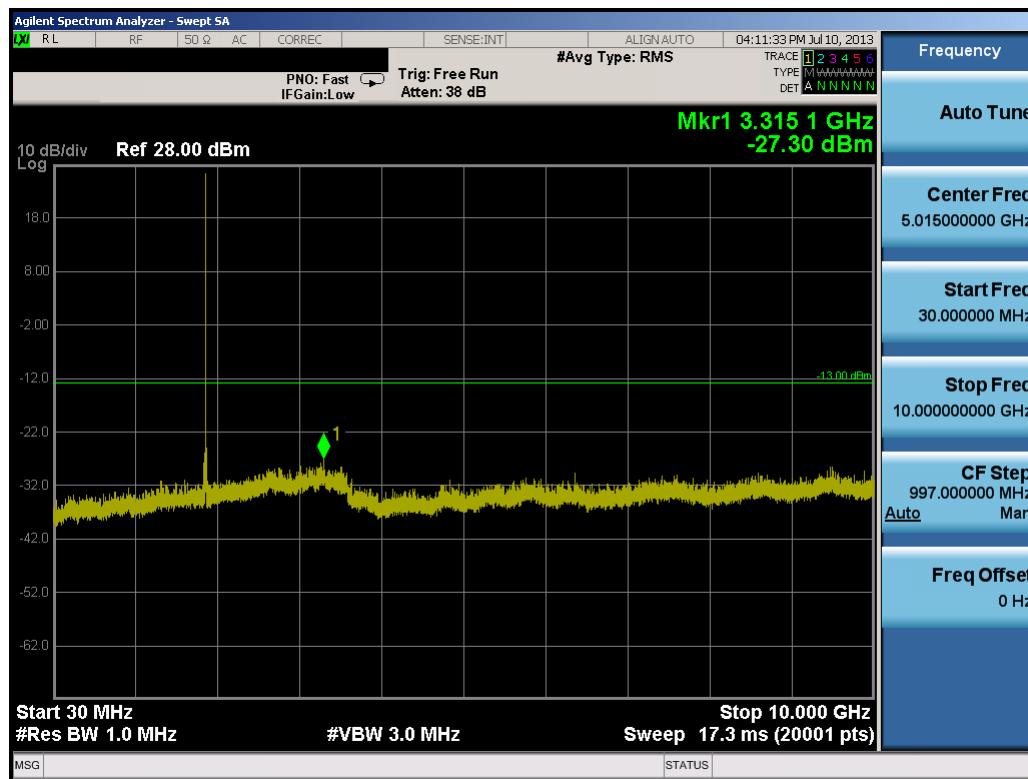


Plot 10-21. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: ZNFD800	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)				Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			

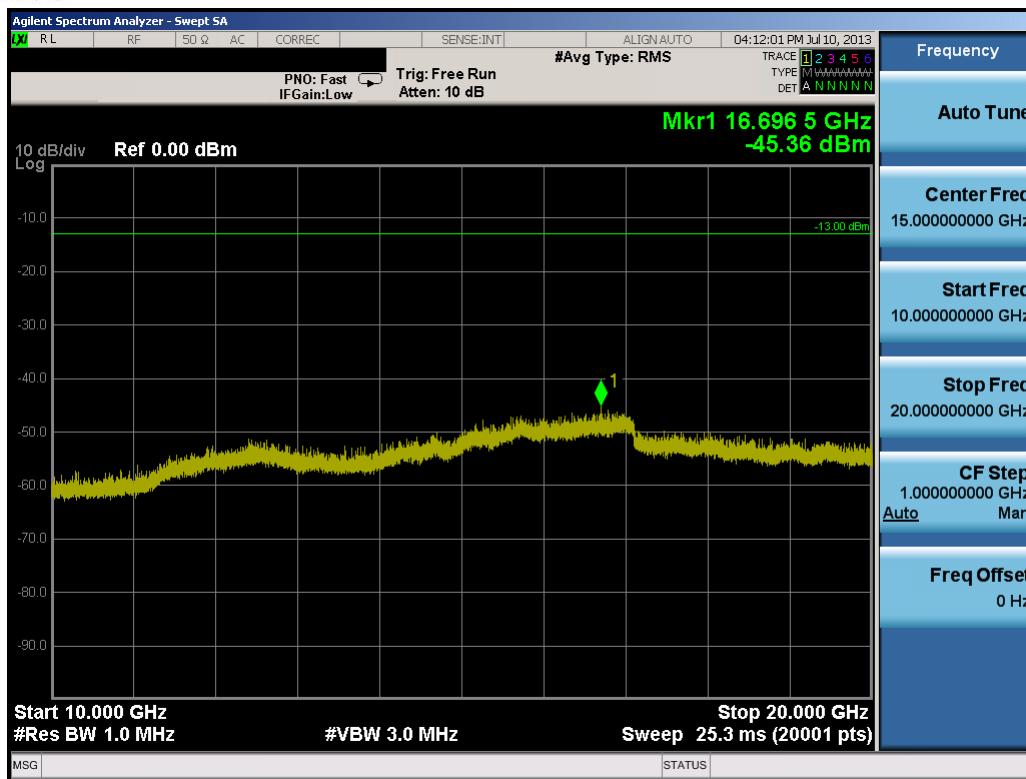


Plot 10-22. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – Mid Channel)

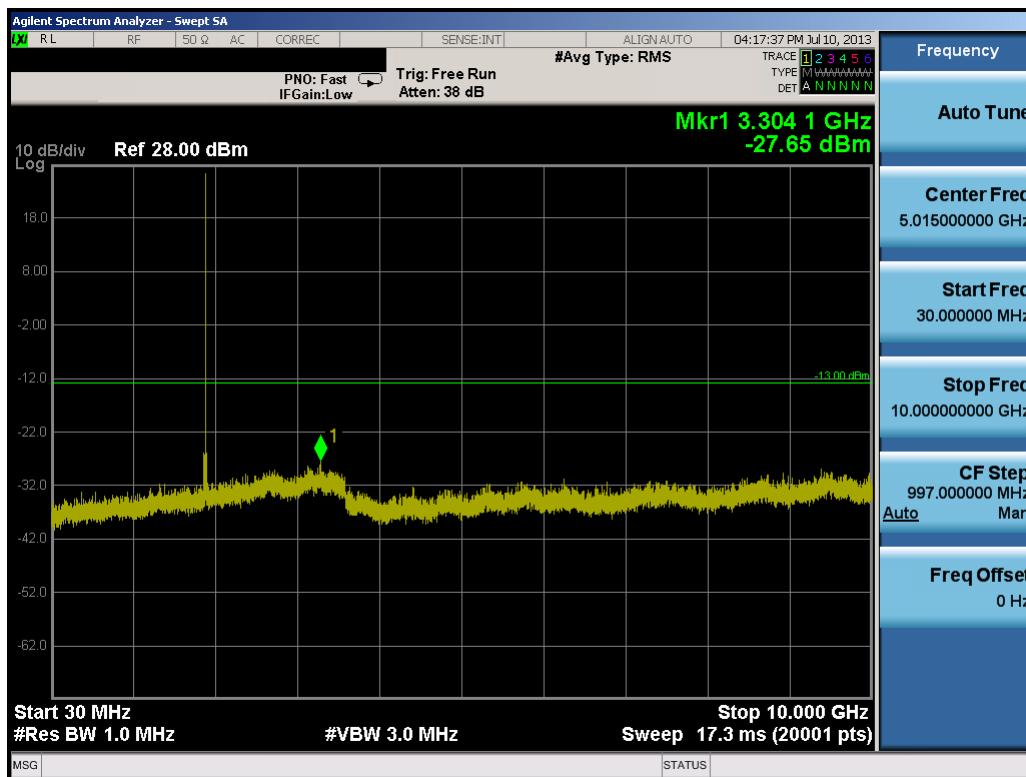

Plot 10-23. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: ZNFD800	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)				Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 84 of 88

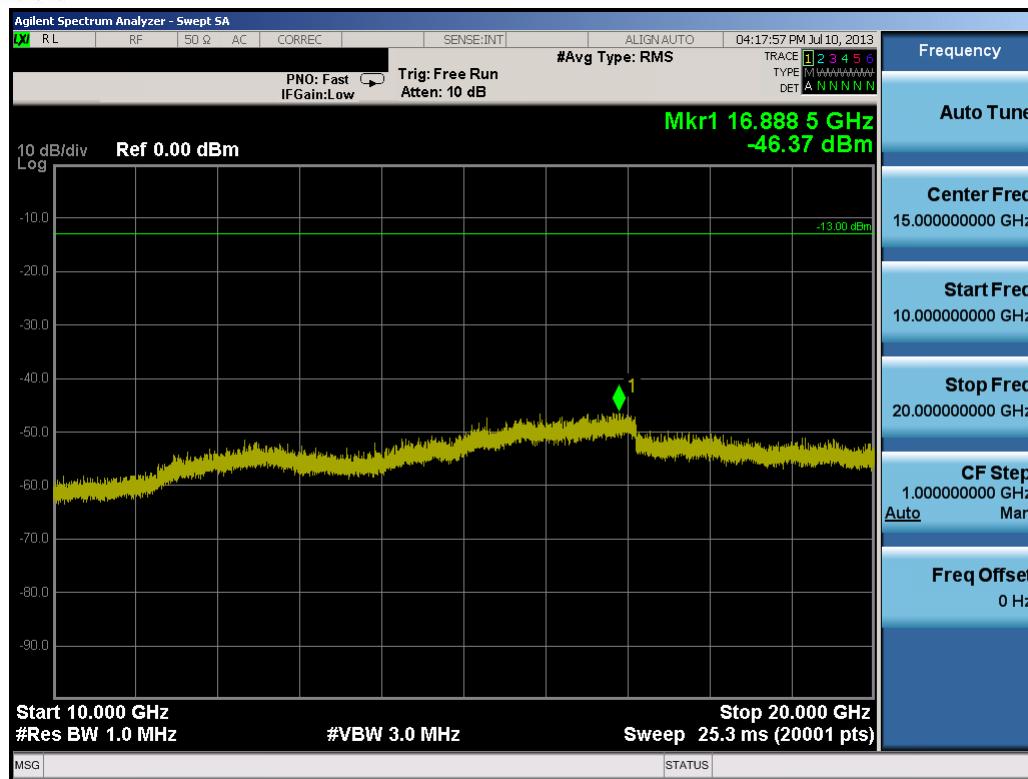


Plot 10-24. Conducted Spurious Plot (10.0MHz QPSK – RB Size 1, RB Offset 0 – High Channel)




Plot 10-25. Upper Band Edge Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset		Page 85 of 88

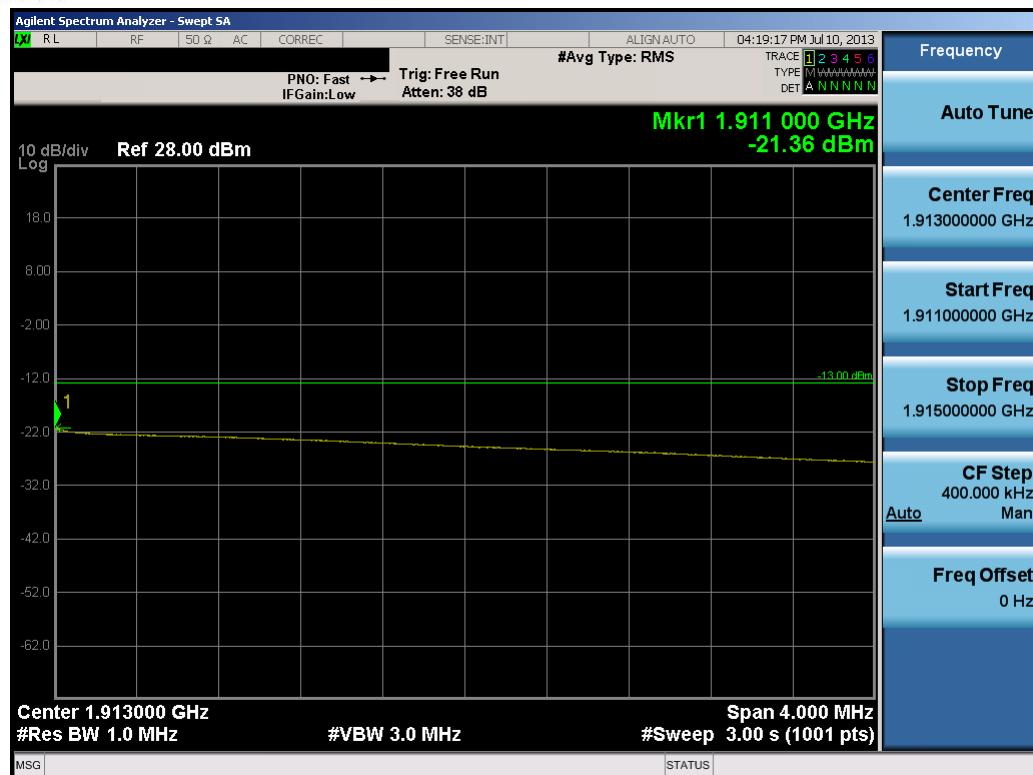


Plot 10-26. Upper Extended Band Edge Plot (10.0MHz QPSK – RB Size 50)

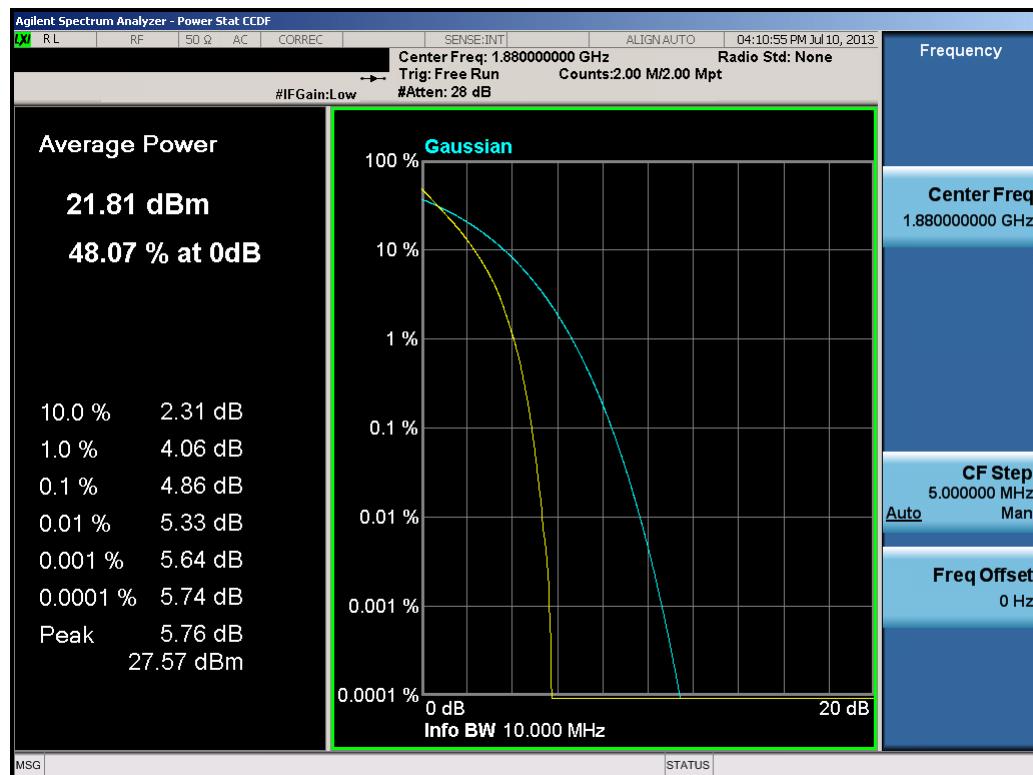

Plot 10-27. PAR Plot (10.0MHz QPSK – RB Size 50)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 86 of 88

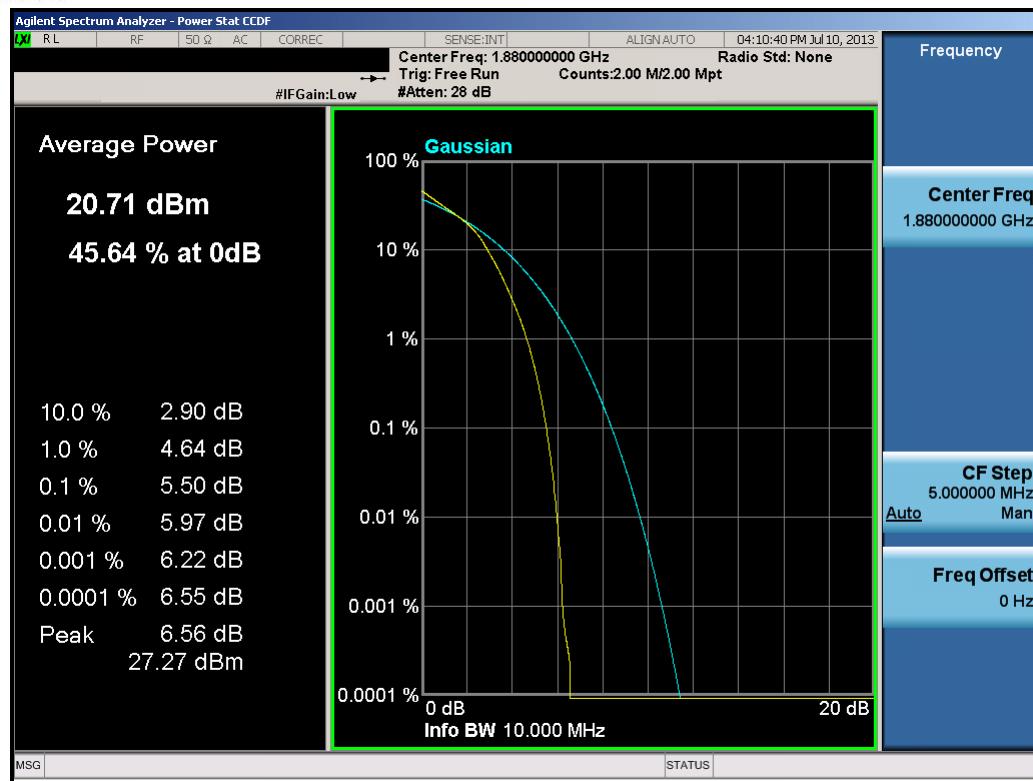

Plot 10-28. PAR Plot (10.0MHz 16-QAM – RB Size 50)

FCC ID: ZNFD800		FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 87 of 88

11.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset** **FCC ID: ZNFD800** complies with all the requirements of Parts 2, 22, 24, 27 of the FCC rules for LTE operation only.

FCC ID: ZNFD800	FCC Pt. 22, 24, 27 LTE MEASUREMENT REPORT (CERTIFICATION)			 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1306241073.ZNF	Test Dates: 07/08 - 07/11; 07/26/2013	EUT Type: Portable Handset			Page 88 of 88