# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctestlab.com



# MEASUREMENT REPORT FCC Part 15.407 UNII 802.11a/n/ac

**Applicant Name:** LG Electronics MobileComm U.S.A 1000 Sylvan Avenue Englewood Cliffs, NJ 07632

**United States** 

Date of Testing: 12/27/2016 - 2/15/2017 Test Site/Location: PCTEST Lab, Columbia, MD, USA

**Test Report Serial No.:** 1M1701180032-05-R3.ZNF

FCC ID: **ZNFH871** 

LG Electronics MobileComm U.S.A APPLICANT:

**Application Type:** Certification Model: LG-H871

LGH871, H871, LG-H872, LGH872, H872, LG-H873, LGH873, H873, LG-Additional Model(s):

H872PR, LGH872PR, H872PR

**EUT Type:** Portable Handset

**FCC Classification:** Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s): Part 15.407

KDB 789033 D02 v01r03, KDB 648474 D03 v01r04, KDB 662911 D01 Test Procedure(s):

v02r01

	Oh		AN	IT1	AN.	NT2	MIN	MO
UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
1		5180 - 5240	41.495	16.18			80.941	19.08
2A		5260 - 5320	40.272	16.05			77.511	18.89
2C	20	5500 - 5580	38.548	15.86			77.007	18.87
2C		5660 - 5720	38.282	15.83			79.021	18.98
3		5745 - 5825	43.251	16.36			87.307	19.41
1		5190 - 5230	21.086	13.24			40.362	16.06
2A		5270 - 5310	20.137	13.04			39.997	16.02
2C	40	5510 - 5550	21.727	13.37	N/A fo	r SISO	40.262	16.05
2C		5670 - 5710	19.364	12.87			37.594	15.75
3		5755 - 5795	20.941	13.21			40.261	16.05
1		5210	6.699	8.26			12.628	11.01
2A		5290	6.823	8.34			12.604	11.01
2C	80	5530	6.902	8.39			12.750	11.06
2C		5690	12.647	11.02			24.076	13.82
3		5775	13.521	11.31			25.995	14.15

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 D02 v01r03. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M1701180032-05-R3.ZNF) supersedes and replaces the previously issued test report (S/N: 1M1701180032-05-R2.ZNF) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.







FCC ID: ZNFH871	PCTEST' ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	🕦 LG	Approved by: Quality Manager	
Test Report S/N:	Test Dates:	EUT Type:		Dags 1 of 040	
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 1 of 248	
@ 2017 DCTEST Engineering Lo	2017 DOTEST Engineering Laboratory Inc.				




# TABLE OF CONTENTS

FCC PA	ART 15.407	7 MEASUREMENT REPORT	3
1.0	INTROI	DUCTION	4
	1.1	Scope	4
	1.2	PCTEST Test Location	4
2.0	PRODU	UCT INFORMATION	
	2.1	Equipment Description	
	2.2	Device Capabilities	
	2.3	Test Configuration	7
	2.4	EMI Suppression Device(s)/Modifications	7
3.0	DESCR	RIPTION OF TESTS	
	3.1	Evaluation Procedure	
	3.2	AC Line Conducted Emissions	
	3.3	Radiated Emissions	
	3.4	Environmental Conditions	
4.0	ANTEN	NNA REQUIREMENTS	10
5.0	MEASU	UREMENT UNCERTAINTY	11
6.0	TEST E	EQUIPMENT CALIBRATION DATA	12
7.0	TEST F	RESULTS	15
	7.1	Summary	15
	7.2	26dB Bandwidth Measurement – 802.11a/n/ac	14
	7.3	6dB Bandwidth Measurement – 802.11a/n/ac	47
	7.4	UNII Output Power Measurement – 802.11a/n/ac	58
	7.5	Maximum Power Spectral Density – 802.11a/n/ac	66
	7.6	Frequency Stability	110
	7.7	Radiated Spurious Emission Measurements – Above 1GHz	114
		7.7.1 Antenna-1 Radiated Spurious Emission Measurements	117
		7.7.2 Antenna-2 Radiated Spurious Emission Measurements	130
		7.7.3 Simultaneous Tx Radiated Spurious Emissions Measurements	143
		7.7.4 Antenna-1 Radiated Band Edge Measurements (20MHz BW)	151
		7.7.5 Antenna-1 Radiated Band Edge Measurements (40MHz BW)	159
		7.7.6 Antenna-1 Radiated Band Edge Measurements (80MHz BW)	167
		7.7.7 Antenna-2 Radiated Band Edge Measurements (20MHz BW)	175
		7.7.8 Antenna-2 Radiated Band Edge Measurements (40MHz BW)	183
		7.7.9 Antenna-2 Radiated Band Edge Measurements (80MHz BW)	191
		7.7.10 MIMO Radiated Band Edge Measurements (20MHz BW)	199
		7.7.11 MIMO Radiated Band Edge Measurements (40MHz BW)	207
		7.7.12 MIMO Radiated Band Edge Measurements (80MHz BW)	215
	7.8	Radiated Spurious Emissions Measurements – Below 1GHz	223
	7.9	Line-Conducted Test Data	228
8.0	CONCL	LUSION	238
Append		11a Dual Tx	
.,	A.1	Summary	239
	A.2	Output Power Measurement	240
	A.3	Power Spectral Density	
	A.4	Dual Tx Radiated Restricted Band Edge Measurements	

FCC ID: ZNFH871	PCTEST* ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 2 of 248
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset	Page 2 01 246





# MEASUREMENT REPORT FCC Part 15.407



## § 2.1033 General Information

APPLICANT: LG Electronics MobileComm U.S.A

APPLICANT ADDRESS: 1000 Sylvan Avenue

Englewood Cliffs, NJ 07632, United States

**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 7185 Oakland Mills Road, Columbia, MD 21046 USA

FCC RULE PART(S): Part 15.407

BASE MODEL: LG-H871

FCC ID: ZNFH871

FCC CLASSIFICATION: Unlicensed National Information Infrastructure (UNII)

2VY5Z, 06691.

**Test Device Serial No.:** 06527, 06684, 08531, ☐ Production ☐ Pre-Production ☐ Engineering

08556

**DATE(S) OF TEST:** 12/27/2016 - 2/15/2017

**TEST REPORT S/N:** 1M1701180032-05-R3.ZNF

# **Test Facility / Accreditations**

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



PCTEST Engineering Laboratory, Inc

DIAGNETIC COMPATIBILITY AND TELECOMORING ATION

duyal Sur

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: ZNFH871	PCTEST*	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dog 2 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 3 of 248
© 2017 PCTEST Engineering Laboratory, Inc. V 6.1				



### 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

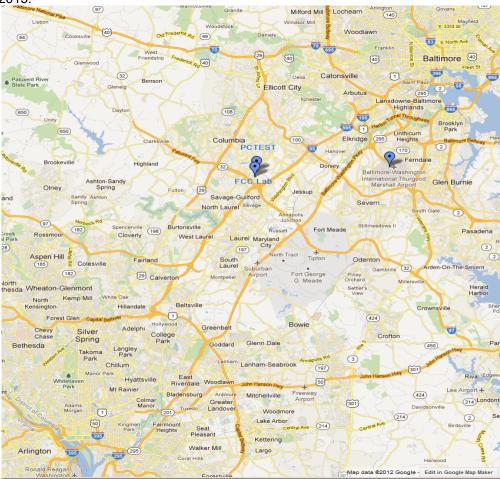


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFH871	PCTEST* ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 4 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 4 of 248
© 2017 PCTEST Engineering Laboratory, Inc.				



## 2.0 PRODUCT INFORMATION

# 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFH871**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

R	2	n	Ч	4
o	а		u	

Band	2A

#### Band 2C

### Band 3

Ch.	Frequency (MHz)
36	5180
:	÷
42	5210
	•
48	5240

Ch.	Frequency (MHz)
52	5260
:	:
56	5280
:	:
64	5320

Ch.	Frequency (MHz)
100	5500
:	:
116	5580
:	•
144	5720

Ch.	Frequency (MHz)
149	5745
:	:
157	5785
:	:
165	5825

Table 2-1. 802.11a / 802.11n / 802.11ac (20MHz) Frequency / Channel Operations

### Band 1

Ch.	Frequency (MHz)		
38	5190		
:	•		
46	5230		

# Band 2A

Ch.	Frequency (MHz)	
54	5270	
:	•	
62	5310	

### Band 2C

Ch.	Frequency (MHz)
102	5510
:	:
110	5550
:	:
142	5710

Ra	n	А	3
Da		u	J

Ch.	Frequency (MHz)		
151	5755		
:			
159	5795		

Table 2-2. 802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

#### Band 1

Ch.	Frequency (MHz	
42	5210	

#### Band 2A

Ch.	Frequency (MHz)	
58	5290	

## Band 2C

Ch.	Frequency (MHz)		
106	5530		
:	:		
138	5690		

Ra	n	d	3

Ch.	Frequency (MHz)	
155	5775	

Table 2-3. 802.11ac (80MHz BW) Frequency / Channel Operations

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	<b>⊕</b> LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 5 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 5 of 248



#### Notes:

1. 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033 D02 v01r03. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles					
802.11 Mode/Band		Duty Cycle [%]			
		ANT1	ANT2	MIMO	
5GHz	а	99.3	99.3	99.13	
	n (HT20)	99.2	99.2	99.1	
	n (HT40)	99.2	99.2	99.4	
	ac (HT80)	98.2	98.4	98.1	

**Table 2-4. Duty Cycle Measurements** 

2. The device employs MIMO technology. Below are the possible configurations.

		SI	SO	SE	M	CI	DD D	RS	DB
WiFi Confi	gurations	Primary Antenna	Secondary Antenna	Primary Antenna	Secondary Antenna	Primary Antenna	Secondary Antenna	Primary Antenna	Secondary Antenna
FOUL-	11a	0	Х	Х	Х	0	0	0	2.4GHz
5GHz	11n/ac	0	X	0	0	0	0	0	2.4GHz

**Table 2-5. MIMO Configurations** 

✓= Support; × = NOT Support SISO = Single Input Single Output

**SDM** = Spatial Diversity Multiplexing – MIMO function

**CDD** = Cyclic Delay Diversity - 2Tx Function

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)

6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n - 20MHz)

13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n - 40MHz BW)

29.3/32.5, 58.5/65, 87.8/97.5, 117/130, 175.5/195, 234/260, 263.3/292.5, 292.5/325, 351/390, 390/433.3 (ac

– 80MHz BW)

13/14.4, 26.28.9, 39/43.3, 52/57.8, 78/86.7, 104/115.6, 117/130, 130/144.4MBps (MIMO n/ac - 20MHz)

156/173Mbps (MIMO ac - 20MHz)

27/30, 54/60, 81/90, 108/120, 162/180, 216/240, 243,270, 270/300Mbps (MIMO n/ac - 40MHz) 324/360,

360/400Mbps (MIMO ac – 40MHz)

58.5/65, 117/130, 175.5/195, 234/260, 351/390, 468/520, 526.5/585, 585/650, 702/780, 780/866.7Mbps

(MIMO ac - 80MHz)

3. 802.11a/g modes are capable of transmitting simultaneously on two antennas in this device using Cyclic Delay Diversity. 802.11n/ac modes are capable of transmitting simultaneously on two antennas using Cyclic Delay Diversity and Spatial Diversity Multiplexing (2x2 MIMO).

FCC ID: ZNFH871	PCTEST* ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	🕒 LG	Approved by: Quality Manager	
Test Report S/N:	Test Dates:	EUT Type:		Dags 6 of 249	
1M1701180032-05-R3.ZN	F 12/27/2016 - 2/15/2017	Portable Handset		Page 6 of 248	
© 2017 PCTEST Engineering I	2017 PCTEST Engineering Laboratory, Inc.				



4. This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in this test report.

Scenario A - Config-1: ANT1 transmitting in 2.4GHz mode and ANT2 in 5GHz mode

Description	2.4 GHz Tx	5 GHz Tx
Antenna	1	2
Channel	11	100
Operating Frequency(MHz)	2462	5500
Data Rate	1 Mbps	6 Mbps
Mode	802.11b	802.11a

Table 2-6. Config-1 (ANT1 2.4GHz & ANT2 5GHz)

Scenario B - Config-2: ANT1 transmitting in 5GHz mode and ANT2 in 2.4GHz mode

Description	5 GHz Tx	2.4 GHz Tx
Antenna	1	2
Channel	100	11
Operating Frequency(MHz)	5500	2462
Data Rate	6 Mbps	1 Mbps
Mode	802.11a	802.11b

Table 2-7. Config-2 (ANT1 5GHz & ANT2 2.4GHz)

## 2.3 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v01r03. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on a certified wireless charging pad (WCP) while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

## 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dog 7 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 7 of 248



### 3.0 DESCRIPTION OF TESTS

#### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v01r03 were used in the measurement of the EUT.

Deviation from measurement procedure......None

#### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz,  $50\Omega/50\mu$ H Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: ZNFH871

Test Report S/N:

1M1701180032-05-R3.ZNF

Test Dates:

12/27/2016 - 2/15/2017

FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)

LG Approved by:
Quality Manager

Page 8 of 248



#### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm. For measurements above 1GHz, a high density expanded polystyrene block is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

#### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).



#### **ANTENNA REQUIREMENTS** 4.0

## Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

#### **Conclusion:**

The EUT complies with the requirement of §15.203.

FCC ID: ZNFH871	PCTEST* ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	🕦 LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 10 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 10 of 248
@ 2017 DOTECT Engineering La	hauatami laa	•	•	1/61



#### MEASUREMENT UNCERTAINTY 5.0

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (±dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	🕦 LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 11 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 11 of 248
@ 2017 DCTEST Engineering Lo	horotony Inc			V 6 1



# 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2006.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/4/2016	Annual	3/4/2017	RE1
-	WL25-1	Conducted Cable Set (25GHz)	4/11/2016	Annual	4/11/2017	WL25-1
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	3/1/2016	Annual	3/1/2017	US42510244
Agilent	N9020A	MXA Signal Analyzer	10/28/2016	Annual	10/28/2017	US46470561
Anritsu	MA2411B	Pulse Sensor	10/14/2015	Biennial	10/14/2017	846215
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Emco	3115	Horn Antenna (1-18GHz)	3/10/2016	Biennial	3/10/2018	9704-5182
Espec	ESX-2CA	Environmental Chamber	3/4/2016	Annual	3/4/2017	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/26/2016	Biennial	4/26/2018	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	8/28/2016	Biennial	8/28/2018	135427
ETS Lindgren	3160-10	26.5-40 GHz Standard Gain Horn	8/28/2016	Biennial	8/28/2018	130993
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	4/26/2016	Annual	4/26/2017	251425001
K & L	11SH10-3075/U18000	High Pass Filter	7/11/2016	Annual	7/11/2017	11SH10-3075/U18000-2
K & L	11SH10-6000/T18000	High Pass Filter	7/11/2016	Annual	7/11/2017	11SH10-6000/T18000-1
PCTEST	-	EMC Switch System	7/11/2016	Annual	7/11/2017	NM1
PCTEST	-	EMC Switch System	7/6/2016	Annual	7/6/2017	NM2
Rhode & Schwarz	TS-PR18	Pre-Amplifier	3/7/2016	Annual	3/7/2017	101622
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	5/16/2016	Annual	5/16/2017	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/15/2016	Annual	7/15/2017	100348
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/7/2016	Annual	3/7/2017	100071
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	7/30/2015	Biennial	7/30/2017	310233

Table 6-1. Annual Test Equipment Calibration Schedule

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 10 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 12 of 248



#### 7.0 **TEST RESULTS**

#### 7.1 Summary

Company Name: LG Electronics MobileComm U.S.A

FCC ID: ZNFH871

Method/System: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	26dB Bandwidth	N/A		PASS	Section 7.2
15.407(e)	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a)	-CONDUCTED	PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a)		PASS	Section 7.5
15.407(g)	Frequency Stability	N/A		PASS	Section 7.6
15.407(h)	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2), (3), (4)	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b)		PASS	Section 7.7
15.205, 15.407(b.1), (4), (5), (6)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	RADIATED	PASS	Section 7.7, 7.8
15.407	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 7.9

#### Table 7-1. Summary of Test Results

#### Notes:

- All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation," Version 4.4.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.1.5.

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 12 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 13 of 248



#### 26dB Bandwidth Measurement - 802.11a/n/ac

#### **Test Overview and Limit**

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r03, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

#### **Test Procedure Used**

KDB 789033 D02 v01r03 - Section C

#### **Test Settings**

- 1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = approximately 1% of the emission bandwidth
- 3. VBW  $\geq$  3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold

#### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-1. Test Instrument & Measurement Setup

#### **Test Notes**

None.

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	🕒 LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 14 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 14 of 248



# Antenna-1 26 dB Bandwidth Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
	5180	36	а	6	20.89
	5200	40	а	6	21.11
	5240	48	а	6	21.21
_	5180	36	n (20MHz)	6.5/7.2 (MCS0)	20.89
Band 1	5200	40	n (20MHz)	6.5/7.2 (MCS0)	21.05
ä	5240	48	n (20MHz)	6.5/7.2 (MCS0)	22.00
	5190	38	n (40MHz)	13.5/15 (MCS0)	38.96
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.59
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	80.54
	5260	52	а	6	20.94
	5280	56	а	6	20.74
	5320	64	а	6	20.89
2A	5260	52	n (20MHz)	6.5/7.2 (MCS0)	21.24
Band 2A	5280	56	n (20MHz)	6.5/7.2 (MCS0)	21.35
Ba	5320	64	n (20MHz)	6.5/7.2 (MCS0)	20.83
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.32
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.51
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	80.57
	5500	100	а	6	20.89
	5580	116	а	6	21.09
	5720	144	а	6	21.19
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	21.44
2C	5580	116	n (20MHz)	6.5/7.2 (MCS0)	21.44
Band 2C	5720	144	n (20MHz)	6.5/7.2 (MCS0)	23.81
Ba	5510	102	n (40MHz)	13.5/15 (MCS0)	39.23
	5550	110	n (40MHz)	13.5/15 (MCS0)	39.45
	5710	142	n (40MHz)	13.5/15 (MCS0)	39.44
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	80.90
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	80.91

Table 7-2. Conducted Bandwidth Measurements

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 15 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 15 of 248





Plot 7-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) - Ch. 36)



Plot 7-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) - Ch. 40)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	⊕ LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 16 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 16 of 248





Plot 7-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) - Ch. 48)



Plot 7-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) - Ch. 36)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 17 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 17 of 248





Plot 7-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) - Ch. 40)



Plot 7-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) - Ch. 48)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	⊕ LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 10 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 18 of 248





Plot 7-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) - Ch. 38)



Plot 7-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) - Ch. 46)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	⊕ LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 10 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 19 of 248





Plot 7-9. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) - Ch. 42)



Plot 7-10. 26dB Bandwidth Plot (802.11a (UNII Band 2A) - Ch. 52)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 20 of 248
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset	raye 20 01 246





Plot 7-11. 26dB Bandwidth Plot (802.11a (UNII Band 2A) - Ch. 56)



Plot 7-12. 26dB Bandwidth Plot (802.11a (UNII Band 2A) - Ch. 64)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 21 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 21 of 248





Plot 7-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) - Ch. 52)



Plot 7-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) - Ch. 56)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 22 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 22 of 248






Plot 7-15. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) - Ch. 64)



Plot 7-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) - Ch. 54)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	<b>⊕</b> LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 22 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 23 of 248



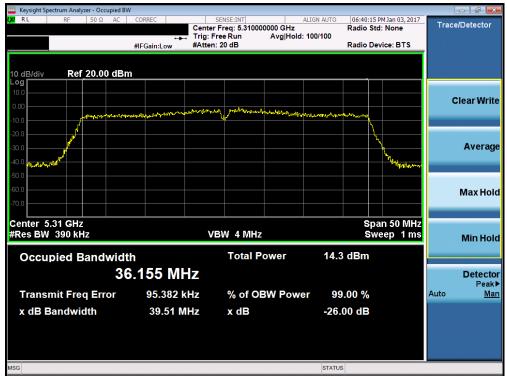

Plot 7-17. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) - Ch. 62)



Plot 7-18. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) - Ch. 58)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 24 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 24 of 248





Plot 7-19. 26dB Bandwidth Plot (802.11a (UNII Band 2C) - Ch. 100)




Plot 7-20. 26dB Bandwidth Plot (802.11a (UNII Band 2C) - Ch. 116)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 05 of 040
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 25 of 248





Plot 7-21. 26dB Bandwidth Plot (802.11a (UNII Band 2C) - Ch. 144)

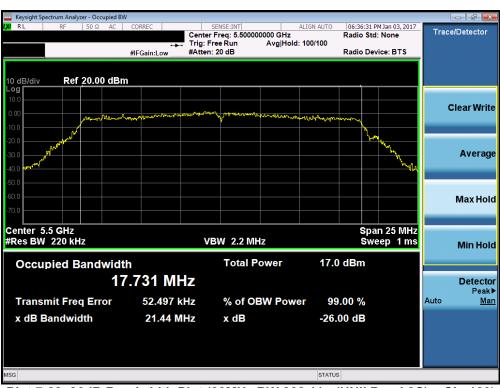

Plot 7-22. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) - Ch. 100)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo 26 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 26 of 248





Plot 7-23. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) - Ch. 116)



Plot 7-24. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) - Ch. 144)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	⊕ LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 27 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 27 of 248





Plot 7-25. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) - Ch. 102)



Plot 7-26. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) - Ch. 110)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	<b>⊕</b> LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 20 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 28 of 248






Plot 7-27. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) - Ch. 142)



Plot 7-28. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) - Ch. 106)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 20 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 29 of 248



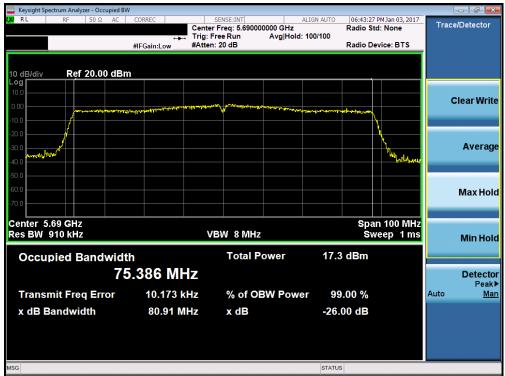

Plot 7-29. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) - Ch. 138)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dago 20 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 30 of 248



# **Antenna-2 26dB Bandwidth Measurements**

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
	5180	36	а	6	20.82
	5200	40	а	6	22.69
	5240	48	а	6	22.99
_	5180	36	n (20MHz)	6.5/7.2 (MCS0)	21.41
Band 1	5200	40	n (20MHz)	6.5/7.2 (MCS0)	24.04
Ä	5240	48	n (20MHz)	6.5/7.2 (MCS0)	24.76
	5190	38	n (40MHz)	13.5/15 (MCS0)	38.92
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.17
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	80.38
	5260	52	а	6	23.22
	5280	56	а	6	23.04
	5320	64	а	6	20.64
2A	5260	52	n (20MHz)	6.5/7.2 (MCS0)	23.44
Band 2A	5280	56	n (20MHz)	6.5/7.2 (MCS0)	23.28
Ba	5320	64	n (20MHz)	6.5/7.2 (MCS0)	21.09
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.67
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.14
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	80.64
	5500	100	а	6	21.15
	5580	116	а	6	24.92
	5720	144	а	6	24.04
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	21.20
2C	5580	116	n (20MHz)	6.5/7.2 (MCS0)	24.96
Band 2C	5720	144	n (20MHz)	6.5/7.2 (MCS0)	24.96
Ba	5510	102	n (40MHz)	13.5/15 (MCS0)	39.12
	5550	110	n (40MHz)	13.5/15 (MCS0)	39.75
	5710	142	n (40MHz)	13.5/15 (MCS0)	39.79
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	81.10
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	80.90


Table 7-3. Conducted Bandwidth Measurements

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 21 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 31 of 248





Plot 7-30. 26dB Bandwidth Plot (802.11a (UNII Band 1) - Ch. 36)

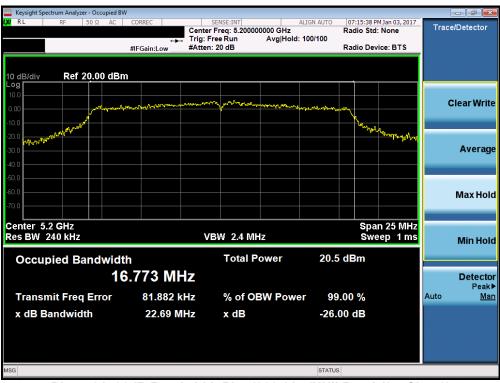

Plot 7-31. 26dB Bandwidth Plot (802.11a (UNII Band 1) - Ch. 40)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 22 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 32 of 248





Plot 7-32. 26dB Bandwidth Plot (802.11a (UNII Band 1) - Ch. 48)



Plot 7-33. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) - Ch. 36)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 22 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 33 of 248





Plot 7-34. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) - Ch. 40)




Plot 7-35. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) - Ch. 48)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo 24 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 34 of 248





Plot 7-36. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) - Ch. 38)

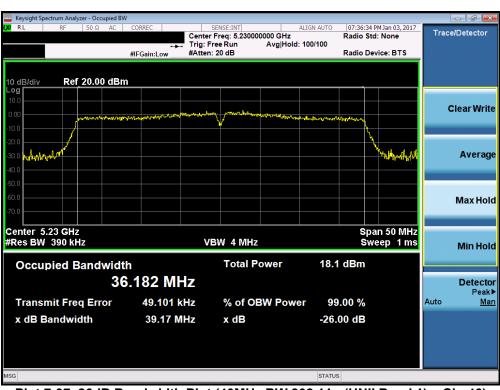

Plot 7-37. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) - Ch. 46)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo 25 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 35 of 248






Plot 7-38. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) - Ch. 42)



Plot 7-39. 26dB Bandwidth Plot (802.11a (UNII Band 2A) - Ch. 52)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 26 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 36 of 248



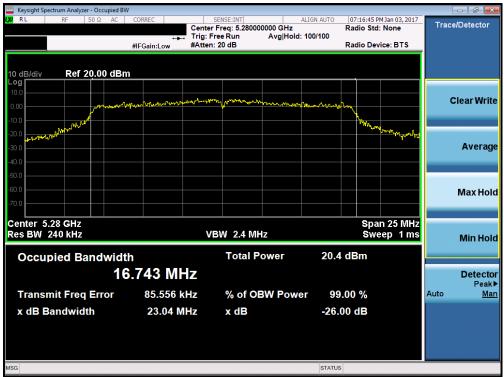

Plot 7-40. 26dB Bandwidth Plot (802.11a (UNII Band 2A) - Ch. 56)



Plot 7-41. 26dB Bandwidth Plot (802.11a (UNII Band 2A) - Ch. 64)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 27 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 37 of 248





Plot 7-42. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) - Ch. 52)



Plot 7-43. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) - Ch. 56)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 20 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 38 of 248






Plot 7-44. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) - Ch. 64)



Plot 7-45. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) - Ch. 54)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	(CERTIFICATION)		Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 20 of 249
1M1701180032-05-R3.ZNI	12/27/2016 - 2/15/2017	Portable Handset		Page 39 of 248



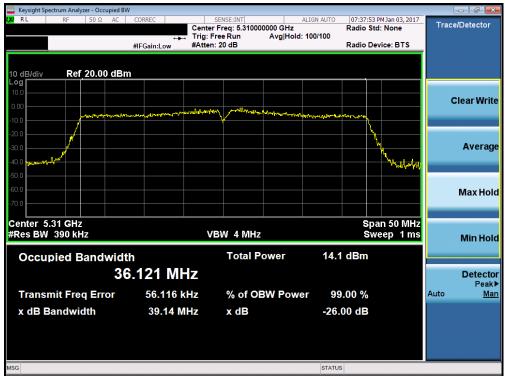

Plot 7-46. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) - Ch. 62)



Plot 7-47. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) - Ch. 58)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 40 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 40 of 248





Plot 7-48. 26dB Bandwidth Plot (802.11a (UNII Band 2C) - Ch. 100)



Plot 7-49. 26dB Bandwidth Plot (802.11a (UNII Band 2C) - Ch. 116)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dags 44 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset	Page 41 of 248





Plot 7-50. 26dB Bandwidth Plot (802.11a (UNII Band 2C) - Ch. 144)



Plot 7-51. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) - Ch. 100)

FCC II	D: ZNFH871	PCTEST' ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager	
Test R	eport S/N:	Test Dates:	EUT Type:	Page 42 of 248	
1M170	1180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset	Page 42 01 246	
@ 2017	© 2017 PCTEST Engineering Laboratory Inc.				





Plot 7-52. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) - Ch. 116)



Plot 7-53. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) - Ch. 144)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 42 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 43 of 248






Plot 7-54. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) - Ch. 102)



Plot 7-55. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) - Ch. 110)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 44 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 44 of 248



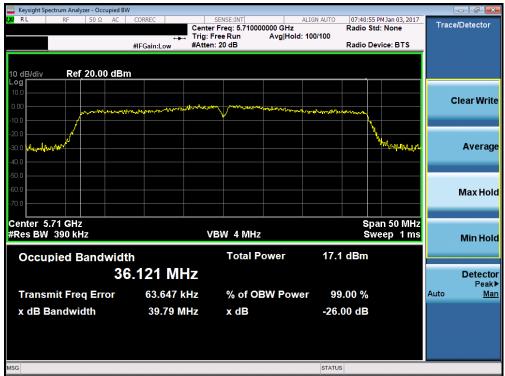

Plot 7-56. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) - Ch. 142)



Plot 7-57. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) - Ch. 106)

FCC ID: ZNFH871	PCTEST* ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager	
Test Report S/N:	Test Dates:	EUT Type:		Dags 45 of 240	
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 45 of 248	
2017 PCTEST Engineering Laboratory Inc.					





Plot 7-58. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) - Ch. 138)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo 46 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 46 of 248



# 6dB Bandwidth Measurement - 802.11a/n/ac §15.407 (e)

### **Test Overview and Limit**

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r03, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 - 5.850GHz band, the 6dB bandwidth must be  $\geq 500$  kHz.

### **Test Procedure Used**

KDB 789033 D02 v01r03 - Section C

### **Test Settings**

- 1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 100 kHz
- 3.  $VBW > 3 \times RBW$
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple

## **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-2. Test Instrument & Measurement Setup

## **Test Notes**

None.


FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 47 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 47 of 248



# Antenna-1 6 dB Bandwidth Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
	5745	149	а	6	16.34
	5785	157	а	6	16.33
	5825	165	а	6	16.32
က	5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.18
Band	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.30
m	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.55
	5755	151	n (40MHz)	13.5/15 (MCS0)	36.30
	5795	159	n (40MHz)	13.5/15 (MCS0)	35.79
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	74.84

**Table 7-4. Conducted Bandwidth Measurements** 

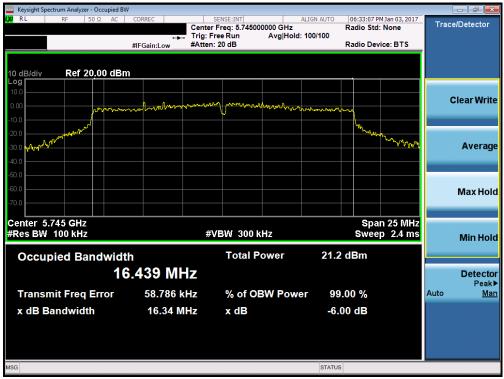

Plot 7-59. 6dB Bandwidth Plot (802.11a (UNII Band 3) - Ch. 149)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 40 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 48 of 248





Plot 7-60. 6dB Bandwidth Plot (802.11a (UNII Band 3) - Ch. 157)



Plot 7-61. 6dB Bandwidth Plot (802.11a (UNII Band 3) - Ch. 165)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 49 of 248
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset	raye 49 01 246





Plot 7-62. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) - Ch. 149)



Plot 7-63. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) - Ch. 157)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 50 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 50 of 248





Plot 7-64. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) - Ch. 165)




Plot 7-65. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) - Ch. 151)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo 51 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 51 of 248





Plot 7-66. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) - Ch. 159)

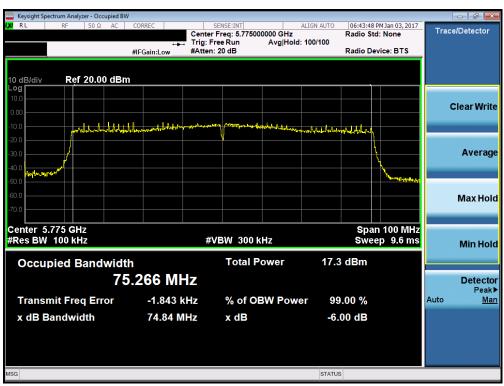

Plot 7-67. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) - Ch. 155)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 52 of 248
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		raye 32 01 246



# **Antenna-2 6dB Bandwidth Measurements**

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
	5745	149	а	6	15.58
	5785	157	а	6	16.00
	5825	165	а	6	16.09
က	5745	149	n (20MHz)	6.5/7.2 (MCS0)	16.37
Band	5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.57
m	5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.55
	5755	151	n (40MHz)	13.5/15 (MCS0)	35.79
	5795	159	n (40MHz)	13.5/15 (MCS0)	36.32
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.79

**Table 7-5. Conducted Bandwidth Measurements** 



Plot 7-68. 6dB Bandwidth Plot (802.11a (UNII Band 3) - Ch. 149)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg F2 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset	Page 53 of 248





Plot 7-69. 6dB Bandwidth Plot (802.11a (UNII Band 3) - Ch. 157)



Plot 7-70. 6dB Bandwidth Plot (802.11a (UNII Band 3) - Ch. 165)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 54 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset	Page 54 of 248





Plot 7-71. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) - Ch. 149)




Plot 7-72. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) - Ch. 157)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo EE of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 55 of 248





Plot 7-73. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) - Ch. 165)

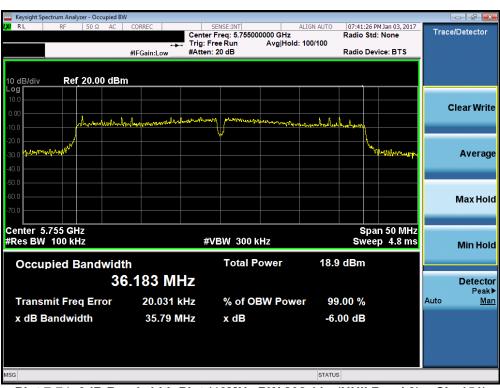


Plot 7-74. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) - Ch. 151)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	⊕ LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg F6 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 56 of 248





Plot 7-75. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) - Ch. 159)

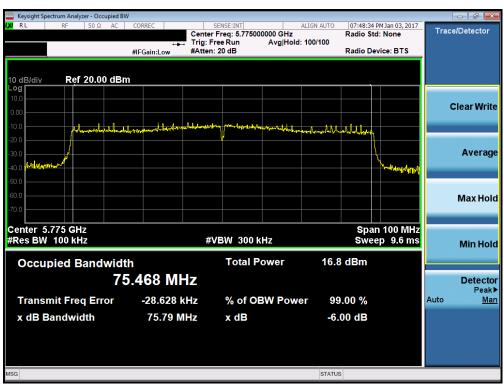

Plot 7-76. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) - Ch. 155)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 57 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 57 of 248



# 7.4 UNII Output Power Measurement – 802.11a/n/ac §15.407(a.1.iv) §15.407(a.2) §15.407(a.3)

#### **Test Overview and Limits**

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r03, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm).

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and 11 dBm +  $10log_{10}(26dB BW) = 11 dBm + 10log_{10}(20.74) = 24.17dBm$ .

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and 11 dBm +  $10\log_{10}(26dB \text{ BW}) = 11 \text{ dBm} + 10\log_{10}(20.89) = 24.20dBm$ .

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm).

### **Test Procedure Used**

KDB 789033 D02 v01r03 – Section E)3)b) Method PM-G KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

### **Test Settings**

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-3. Test Instrument & Measurement Setup

## **Test Notes**

None

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dags 50 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset	Page 58 of 248



# **Antenna-1 Conducted Output Power Measurements**

		5GHz (20MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	Detector	IEEE Transmission Mode		
			802.11a	802.11n	802.11ac
5180	36	AVG	12.37	12.22	12.31
5200	40	AVG	16.18	16.09	15.96
5220	44	AVG	16.11	16.07	15.97
5240	48	AVG	16.04	16.09	16.02
5260	52	AVG	16.01	15.96	15.78
5280	56	AVG	15.89	15.88	15.81
5300	60	AVG	16.05	15.76	15.95
5320	64	AVG	12.02	12.04	12.11
5500	100	AVG	12.25	12.00	12.18
5580	116	AVG	15.86	15.86	15.79
5660	132	AVG	15.83	15.68	15.67
5720	144	AVG	15.76	15.67	15.56
5745	149	AVG	16.36	15.52	16.08
5785	157	AVG	15.95	16.01	15.85
5825	165	AVG	12.27	12.11	12.08

Table 7-6. 20MHz BW (UNII) Maximum Conducted Output Power

Even (MU=1	α [MHz] Channel		rog [MHz] Channel Detect		,	z) Conducted [dBm]
Freq [MHz]	Channel	Detector	IEEE Transmission Mo		Detector IEEE Transmission Mod	ission Mode
			802.11n	802.11ac		
5190	38	AVG	9.38	9.33		
5230	46	AVG	13.24	13.23		
5270	54	AVG	13.01	13.04		
5310	62	AVG	9.22	9.38		
5510	102	AVG	9.48	9.43		
5550	110	AVG	13.37	13.29		
5670	134	AVG	12.76	12.83		
5710	142	AVG	12.71	12.87		
5755	151	AVG	13.21	13.09		
5795	159	AVG	13.03	13.03		

Table 7-7. 40MHz BW (UNII) Maximum Conducted Output Power

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	G	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dago 50 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 59 of 248



5GHz (80MHz) Conducted Power [dBm]					
Freq [MHz]	Channel	Detector	IEEE Transmission Mode		
			802.11ac		
5210	42	AVG	8.26		
5290	58	AVG	8.34		
5530	106	AVG	8.39		
5690	138	AVG	11.02		
5775	155	AVG	11.31		

Table 7-8. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo 60 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 60 of 248



# **Antenna-2 Conducted Output Power Measurements**

		5GHz (20MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	Detector	IEEE Transmission Mode		
			802.11a	802.11n	802.11ac
5180	36	AVG	12.21	11.92	11.96
5200	40	AVG	15.96	15.87	15.68
5220	44	AVG	15.85	15.86	15.79
5240	48	AVG	15.97	15.90	15.87
5260	52	AVG	15.71	15.68	15.65
5280	56	AVG	15.76	15.71	15.59
5300	60	AVG	15.71	15.54	15.66
5320	64	AVG	11.88	11.68	11.72
5500	100	AVG	12.33	12.08	12.08
5580	116	AVG	15.85	15.83	15.82
5660	132	AVG	16.10	15.79	15.78
5720	144	AVG	15.63	15.51	15.53
5745	149	AVG	16.44	16.47	16.45
5785	157	AVG	16.06	16.00	15.83
5825	165	AVG	11.51	11.91	12.02

Table 7-9. 20MHz BW (UNII) Maximum Conducted Output Power

Even (MU=1	Freq [MHz] Channel		5GHz (40MHz) Conducted Power [dBm]			
rreq [IVIIIZ]	Channel	Detector	IEEE Transmission M		IEEE Transmission Mode	ission Mode
			802.11n	802.11ac		
5190	38	AVG	9.02	8.94		
5230	46	AVG	12.85	12.83		
5270	54	AVG	13.01	12.92		
5310	62	AVG	9.02	8.94		
5510	102	AVG	9.02	9.02		
5550	110	AVG	12.68	12.67		
5670	134	AVG	12.68	12.65		
5710	142	AVG	12.56	12.54		
5755	151	AVG	12.86	12.78		
5795	159	AVG	12.54	12.51		

Table 7-10. 40MHz BW (UNII) Maximum Conducted Output Power

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 61 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset	Page 61 of 248



5GHz (80MHz) Conducted Power [dBm]						
Freq [MHz]	Channel	Detector	IEEE Transmission Mode			
			802.11ac			
5210	42	AVG	7.73			
5290	58	AVG	7.62			
5530	106	AVG	7.67			
5690	138	AVG	10.58			
5775	155	AVG	10.96			

Table 7-11. 80MHz BW (UNII) Maximum Conducted Output Power

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo 62 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 62 of 248



# **MIMO Maximum Conducted Output Power Measurements**

		5GHz (20MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	Detector	IEEE Transmission Mode		
			ANT1	ANT2	MIMO
5180	36	AVG	12.22	11.92	15.08
5200	40	AVG	16.09	15.87	18.99
5220	44	AVG	16.07	15.86	18.98
5240	48	AVG	16.09	15.90	19.01
5260	52	AVG	15.96	15.68	18.83
5280	56	AVG	15.88	15.71	18.81
5300	60	AVG	15.76	15.54	18.66
5320	64	AVG	12.04	11.68	14.87
5500	100	AVG	12.00	12.08	15.05
5580	116	AVG	15.86	15.83	18.86
5660	132	AVG	15.68	15.79	18.75
5720	144	AVG	15.67	15.51	18.60
5745	149	AVG	15.52	16.47	19.03
5785	157	AVG	16.01	16.00	19.02
5825	165	AVG	12.11	11.91	15.02

Table 7-12. MIMO 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dega 62 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset	Page 63 of 248



			5GHz (20MHz) Conducted Power [dBm]		
Freq [MHz]	Channel	Detector	IEEE 1	<b>Fransmission</b>	Mode
			ANT1	ANT2	MIMO
5180	36	AVG	12.31	11.96	15.15
5200	40	AVG	15.96	15.68	18.83
5220	44	AVG	15.97	15.79	18.89
5240	48	AVG	16.02	15.87	18.96
5260	52	AVG	15.78	15.65	18.73
5280	56	AVG	15.81	15.59	18.71
5300	60	AVG	15.95	15.66	18.82
5320	64	AVG	12.11	11.72	14.93
5500	100	AVG	12.18	12.08	15.14
5580	116	AVG	15.79	15.82	18.82
5660	132	AVG	15.67	15.78	18.74
5720	144	AVG	15.56	15.53	18.56
5745	149	AVG	16.08	16.45	19.28
5785	157	AVG	15.85	15.83	18.85
5825	165	AVG	12.08	12.02	15.06

Table 7-13. MIMO 20MHz BW 802.11ac (UNII) Maximum Conducted Output Power

Freq [MHz]	Channel	Detector	5GHz (40N	40MHz) Conducted Power [dBm]	
ried [MHZ]	Chamilei	Detector	IEEE 1	<b>Fransmission</b>	Mode
			ANT1	ANT2	MIMO
5190	38	AVG	9.38	9.02	12.21
5230	46	AVG	13.24	12.85	16.06
5270	54	AVG	13.01	13.01	16.02
5310	62	AVG	9.22	9.02	12.13
5510	102	AVG	9.48	9.02	12.27
5550	110	AVG	13.37	12.68	16.05
5670	134	AVG	12.76	12.68	15.73
5710	142	AVG	12.71	12.56	15.65
5755	151	AVG	13.21	12.86	16.05
5795	159	AVG	13.03	12.54	15.80

Table 7-14. MIMO 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 64 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset	Page 64 of 248



Freq [MHz]	Channel	Detector	5GHz (40MHz) Conducted Power [dBm]		
Freq [MHZ]	Chamilei	Detector	IEEE 1	<b>Fransmission</b>	Mode
			ANT1	ANT2	MIMO
5190	38	AVG	9.33	8.94	12.15
5230	46	AVG	13.23	12.83	16.04
5270	54	AVG	13.04	12.92	15.99
5310	62	AVG	9.38	8.94	12.18
5510	102	AVG	9.43	9.02	12.24
5550	110	AVG	13.29	12.67	16.00
5670	134	AVG	12.83	12.65	15.75
5710	142	AVG	12.87	12.54	15.72
5755	151	AVG	13.09	12.78	15.95
5795	159	AVG	13.03	12.51	15.79

Table 7-15. MIMO 40MHz BW 802.11ac (UNII) Maximum Conducted Output Power

5GHz (80MHz) Conducted Power [dBm]						
Freq [MHz]	Channel	Channel	Detector	IEEE	Transmission M	l o de
			ANT1	ANT2	MIMO	
5210	42	AVG	8.26	7.73	11.01	
5290	58	AVG	8.34	7.62	11.01	
5530	106	AVG	8.39	7.67	11.06	
5690	138	AVG	11.02	10.58	13.82	
5775	155	AVG	11.31	10.96	14.15	

Table 7-16. MIMO 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power

#### Note:

Per KDB 662911 v02r01 Section E)1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

# **Sample MIMO Calculation:**

At 5180MHz the average conducted output power was measured to be 12.22 dBm for Antenna-1 and 11.92 dBm for Antenna-2.

(12.22 dBm + 11.92 dBm) = (16.67 mW + 15.56 mW) = 32.23 mW = 15.08 dBm

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	<b>⊕</b> LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg CE of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 65 of 248



# 7.5 Maximum Power Spectral Density – 802.11a/n/ac §15.407(a.1.iv) §15.407(a.2) §15.407(a.3)

### **Test Overview and Limit**

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r03, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033 D02 v01r03, was used to measure the power spectral density.

In the 5.15-5.25 GHz, 5.25-5.35 GHz, 5.47-5.725 GHz bands, the maximum permissible power spectral density is 11 dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

### **Test Procedure Used**

KDB 789033 D02 v01r03 – Section F KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

### **Test Settings**

- 1. Analyzer was set to the center frequency of the UNII channel under investigation
- 2. Span was set to encompass the entire emission bandwidth of the signal
- 3. RBW = 1MHz
- 4. VBW = 3MHz
- 5. Number of sweep points  $\geq 2 \times (\text{span/RBW})$
- 6. Sweep time = auto
- Detector = power averaging (RMS)
- 8. Trigger was set to free run for all modes
- 9. Trace was averaged over 100 sweeps
- 10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

### **Test Notes**

None

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	⊕ LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 66 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 66 of 248



# **Antenna-1 Power Spectral Density Measurements**

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]		Max Permissible Power Density [dBm/MHz]	Margin [dB]	Pass / Fail
	5180	36	а	6	1.40	11.0	<b>-</b> 9.60	Pass
	5200	40	а	6	5.16	11.0	<b>-</b> 5.84	Pass
	5240	48	а	6	5.19	11.0	<b>-</b> 5.81	Pass
<del>-</del>	5180	36	n (20MHz)	6.5/7.2 (MCS0)	1.07	11.0	-9.93	Pass
Band	5200	40	n (20MHz)	6.5/7.2 (MCS0)	4.71	11.0	-6.29	Pass
Ä	5240	48	n (20MHz)	6.5/7.2 (MCS0)	5.21	11.0	<b>-</b> 5.79	Pass
	5190	38	n (40MHz)	13.5/15 (MCS0)	-4.25	11.0	-15.25	Pass
	5230	46	n (40MHz)	13.5/15 (MCS0)	-0.24	11.0	-11.24	Pass
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-8.29	11.0	-19.29	Pass
	5260	52	а	6	5.03	11.0	<b>-</b> 5.97	Pass
	5280	56	а	6	4.89	11.0	-6.11	Pass
	5320	64	а	6	1.47	11.0	-9.53	Pass
<b>8</b>	5260	52	n (20MHz)	6.5/7.2 (MCS0)	5.29	11.0	<b>-</b> 5.71	Pass
Band	5280	56	n (20MHz)	6.5/7.2 (MCS0)	4.82	11.0	<b>-</b> 6.18	Pass
Ba	5320	64	n (20MHz)	6.5/7.2 (MCS0)	0.86	11.0	-10.14	Pass
	5270	54	n (40MHz)	13.5/15 (MCS0)	-0.59	11.0	-11.59	Pass
	5310	62	n (40MHz)	13.5/15 (MCS0)	-4.64	11.0	-15.64	Pass
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-7.93	11.0	-18.93	Pass
	5500	100	а	6	1.62	11.0	-9.38	Pass
	5580	116	а	6	5.30	11.0	-5.70	Pass
	5720	144	а	6	5.30	11.0	<b>-</b> 5.70	Pass
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	1.21	11.0	<b>-</b> 9.79	Pass
20	5580	116	n (20MHz)	6.5/7.2 (MCS0)	5.15	11.0	<b>-</b> 5.85	Pass
Band	5720	144	n (20MHz)	6.5/7.2 (MCS0)	5.08	11.0	<b>-</b> 5.92	Pass
Ва	5510	102	n (40MHz)	13.5/15 (MCS0)	-3.85	11.0	-14.85	Pass
	5550	110	n (40MHz)	13.5/15 (MCS0)	-0.30	11.0	-11.30	Pass
	5710	142	n (40MHz)	13.5/15 (MCS0)	-0.49	11.0	-11.49	Pass
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-7.97	11.0	-18.97	Pass
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-5.15	11.0	-16.15	Pass

Table 7-17. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Daga 67 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 67 of 248





Plot 7-77. Power Spectral Density Plot (802.11a (UNII Band 1) - Ch. 36)




Plot 7-78. Power Spectral Density Plot (802.11a (UNII Band 1) - Ch. 40)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	⊕ LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 60 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 68 of 248





Plot 7-79. Power Spectral Density Plot (802.11a (UNII Band 1) - Ch. 48)

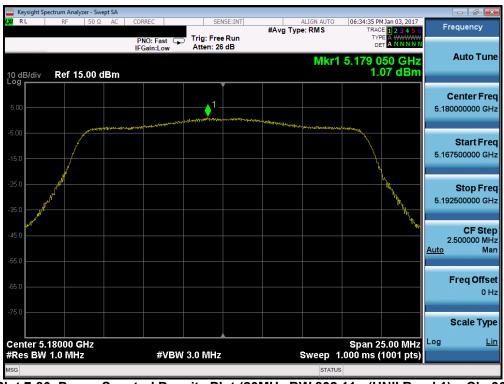

Plot 7-80. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) - Ch. 36)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo 60 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 69 of 248






Plot 7-81. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) - Ch. 40)



Plot 7-82. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) - Ch. 48)

FCC ID: ZNFH871	PETEST* ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	🕕 LG	Approved by: Quality Manager	
Test Report S/N:	Test Dates:	EUT Type:		Dogg 70 of 240	
1M1701180032-05-R3.ZNF   12/27/2016 - 2/15/2017		Portable Handset		Page 70 of 248	
@ 2017 DCTEST Engineering Lo	horotony Inc			V.6.1	



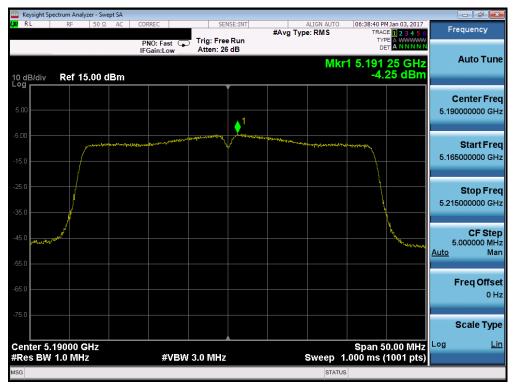

Plot 7-83. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) - Ch. 38)



Plot 7-84. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) - Ch. 46)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogo 71 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 71 of 248





Plot 7-85. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 1) - Ch. 42)



Plot 7-86. Power Spectral Density Plot (802.11a (UNII Band 2A) - Ch. 52)

FCC ID: ZNFH871	PCTEST' ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	🕒 LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Daga 70 of 040
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 72 of 248
@ 2017 DCTEST Engineering Lo	horotony Inc	•	•	V 6 1






Plot 7-87. Power Spectral Density Plot (802.11a (UNII Band 2A) - Ch. 56)



Plot 7-88. Power Spectral Density Plot (802.11a (UNII Band 2A) - Ch. 64)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 72 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 73 of 248



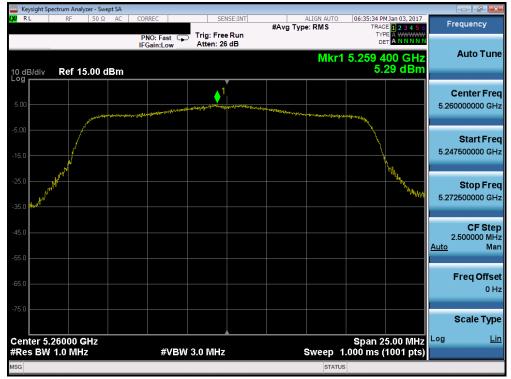

Plot 7-89. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) - Ch. 52)



Plot 7-90. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) - Ch. 56)

FCC ID: ZNFH871	PCTEST' ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 74 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 74 of 248
2017 DCTEST Engineering Laboratory, Inc.				






Plot 7-91. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) - Ch. 64)



Plot 7-92. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) - Ch. 54)

FCC ID: ZNFH871	PETEST* ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 75 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 75 of 248
© 2017 PCTEST Engineering Laboratory Inc.				



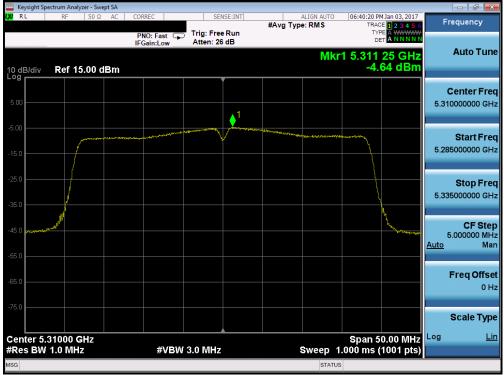

Plot 7-93. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) - Ch. 62)



Plot 7-94. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2A) - Ch. 58)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Daga 76 of 040
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 76 of 248





Plot 7-95. Power Spectral Density Plot (802.11a (UNII Band 2C) - Ch. 100)



Plot 7-96. Power Spectral Density Plot (802.11a (UNII Band 2C) - Ch. 116)

FCC ID: ZNFH871	PETEST* ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	🕕 LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 77 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 77 of 248
@ 2017 DCTEST Engineering Lo	horotony Inc			V.6.1





Plot 7-97. Power Spectral Density Plot (802.11a (UNII Band 2C) - Ch. 144)



Plot 7-98. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) - Ch. 100)

FCC ID: ZNFH871	PCTEST* ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	🕦 LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 70 of 240
1M1701180032-05-R3.ZN	F 12/27/2016 - 2/15/2017	Portable Handset		Page 78 of 248
© 2017 PCTEST Engineering Laboratory, Inc.				





Plot 7-99. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) - Ch. 116)




Plot 7-100. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) - Ch. 144)

FCC ID: ZNFH871	PETEST* ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	🕒 LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 70 of 240
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 79 of 248
@ 2017 DCTEST Engineering Lo	horotony Inc			V.6.1






Plot 7-101. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) - Ch. 102)

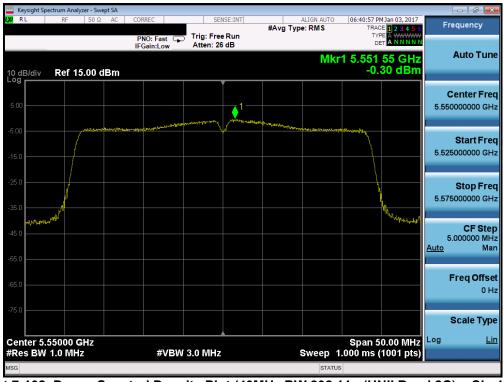

Plot 7-102. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) - Ch. 110)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dogg 90 of 249
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 80 of 248



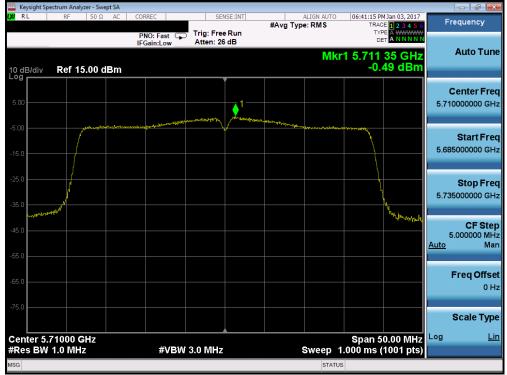

Plot 7-103. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) - Ch. 142)



Plot 7-104. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) - Ch. 106)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 01 of 040
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		Page 81 of 248





Plot 7-105. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) - Ch. 138)

FCC ID: ZNFH871	ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Page 82 of 248
1M1701180032-05-R3.ZNF	12/27/2016 - 2/15/2017	Portable Handset		raye 02 01 240