

FCC LTE REPORT

Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Date of Issue:
March 20, 2018

Address:
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
Report No.: HCT-RF-1803-FC007

FCC ID: ZNFQ610FA

APPLICANT: LG Electronics MobileComm U.S.A., Inc.

Model(s): LM-Q610FAW

Additional Model(s): LMQ610FAW, Q610FAW, LM-Q610FA, LMQ610FA, Q610FA, LM-Q610RM, LMQ610RM, Q610RM, LM-Q610FM, LMQ610FM, Q610FM, LM-Q610RS, LMQ610RS, Q610RS, LM-Q610FS, LMQ610FS, Q610FS, LM-Q610FSW, LMQ610FSW, Q610FSW

EUT Type: GSM/WCDMA/LTE Phone with Bluetooth4.2LE, WIFI802.11 b/g/n

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 7 (5)	2502.5 – 2567.5	4M51G7D	QPSK	0.121	20.81
		4M52W7D	16QAM	0.100	20.02
LTE – Band 7 (10)	2505.0 – 2565.0	8M98G7D	QPSK	0.119	20.76
		8M98W7D	16QAM	0.099	19.97
LTE – Band 7 (15)	2507.5 – 2562.5	13M5G7D	QPSK	0.119	20.76
		13M5W7D	16QAM	0.099	19.96
LTE – Band 7 (20)	2510.0 – 2560.0	18M0G7D	QPSK	0.119	20.74
		18M0W7D	16QAM	0.099	19.94

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center



Report approved by : Kwon Jeong
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1803-FC007	March 20, 2018	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. Description of EUT	5
2.2. MEASURING INSTRUMENT CALIBRATION	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS	6
3.1 TEST PROCEDURE	6
3.2 RADIATED POWER	7
3.3 RADIATED SPURIOUS EMISSIONS	8
3.4 OCCUPIED BANDWIDTH	9
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	10
3.6 CHANNEL EDGE.....	11
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	12
4. LIST OF TEST EQUIPMENT	13
5. MEASUREMENT UNCERTAINTY	14
6. SUMMARY OF TEST RESULTS	15
7. SAMPLE CALCULATION	16
8. TEST DATA	18
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	18
8.3 RADIATED SPURIOUS EMISSIONS	20
8.4 OCCUPIED BANDWIDTH	24
8.5 CONDUCTED SPURIOUS EMISSIONS	25
8.6 CHANNEL EDGE.....	26
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	27
9. TEST PLOTS.....	31

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	LG Electronics MobileComm U.S.A., Inc.
Address:	1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID:	ZNFQ610FA
Application Type:	Certification
FCC Classification:	Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	GSM/WCDMA/LTE Phone with Bluetooth4.2LE, WIFI802.11 b/g/n
Model(s):	LM-Q610FAW
Additional Model(s):	LMQ610FAW, Q610FAW, LM-Q610FA, LMQ610FA, Q610FA, LM-Q610RM, LMQ610RM, Q610RM, LM-Q610FM, LMQ610FM, Q610FM, LM-Q610RS, LMQ610RS, Q610RS, LM-Q610FS, LMQ610FS, Q610FS, LM-Q610FSW, LMQ610FSW, Q610FSW
Tx Frequency:	2502.5 – 2567.5 : 5 MHz 2505.0 – 2565.0 : 10 MHz 2507.5 – 2562.5 : 15 MHz 2510.0 – 2560.0 : 20 MHz
Date(s) of Tests:	March 05, 2018 ~ March 19, 2018

2. INTRODUCTION

2.1. Description of EUT

The EUT supports GSM/WCDMA/LTE Phone with Bluetooth4.2LE, WIFI802.11 b/g/n.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03 – Section 4.2 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03 – Section 5.2 - ANSI C63.26-2015 – Section 5.2.4.2
Peak- to- Average Ratio	- KDB 971168 D01 v03 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03 – Section 5.2 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03 – Section 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.


Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets,
and channel bandwidth configurations shown in the test data

3.4 OCCUPIED BANDWIDTH.

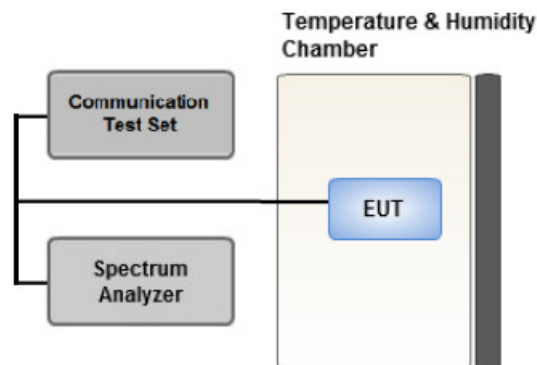

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

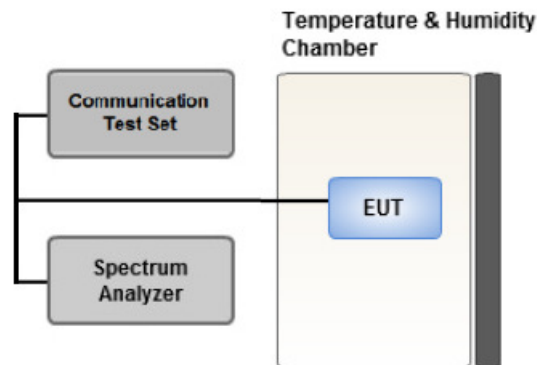

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

3.6 CHANNEL EDGE

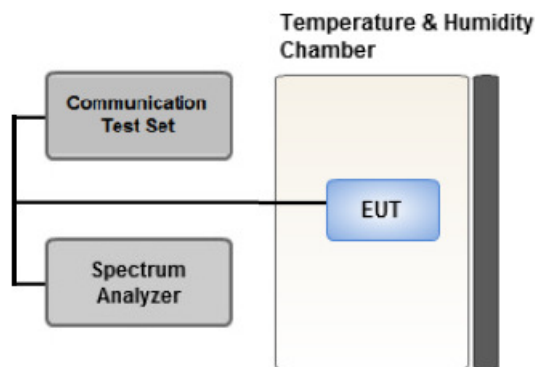

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Channel edge measurements are performed using the signal analyzer's "Spectrum Emission Mask"
2. Span was set large enough so as to capture all out of band emissions near the channel edge
3. RBW > 2% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

The attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.

All measurements were done at 3 channels(Low, Mid, High)

The channel edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

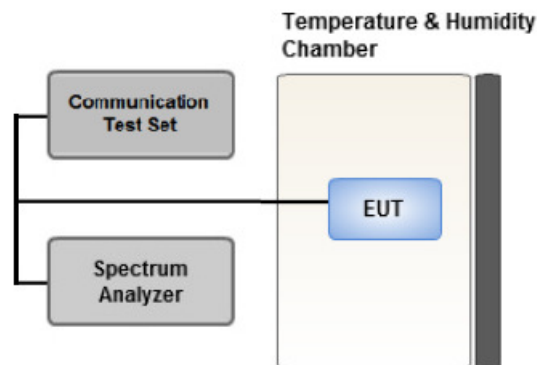

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/24/2017	Annual	04/24/2018
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/10/2017	Annual	04/10/2018
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/10/2017	Annual	04/10/2018
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	05/04/2017	Annual	05/04/2018
Agilent	E3632A/DC Power Supply	KR75303243	07/18/2017	Annual	07/18/2018
Schwarzbeck	UHAP/ Dipole Antenna	557	03/31/2017	Biennial	03/31/2019
Schwarzbeck	UHAP/ Dipole Antenna	558	03/31/2017	Biennial	03/31/2019
ESPEC	SU-642 / Chamber	93000718	07/21/2017	Annual	07/21/2018
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/09/2016	Biennial	09/09/2018
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/14/2016	Biennial	10/14/2018
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/25/2017	Biennial	04/25/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	04/25/2017	Biennial	04/25/2019
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY52090906	06/01/2017	Annual	06/01/2018
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/22/2017	Annual	06/22/2018
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/30/2017	Annual	10/30/2018
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/26/2017	Annual	09/26/2018
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/19/2017	Biennial	04/19/2019
Schwarzbeck	VULB9160/ Bilog Antenna	3150	09/30/2016	Biennial	09/30/2018
Schwarzbeck	VULB9160/ Bilog Antenna	9360-3368	10/14/2016	Biennial	10/14/2018
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6200863156	02/13/2018	Annual	02/13/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	02/08/2018	Annual	02/08/2019
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/18/2017	Annual	07/18/2018
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer	100931	10/30/2017	Annual	10/30/2018
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	08/16/2017	Annual	08/16/2018
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	6.07

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(m)(4)	$< 40 + 10\log_{10} (P[\text{Watts}])$ at Channel edges $< 43 + 10\log_{10} (P[\text{Watts}])$ between 5 and X MHz from Channel edges $< 55 + 10\log_{10} (P[\text{Watts}])$ beyond X MHz beyond from Channel edges	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(m)(4)	$< 55 + 10\log_{10} (P[\text{Watts}])$ beyond X MHz beyond from Channel edges	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2502.5	LTE B7 (5 MHz)	QPSK	-24.16	11.52	10.95	2.35	H	< 2.00	0.103	20.12
		16-QAM	-24.96	10.72	10.95	2.35	H		0.086	19.32
2535.0		QPSK	-23.72	12.21	10.98	2.38	H		0.121	20.81
		16-QAM	-24.51	11.42	10.98	2.38	H		0.100	20.02
2567.5		QPSK	-23.86	12.04	11.01	2.39	H		0.116	20.66
		16-QAM	-24.67	11.23	11.01	2.39	H		0.097	19.85

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2505.0	LTE B7 (10 MHz)	QPSK	-24.13	11.56	10.95	2.35	H	< 2.00	0.104	20.16
		16-QAM	-24.92	10.77	10.95	2.35	H		0.086	19.37
2535.0		QPSK	-23.77	12.16	10.98	2.38	H		0.119	20.76
		16-QAM	-24.56	11.37	10.98	2.38	H		0.099	19.97
2565.0		QPSK	-24.08	11.88	11.00	2.39	H		0.112	20.49
		16-QAM	-24.90	11.06	11.00	2.39	H		0.093	19.67

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2507.5	LTE B7 (15 MHz)	QPSK	-24.04	11.65	10.96	2.36	H	< 2.00	0.106	20.25
		16-QAM	-24.82	10.87	10.96	2.36	H		0.089	19.47
2535.0		QPSK	-23.79	12.14	10.98	2.38	H		0.119	20.74
		16-QAM	-24.57	11.36	10.98	2.38	H		0.099	19.96
2562.5		QPSK	-23.87	12.15	11.00	2.39	H		0.119	20.76
		16-QAM	-24.71	11.31	11.00	2.39	H		0.098	19.92

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2510.0	LTE B7 (20 MHz)	QPSK	-23.97	11.72	10.96	2.36	H	< 2.00	0.108	20.32
		16-QAM	-24.78	10.91	10.96	2.36	H		0.089	19.51
2535.0		QPSK	-23.79	12.14	10.98	2.38	H		0.119	20.74
		16-QAM	-24.59	11.34	10.98	2.38	H		0.099	19.94
2560.0		QPSK	-24.07	12.01	11.00	2.39	H		0.115	20.62
		16-QAM	-24.92	11.16	11.00	2.39	H		0.095	19.77

8.3 RADIATED SPURIOUS EMISSIONS

- OPERATING FREQUENCY : 2535.00 MHz
- MEASURED OUTPUT POWER: 20.81 dBm = 0.121 W
- MODE: LTE B7
- MODULATION SIGNAL: 5 MHz QPSK
- DISTANCE: 1 meters
- LIMIT: $55 + 10 \log_{10} (W) =$ 45.81 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20775 (2502.5)	5,005.00	-54.19	12.57	-68.23	3.40	V	-59.06	79.87
	7,507.50	-49.63	11.71	-58.01	4.18	V	-50.48	71.29
	10,010.00	-54.34	11.01	-58.18	5.02	H	-52.19	73.00
21100 (2535.0)	5,070.00	-54.22	12.67	-67.76	3.43	H	-58.52	79.33
	7,605.00	-48.10	11.64	-57.05	4.29	H	-49.70	70.51
	10,140.00	-55.63	10.94	-59.82	4.99	H	-53.87	74.68
21425 (2567.5)	5,135.00	-52.13	12.75	-63.66	3.44	V	-54.35	75.16
	7,702.50	-46.30	11.56	-55.08	4.27	H	-47.79	68.60
	10,270.00	-55.50	10.87	-60.80	4.98	H	-54.91	75.72

- OPERATING FREQUENCY : 2535.00 MHz
- MEASURED OUTPUT POWER: 20.76 dBm = 0.119 W
- MODE: LTE B7
- MODULATION SIGNAL: 10 MHz QPSK
- DISTANCE: 1 meters
- LIMIT: $55 + 10 \log_{10} (W) =$ 45.76 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20800 (2505.0)	5,010.00	-57.58	12.58	-71.25	3.40	H	-62.07	82.83
	7,515.00	-48.26	11.70	-56.64	4.12	H	-49.06	69.82
	10,020.00	-58.78	11.01	-62.45	5.04	H	-56.48	77.24
21100 (2535.0)	5,070.00	-53.89	12.67	-67.43	3.43	H	-58.19	78.95
	7,605.00	-47.58	11.64	-56.53	4.29	H	-49.18	69.94
	10,140.00	-57.09	10.94	-61.28	4.99	H	-55.33	76.09
21400 (2565.0)	5,130.00	-57.20	12.76	-68.65	3.44	V	-59.33	80.09
	7,695.00	-45.82	11.57	-54.46	4.26	H	-47.15	67.91
	10,260.00	-58.30	10.87	-63.42	5.00	H	-57.55	78.31

- OPERATING FREQUENCY : 2562.50 MHz
- MEASURED OUTPUT POWER: 20.76 dBm = 0.119 W
- MODE: LTE B7
- MODULATION SIGNAL: 15 MHz QPSK
- DISTANCE: 1 meters
- LIMIT: $55 + 10 \log_{10} (W) =$ 45.76 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20825 (2507.5)	5,015.00	-57.78	12.59	-70.41	3.40	V	-61.22	81.98
	7,522.50	-47.66	11.70	-55.88	4.09	H	-48.27	69.03
	10,030.00	-57.23	11.00	-60.98	5.16	V	-55.14	75.90
21100 (2535.0)	5,070.00	-53.12	12.67	-66.66	3.43	V	-57.42	78.18
	7,605.00	-48.70	11.64	-57.65	4.29	H	-50.30	71.06
	10,140.00	-58.56	10.94	-62.75	4.99	H	-56.80	77.56
21375 (2562.5)	5,125.00	-56.72	12.75	-68.42	3.44	V	-59.11	79.87
	7,687.50	-47.22	11.57	-55.69	4.26	H	-48.38	69.14
	10,250.00	-57.41	10.88	-61.96	5.04	H	-56.12	76.88

- OPERATING FREQUENCY : 2535.00 MHz
- MEASURED OUTPUT POWER: 20.74 dBm = 0.119 W
- MODE: LTE B7
- MODULATION SIGNAL: 20 MHz QPSK
- DISTANCE: 1 meters
- LIMIT: $55 + 10 \log_{10} (W) =$ 45.74 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20850 (2510.0)	5,020.00	-58.48	12.60	-71.09	3.40	V	-61.89	82.63
	7,530.00	-48.04	11.69	-56.04	4.08	H	-48.43	69.17
	10,040.00	-59.03	11.00	-63.88	5.20	V	-58.08	78.82
21100 (2535.0)	5,070.00	-57.63	12.67	-71.17	3.43	H	-61.93	82.67
	7,605.00	-47.52	11.64	-56.47	4.29	H	-49.12	69.86
	10,140.00	-58.37	10.94	-62.56	4.99	V	-56.61	77.35
21350 (2560.0)	5,120.00	-57.53	12.75	-69.51	3.44	H	-60.20	80.94
	7,680.00	-48.81	11.58	-57.13	4.26	H	-49.81	70.55
	10,240.00	-59.00	10.88	-63.32	5.06	V	-57.50	78.24

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
7	5 MHz	2535.0	QPSK	25	0	4.5052
			16-QAM	25		4.5208
	10 MHz		QPSK	50		8.9791
			16-QAM	50		8.9817
	15 MHz		QPSK	75		13.478
			16-QAM	75		13.470
	20 MHz		QPSK	100		17.956
			16-QAM	100		17.989

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 32 ~ 35.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
7	5	2502.5	25.8004	30.131	-76.221	-46.090	-25.00
		2535.0	26.1267	30.131	-76.024	-45.893	
		2567.5	26.1221	30.131	-76.297	-46.166	
	10	2505.0	26.2096	30.131	-76.113	-45.982	
		2535.0	26.1403	30.131	-76.237	-46.106	
		2565.0	26.2075	30.131	-76.296	-46.165	
	15	2507.5	25.8705	30.131	-76.107	-45.976	
		2535.0	26.1853	30.131	-76.177	-46.046	
		2562.5	26.2360	30.131	-76.206	-46.075	
	20	2510.0	26.1642	30.131	-76.352	-46.221	
		2535.0	26.0986	30.131	-76.182	-46.051	
		2560.0	26.1494	30.131	-76.423	-46.292	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 44 ~ 55.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131

8.6 CHANNEL EDGE

Band Width (Modulation)	Frequency (MHz)	RB Size / Offset	C.E ~ (C.E ± 1MHz)		2 496 MHz ~ 2 499 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	2 490.5 MHz ~ 2 496 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Below 2 490.5 MHz	Above (C.E + X MHz)
			Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper
5MHz (QPSK)	2502.5	25 / 0	-25.50	-25.17	-21.83	-21.88	-29.45	-36.24	-47.05	-38.83
10MHz (QPSK)	2505.0	50 / 0	-27.33	-27.60	-23.19	-23.62	-26.84	-28.28	-40.79	-39.36
15MHz (QPSK)	2507.5	75 / 0	-28.05	-28.40	-25.63	-25.35	-27.54	-28.35	-34.41	-39.38
20MHz (QPSK)	2510.0	100 / 0	-30.10	-29.55	-27.43	-26.68	-29.12	-28.52	-34.19	-39.54
Limit			-10.0		-10.0		-13.0		-25.0	

Band Width (Modulation)	Frequency (MHz)	RB Size / Offset	C.E ~ (C.E ± 1MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
			Lower	Upper	Lower	Upper
5MHz (QPSK)	2535.0	25 / 0	-25.10	-25.00	-22.52	-22.19
	2567.5	25 / 0	-25.27	-24.49	-21.94	-20.36
10MHz (QPSK)	2535.0	50 / 0	-27.91	-27.18	-24.52	-23.91
	2565.0	50 / 0	-28.64	-26.49	-25.86	-22.57
15MHz (QPSK)	2535.0	75 / 0	-28.86	-28.78	-26.48	-25.83
	2562.5	75 / 0	-29.82	-27.15	-28.11	-23.66
20MHz (QPSK)	2535.0	100 / 0	-29.97	-29.59	-27.17	-26.73
	2560.0	100 / 0	-30.58	-27.26	-28.07	-24.16
Limit			-10.0		-10.0	

Band Width (Modulation)	Frequency (MHz)	Resource Block Size	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
			Lower	Upper	Lower	Upper
5MHz (QPSK)	2535.0	25 / 0	-36.24	-37.07	-39.68	-40.65
	2567.5	25 / 0	-34.65	-34.49	-37.42	-37.00
10MHz (QPSK)	2535.0	50 / 0	-29.52	-28.53	-40.24	-40.75
	2565.0	50 / 0	-29.92	-25.90	-39.40	-37.03
15MHz (QPSK)	2535.0	75 / 0	-30.02	-28.58	-42.31	-42.03
	2562.5	75 / 0	-30.62	-25.69	-41.46	-39.45
20MHz (QPSK)	2535.0	100 / 0	-30.24	-28.37	-43.22	-42.68
	2560.0	100 / 0	-29.64	-25.86	-43.43	-44.04
Limit			-13.0		-25.0	


Note:

1. C.E = Channel Edge
2. X = X is the greater of 6MHz or the actual emission bandwidth.
3. X = 6MHz(5MHz Bandwidth), 10MHz(10MHz Bandwidth), 15MHz(15MHz Bandwidth), 20MHz(20MHz Bandwidth)
4. Plots of the EUT's Channel Edge are shown Page 36 ~ 43.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- MODE: LTE B7
- OPERATING FREQUENCY: 2,535,000,000 Hz
- CHANNEL: 21100 (5 MHz)
- REFERENCE VOLTAGE: 4.00 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.00	+20(Ref)	2534 999 996	0.0	0.000 000	0.000
100%		-30	2534 999 987	-9.8	0.000 000	-0.004
100%		-20	2534 999 990	-6.2	0.000 000	-0.002
100%		-10	2534 999 992	-4.7	0.000 000	-0.002
100%		0	2534 999 992	-4.4	0.000 000	-0.002
100%		+10	2534 999 992	-4.1	0.000 000	-0.002
100%		+30	2534 999 989	-7.0	0.000 000	-0.003
100%		+40	2534 999 992	-4.5	0.000 000	-0.002
100%		+50	2534 999 990	-6.7	0.000 000	-0.003
Batt. Endpoint	3.70	+20	2535 000 003	6.5	0.000 000	0.003

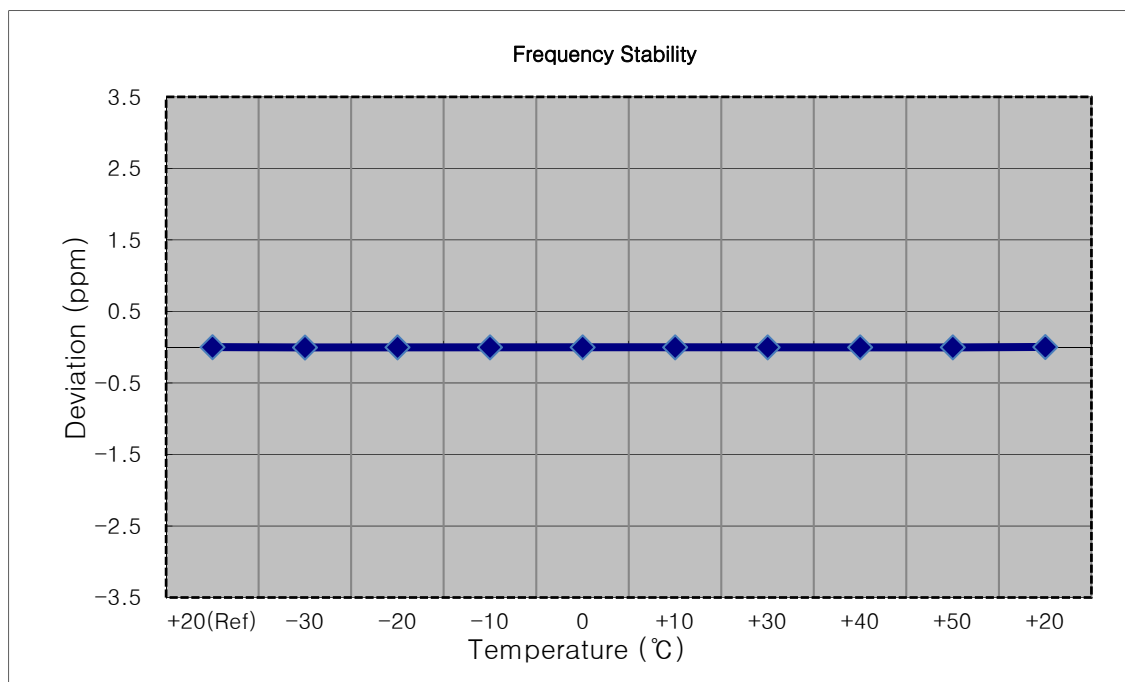


- MODE: LTE B7
- OPERATING FREQUENCY: 2,535,000,000 Hz
- CHANNEL: 21100 (10 MHz)
- REFERENCE VOLTAGE: 4.00 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.00	+20(Ref)	2534 999 996	0.0	0.000 000	0.000
100%		-30	2535 000 001	5.7	0.000 000	0.002
100%		-20	2534 999 991	-4.9	0.000 000	-0.002
100%		-10	2535 000 003	7.2	0.000 000	0.003
100%		0	2534 999 989	-7.2	0.000 000	-0.003
100%		+10	2535 000 001	4.8	0.000 000	0.002
100%		+30	2534 999 988	-7.4	0.000 000	-0.003
100%		+40	2534 999 986	-9.6	0.000 000	-0.004
100%		+50	2535 000 002	6.6	0.000 000	0.003
Batt. Endpoint	3.70	+20	2534 999 988	-7.9	0.000 000	-0.003

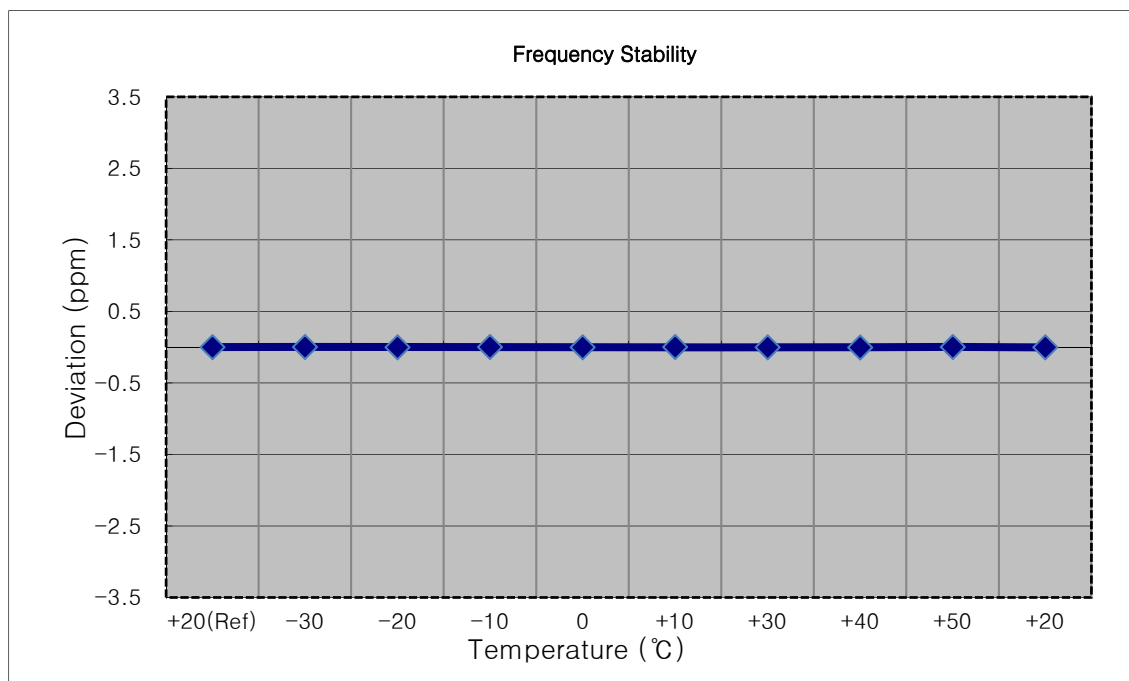


- MODE: LTE B7
- OPERATING FREQUENCY: 2,535,000,000 Hz
- CHANNEL: 21100 (15 MHz)
- REFERENCE VOLTAGE: 4.00 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.00	+20(Ref)	2535 000 006	0.0	0.000 000	0.000
100%		-30	2535 000 001	-5.2	0.000 000	-0.002
100%		-20	2535 000 011	4.9	0.000 000	0.002
100%		-10	2534 999 998	-7.6	0.000 000	-0.003
100%		0	2535 000 011	4.9	0.000 000	0.002
100%		+10	2535 000 000	-6.0	0.000 000	-0.002
100%		+30	2534 999 997	-8.3	0.000 000	-0.003
100%		+40	2535 000 013	7.2	0.000 000	0.003
100%		+50	2534 999 998	-7.4	0.000 000	-0.003
Batt. Endpoint	3.70	+20	2535 000 001	-4.7	0.000 000	-0.002

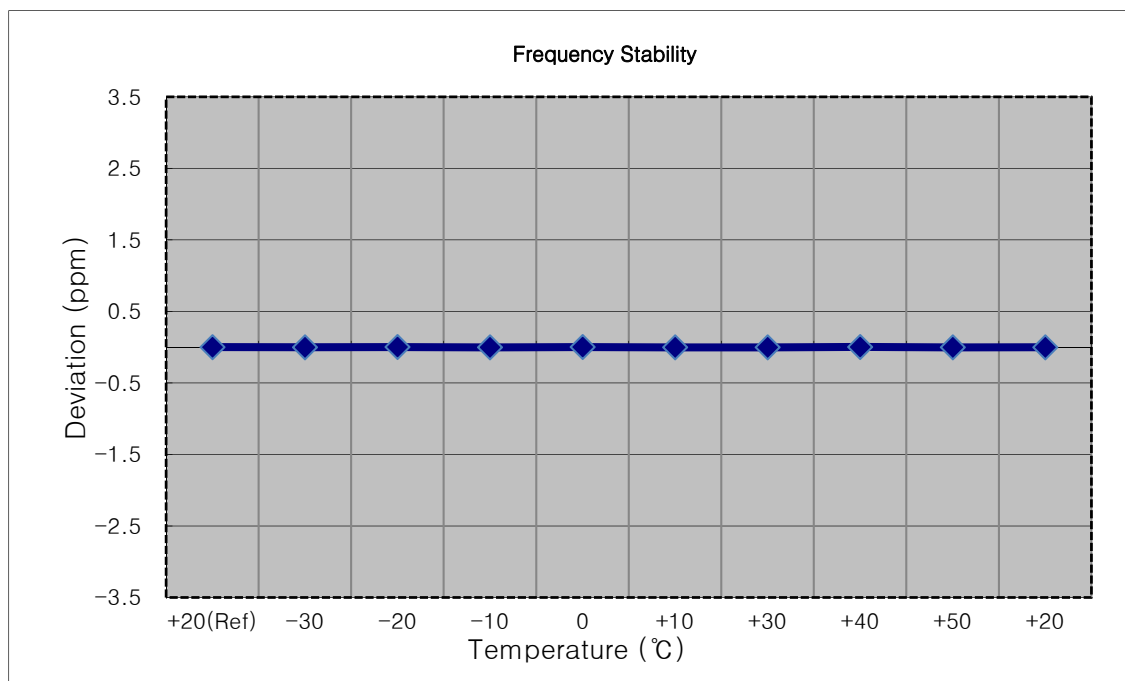


- MODE: LTE B7
- OPERATING FREQUENCY: 2,535,000,000 Hz
- CHANNEL: 21100 (20 MHz)
- REFERENCE VOLTAGE: 4.00 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.00	+20(Ref)	2534 999 996	0.0	0.000 000	0.000
100%		-30	2534 999 988	-7.6	0.000 000	-0.003
100%		-20	2535 000 001	4.9	0.000 000	0.002
100%		-10	2534 999 991	-4.6	0.000 000	-0.002
100%		0	2534 999 990	-5.8	0.000 000	-0.002
100%		+10	2534 999 989	-6.7	0.000 000	-0.003
100%		+30	2535 000 002	6.5	0.000 000	0.003
100%		+40	2534 999 989	-7.1	0.000 000	-0.003
100%		+50	2534 999 989	-7.0	0.000 000	-0.003
Batt. Endpoint	3.70	+20	2534 999 993	-3.0	0.000 000	-0.001

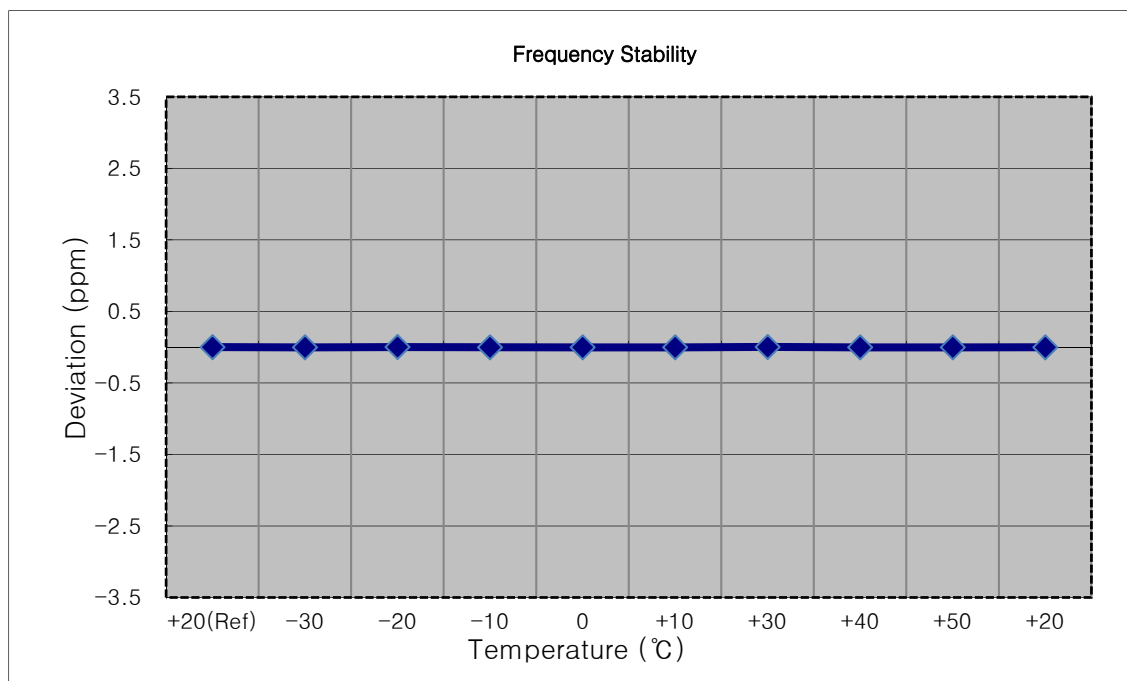


9. TEST PLOTS


BAND 7. Occupied Bandwidth Plot (5 MHz Ch.21100 QPSK RB 25)

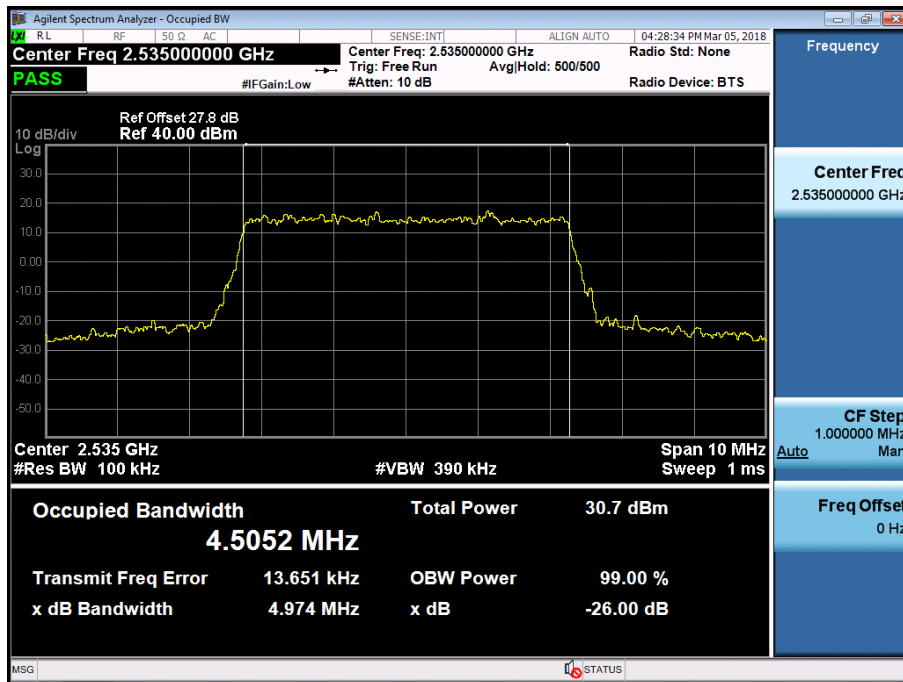


BAND 7. Occupied Bandwidth Plot (5 MHz Ch.21100 16-QAM RB 25)

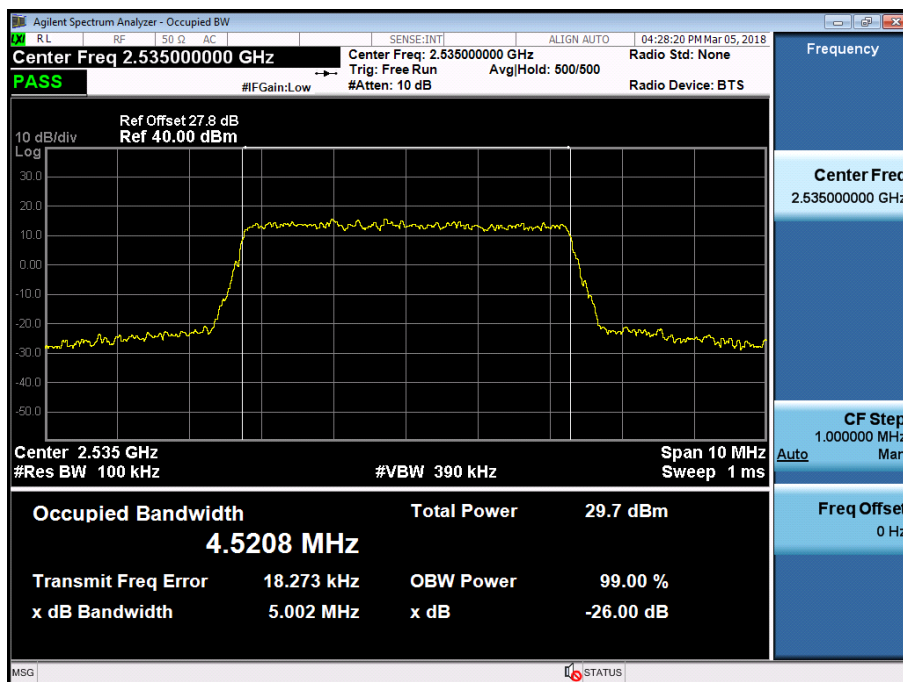


BAND 7. Occupied Bandwidth Plot (10 MHz Ch.21100 QPSK RB 50)

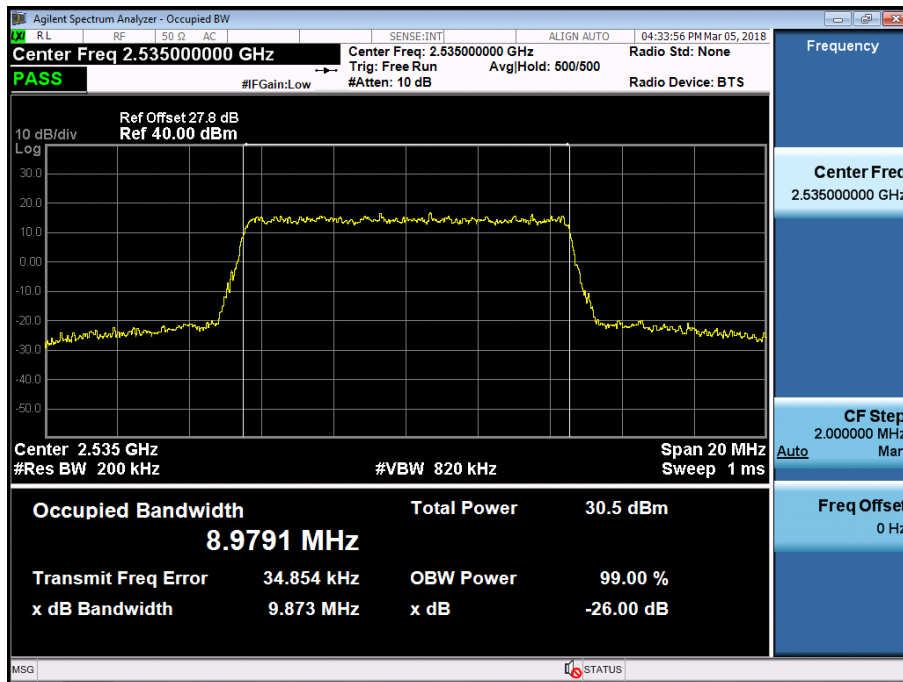


BAND 7. Occupied Bandwidth Plot (10 MHz Ch.21100 16-QAM RB 50)

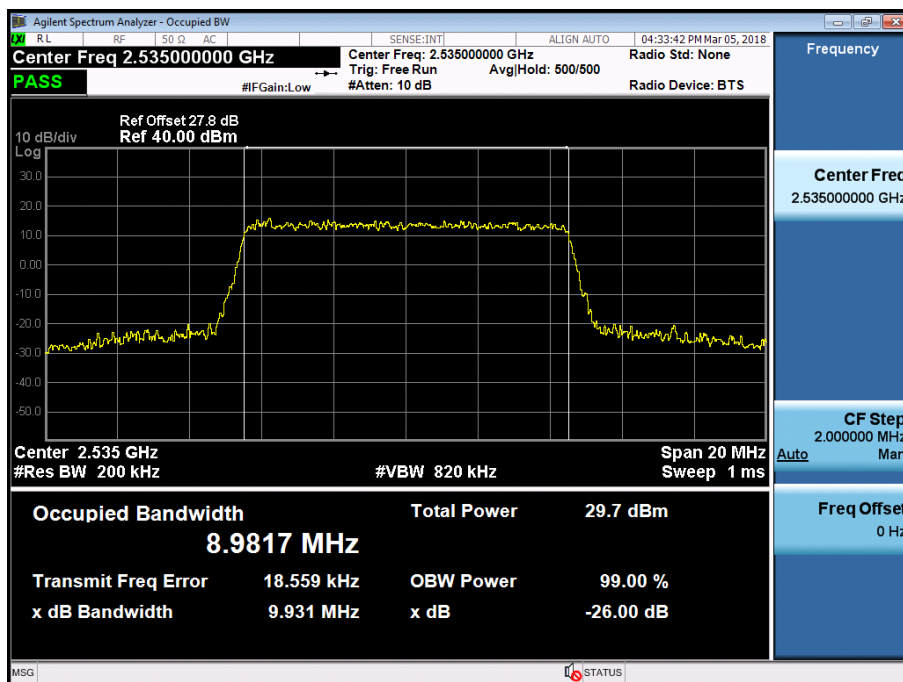


BAND 7. Occupied Bandwidth Plot (15 MHz Ch.21100 QPSK RB 75)

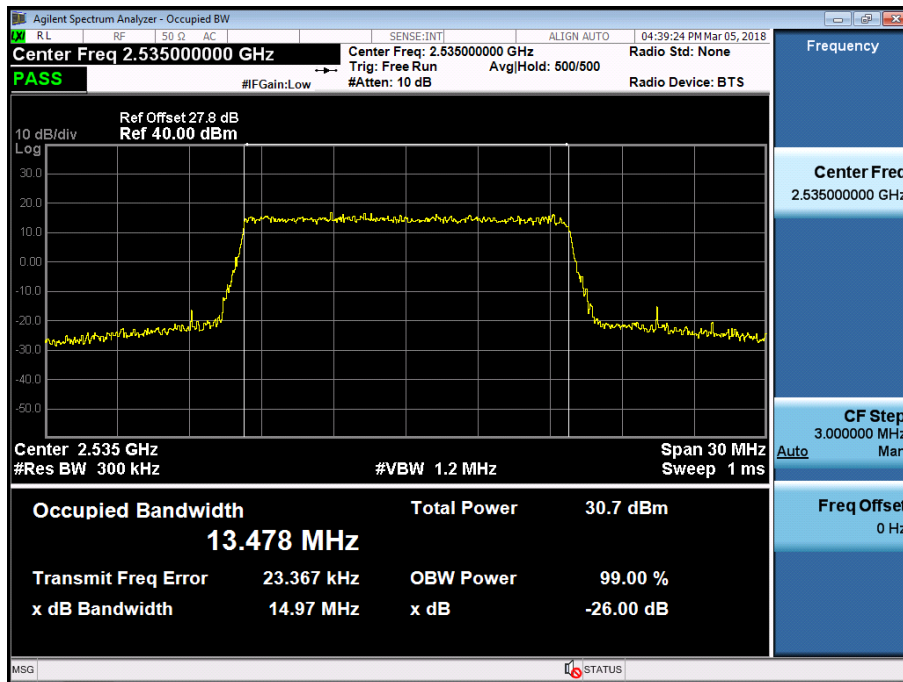


BAND 7. Occupied Bandwidth Plot (15 MHz Ch.21100 16-QAM RB 75)

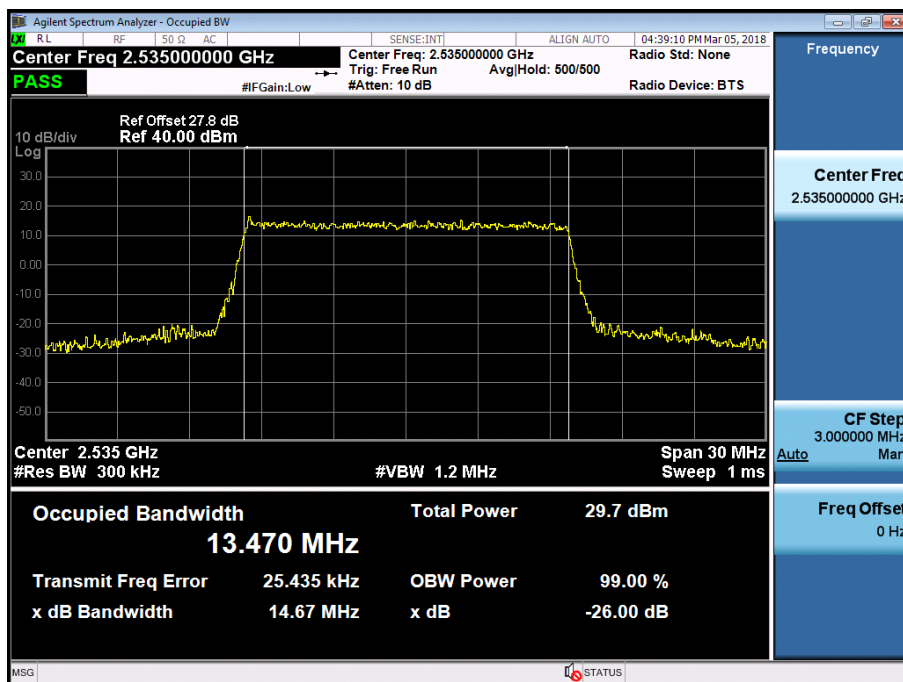

BAND 7. Occupied Bandwidth Plot (20 MHz Ch.21100 QPSK RB 100)

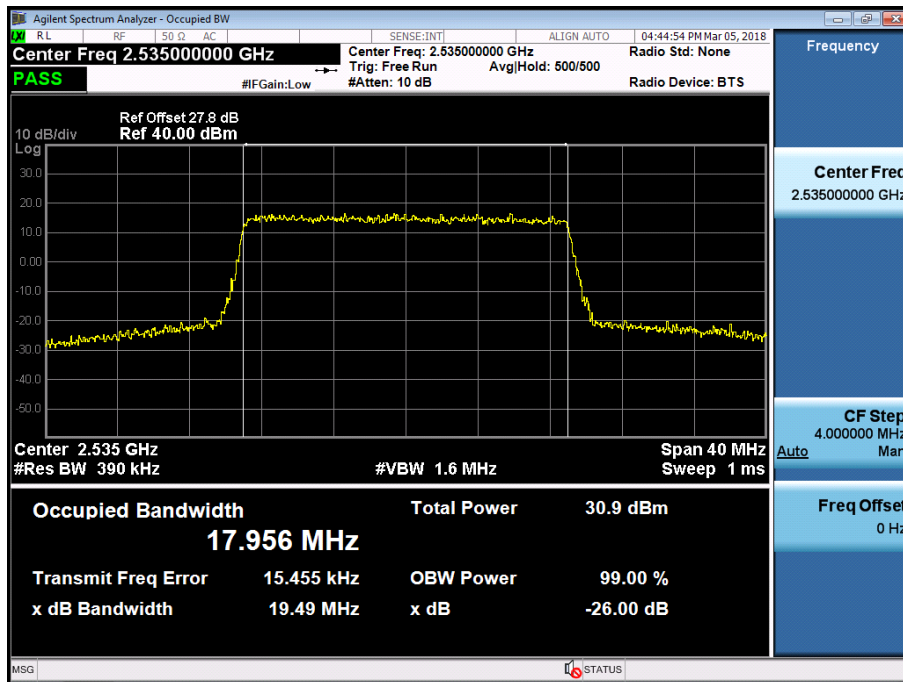

BAND 7. Occupied Bandwidth Plot (20 MHz Ch.21100 16-QAM RB 100)

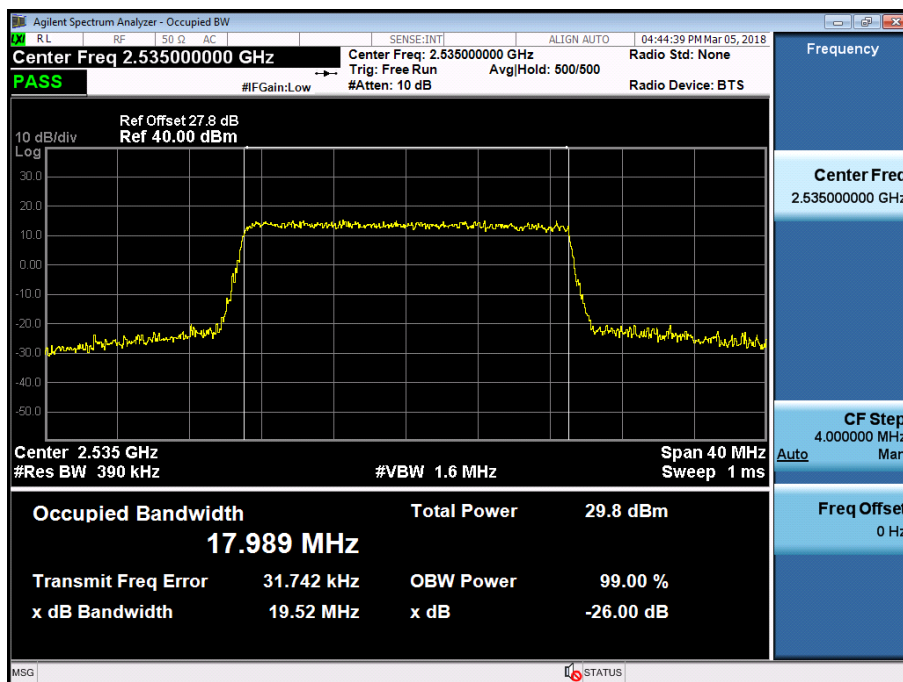


BAND 7. Low Channel Edge Plot (5 MHz Ch.20775 QPSK_RB25_Offset 0)-1




BAND 7. Low Channel Edge Plot (5 MHz Ch.20775 QPSK_RB25_Offset 0)-2



BAND 7. Mid Channel Edge Plot (5 MHz Ch.21100 QPSK_RB25_Offset 0)

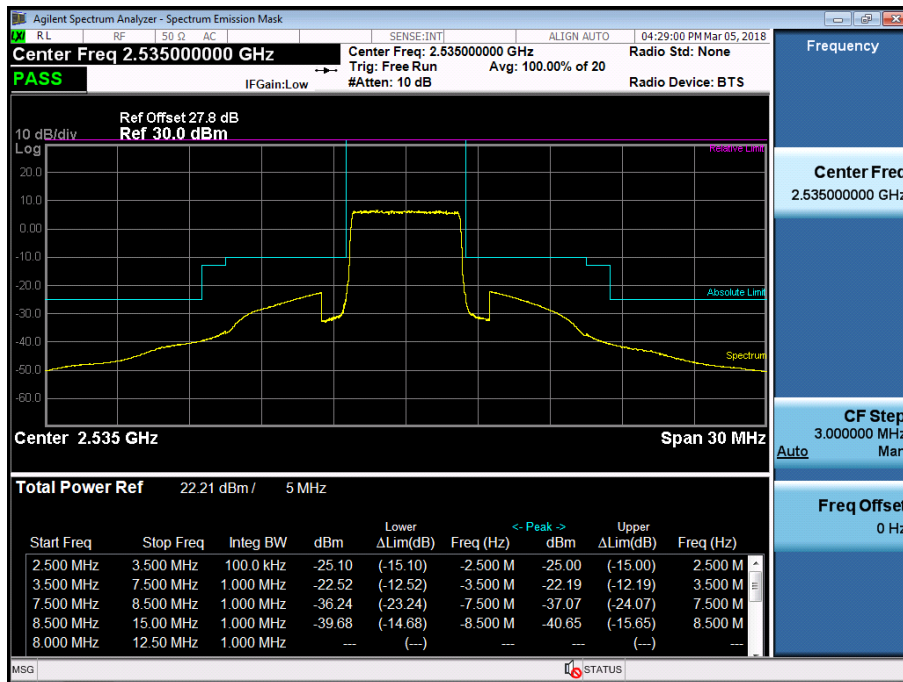

BAND 7. High Channel Edge Plot (5 MHz Ch.21425 QPSK_RB25_Offset 0)

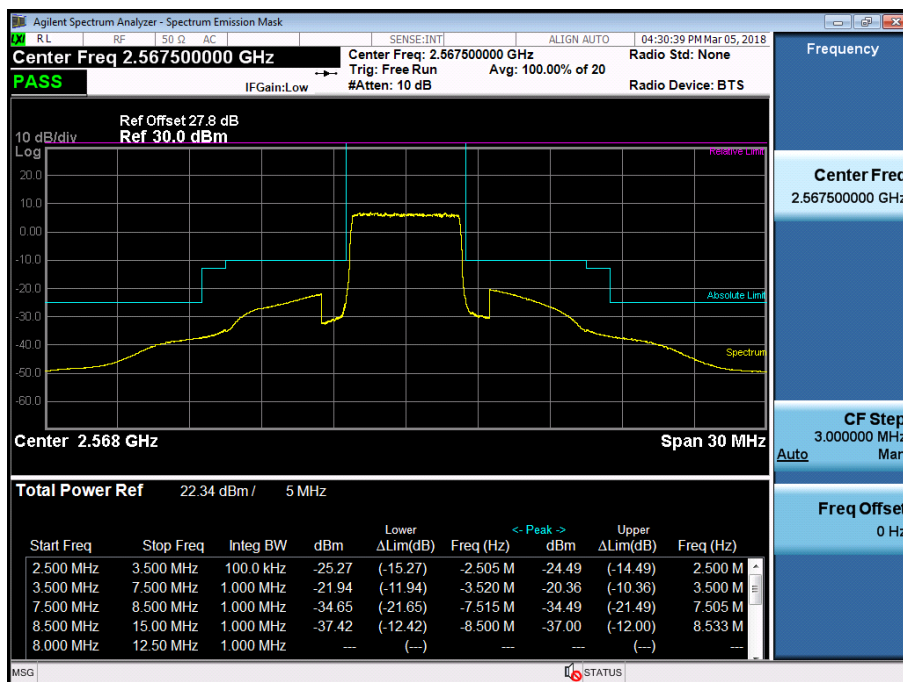


BAND 7. Low Channel Edge Plot (10 MHz Ch.20800 QPSK_RB50_Offset 0)-1




BAND 7. Low Channel Edge Plot (10 MHz Ch.20800 QPSK_RB50_Offset 0)-2




BAND 7. Mid Channel Edge Plot (10 MHz Ch.21100 QPSK_RB50_Offset 0)

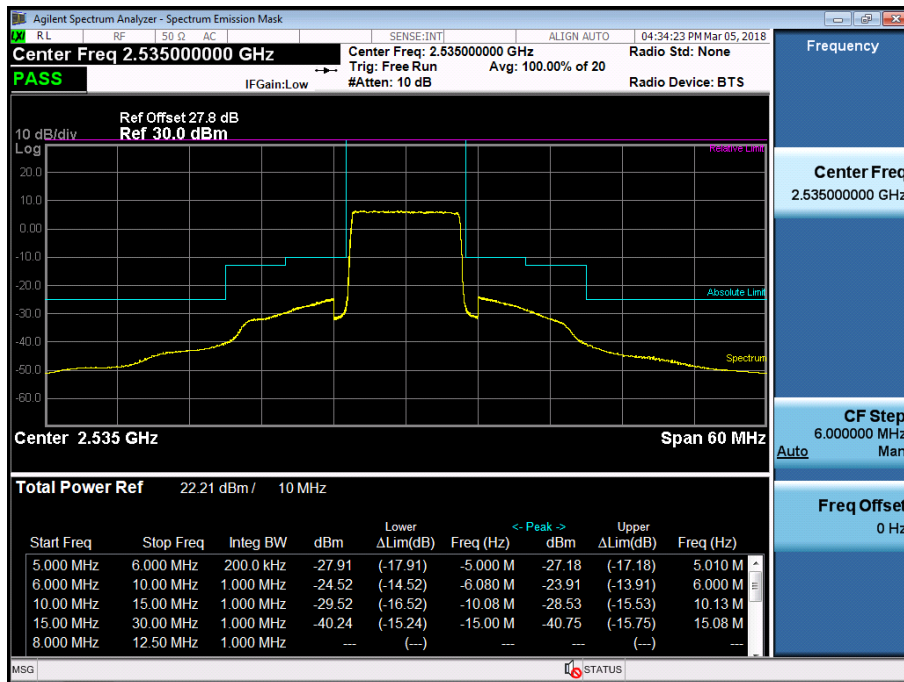

BAND 7. High Channel Edge Plot (10 MHz Ch.21400 QPSK_RB50_Offset 0)

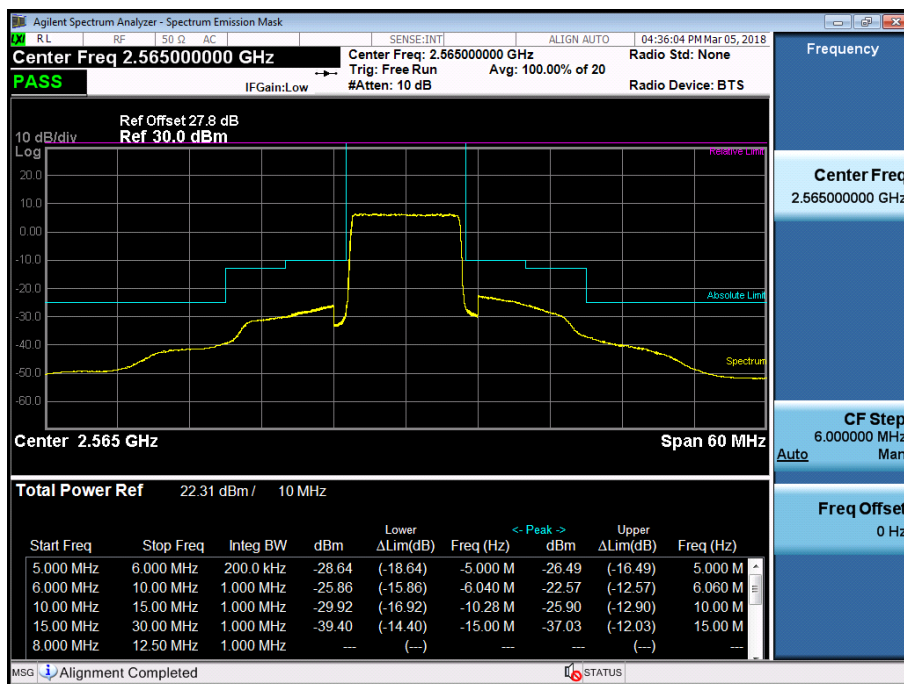


BAND 7. Low Channel Edge Plot (15 MHz Ch.20825 QPSK_RB75_Offset 0)-1

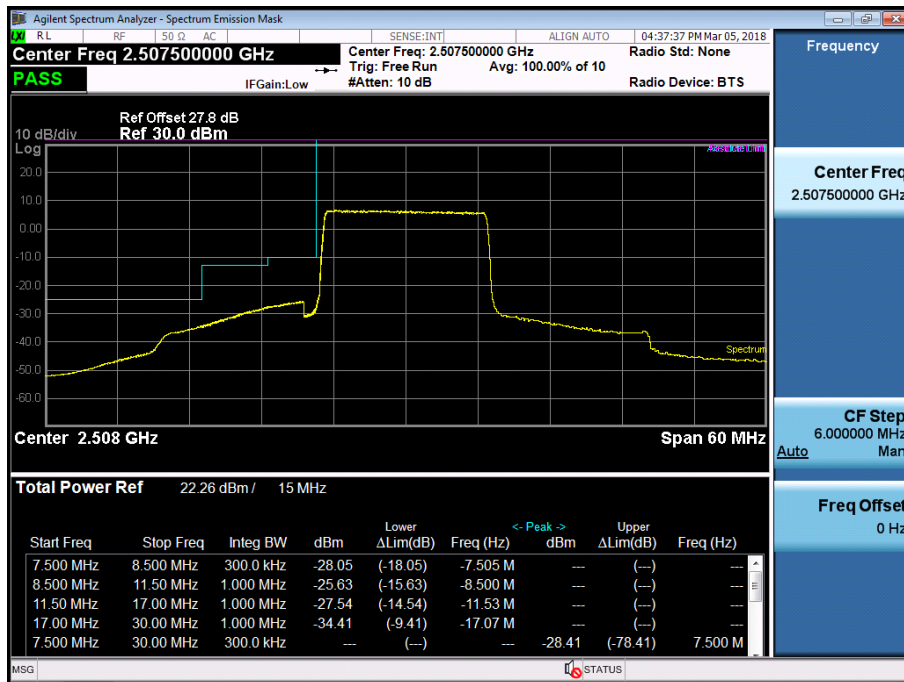


BAND 7. Low Channel Edge Plot (15 MHz Ch.20825 QPSK_RB75_Offset 0)-2



BAND 7. Mid Channel Edge Plot (15 MHz Ch.21100 QPSK_RB75_Offset 0)

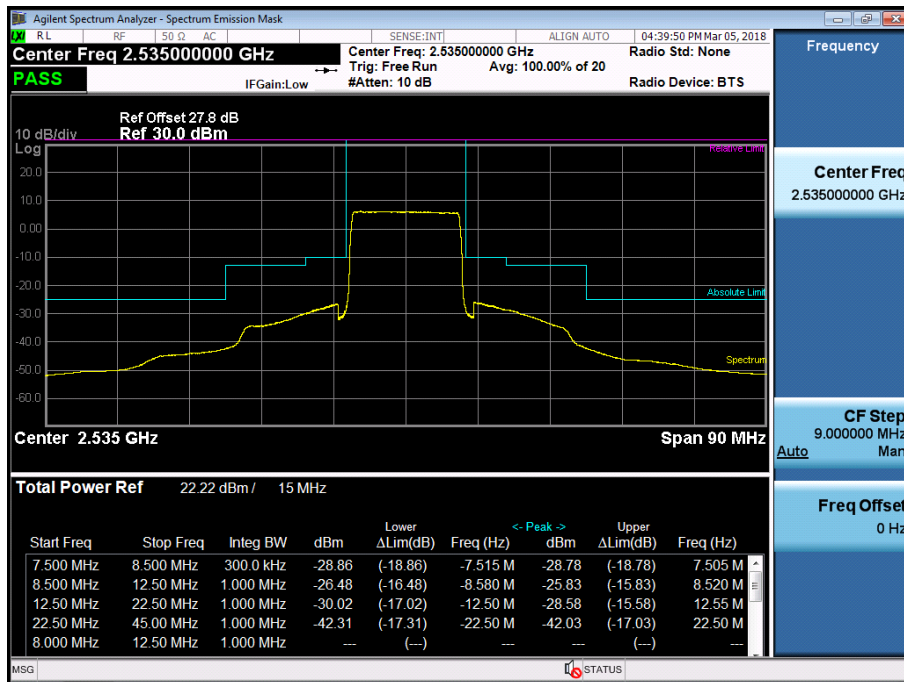

BAND 7. High Channel Edge Plot (15 MHz Ch.21375 QPSK_RB75_Offset 0)

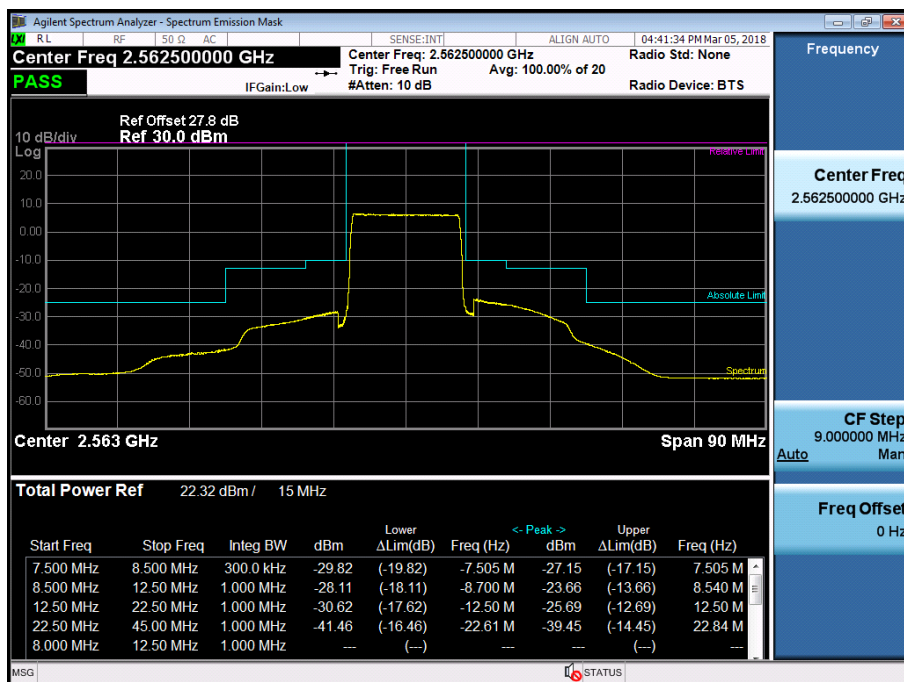


BAND 7. Low Channel Edge Plot (20 MHz Ch.20850 QPSK_RB100_Offset 0)-1




BAND 7. Low Channel Edge Plot (20 MHz Ch.20850 QPSK_RB100_Offset 0)-2




BAND 7. Mid Channel Edge Plot (20 MHz Ch.21100 QPSK_RB100_Offset 0)

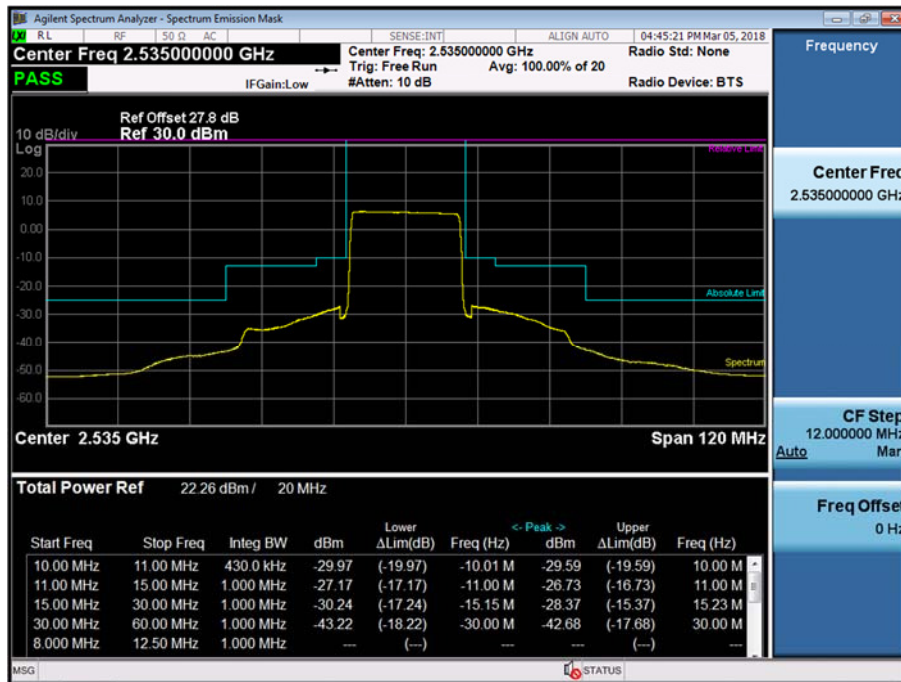

BAND 7. High Channel Edge Plot (20 MHz Ch.21350 QPSK_RB100_Offset 0)

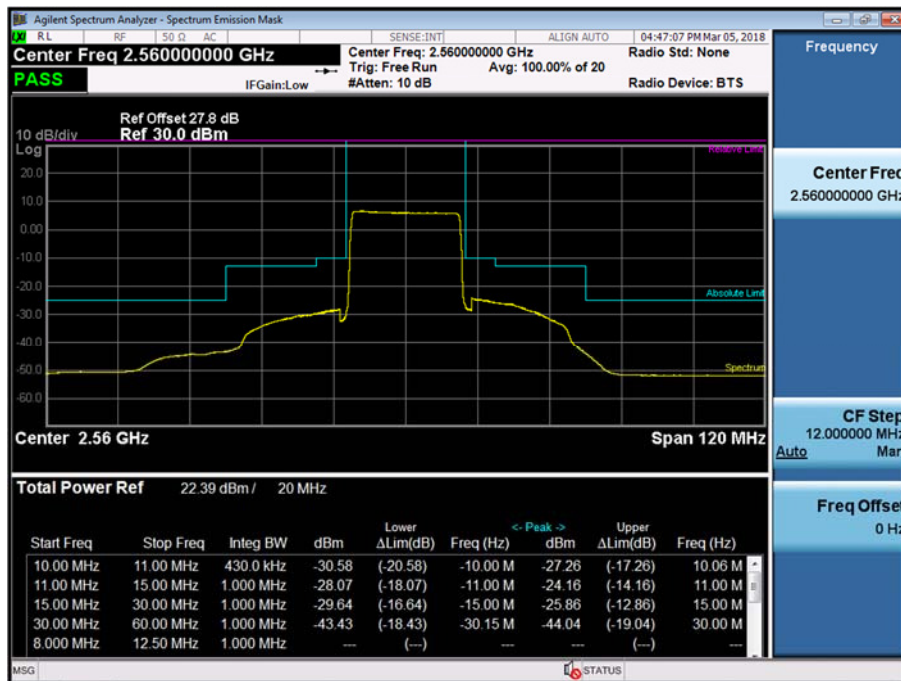


BAND 7. Conducted Spurious Plot 1 (5 MHz Ch.20775 QPSK RB 1, Offset 0)

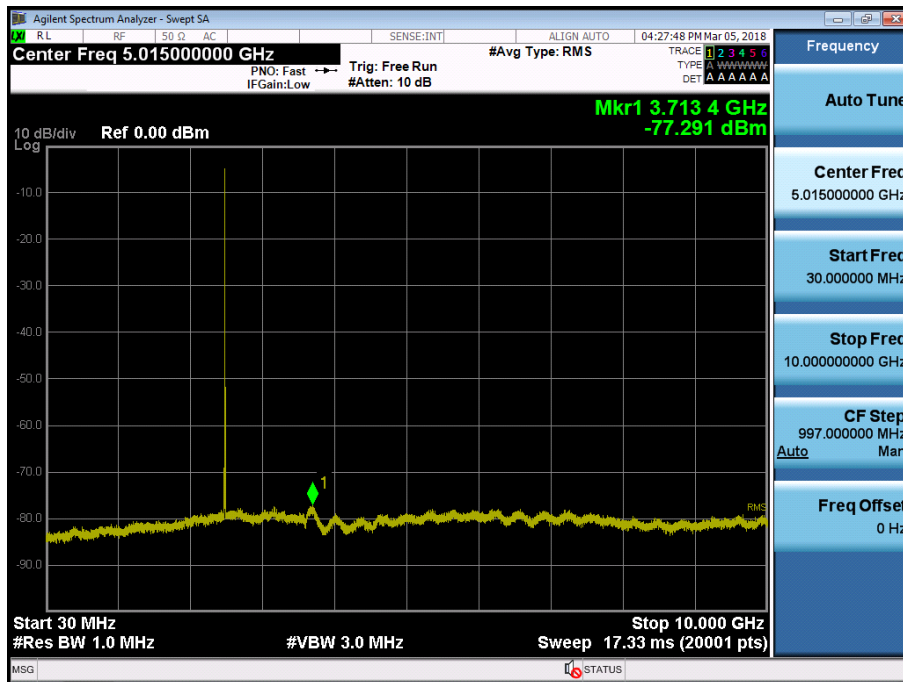

BAND 7. Conducted Spurious Plot 2 (5 MHz Ch. 20775 QPSK RB 1, Offset 0)




BAND 7. Conducted Spurious Plot 1 (5 MHz Ch.21100 QPSK RB 1, Offset 0)

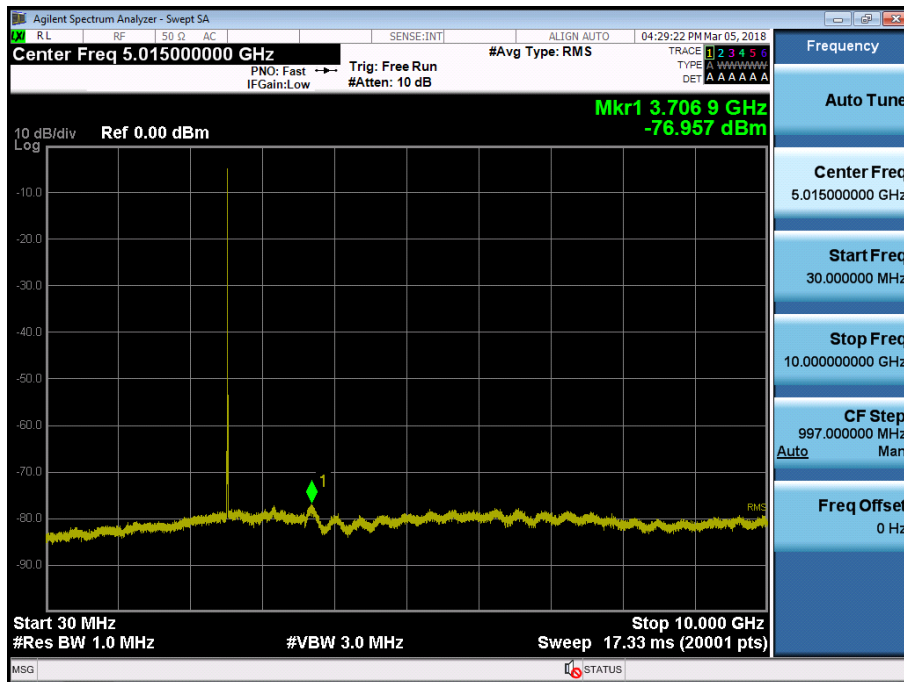

BAND 7. Conducted Spurious Plot 2 (5 MHz Ch. 21100 QPSK RB 1, Offset 0)




BAND 7. Conducted Spurious Plot 1 (5 MHz Ch.21425 QPSK RB 1, Offset 0)

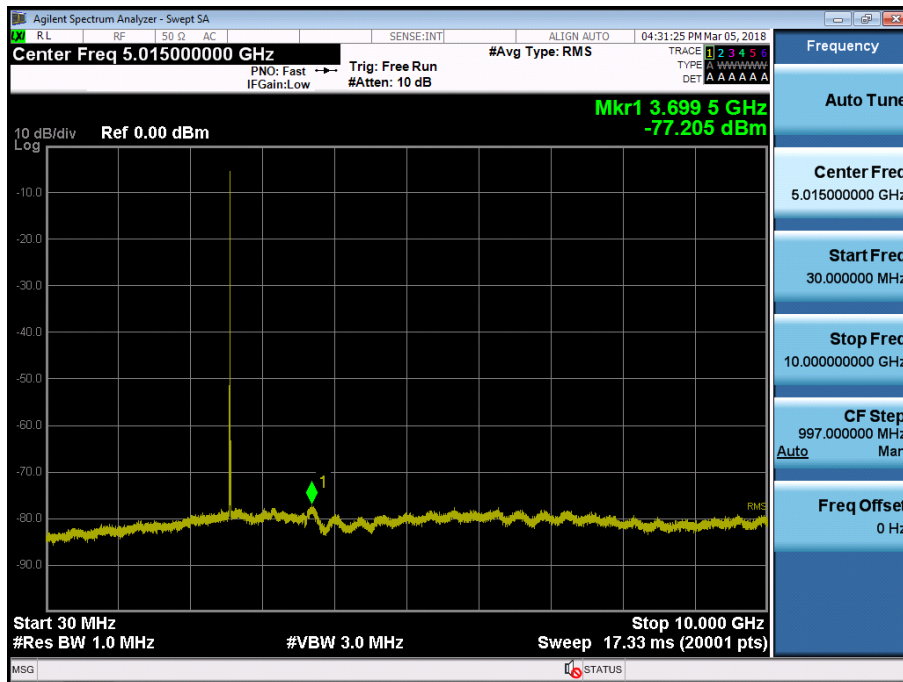


BAND 7. Conducted Spurious Plot 2 (5 MHz Ch. 21425 QPSK RB 1, Offset 0)




BAND 7. Conducted Spurious Plot 1 (10 MHz Ch.20800 QPSK RB 1, Offset 0)

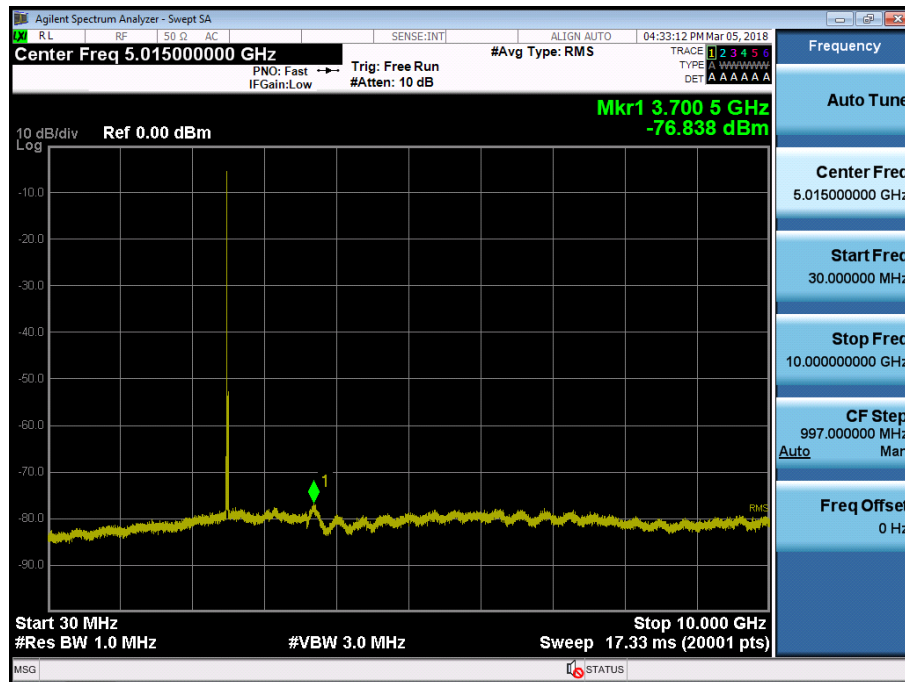


BAND 7. Conducted Spurious Plot 2 (10 MHz Ch. 20800 QPSK RB 1, Offset 0)

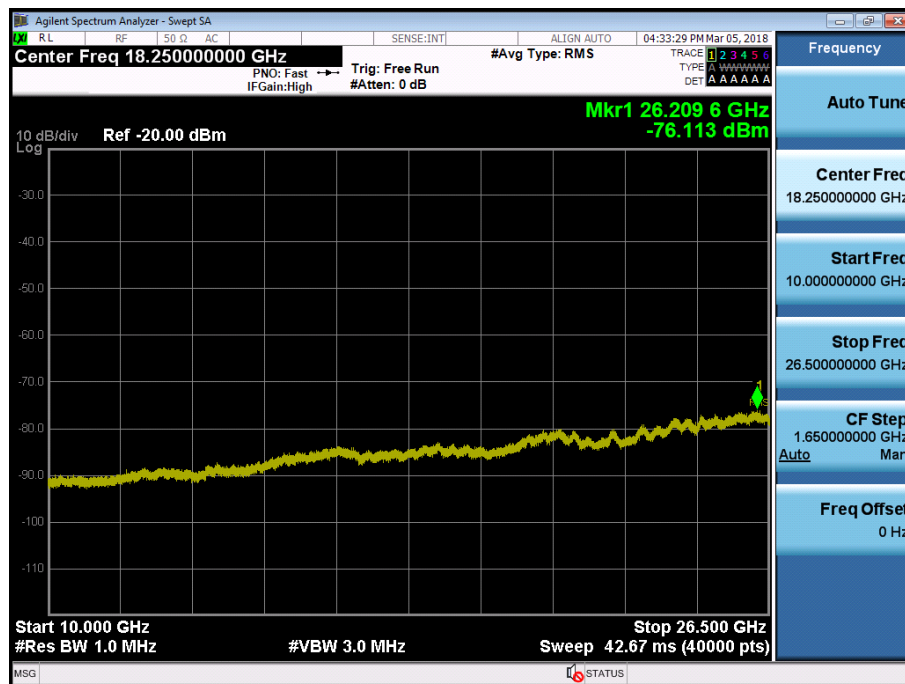


BAND 7. Conducted Spurious Plot 1 (10 MHz Ch.21100 QPSK RB 1, Offset 0)

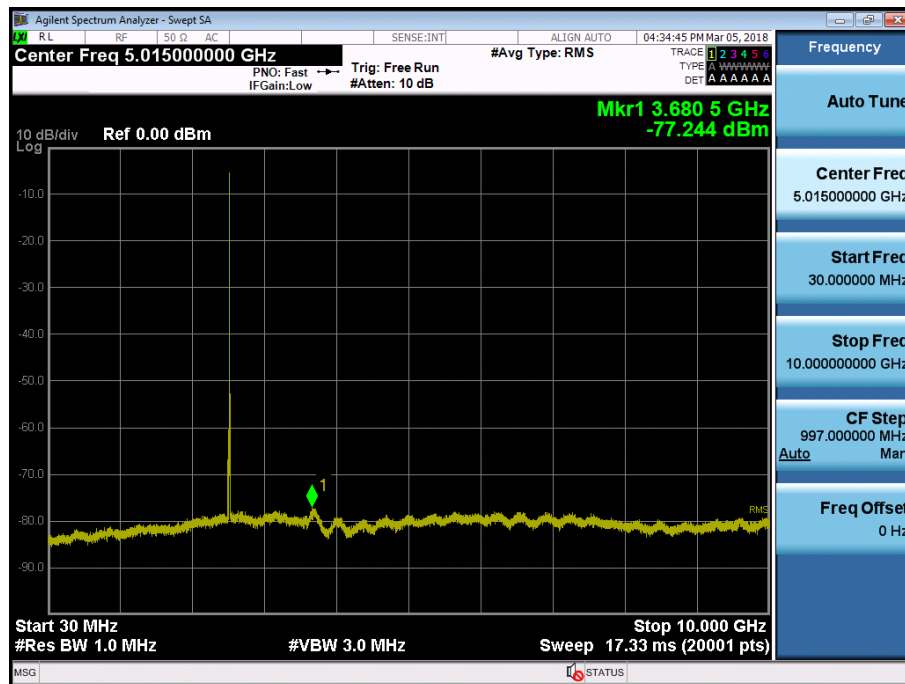


BAND 7. Conducted Spurious Plot 2 (10 MHz Ch. 21100 QPSK RB 1, Offset 0)

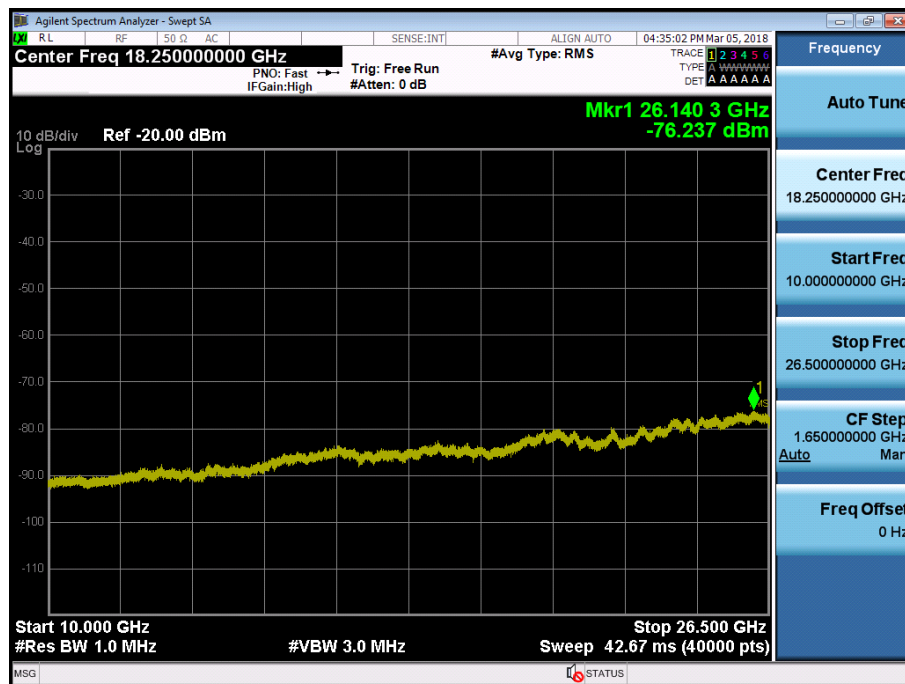


BAND 7. Conducted Spurious Plot 1 (10 MHz Ch. 21400 QPSK RB 1, Offset 0)

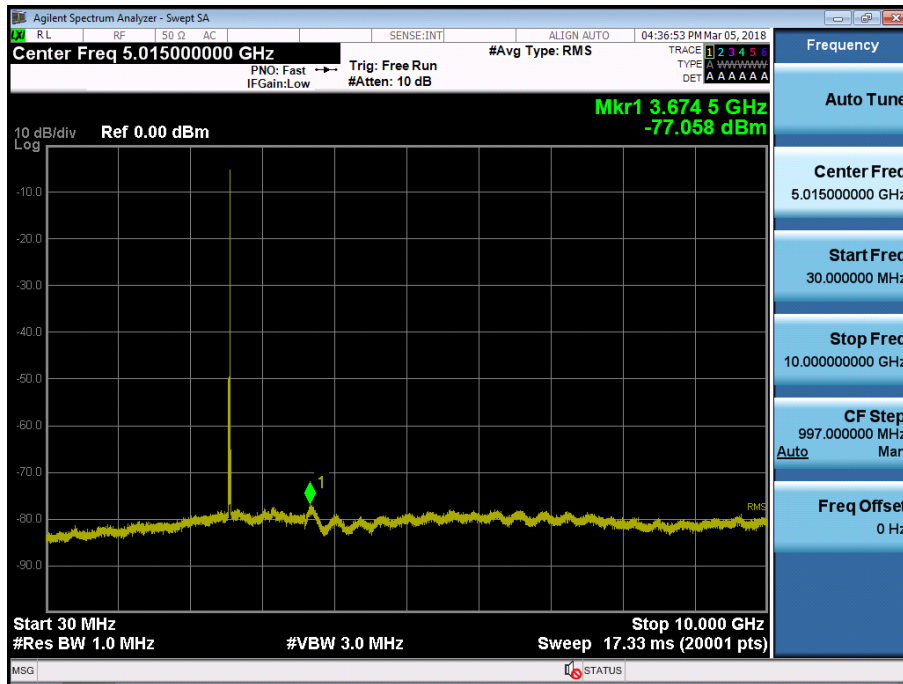


BAND 7. Conducted Spurious Plot 2 (10 MHz Ch. 21400 QPSK RB 1, Offset 0)

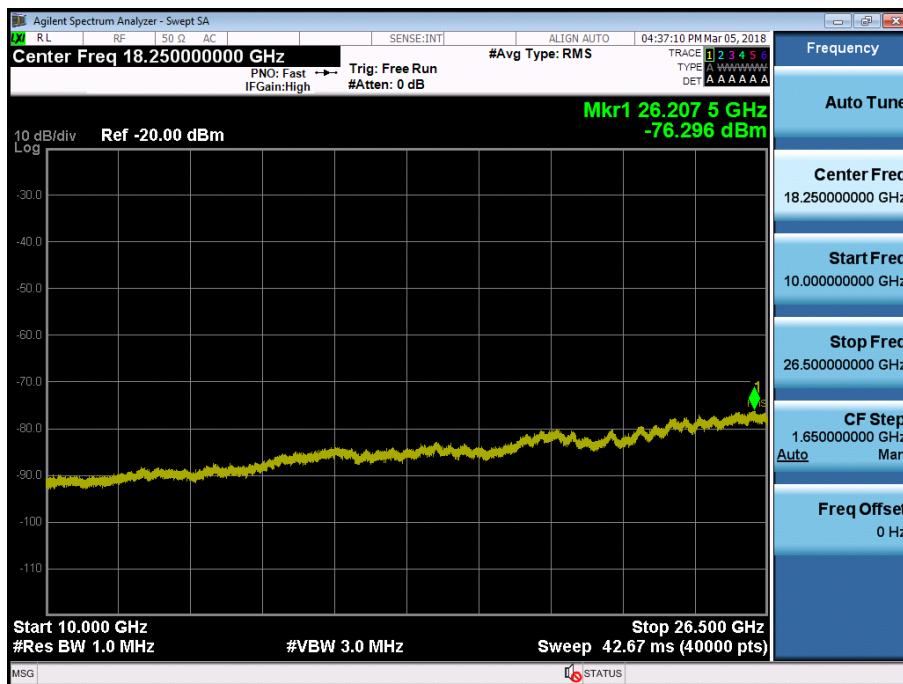


BAND 7. Conducted Spurious Plot 1 (15 MHz Ch.20825 QPSK RB 1, Offset 0)

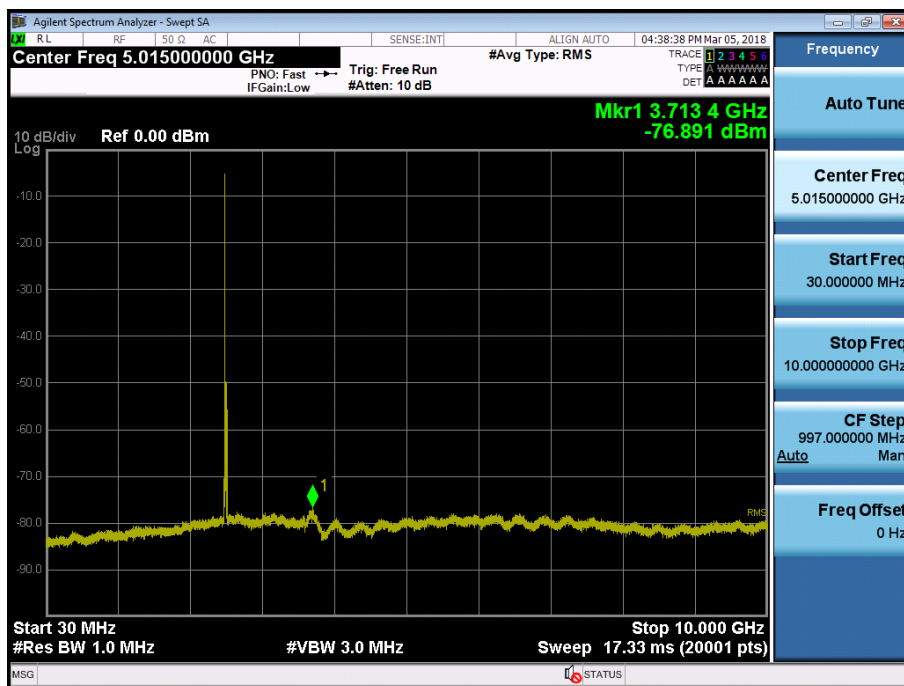


BAND 7. Conducted Spurious Plot 2 (15 MHz Ch. 20825 QPSK RB 1, Offset 0)

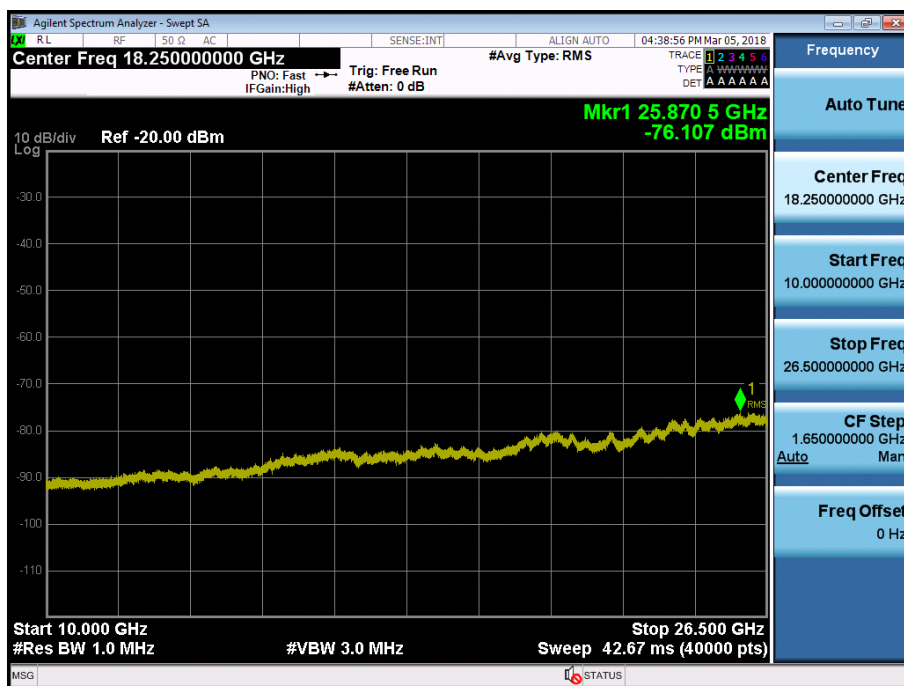


BAND 7. Conducted Spurious Plot 1 (15 MHz Ch.21100 QPSK RB 1, Offset 0)

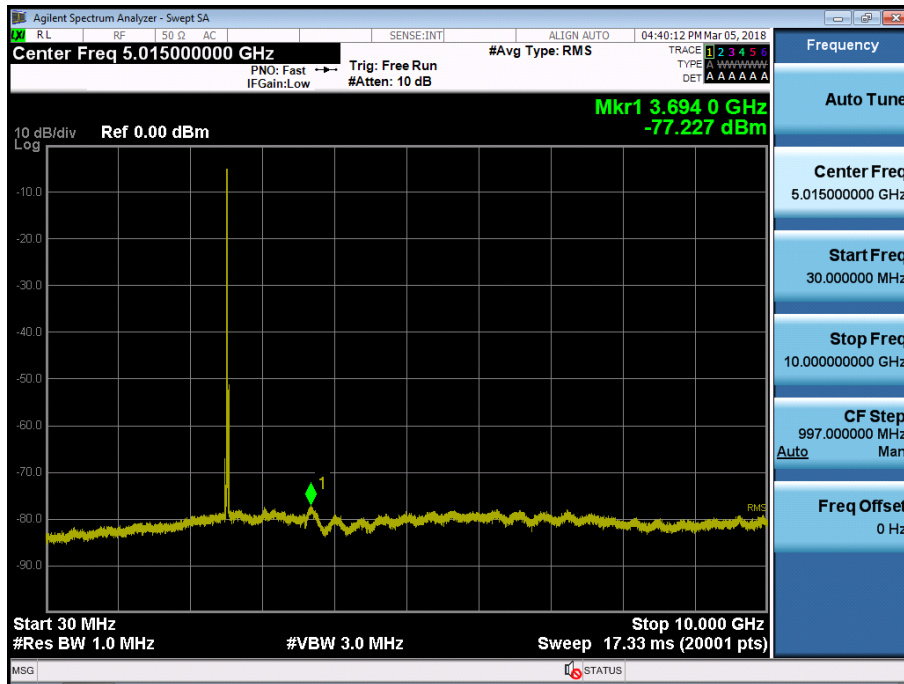

BAND 7. Conducted Spurious Plot 2 (15 MHz Ch. 21100 QPSK RB 1, Offset 0)

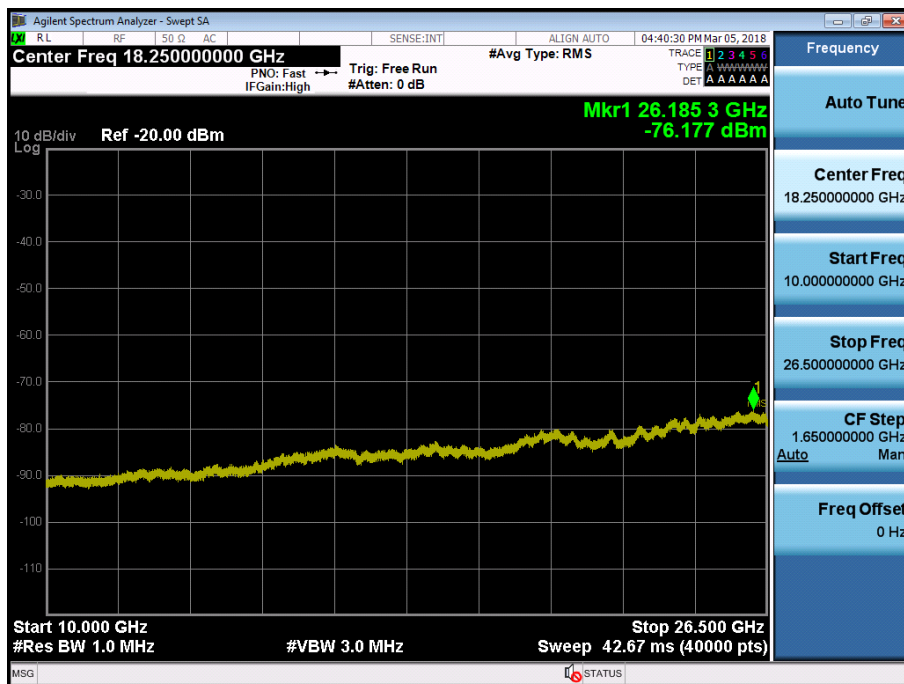


BAND 7. Conducted Spurious Plot 1 (15 MHz Ch.21375 QPSK RB 1, Offset 0)

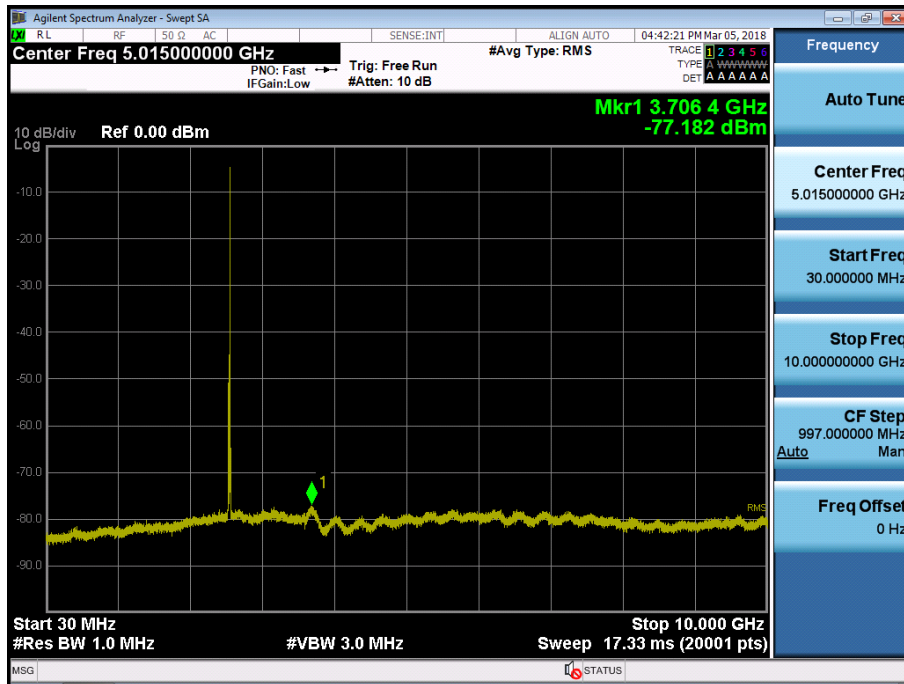


BAND 7. Conducted Spurious Plot 2 (15 MHz Ch. 21375 QPSK RB 1, Offset 0)




BAND 7. Conducted Spurious Plot 1 (20 MHz Ch.20850 QPSK RB 1, Offset 0)

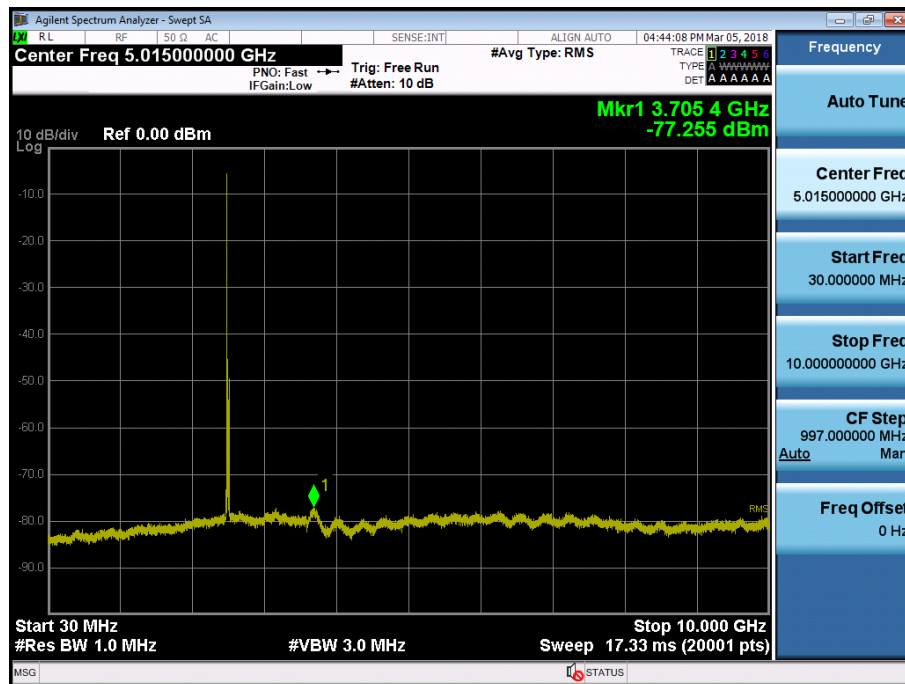


BAND 7. Conducted Spurious Plot 2 (20 MHz Ch. 20850 QPSK RB 1, Offset 0)

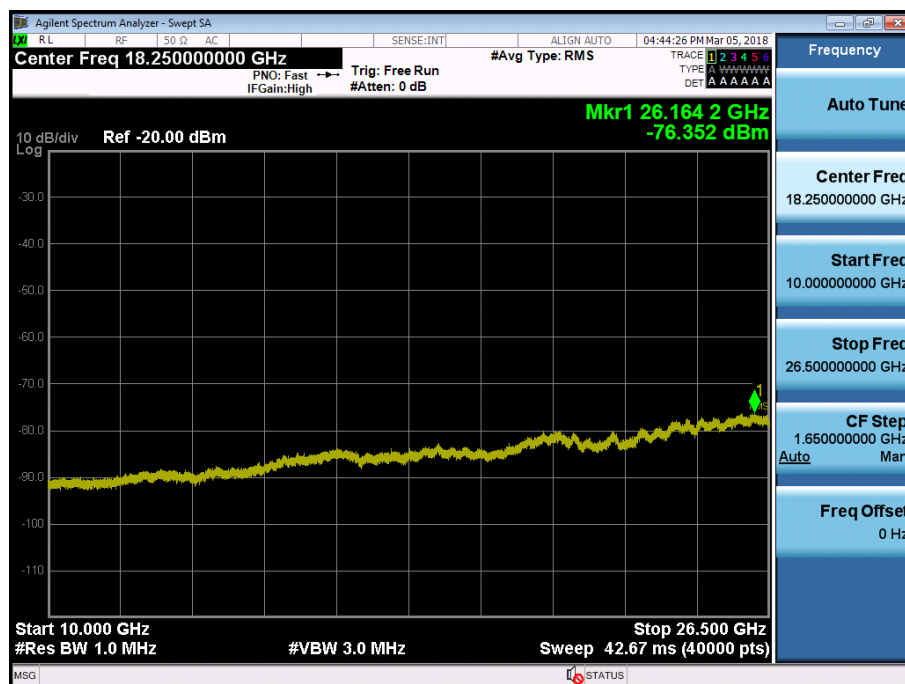


BAND 7. Conducted Spurious Plot 1 (20 MHz Ch.21100 QPSK RB 1, Offset 0)

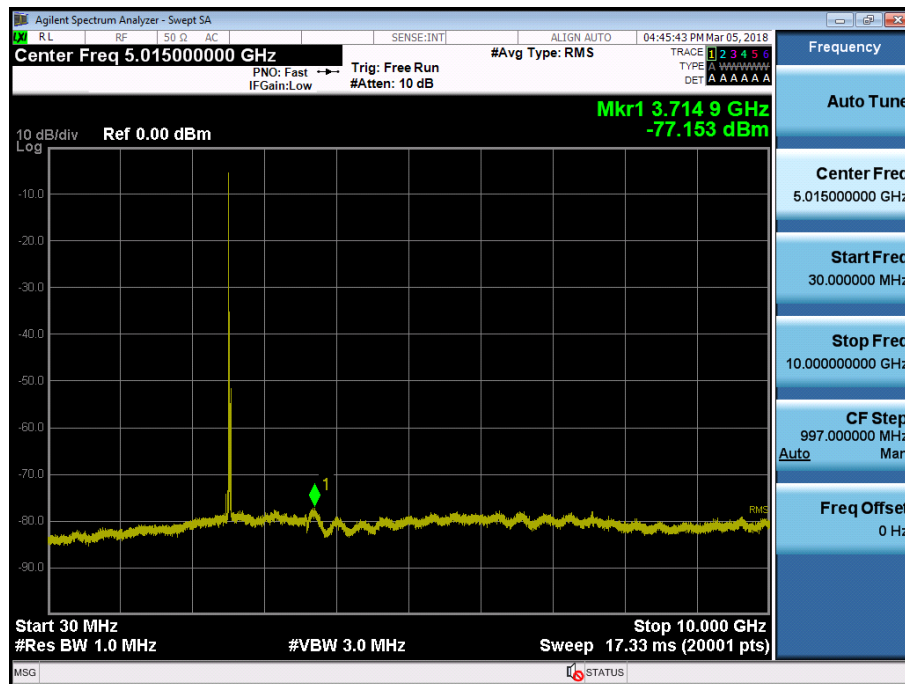

BAND 7. Conducted Spurious Plot 2 (20 MHz Ch. 21100 QPSK RB 1, Offset 0)

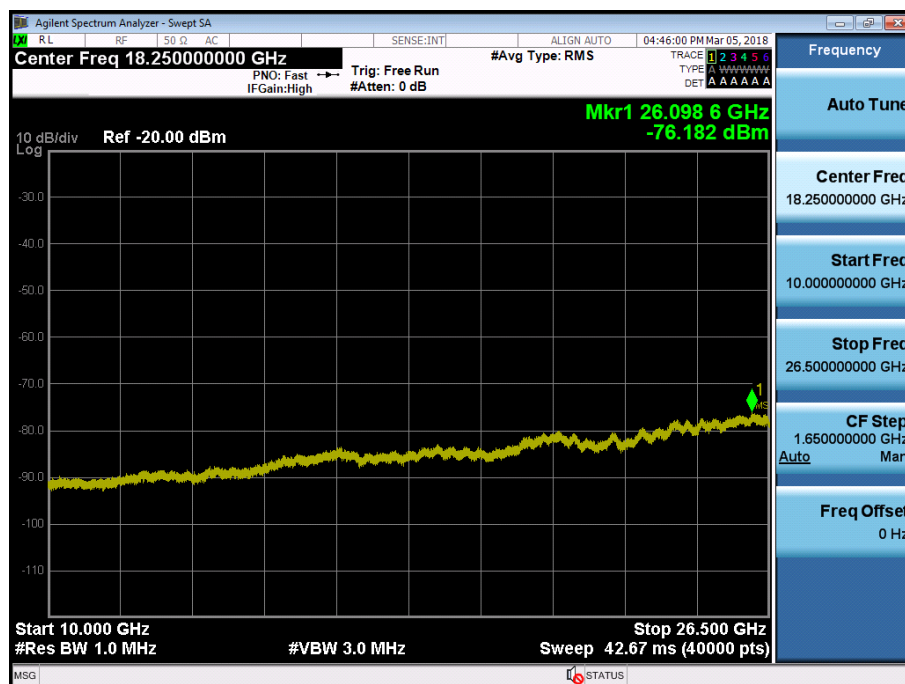

BAND 7. Conducted Spurious Plot 1 (20 MHz Ch.21350 QPSK RB 1, Offset 0)

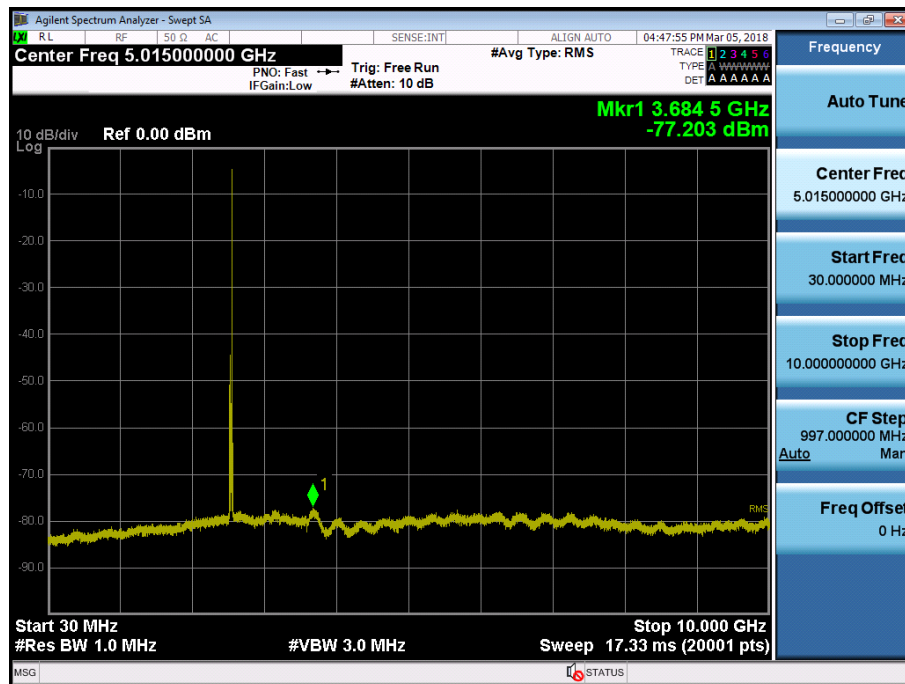

BAND 7. Conducted Spurious Plot 2 (20 MHz Ch. 21350 QPSK RB 1, Offset 0)

