



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.pctest.com>



## MEASUREMENT REPORT FCC PART 15.247 WLAN 802.11b/g/n

**Applicant Name:**

LG Electronics MobileComm U.S.A  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**

10/02-10/16/2017

**Test Site/Location:**

PCTEST Lab. Columbia, MD, USA

**Test Report Serial No.:**

1M1710020259-05.ZNF

**FCC ID:**

**ZNFX210MA**

**APPLICANT:**

**LG Electronics MobileComm U.S.A**

**Application Type:**

Class II Permissive Change

**Model:**

LM-X210MA

**Additional Model(s):**

LMX210MA, X210MA, LM-X210TA, LMX210TA, X210TA, LM-X210TAT, LMX210TAT, X210TAT

**EUT Type:**

Portable Handset

**Frequency Range:**

2412 – 2462MHz

**FCC Classification:**

Digital Transmission System (DTS)

**FCC Rule Part(s):**

Part 15 Subpart C (15.247)

**Test Procedure(s):**

ANSI C63.10-2013, KDB 558074 D01 v04

**Class II Permissive Change:**

Please see FCC change document

**Original Grant Date:**

10/12/2017

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v04. Test results reported herein relate only to the item(s) tested.

Note: This revised test report (1M1710020259-05-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Orbanez  
President



FCC ID: ZNFX210MA	 WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset		Page 1 of 26

## T A B L E   O F   C O N T E N T S

---

1.0	INTRODUCTION.....	3
1.1	Scope .....	3
1.2	PCTEST Test Location.....	3
1.3	Test Facility / Accreditations .....	3
2.0	PRODUCT INFORMATION .....	4
2.1	Equipment Description .....	4
2.2	Device Capabilities .....	4
2.3	Test Configuration .....	5
2.4	EMI Suppression Device(s)/Modifications .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure .....	6
3.2	Radiated Emissions.....	6
3.3	Environmental Conditions.....	6
4.0	ANTENNA REQUIREMENTS .....	7
5.0	MEASUREMENT UNCERTAINTY.....	8
6.0	TEST EQUIPMENT CALIBRATION DATA.....	9
7.0	TEST RESULTS.....	10
7.1	Summary.....	10
7.2	Radiated Spurious Emission Measurements – Above 1 GHz.....	11
7.2.1	Radiated Spurious Emission Measurements .....	14
7.2.2	Radiated Restricted Band Edge Measurements .....	19
7.3	Radiated Spurious Emissions Measurements – Below 1GHz .....	22
8.0	CONCLUSION .....	26

FCC ID: ZNFX210MA	 <small>Engineering Laboratory, Inc.</small>	WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset		Page 2 of 26

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: ZNFX210MA	 WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset	Page 3 of 26	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFX210MA**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

**Test Device Serial No.:** 71751

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE)

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

**Table 2-1. Frequency/ Channel Operations**

**Note:** The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v04. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Maximum Achievable Duty Cycles		
802.11 Mode/Band		Duty Cycle [%]
		ANT1
2.4GHz	b	99.8
	g	99.1
	n	99.1

**Table 2-2. Measured Duty Cycles**

**Data Rates Supported:** 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)  
 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (g)  
 6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,  
 52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n)

FCC ID: ZNFX210MA		WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset		Page 4 of 26

## 2.3 Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Section 3.2 for radiated emissions test setups.

## 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: ZNFX210MA	 <b>WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>			 <b>Approved by:</b> Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset		Page 5 of 26

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v04 were used in the measurement of the EUT.

**Deviation from measurement procedure.....**None

### 3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: ZNFX210MA	 WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		 Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset	Page 6 of 26

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

### Conclusion:

The EUT unit complies with the requirement of §15.203.

FCC ID: ZNFX210MA	 PCTEST ENGINEERING LABORATORY, INC.		WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset			Page 7 of 26

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFX210MA		WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset		Page 8 of 26

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	6/21/2017	Annual	6/21/2018	RE1
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2017	Biennial	10/10/2019	121034
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	6/21/2017	Annual	6/21/2018	441119
Emco	3115	Horn Antenna (1-18GHz)	3/10/2016	Biennial	3/10/2018	9704-5182
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
PCTEST	-	EMC Switch System	6/21/2017	Annual	6/21/2018	NM1
PCTEST	-	EMC Switch System	6/21/2017	Annual	6/21/2018	NM2
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	4/19/2017	Annual	4/19/2018	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/31/2017	Annual	7/31/2018	100348
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	3/14/2016	Biennial	3/14/2018	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

FCC ID: ZNFX210MA		WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset		Page 9 of 26

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: LG Electronics MobileComm U.S.A

FCC ID: ZNFX210MA

FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Sections 7.2, 7.2.2

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

FCC ID: ZNFX210MA	 <b>PCTEST</b> <small>Engineering Laboratory, Inc.</small>	WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 <b>LG</b>	Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset		Page 10 of 26

## 7.2 Radiated Spurious Emission Measurements – Above 1 GHz

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-2 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

**Table 7-2. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

KDB 558074 D01 v04 – Section 12.1, 12.2.7

### Test Settings

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times$  span/RBW)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: ZNFX210MA	 <b>WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		 <b>Approved by:</b> Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset	Page 11 of 26

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

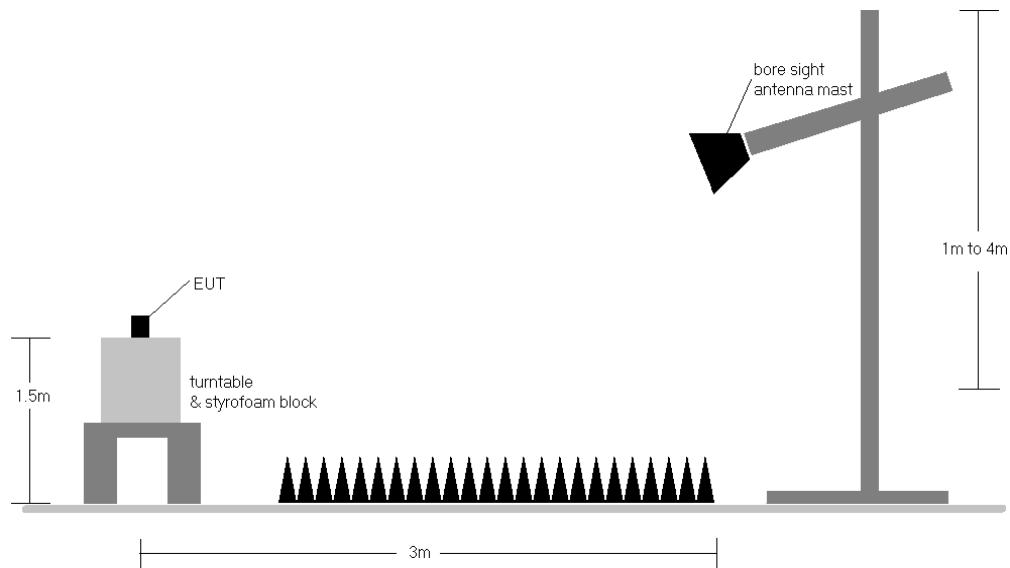

**Figure 7-1. Test Instrument & Measurement Setup**

## Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v04 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in Section 15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-2.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the

FCC ID: ZNFX210MA		WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset		Page 12 of 26

results are shown in this section. Rohde & Schwarz EMC32, Version 9.15.00 automated test software was used to perform the Radiated Spurious Emissions Pre-Scan testing.

8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

## Sample Calculations

### Determining Spurious Emissions Levels

- Field Strength Level [ $\text{dB}_{\mu\text{V/m}}$ ] = Analyzer Level [ $\text{dBm}$ ] + 107 + AFCL [ $\text{dB/m}$ ]
- AFCL [ $\text{dB/m}$ ] = Antenna Factor [ $\text{dB/m}$ ] + Cable Loss [ $\text{dB}$ ]
- Margin [ $\text{dB}$ ] = Field Strength Level [ $\text{dB}_{\mu\text{V/m}}$ ] – Limit [ $\text{dB}_{\mu\text{V/m}}$ ]

### Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.2 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$


FCC ID: ZNFX210MA	 <b>WLAN MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)		 <b>Approved by:</b> Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset	Page 13 of 26

### 7.2.1 Radiated Spurious Emission Measurements


§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

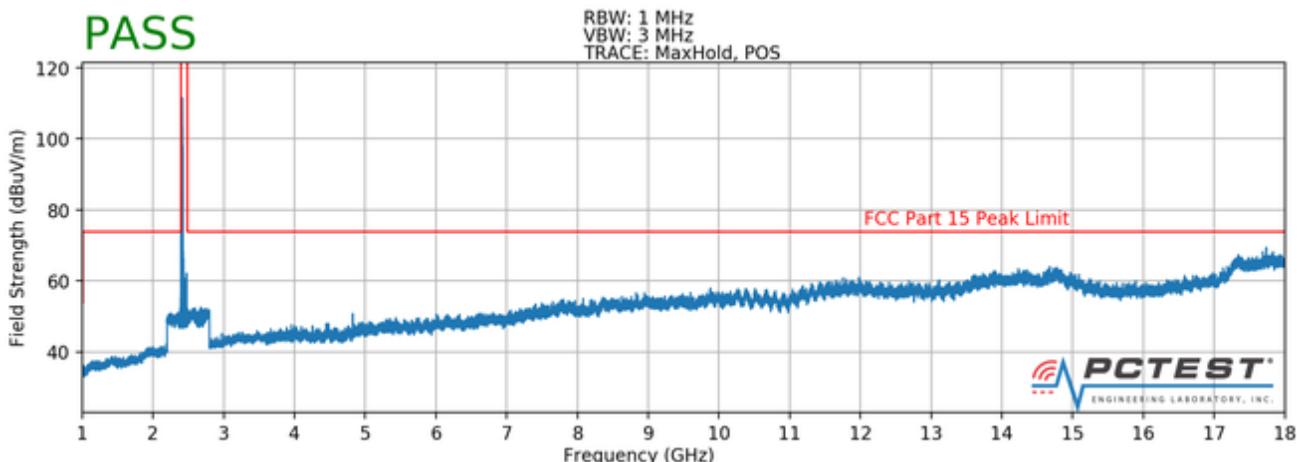

Plot 7-1. Radiated Spurious Plot above 1GHz (802.11b – Ch. 1, Ant. Pol. H)

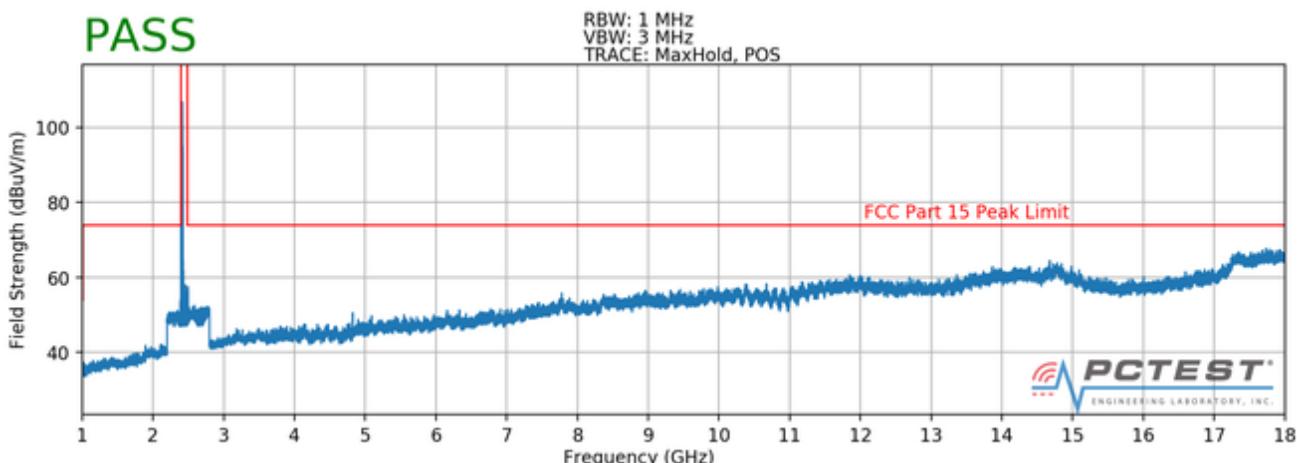


Plot 7-2. Radiated Spurious Plot above 1GHz (802.11b – Ch. 1, Ant. Pol. V)

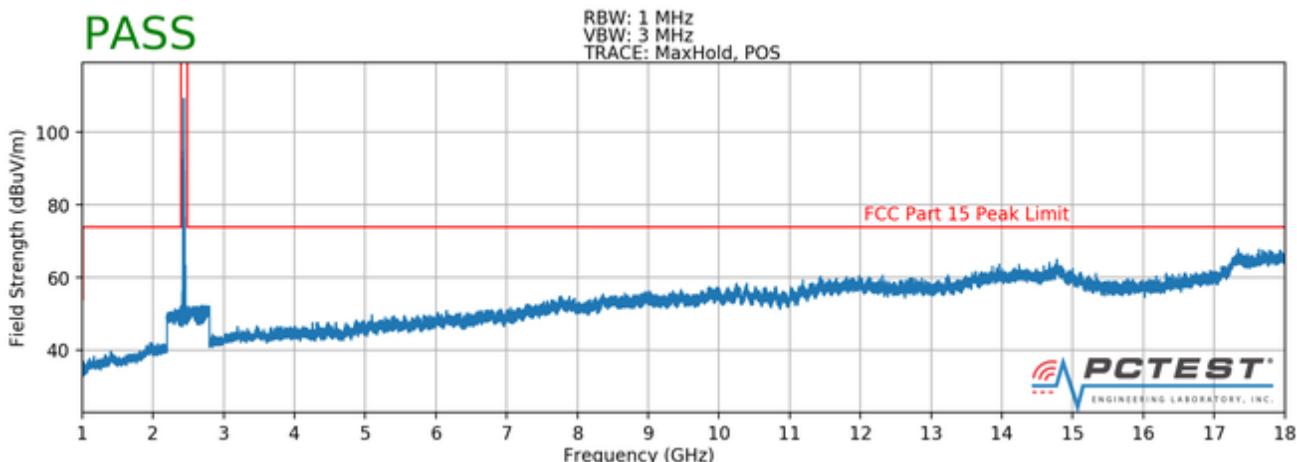



Plot 7-3. Radiated Spurious Plot above 1GHz (802.11b – Ch. 6, Ant. Pol. H)

FCC ID: ZNFX210MA		WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1710020259-5.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset		Page 14 of 26

**PASS**

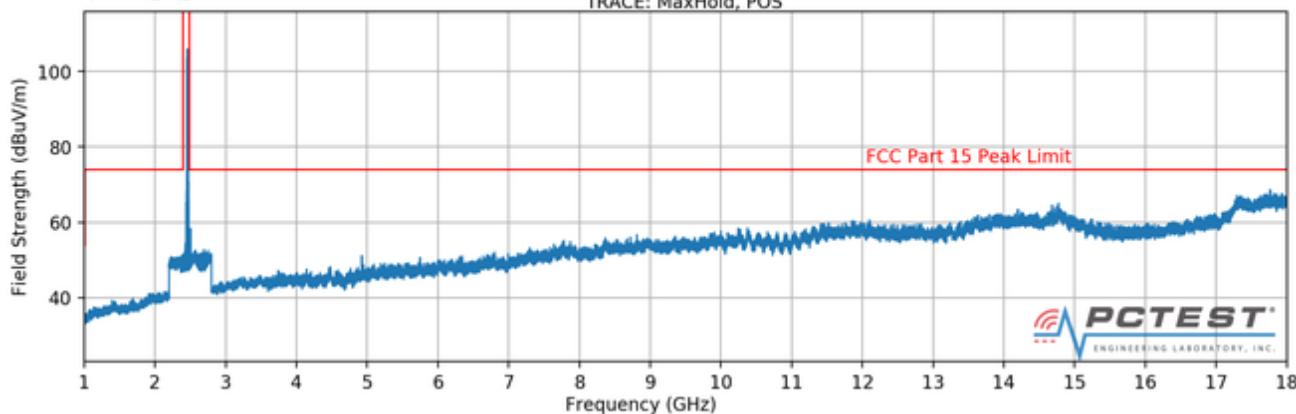 RBW: 1 MHz  
 VBW: 3 MHz  
 TRACE: MaxHold, POS

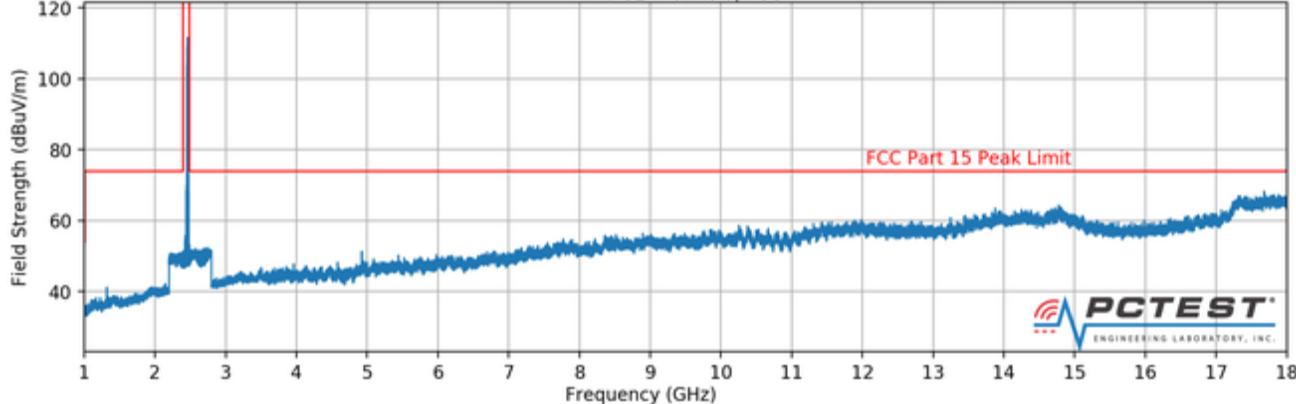**Plot 7-4. Radiated Spurious Plot above 1GHz (802.11b – Ch. 6, Ant. Pol. V)**
**PASS**

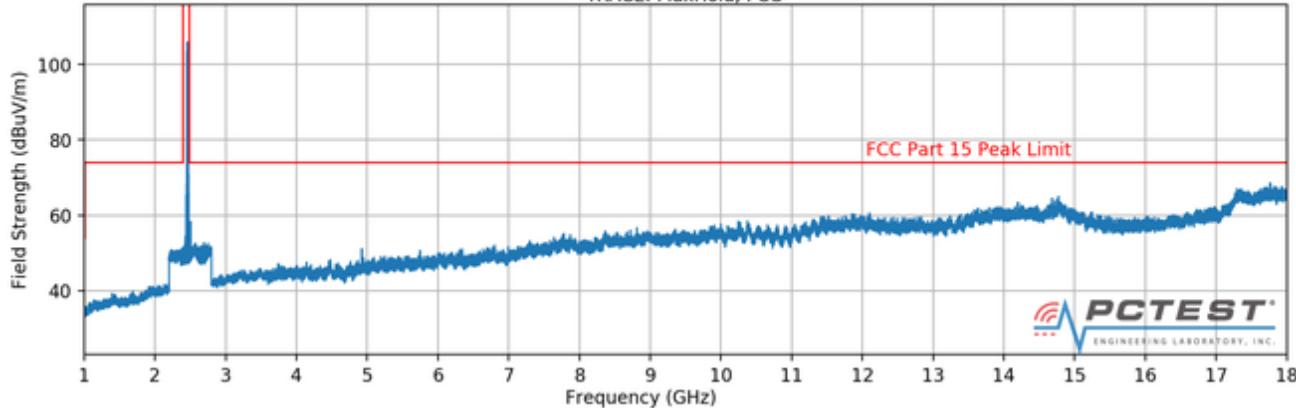
 RBW: 1 MHz  
 VBW: 3 MHz  
 TRACE: MaxHold, POS

**Plot 7-5. Radiated Spurious Plot above 1GHz (802.11b – Ch. 11, Ant. Pol. H)**
**PASS**

 RBW: 1 MHz  
 VBW: 3 MHz  
 TRACE: MaxHold, POS

**Plot 7-6. Radiated Spurious Plot above 1GHz (802.11b – Ch. 11, Ant. Pol. V)**


FCC ID: ZNFX210MA	 <b>WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		 <b>Approved by:</b> Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset	Page 15 of 26
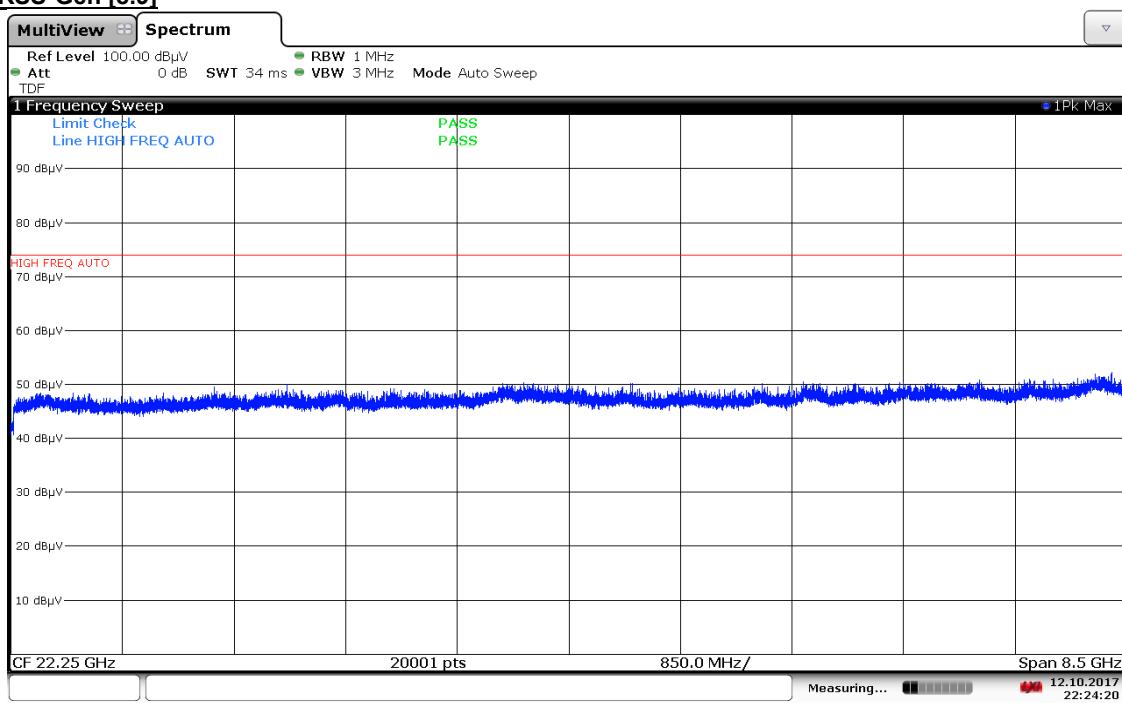
## Radiated Spurious Emissions Measurements (Above 18GHz)

§15.209; RSS-Gen [8.9]



Plot 7-7. Radiated Spurious Plot above 18GHz (Pol. H)

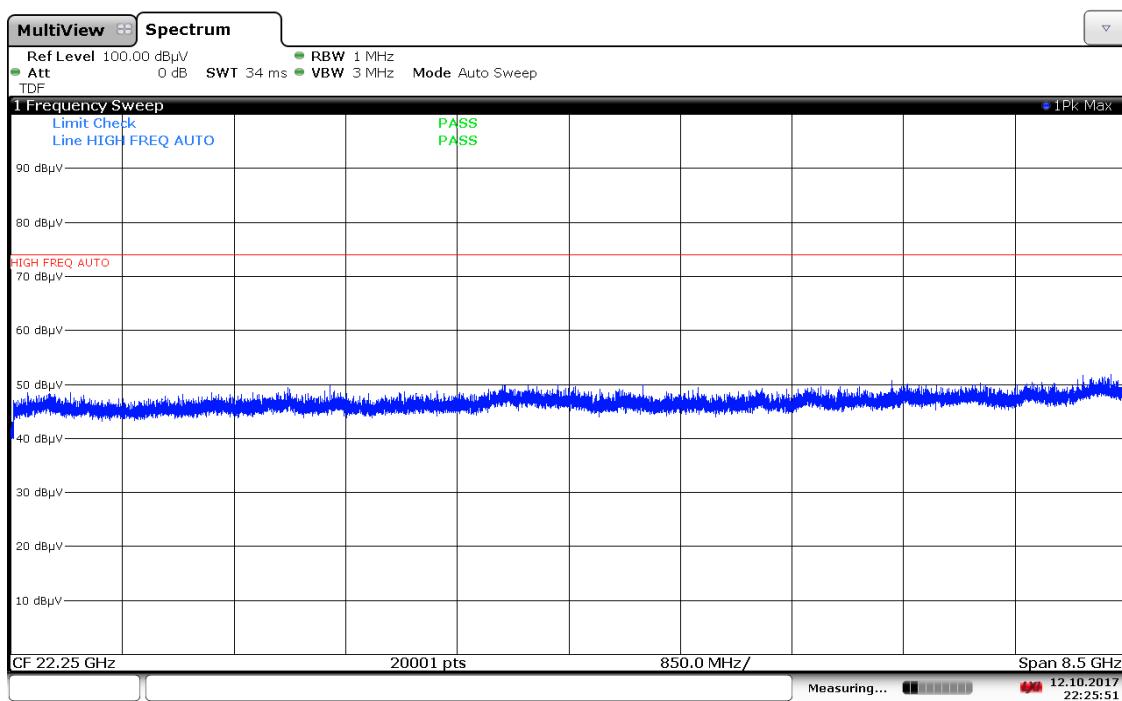

Plot 7-8. Radiated Spurious Plot above 18GHz (Pol. V)

FCC ID: ZNFX210MA	 <b>WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		Approved by: Quality Manager
Test Report S/N: 1M1710020259-5.ZNF	Test Dates: 10/02/10/16/2017	EUT Type: Portable Handset	Page 16 of 26

## Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4824.00	Avg	H	122	298	-62.19	2.80	47.61	53.98	-6.37
4824.00	Peak	H	122	298	-57.78	2.80	52.02	73.98	-21.96
12060.00	Avg	H	-	-	-75.16	15.69	47.53	53.98	-6.45
12060.00	Peak	H	-	-	-63.65	15.69	59.04	73.98	-14.94

Table 7-3. Radiated Measurements

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4874.00	Avg	H	100	304	-64.42	4.09	46.67	53.98	-7.31
4874.00	Peak	H	100	304	-58.86	4.09	52.23	73.98	-21.75
7311.00	Avg	H	-	-	-75.76	9.68	40.92	53.98	-13.06
7311.00	Peak	H	-	-	-64.02	9.68	52.66	73.98	-21.32
12185.00	Avg	H	-	-	-75.77	16.46	47.69	53.98	-6.29
12185.00	Peak	H	-	-	-64.12	16.46	59.34	73.98	-14.64

Table 7-4. Radiated Measurements

FCC ID: ZNFX210MA		WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset		Page 17 of 26

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	Avg	H	104	305	-62.29	3.92	48.63	53.98	-5.35
4924.00	Peak	H	104	305	-58.01	3.92	52.91	73.98	-21.07
7386.00	Avg	H	-	-	-75.67	9.36	40.69	53.98	-13.29
7386.00	Peak	H	-	-	-64.11	9.36	52.25	73.98	-21.73
12310.00	Avg	H	-	-	-75.69	17.64	48.95	53.98	-5.03
12310.00	Peak	H	-	-	-63.92	17.64	60.72	73.98	-13.26

**Table 7-5. Radiated Measurements**

FCC ID: ZNFX210MA	 <b>WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>				Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset			Page 18 of 26

## 7.2.2 Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 1

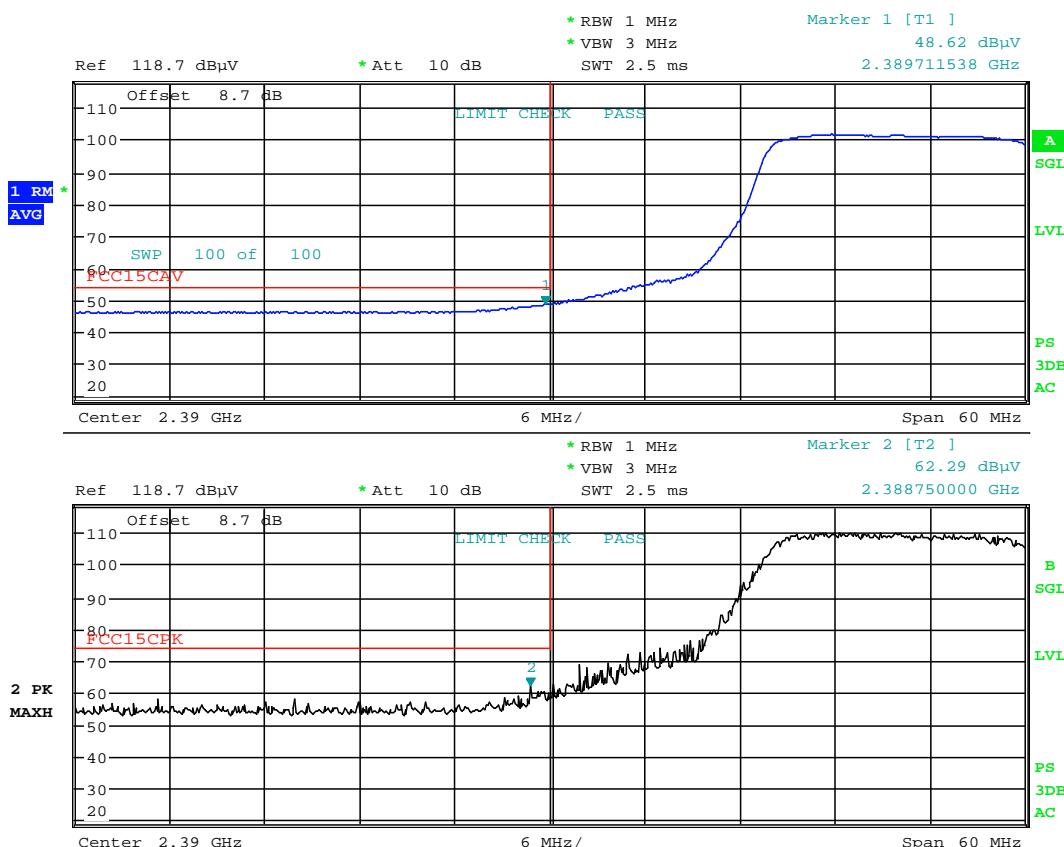

Date: 8.SEP.2017 15:43:30


**Plot 7-9. Radiated Restricted Lower Band Edge Measurement (Average & Peak)**

FCC ID: ZNFX210MA	 <b>WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>			Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset	Page 19 of 26	

## Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11g  
 Worst Case Transfer Rate: 6Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

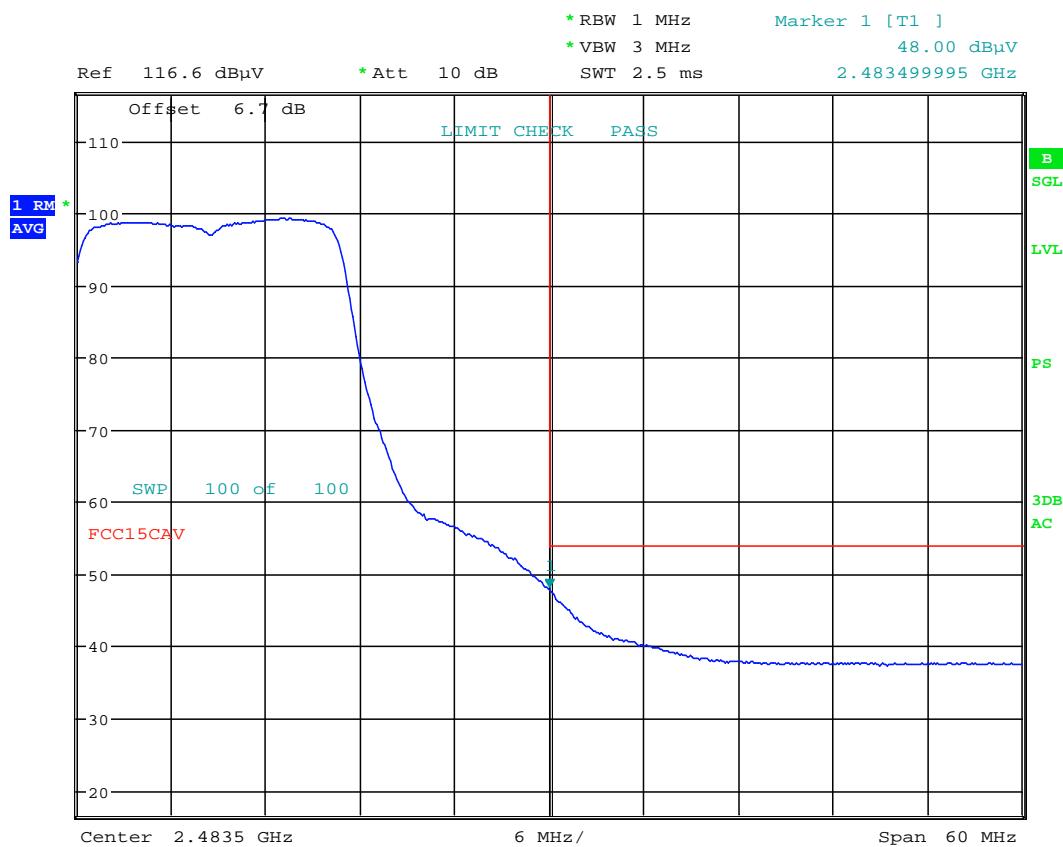


Date: 3.OCT.2017 01:18:55

**Plot 7-10. Radiated Restricted Upper Band Edge Measurement (Average)**

FCC ID: ZNFX210MA	 <b>WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		 Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset	Page 20 of 26

## Radiated Restricted Band Edge Measurements

§15.205 §15.209; RSS-Gen [8.9]

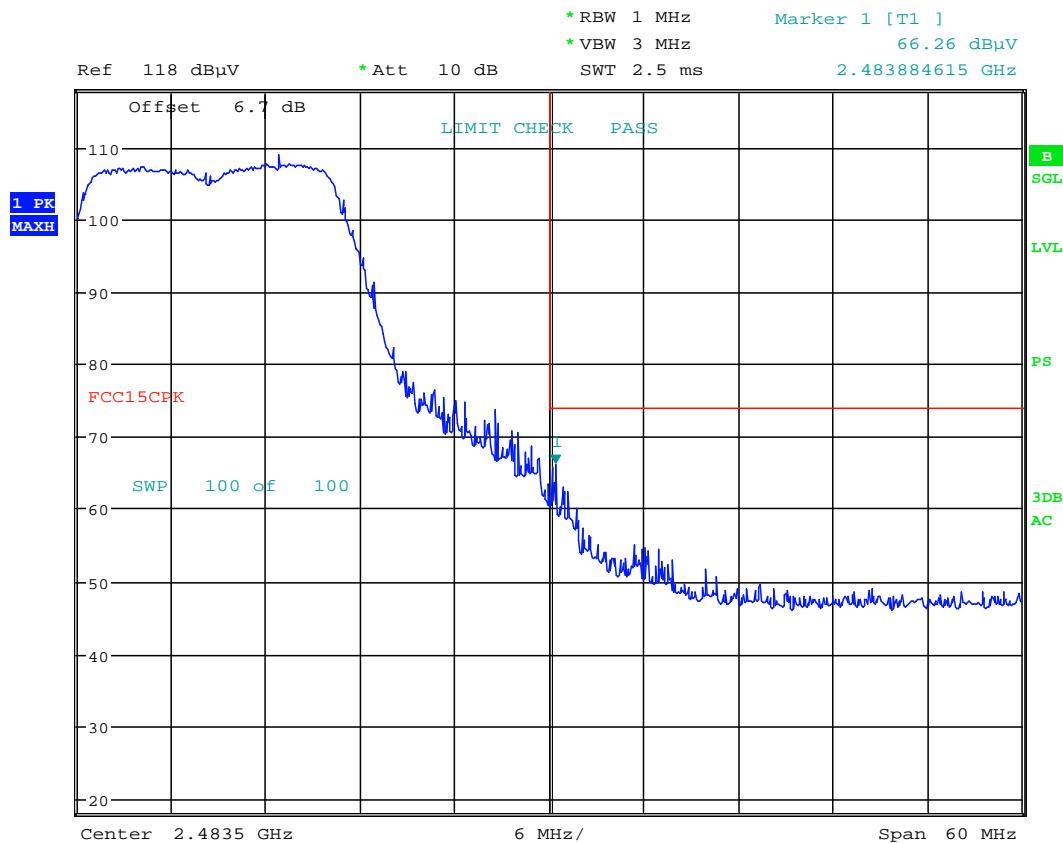

Date: 3.OCT.2017 01:19:58

**Plot 7-11. Radiated Restricted Upper Band Edge Measurement (Peak)**

FCC ID: ZNFX210MA	 WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		LG	Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset	Page 21 of 26	

## 7.3 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-6 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-6. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings


#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


FCC ID: ZNFX210MA		WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset		Page 22 of 26

## Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

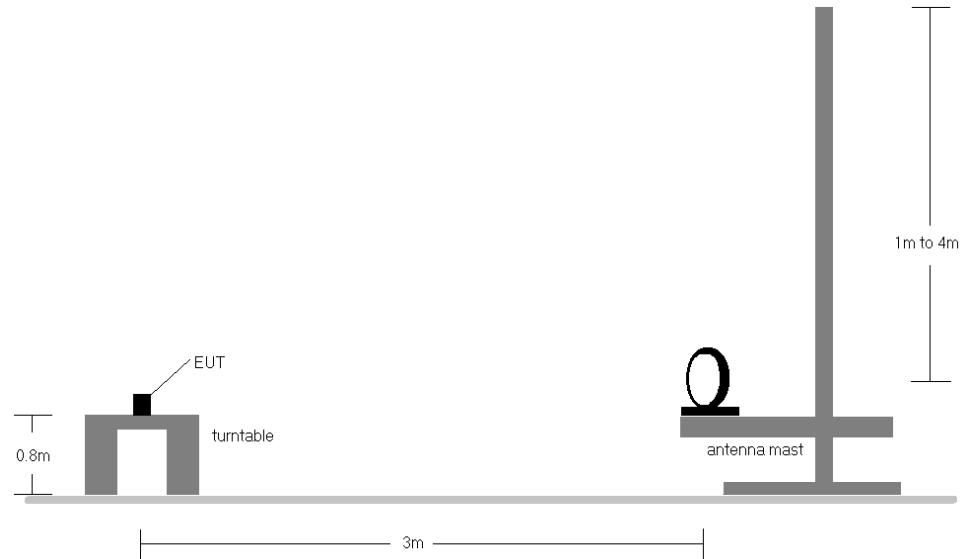

**Figure 7-2. Radiated Test Setup < 30Mhz**

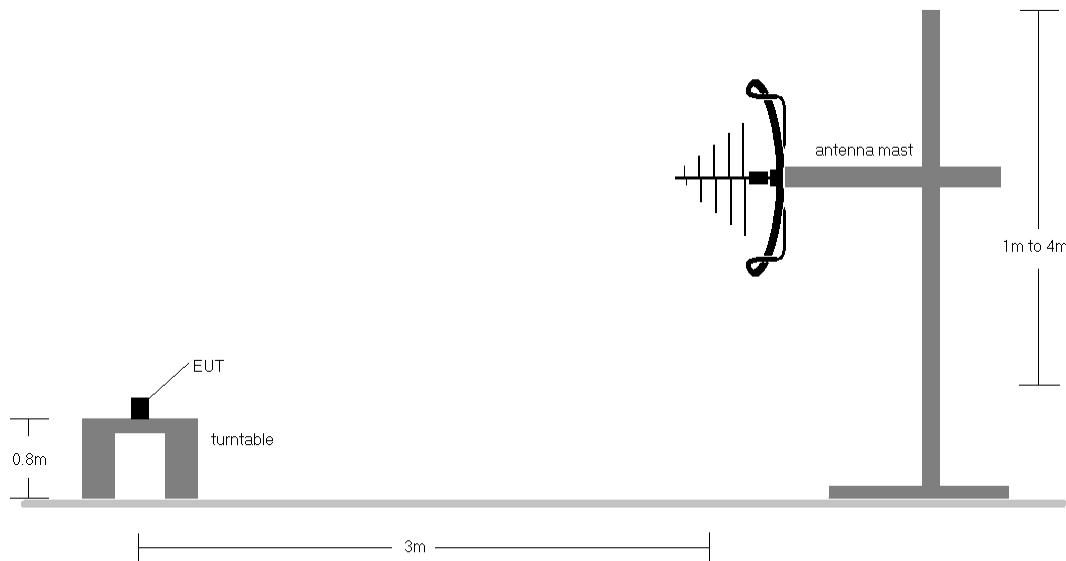

**Figure 7-3. Radiated Test Setup < 1GHz**

FCC ID: ZNFX210MA	 <b>WLAN MEASUREMENT REPORT</b> (CLASS II PERMISSIVE CHANGE)		 Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset	Page 23 of 26


## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-6.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.


FCC ID: ZNFX210MA	 WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)			Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset	Page 24 of 26	

## Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

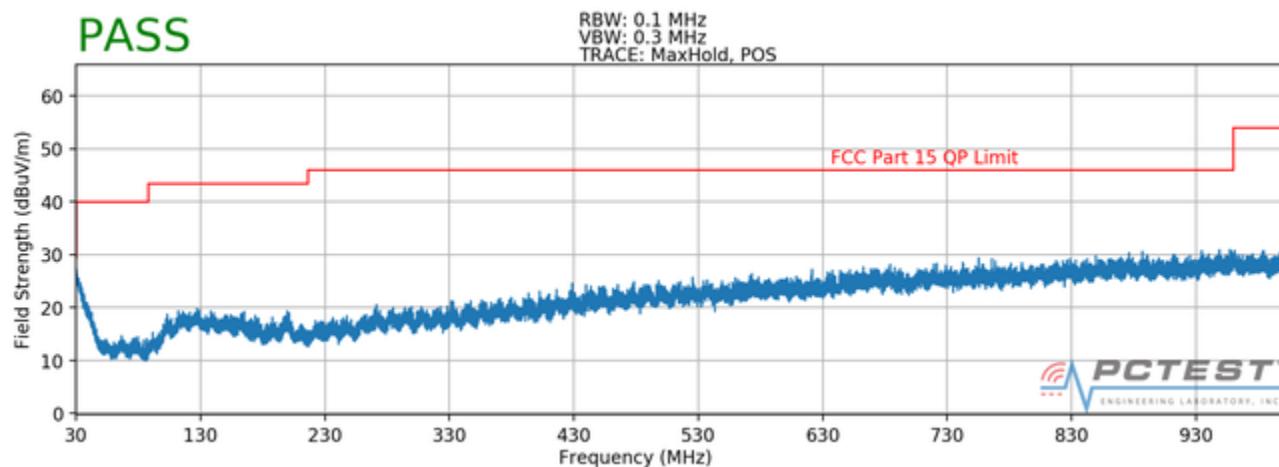

Plot 7-12. Radiated Spurious Plot below 1GHz (Pol. H)

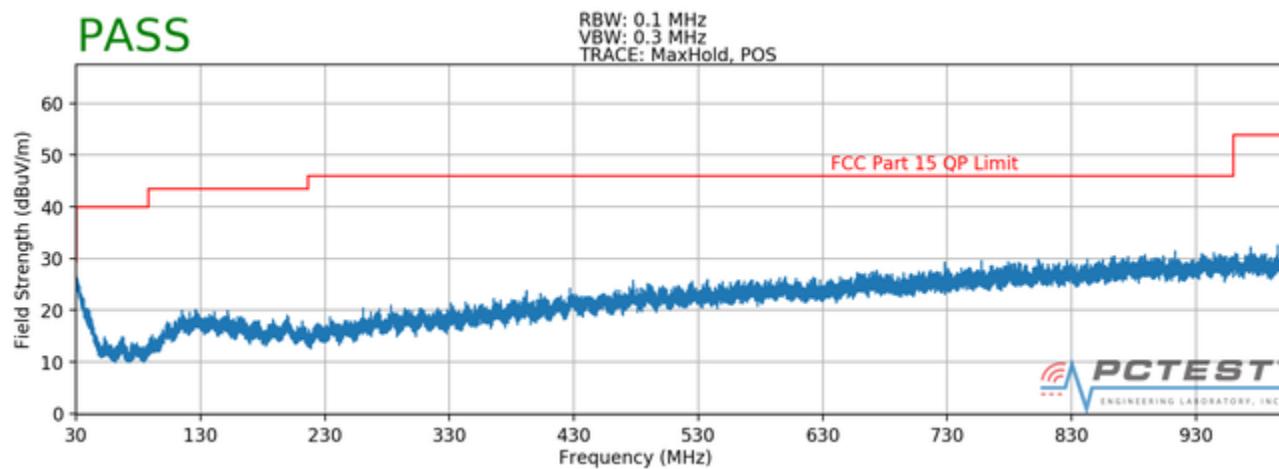

Plot 7-13. Radiated Spurious Plot below 1GHz (Pol. V)

FCC ID: ZNFX210MA		WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset		Page 25 of 26

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Handset** **FCC ID: ZNFX210MA** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules.

FCC ID: ZNFX210MA	 <b>WLAN MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>			Approved by: Quality Manager
Test Report S/N: 1M1710020259-05.ZNF	Test Dates: 10/02-10/16/2017	EUT Type: Portable Handset	Page 26 of 26	